


802.11n-HT40 Out-of-Band Emissions – Ant 2

Channel 09 (2452MHz)

100kHz PSD Reference Level



High Band Edge

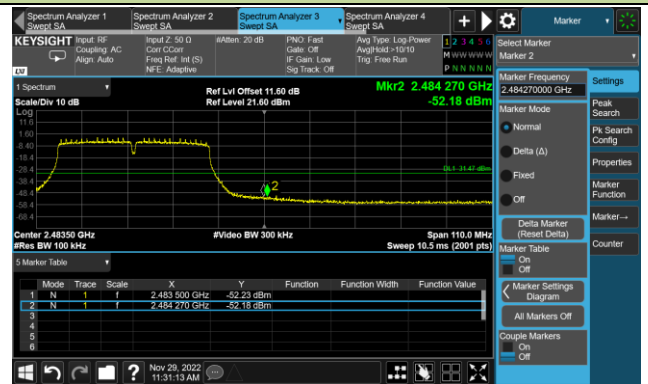

Spurious Emission




### 802.11ax-HE20 Out-of-Band Emissions – Ant 2

#### Channel 01 (2412MHz)

##### 100kHz PSD Reference Level



##### Low Band Edge

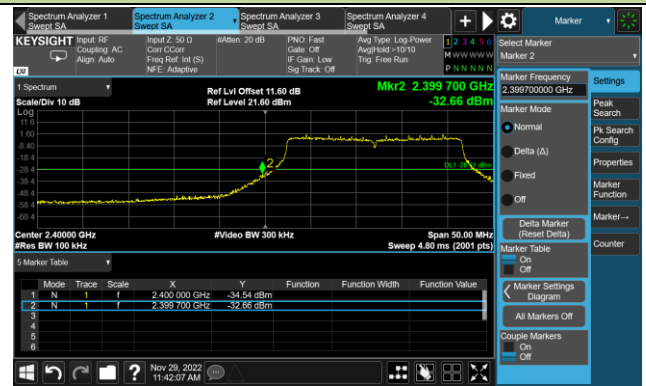

##### Spurious Emission



#### Channel 06 (2437MHz)

##### 100kHz PSD Reference Level



##### Spurious Emission




802.11ax-HE20 Out-of-Band Emissions – Ant 2

Channel 11 (2462MHz)


100kHz PSD Reference Level



High Band Edge

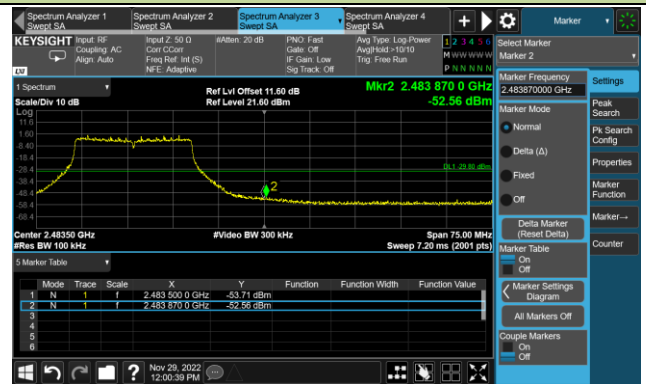


Spurious Emission

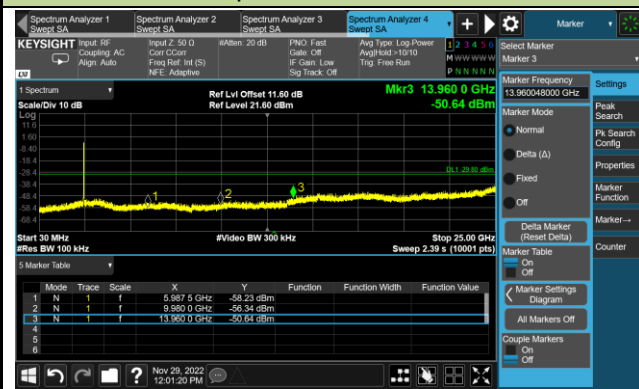


802.11ax-HE40 Out-of-Band Emissions – Ant 2

Channel 03 (2422MHz)

100kHz PSD Reference Level

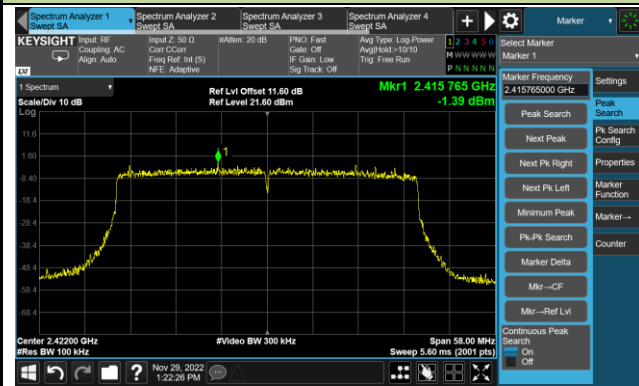

Low Band Edge

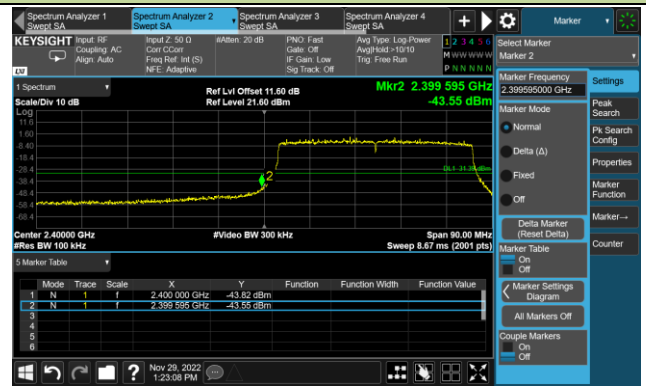

Spurious Emission




Channel 06 (2437MHz)

100kHz PSD Reference Level




Spurious Emission

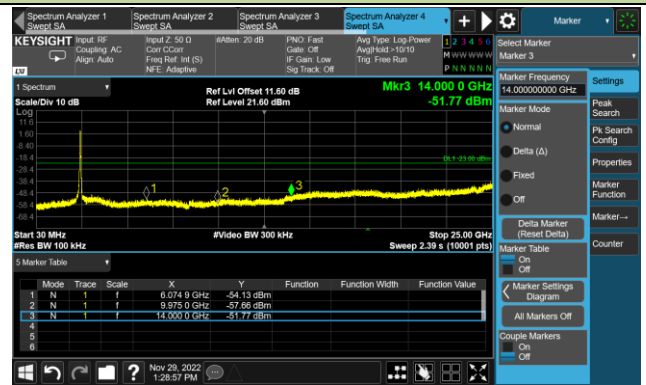


802.11ax-HE40 Out-of-Band Emissions – Ant 2

Channel 09 (2452MHz)

100kHz PSD Reference Level

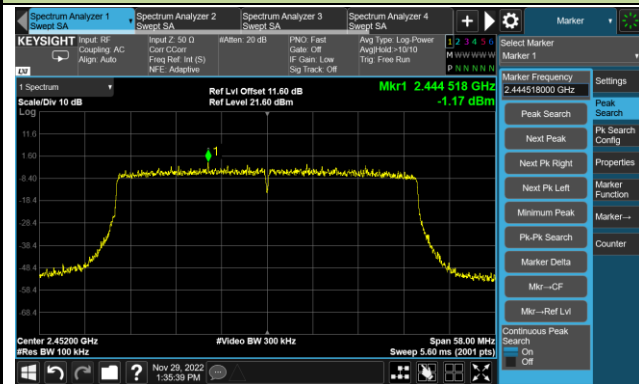

High Band Edge

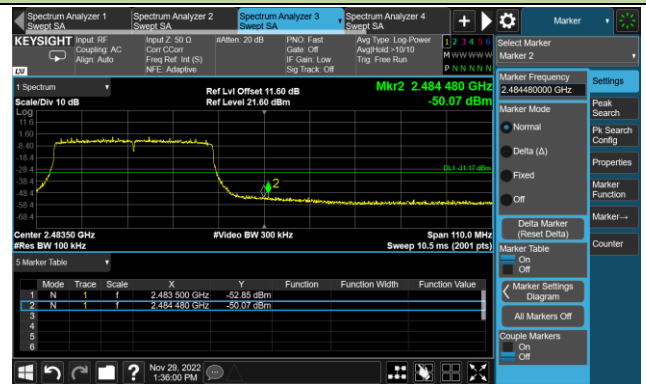

Spurious Emission



**A.6 Radiated Spurious Emission Test Result**
Spot Check Data:

Test Site	WZ-AC1	Test Engineer	Charles Zhang
Test Date	2023-01-28	Test Mode:	802.11n-HT20 - Antenna 4#
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
06	7307.000	40.6	8.0	48.6	74.0	-25.4	Peak	Horizontal
	9381.000	35.8	12.0	47.8	74.0	-26.2	Peak	Horizontal
	11497.500	37.0	13.3	50.3	74.0	-23.7	Peak	Horizontal
	7307.000	45.3	8.0	53.3	74.0	-20.7	Peak	Vertical
	7307.000	37.8	8.0	45.8	54.0	-8.2	Average	Vertical
	8157.000	37.3	8.7	46.0	74.0	-28.0	Peak	Vertical
	10843.000	36.3	13.5	49.8	74.0	-24.2	Peak	Vertical

Test Site	WZ-AC1	Test Engineer	Charles Zhang
Test Date	2023-01-28	Test Mode:	802.11n-HT20 - Antenna 5#
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
06	7570.500	37.9	8.0	45.9	74.0	-28.1	Peak	Horizontal
	9126.000	36.0	11.2	47.2	74.0	-26.8	Peak	Horizontal
	11412.500	36.7	12.9	49.6	74.0	-24.4	Peak	Horizontal
	7307.000	43.8	8.0	51.8	74.0	-22.2	Peak	Vertical
	7307.000	35.6	8.0	43.6	54.0	-10.4	Average	Vertical
	9389.500	36.7	12.0	48.7	74.0	-25.3	Peak	Vertical
	10902.500	36.1	13.4	49.5	74.0	-24.5	Peak	Vertical

## Original Data:

Test Site	WZ-AC1	Test Engineer	Charles Zhang
Test Date	2022-11-21 ~2022-11-22	Test Mode:	802.11b - Antenna 4#
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	7562.000	36.3	8.0	44.3	74.0	-29.7	Peak	Horizontal
	8412.000	35.7	8.6	44.3	74.0	-29.7	Peak	Horizontal
	11591.000	36.6	12.7	49.3	74.0	-24.7	Peak	Horizontal
	8174.000	36.8	8.5	45.3	74.0	-28.7	Peak	Vertical
	9177.000	36.2	11.2	47.4	74.0	-26.6	Peak	Vertical
	11480.500	36.7	13.0	49.7	74.0	-24.3	Peak	Vertical
06	7307.000	44.7	8.0	52.7	74.0	-21.3	Peak	Horizontal
	7307.000	45.3	8.0	53.3	54.0	-0.7	Average	Horizontal
	8318.500	36.9	8.4	45.3	74.0	-28.7	Peak	Horizontal
	11608.000	36.6	12.7	49.3	74.0	-24.7	Peak	Horizontal
	7307.000	42.3	8.0	50.3	74.0	-23.7	Peak	Vertical
	8114.500	37.0	8.8	45.8	74.0	-28.2	Peak	Vertical
	11497.500	36.3	13.3	49.6	74.0	-24.4	Peak	Vertical
11	7383.500	43.5	8.3	51.8	74.0	-22.2	Peak	Horizontal
	7383.500	44.4	8.3	52.7	54.0	-1.3	Average	Horizontal
	9151.500	35.2	11.1	46.3	74.0	-27.7	Peak	Horizontal
	11616.500	35.8	12.6	48.4	74.0	-25.6	Peak	Horizontal
	7383.500	40.3	8.3	48.6	74.0	-25.4	Peak	Vertical
	8123.000	37.2	8.7	45.9	74.0	-28.1	Peak	Vertical
	11489.000	35.5	13.2	48.7	74.0	-25.3	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Charles Zhang
Test Date	2022-11-21 ~2022-11-22	Test Mode:	802.11g - Antenna 4#
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	7477.000	35.6	8.3	43.9	74.0	-30.1	Peak	Horizontal
	8165.500	34.6	8.6	43.2	74.0	-30.8	Peak	Horizontal
	11489.000	35.4	13.2	48.6	74.0	-25.4	Peak	Horizontal
	7494.000	36.2	8.3	44.5	74.0	-29.5	Peak	Vertical
	8106.000	35.7	9.0	44.7	74.0	-29.3	Peak	Vertical
	11472.000	35.9	13.0	48.9	74.0	-25.1	Peak	Vertical
06	7324.000	54.2	7.9	62.1	74.0	-11.9	Peak	Horizontal
	7324.000	44.8	7.9	52.7	54.0	-1.3	Average	Horizontal
	10877.000	35.4	13.4	48.8	74.0	-25.2	Peak	Horizontal
	12194.500	36.9	12.0	48.9	74.0	-25.1	Peak	Horizontal
	7315.500	47.9	7.9	55.8	74.0	-18.2	Peak	Vertical
	7315.500	40.5	7.9	48.4	54.0	-5.6	Average	Vertical
	8310.000	35.6	8.4	44.0	74.0	-30.0	Peak	Vertical
	11591.000	36.0	12.7	48.7	74.0	-25.3	Peak	Vertical
11	7375.000	40.5	8.3	48.8	74.0	-25.2	Peak	Horizontal
	9126.000	35.0	11.2	46.2	74.0	-27.8	Peak	Horizontal
	10936.500	35.5	13.6	49.1	74.0	-24.9	Peak	Horizontal
	7443.000	37.3	8.2	45.5	74.0	-28.5	Peak	Vertical
	9066.500	35.7	10.7	46.4	74.0	-27.6	Peak	Vertical
	10987.500	35.6	13.6	49.2	74.0	-24.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC1	Test Engineer	Charles Zhang
Test Date	2022-11-21 ~2022-11-22	Test Mode:	802.11n-HT20 - Antenna 4#
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	7494.000	36.7	8.3	45.0	74.0	-29.0	Peak	Horizontal
	8089.000	36.7	8.9	45.6	74.0	-28.4	Peak	Horizontal
	11514.500	35.8	13.0	48.8	74.0	-25.2	Peak	Horizontal
	7536.500	35.8	8.2	44.0	74.0	-30.0	Peak	Vertical
	8310.000	33.9	8.4	42.3	74.0	-31.7	Peak	Vertical
	11591.000	35.9	12.7	48.6	74.0	-25.4	Peak	Vertical
06	7307.000	54.1	8.0	62.1	74.0	-11.9	Peak	Horizontal
	7307.000	45.8	8.0	53.8	54.0	-0.2	Average	Horizontal
	9143.000	35.0	11.1	46.1	74.0	-27.9	Peak	Horizontal
	11625.000	35.9	12.5	48.4	74.0	-25.6	Peak	Horizontal
	7307.000	47.2	8.0	55.2	74.0	-18.8	Peak	Vertical
	7307.000	39.9	8.0	47.9	54.0	-6.1	Average	Vertical
	9160.000	35.3	11.2	46.5	74.0	-27.5	Peak	Vertical
	10962.000	34.8	13.5	48.3	74.0	-25.7	Peak	Vertical
11	7383.500	38.2	8.3	46.5	74.0	-27.5	Peak	Horizontal
	8140.000	36.0	8.7	44.7	74.0	-29.3	Peak	Horizontal
	11497.500	35.4	13.3	48.7	74.0	-25.3	Peak	Horizontal
	8148.500	35.8	8.7	44.5	74.0	-29.5	Peak	Vertical
	9185.500	35.2	11.1	46.3	74.0	-27.7	Peak	Vertical
	11489.000	35.2	13.2	48.4	74.0	-25.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Charles Zhang
Test Date	2022-11-21 ~2022-11-22	Test Mode:	802.11n-HT40 - Antenna 4#
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	7621.500	37.3	7.9	45.2	74.0	-28.8	Peak	Horizontal
	10860.000	35.8	13.4	49.2	74.0	-24.8	Peak	Horizontal
	11540.000	36.1	12.9	49.0	74.0	-25.0	Peak	Horizontal
	7451.500	36.3	8.2	44.5	74.0	-29.5	Peak	Vertical
	8106.000	36.6	9.0	45.6	74.0	-28.4	Peak	Vertical
	11608.000	36.0	12.7	48.7	74.0	-25.3	Peak	Vertical
06	7307.000	52.2	8.0	60.2	74.0	-13.8	Peak	Horizontal
	7307.000	44.7	8.0	52.7	54.0	-1.3	Average	Horizontal
	8148.500	37.1	8.7	45.8	74.0	-28.2	Peak	Horizontal
	11591.000	36.3	12.7	49.0	74.0	-25.0	Peak	Horizontal
	7307.000	46.7	8.0	54.7	74.0	-19.3	Peak	Vertical
	7307.000	38.6	8.0	46.6	54.0	-7.4	Average	Vertical
	9049.500	35.4	10.4	45.8	74.0	-28.2	Peak	Vertical
	11625.000	36.4	12.5	48.9	74.0	-25.1	Peak	Vertical
09	8233.500	36.4	8.5	44.9	74.0	-29.1	Peak	Horizontal
	11004.500	35.1	13.5	48.6	74.0	-25.4	Peak	Horizontal
	12118.000	35.7	12.2	47.9	74.0	-26.1	Peak	Horizontal
	7400.500	36.0	8.2	44.2	74.0	-29.8	Peak	Vertical
	8123.000	36.5	8.7	45.2	74.0	-28.8	Peak	Vertical
	11531.500	35.7	12.8	48.5	74.0	-25.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Charles Zhang
Test Date	2022-11-21 ~2022-11-22	Test Mode:	802.11ax-HE20 - Antenna 4#
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	8114.500	35.9	8.8	44.7	74.0	-29.3	Peak	Horizontal
	11038.500	35.0	13.6	48.6	74.0	-25.4	Peak	Horizontal
	12118.000	37.2	12.2	49.4	74.0	-24.6	Peak	Horizontal
	7553.500	36.4	8.1	44.5	74.0	-29.5	Peak	Vertical
	8089.000	35.9	8.9	44.8	74.0	-29.2	Peak	Vertical
	10885.500	35.9	13.4	49.3	74.0	-24.7	Peak	Vertical
06	7307.000	51.9	8.0	59.9	74.0	-14.1	Peak	Horizontal
	7307.000	45.6	8.0	53.6	54.0	-0.4	Average	Horizontal
	8216.500	35.7	8.6	44.3	74.0	-29.7	Peak	Horizontal
	11591.000	35.8	12.7	48.5	74.0	-25.5	Peak	Horizontal
	7307.000	46.3	8.0	54.3	74.0	-19.7	Peak	Vertical
	7307.000	41.2	8.0	49.2	54.0	-4.8	Average	Vertical
	8242.000	35.4	8.5	43.9	74.0	-30.1	Peak	Vertical
	10987.500	34.6	13.6	48.2	74.0	-25.8	Peak	Vertical
11	7383.500	37.9	8.3	46.2	74.0	-27.8	Peak	Horizontal
	9100.500	35.7	10.6	46.3	74.0	-27.7	Peak	Horizontal
	11582.500	35.7	12.6	48.3	74.0	-25.7	Peak	Horizontal
	9143.000	35.3	11.1	46.4	74.0	-27.6	Peak	Vertical
	11625.000	35.8	12.5	48.3	74.0	-25.7	Peak	Vertical
	12356.000	36.3	12.1	48.4	74.0	-25.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Charles Zhang
Test Date	2022-11-21 ~2022-11-22	Test Mode:	802.11ax-HE40 - Antenna 4#
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	7460.000	36.1	8.2	44.3	74.0	-29.7	Peak	Horizontal
	8327.000	34.9	8.3	43.2	74.0	-30.8	Peak	Horizontal
	11004.500	35.5	13.5	49.0	74.0	-25.0	Peak	Horizontal
	7315.500	37.1	7.9	45.0	74.0	-29.0	Peak	Vertical
	8165.500	35.5	8.6	44.1	74.0	-29.9	Peak	Vertical
	11591.000	36.6	12.7	49.3	74.0	-24.7	Peak	Vertical
06	7307.000	54.7	8.0	62.7	74.0	-11.3	Peak	Horizontal
	7307.000	45.2	8.0	53.2	54.0	-0.8	Average	Horizontal
	8140.000	36.5	8.7	45.2	74.0	-28.8	Peak	Horizontal
	10928.000	35.1	13.5	48.6	74.0	-25.4	Peak	Horizontal
	7307.000	46.2	8.0	54.2	74.0	-19.8	Peak	Vertical
	7307.000	41.0	8.0	49.0	54.0	-5.0	Average	Vertical
	9126.000	34.9	11.2	46.1	74.0	-27.9	Peak	Vertical
	11098.000	35.3	13.3	48.6	74.0	-25.4	Peak	Vertical
09	7332.500	39.3	7.9	47.2	74.0	-26.8	Peak	Horizontal
	8318.500	36.6	8.4	45.0	74.0	-29.0	Peak	Horizontal
	11599.500	35.6	12.8	48.4	74.0	-25.6	Peak	Horizontal
	7528.000	36.4	8.1	44.5	74.0	-29.5	Peak	Vertical
	9075.000	35.2	10.7	45.9	74.0	-28.1	Peak	Vertical
	10953.500	35.2	13.5	48.7	74.0	-25.3	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Charles Zhang
Test Date	2022-12-05 ~2022-12-23	Test Mode:	802.11b - Antenna 5#
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4825.000	38.8	2.8	41.6	74.0	-32.4	Peak	Horizontal
	8208.000	37.1	8.7	45.8	74.0	-28.2	Peak	Horizontal
	11200.000	37.1	12.8	49.9	74.0	-24.1	Peak	Horizontal
	4825.000	45.7	2.8	48.5	74.0	-25.5	Peak	Vertical
	11421.000	37.7	12.9	50.6	74.0	-23.4	Peak	Vertical
	14489.500	37.5	15.2	52.7	74.0	-21.3	Peak	Vertical
	14489.500	34.2	15.2	49.4	54.0	-4.6	Average	Vertical
06	4876.000	39.8	2.8	42.6	74.0	-31.4	Peak	Horizontal
	7307.000	38.1	8.0	46.1	74.0	-27.9	Peak	Horizontal
	10970.500	36.5	13.4	49.9	74.0	-24.1	Peak	Horizontal
	4876.000	44.1	2.8	46.9	74.0	-27.1	Peak	Vertical
	7307.000	43.2	8.0	51.2	74.0	-22.8	Peak	Vertical
	7307.000	42.5	8.0	50.5	54.0	-3.5	Average	Vertical
	11387.000	37.2	13.0	50.2	74.0	-23.8	Peak	Vertical
11	5080.000	37.5	3.5	41.0	74.0	-33.0	Peak	Horizontal
	7383.500	38.5	8.3	46.8	74.0	-27.2	Peak	Horizontal
	11140.500	37.8	12.9	50.7	74.0	-23.3	Peak	Horizontal
	4927.000	42.7	2.9	45.6	74.0	-28.4	Peak	Vertical
	7383.500	41.5	8.3	49.8	74.0	-24.2	Peak	Vertical
	10843.000	36.9	13.5	50.4	74.0	-23.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Charles Zhang
Test Date	2022-12-05 ~2022-12-23	Test Mode:	802.11g - Antenna 5#
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	5097.000	37.0	3.5	40.5	74.0	-33.5	Peak	Horizontal
	8123.000	38.1	8.7	46.8	74.0	-27.2	Peak	Horizontal
	10953.500	36.3	13.5	49.8	74.0	-24.2	Peak	Horizontal
	3754.000	41.4	-0.1	41.3	74.0	-32.7	Peak	Vertical
	10936.500	36.6	13.6	50.2	74.0	-23.8	Peak	Vertical
	14472.500	35.9	15.2	51.1	74.0	-22.9	Peak	Vertical
	14472.500	34.5	15.2	49.7	54.0	-4.3	Average	Vertical
06	4876.000	37.7	2.8	40.5	74.0	-33.5	Peak	Horizontal
	7315.500	43.7	7.9	51.6	74.0	-22.4	Peak	Horizontal
	7315.500	36.5	7.9	44.4	54.0	-9.6	Average	Horizontal
	11072.500	37.1	13.3	50.4	74.0	-23.6	Peak	Horizontal
	4884.500	43.0	2.9	45.9	74.0	-28.1	Peak	Vertical
	7298.500	49.2	8.1	57.3	74.0	-16.7	Peak	Vertical
	7298.500	44.9	8.1	53.0	54.0	-1.0	Average	Vertical
11319.000	36.7	12.7	49.4	74.0	-24.6	Peak	Vertical	
11	4961.000	36.5	3.1	39.6	74.0	-34.4	Peak	Horizontal
	7375.000	36.2	8.3	44.5	74.0	-29.5	Peak	Horizontal
	11064.000	37.4	13.3	50.7	74.0	-23.3	Peak	Horizontal
	3754.000	41.7	-0.1	41.6	74.0	-32.4	Peak	Vertical
	5114.000	37.7	3.4	41.1	74.0	-32.9	Peak	Vertical
	7477.000	36.9	8.3	45.2	74.0	-28.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Charles Zhang
Test Date	2022-12-05 ~2022-12-23	Test Mode:	802.11n-HT20 - Antenna 5#
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	3839.000	39.2	0.1	39.3	74.0	-34.7	Peak	Horizontal
	4884.500	37.4	2.9	40.3	74.0	-33.7	Peak	Horizontal
	11021.500	36.3	13.4	49.7	74.0	-24.3	Peak	Horizontal
	3754.000	41.4	-0.1	41.3	74.0	-32.7	Peak	Vertical
	4816.500	37.6	2.8	40.4	74.0	-33.6	Peak	Vertical
	7468.500	37.4	8.2	45.6	74.0	-28.4	Peak	Vertical
06	5020.500	37.0	3.2	40.2	74.0	-33.8	Peak	Horizontal
	7307.000	44.0	8.0	52.0	74.0	-22.0	Peak	Horizontal
	7307.000	36.5	8.0	44.5	54.0	-9.5	Average	Horizontal
	11497.500	36.0	13.3	49.3	74.0	-24.7	Peak	Horizontal
	4876.000	42.6	2.8	45.4	74.0	-28.6	Peak	Vertical
	7307.000	50.6	8.0	58.6	74.0	-15.4	Peak	Vertical
	7307.000	44.1	8.0	52.1	54.0	-1.9	Average	Vertical
	11098.000	35.9	13.3	49.2	74.0	-24.8	Peak	Vertical
11	4893.000	36.7	3.0	39.7	74.0	-34.3	Peak	Horizontal
	7298.500	37.2	8.1	45.3	74.0	-28.7	Peak	Horizontal
	11047.000	35.5	13.7	49.2	74.0	-24.8	Peak	Horizontal
	3754.000	41.6	-0.1	41.5	74.0	-32.5	Peak	Vertical
	7392.000	36.9	8.3	45.2	74.0	-28.8	Peak	Vertical
	14472.500	36.2	15.2	51.4	74.0	-22.6	Peak	Vertical
	14472.500	34.2	15.2	49.4	54.0	-4.6	Average	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Charles Zhang
Test Date	2022-12-05 ~2022-12-23	Test Mode:	802.11n-HT40 - Antenna 5#
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	5080.000	37.2	3.5	40.7	74.0	-33.3	Peak	Horizontal
	7315.500	37.2	7.9	45.1	74.0	-28.9	Peak	Horizontal
	10953.500	35.8	13.5	49.3	74.0	-24.7	Peak	Horizontal
	3754.000	41.4	-0.1	41.3	74.0	-32.7	Peak	Vertical
	11514.500	36.2	13.0	49.2	74.0	-24.8	Peak	Vertical
	14472.500	36.1	15.2	51.3	74.0	-22.7	Peak	Vertical
	14472.500	34.4	15.2	49.6	54.0	-4.4	Average	Vertical
06	3898.500	38.2	0.3	38.5	74.0	-35.5	Peak	Horizontal
	7698.000	37.4	7.9	45.3	74.0	-28.7	Peak	Horizontal
	10894.000	36.2	13.4	49.6	74.0	-24.4	Peak	Horizontal
	3754.000	40.8	-0.1	40.7	74.0	-33.3	Peak	Vertical
	7324.000	38.7	7.9	46.6	74.0	-27.4	Peak	Vertical
	11548.500	36.5	13.0	49.5	74.0	-24.5	Peak	Vertical
09	4697.500	37.7	2.4	40.1	74.0	-33.9	Peak	Horizontal
	7468.500	36.7	8.2	44.9	74.0	-29.1	Peak	Horizontal
	11089.500	36.0	13.3	49.3	74.0	-24.7	Peak	Horizontal
	3754.000	40.9	-0.1	40.8	74.0	-33.2	Peak	Vertical
	7443.000	36.2	8.2	44.4	74.0	-29.6	Peak	Vertical
	11021.500	35.8	13.4	49.2	74.0	-24.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC1	Test Engineer	Charles Zhang
Test Date	2022-12-05 ~2022-12-23	Test Mode:	802.11ax-HE20 - Antenna 5#
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4723.000	37.8	2.6	40.4	74.0	-33.6	Peak	Horizontal
	8182.500	36.9	8.5	45.4	74.0	-28.6	Peak	Horizontal
	11395.500	36.5	13.0	49.5	74.0	-24.5	Peak	Horizontal
	7366.500	36.1	8.2	44.3	74.0	-29.7	Peak	Vertical
	10987.500	35.9	13.6	49.5	74.0	-24.5	Peak	Vertical
	14472.500	37.1	15.2	52.3	74.0	-21.7	Peak	Vertical
	14472.500	34.2	15.2	49.4	54.0	-4.6	Average	Vertical
06	4876.000	37.3	2.8	40.1	74.0	-33.9	Peak	Horizontal
	7307.000	42.1	8.0	50.1	74.0	-23.9	Peak	Horizontal
	7307.000	35.1	8.0	43.1	54.0	-10.9	Average	Horizontal
	11055.500	36.2	13.5	49.7	74.0	-24.3	Peak	Horizontal
	4867.500	42.4	2.7	45.1	74.0	-28.9	Peak	Vertical
	7307.000	47.8	8.0	55.8	74.0	-18.2	Peak	Vertical
	7307.000	42.5	8.0	50.5	54.0	-3.5	Average	Vertical
	11055.500	35.7	13.5	49.2	74.0	-24.8	Peak	Vertical
11	5071.500	35.8	3.5	39.3	74.0	-34.7	Peak	Horizontal
	7553.500	36.4	8.1	44.5	74.0	-29.5	Peak	Horizontal
	11174.500	36.3	12.8	49.1	74.0	-24.9	Peak	Horizontal
	7264.500	36.2	8.0	44.2	74.0	-29.8	Peak	Vertical
	11455.000	36.7	13.0	49.7	74.0	-24.3	Peak	Vertical
	14472.500	35.9	15.2	51.1	74.0	-22.9	Peak	Vertical
	14472.500	34.3	15.2	49.5	54.0	-4.5	Average	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Charles Zhang
Test Date	2022-12-05 ~2022-12-23	Test Mode:	802.11ax-HE40 - Antenna 5#
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	5029.000	37.2	3.3	40.5	74.0	-33.5	Peak	Horizontal
	7562.000	36.3	8.0	44.3	74.0	-29.7	Peak	Horizontal
	11497.500	35.9	13.3	49.2	74.0	-24.8	Peak	Horizontal
	4884.500	36.7	2.9	39.6	74.0	-34.4	Peak	Vertical
	8157.000	36.4	8.7	45.1	74.0	-28.9	Peak	Vertical
	11489.000	35.7	13.2	48.9	74.0	-25.1	Peak	Vertical
06	5037.500	36.1	3.4	39.5	74.0	-34.5	Peak	Horizontal
	7502.500	36.1	8.2	44.3	74.0	-29.7	Peak	Horizontal
	11234.000	36.8	12.6	49.4	74.0	-24.6	Peak	Horizontal
	5097.000	36.6	3.5	40.1	74.0	-33.9	Peak	Vertical
	7307.000	38.2	8.0	46.2	74.0	-27.8	Peak	Vertical
	10945.000	36.9	13.6	50.5	74.0	-23.5	Peak	Vertical
09	5071.500	36.5	3.5	40.0	74.0	-34.0	Peak	Horizontal
	8403.500	36.2	8.6	44.8	74.0	-29.2	Peak	Horizontal
	11531.500	36.2	12.8	49.0	74.0	-25.0	Peak	Horizontal
	4986.500	36.8	3.3	40.1	74.0	-33.9	Peak	Vertical
	7672.500	36.8	7.8	44.6	74.0	-29.4	Peak	Vertical
	10953.500	36.4	13.5	49.9	74.0	-24.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**The Result of Radiated Emission below 1GHz:**

Site: WZ-AC1	Test Date: 2022-12-02
Limit: FCC_Part15.209_RSE(3m)	Engineer: Carl Jiang
Probe: VULB 9168_25-2000MHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
<b>Test Mode:</b> Transmit by 802.11b at 2412MHz	

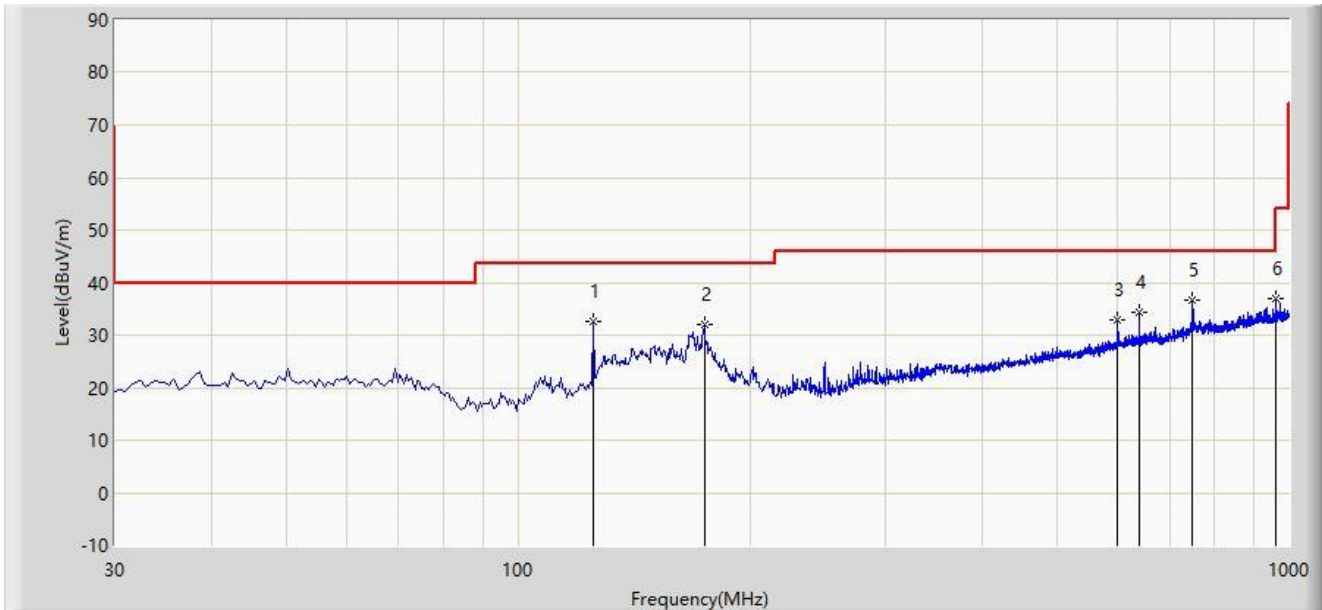

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			125.060	32.743	16.500	-10.757	43.500	16.243	PK
2			174.530	32.018	14.704	-11.482	43.500	17.314	PK
3			599.875	32.991	7.532	-13.009	46.000	25.459	PK
4			640.130	34.483	8.401	-11.517	46.000	26.082	PK
5			749.740	36.681	8.492	-9.319	46.000	28.189	PK
6		*	959.745	36.832	7.058	-9.168	46.000	29.774	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC1	Test Date: 2022-12-02
Limit: FCC_Part15.209_RSE(3m)	Engineer: Carl Jiang
Probe: VULB 9168_25-2000MHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
<b>Test Mode:</b> Transmit by 802.11b at 2412MHz	

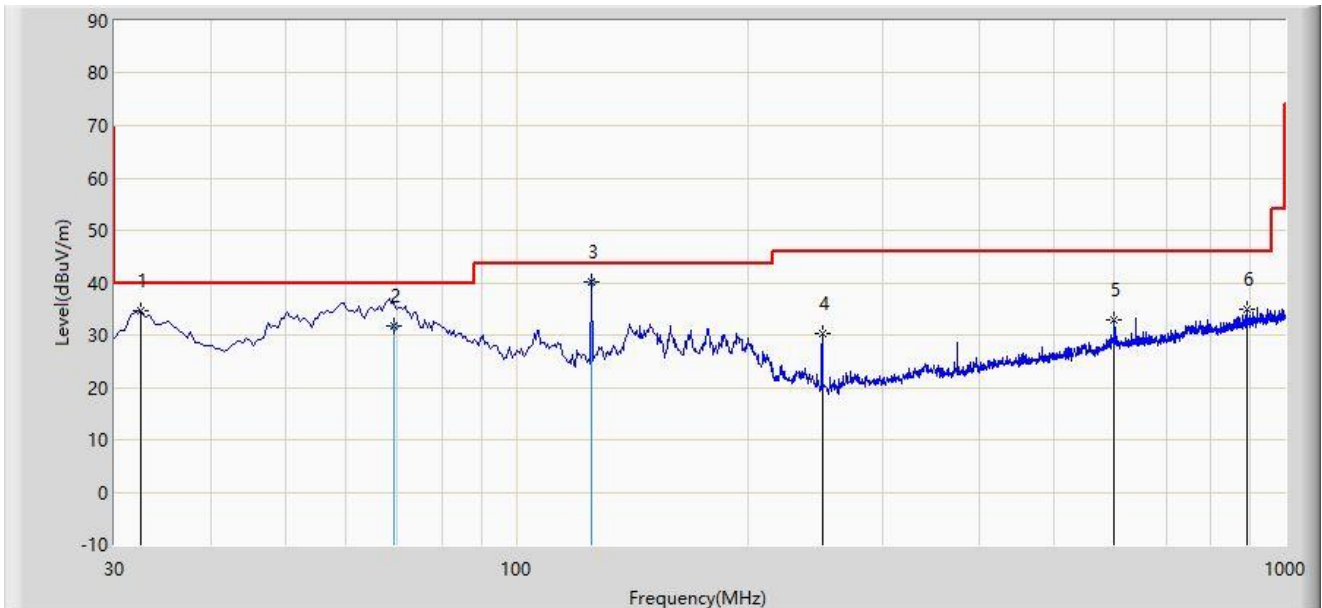

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			32.425	34.499	17.121	-5.501	40.000	17.377	PK
2			69.280	31.787	15.500	-8.213	40.000	16.287	QP
3		*	125.000	40.287	24.050	-3.213	43.500	16.237	QP
4			250.190	30.187	13.502	-15.813	46.000	16.685	PK
5			599.875	32.860	7.401	-13.140	46.000	25.459	PK
6			890.390	34.879	5.676	-11.121	46.000	29.203	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).


Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

### A.7 Radiated Restricted Band Edge Test Result

Spot Check Data:

For Antenna 4#

Site: WZ-AC1	Test Date: 2023-01-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 2x2 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11ax-HE20 at 2427MHz	

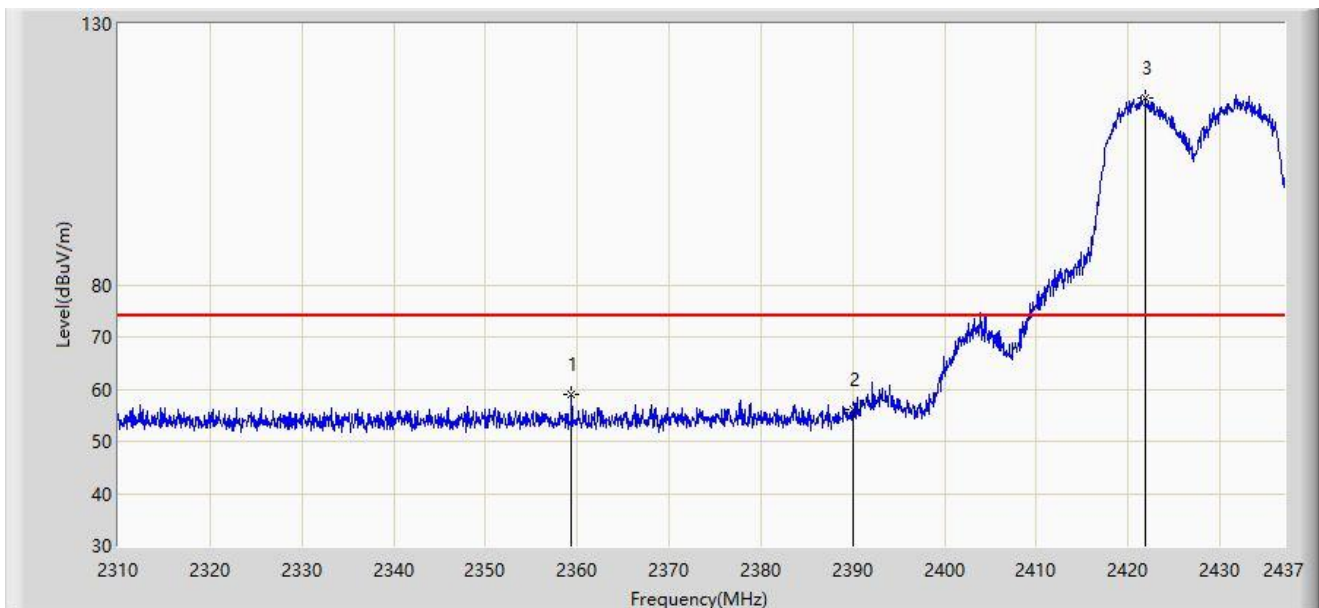


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2359.403	58.857	27.756	-15.143	74.000	31.101	PK
2		2390.000	55.966	24.974	-18.034	74.000	30.992	PK
3		2421.887	115.942	85.017	N/A	N/A	30.925	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-01-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 2x2 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11ax-HE20 at 2427MHz	

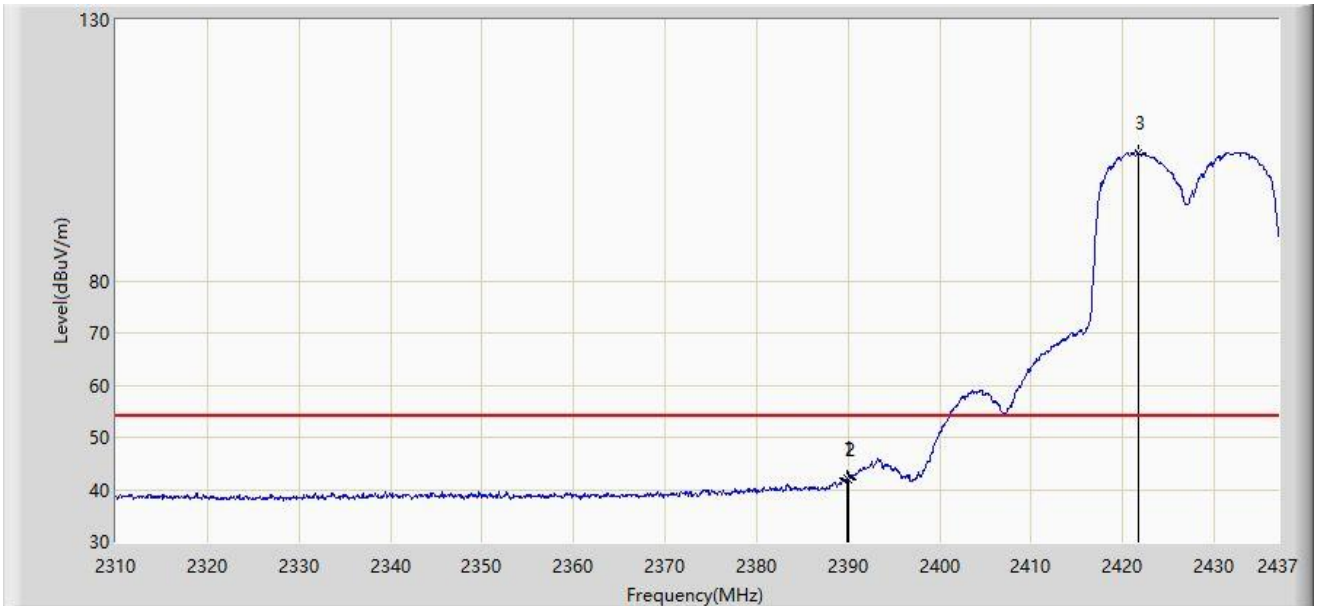


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.820	42.054	11.062	-11.946	54.000	30.993	AV
2		2390.000	41.866	10.874	-12.134	54.000	30.992	AV
3		2421.697	104.597	73.671	N/A	N/A	30.926	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-01-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 2x2 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11ax-HE20 at 2427MHz	

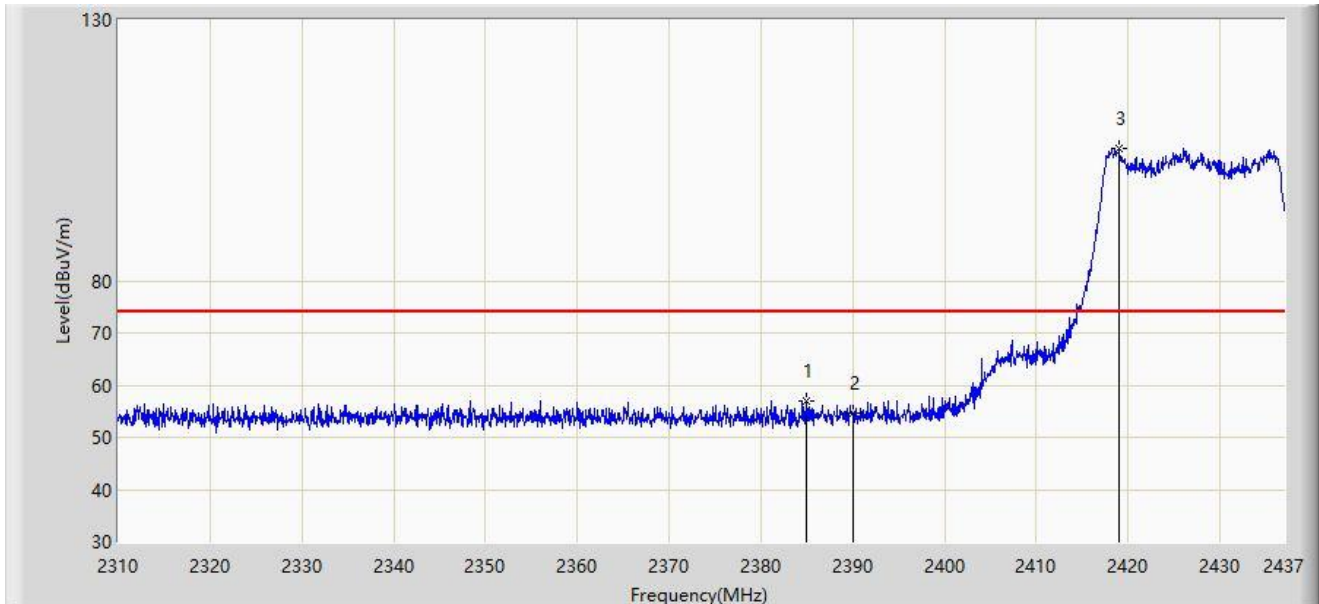


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2384.993	56.940	25.946	-17.060	74.000	30.994	PK
2		2390.000	54.678	23.686	-19.322	74.000	30.992	PK
3		2419.030	105.378	74.443	N/A	N/A	30.936	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-01-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 2x2 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11ax-HE20 at 2427MHz	

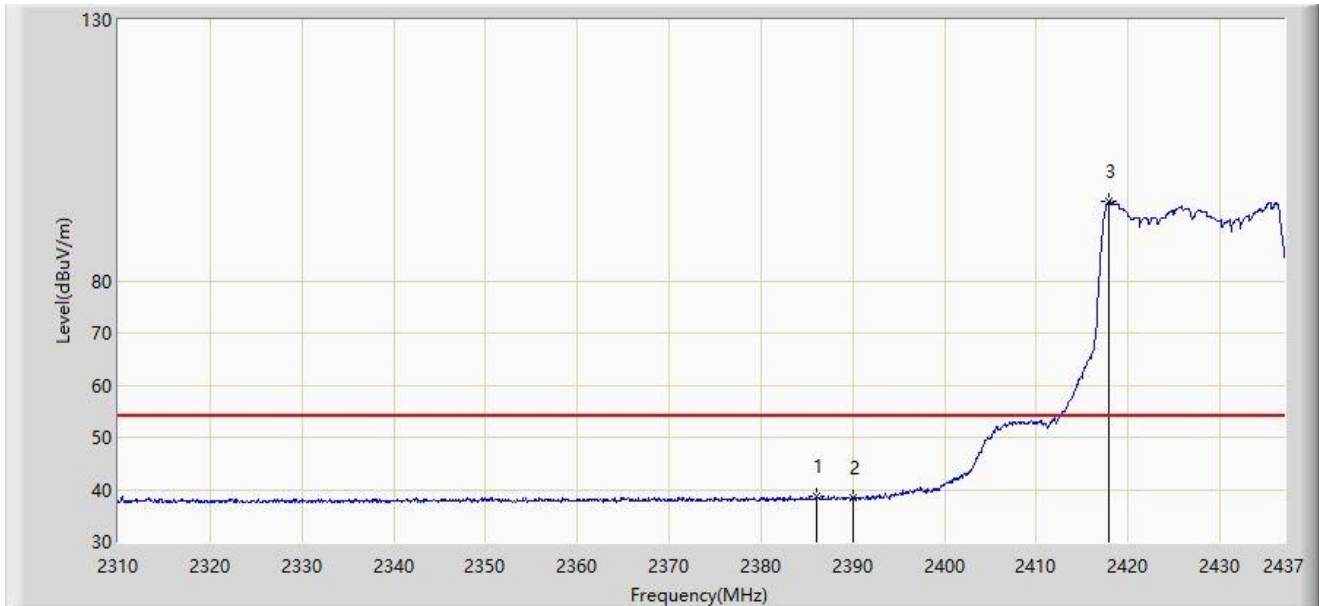

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2386.010	38.780	7.786	-15.220	54.000	30.994	AV
2		2390.000	38.320	7.328	-15.680	54.000	30.992	AV
3		2417.950	95.081	64.143	N/A	N/A	30.938	AV

Note 1: " \* ", means this data is the worst emission level.


Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



For Antenna 5#

Site: WZ-AC1	Test Date: 2023-01-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 2x2 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11ax-HE20 at 2427MHz	

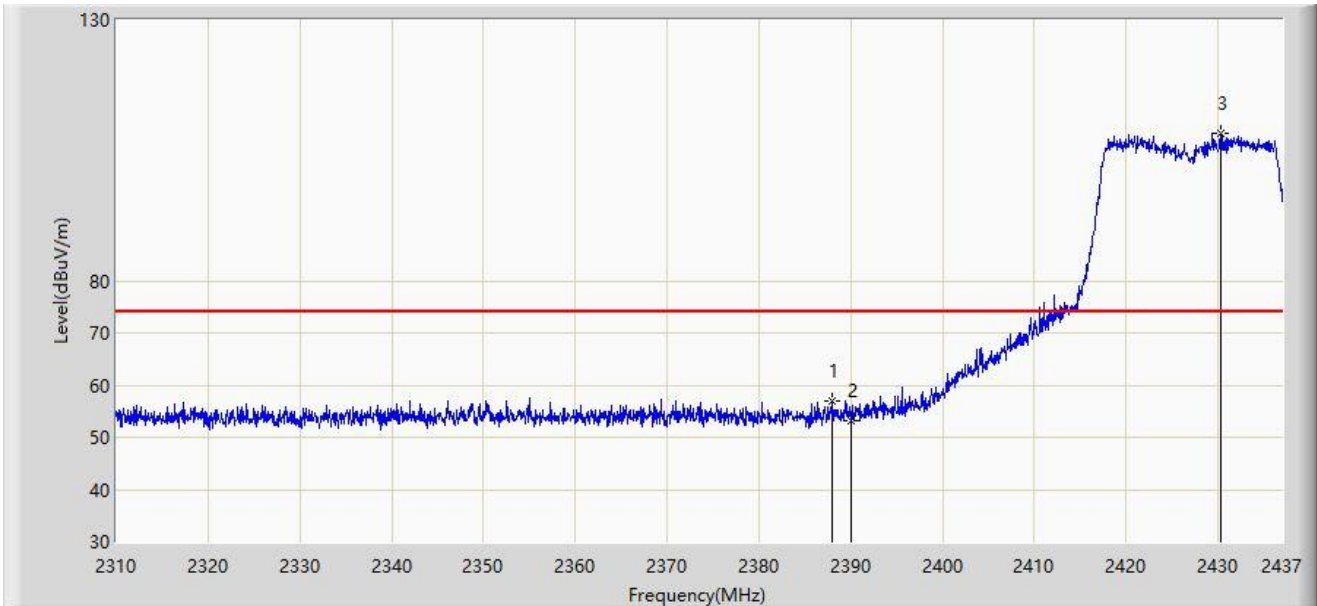


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2387.978	56.959	25.966	-17.041	74.000	30.993	PK
2		2390.000	53.316	22.324	-20.684	74.000	30.992	PK
3		2430.269	108.158	77.267	N/A	N/A	30.891	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-01-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 2x2 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11ax-HE20 at 2427MHz	

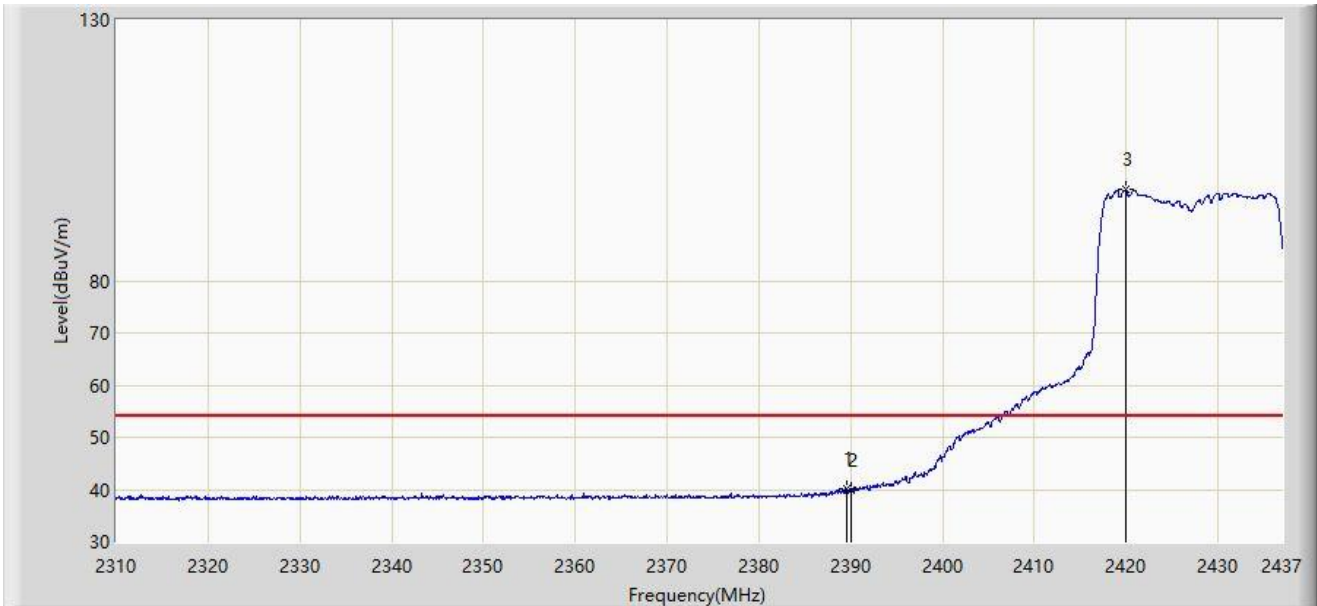


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.502	40.259	9.267	-13.741	54.000	30.992	AV
2		2390.000	39.830	8.838	-14.170	54.000	30.992	AV
3		2420.045	97.406	66.473	N/A	N/A	30.933	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-01-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 2x2 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11ax-HE20 at 2427MHz	

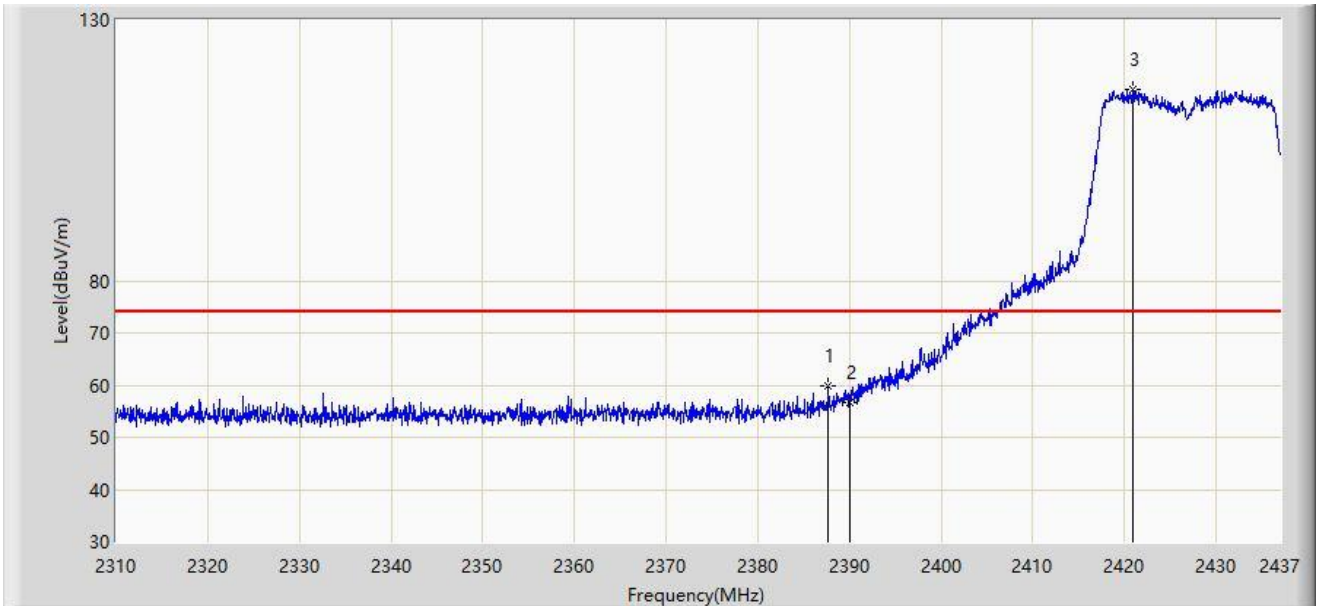


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2387.724	59.770	28.777	-14.230	74.000	30.993	PK
2		2390.000	56.676	25.684	-17.324	74.000	30.992	PK
3		2420.871	116.774	85.845	N/A	N/A	30.929	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-01-28
Limit: FCC_2.4G_RE(3m)	Engineer: Charles Zhang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 2x2 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11ax-HE20 at 2427MHz	

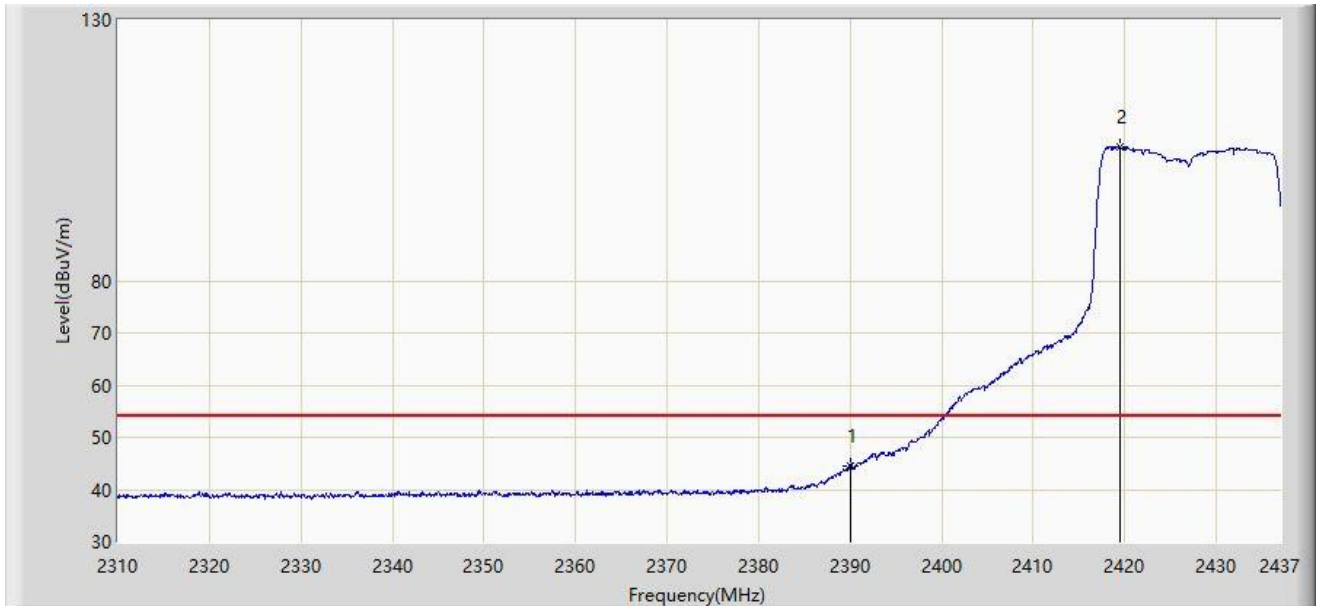

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	44.540	13.548	-9.460	54.000	30.992	AV
2		2419.474	105.743	74.809	N/A	N/A	30.934	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Original Data:
For Antenna 4#

Site: WZ-AC1	Test Date: 2022-11-19
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11b at 2412MHz	

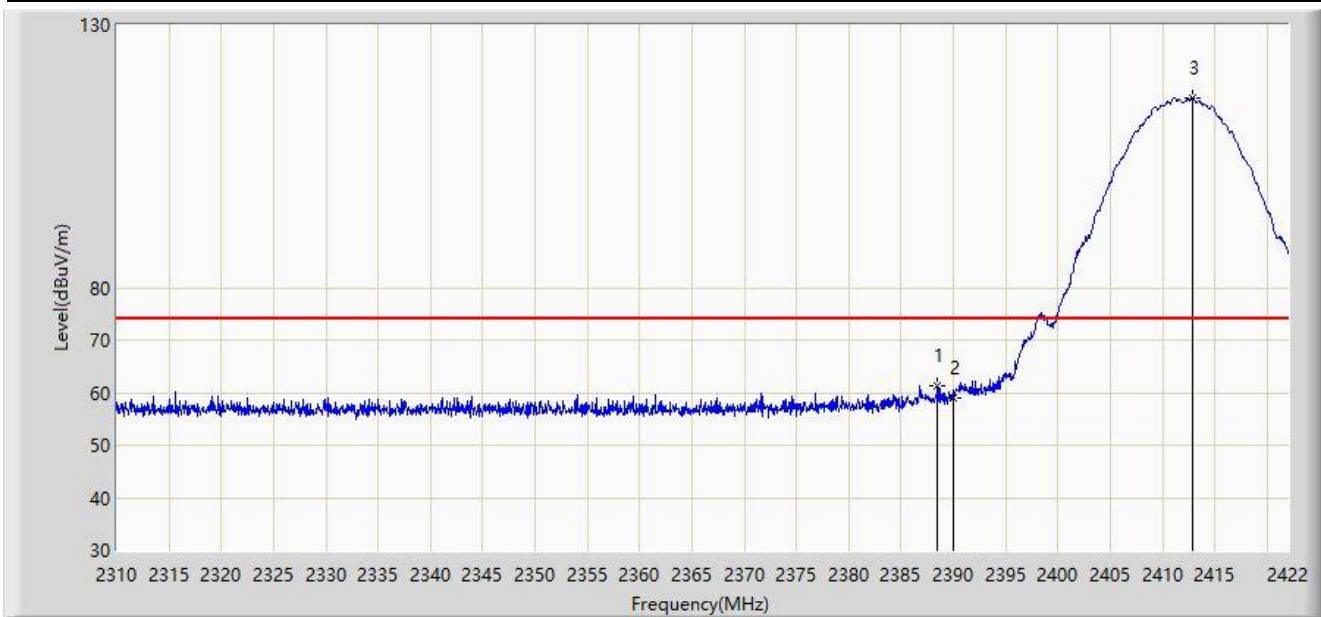


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2388.456	61.318	30.325	-12.682	74.000	30.993	PK
2		2390.000	58.914	27.922	-15.086	74.000	30.992	PK
3		2412.816	116.207	85.255	N/A	N/A	30.953	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-19
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11b at 2412MHz	

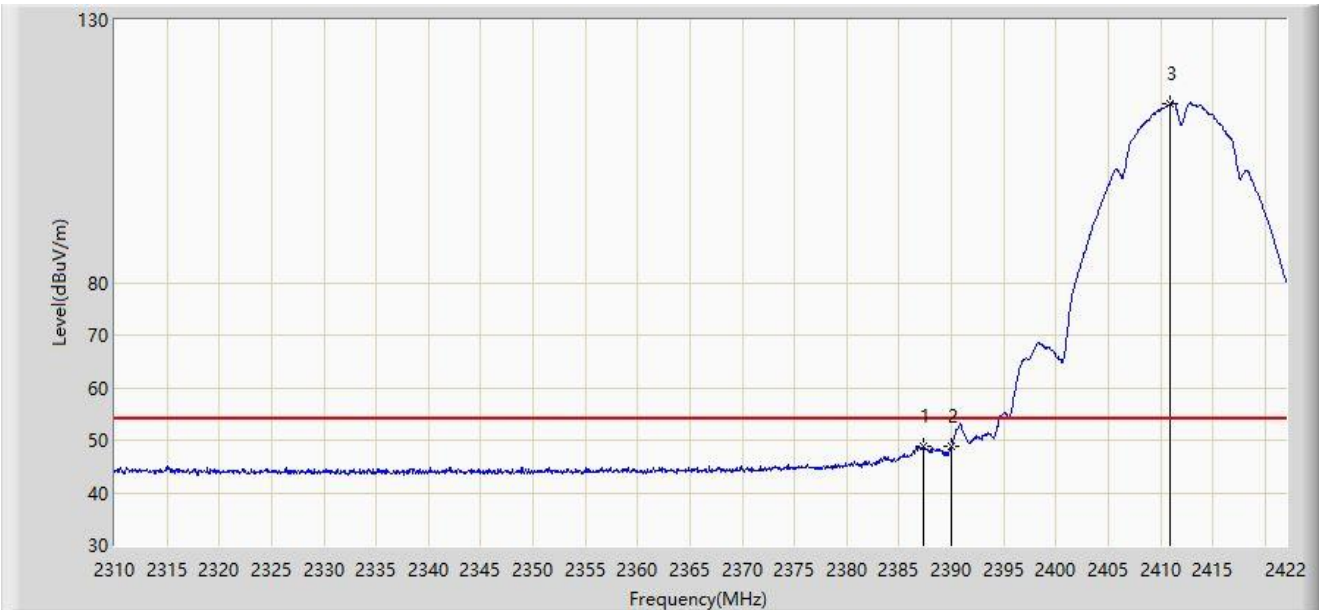


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	2387.280	48.812	17.819	-5.188	54.000	30.993	AV
2		2390.000	48.713	17.721	-5.287	54.000	30.992	AV
3		2410.968	114.008	83.051	N/A	N/A	30.957	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-19
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11b at 2412MHz	

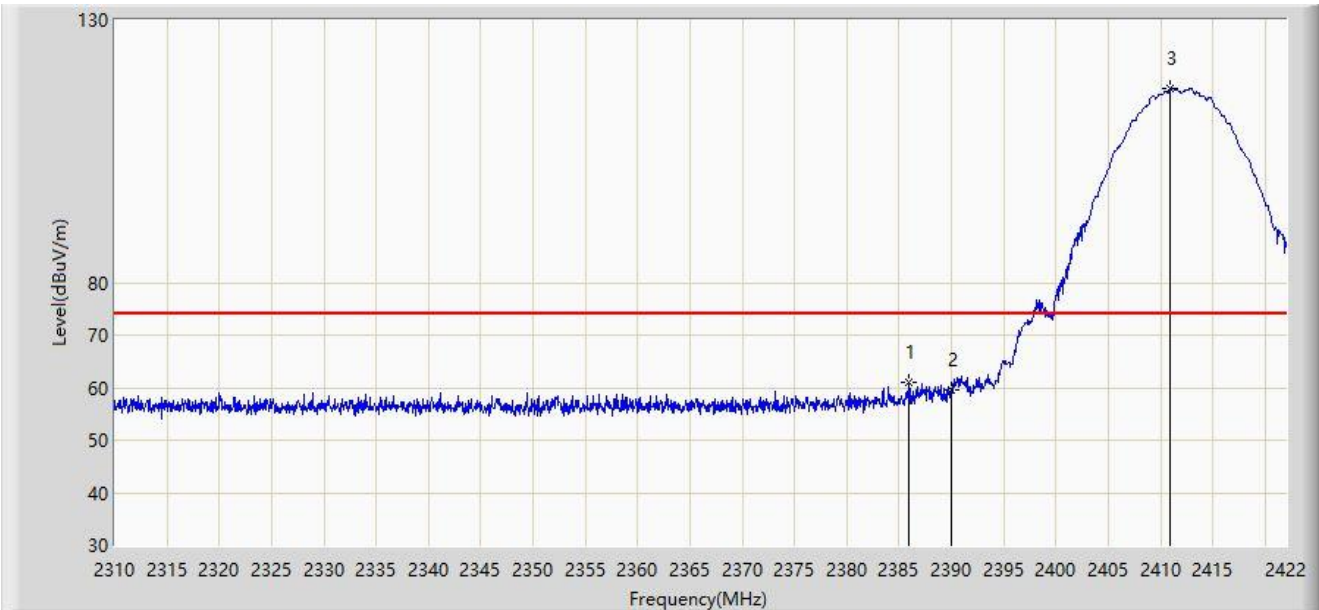


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2385.992	60.884	29.890	-13.116	74.000	30.994	PK
2		2390.000	59.603	28.611	-14.397	74.000	30.992	PK
3		2410.968	116.860	85.903	N/A	N/A	30.957	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-19
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11b at 2412MHz	

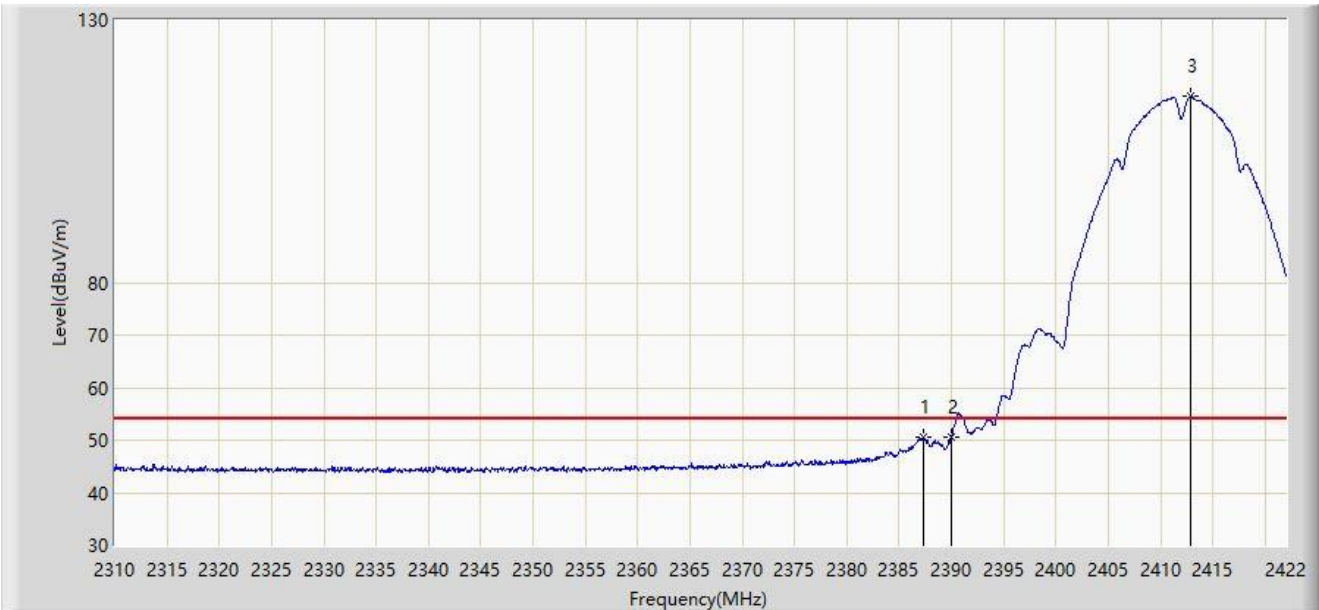

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2387.336	50.536	19.543	-3.464	54.000	30.993	AV
2		2390.000	50.512	19.520	-3.488	54.000	30.992	AV
3		2412.928	115.391	84.439	N/A	N/A	30.951	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2022-12-01
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11b at 2437MHz	

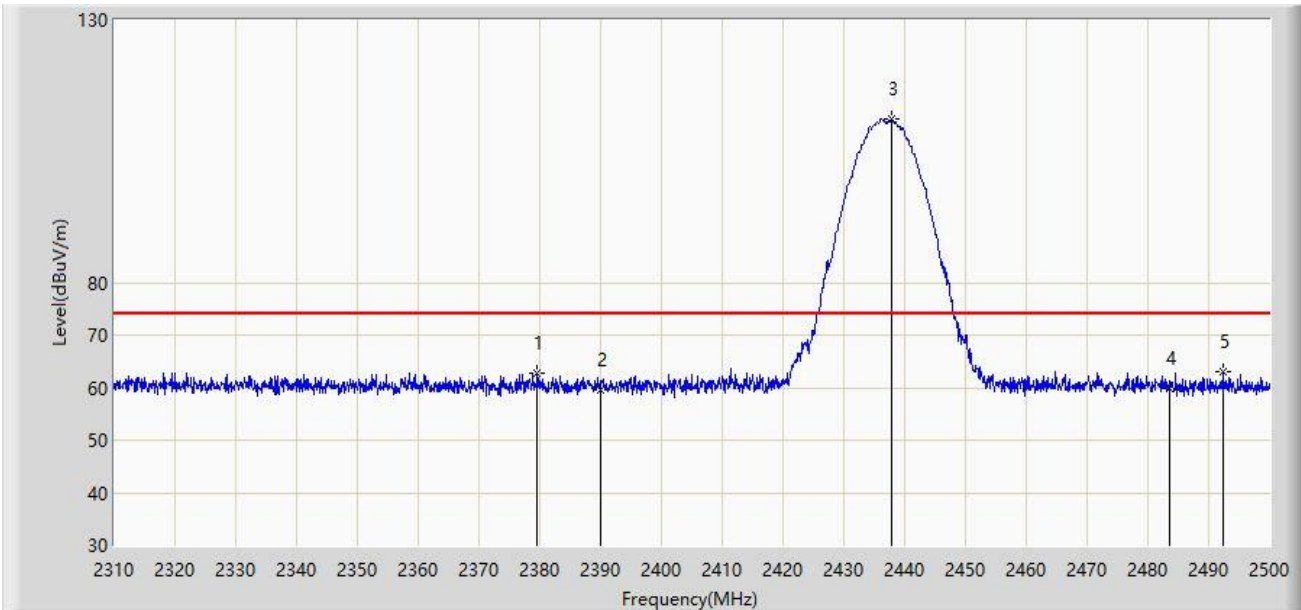


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2379.540	62.721	31.707	-11.279	74.000	31.014	PK
2		2390.000	59.496	28.504	-14.504	74.000	30.992	PK
3		2437.870	111.122	80.258	N/A	N/A	30.864	PK
4		2483.500	59.898	29.007	-14.102	74.000	30.892	PK
5	*	2492.305	63.016	32.137	-10.984	74.000	30.879	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-12-01
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11b at 2437MHz	

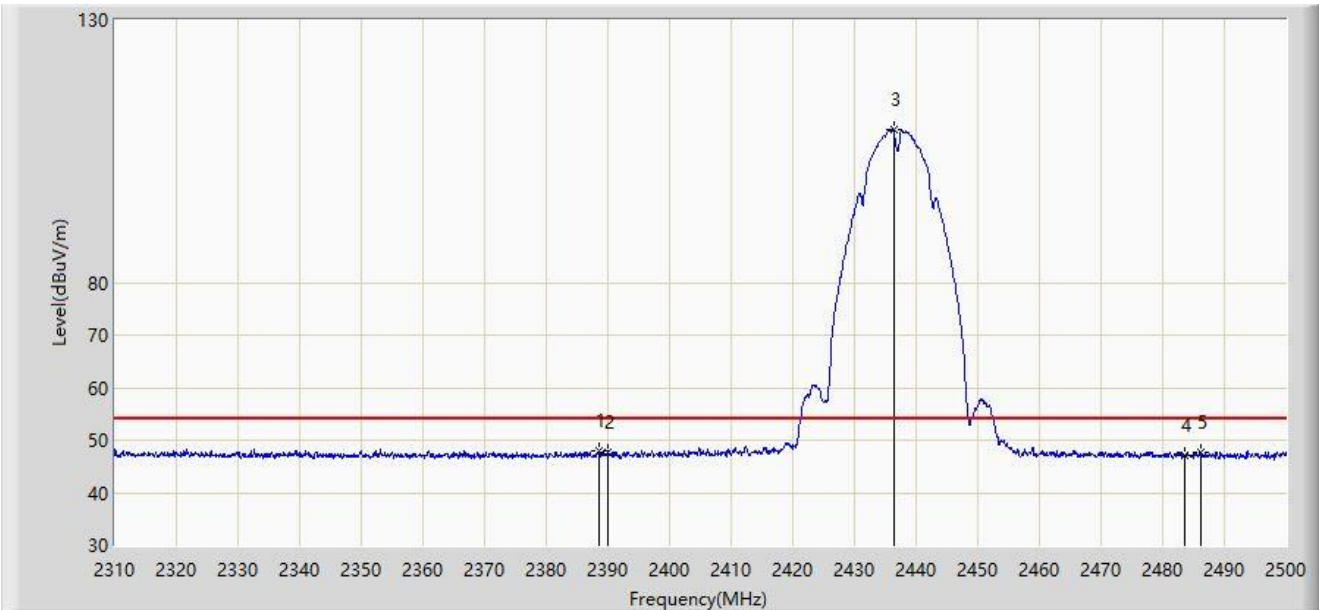


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2388.660	47.969	16.976	-6.031	54.000	30.993	AV
2		2390.000	47.801	16.809	-6.199	54.000	30.992	AV
3		2436.350	109.119	78.249	N/A	N/A	30.870	AV
4		2483.500	47.166	16.275	-6.834	54.000	30.892	AV
5		2486.225	47.662	16.775	-6.338	54.000	30.887	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-12-01
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11b at 2437MHz	

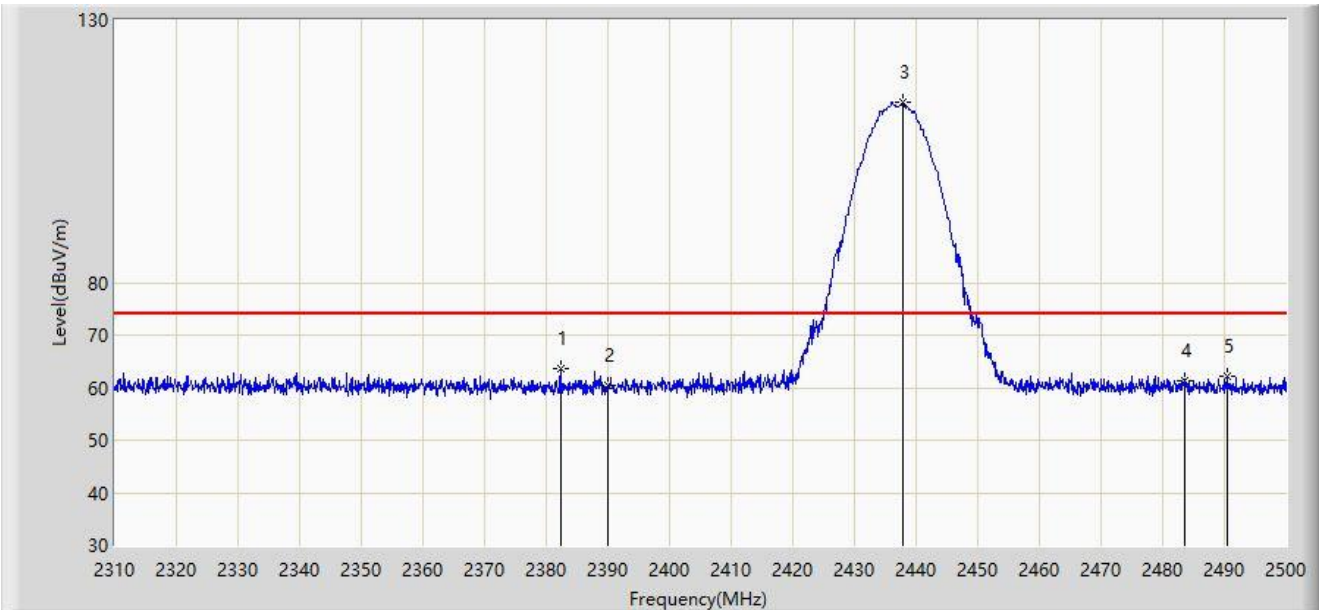


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2382.295	63.575	32.572	-10.425	74.000	31.002	PK
2		2390.000	60.356	29.364	-13.644	74.000	30.992	PK
3		2437.870	114.298	83.434	N/A	N/A	30.864	PK
4		2483.500	61.275	30.384	-12.725	74.000	30.892	PK
5		2490.595	62.194	31.314	-11.806	74.000	30.879	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-12-01
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11b at 2437MHz	

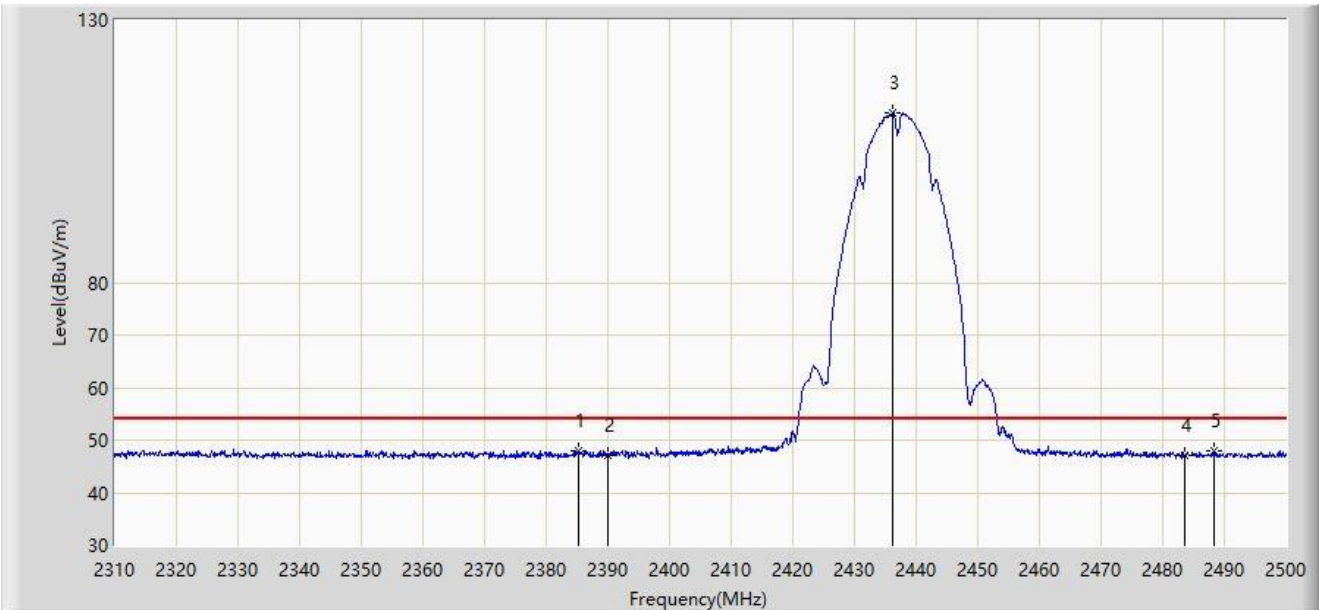


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2385.145	47.968	16.974	-6.032	54.000	30.995	AV
2		2390.000	47.092	16.100	-6.908	54.000	30.992	AV
3		2436.255	112.454	81.584	N/A	N/A	30.870	AV
4		2483.500	47.183	16.292	-6.817	54.000	30.892	AV
5	*	2488.220	48.029	17.145	-5.971	54.000	30.884	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11b at 2462MHz	

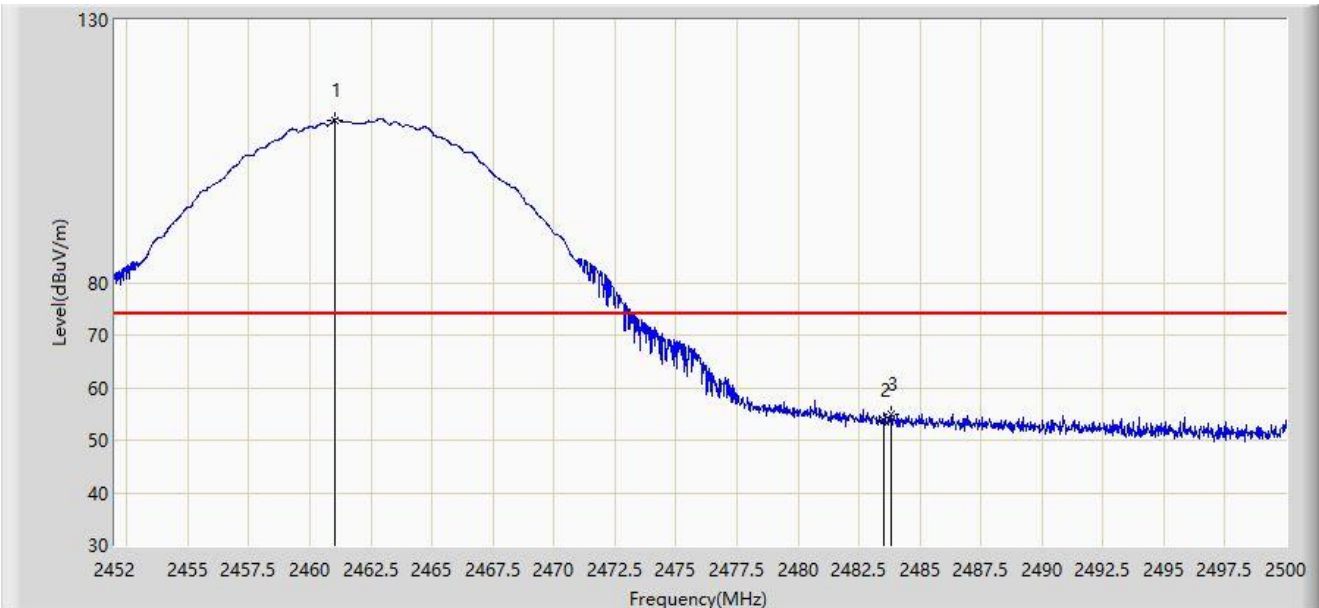

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.024	110.944	80.064	N/A	N/A	30.880	PK
2		2483.500	53.753	22.862	-20.247	74.000	30.892	PK
3	*	2483.800	54.987	24.096	-19.013	74.000	30.891	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11b at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.872	109.350	78.466	N/A	N/A	30.884	AV
2	*	2483.500	43.764	12.873	-10.236	54.000	30.892	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11b at 2462MHz	

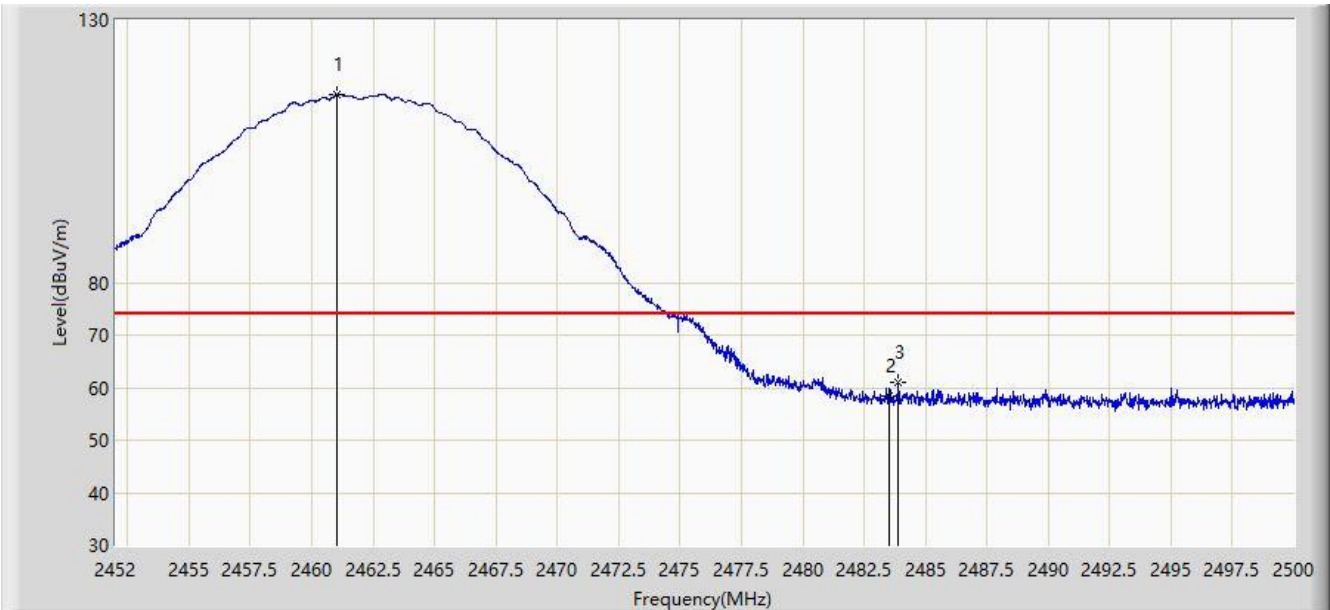

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2461.048	115.906	85.026	N/A	N/A	30.880	PK
2		2483.500	58.384	27.493	-15.616	74.000	30.892	PK
3	*	2483.896	60.920	30.029	-13.080	74.000	30.891	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11b at 2462MHz	



No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2461.120	113.715	82.835	N/A	N/A	30.880	AV
2		2483.500	48.551	17.660	-5.449	54.000	30.892	AV
3	*	2484.544	49.036	18.146	-4.964	54.000	30.890	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2022-11-19
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2412MHz	

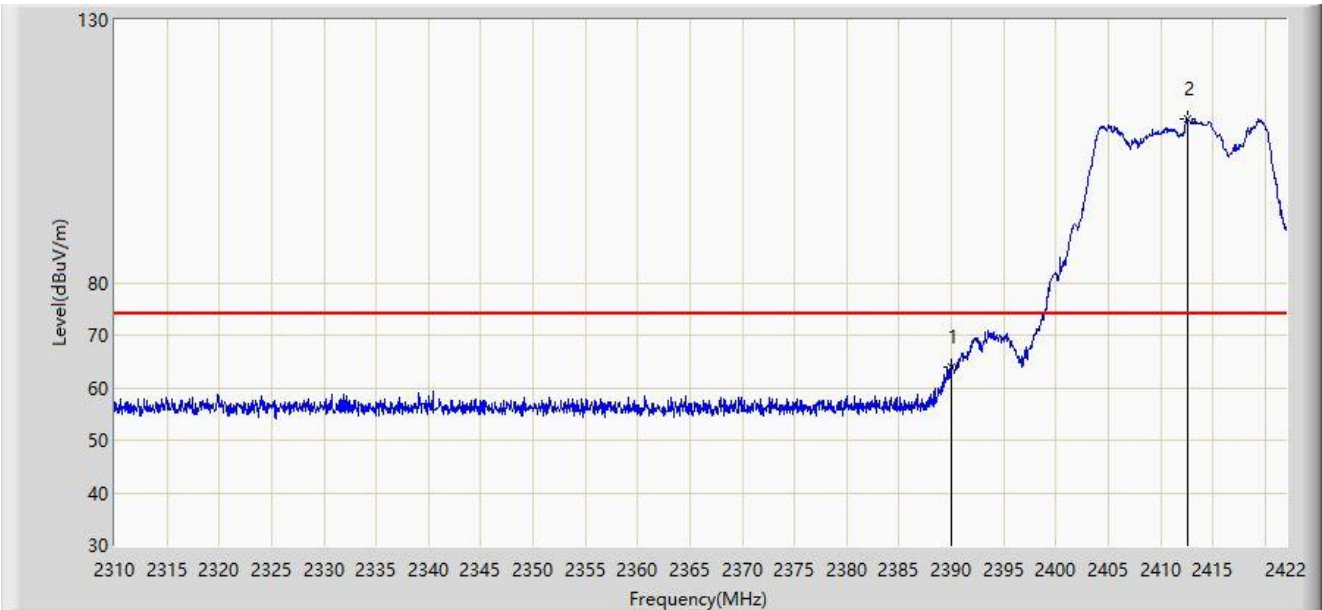


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	63.927	32.935	-10.073	74.000	30.992	PK
2		2412.592	111.237	80.284	N/A	N/A	30.953	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-19
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2412MHz	

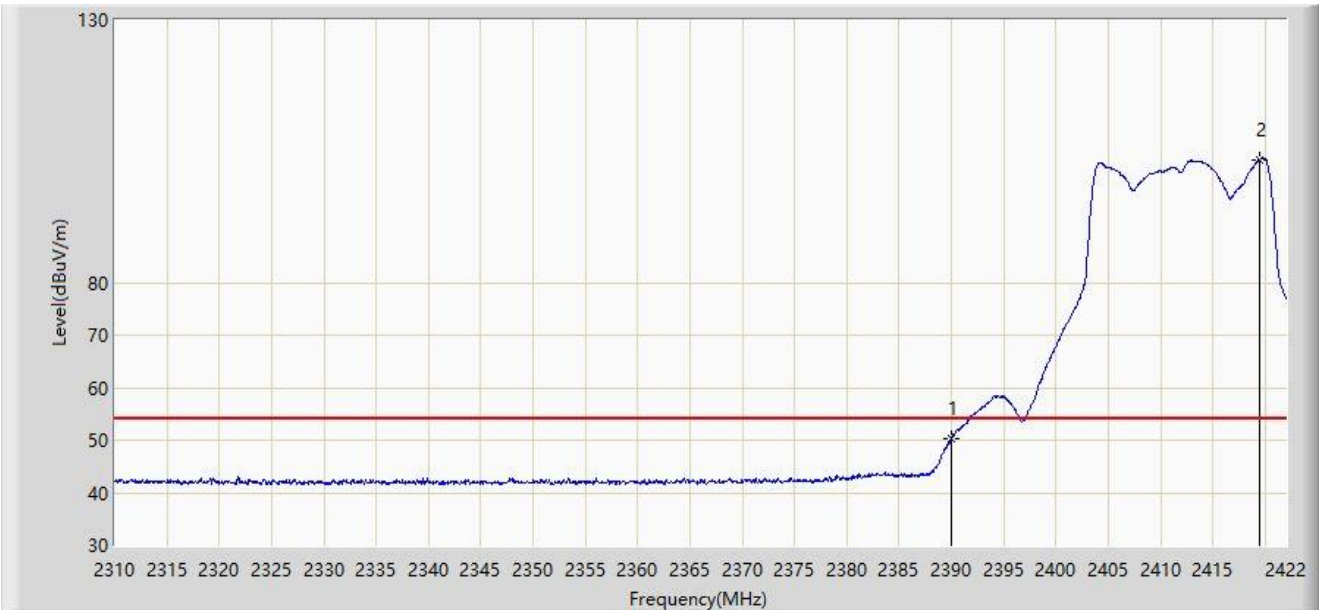


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	50.433	19.441	-3.567	54.000	30.992	AV
2		2419.536	103.453	72.519	N/A	N/A	30.934	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-19
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2412MHz	

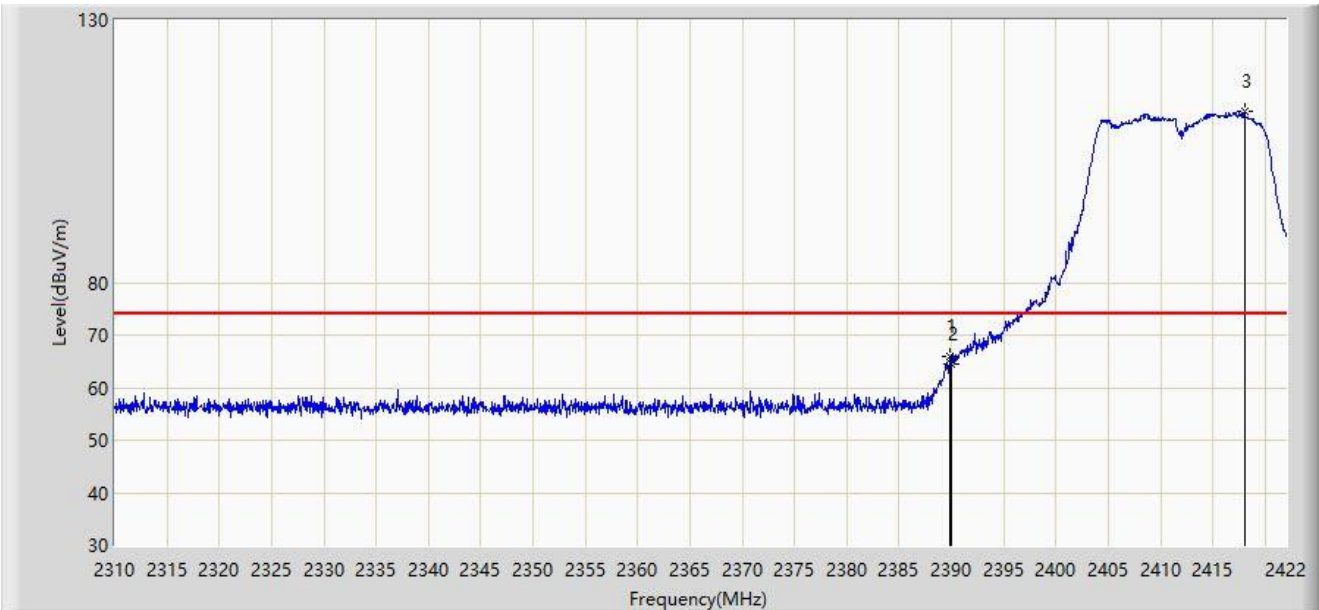


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.856	66.039	35.047	-7.961	74.000	30.992	PK
2		2390.000	64.633	33.641	-9.367	74.000	30.992	PK
3		2418.024	112.634	81.696	N/A	N/A	30.938	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-19
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2412MHz	

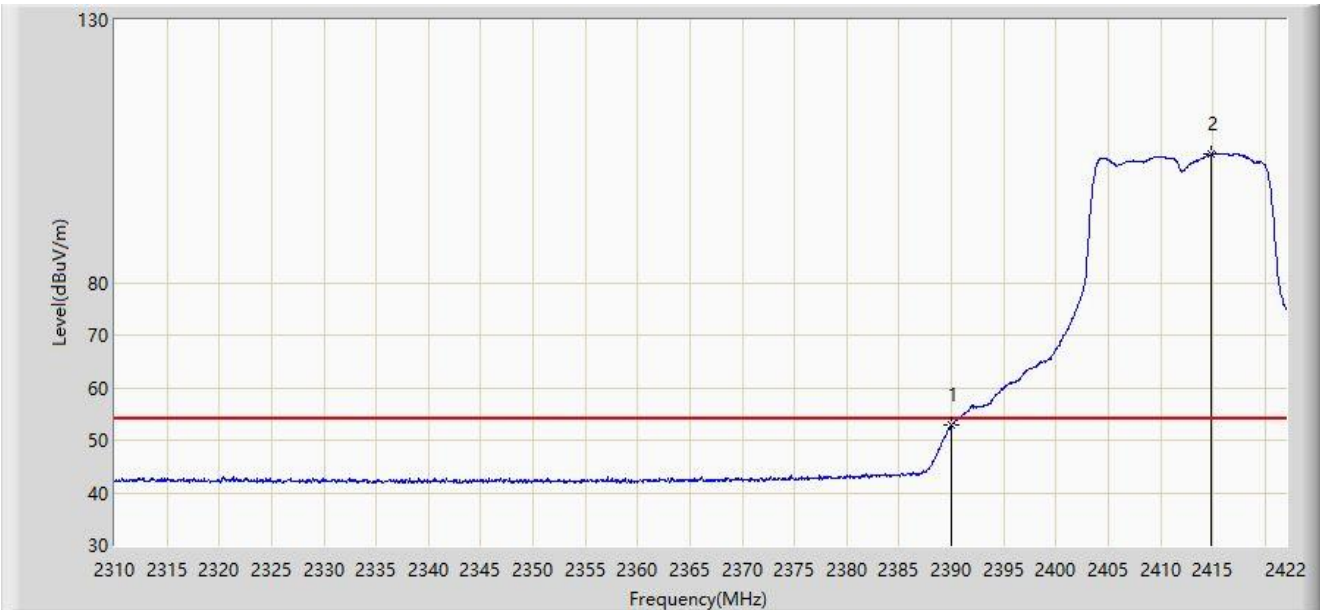


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	52.968	21.976	-1.032	54.000	30.992	AV
2		2414.776	104.388	73.441	N/A	N/A	30.947	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2417MHz	

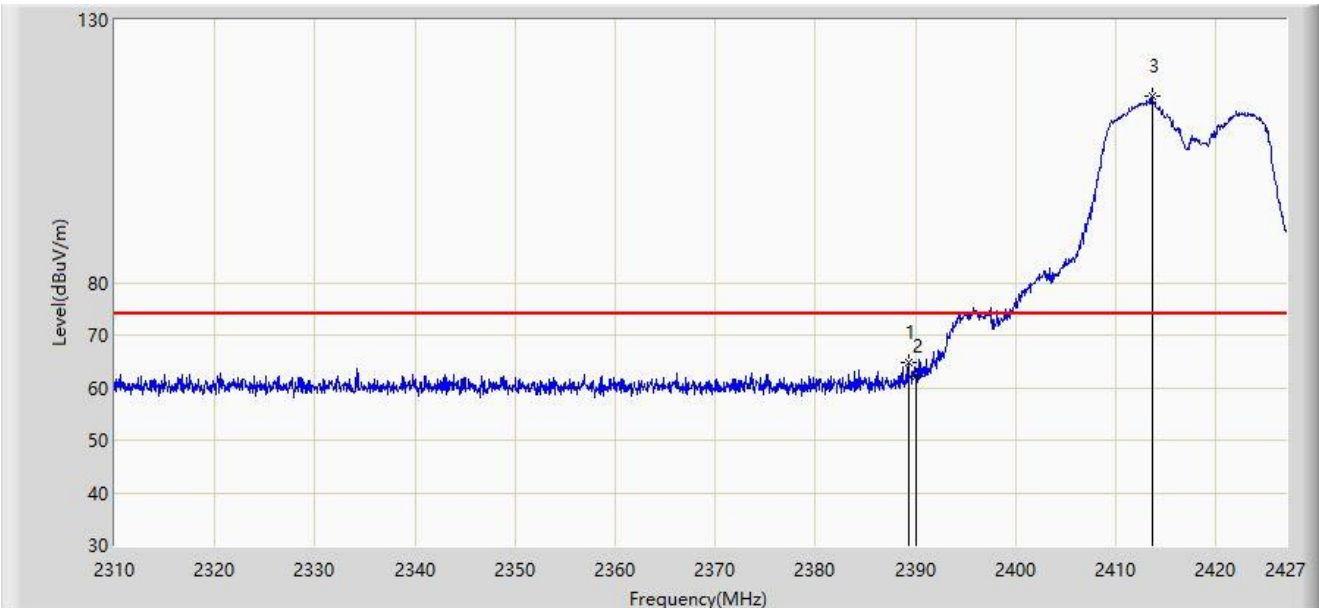


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.268	64.887	33.894	-9.113	74.000	30.992	PK
2		2390.000	62.208	31.216	-11.792	74.000	30.992	PK
3		2413.604	115.363	84.413	N/A	N/A	30.950	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2417MHz	

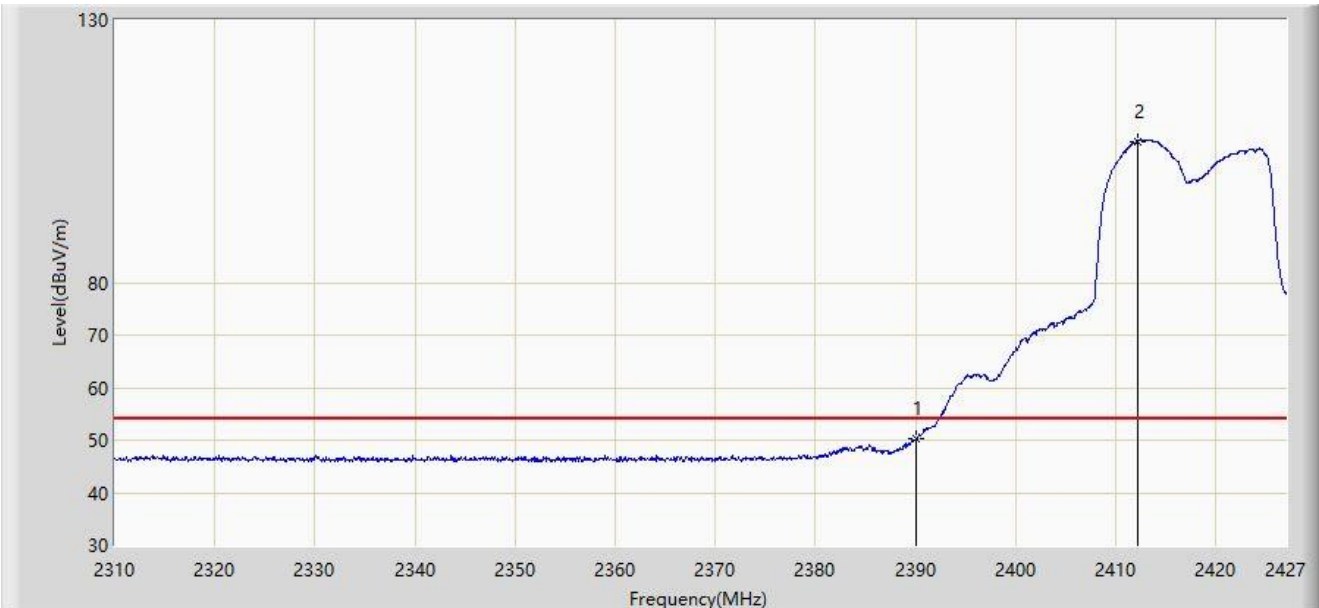


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	50.234	19.242	-3.766	54.000	30.992	AV
2		2412.141	106.865	75.911	N/A	N/A	30.954	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2417MHz	

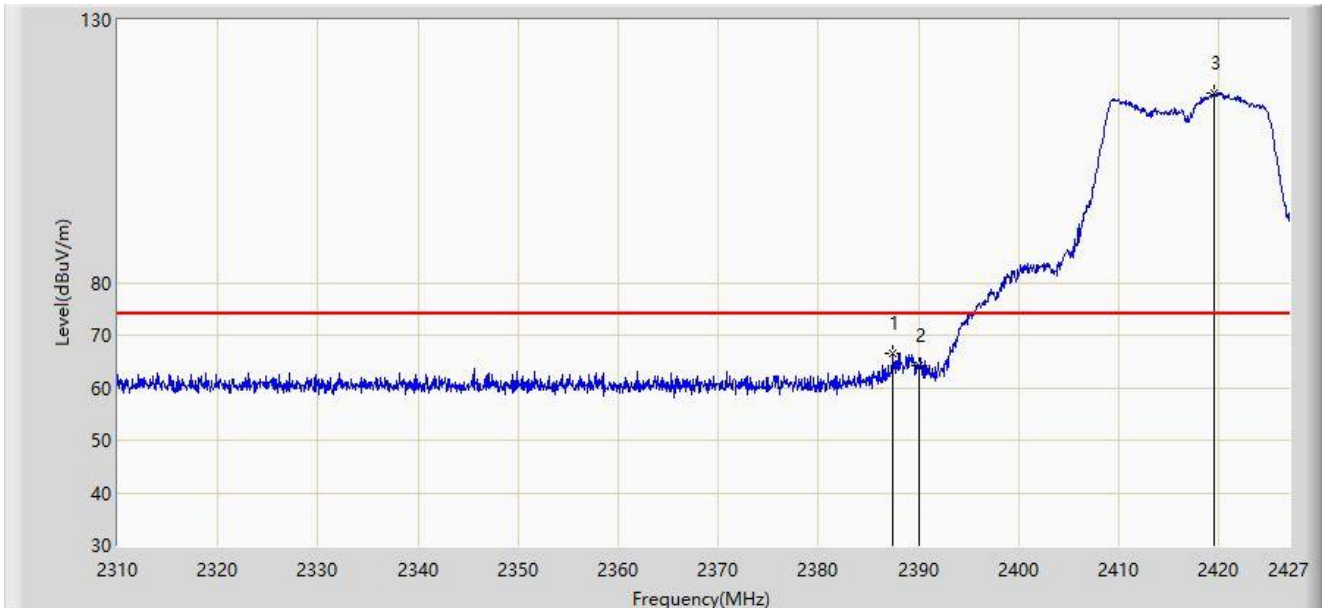


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2387.454	66.586	35.593	-7.414	74.000	30.994	PK
2		2390.000	64.099	33.107	-9.901	74.000	30.992	PK
3		2419.512	115.962	85.028	N/A	N/A	30.934	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2417MHz	

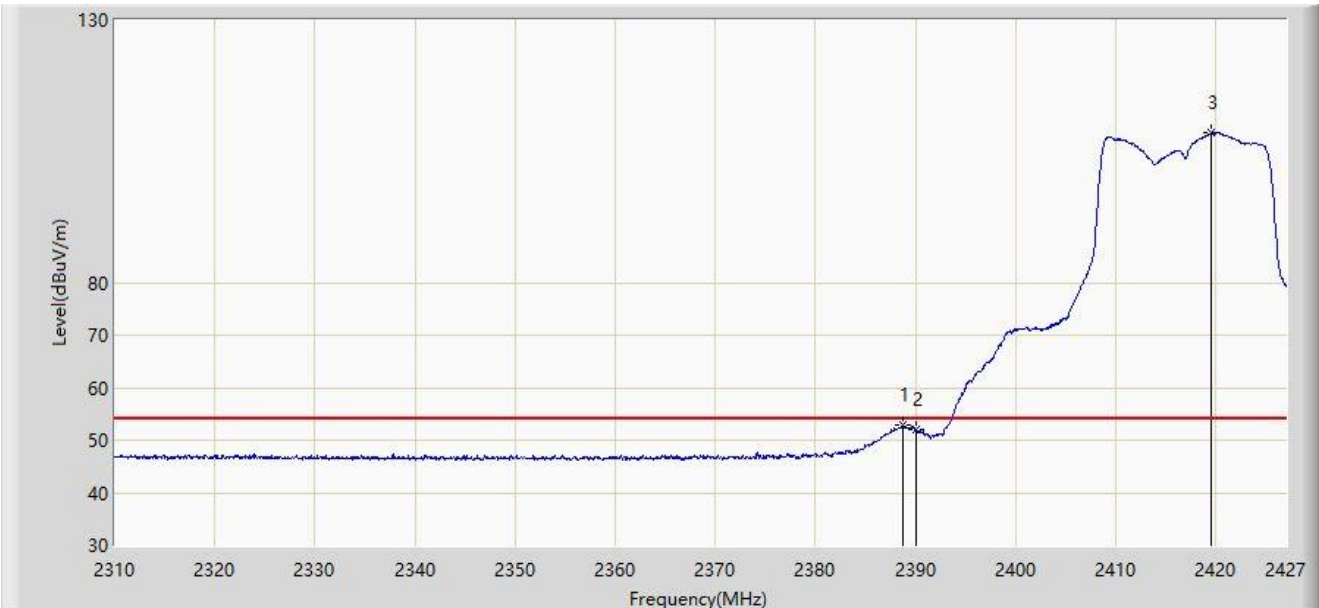

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2388.683	52.809	21.816	-1.191	54.000	30.993	AV
2		2390.000	52.064	21.072	-1.936	54.000	30.992	AV
3		2419.454	108.436	77.502	N/A	N/A	30.934	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2422MHz	

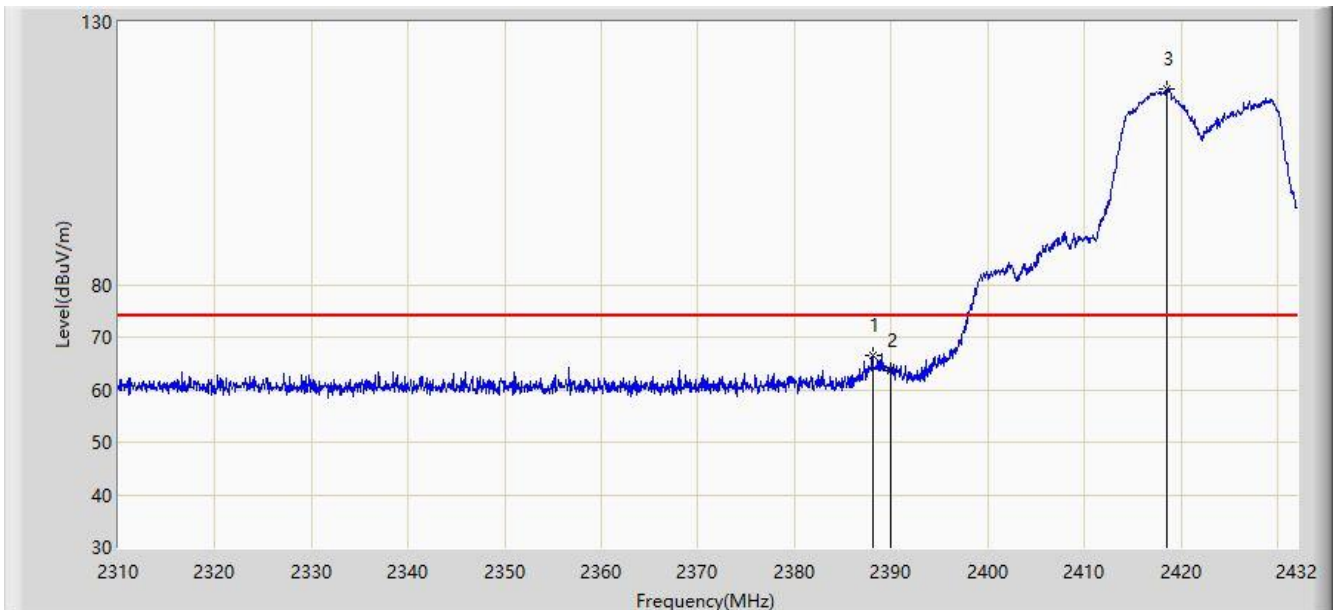


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2388.080	66.651	35.658	-7.349	74.000	30.993	PK
2		2390.000	63.592	32.600	-10.408	74.000	30.992	PK
3		2418.519	117.329	86.392	N/A	N/A	30.937	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2422MHz	

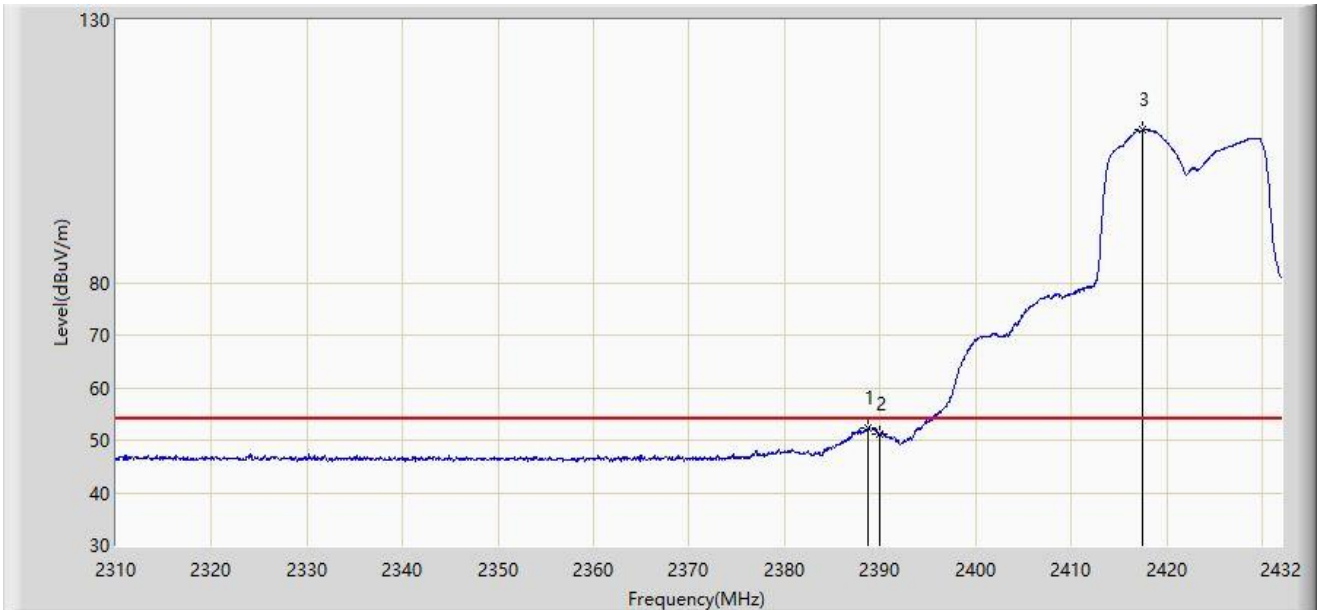


No	Mark	Frequency (MHz)	Measure Level (dBµV/m)	Reading Level (dBµV)	Margin (dB)	Limit (dBµV/m)	Factor (dB/m)	Type
1	*	2388.751	52.241	21.248	-1.759	54.000	30.993	AV
2		2390.000	51.044	20.052	-2.956	54.000	30.992	AV
3		2417.482	109.076	78.136	N/A	N/A	30.940	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2422MHz	

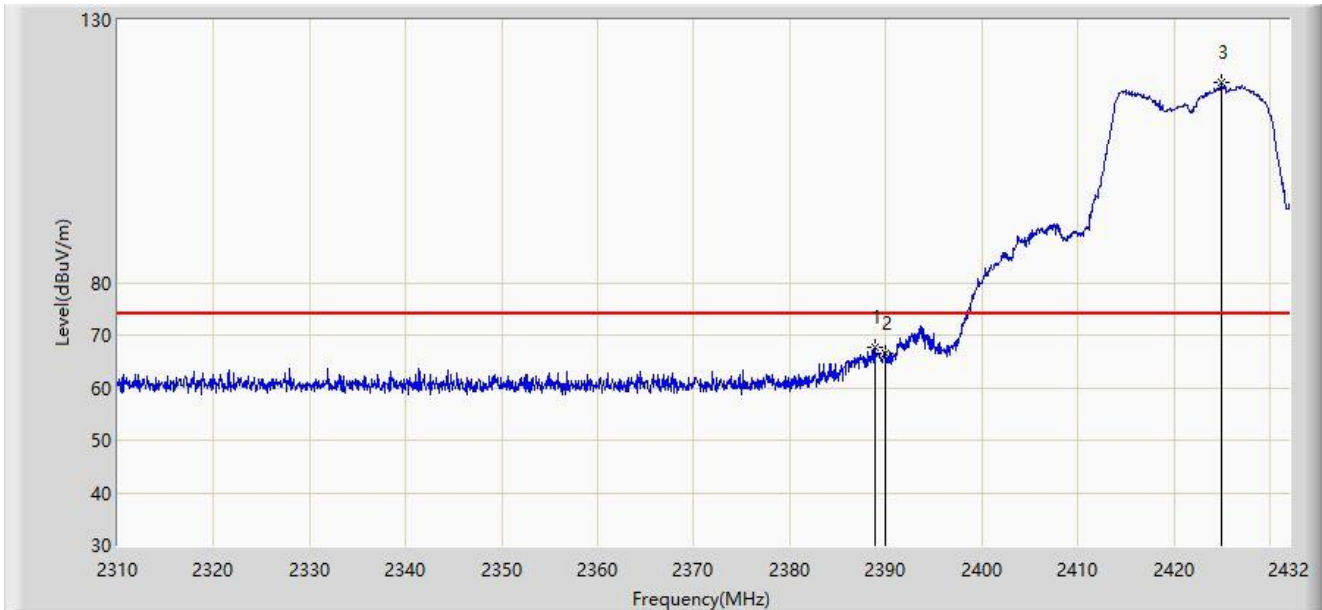


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2388.812	67.691	36.698	-6.309	74.000	30.993	PK
2		2390.000	66.658	35.666	-7.342	74.000	30.992	PK
3		2424.985	118.127	87.215	N/A	N/A	30.912	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2422MHz	

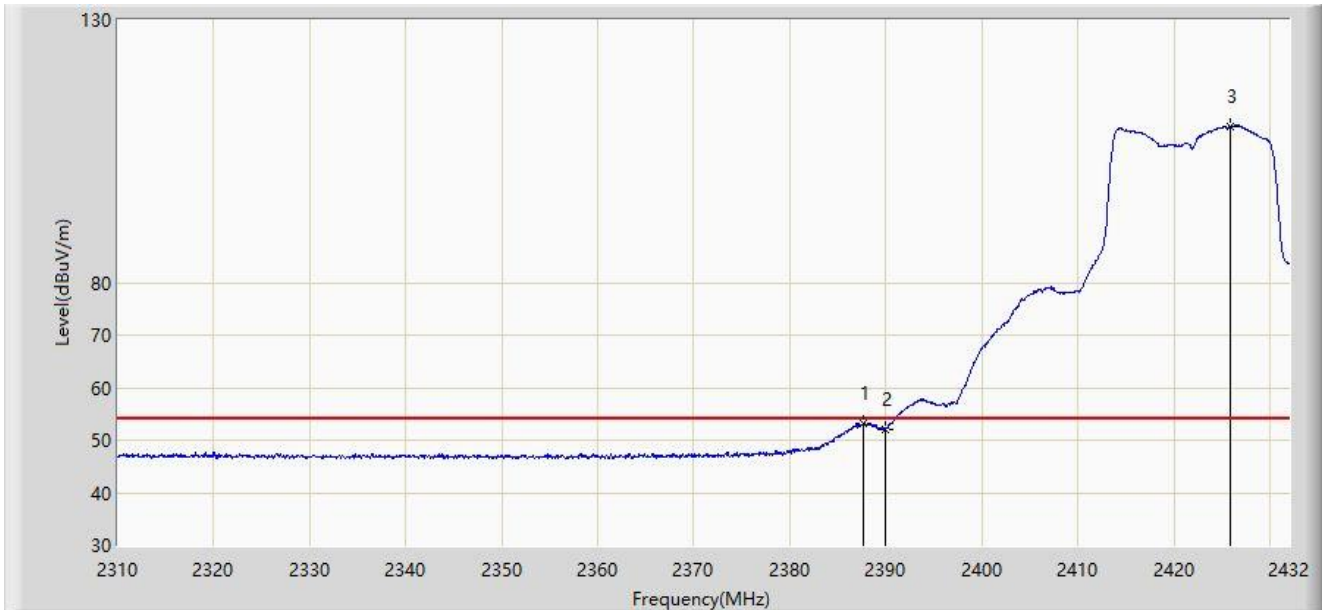


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2387.714	53.253	22.260	-0.747	54.000	30.993	AV
2		2390.000	52.076	21.084	-1.924	54.000	30.992	AV
3		2425.900	109.731	78.823	N/A	N/A	30.908	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2427MHz	

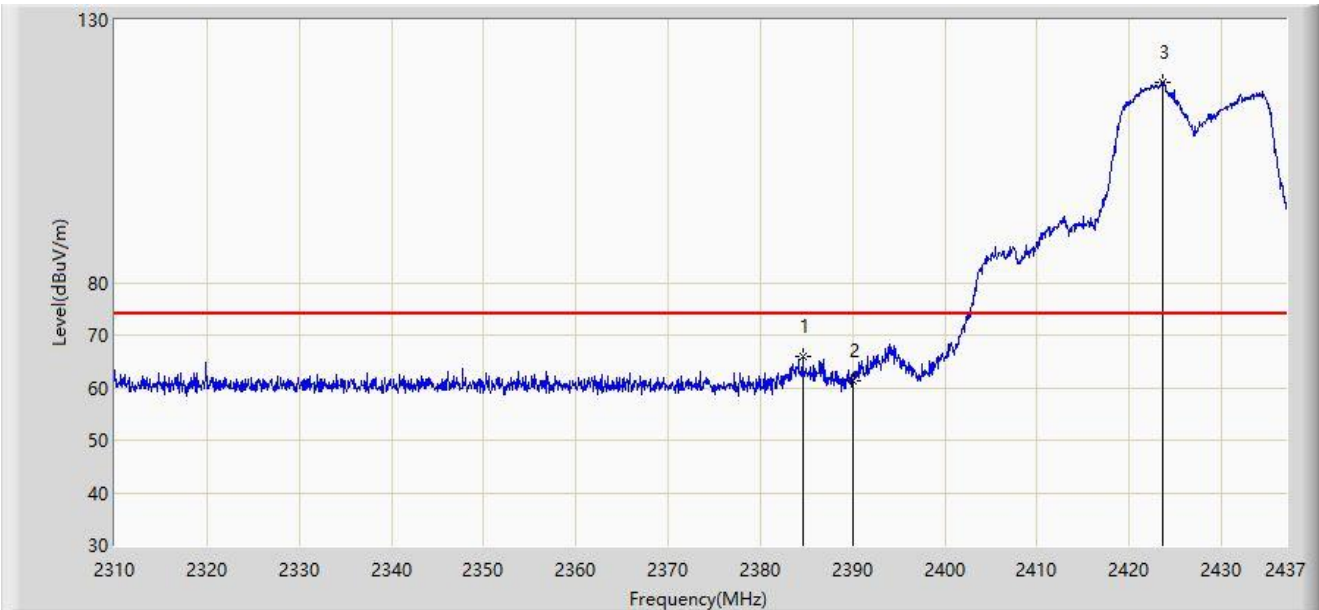

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2384.613	65.971	34.976	-8.029	74.000	30.994	PK
2		2390.000	61.368	30.376	-12.632	74.000	30.992	PK
3		2423.602	118.178	87.260	N/A	N/A	30.917	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2427MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	50.209	19.217	-3.791	54.000	30.992	AV
2		2421.887	109.682	78.757	N/A	N/A	30.925	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2427MHz	

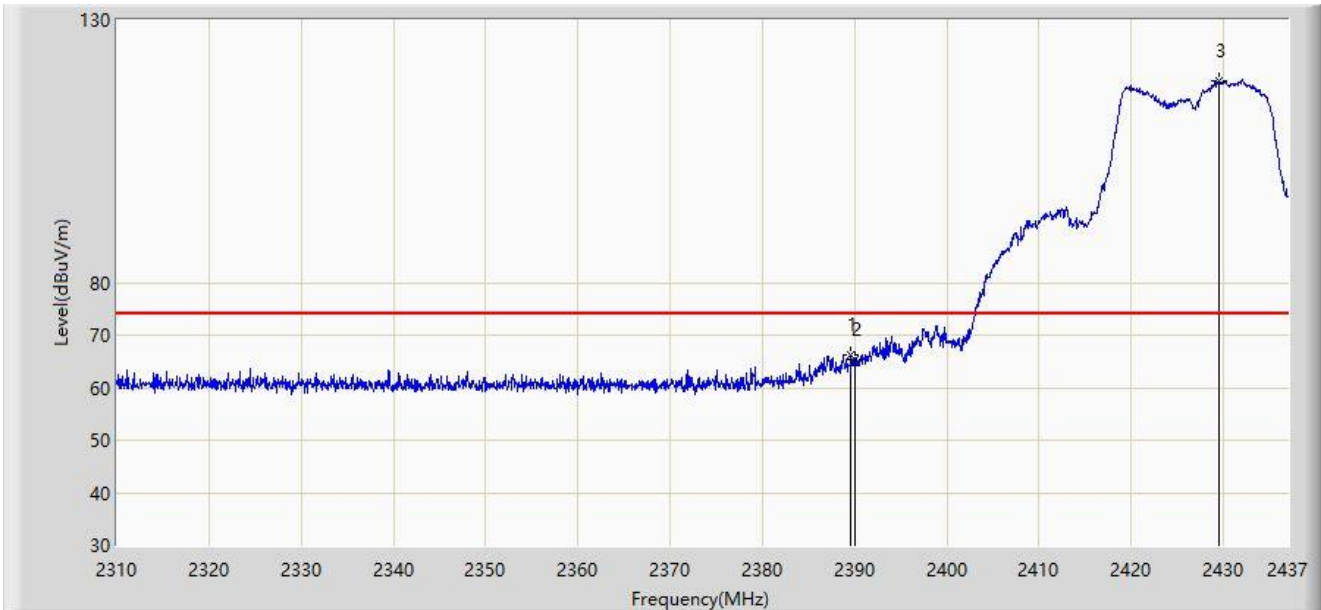


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.629	66.100	35.108	-7.900	74.000	30.992	PK
2		2390.000	65.501	34.509	-8.499	74.000	30.992	PK
3		2429.571	118.391	87.497	N/A	N/A	30.893	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2427MHz	

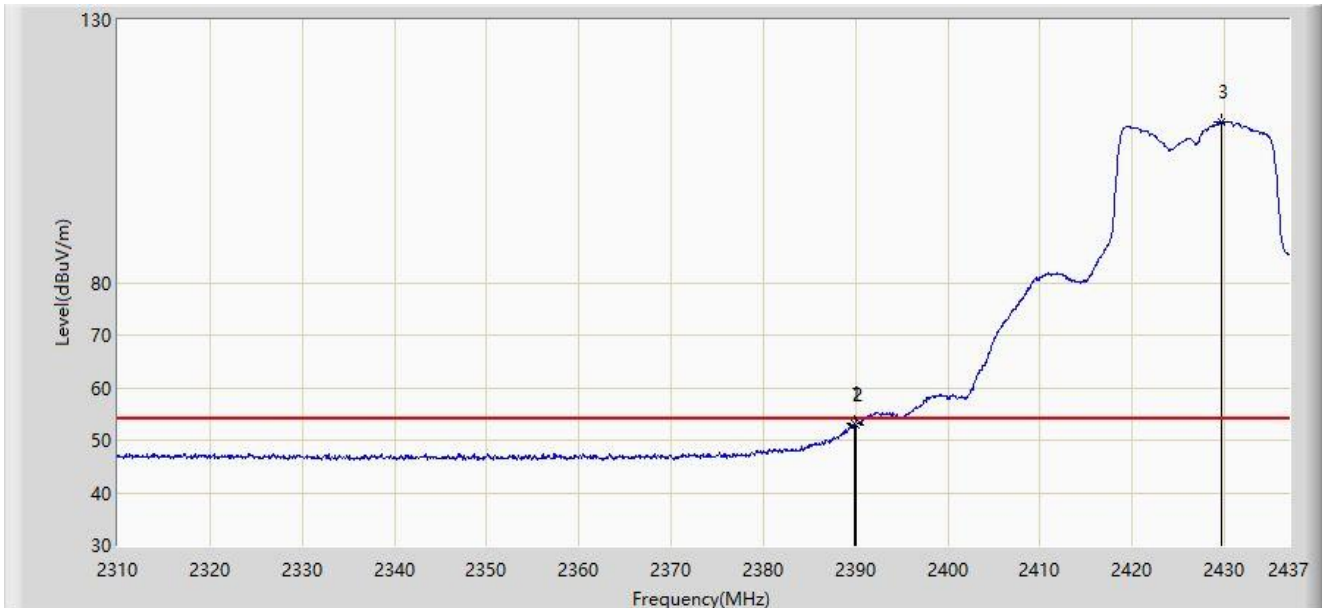

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.883	53.064	22.072	-0.936	54.000	30.992	AV
2		2390.000	52.814	21.822	-1.186	54.000	30.992	AV
3		2429.634	110.597	79.704	N/A	N/A	30.893	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2022-12-01
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2437MHz	

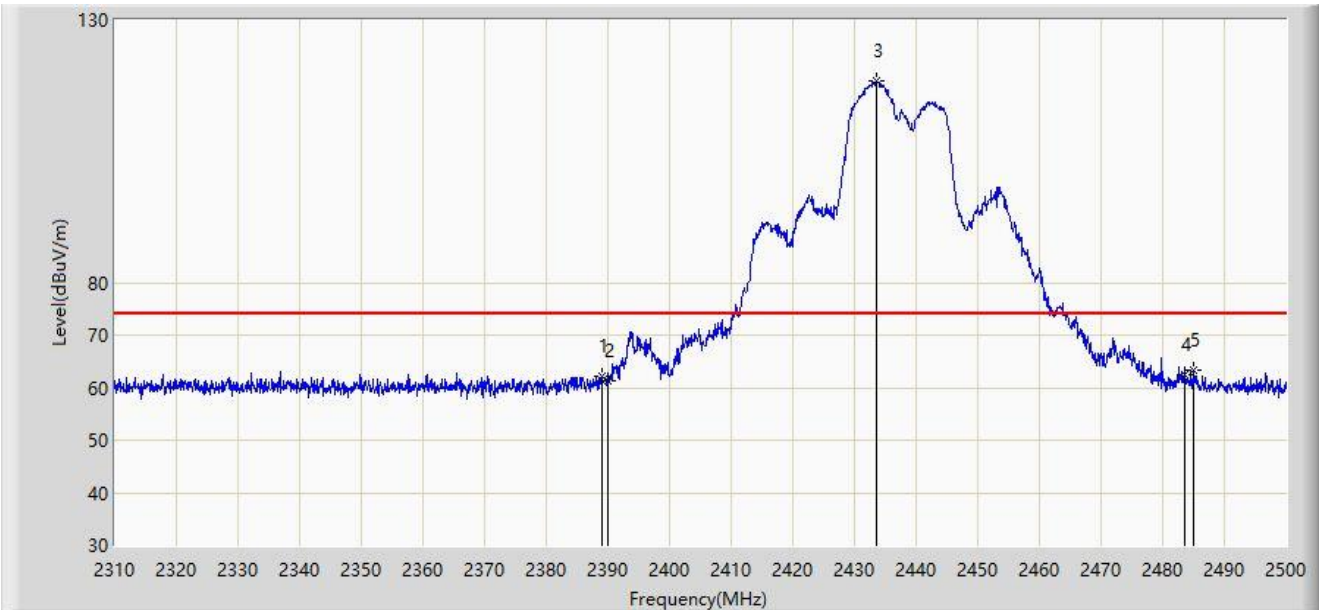


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2389.040	62.274	31.281	-11.726	74.000	30.993	PK
2		2390.000	61.350	30.358	-12.650	74.000	30.992	PK
3		2433.690	118.532	87.653	N/A	N/A	30.879	PK
4		2483.500	62.531	31.640	-11.469	74.000	30.892	PK
5	*	2485.085	63.355	32.466	-10.645	74.000	30.889	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-12-01
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2437MHz	

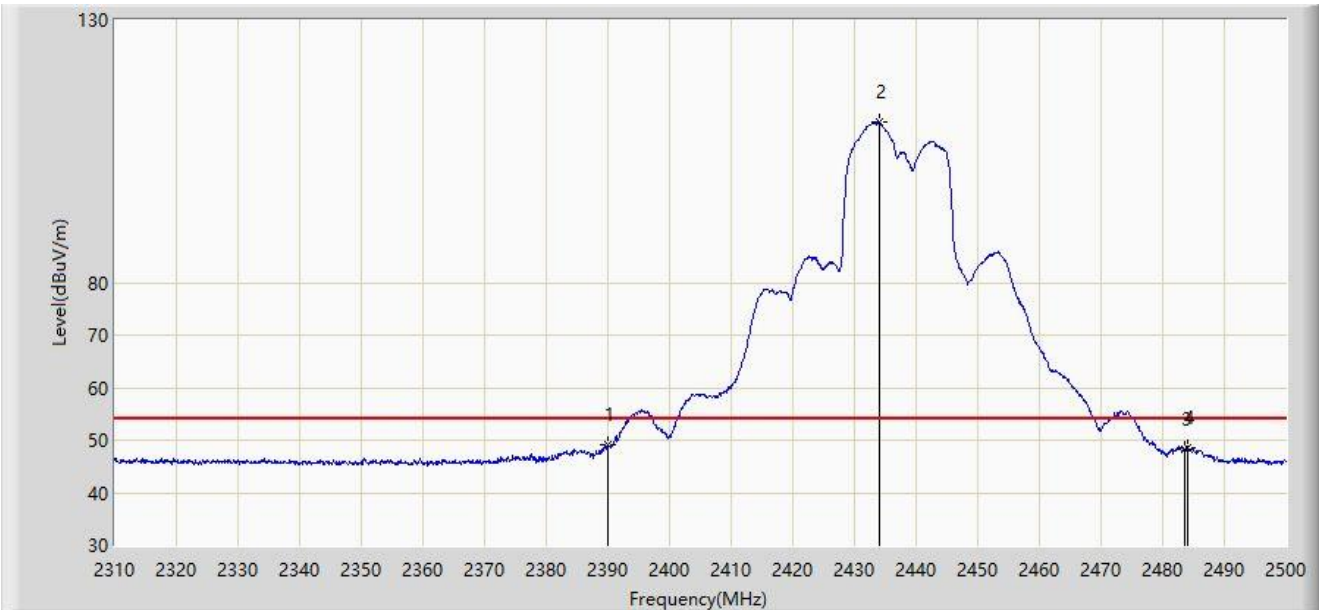


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	49.044	18.052	-4.956	54.000	30.992	AV
2		2433.975	110.504	79.626	N/A	N/A	30.878	AV
3		2483.500	48.147	17.256	-5.853	54.000	30.892	AV
4		2484.040	48.473	17.582	-5.527	54.000	30.891	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-12-01
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2437MHz	

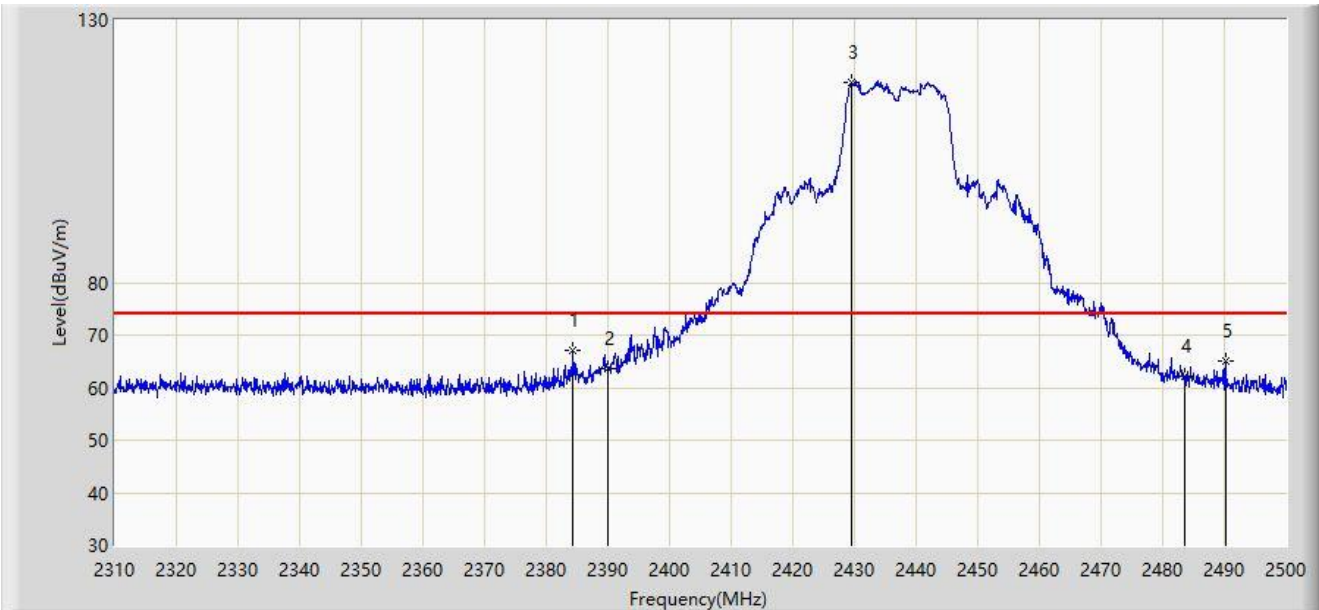


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2384.290	67.224	36.229	-6.776	74.000	30.995	PK
2		2390.000	63.588	32.596	-10.412	74.000	30.992	PK
3		2429.510	118.068	87.174	N/A	N/A	30.894	PK
4		2483.500	62.097	31.206	-11.903	74.000	30.892	PK
5		2490.120	64.985	34.104	-9.015	74.000	30.880	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-12-01
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2437MHz	

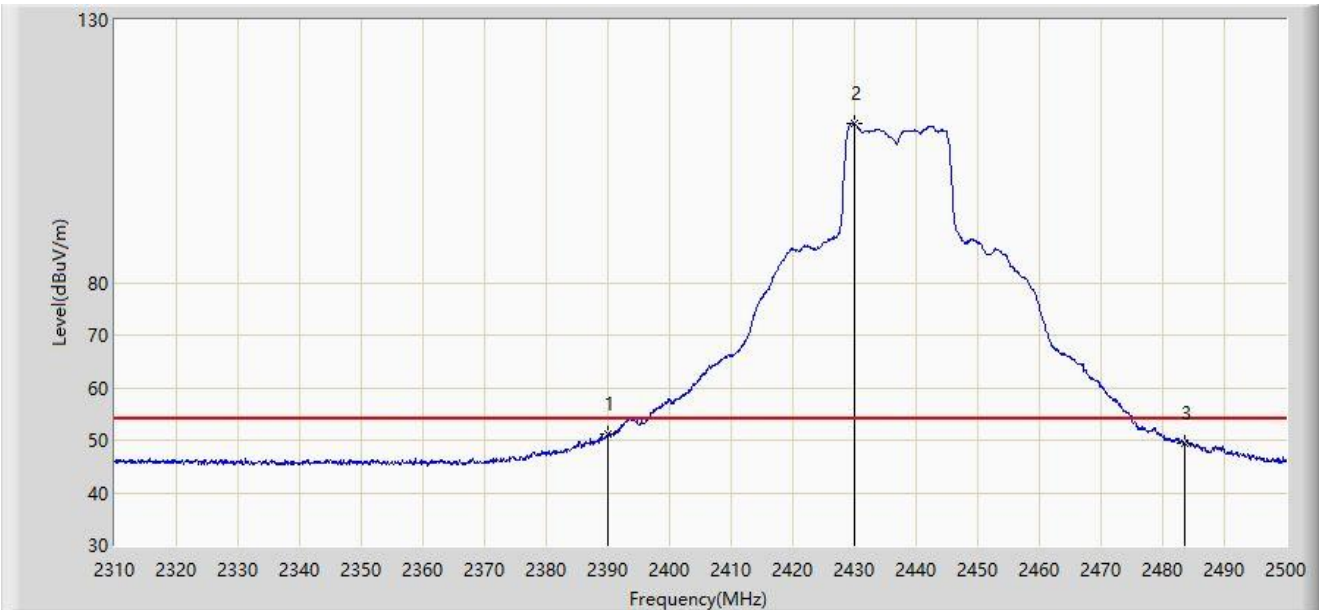

No	Mark	Frequency (MHz)	Measure Level (dBµV/m)	Reading Level (dBµV)	Margin (dB)	Limit (dBµV/m)	Factor (dB/m)	Type
1	*	2390.000	51.166	20.174	-2.834	54.000	30.992	AV
2		2429.890	110.372	79.480	N/A	N/A	30.893	AV
3		2483.500	49.304	18.413	-4.696	54.000	30.892	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2447MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2443.458	118.394	87.529	N/A	N/A	30.866	PK
2		2483.500	63.725	32.834	-10.275	74.000	30.892	PK
3	*	2483.998	64.810	33.919	-9.190	74.000	30.891	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2447MHz	

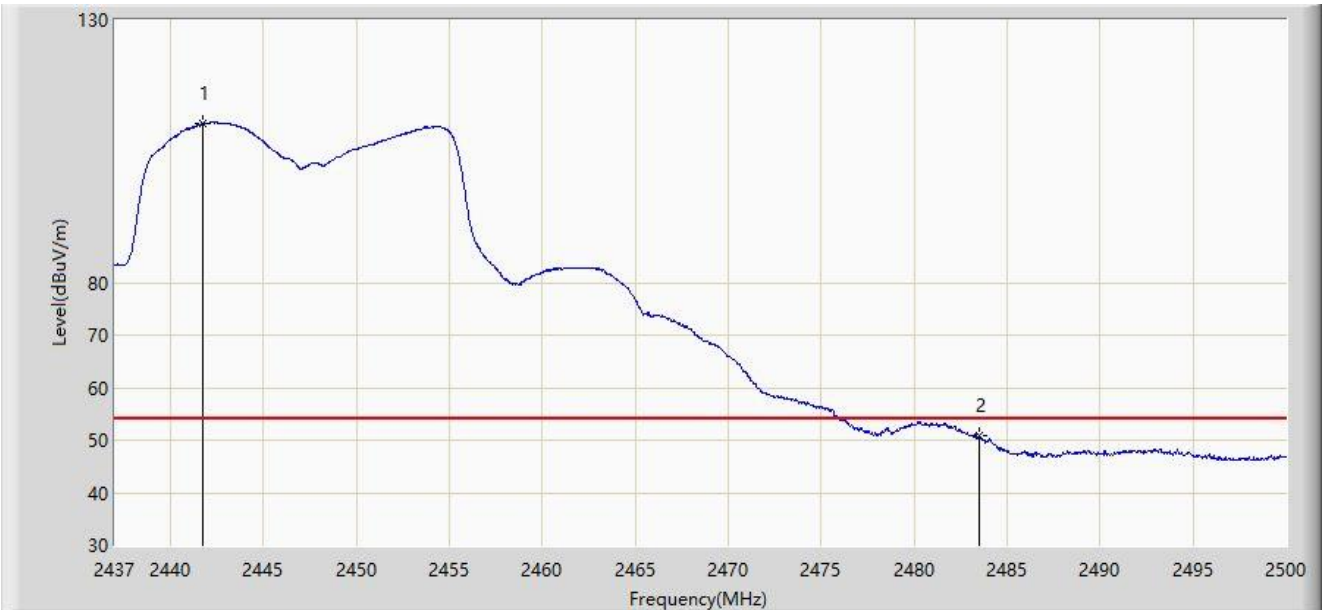


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2441.725	110.294	79.429	N/A	N/A	30.865	AV
2	*	2483.500	50.761	19.870	-3.239	54.000	30.892	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2447MHz	

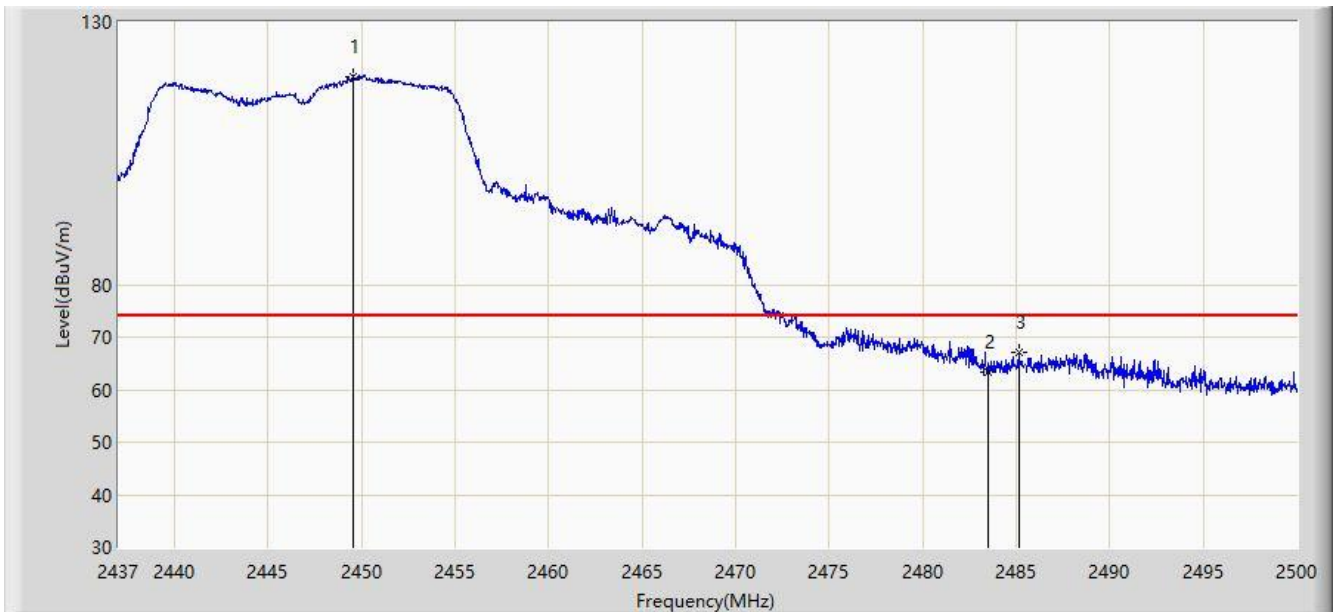


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2449.537	119.616	88.748	N/A	N/A	30.868	PK
2		2483.500	63.344	32.453	-10.656	74.000	30.892	PK
3	*	2485.132	67.002	36.113	-6.998	74.000	30.889	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2447MHz	

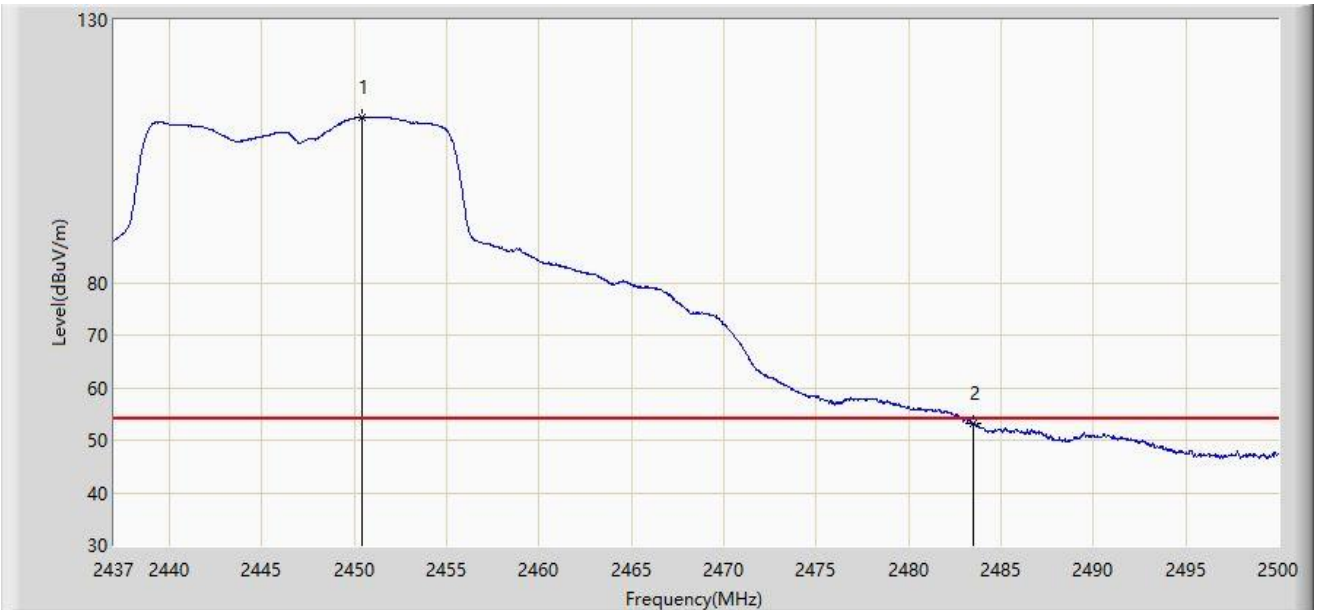

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2450.419	111.550	80.681	N/A	N/A	30.869	AV
2	*	2483.500	53.159	22.268	-0.841	54.000	30.892	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2452MHz	

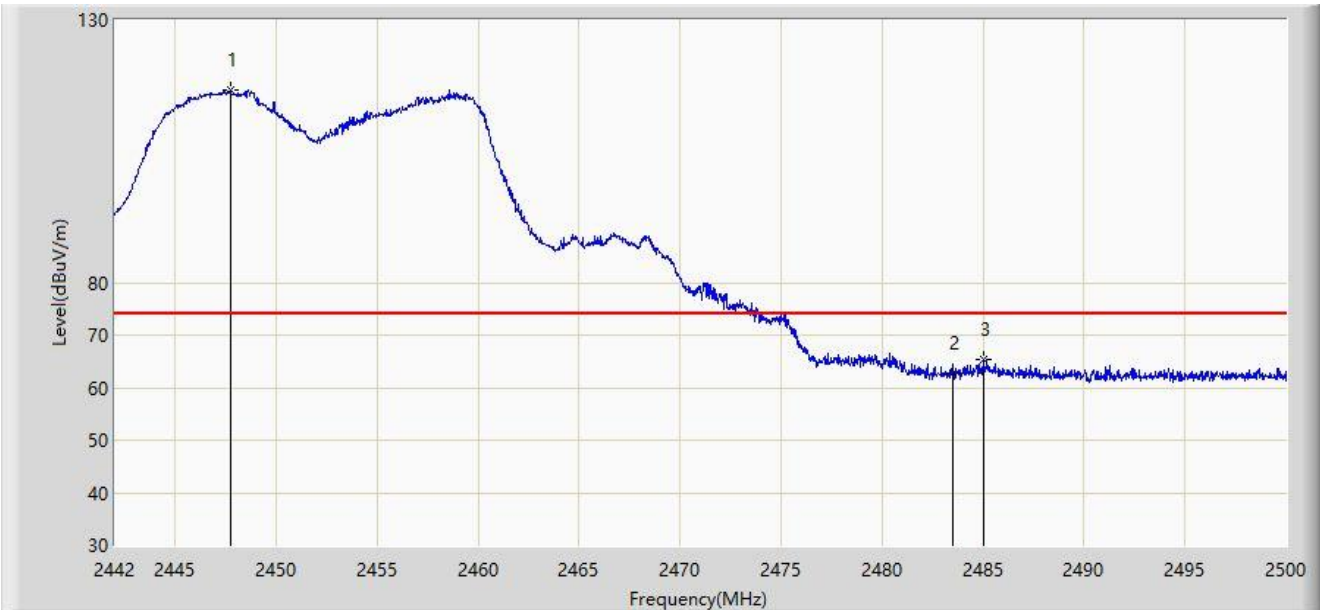


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2447.742	116.769	85.902	N/A	N/A	30.867	PK
2		2483.500	62.633	31.742	-11.367	74.000	30.892	PK
3	*	2485.007	65.306	34.417	-8.694	74.000	30.889	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2452MHz	

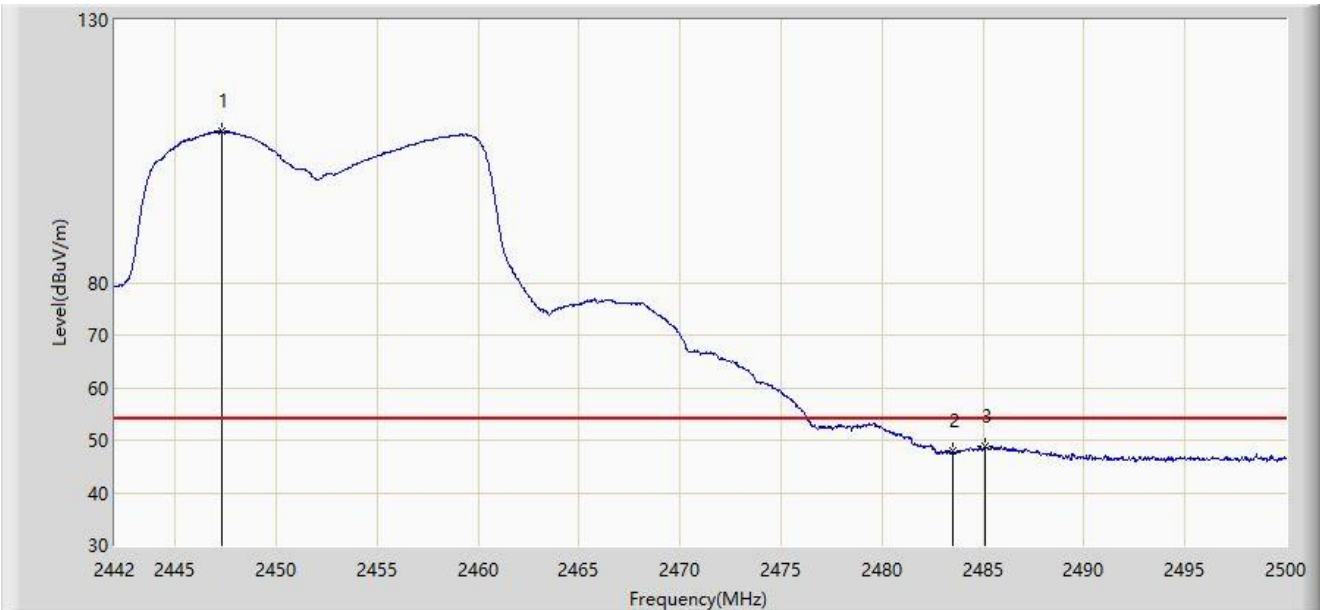


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2447.278	108.746	77.879	N/A	N/A	30.867	AV
2		2483.500	47.978	17.087	-6.022	54.000	30.892	AV
3	*	2485.065	48.949	18.060	-5.051	54.000	30.889	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2452MHz	

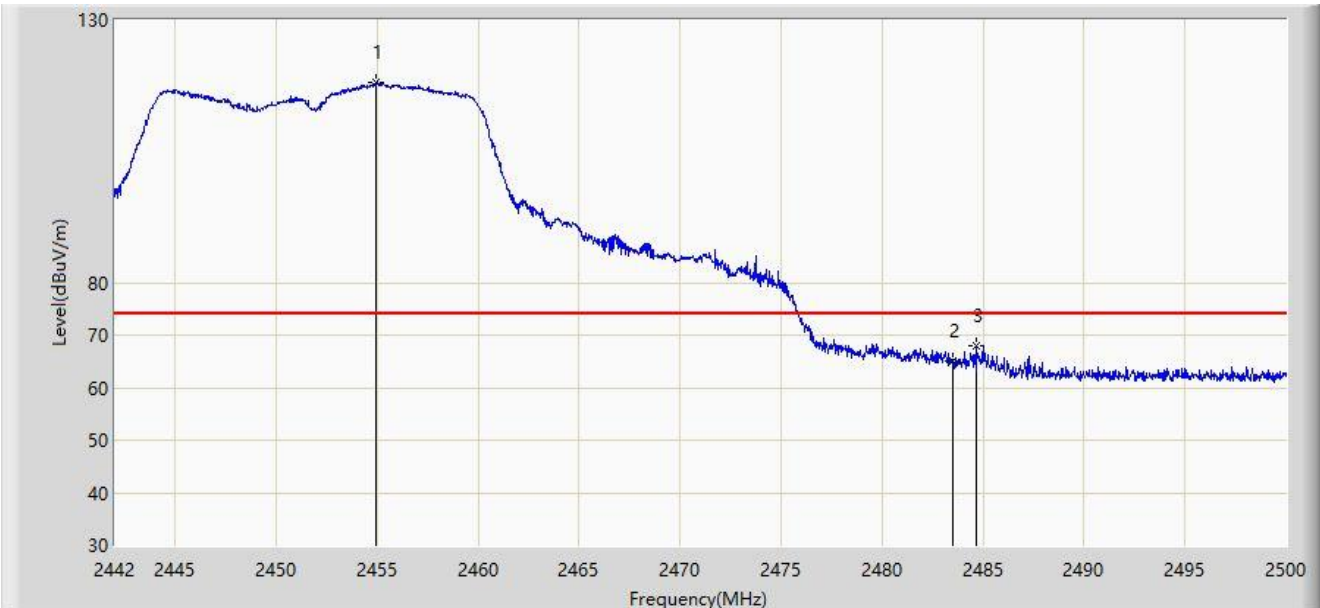


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2454.905	118.133	87.262	N/A	N/A	30.871	PK
2		2483.500	64.933	34.042	-9.067	74.000	30.892	PK
3	*	2484.630	67.896	37.006	-6.104	74.000	30.890	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2452MHz	

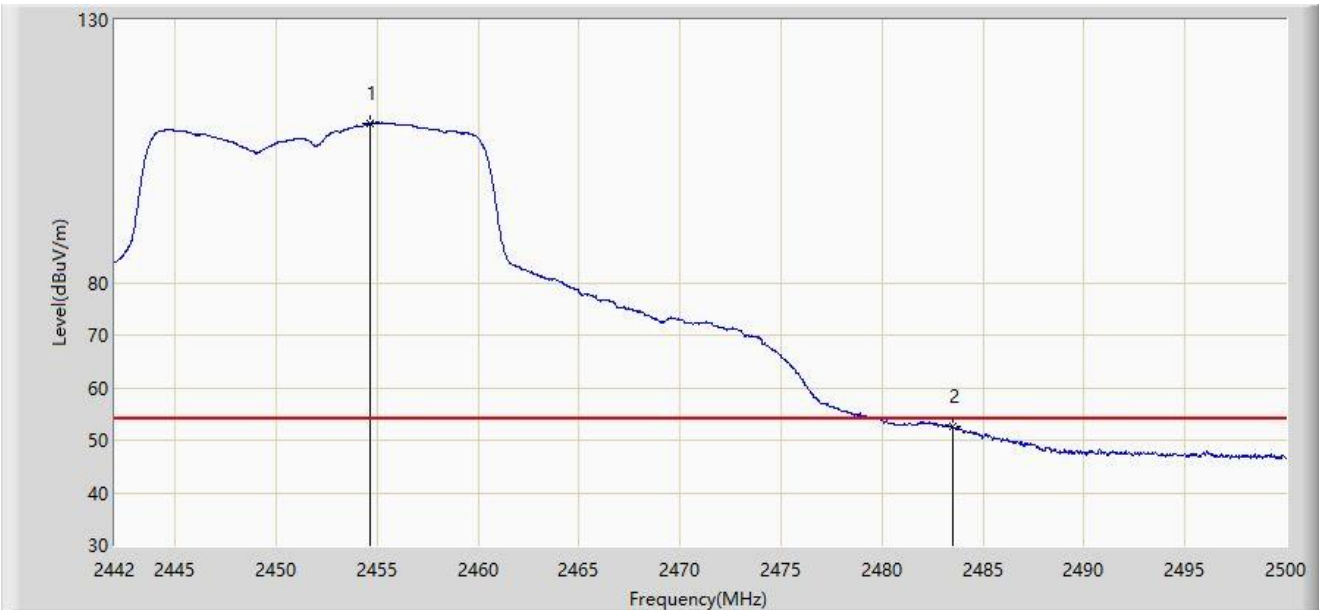


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2454.615	110.283	79.412	N/A	N/A	30.871	AV
2	*	2483.500	52.469	21.578	-1.531	54.000	30.892	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2457MHz	

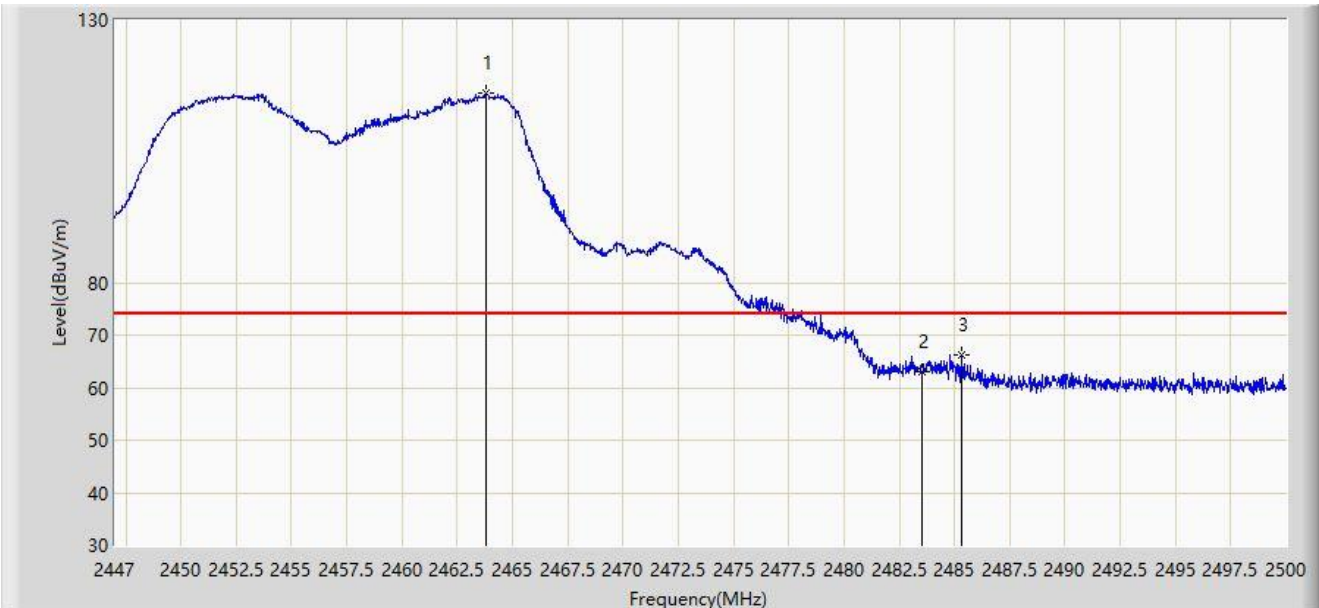


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.827	116.038	85.152	N/A	N/A	30.886	PK
2		2483.500	63.184	32.293	-10.816	74.000	30.892	PK
3	*	2485.319	66.198	35.310	-7.802	74.000	30.889	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2457MHz	

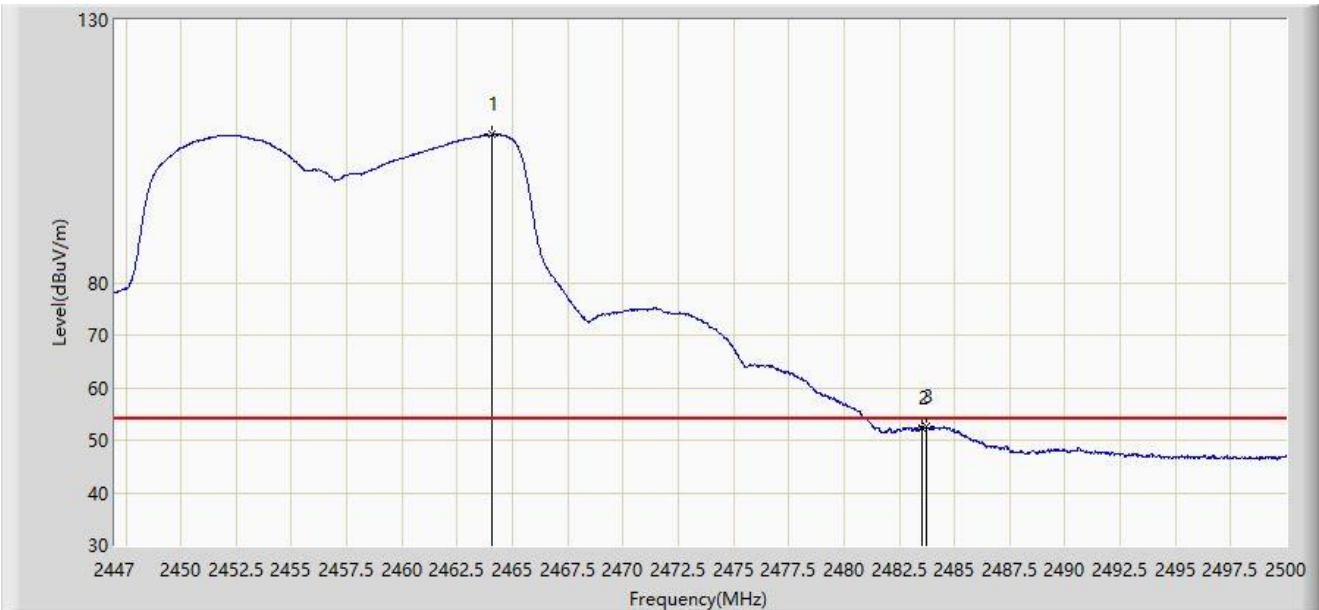


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2464.040	108.145	77.258	N/A	N/A	30.886	AV
2		2483.500	52.259	21.368	-1.741	54.000	30.892	AV
3	*	2483.756	52.496	21.605	-1.504	54.000	30.891	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2457MHz	

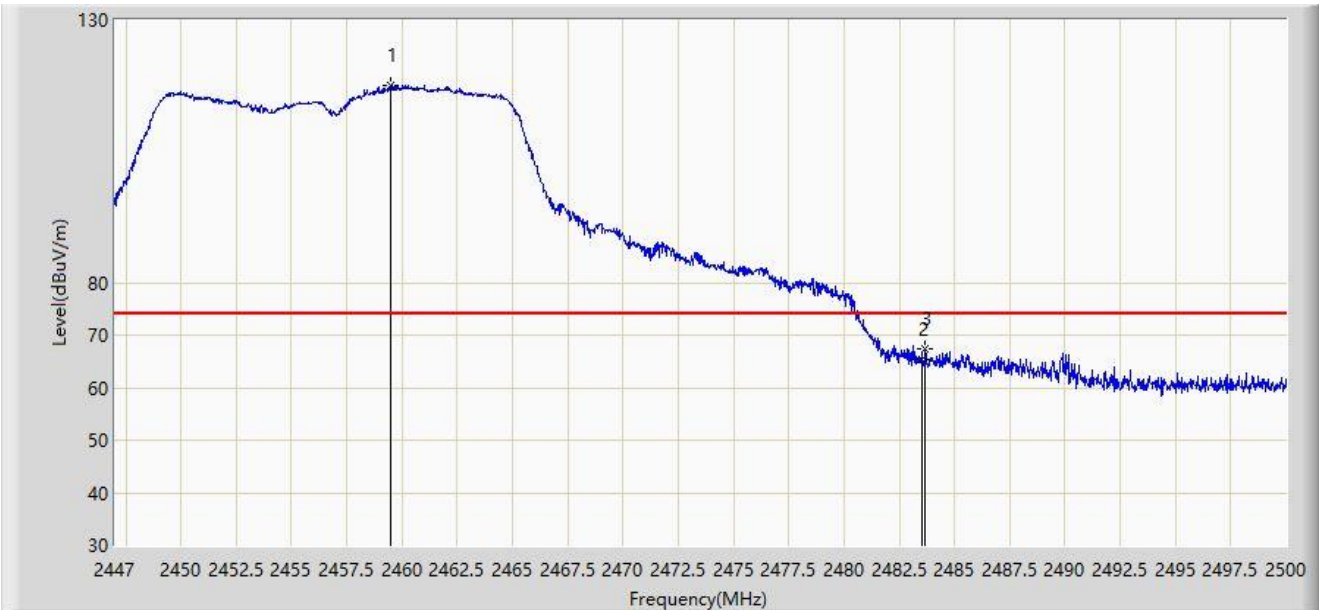


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2459.481	117.493	86.616	N/A	N/A	30.877	PK
2		2483.500	65.410	34.519	-8.590	74.000	30.892	PK
3	*	2483.676	67.366	36.475	-6.634	74.000	30.892	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30 -
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2457MHz	

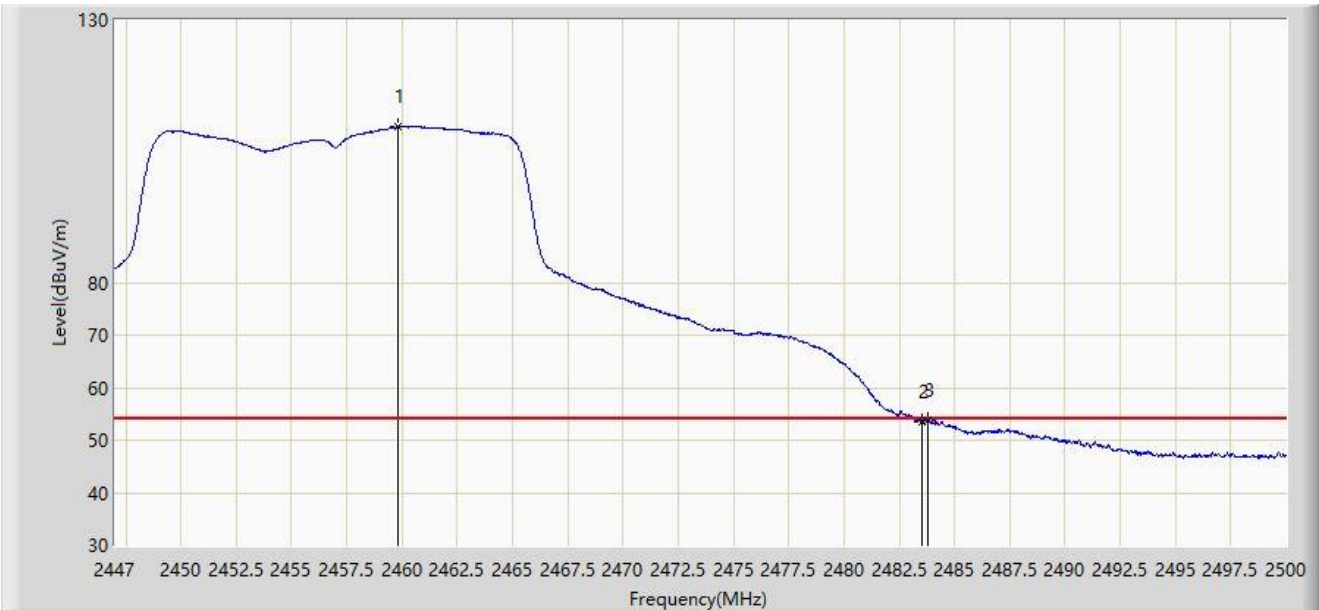

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2459.800	109.660	78.782	N/A	N/A	30.878	AV
2		2483.500	53.349	22.458	-0.651	54.000	30.892	AV
3	*	2483.782	53.830	22.939	-0.170	54.000	30.891	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2022-11-19
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2462MHz	

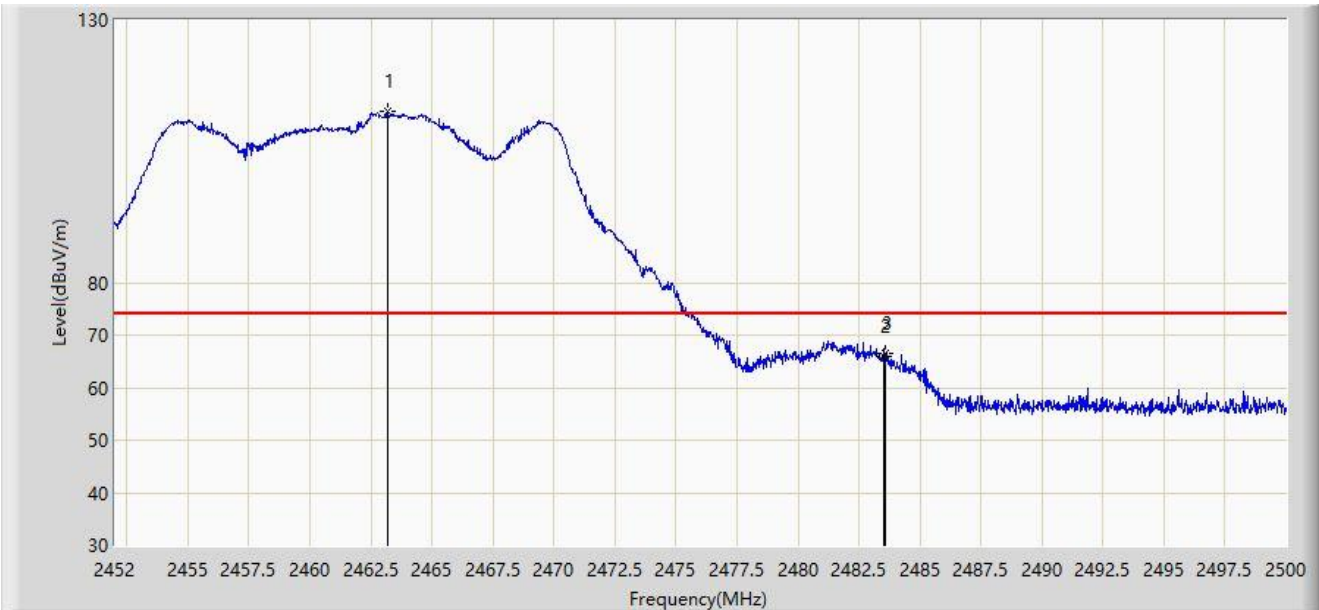


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2463.160	112.499	81.615	N/A	N/A	30.885	PK
2		2483.500	66.077	35.186	-7.923	74.000	30.892	PK
3	*	2483.560	66.592	35.701	-7.408	74.000	30.892	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-19
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2462MHz	

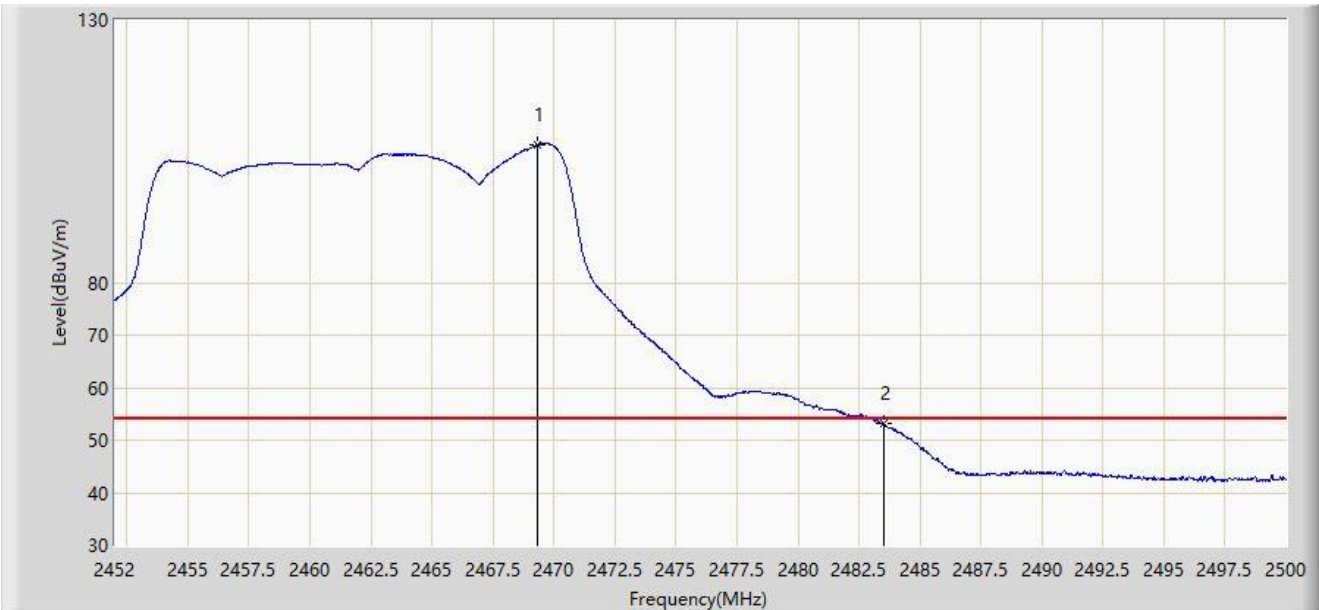


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2469.352	106.251	75.352	N/A	N/A	30.898	AV
2	*	2483.500	53.257	22.366	-0.743	54.000	30.892	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-19
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2462MHz	

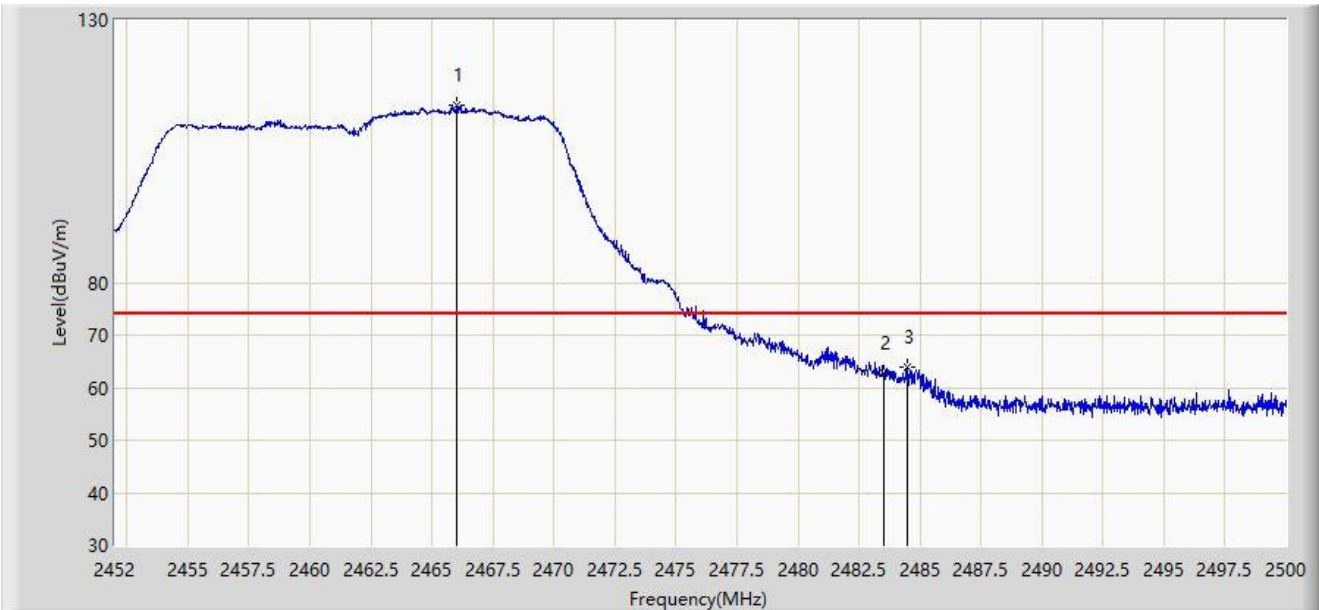


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2465.992	113.801	82.910	N/A	N/A	30.891	PK
2		2483.500	62.712	31.821	-11.288	74.000	30.892	PK
3	*	2484.472	63.910	33.020	-10.090	74.000	30.890	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-19
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11g at 2462MHz	

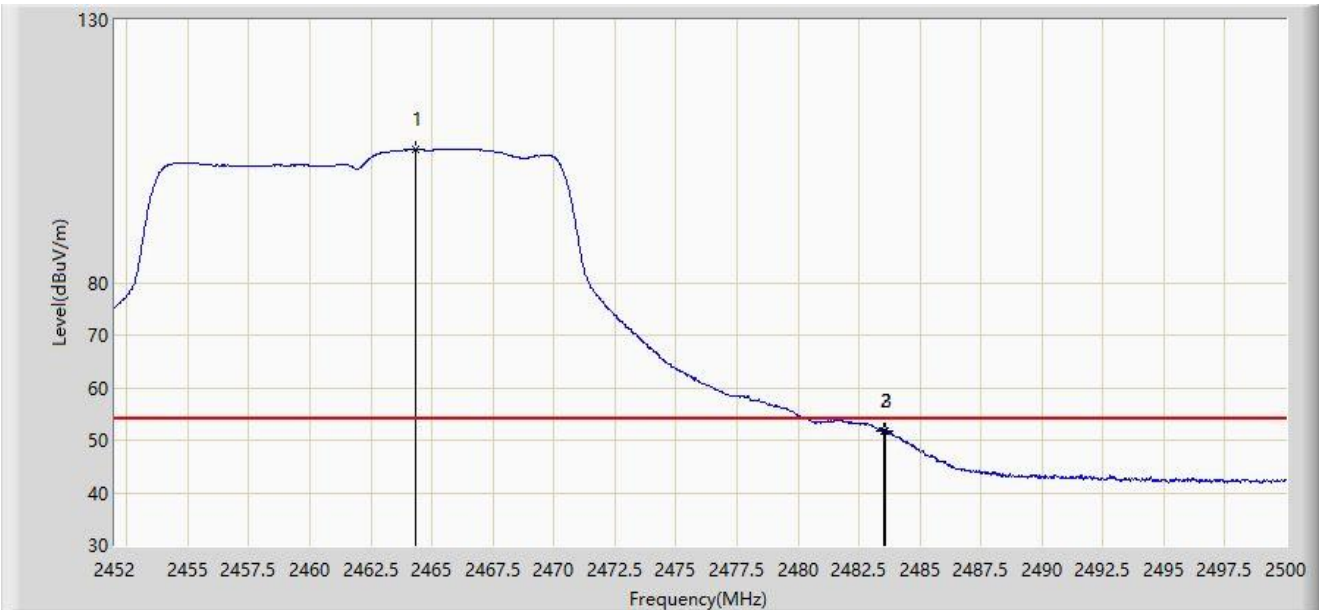


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2464.312	105.369	74.482	N/A	N/A	30.887	AV
2		2483.500	51.826	20.935	-2.174	54.000	30.892	AV
3	*	2483.560	51.867	20.976	-2.133	54.000	30.892	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-19
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

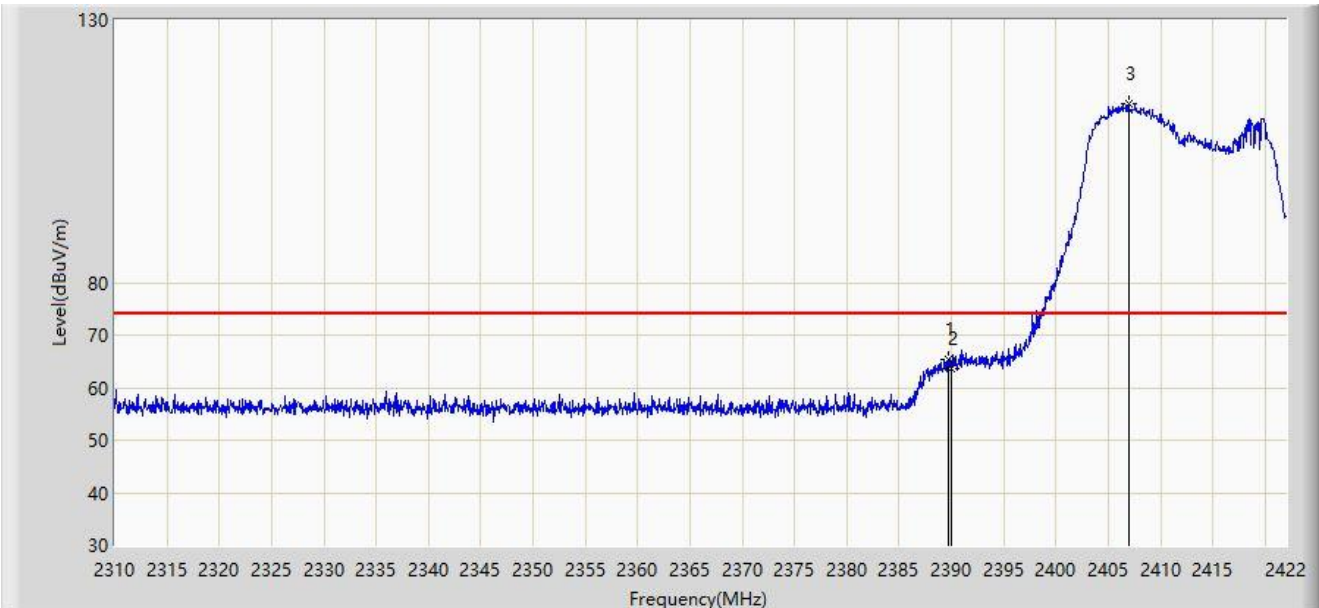


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.688	65.475	34.483	-8.525	74.000	30.992	PK
2		2390.000	63.606	32.614	-10.394	74.000	30.992	PK
3		2406.992	114.084	83.113	N/A	N/A	30.971	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-19
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

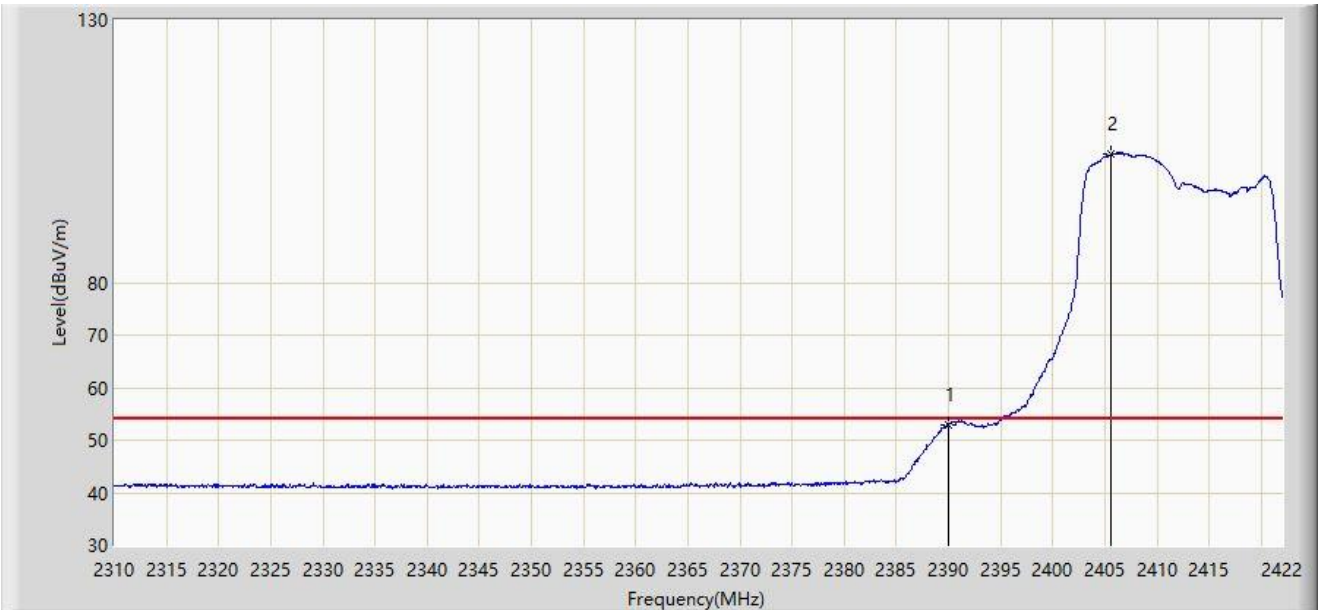


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	2390.000	52.894	21.902	-1.106	54.000	30.992	AV
2		2405.592	104.494	73.518	N/A	N/A	30.976	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-19
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

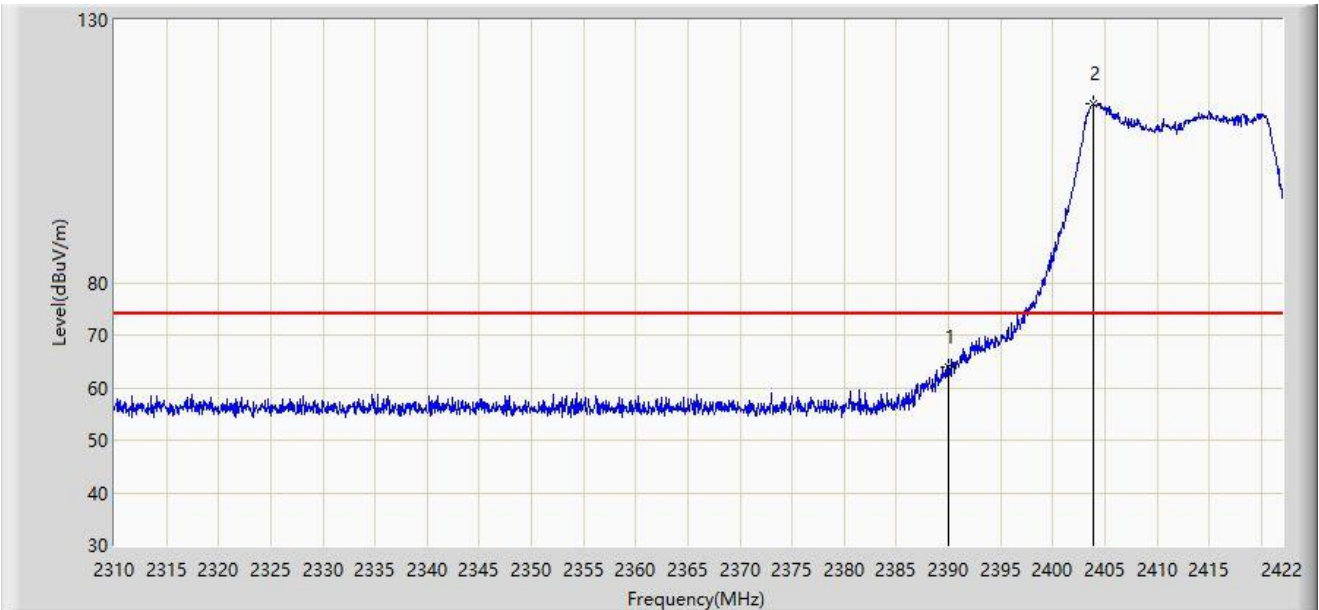


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	64.006	33.014	-9.994	74.000	30.992	PK
2		2403.856	114.111	83.129	N/A	N/A	30.983	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-19
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

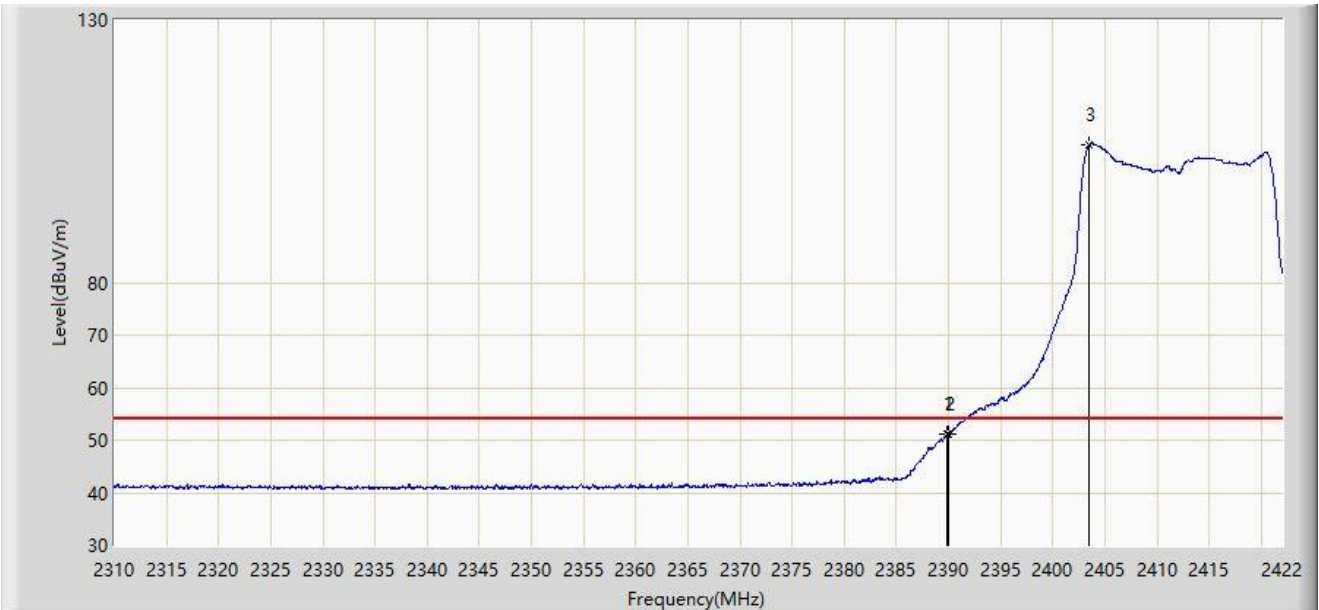

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.912	51.235	20.243	-2.765	54.000	30.992	AV
2		2390.000	51.064	20.072	-2.936	54.000	30.992	AV
3		2403.520	106.279	75.295	N/A	N/A	30.984	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2417MHz	

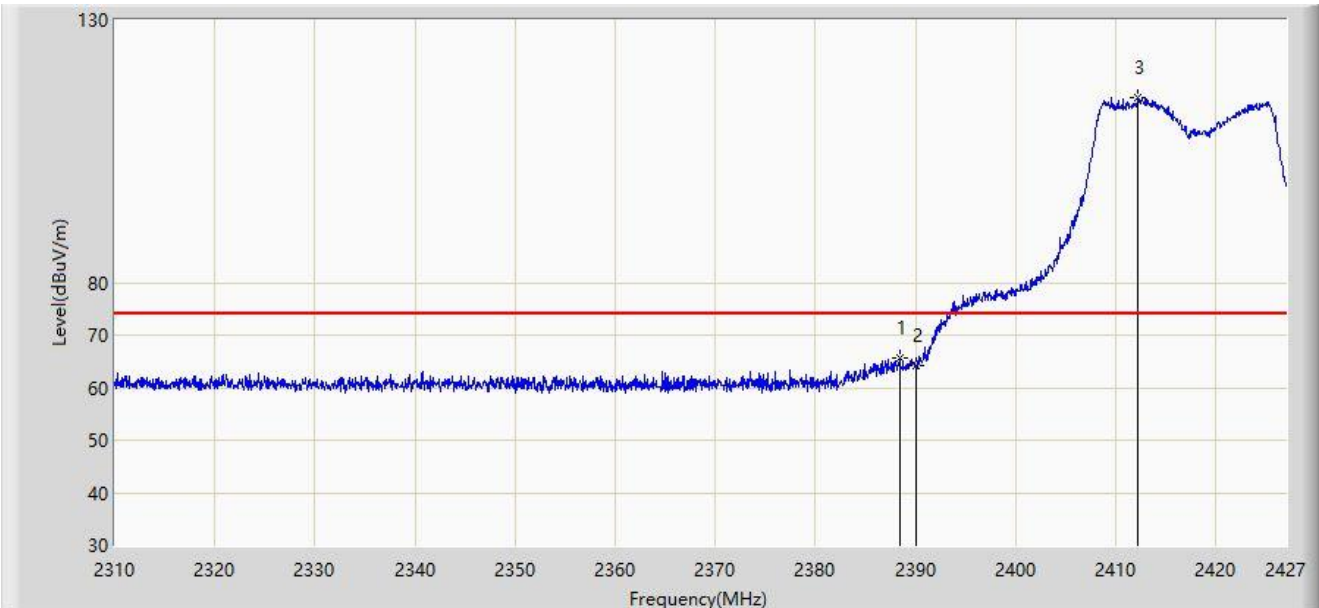


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.390	65.603	34.610	-8.397	74.000	30.993	PK
2		2390.000	64.262	33.270	-9.738	74.000	30.992	PK
3		2412.258	115.289	84.335	N/A	N/A	30.954	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2417MHz	

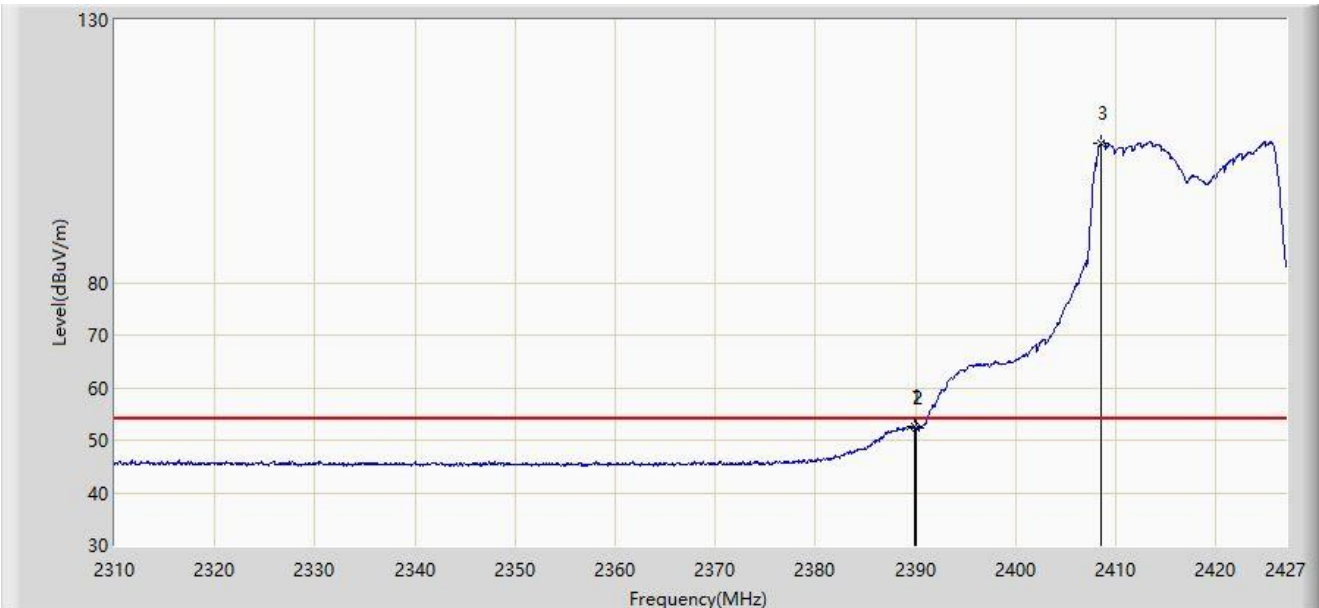


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.853	52.728	21.736	-1.272	54.000	30.992	AV
2		2390.000	52.415	21.423	-1.585	54.000	30.992	AV
3		2408.514	106.587	75.621	N/A	N/A	30.966	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2417MHz	

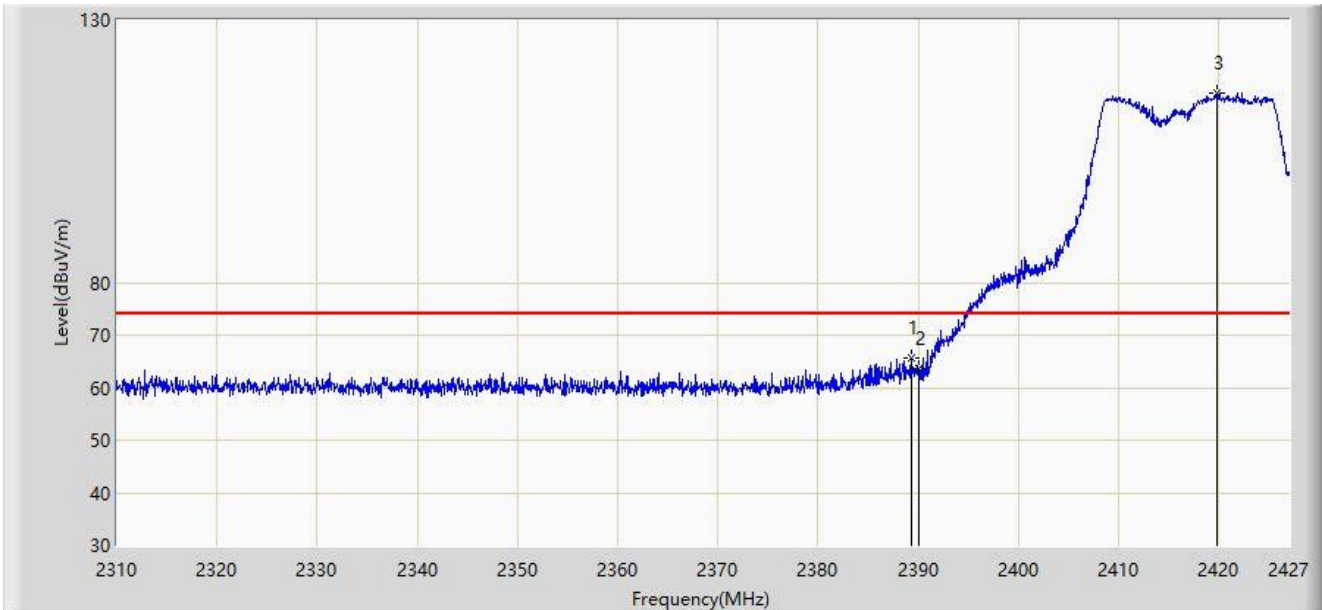


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.268	65.537	34.544	-8.463	74.000	30.992	PK
2		2390.000	63.581	32.589	-10.419	74.000	30.992	PK
3		2419.863	115.983	85.050	N/A	N/A	30.933	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2417MHz	

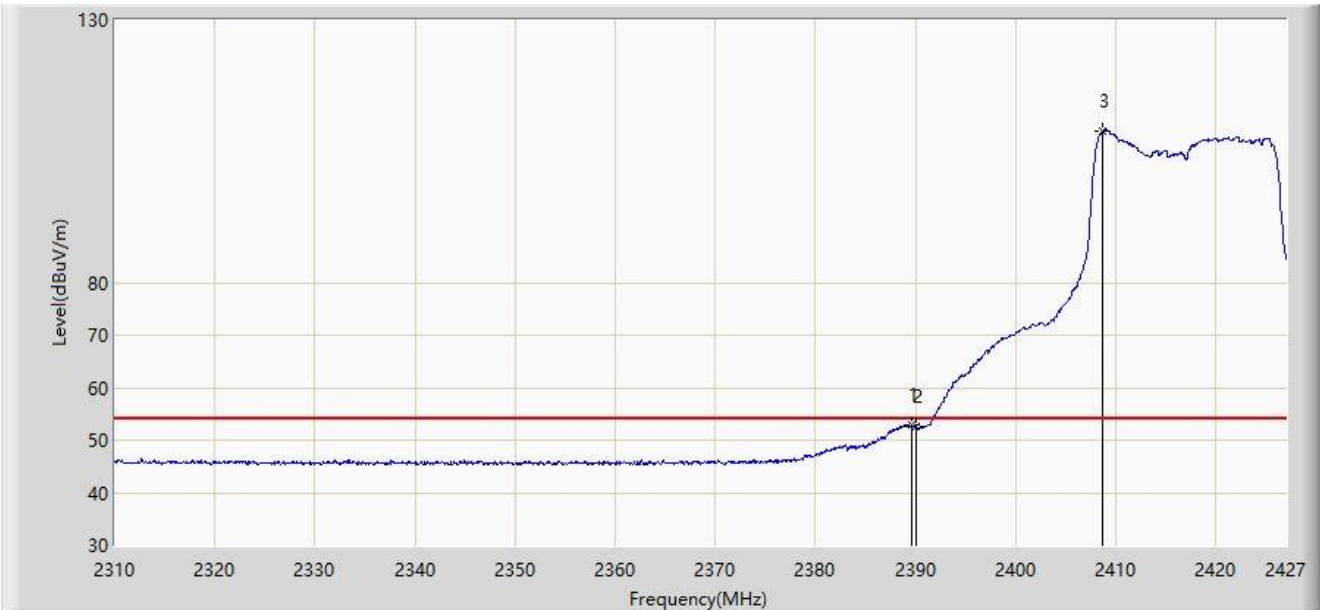


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.560	52.836	21.844	-1.164	54.000	30.992	AV
2		2390.000	52.523	21.531	-1.477	54.000	30.992	AV
3		2408.631	108.744	77.779	N/A	N/A	30.966	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2422MHz	

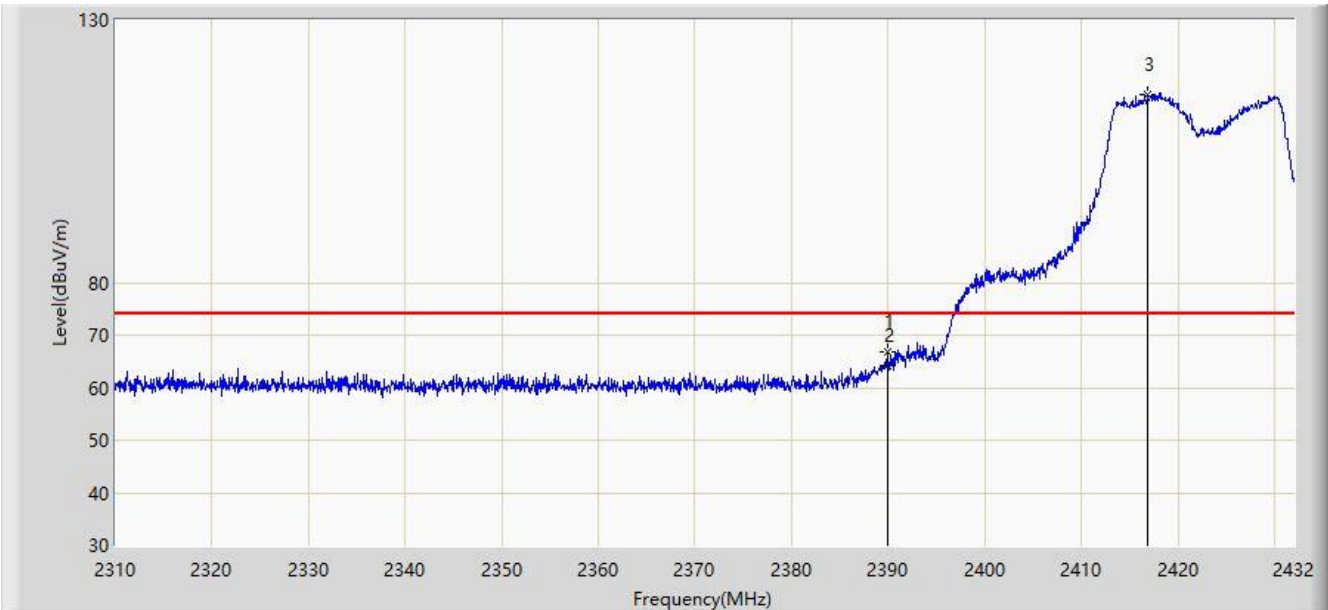


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.910	66.741	35.749	-7.259	74.000	30.992	PK
2		2390.000	64.156	33.164	-9.844	74.000	30.992	PK
3		2416.933	115.923	84.982	N/A	N/A	30.941	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2422MHz	

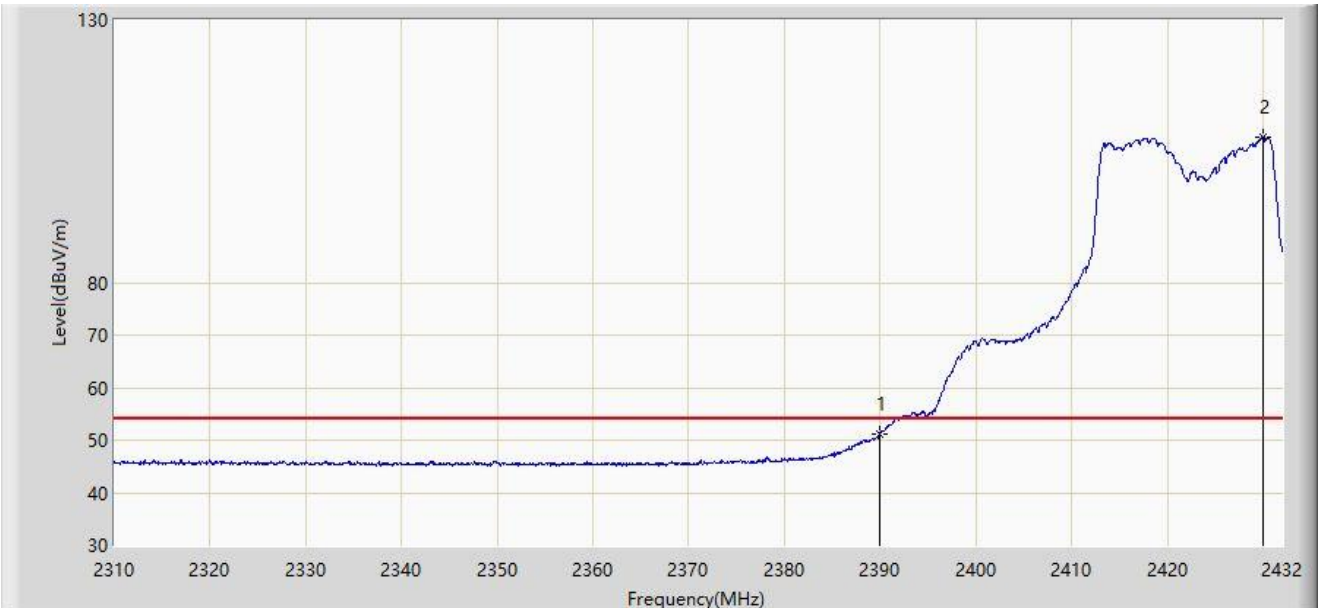


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	51.131	20.139	-2.869	54.000	30.992	AV
2		2430.048	107.799	76.907	N/A	N/A	30.892	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2422MHz	

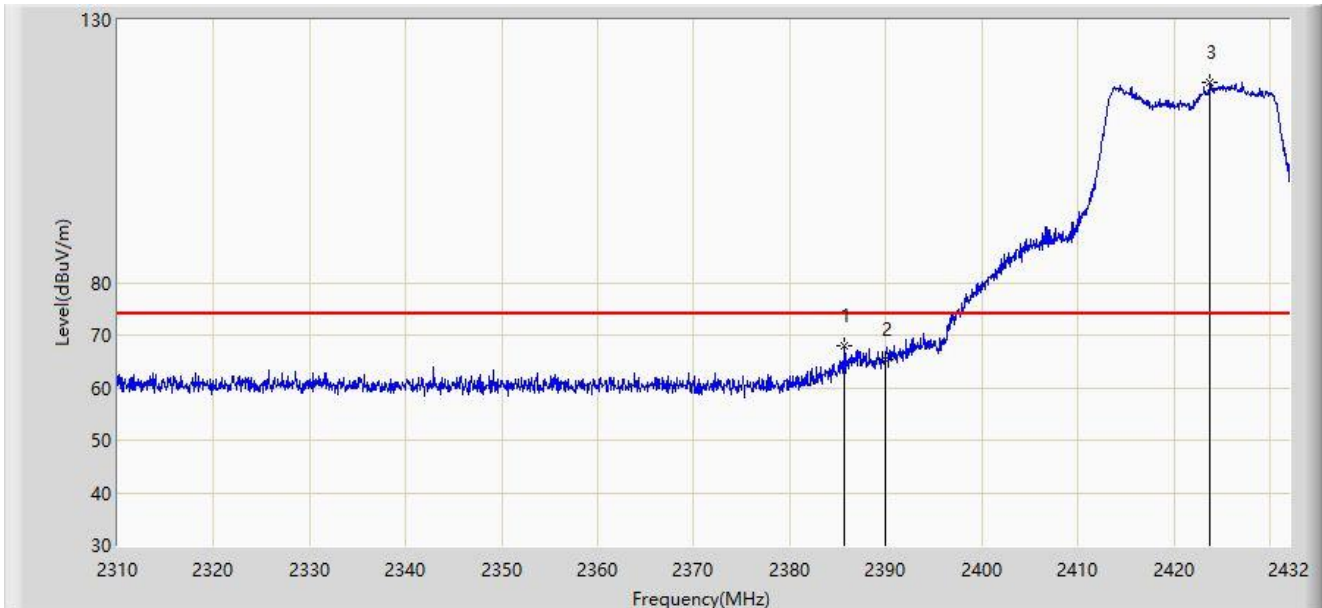


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2385.701	67.941	36.947	-6.059	74.000	30.994	PK
2		2390.000	65.334	34.342	-8.666	74.000	30.992	PK
3		2423.765	118.107	87.190	N/A	N/A	30.917	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2422MHz	

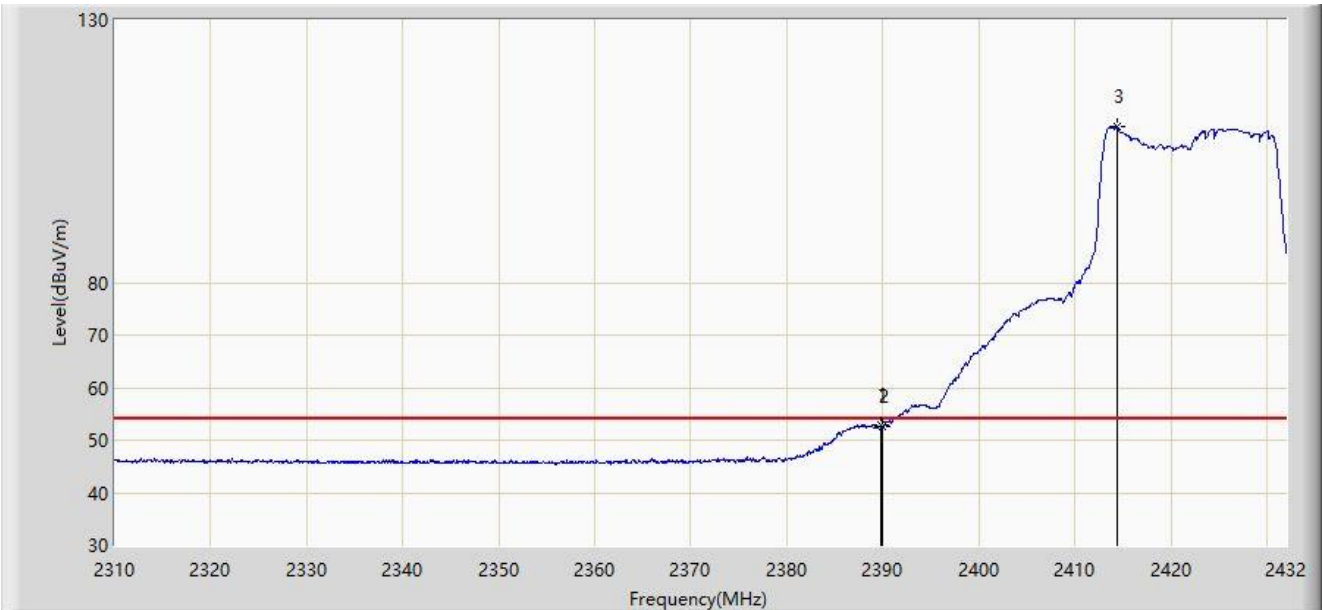

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.788	52.779	21.787	-1.221	54.000	30.993	AV
2		2390.000	52.482	21.490	-1.518	54.000	30.992	AV
3		2414.371	109.662	78.714	N/A	N/A	30.948	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2427MHz	

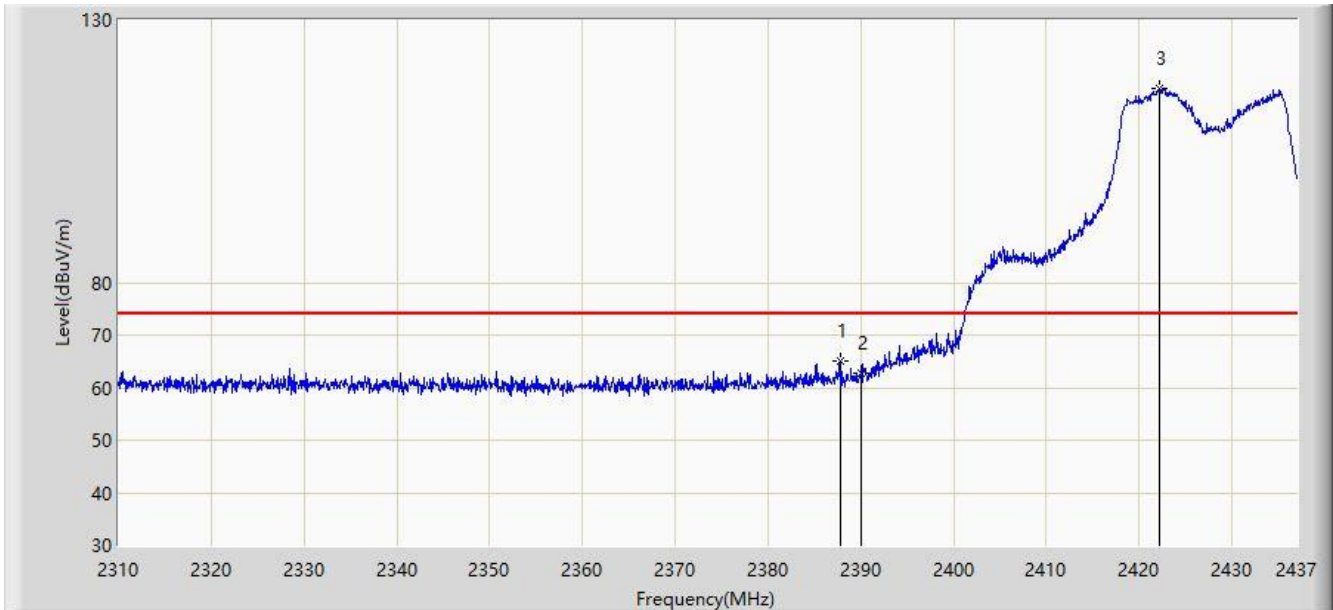


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2387.788	64.951	33.958	-9.049	74.000	30.994	PK
2		2390.000	62.822	31.830	-11.178	74.000	30.992	PK
3		2422.205	116.973	86.049	N/A	N/A	30.924	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2427MHz	

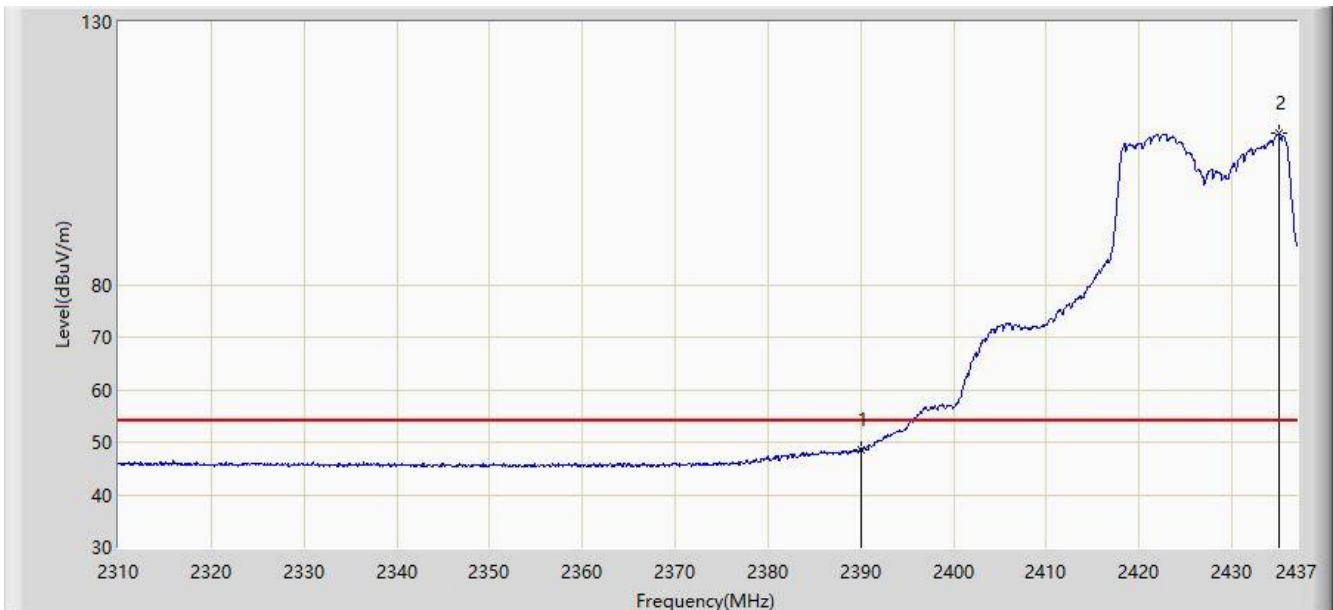


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	48.680	17.688	-5.320	54.000	30.992	AV
2		2435.158	108.785	77.911	N/A	N/A	30.874	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2427MHz	

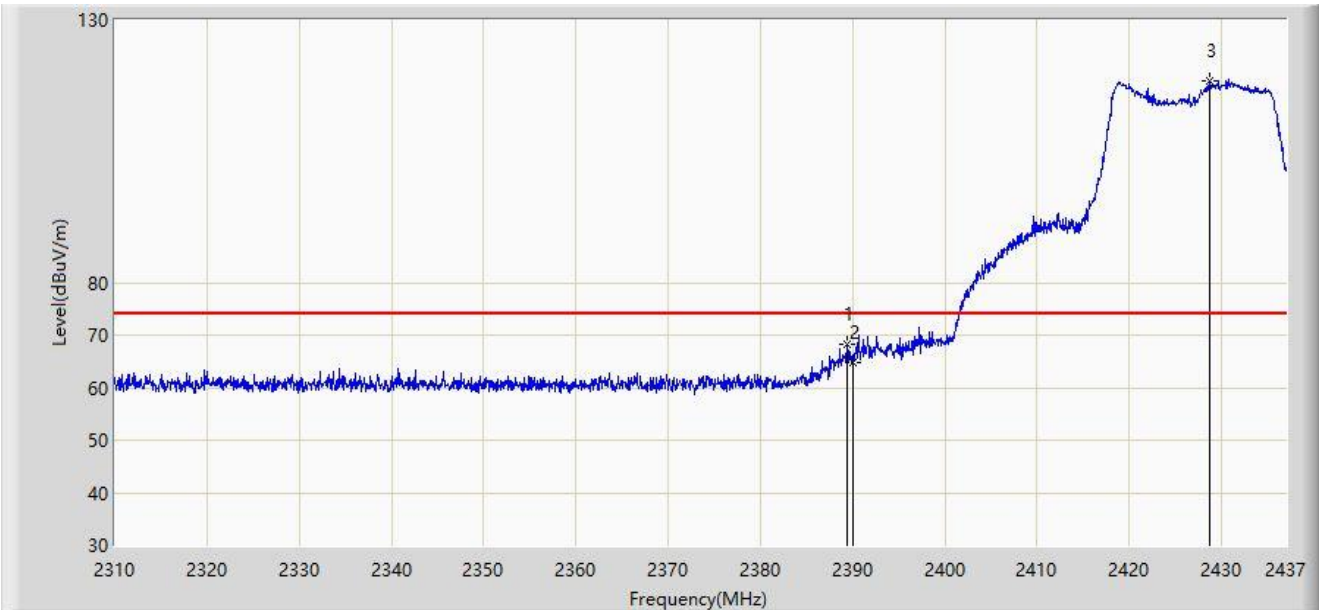


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.438	68.217	37.225	-5.783	74.000	30.993	PK
2		2390.000	64.750	33.758	-9.250	74.000	30.992	PK
3		2428.681	118.483	87.586	N/A	N/A	30.897	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-11-30
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2427MHz	

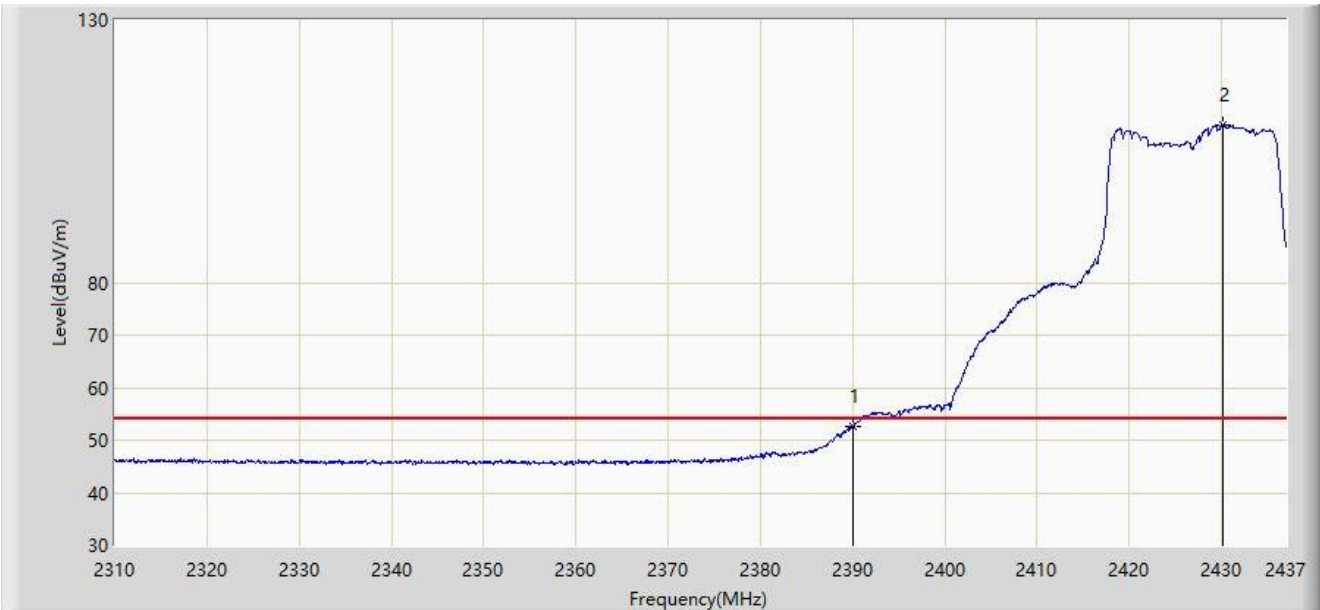


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	52.725	21.733	-1.275	54.000	30.992	AV
2		2430.142	109.975	79.083	N/A	N/A	30.891	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-12-01
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

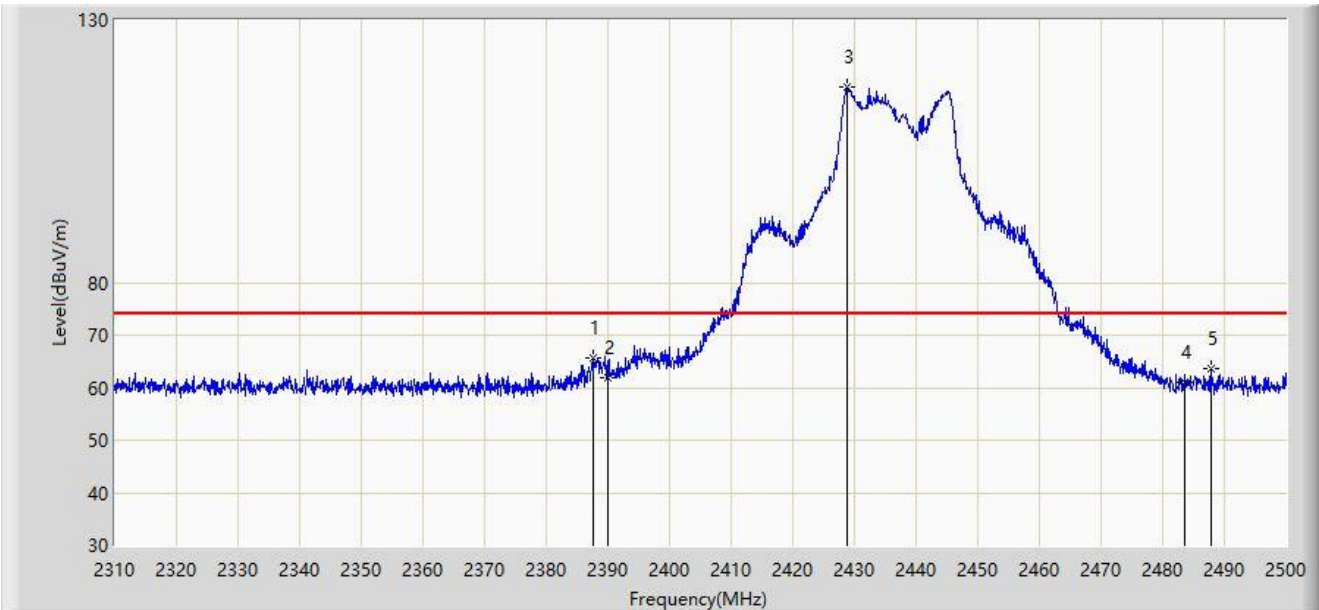


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2387.710	65.695	34.702	-8.305	74.000	30.993	PK
2		2390.000	61.803	30.811	-12.197	74.000	30.992	PK
3		2428.845	117.238	86.342	N/A	N/A	30.896	PK
4		2483.500	61.052	30.161	-12.948	74.000	30.892	PK
5		2487.935	63.562	32.678	-10.438	74.000	30.884	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-12-01
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

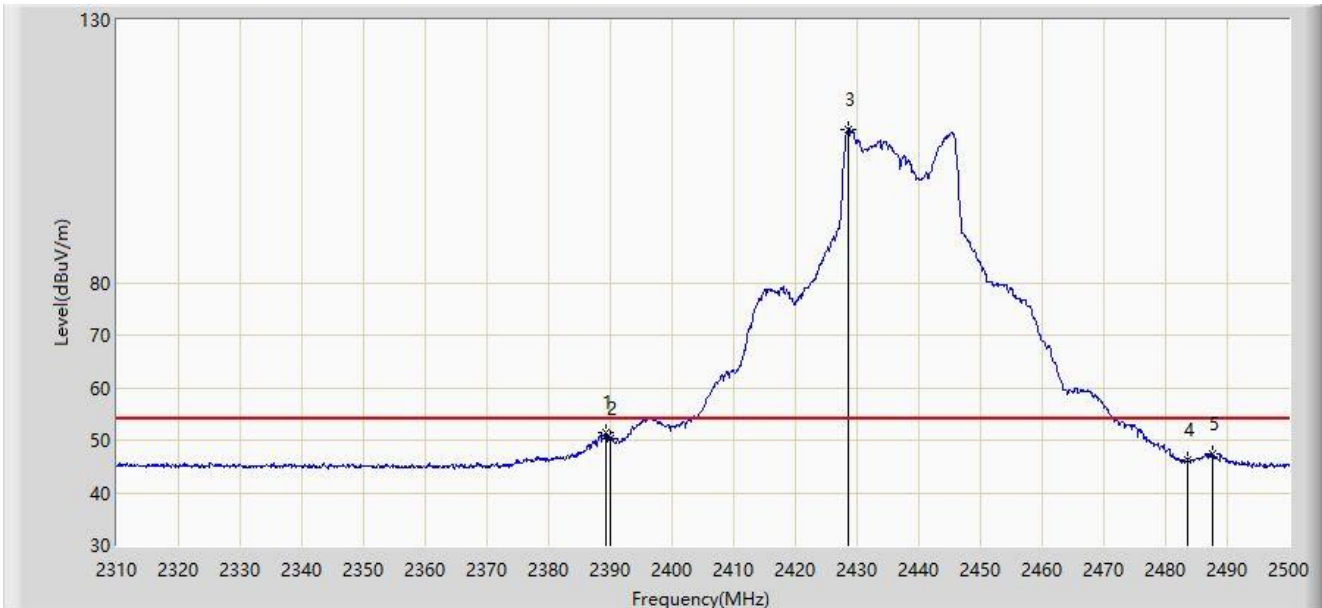


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.325	51.482	20.489	-2.518	54.000	30.992	AV
2		2390.000	50.365	19.373	-3.635	54.000	30.992	AV
3		2428.465	109.055	78.157	N/A	N/A	30.897	AV
4		2483.500	46.328	15.437	-7.672	54.000	30.892	AV
5		2487.650	47.276	16.391	-6.724	54.000	30.885	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-12-01
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

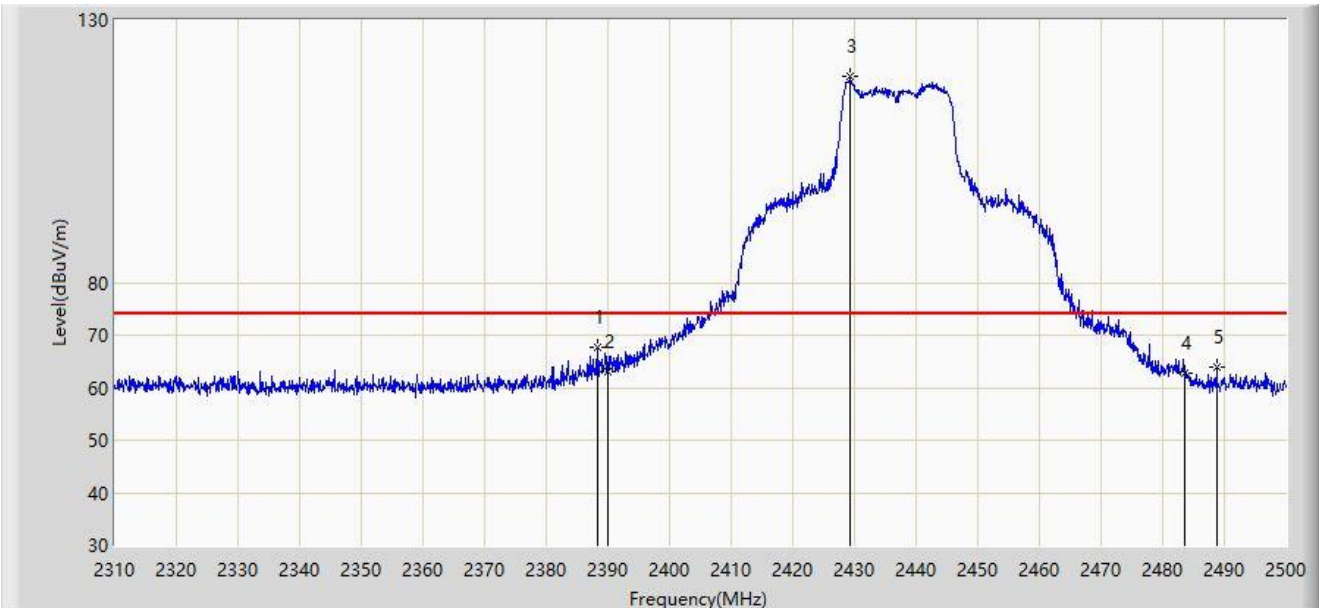


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.280	67.687	36.694	-6.313	74.000	30.993	PK
2		2390.000	63.094	32.102	-10.906	74.000	30.992	PK
3		2429.320	119.361	88.466	N/A	N/A	30.894	PK
4		2483.500	62.754	31.863	-11.246	74.000	30.892	PK
5		2488.695	63.981	33.098	-10.019	74.000	30.883	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-12-01
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

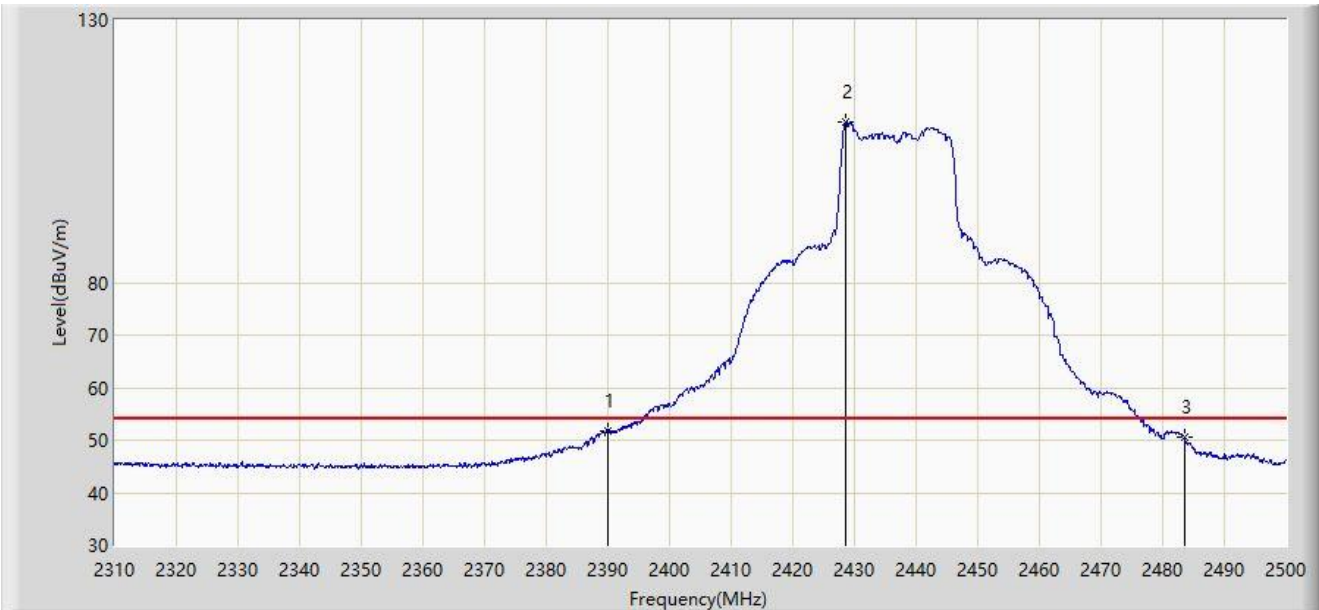

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	2390.000	51.703	20.711	-2.297	54.000	30.992	AV
2		2428.655	110.710	79.813	N/A	N/A	30.897	AV
3		2483.500	50.548	19.657	-3.452	54.000	30.892	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2022-12-01
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2447MHz	

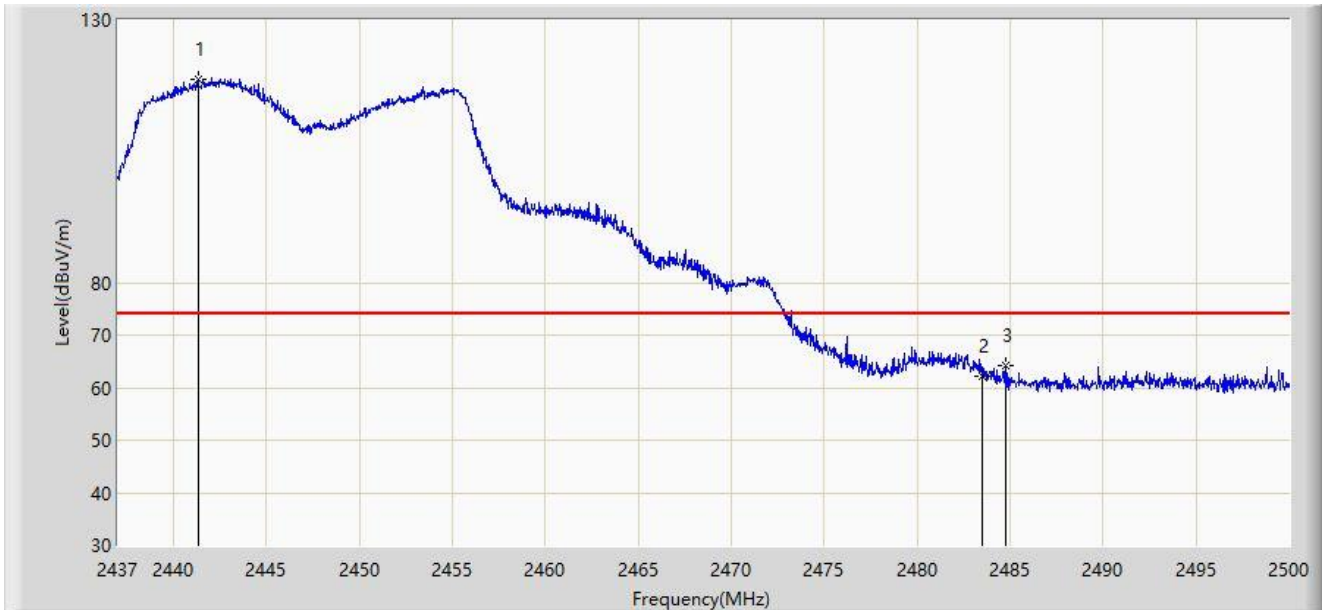


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2441.315	118.677	87.812	N/A	N/A	30.865	PK
2		2483.500	62.265	31.374	-11.735	74.000	30.892	PK
3	*	2484.754	64.190	33.301	-9.810	74.000	30.890	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-12-01
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2447MHz	

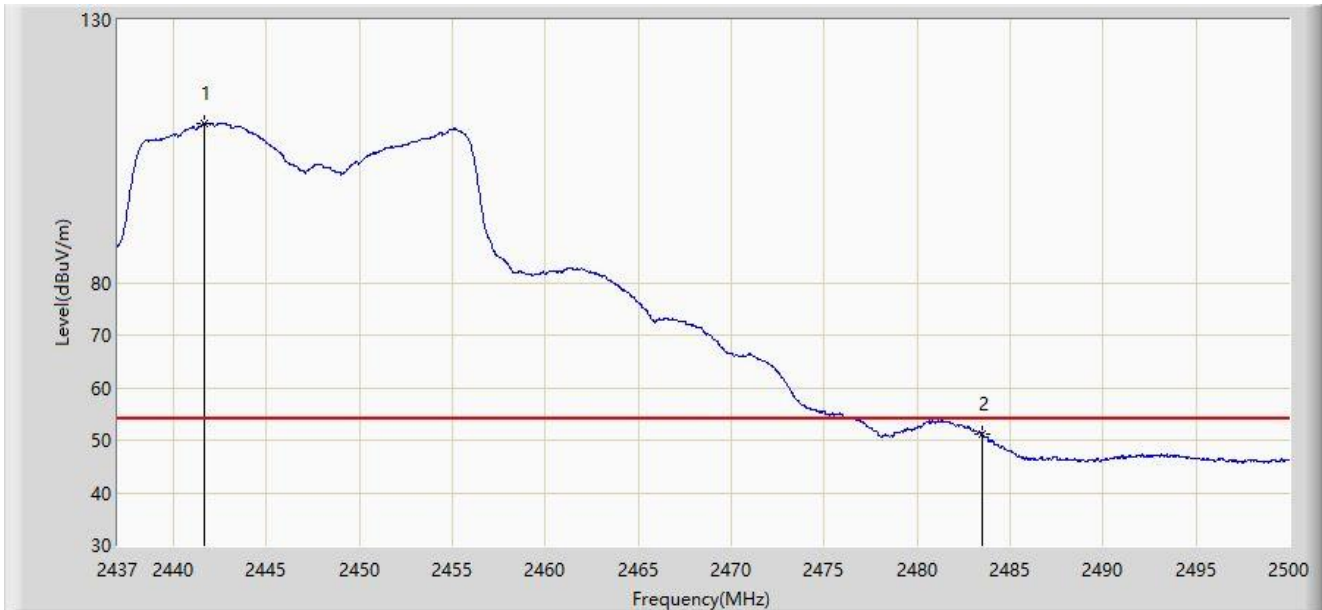


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2441.694	110.285	79.420	N/A	N/A	30.865	AV
2	*	2483.500	51.236	20.345	-2.764	54.000	30.892	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-12-01
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2447MHz	

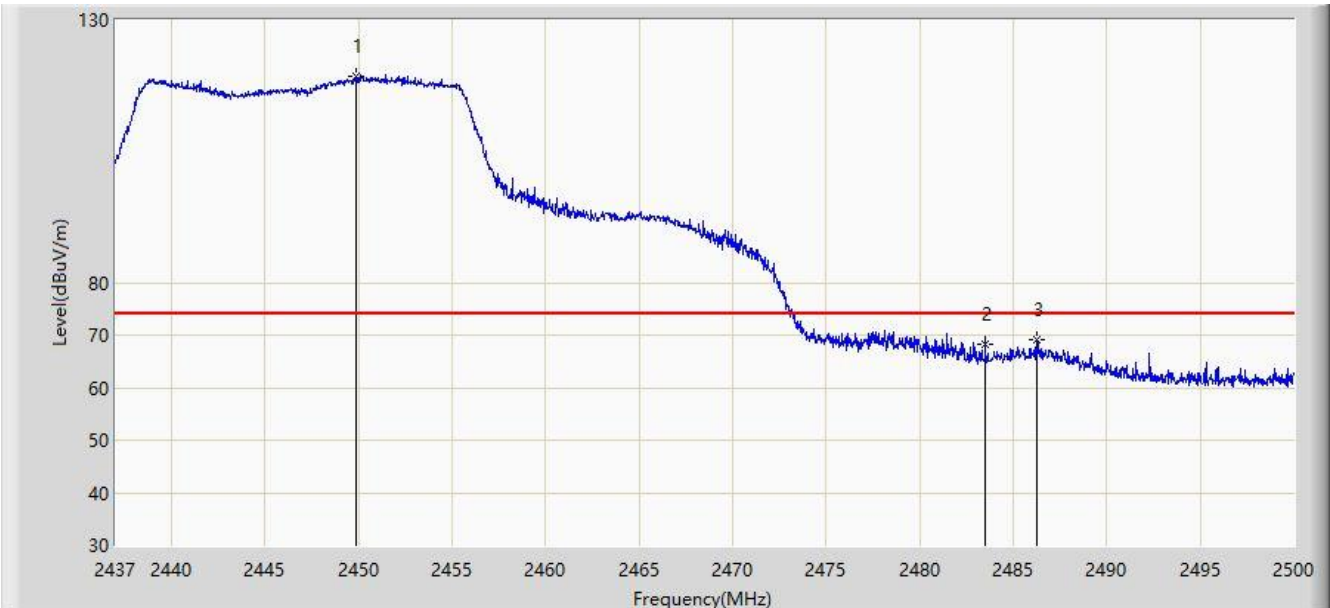


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2449.852	119.323	88.455	N/A	N/A	30.868	PK
2		2483.500	68.324	37.433	-5.676	74.000	30.892	PK
3	*	2486.235	69.237	38.350	-4.763	74.000	30.887	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-12-01
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2447MHz	

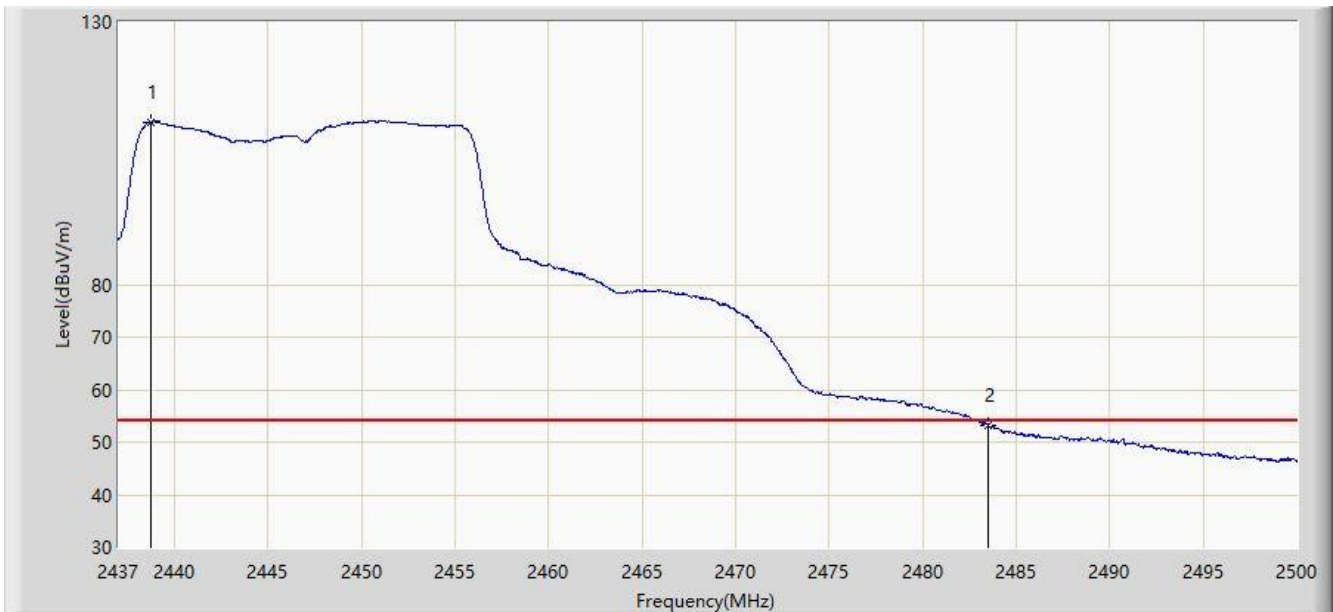


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2438.764	110.930	80.066	N/A	N/A	30.864	AV
2	*	2483.500	53.191	22.300	-0.809	54.000	30.892	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-12-01
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2452MHz	

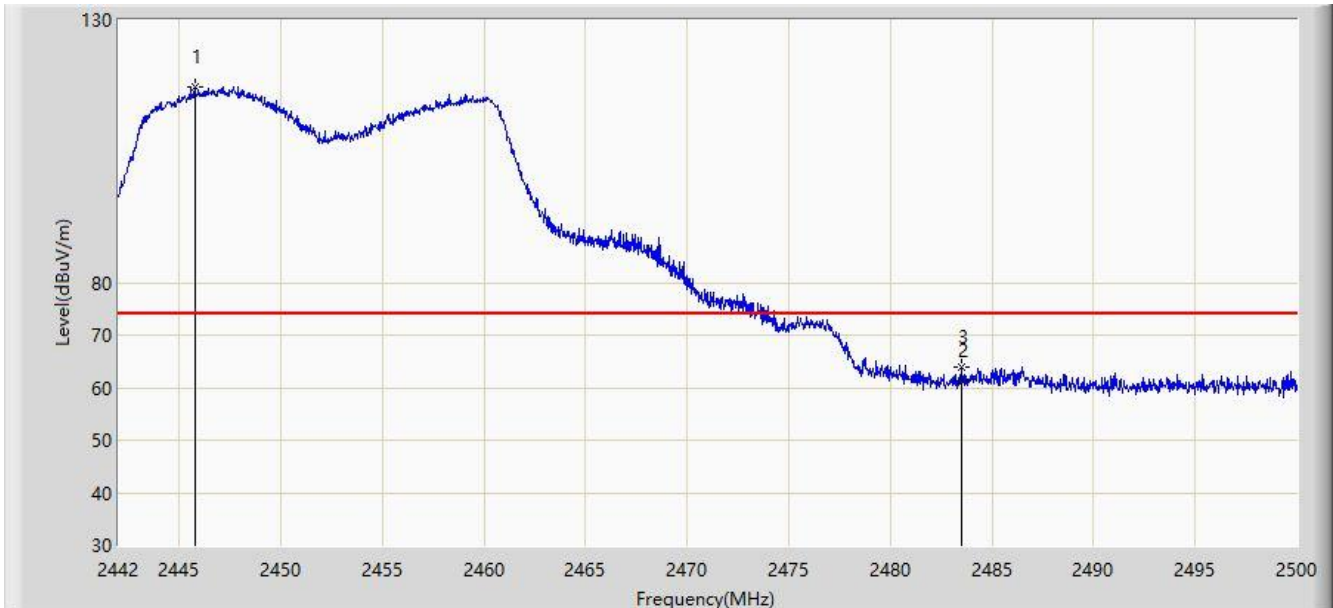


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2445.770	117.186	86.320	N/A	N/A	30.866	PK
2		2483.500	61.203	30.312	-12.797	74.000	30.892	PK
3	*	2483.528	64.025	33.134	-9.975	74.000	30.892	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022-12-01
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: WiFi 6 (802.11ax) 4x4 MU-MIMO Dual Band Module	Power: Powered by Test Jig
Test Mode: Transmit by 802.11n-HT20 at 2452MHz	

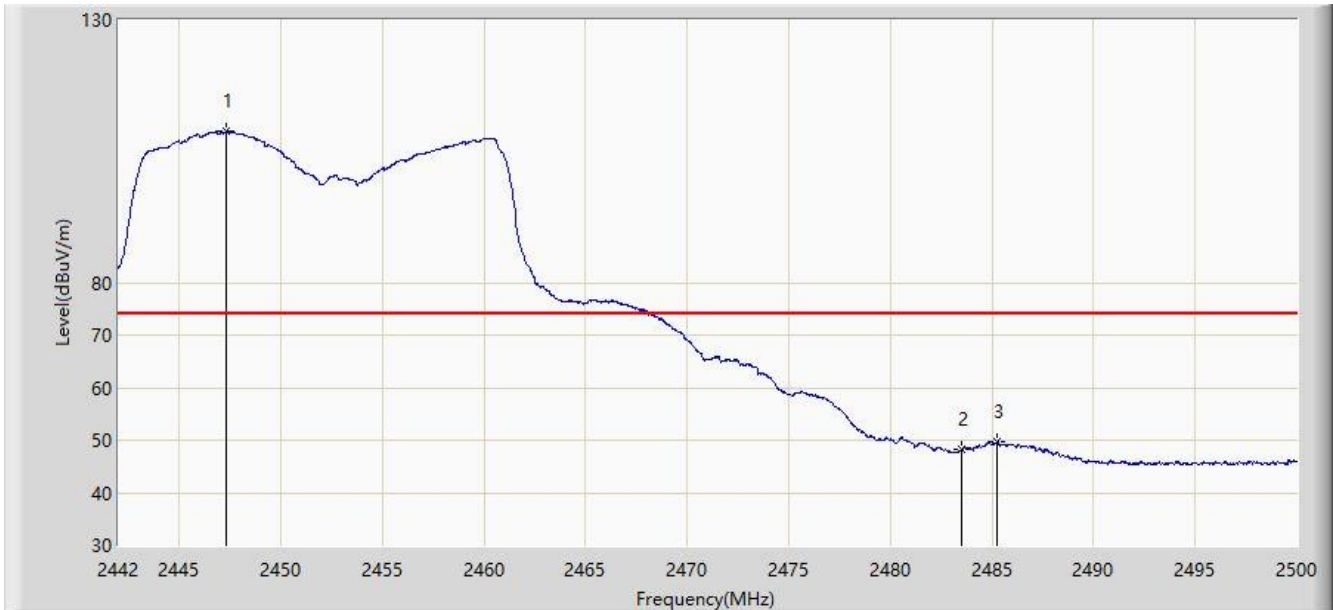

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2447.336	108.735	77.868	N/A	N/A	30.867	PK
2		2483.500	48.163	17.272	-25.837	74.000	30.892	PK
3	*	2485.268	49.837	18.948	-24.163	74.000	30.889	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).