

# MEASUREMENT REPORT

## FCC PART 15.247 WLAN 802.11b/g/n

---


**FCC ID:** TK4WLE600VX  
**APPLICANT:** Compex Systems Pte Ltd  
**Product:** 802.11ac Dual Band Module  
**Model No.:** WLE600VX, WLE600VX-I  
**Brand Name:** COMPEX  
**FCC Classification:** Digital Transmission System (DTS)  
**FCC Rule Part(s):** Part 15 Subpart C (Section 15.247)  
**Test Date** August 05 ~ 12, 2021

Reviewed By:



Jame Yuan

Approved By:



Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

## Revision History

Report No.	Version	Description	Issue Date	Note
2103RSU076-U1	Rev. 01	Initial Report	08-15-2021	Valid

---

# CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. Applicant .....	5
1.2. Manufacturer .....	5
1.3. Testing Facility .....	5
1.4. Product Information .....	6
1.5. Radio Specification under test .....	6
1.6. Working Frequencies for this report .....	6
1.7. Antenna Details .....	7
1.8. Test Mode .....	7
1.9. Configuration of Test System .....	7
1.10. Duty Cycle .....	8
1.11. Applicable Standards .....	9
1.12. Test Environment Condition .....	9
1.13. EMI Suppression Device(s)/Modifications .....	9
<b>2. ANTENNA REQUIREMENTS .....</b>	<b>10</b>
<b>3. TEST EQUIPMENT CALIBRATION DATE .....</b>	<b>11</b>
<b>4. MEASUREMENT UNCERTAINTY .....</b>	<b>14</b>
<b>5. TEST RESULT .....</b>	<b>15</b>
5.1. Summary .....	15
5.2. 6dB Bandwidth Measurement .....	16
5.2.1. Test Limit .....	16
5.2.2. Test Procedure Used .....	16
5.2.3. Test Setting .....	16
5.2.4. Test Setup .....	16
5.2.5. Test Result .....	17
5.3. Output Power Measurement .....	22
5.3.1. Test Limit .....	22
5.3.2. Test Procedure Used .....	22
5.3.3. Test Setting .....	22
5.3.4. Test Setup .....	22
5.3.5. Test Result .....	23
5.4. Power Spectral Density Measurement .....	25
5.4.1. Test Limit .....	25
5.4.2. Test Procedure Used .....	25
5.4.3. Test Setting .....	25

---

5.4.4.	Test Setup .....	26
5.4.5.	Test Result.....	27
5.5.	Conducted Band Edge and Out-of-Band Emissions .....	37
5.5.1.	Test Limit .....	37
5.5.2.	Test Procedure Used .....	37
5.5.3.	Test Settiting.....	37
5.5.4.	Test Setup .....	38
5.5.5.	Test Result.....	39
5.6.	Radiated Spurious Emission Measurement .....	49
5.6.1.	Test Limit .....	49
5.6.2.	Test Procedure Used .....	49
5.6.3.	Test Setting.....	49
5.6.4.	Test Setup .....	51
5.6.5.	Test Result.....	52
5.7.	Radiated Restricted Band Edge Measurement.....	72
5.7.1.	Test Limit .....	72
5.7.2.	Test Procedure Used .....	73
5.7.3.	Test Setting.....	73
5.7.4.	Test Setup .....	74
5.7.5.	Test Result.....	75
5.8.	AC Conducted Emissions Measurement .....	139
5.8.1.	Test Limit .....	139
5.8.2.	Test Setup .....	139
5.8.3.	Test Result.....	140
<b>6.</b>	<b>CONCLUSION .....</b>	<b>142</b>
	<b>Appendix A - Test Setup Photograph .....</b>	<b>143</b>
	<b>Appendix B - EUT Photograph.....</b>	<b>144</b>



#### 1.4. Product Information

Product Name	802.11ac Dual Band Module
Model No.	WLE600VX, WLE600VX-I
Serial No.	108421408
Wi-Fi Specification	802.11a/b/g/n/ac
Antenna Delivery	2*TX + 2*RX

#### 1.5. Radio Specification under test

Frequency Range	802.11b/g/n-HT20: 2412 ~ 2462MHz 802.11n-HT40: 2422 ~ 2452MHz
Channel Number	802.11b/g/n-HT20: 11 802.11n-HT40: 7
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM
Data Rate	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps
Antenna Information	Refer to clause 1.7

Note: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.

#### 1.6. Working Frequencies for this report

##### 802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

##### 802.11n-HT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

### 1.7. Antenna Details

Antenna Type	Manufacturer	T <sub>x</sub> Paths	Max Antenna Gain (dBi)
Omni Antenna	Smart Ant Inc	2	2.4GHz: 4.5, 5GHz: 7.0


Note: The device didn't support transmit beam-forming mode and Cyclic Delay Diversity (CDD) mode, and the transmit signals are uncorrected, so no add array gain to the band power and band PSD.

### 1.8. Test Mode

Test Mode	Mode 1: Transmit by 802.11b (1Mbps)
	Mode 2: Transmit by 802.11g (6Mbps)
	Mode 3: Transmit by 802.11n-HT20 (MCS0)
	Mode 4: Transmit by 802.11n-HT40 (MCS0)

Note: 802.11b/g only support SISO mode, 802.11n support SISO and MIMO mode.

### 1.9. Configuration of Test System

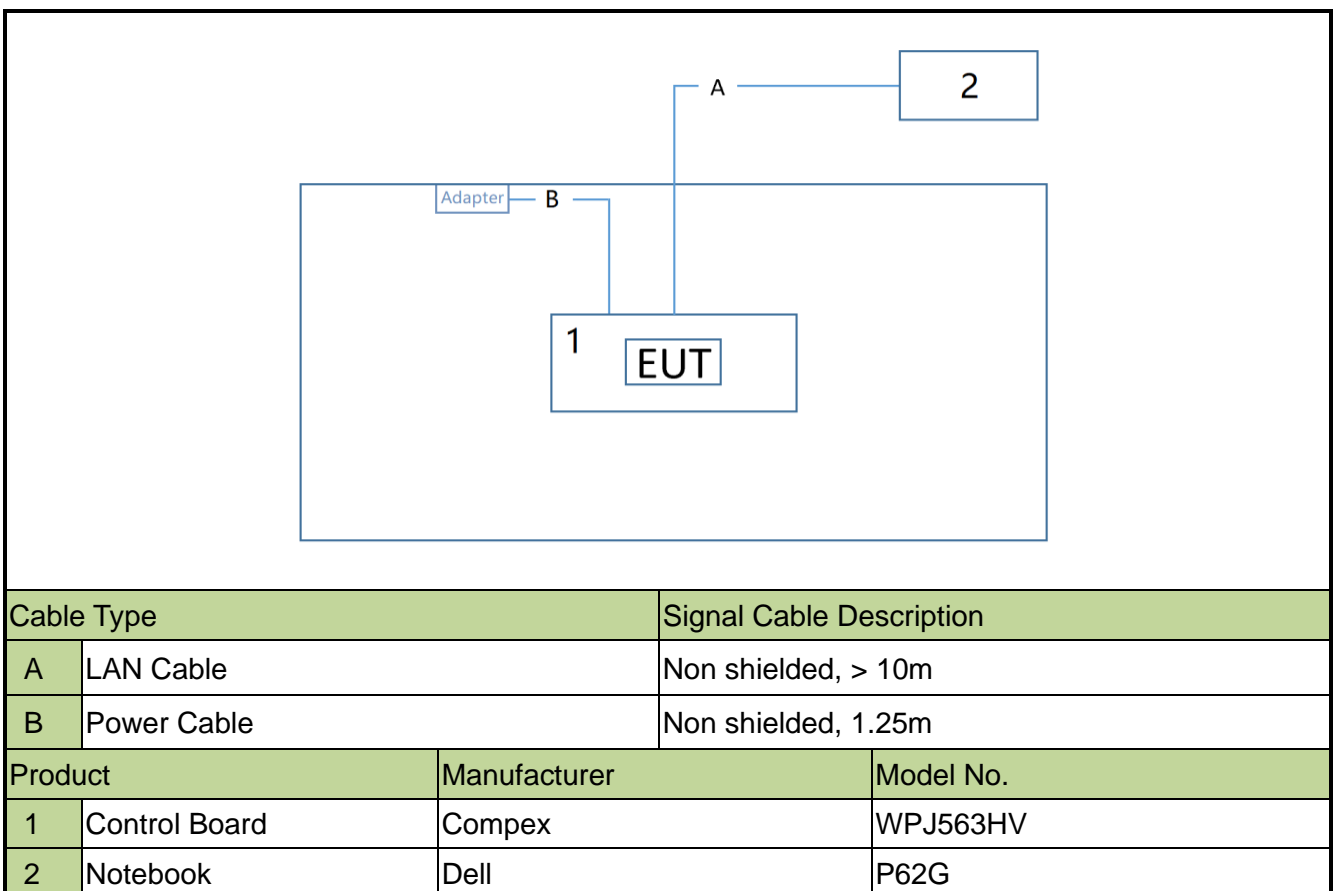

Note 1: The test utility software used during testing was "ART2-GUI", and the version was 2.3.

Note 2: Power setting refer to operation description, 802.11n SISO and MIMO setting are same.


### 1.10. Duty Cycle

2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:


Test Mode	Duty Cycle (%)
802.11b	98.00
802.11g	96.02
802.11n-HT20	95.93
802.11n-HT40	91.78

#### Duty Cycle (T = Transmission Duration)


802.11b (T = 98.20ms)

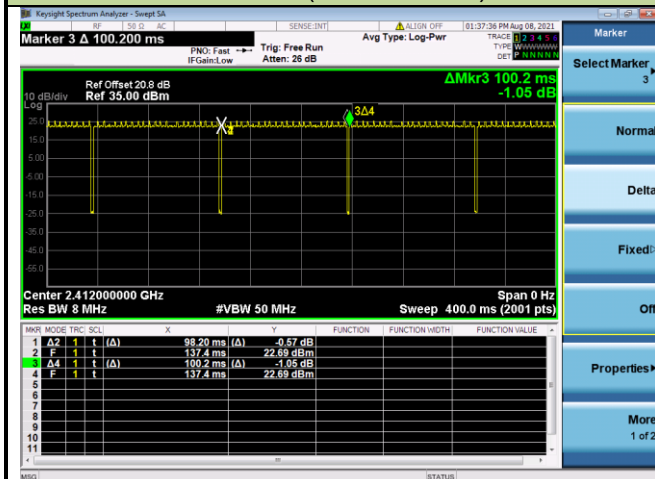


802.11g (T = 2.025ms)

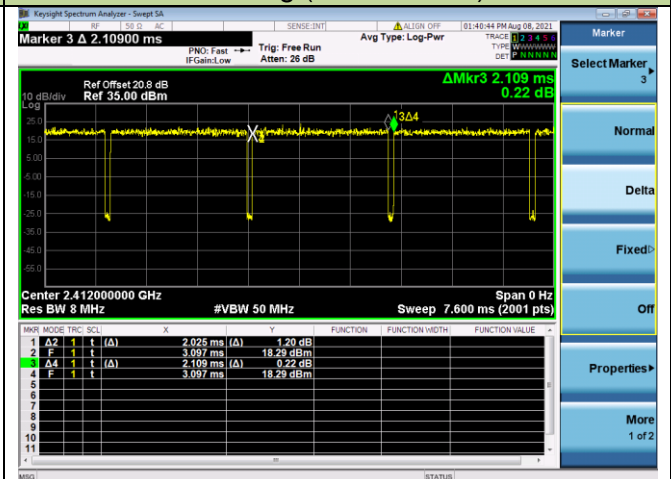

802.11n-HT20 (T = 1.888ms)

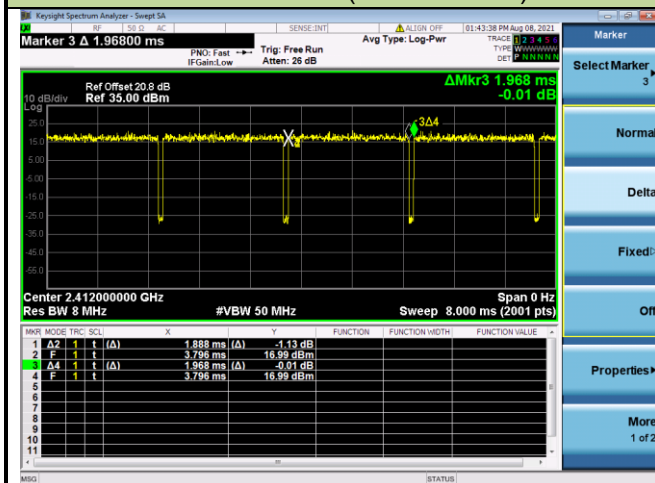

802.11n-HT40 (T = 0.927ms)

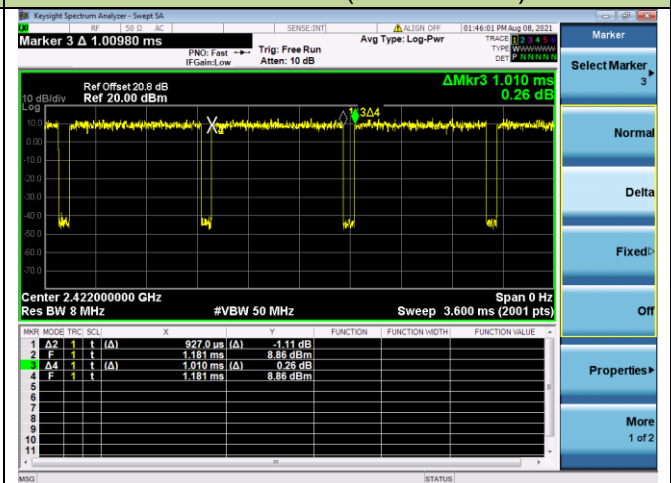



### 1.11. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.10-2013
- FCC KDB 662911 D01v02r01

### 1.12. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

### 1.13. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2. ANTENNA REQUIREMENTS

### **Excerpt from §15.203 of the FCC Rules:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

The device uses one unique IPEX connector.

### **Conclusion:**

This unit complies with the requirement of §15.203.

### 3. TEST EQUIPMENT CALIBRATION DATE

#### Conducted Emission (WZ-SR2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2021/11/22
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2022/06/08
Thermal Hygrometer	testo	608-H1	MRTSUE06404	1 year	2022/06/28
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

#### Conducted Emission (SIP-SR2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2022/06/24
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2022/06/08
Thermal Hygrometer	testo	608-H1	MRTSUE06621	1 year	2021/12/03

#### Radiated Emission (WZ-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2022/01/04
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2022/08/07
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2021/09/27
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2021/12/14
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2021/11/14
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2022/06/09
Thermal Hygrometer	testo	608-H1	MRTSUE06403	1 year	2022/06/28
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2022/04/29

#### Radiated Emission (WZ-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
MXE EMI Receiver	Keysight	N9038A	MRTSUE06125	1 year	2022/06/24
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2022/05/24
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2021/10/25
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2021/12/14
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2021/11/14
Thermal Hygrometer	Minggao	ETH529	MRTSUE06170	1 year	2021/12/08
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2022/04/29

## Radiated Emission (SIP-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2022/06/24
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2022/06/24
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2022/03/09
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06645	1 year	2021/08/30
Double Ridged Horn Antenna	R&S	HF907	MRTSUE06610	1 year	2021/08/30
Preamplifier	EMCI	EMC051845SE	MRTSUE06600	1 year	2021/11/09
Thermal Hygrometer	testo	608-H1	MRTSUE06620	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2021/12/24

## Radiated Emission (SIP-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2022/06/24
MXA Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2021/09/26
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2022/03/09
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06646	1 year	2021/08/30
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06648	1 year	2021/11/26
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06599	1 year	2021/11/26
Preamplifier	EMCI	EMC051845SE	MRTSUE06644	1 year	2021/11/09
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2021/10/12
Thermal Hygrometer	testo	608-H1	MRTSUE06624	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2021/12/24

## Radiated Emission (SIP-AC3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2022/06/09
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2022/06/24
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2022/06/24
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06646	1 year	2021/08/30
Double Ridged Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2021/09/13
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06598	1 year	2021/11/26
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2022/01/14
Thermal Hygrometer	testo	608-H1	MRTSUE06622	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2021/12/24

## Conducted Test Equipment (WZ-TR3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2022/04/13
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2022/01/06
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2021/10/22
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2022/06/08
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2022/06/08
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2022/06/08
Modulation Analyzer	HP	HP8901A	MRTSUE06098	1 year	2021/09/26
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2021/10/22
Thermal Hygrometer	testo	608-H1	MRTSUE06401	1 year	2022/06/28

## Conducted Test Equipment (SIP-TR1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTSUE06603	1 year	2021/11/23
PXA Signal Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2021/08/30
USB wideband power sensor	Agilent	U2021XA	MRTSUE06595	1 year	2021/09/26
USB wideband power sensor	Agilent	U2021XA	MRTSUE06596	1 year	2021/09/26
Temperature Chamber	BAOYT	BYG-408CS	MRTSUE06847	1 year	2022/02/23
Thermal Hygrometer	testo	608-H1	MRTSUE11022	1 year	2021/11/25

Software	Version	Function
EMI Software	V3	EMI Test Software

## 4. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>AC Conducted Emission Measurement</b>
Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
<b>Radiated Disturbance</b>
Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
<b>Spurious Emissions, Conducted</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.78dB
<b>Output Power</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.13dB
<b>Power Spectrum Density</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.15dB
<b>Occupied Bandwidth</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.28%

## 5. TEST RESULT

### 5.1. Summary

Test Items	Test Limit	Test Condition	Test Result
6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass
Output Power	$\leq 1\text{Watt}$		Pass
Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$		Pass
Band Edge / Out-of-Band Emissions	$\leq 30\text{dBc}$ (Average)		Pass
Radiated Spurious Emission	$< \text{FCC } 15.209 \text{ limits}$	Radiated	Pass
Radiated Band Edge			Pass
AC Conducted Emissions 150kHz - 30MHz	$< \text{FCC } 15.207 \text{ limits}$	Line Conducted	Pass

#### Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) Output power test was verified over all data rates of each mode (data refers to operational description), and then choose the maximum power output (low data rate) for the final test of each channel.

## 5.2. 6dB Bandwidth Measurement

### 5.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


### 5.2.2. Test Procedure Used

ANSI C63.10 - 2013 Section 11.8.2

### 5.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

### 5.2.4. Test Setup

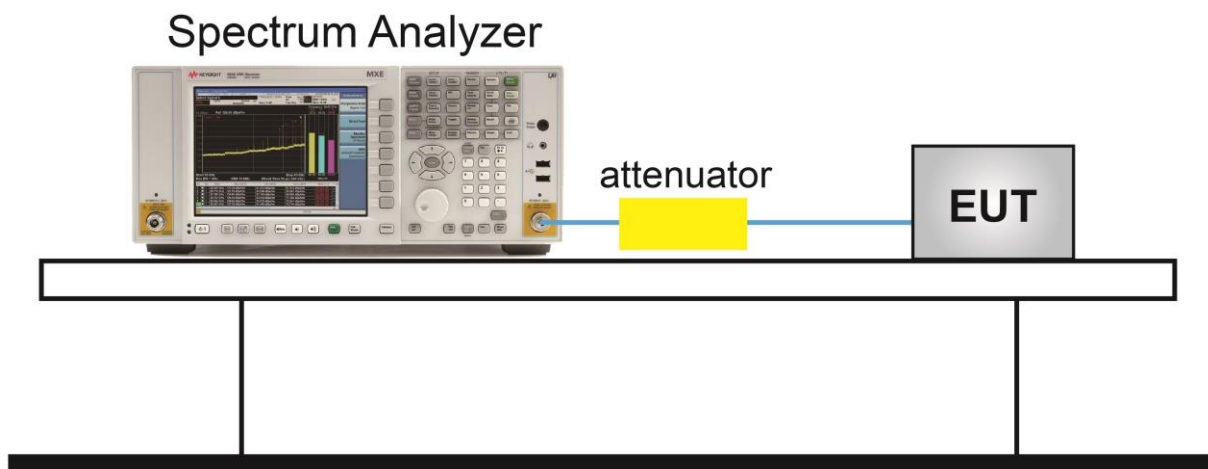




### 5.2.5. Test Result

Test Site	WZ-TR3	Test Engineer	Liz Yuan
Test Date	2021/08/08		


Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
b	1Mbps	01	2412	10.07	$\geq 0.5$	Pass
b	1Mbps	06	2437	10.07	$\geq 0.5$	Pass
b	1Mbps	11	2462	10.07	$\geq 0.5$	Pass
g	6Mbps	01	2412	16.31	$\geq 0.5$	Pass
g	6Mbps	06	2437	16.32	$\geq 0.5$	Pass
g	6Mbps	11	2462	16.32	$\geq 0.5$	Pass
n-HT20	MCS0	01	2412	16.66	$\geq 0.5$	Pass
n-HT20	MCS0	06	2437	17.30	$\geq 0.5$	Pass
n-HT20	MCS0	11	2462	17.28	$\geq 0.5$	Pass
n-HT40	MCS0	03	2422	35.71	$\geq 0.5$	Pass
n-HT40	MCS0	06	2437	35.72	$\geq 0.5$	Pass
n-HT40	MCS0	09	2452	35.69	$\geq 0.5$	Pass

## 802.11b 6dB Bandwidth


## Channel 01 (2412MHz)

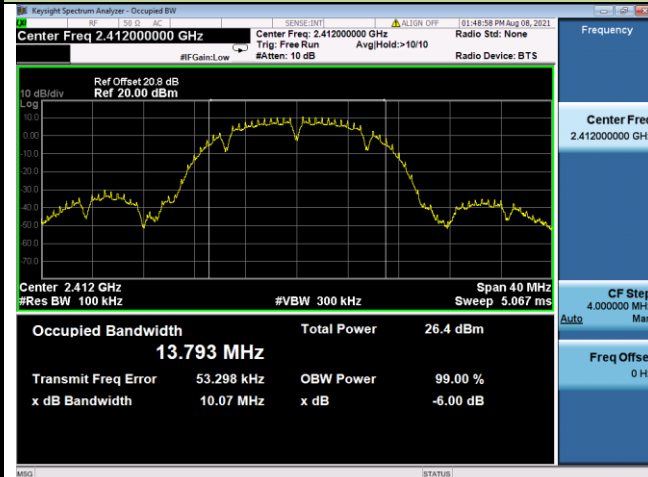

## Channel 06 (2437MHz)

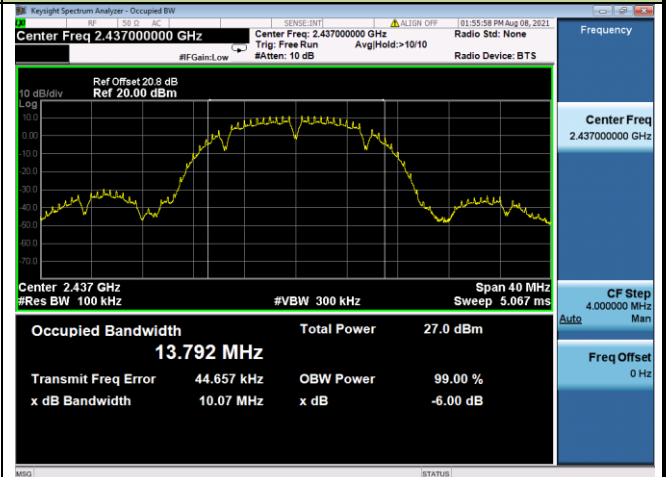


## Channel 11 (2462MHz)

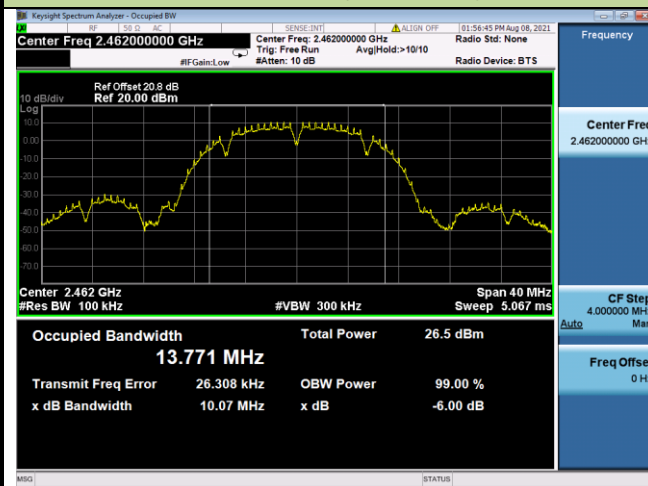


802.11g 6dB Bandwidth


Channel 01 (2412MHz)

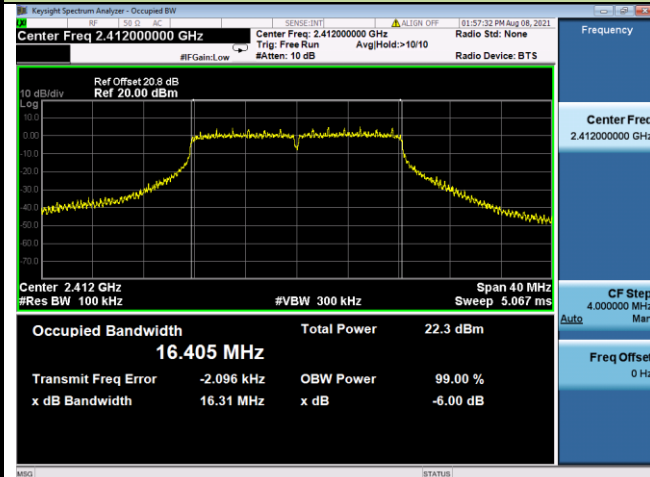

Channel 06 (2437MHz)

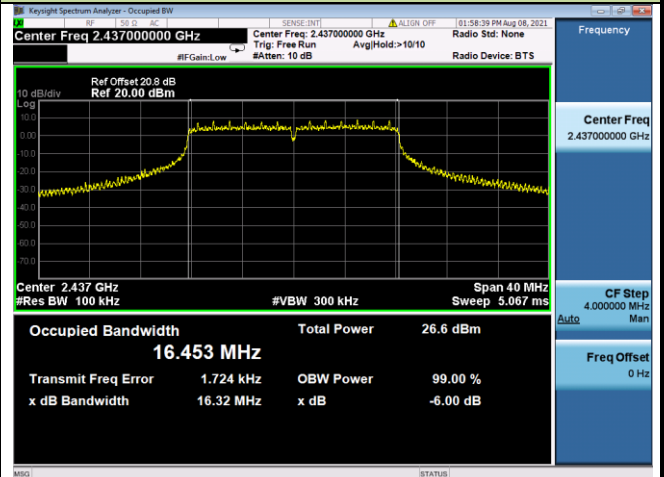


Channel 11 (2462MHz)

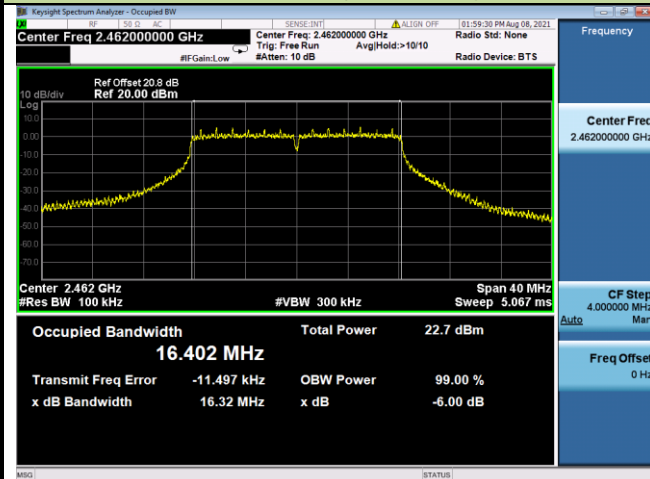


## 802.11n-HT20 6dB Bandwidth


## Channel 01 (2412MHz)

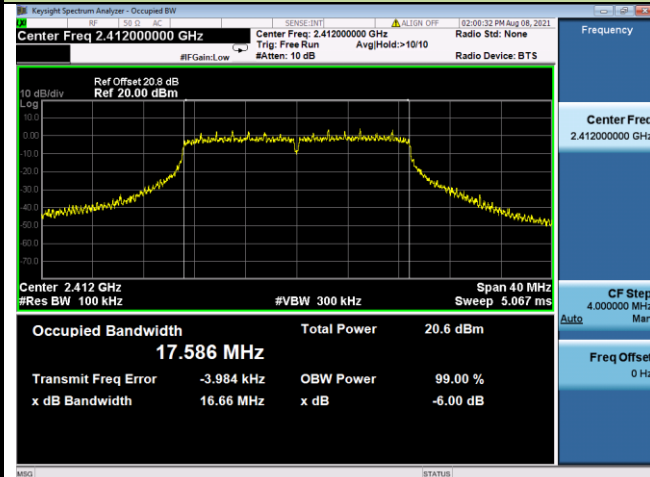

## Channel 06 (2437MHz)

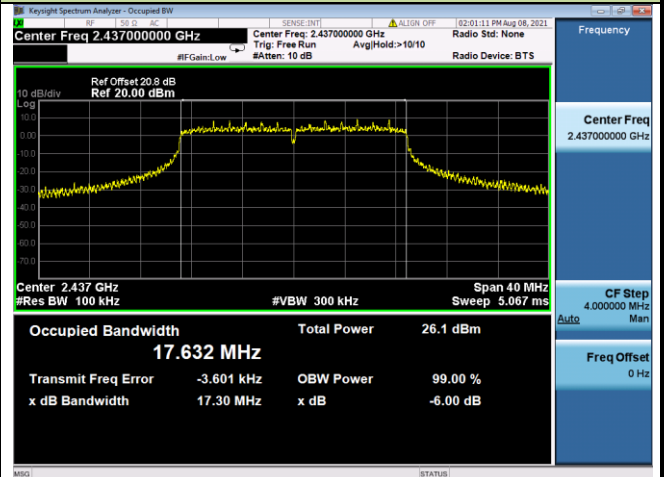


## Channel 11 (2462MHz)

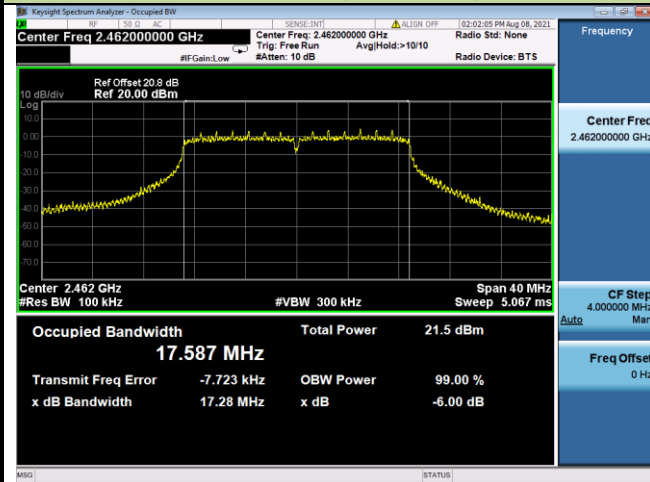


## 802.11n-HT40 6dB Bandwidth


## Channel 03 (2422MHz)

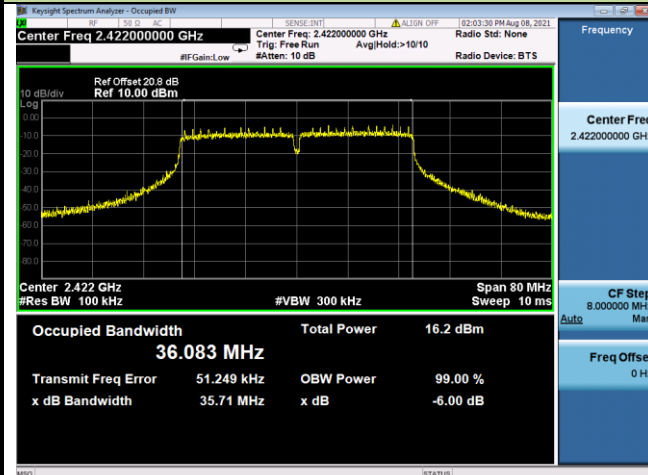

## Channel 06 (2437MHz)

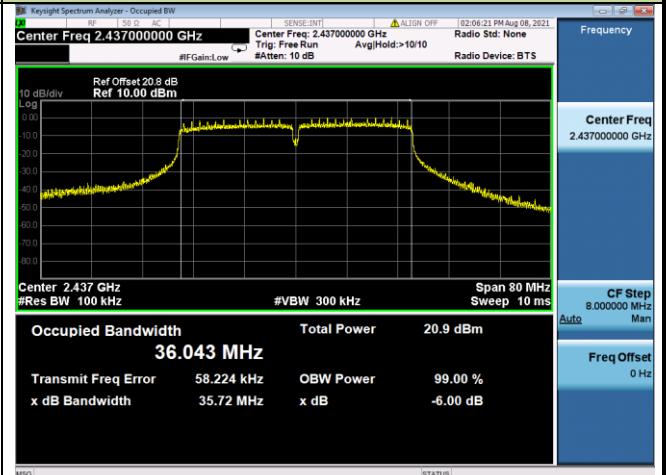

## Channel 09 (2452MHz)

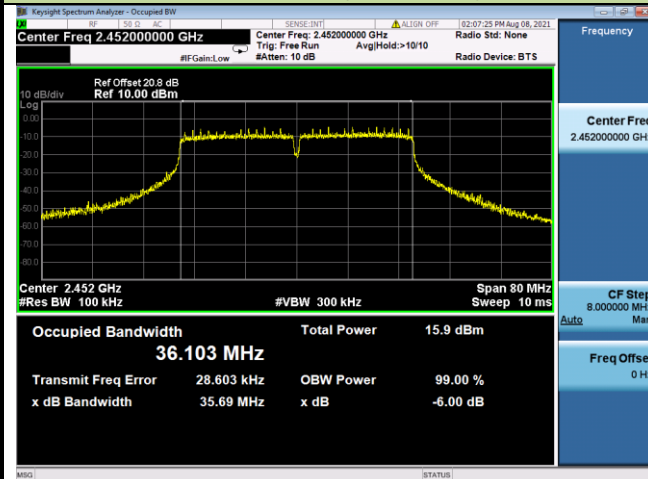

### 5.3. Output Power Measurement

#### 5.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

The conducted output power limit is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 5.3.2. Test Procedure Used


ANSI C63.10 - 2013 Section 11.9.2.3.2

#### 5.3.3. Test Setting

##### **Method AVGPM-G (Measurement using a gated RF average-reading power meter)**

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

#### 5.3.4. Test Setup

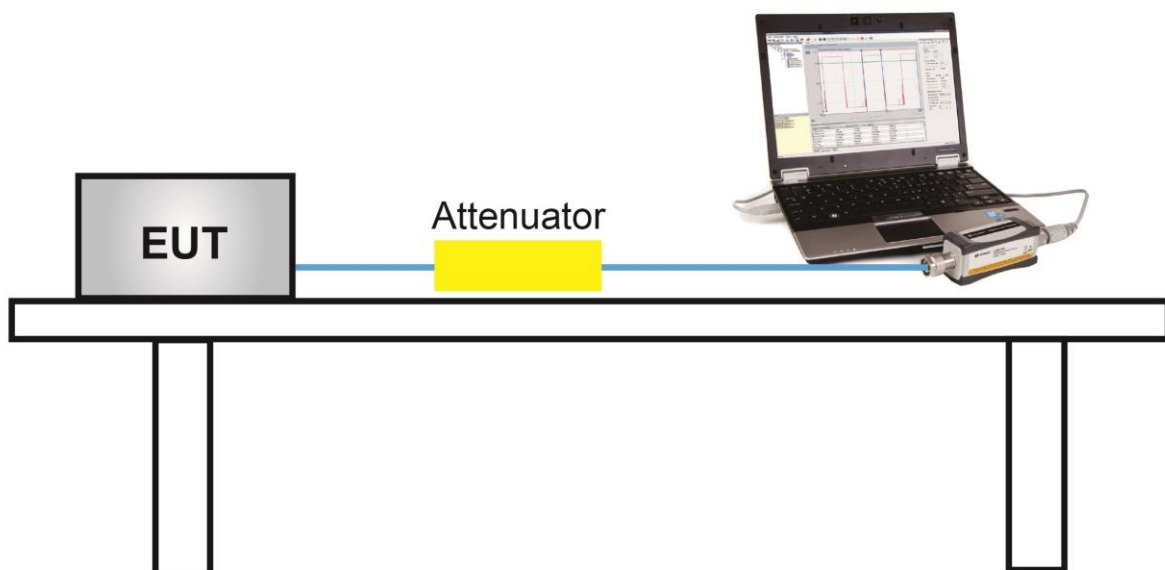

### 5.3.5. Test Result

Test Site	WZ-TR3	Test Engineer	Liz Yuan
Test Date	2021/08/08	Test Mode	SISO Mode

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Limit (dBm)	Result
11b	1Mbps	1	2412	19.71	19.78	≤ 30	Pass
11b	1Mbps	6	2437	19.74	19.98	≤ 30	Pass
11b	1Mbps	11	2462	19.38	19.73	≤ 30	Pass
11g	6Mbps	1	2412	16.63	16.13	≤ 30	Pass
11g	6Mbps	6	2437	19.58	19.92	≤ 30	Pass
11g	6Mbps	11	2462	16.84	16.51	≤ 30	Pass
11n-HT20	MCS0	1	2412	14.60	14.53	≤ 30	Pass
11n-HT20	MCS0	6	2437	19.45	19.62	≤ 30	Pass
11n-HT20	MCS0	11	2462	14.72	14.90	≤ 30	Pass
11n-HT40	MCS0	3	2422	9.83	10.14	≤ 30	Pass
11n-HT40	MCS0	6	2437	14.42	14.78	≤ 30	Pass
11n-HT40	MCS0	9	2452	9.62	9.79	≤ 30	Pass

Test Site	WZ-TR3	Test Engineer	Liz Yuan
Test Date	2021/08/08	Test Mode	MIMO Mode

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Limit (dBm)	Result
11n-HT20	MCS0	1	2412	14.64	14.94	17.80	≤ 30	Pass
11n-HT20	MCS0	6	2437	19.53	20.14	22.86	≤ 30	Pass
11n-HT20	MCS0	11	2462	14.74	15.11	17.94	≤ 30	Pass
11n-HT40	MCS0	3	2422	10.08	10.55	13.33	≤ 30	Pass
11n-HT40	MCS0	6	2437	14.52	14.92	17.73	≤ 30	Pass
11n-HT40	MCS0	9	2452	9.68	9.92	12.81	≤ 30	Pass

Note: Total Average Power (dBm) =  $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$  (dBm)



## **5.4. Power Spectral Density Measurement**

### **5.4.1. Test Limit**

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the conducted power spectral density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


### **5.4.2. Test Procedure Used**

ANSI C63.10-2013 Section 11.10.5

### **5.4.3. Test Setting**

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 10kHz
4. VBW = 30kHz
5. Detector = RMS
6. Ensure that the number of measurement points in the sweep  $\geq 2$  span/RBW
7. Sweep time = auto couple
8. Employ trace averaging (RMS) mode over a minimum of 100 traces
9. Use the peak marker function to determine the maximum amplitude level
10. If duty cycle  $< 98$  %, add  $10 \cdot \log(1/x)$ , where  $x$  is the duty cycle measured to the measured PSD to compute the average PSD during the actual transmission time.

### 5.4.4. Test Setup

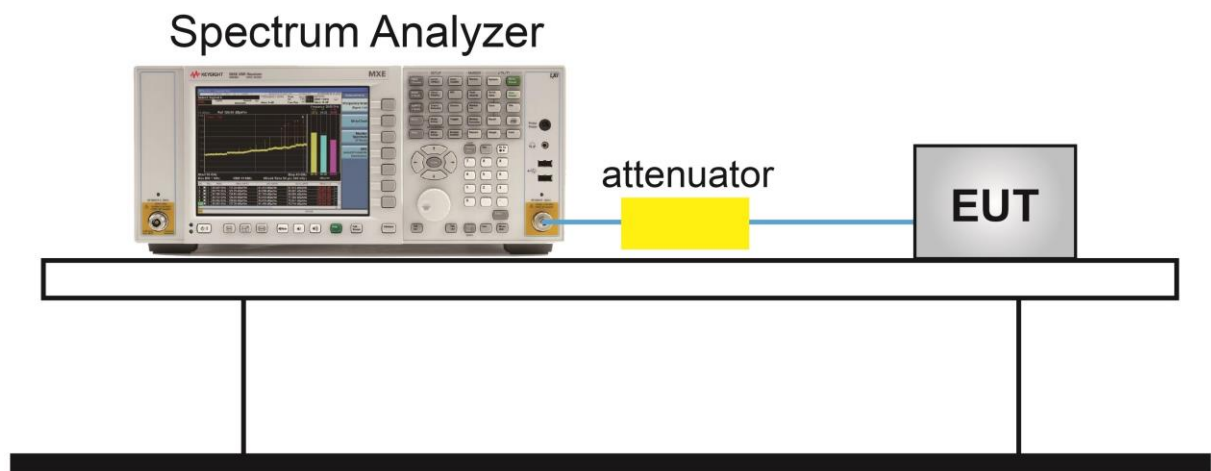

### 5.4.5. Test Result

Test Site	WZ-TR3	Test Engineer	Liz Yuan
Test Date	2021/08/08	Test Mode	SISO Mode

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 PSD (dBm / 10kHz)	Ant 1 PSD (dBm / 10kHz)	Duty Cycle (%)	Ant 0 Final PSD (dBm / 10kHz)	Ant 1 Final PSD (dBm / 10kHz)	Limit (dBm / 3kHz)	Result
11b	1Mbps	1	2412	-7.65	-7.70	98.00	-7.65	-7.70	≤ 8.00	Pass
11b	1Mbps	6	2437	-7.39	-7.30	98.00	-7.39	-7.30	≤ 8.00	Pass
11b	1Mbps	11	2462	-7.68	-7.48	98.00	-7.68	-7.48	≤ 8.00	Pass
11g	6Mbps	1	2412	-12.47	-12.91	96.02	-12.30	-12.73	≤ 8.00	Pass
11g	6Mbps	6	2437	-9.71	-9.48	96.02	-9.53	-9.30	≤ 8.00	Pass
11g	6Mbps	11	2462	-12.22	-12.58	96.02	-12.04	-12.40	≤ 8.00	Pass


Note: When duty cycle < 98%, Final PSD (dBm / 10kHz) = PSD (dBm/10kHz) + 10\*log (1/Duty Cycle).

When duty cycle ≥ 98%, Final PSD (dBm / 10kHz) = PSD (dBm/10kHz).

Test Site	WZ-TR3	Test Engineer	Liz Yuan
Test Date	2021/08/08	Test Mode	MIMO Mode


Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 PSD (dBm / 10kHz)	Ant 1 PSD (dBm / 10kHz)	Duty Cycle (%)	Final PSD (dBm / 10kHz)	Limit (dBm / 3kHz)	Result
11n-HT20	MCS0	1	2412	-15.00	-14.46	95.93	-11.53	≤ 8.00	Pass
11n-HT20	MCS0	6	2437	-9.84	-9.30	95.93	-6.37	≤ 8.00	Pass
11n-HT20	MCS0	11	2462	-14.72	-13.85	95.93	-11.07	≤ 8.00	Pass
11n-HT40	MCS0	3	2422	-21.92	-21.07	91.78	-18.09	≤ 8.00	Pass
11n-HT40	MCS0	6	2437	-17.52	-17.27	91.78	-14.01	≤ 8.00	Pass
11n-HT40	MCS0	9	2452	-21.87	-21.74	91.78	-18.42	≤ 8.00	Pass

Note: When duty cycle < 98%, Final PSD (dBm / 10kHz) =  $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\} + 10 \cdot \log (1/\text{Duty Cycle})$ .

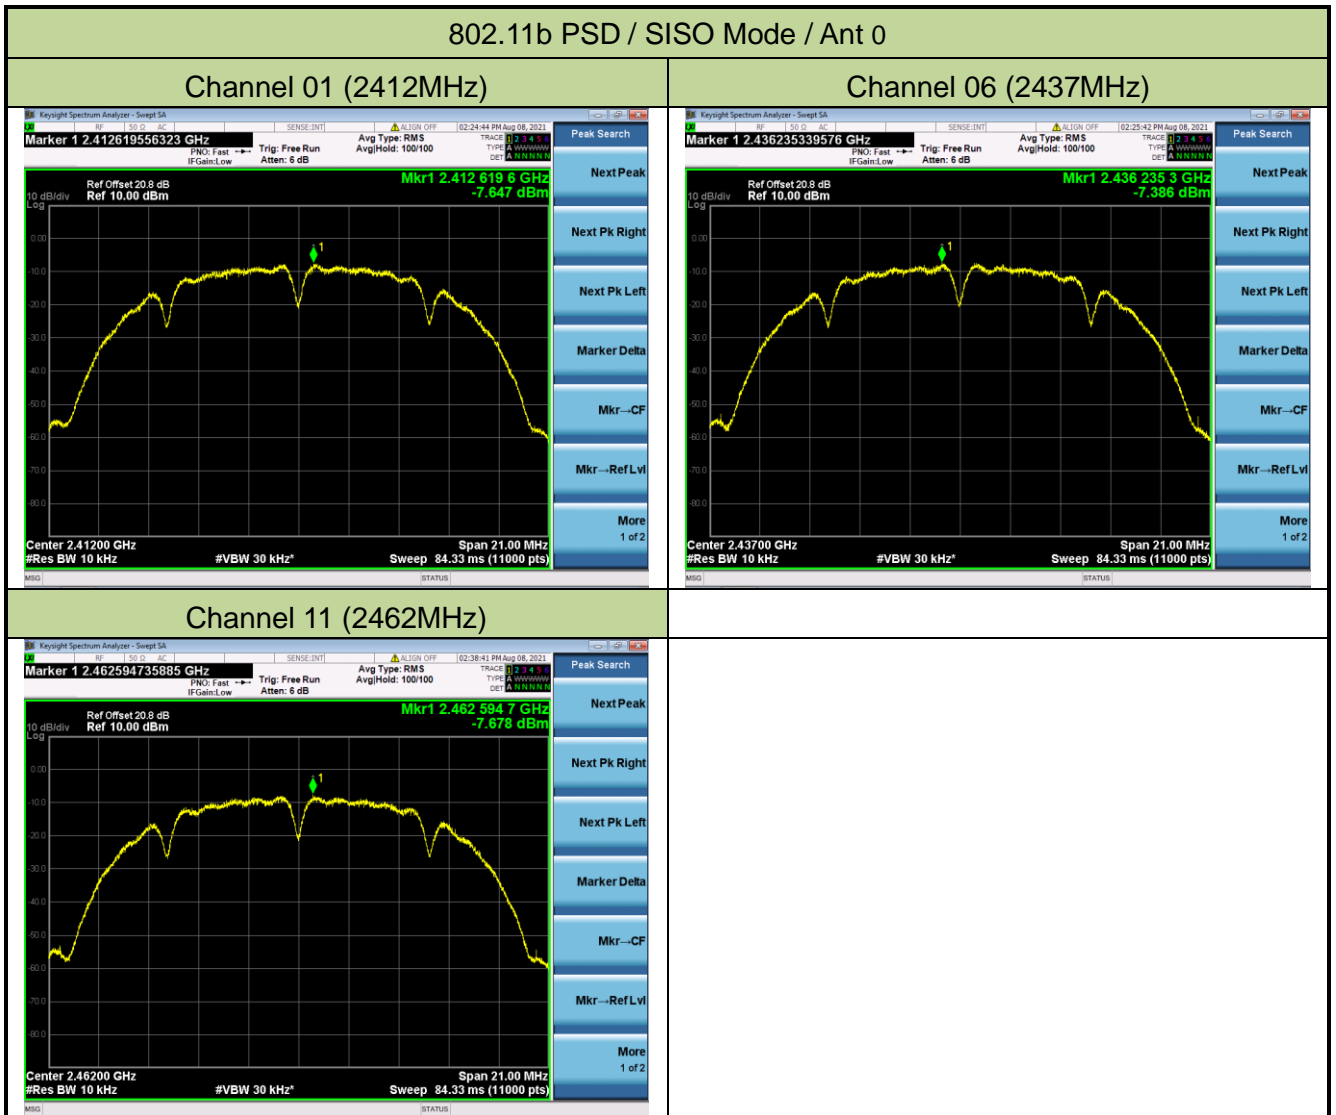


802.11g PSD / SISO Mode / Ant 0


Channel 01 (2412MHz)

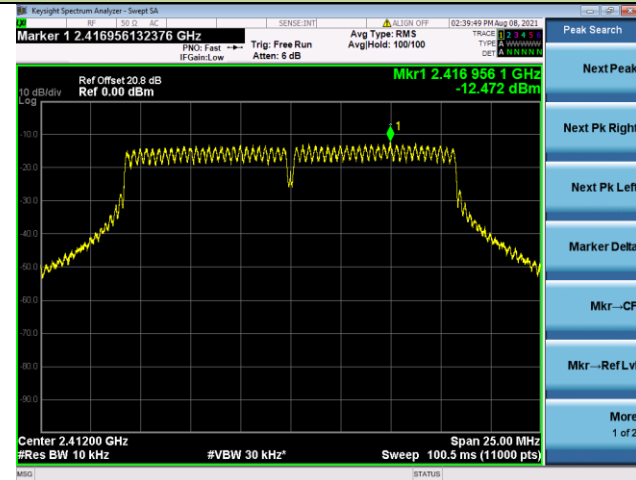

Channel 06 (2437MHz)

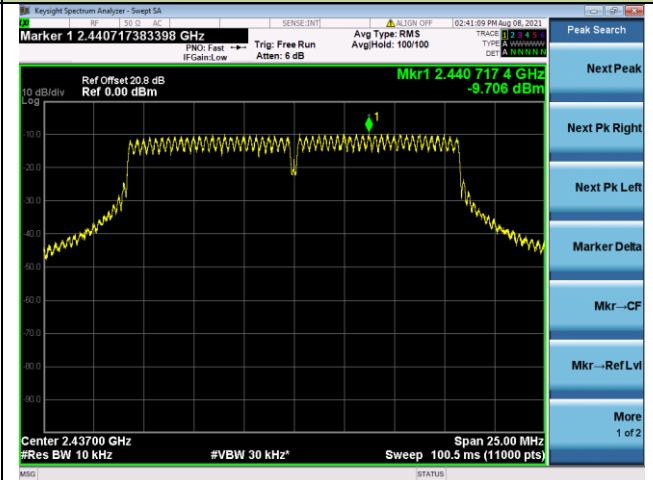


Channel 11 (2462MHz)

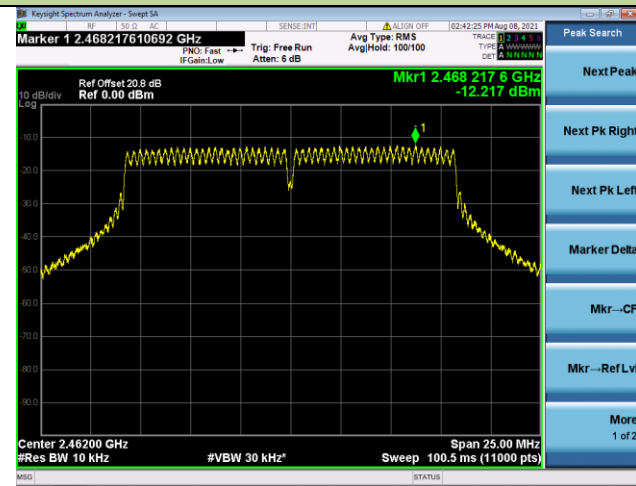

802.11b PSD / SISO Mode / Ant 1


Channel 01 (2412MHz)

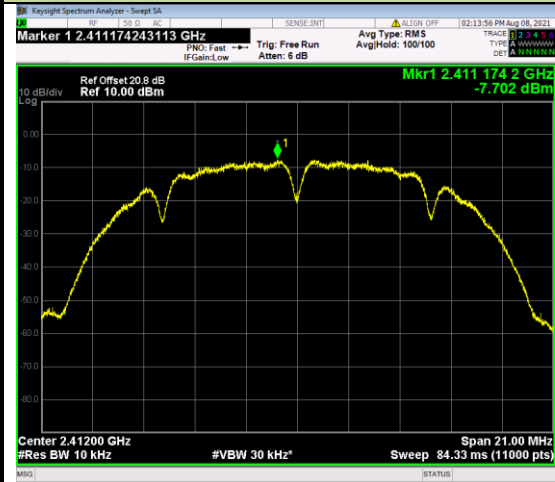

Channel 06 (2437MHz)




Channel 11 (2462MHz)

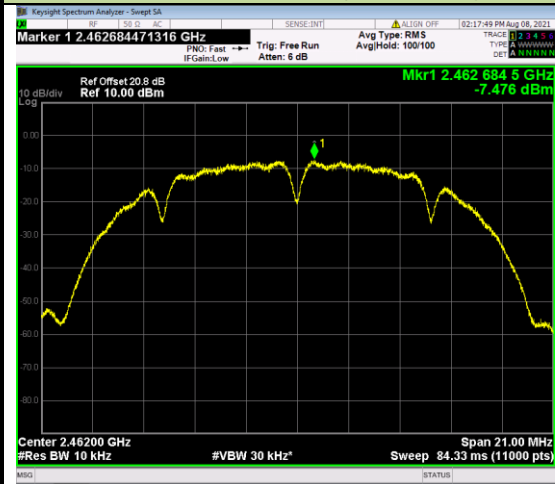


## 802.11g PSD / SISO Mode / Ant 1


## Channel 01 (2412MHz)

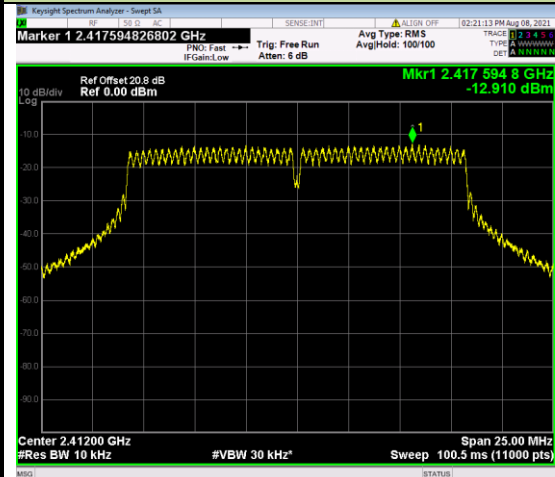

## Channel 06 (2437MHz)

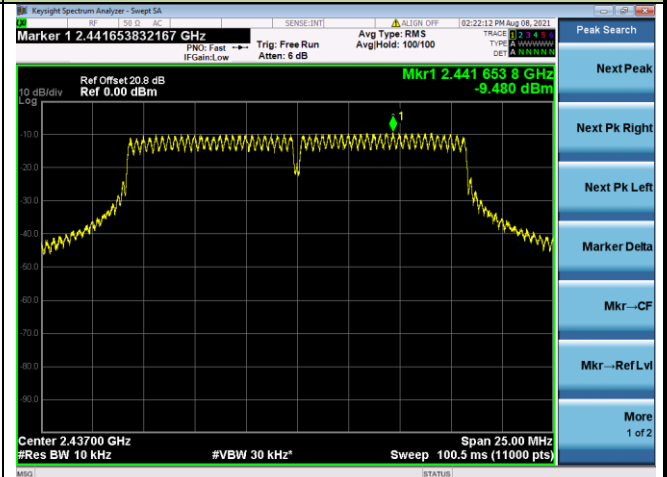


## Channel 11 (2462MHz)

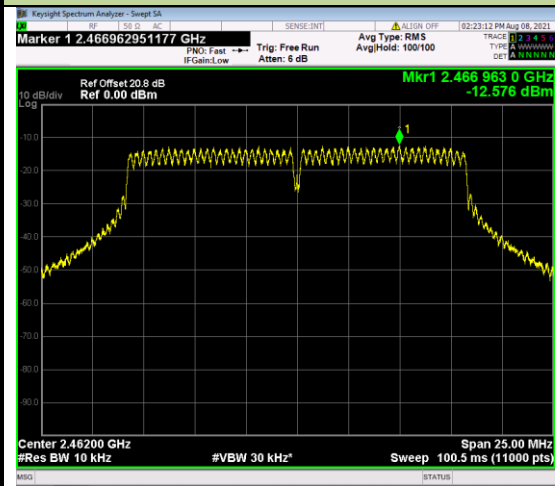




802.11n-HT20 PSD / MIMO Mode / Ant 0


Channel 01 (2412MHz)

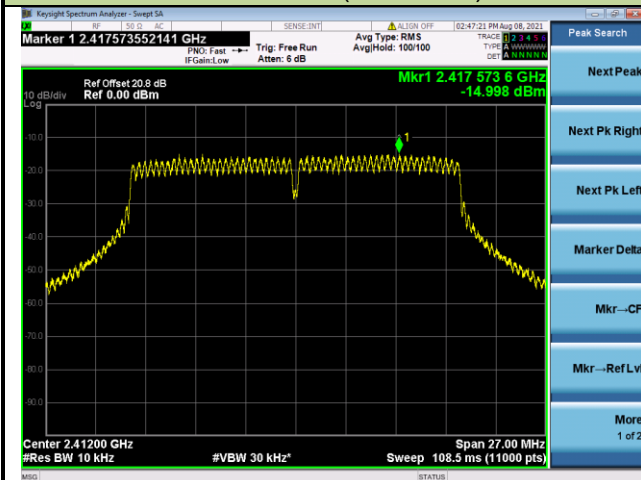

Channel 06 (2437MHz)

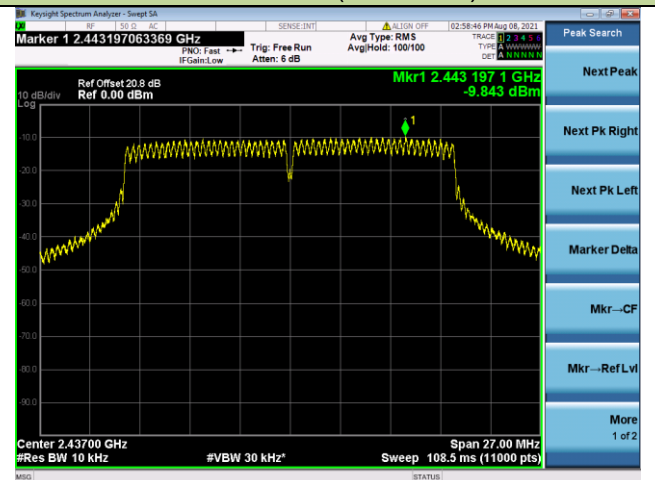


Channel 11 (2462MHz)

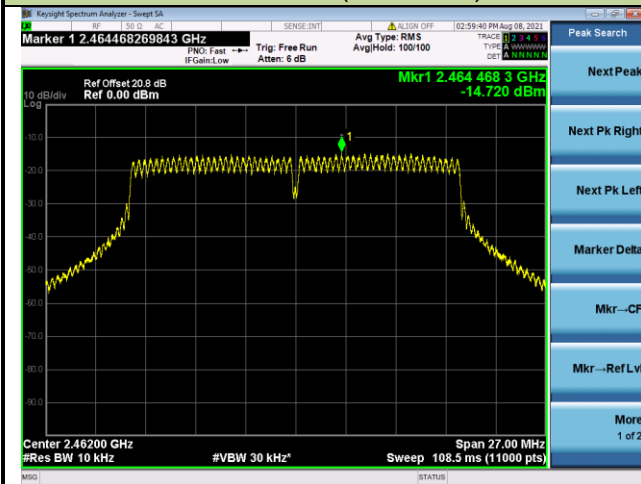


802.11n-HT40 PSD / MIMO Mode / Ant 0



Channel 03 (2422MHz)

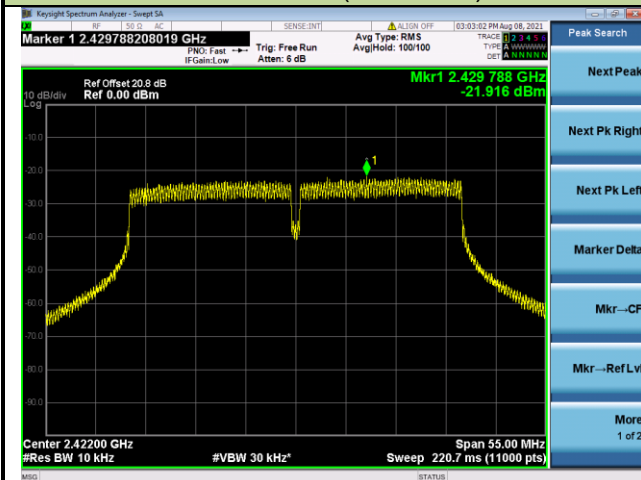

Channel 06 (2437MHz)

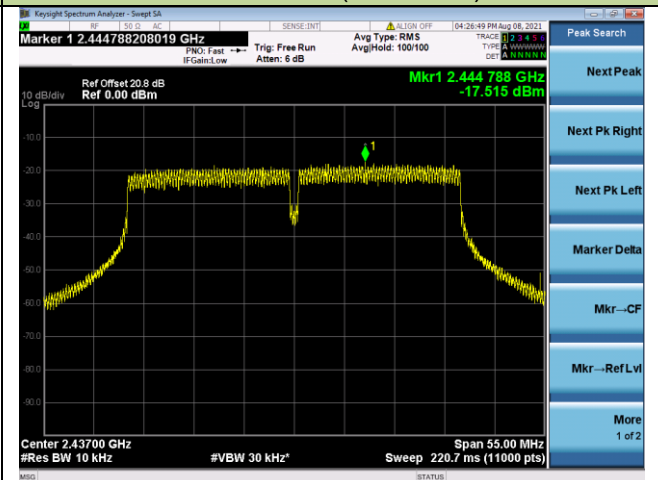


Channel 09 (2452MHz)

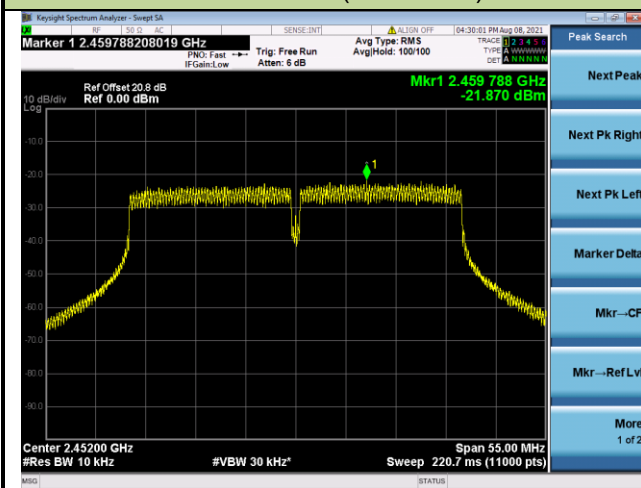


802.11n-HT20 PSD / MIMO Mode / Ant 1


Channel 01 (2412MHz)

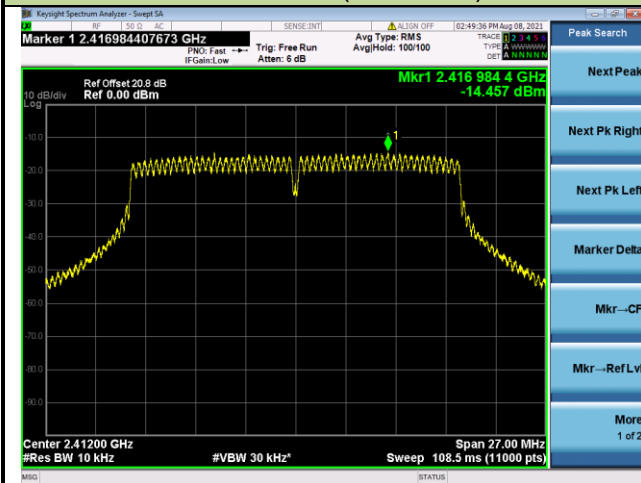

Channel 06 (2437MHz)

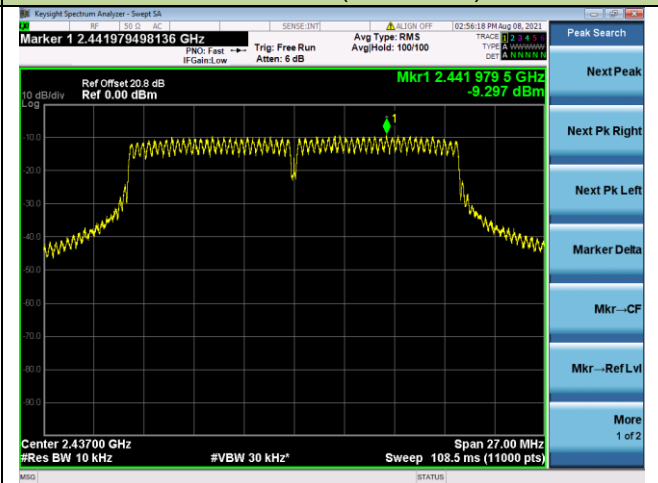


Channel 11 (2462MHz)

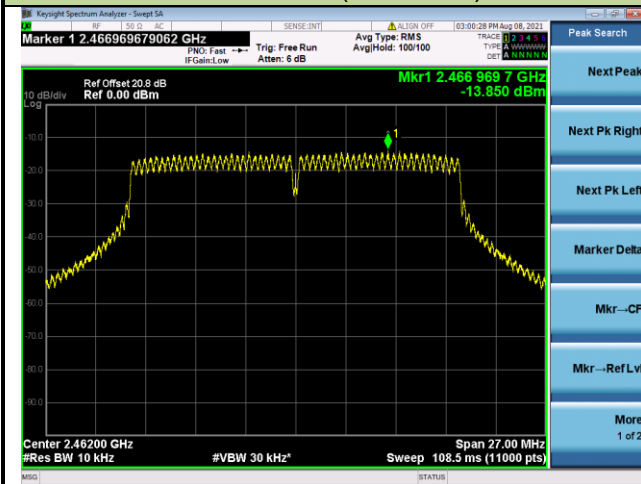


## 802.11n-HT40 PSD / MIMO Mode / Ant 1


Channel 03 (2422MHz)

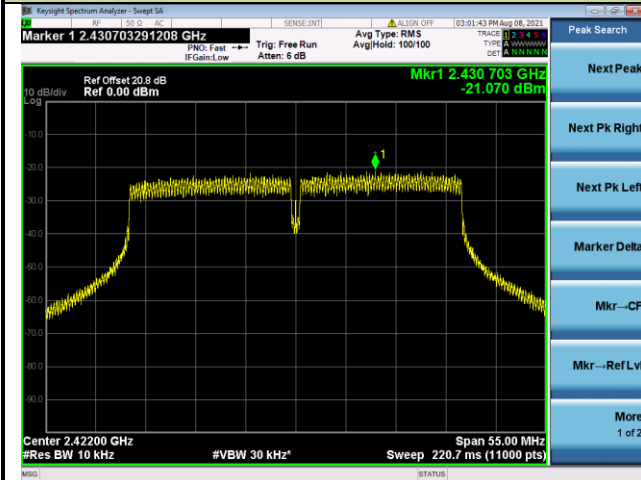

Channel 06 (2437MHz)

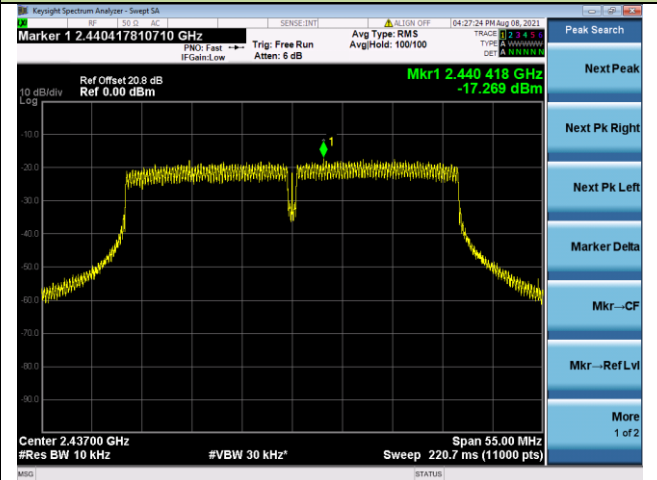

Channel 09 (2452MHz)

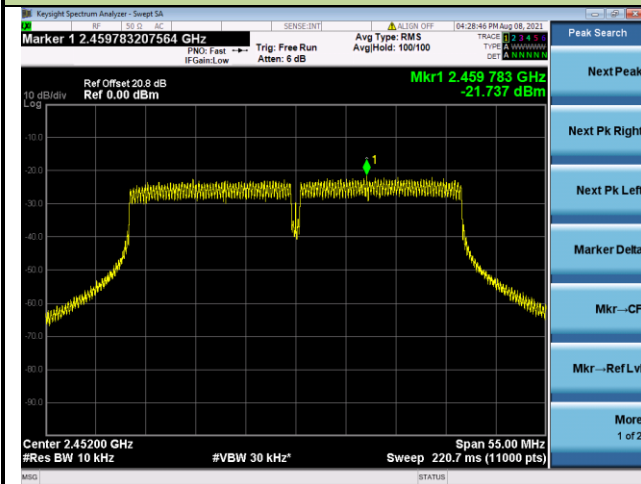

## **5.5. Conducted Band Edge and Out-of-Band Emissions**

### **5.5.1. Test Limit**

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

### **5.5.2. Test Procedure Used**

ANSI C63.10-2013 Section 11.11

### **5.5.3. Test Setting**


#### **Reference level measurement**

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to  $\geq 1.5$  times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW  $\geq 3 \times$  RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

#### **Emission level measurement**

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### 5.5.4. Test Setup

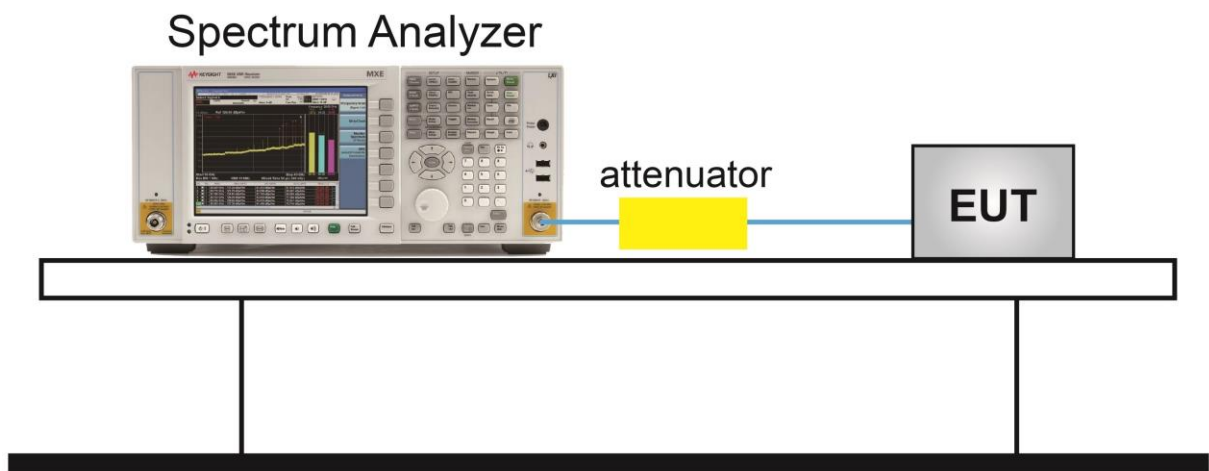

### 5.5.5. Test Result

Test Site	WZ-TR3	Test Engineer	Liz Yuan
Test Date	2021/08/08	Test Mode	SISO Mode

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit	Result
<b>SISO Mode / Ant 0</b>					
802.11b	1Mbps	01	2412	30dBc	Pass
802.11b	1Mbps	06	2437	30dBc	Pass
802.11b	1Mbps	11	2462	30dBc	Pass
802.11g	6Mbps	01	2412	30dBc	Pass
802.11g	6Mbps	06	2437	30dBc	Pass
802.11g	6Mbps	11	2462	30dBc	Pass
<b>SISO Mode / Ant 1</b>					
802.11b	1Mbps	01	2412	30dBc	Pass
802.11b	1Mbps	06	2437	30dBc	Pass
802.11b	1Mbps	11	2462	30dBc	Pass
802.11g	6Mbps	01	2412	30dBc	Pass
802.11g	6Mbps	06	2437	30dBc	Pass
802.11g	6Mbps	11	2462	30dBc	Pass

Test Site	WZ-TR3	Test Engineer	Liz Yuan
Test Date	2021/08/08	Test Mode	MIMO Mode


Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit	Result
MIMO Mode / Ant 0					
802.11n-HT20	MCS0	01	2412	30dBc	Pass
802.11n-HT20	MCS0	06	2437	30dBc	Pass
802.11n-HT20	MCS0	11	2462	30dBc	Pass
802.11n-HT40	MCS0	03	2422	30dBc	Pass
802.11n-HT40	MCS0	06	2437	30dBc	Pass
802.11n-HT40	MCS0	09	2452	30dBc	Pass
MIMO Mode / Ant 1					
802.11n-HT20	MCS0	01	2412	30dBc	Pass
802.11n-HT20	MCS0	06	2437	30dBc	Pass
802.11n-HT20	MCS0	11	2462	30dBc	Pass
802.11n-HT40	MCS0	03	2422	30dBc	Pass
802.11n-HT40	MCS0	06	2437	30dBc	Pass
802.11n-HT40	MCS0	09	2452	30dBc	Pass




## 802.11b Out-of-Band Emissions – SISO Mode / Ant 0

### Channel 01 (2412MHz)

#### Low Band Edge

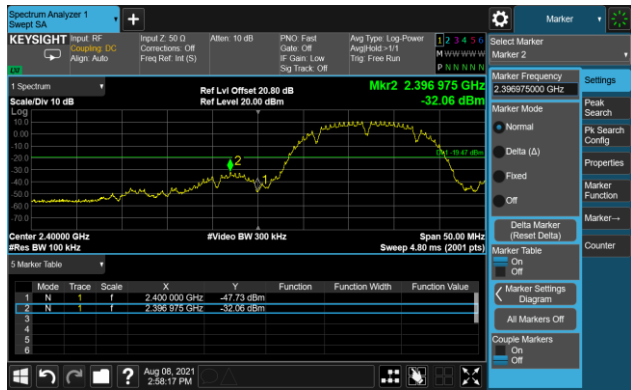


#### Spurious Emission

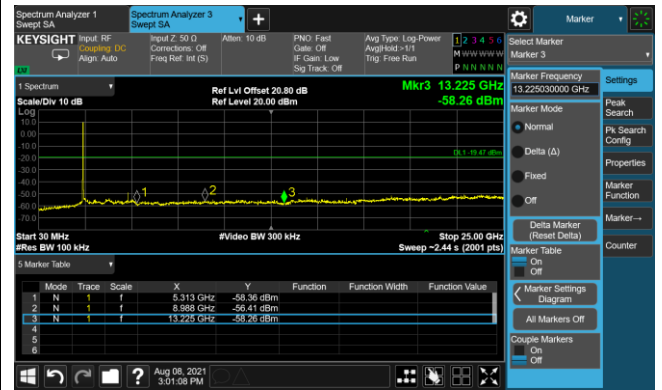


### Channel 06 (2437MHz)

#### Reference Level

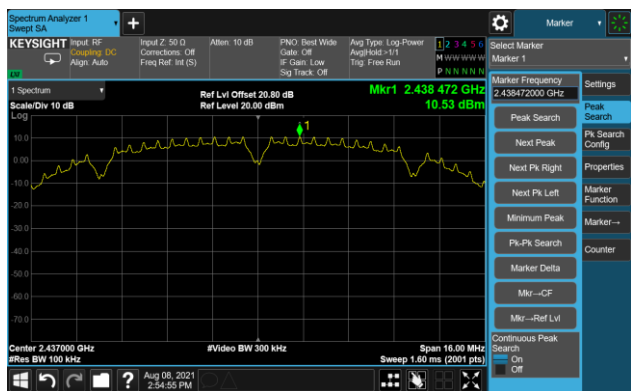

#### Spurious Emission

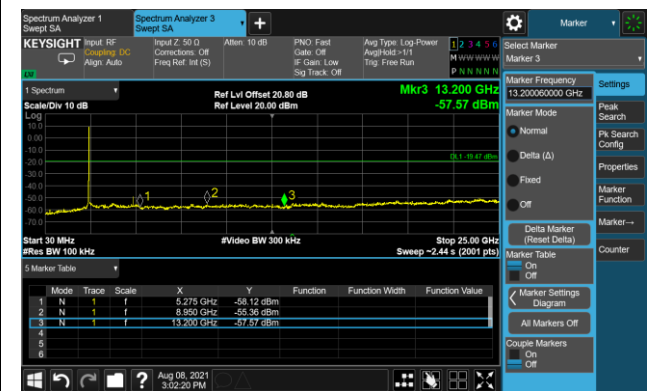


### Channel 11 (2462MHz)

#### High Band Edge




#### Spurious Emission

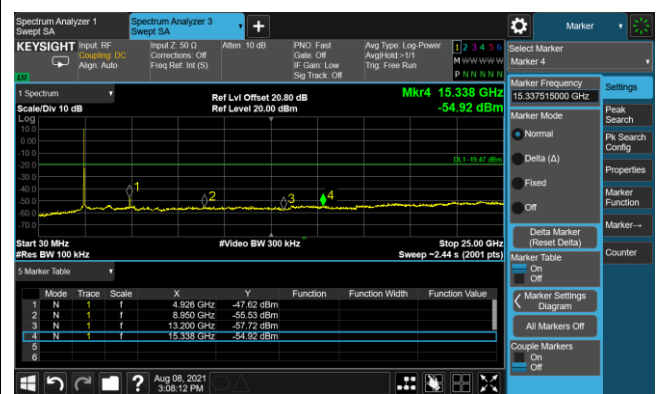


## 802.11g Out-of-Band Emissions – SISO Mode / Ant 0

### Channel 01 (2412MHz)

#### Low Band Edge

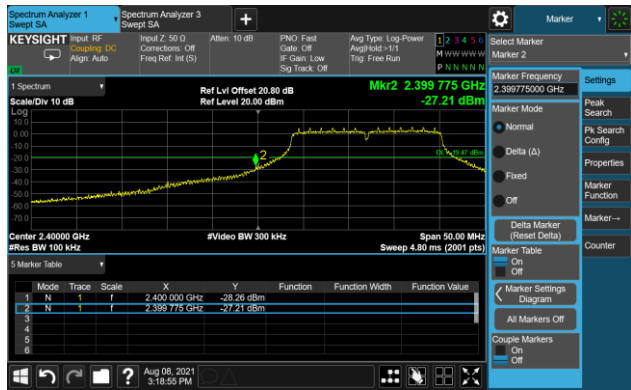


#### Spurious Emission

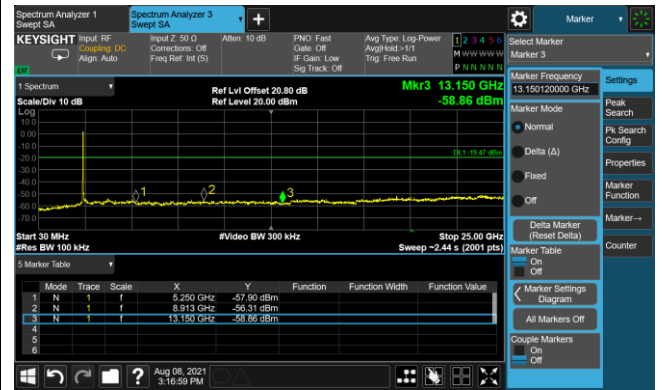


### Channel 06 (2437MHz)

#### Spurious Emission

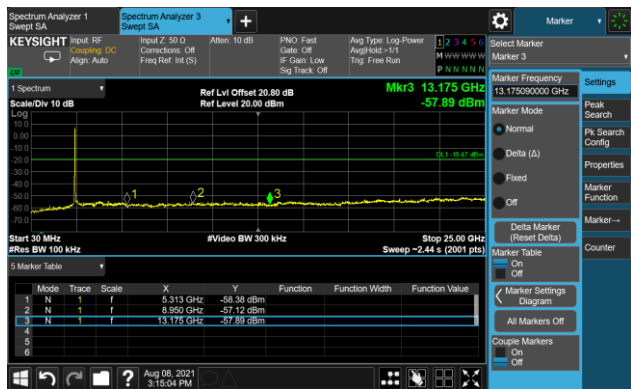

### Channel 11 (2462MHz)

#### High Band Edge

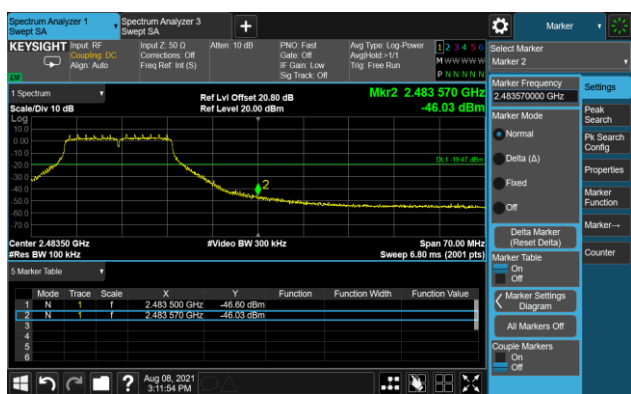

#### Spurious Emission

