


Site: WZ-AC1	Time: 2021/12/14 - 21:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5320MHz	

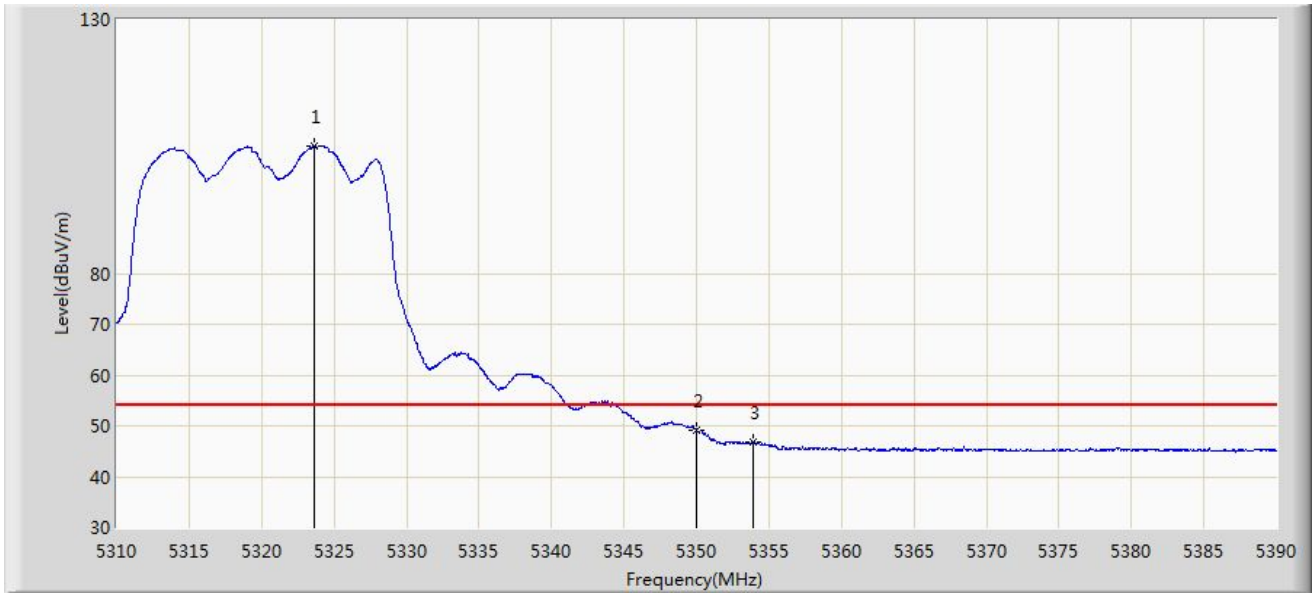


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5323.640	105.088	100.403	N/A	N/A	4.686	AV
2			5350.000	49.023	44.166	-4.977	54.000	4.857	AV
3			5353.880	46.712	41.858	-7.288	54.000	4.853	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/14 - 21:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5500MHz	

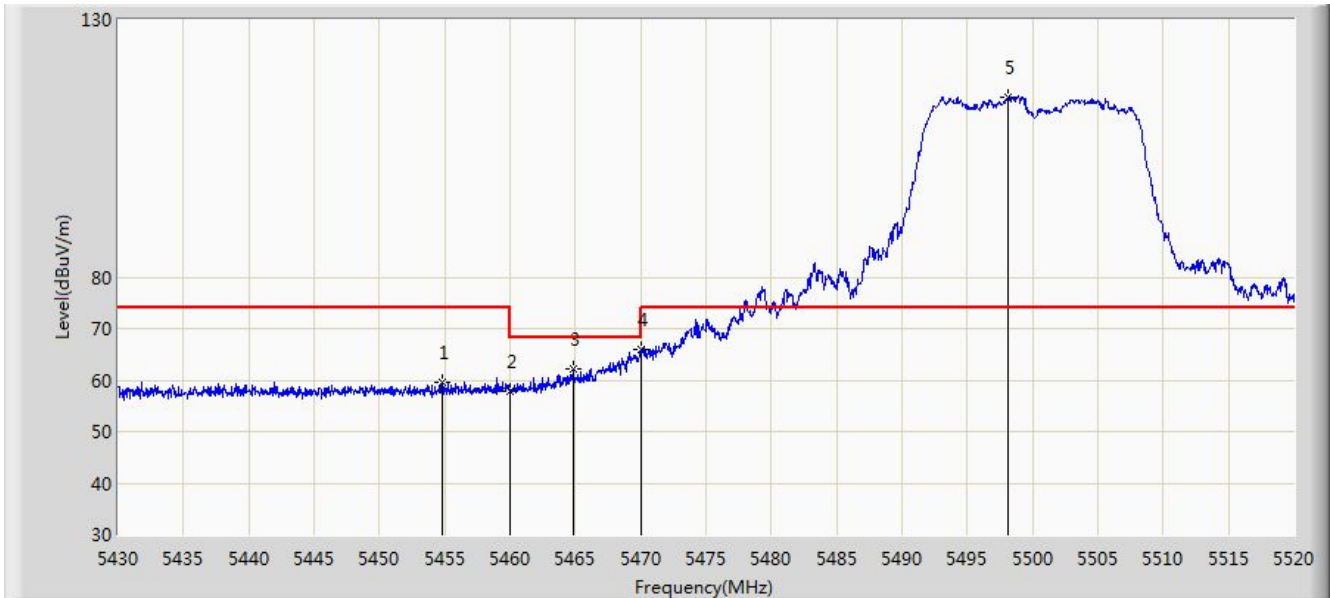


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5454.795	59.551	54.802	-14.449	74.000	4.750	PK
2			5460.000	57.712	53.000	-16.288	74.000	4.711	PK
3			5464.830	62.172	57.493	-6.028	68.200	4.679	PK
4			5470.000	65.835	61.191	-2.365	68.200	4.644	PK
5		*	5498.085	114.952	110.189	N/A	N/A	4.762	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/14 - 21:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5500MHz	

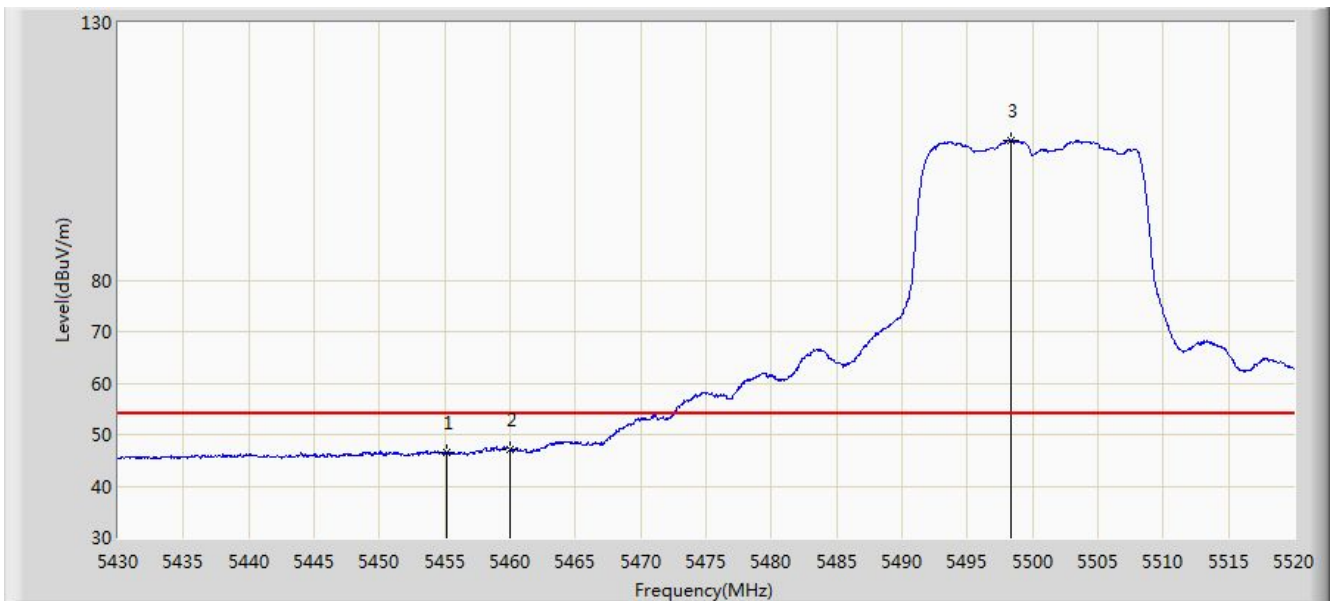


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5455.155	46.635	41.889	-7.365	54.000	4.747	AV
2			5460.000	47.055	42.343	-6.945	54.000	4.711	AV
3		*	5498.310	107.197	102.431	N/A	N/A	4.765	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/14 - 22:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5500MHz	

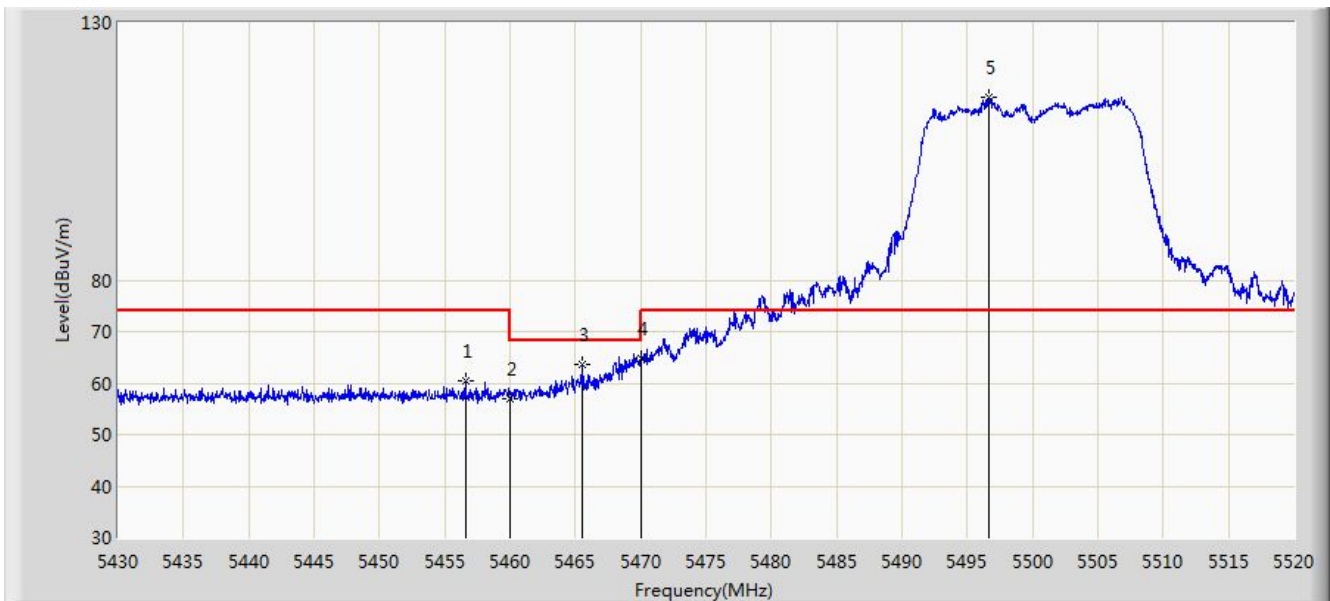


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5456.595	60.383	55.648	-13.617	74.000	4.735	PK
2			5460.000	56.853	52.141	-17.147	74.000	4.711	PK
3			5465.505	63.534	58.859	-4.666	68.200	4.674	PK
4			5470.000	64.782	60.138	-3.418	68.200	4.644	PK
5		*	5496.600	115.402	110.661	N/A	N/A	4.741	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/14 - 22:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5500MHz	

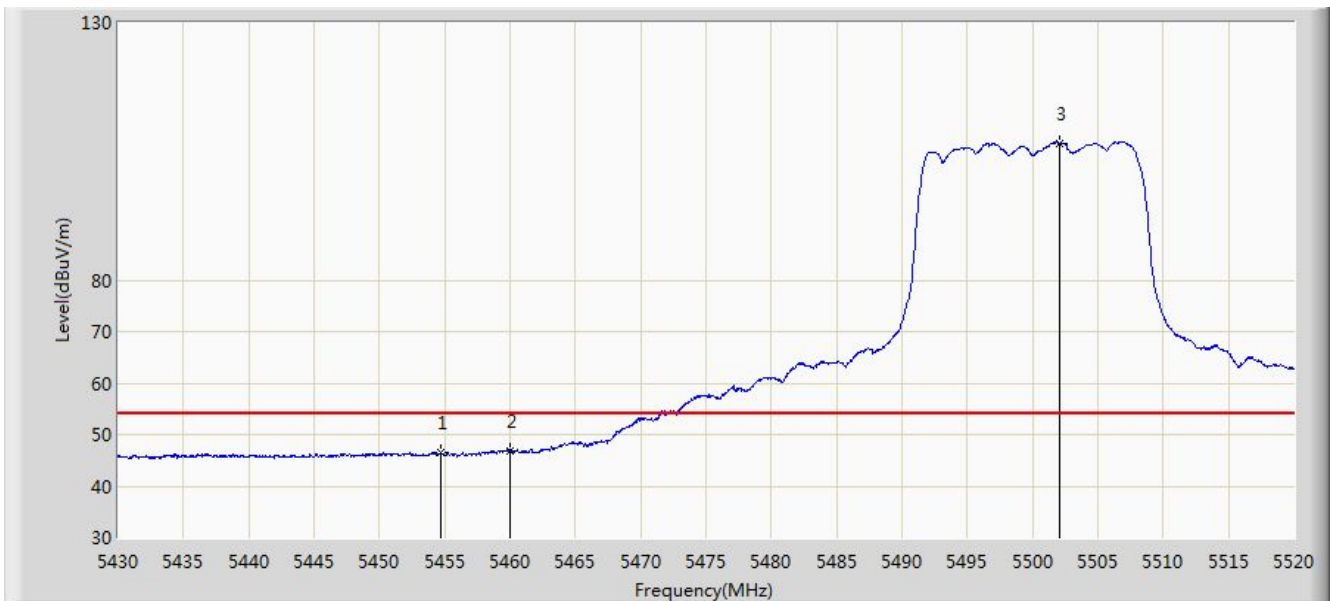


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5454.705	46.582	41.832	-7.418	54.000	4.750	AV
2			5460.000	46.886	42.174	-7.114	54.000	4.711	AV
3		*	5502.090	106.621	101.800	N/A	N/A	4.821	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/14 - 22:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5700MHz	

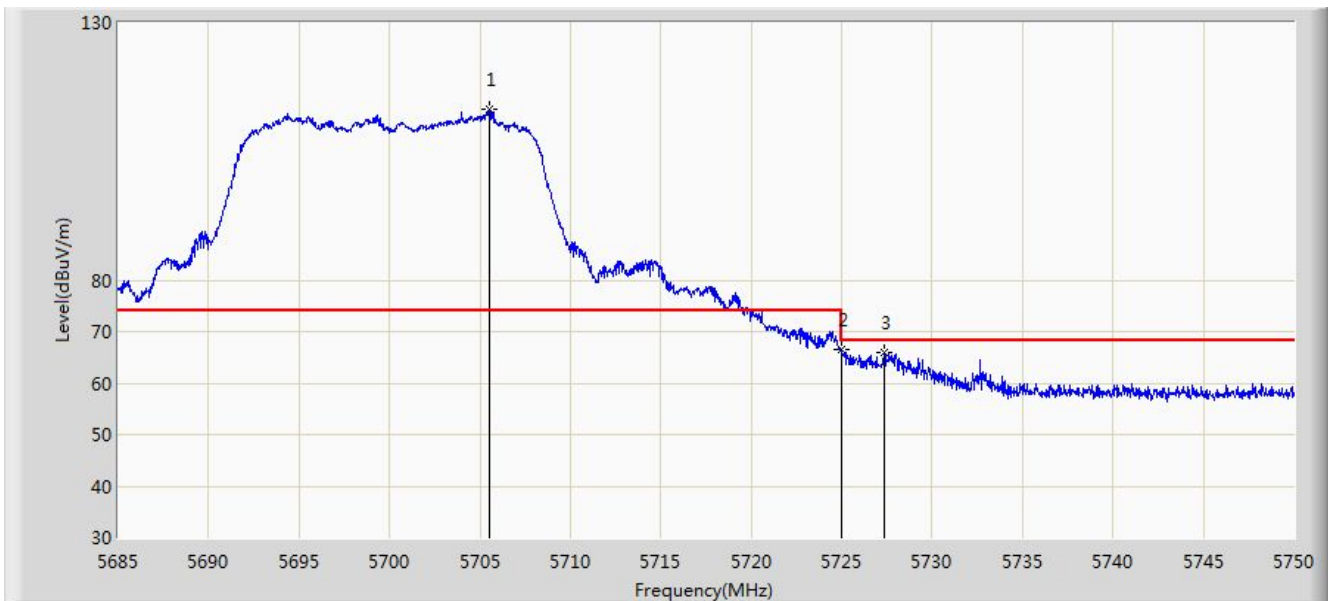


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5705.540	113.229	108.018	N/A	N/A	5.212	PK
2			5725.000	66.515	61.275	-1.685	68.200	5.241	PK
3			5727.380	65.980	60.730	-2.220	68.200	5.251	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/14 - 22:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5700MHz	

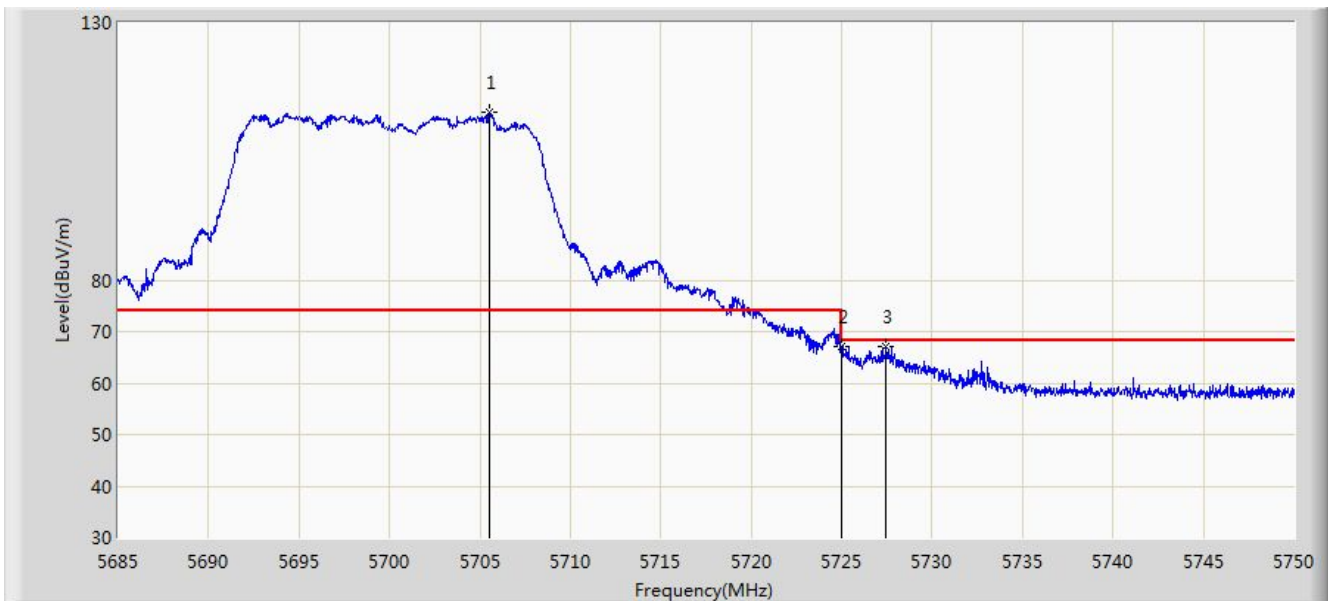


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5705.540	112.481	107.270	N/A	N/A	5.212	PK
2			5725.000	67.144	61.904	-1.056	68.200	5.241	PK
3			5727.445	67.163	61.913	-1.037	68.200	5.250	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 00:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz	

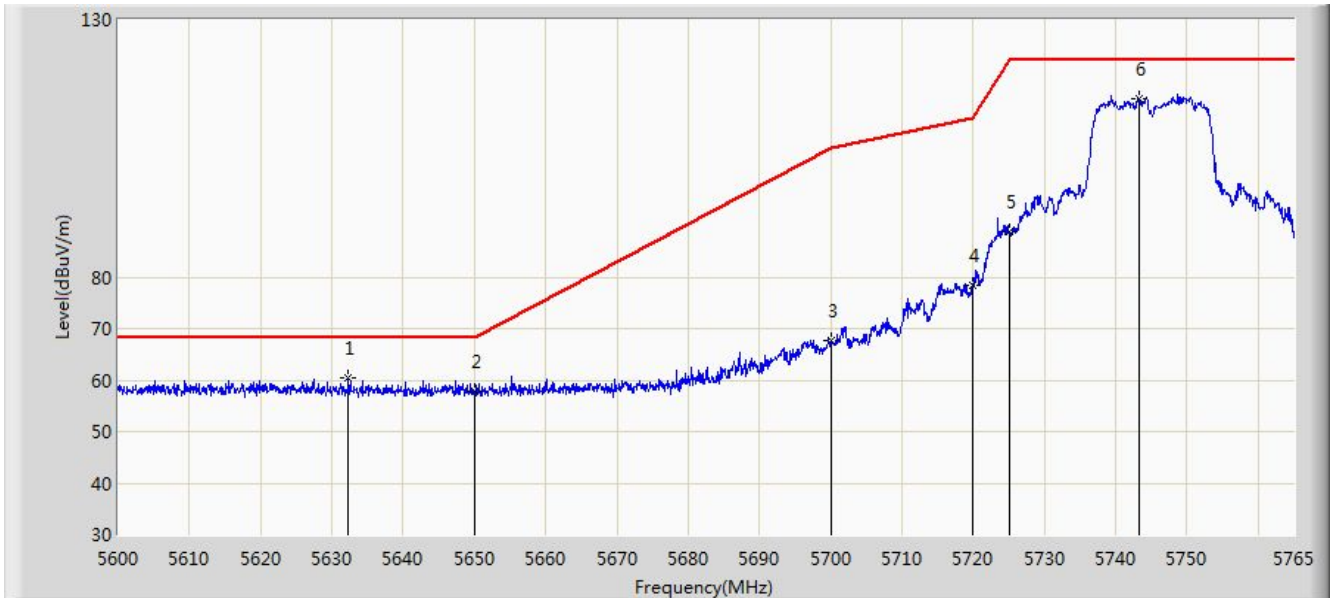


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5632.340	60.312	55.416	-7.888	68.200	4.895	PK
2			5650.000	57.827	52.960	-10.373	68.200	4.867	PK
3			5700.000	67.603	62.384	-37.597	105.200	5.219	PK
4			5720.000	78.470	73.239	-32.330	110.800	5.231	PK
5			5725.000	88.770	83.530	-33.430	122.200	5.241	PK
6		*	5743.303	114.690	109.414	N/A	N/A	5.276	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 00:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz	

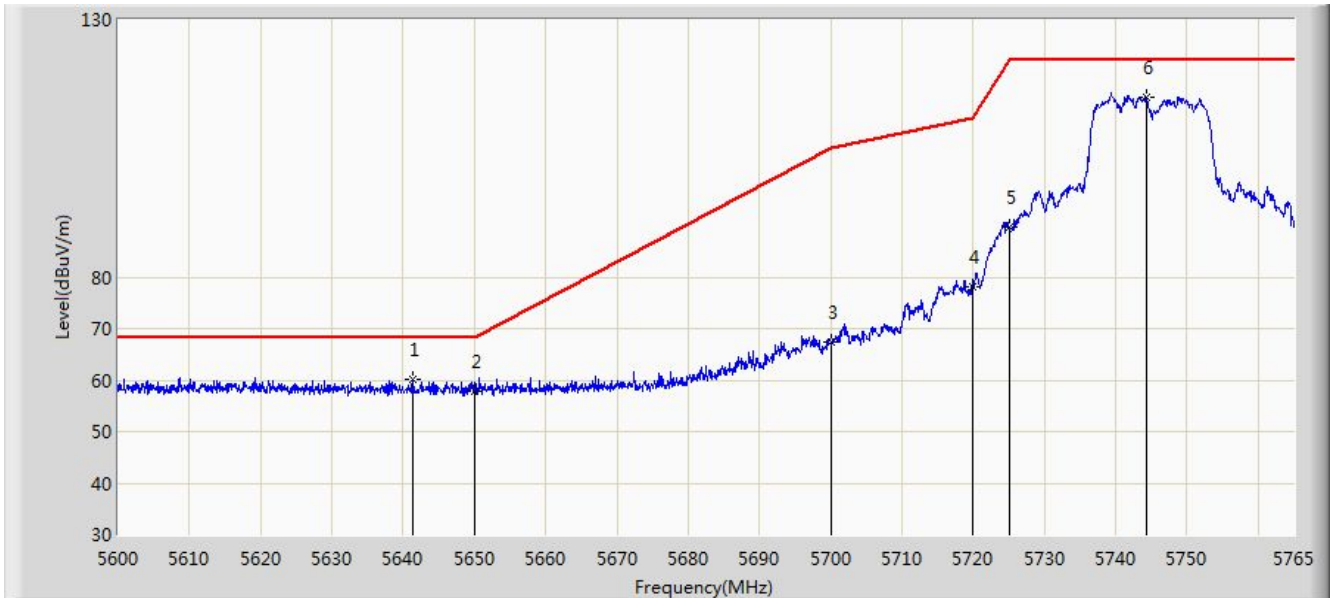


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5641.250	60.068	55.259	-8.132	68.200	4.810	PK
2			5650.000	57.804	52.937	-10.396	68.200	4.867	PK
3			5700.000	67.373	62.154	-37.827	105.200	5.219	PK
4			5720.000	78.246	73.015	-32.554	110.800	5.231	PK
5			5725.000	89.768	84.528	-32.432	122.200	5.241	PK
6		*	5744.375	114.984	109.703	N/A	N/A	5.280	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 00:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz	

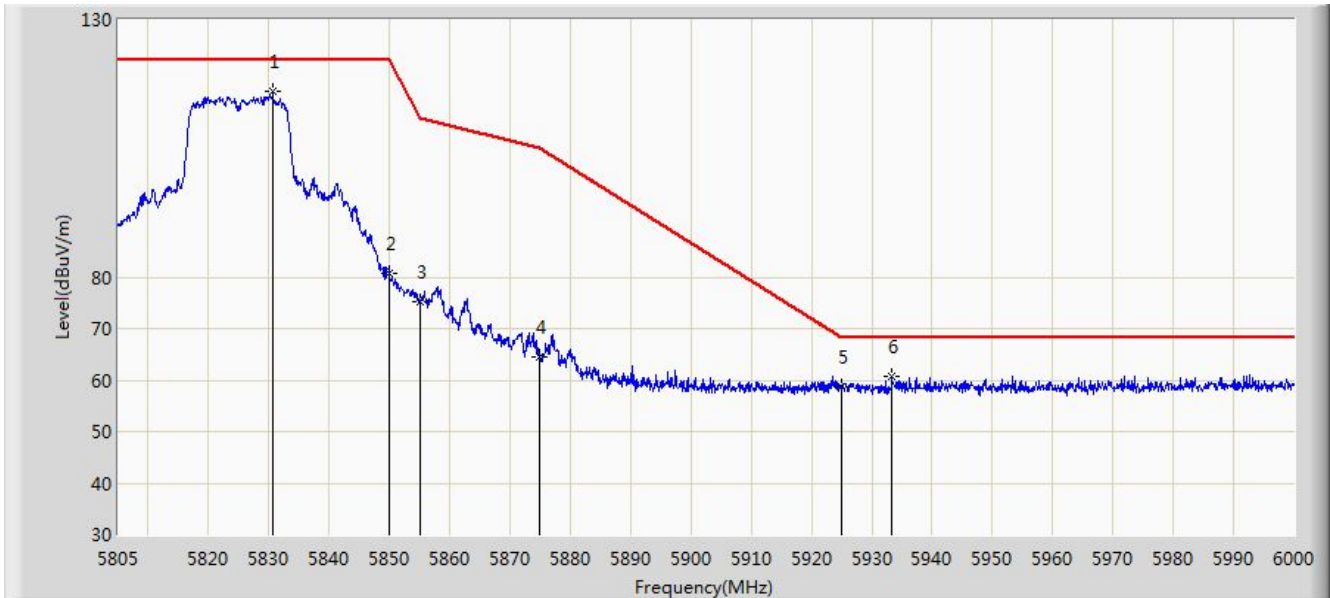


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5830.643	116.039	110.391	N/A	N/A	5.648	PK
2			5850.000	80.625	74.908	-41.575	122.200	5.716	PK
3			5855.000	75.257	69.544	-35.543	110.800	5.713	PK
4			5875.000	64.475	58.795	-40.725	105.200	5.680	PK
5			5925.000	58.579	52.626	-9.621	68.200	5.953	PK
6			5933.310	60.773	54.854	-7.427	68.200	5.919	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 00:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz	

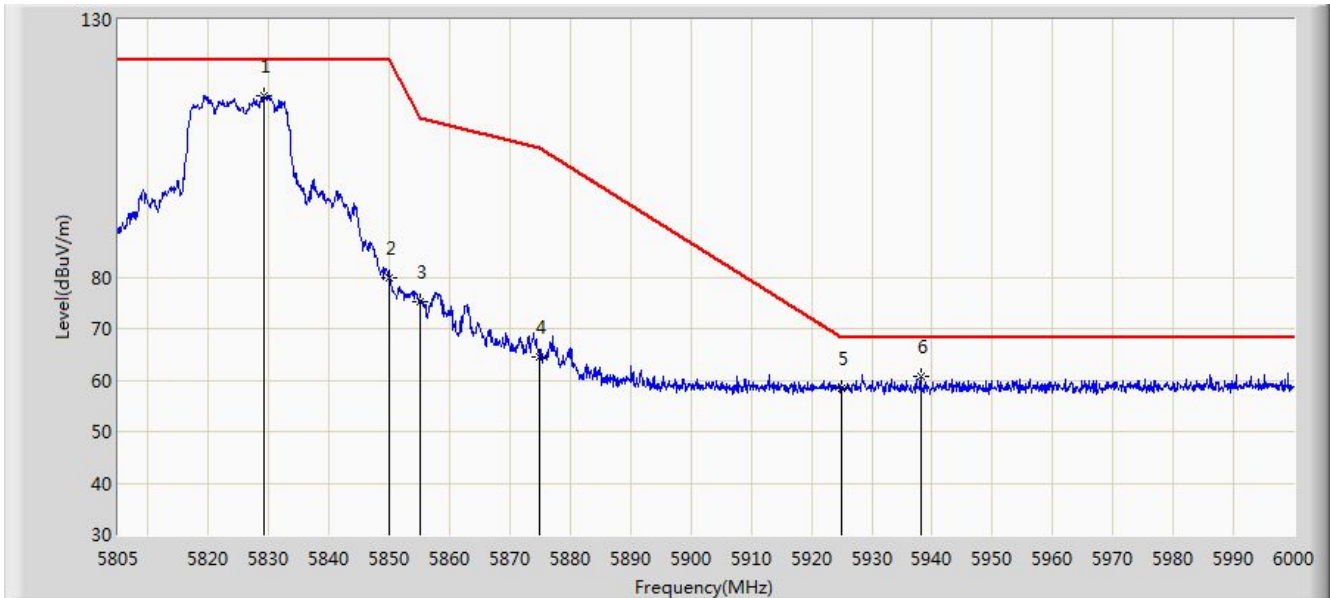


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5829.180	115.123	109.484	N/A	N/A	5.639	PK
2			5850.000	79.814	74.097	-42.386	122.200	5.716	PK
3			5855.000	75.227	69.514	-35.573	110.800	5.713	PK
4			5875.000	64.409	58.729	-40.791	105.200	5.680	PK
5			5925.000	58.427	52.474	-9.773	68.200	5.953	PK
6			5938.087	60.812	54.944	-7.388	68.200	5.867	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/14 - 23:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

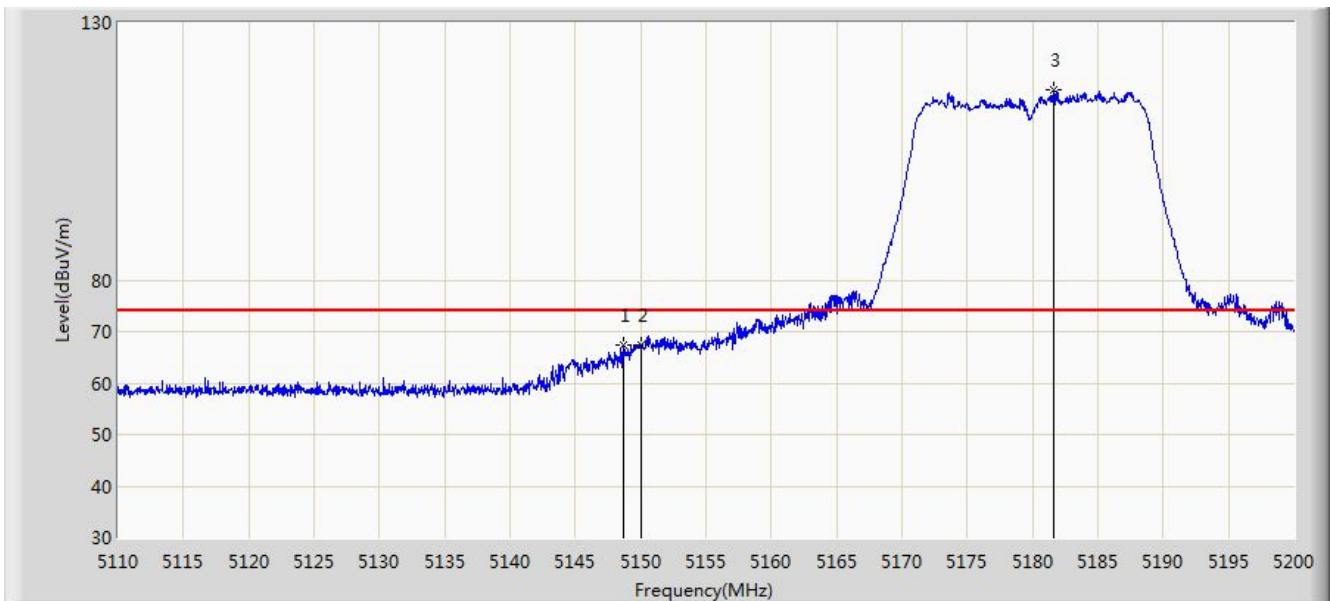


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5148.655	67.258	62.473	-6.742	74.000	4.784	PK
2			5150.000	67.337	62.544	-6.663	74.000	4.793	PK
3		*	5181.595	117.040	112.117	N/A	N/A	4.923	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/14 - 23:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

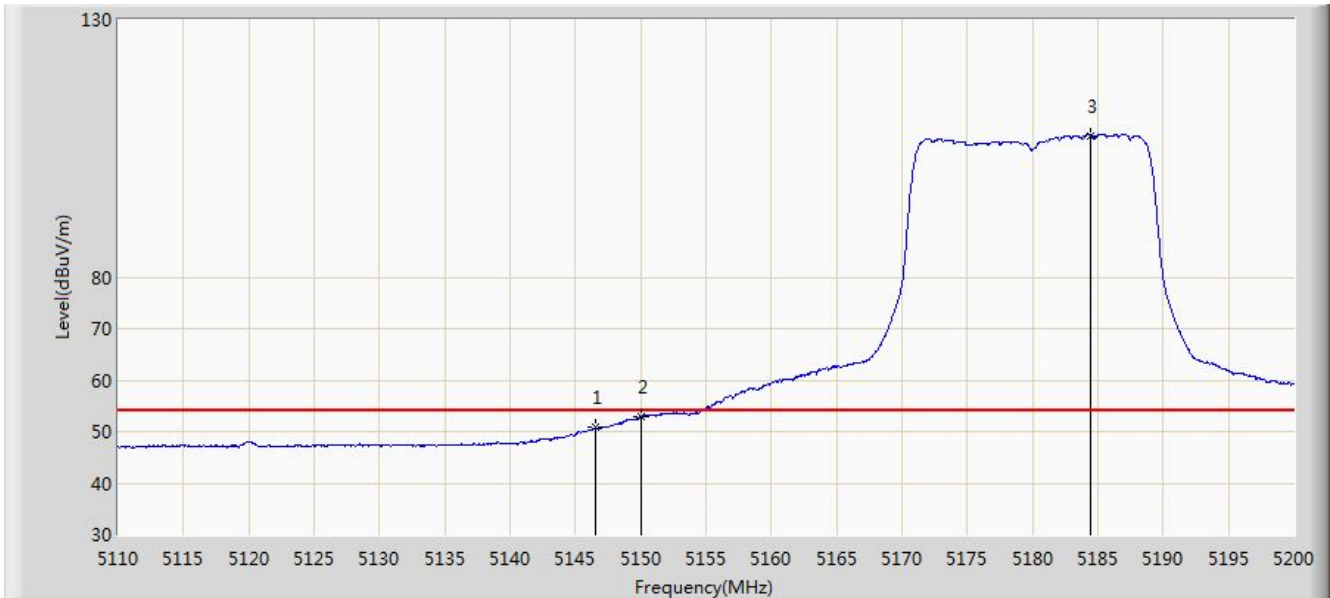


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5146.495	50.880	46.095	-3.120	54.000	4.785	AV
2			5150.000	52.823	48.030	-1.177	54.000	4.793	AV
3		*	5184.430	107.511	102.608	N/A	N/A	4.903	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/14 - 23:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

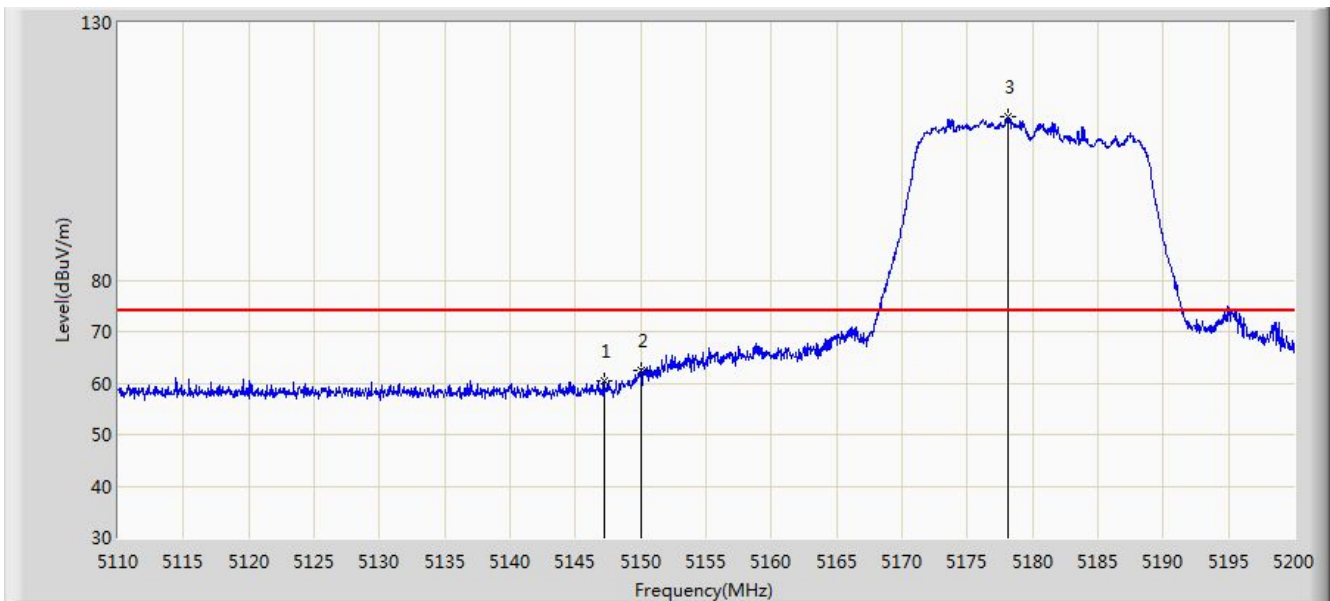


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5147.170	60.476	55.693	-13.524	74.000	4.783	PK
2			5150.000	62.608	57.815	-11.392	74.000	4.793	PK
3		*	5178.175	111.655	106.723	N/A	N/A	4.933	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/14 - 23:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

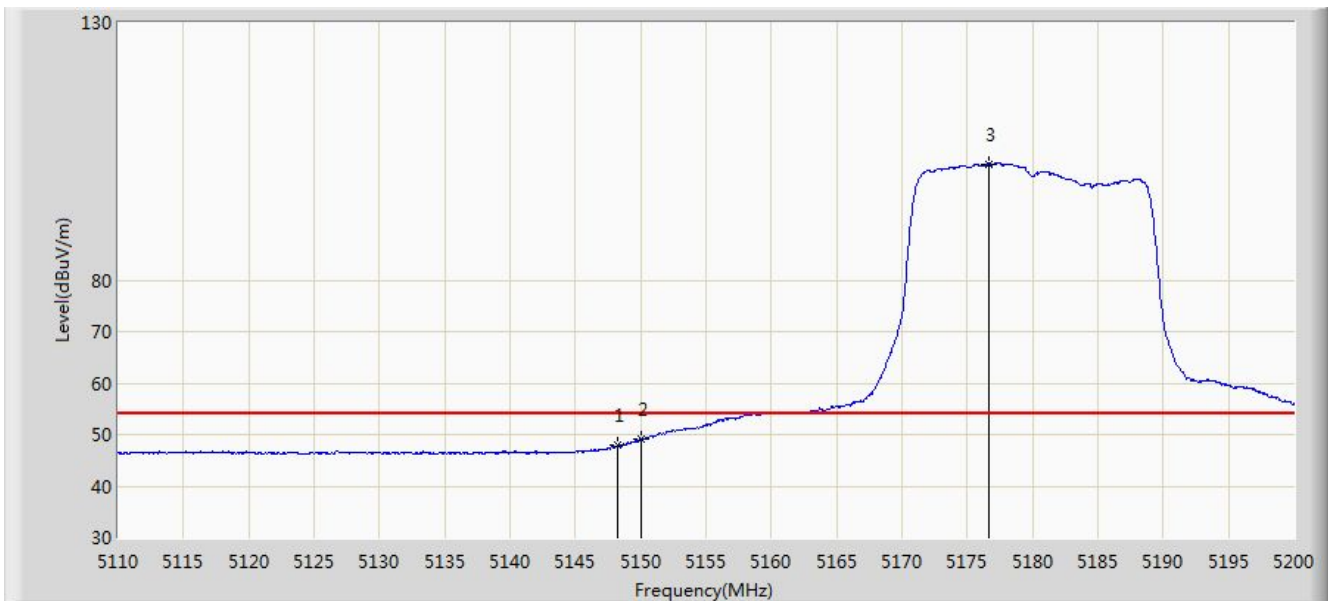


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5148.250	47.880	43.098	-6.120	54.000	4.783	AV
2			5150.000	49.074	44.281	-4.926	54.000	4.793	AV
3		*	5176.600	102.593	97.657	N/A	N/A	4.936	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/14 - 23:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

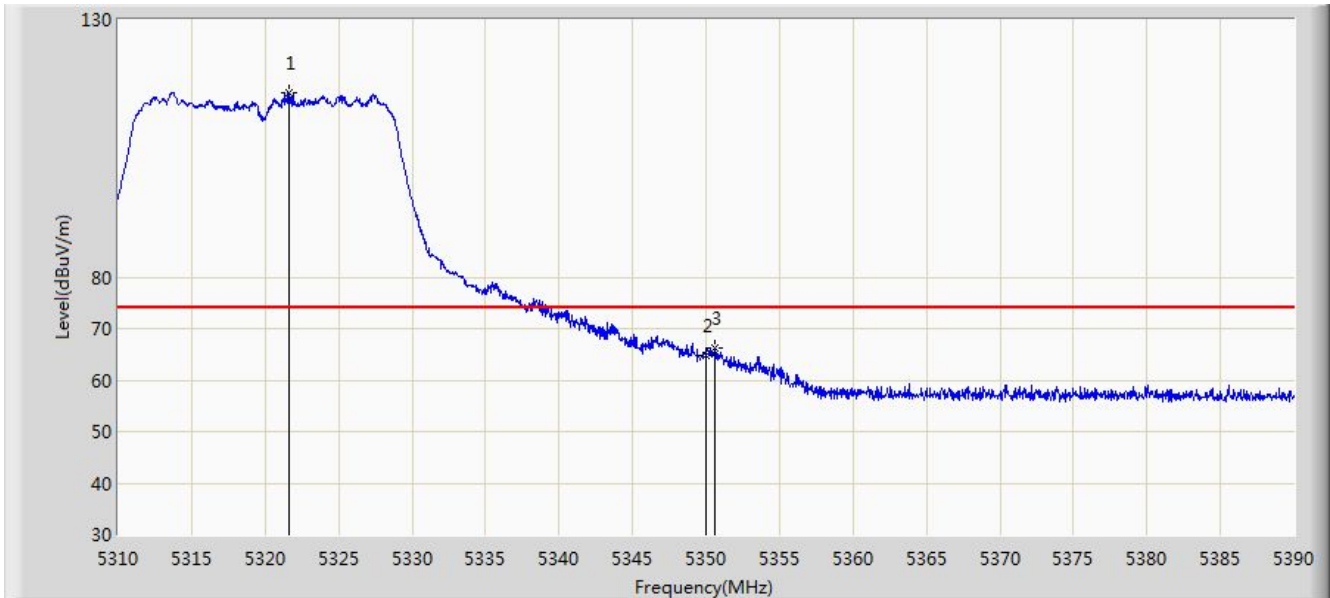


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5321.640	115.914	111.236	N/A	N/A	4.677	PK
2			5350.000	64.859	60.002	-9.141	74.000	4.857	PK
3			5350.640	66.102	61.242	-7.898	74.000	4.861	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/14 - 23:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

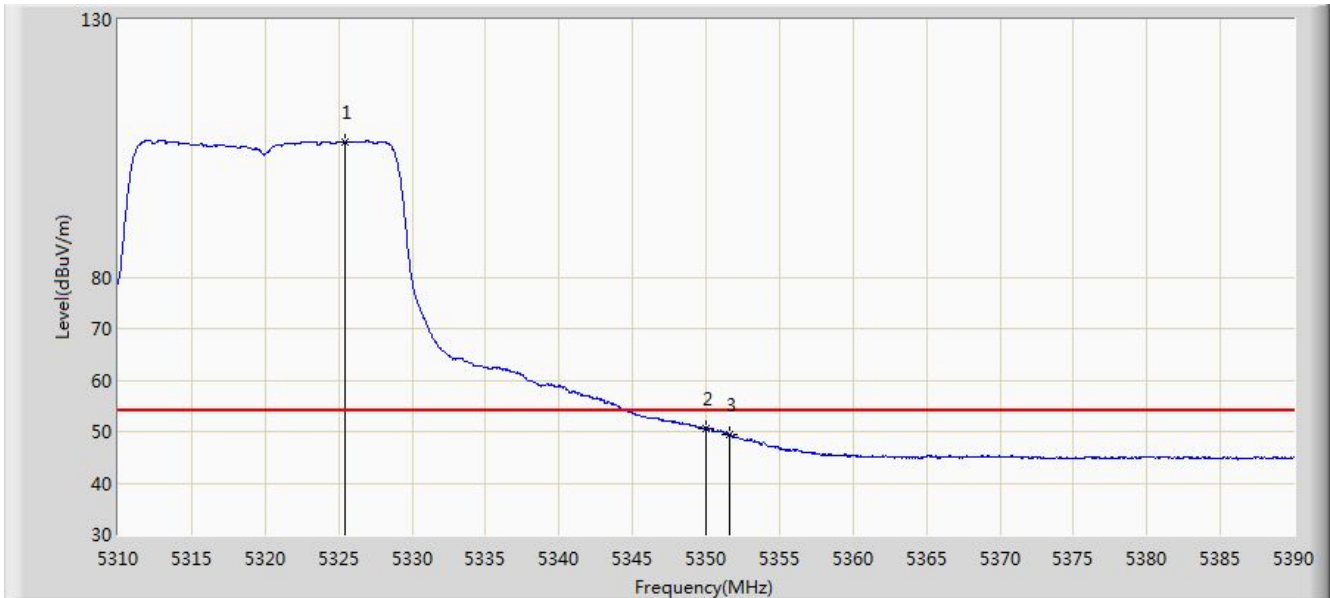


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5325.400	106.296	101.604	N/A	N/A	4.693	AV
2			5350.000	50.648	45.791	-3.352	54.000	4.857	AV
3			5351.640	49.490	44.625	-4.510	54.000	4.865	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/14 - 23:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

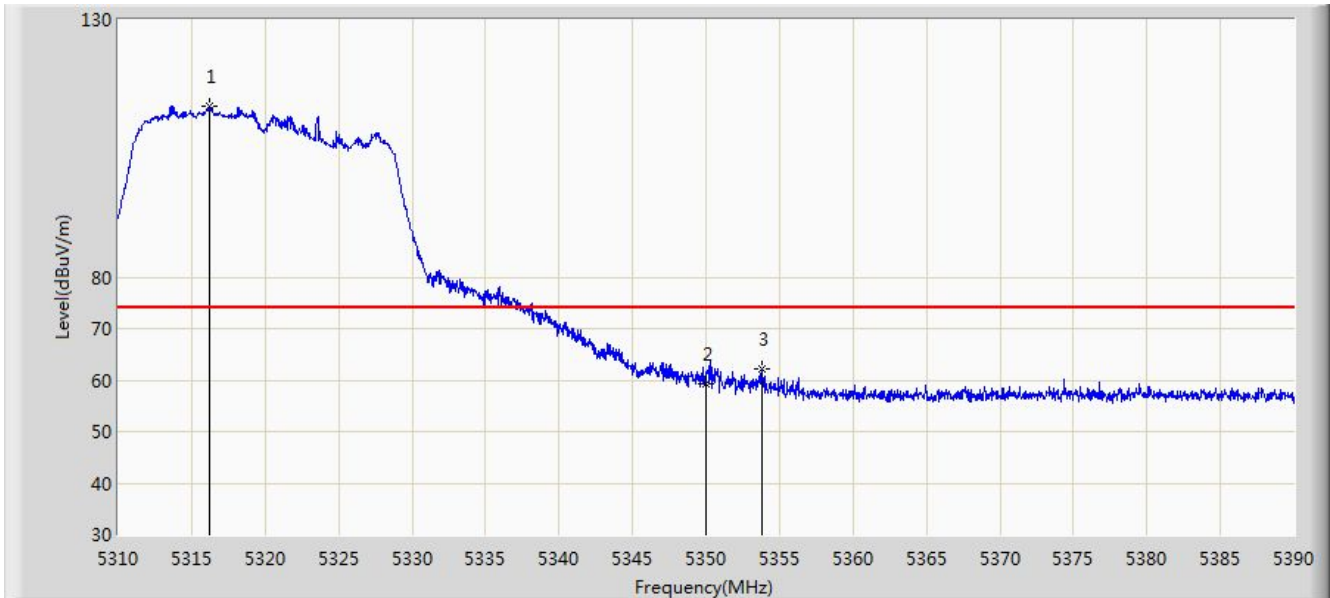


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5316.240	113.141	108.473	N/A	N/A	4.667	PK
2			5350.000	59.284	54.427	-14.716	74.000	4.857	PK
3			5353.760	62.272	57.418	-11.728	74.000	4.854	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/14 - 23:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

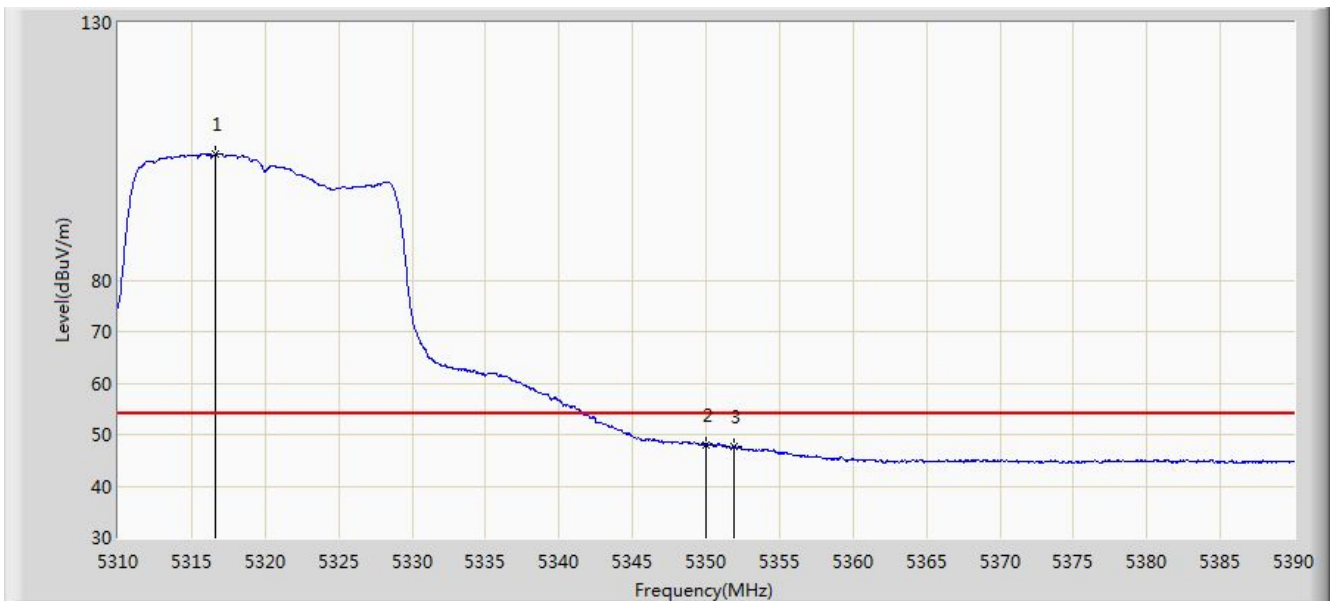


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5316.600	104.421	99.754	N/A	N/A	4.667	AV
2			5350.000	48.040	43.183	-5.960	54.000	4.857	AV
3			5351.920	47.609	42.742	-6.391	54.000	4.867	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/14 - 23:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

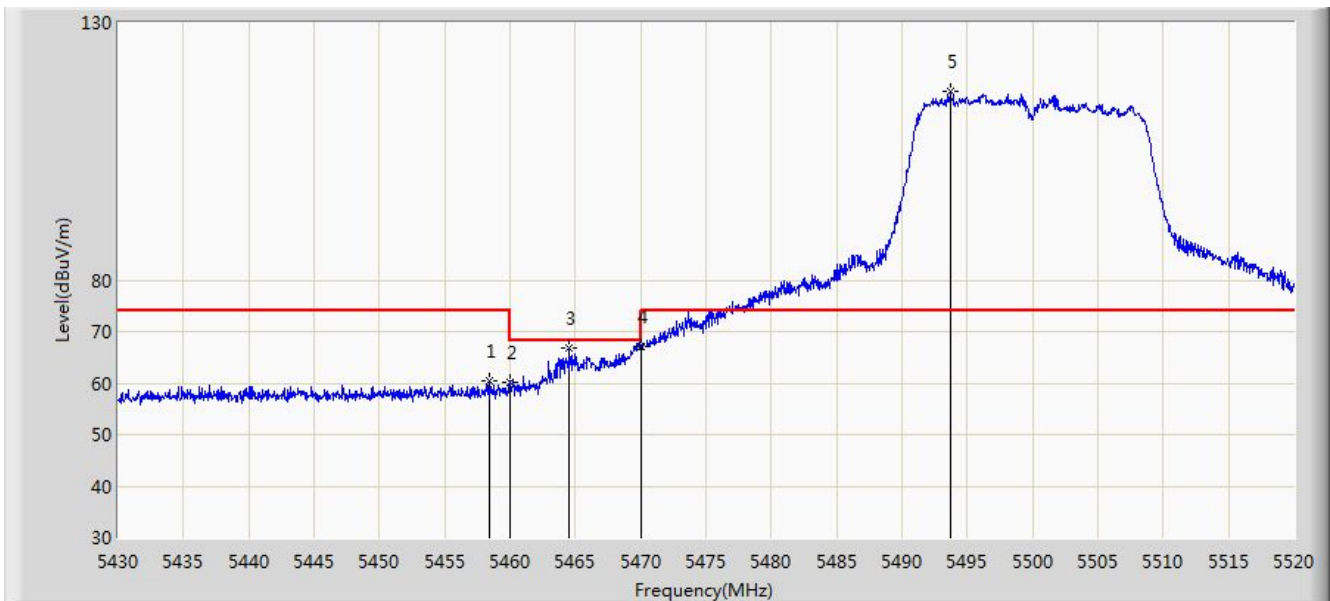


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5458.395	60.357	55.635	-13.643	74.000	4.722	PK
2			5460.000	60.173	55.461	-13.827	74.000	4.711	PK
3			5464.560	66.753	62.072	-1.447	68.200	4.681	PK
4			5470.000	67.020	62.376	-1.180	68.200	4.644	PK
5		*	5493.675	116.703	112.004	N/A	N/A	4.699	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/14 - 23:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

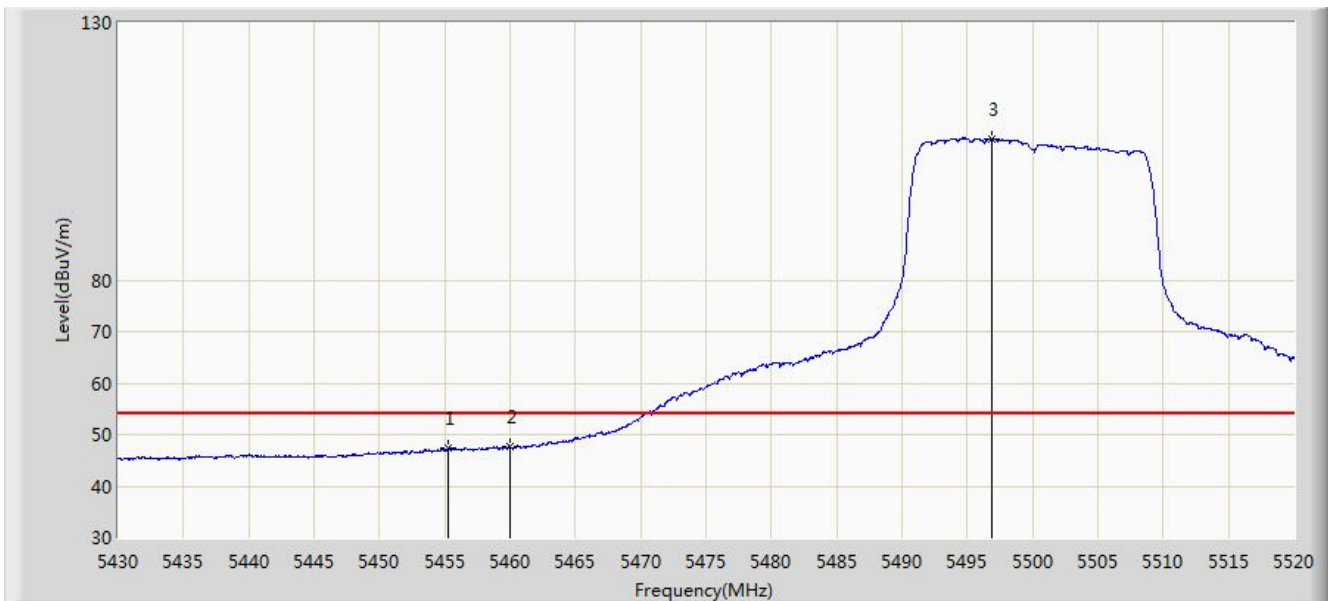


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5455.290	47.270	42.525	-6.730	54.000	4.746	AV
2			5460.000	47.598	42.886	-6.402	54.000	4.711	AV
3		*	5496.870	107.500	102.755	N/A	N/A	4.745	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/14 - 23:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

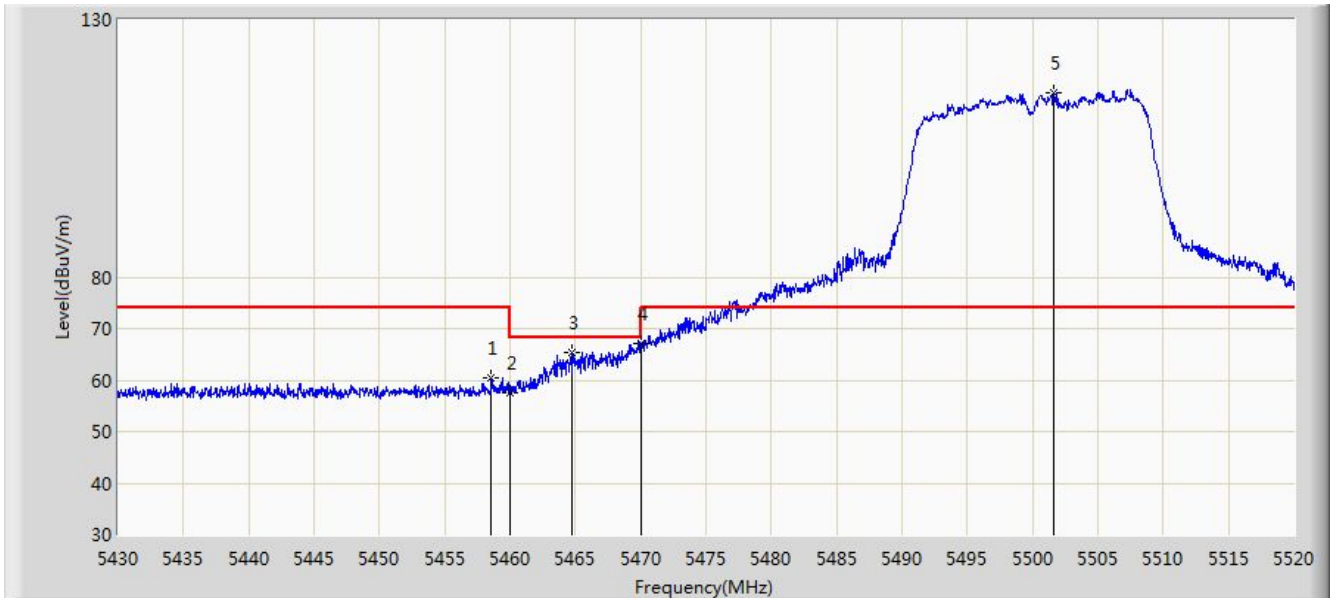


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5458.575	60.520	55.799	-13.480	74.000	4.721	PK
2			5460.000	57.473	52.761	-16.527	74.000	4.711	PK
3			5464.695	65.312	60.632	-2.888	68.200	4.680	PK
4			5470.000	67.060	62.416	-1.140	68.200	4.644	PK
5		*	5501.595	115.690	110.877	N/A	N/A	4.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/14 - 23:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

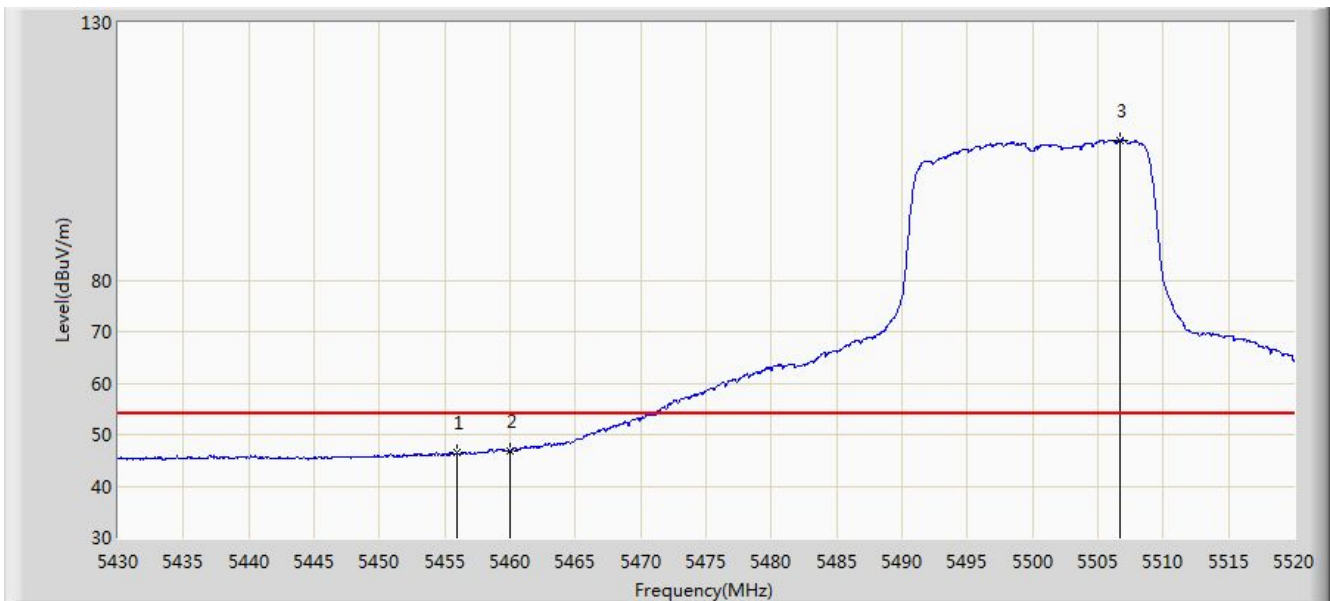


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5455.965	46.381	41.641	-7.619	54.000	4.740	AV
2			5460.000	46.825	42.113	-7.175	54.000	4.711	AV
3		*	5506.680	107.175	102.300	N/A	N/A	4.875	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 00:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

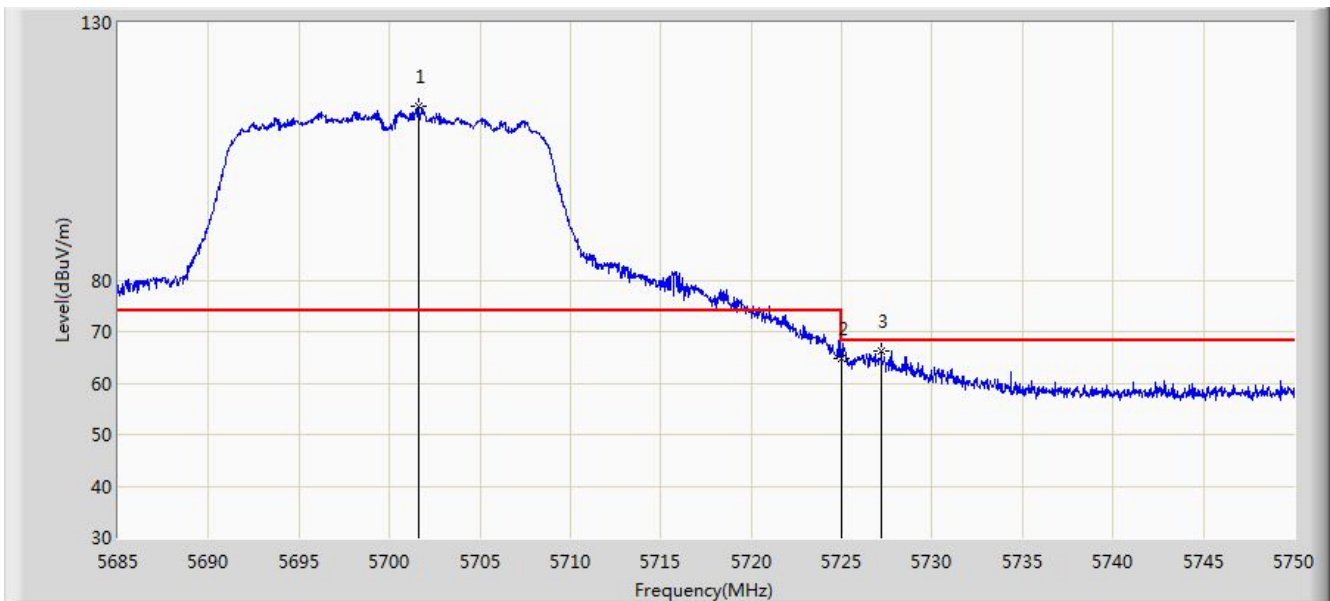


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5701.607	113.801	108.584	N/A	N/A	5.216	PK
2			5725.000	64.669	59.429	-3.531	68.200	5.241	PK
3			5727.185	66.355	61.105	-1.845	68.200	5.250	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 00:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

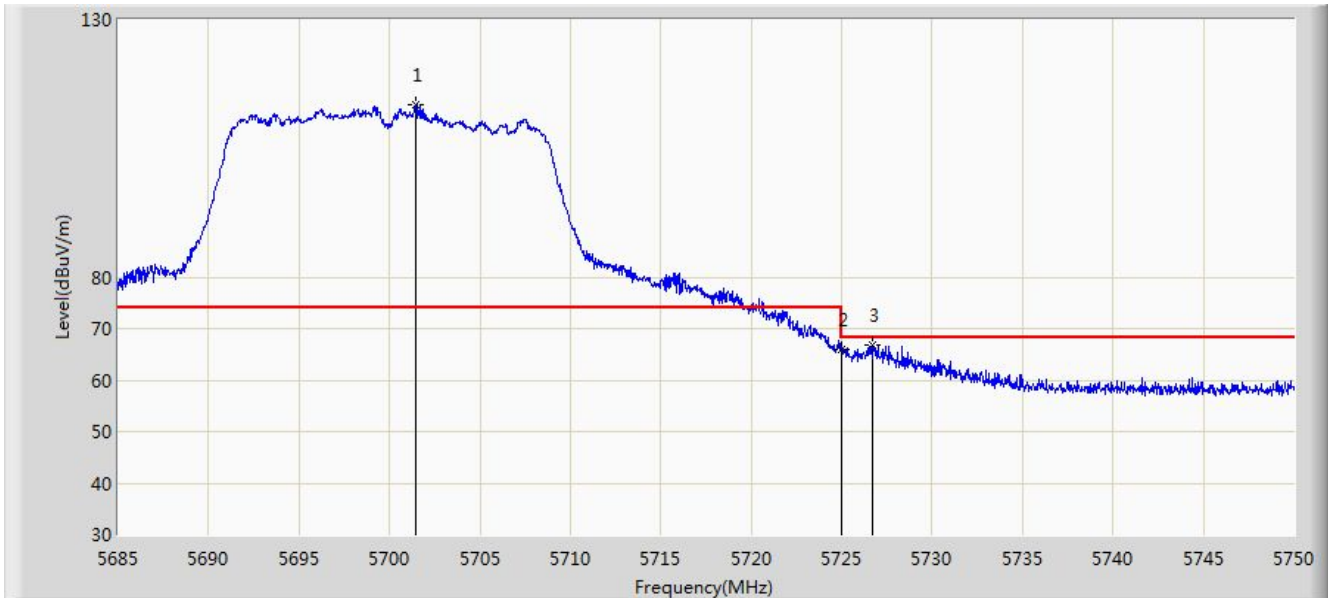


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5701.478	113.429	108.212	N/A	N/A	5.217	PK
2			5725.000	65.957	60.717	-2.243	68.200	5.241	PK
3			5726.730	66.843	61.594	-1.357	68.200	5.250	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 00:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

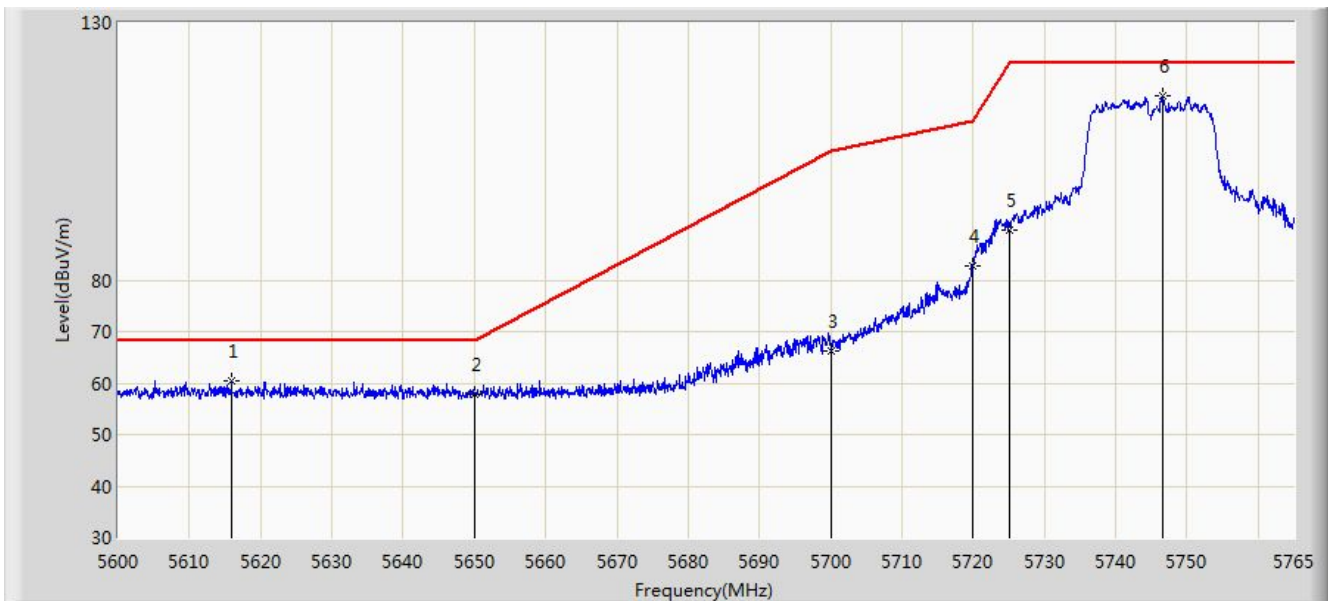


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5615.922	60.320	55.254	-7.880	68.200	5.067	PK
2			5650.000	57.969	53.102	-10.231	68.200	4.867	PK
3			5700.000	66.277	61.058	-38.923	105.200	5.219	PK
4			5720.000	82.897	77.666	-27.903	110.800	5.231	PK
5			5725.000	89.730	84.490	-32.470	122.200	5.241	PK
6		*	5746.603	115.727	110.418	N/A	N/A	5.308	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 00:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

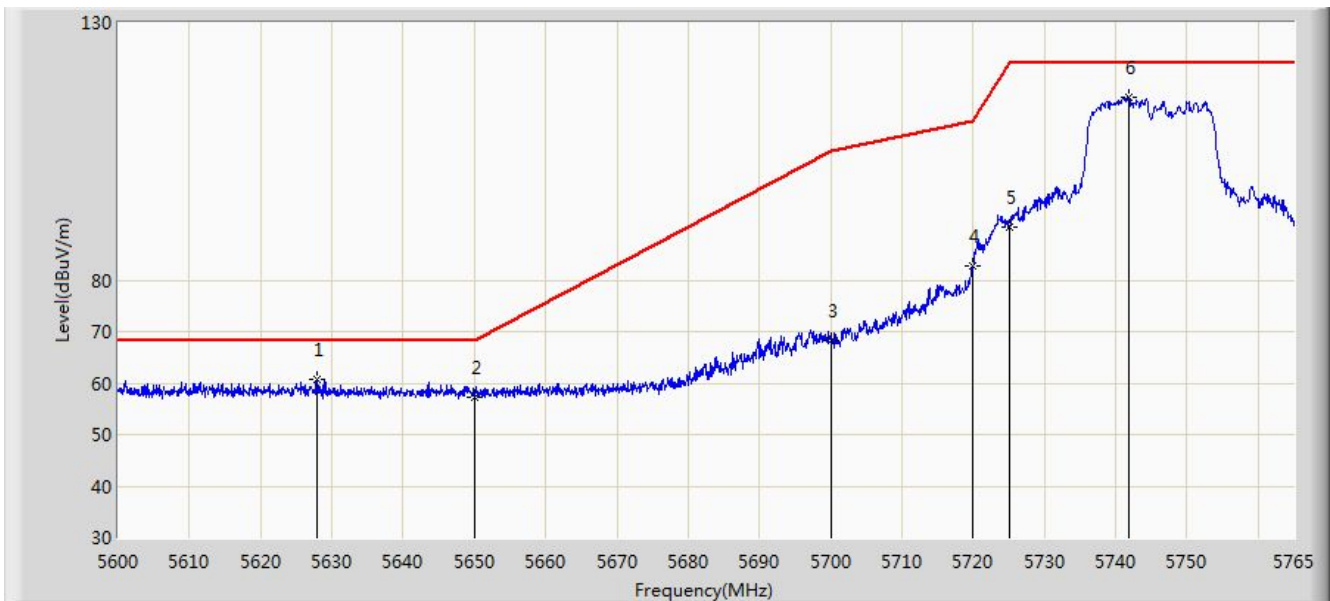


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5627.885	60.624	55.660	-7.576	68.200	4.964	PK
2			5650.000	57.322	52.455	-10.878	68.200	4.867	PK
3			5700.000	68.367	63.148	-36.833	105.200	5.219	PK
4			5720.000	82.768	77.537	-28.032	110.800	5.231	PK
5			5725.000	90.176	84.936	-32.024	122.200	5.241	PK
6		*	5741.900	115.392	110.119	N/A	N/A	5.274	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 00:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

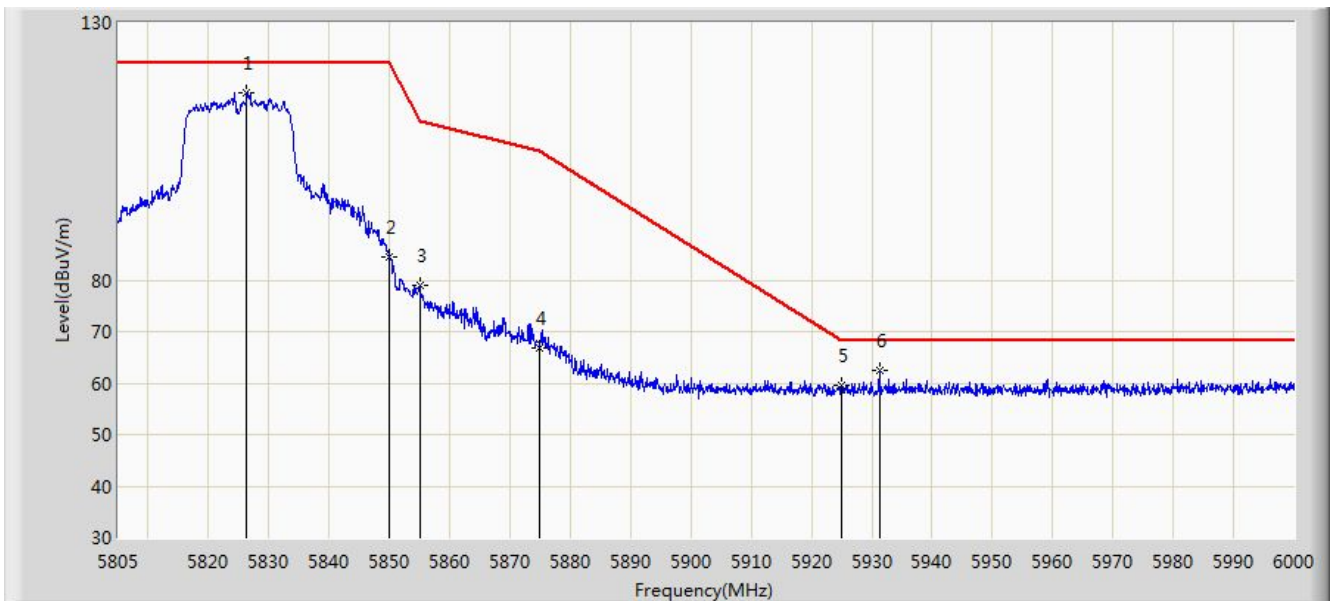


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5826.353	116.431	110.808	N/A	N/A	5.623	PK
2			5850.000	84.479	78.762	-37.721	122.200	5.716	PK
3			5855.000	79.005	73.292	-31.795	110.800	5.713	PK
4			5875.000	66.850	61.170	-38.350	105.200	5.680	PK
5			5925.000	59.479	53.526	-8.721	68.200	5.953	PK
6		*	5931.263	62.569	56.628	-5.631	68.200	5.941	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 00:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

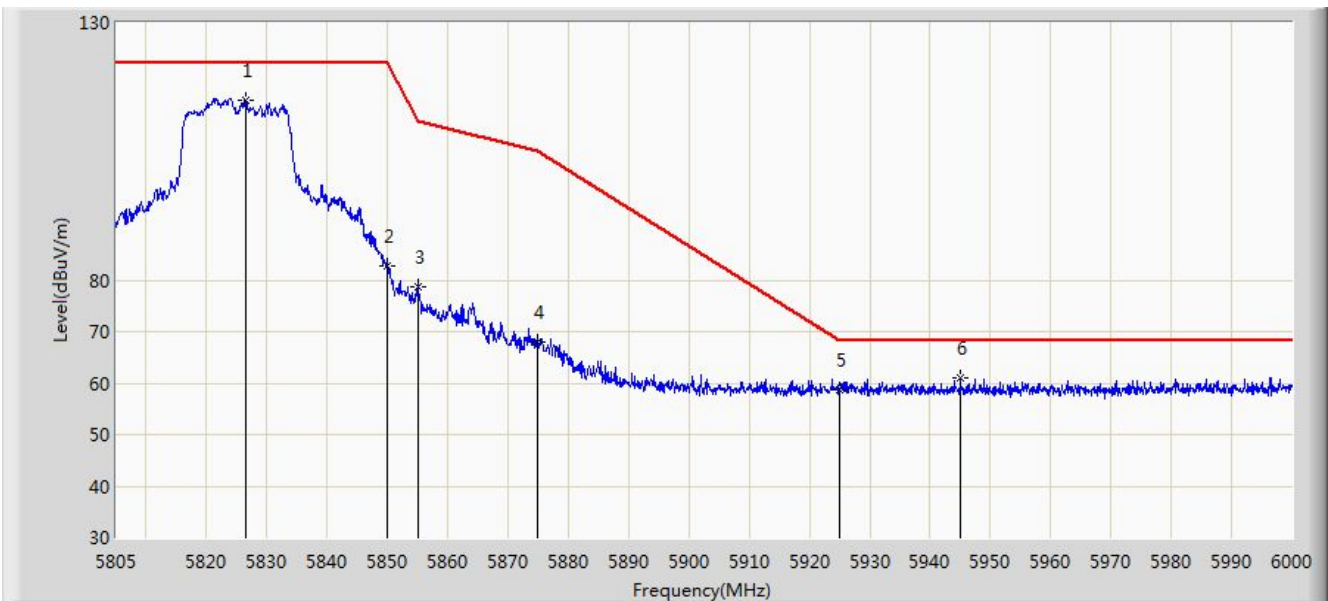


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5826.547	114.972	109.348	N/A	N/A	5.624	PK
2			5850.000	82.698	76.981	-39.502	122.200	5.716	PK
3			5855.000	78.814	73.101	-31.986	110.800	5.713	PK
4			5875.000	68.086	62.406	-37.114	105.200	5.680	PK
5			5925.000	58.662	52.709	-9.538	68.200	5.953	PK
6		*	5945.010	61.159	55.350	-7.041	68.200	5.809	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 00:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

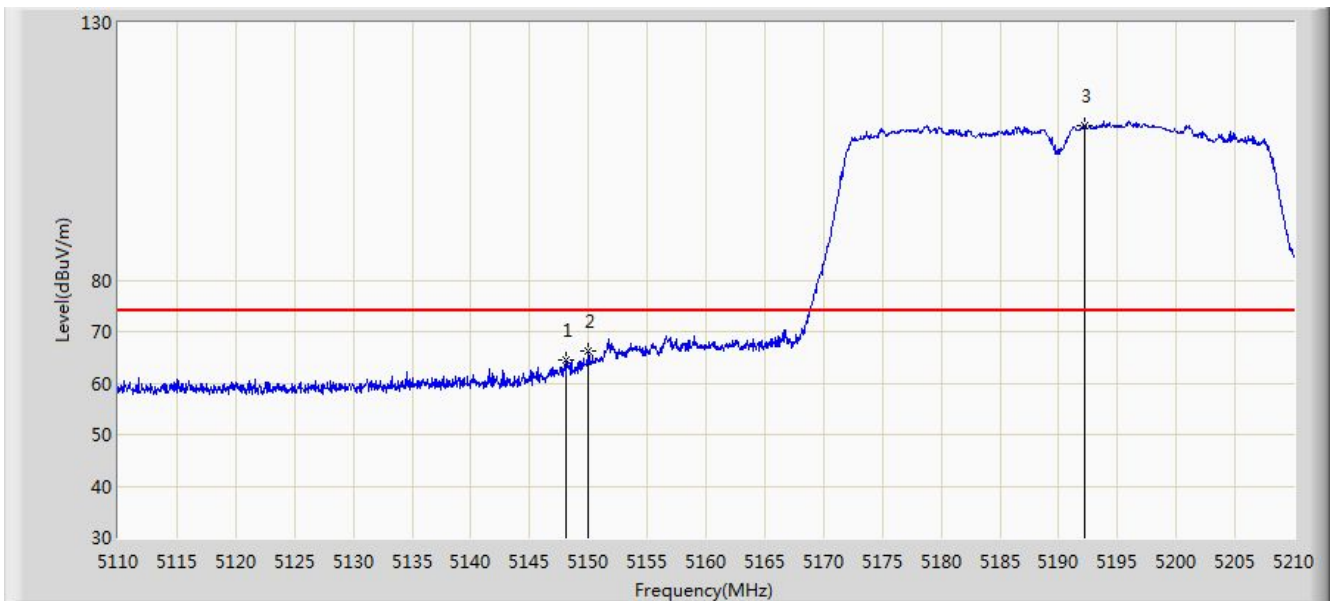


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5148.050	64.439	59.658	-9.561	74.000	4.781	PK
2			5150.000	66.117	61.324	-7.883	74.000	4.793	PK
3		*	5192.200	110.103	105.204	N/A	N/A	4.898	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 00:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

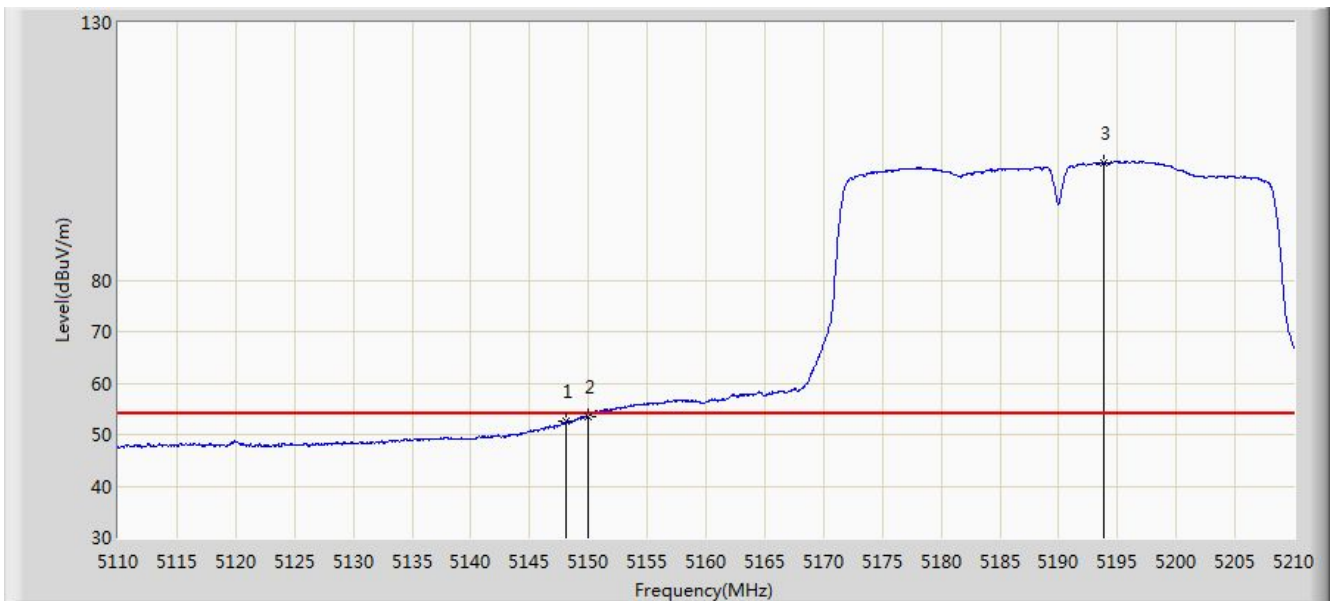


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5148.100	52.593	47.812	-1.407	54.000	4.782	AV
2			5150.000	53.612	48.819	-0.388	54.000	4.793	AV
3		*	5193.850	102.865	97.960	N/A	N/A	4.905	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 00:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

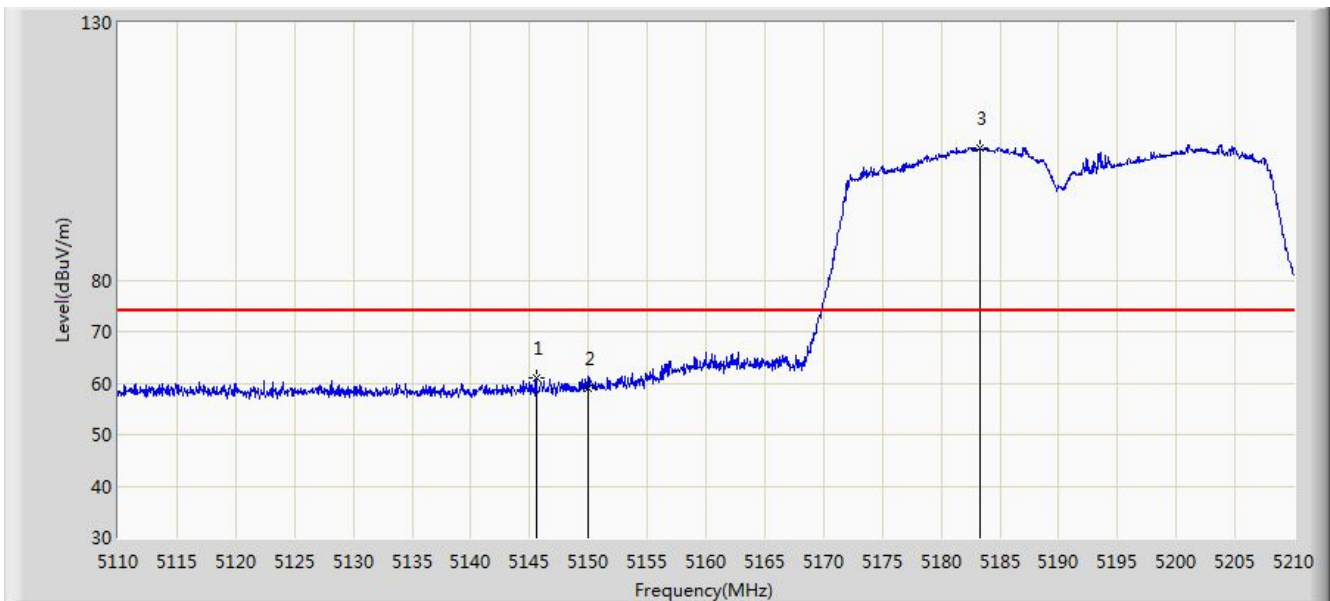


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5145.550	61.091	56.303	-12.909	74.000	4.788	PK
2			5150.000	59.108	54.315	-14.892	74.000	4.793	PK
3		*	5183.300	105.751	100.839	N/A	N/A	4.911	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 00:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

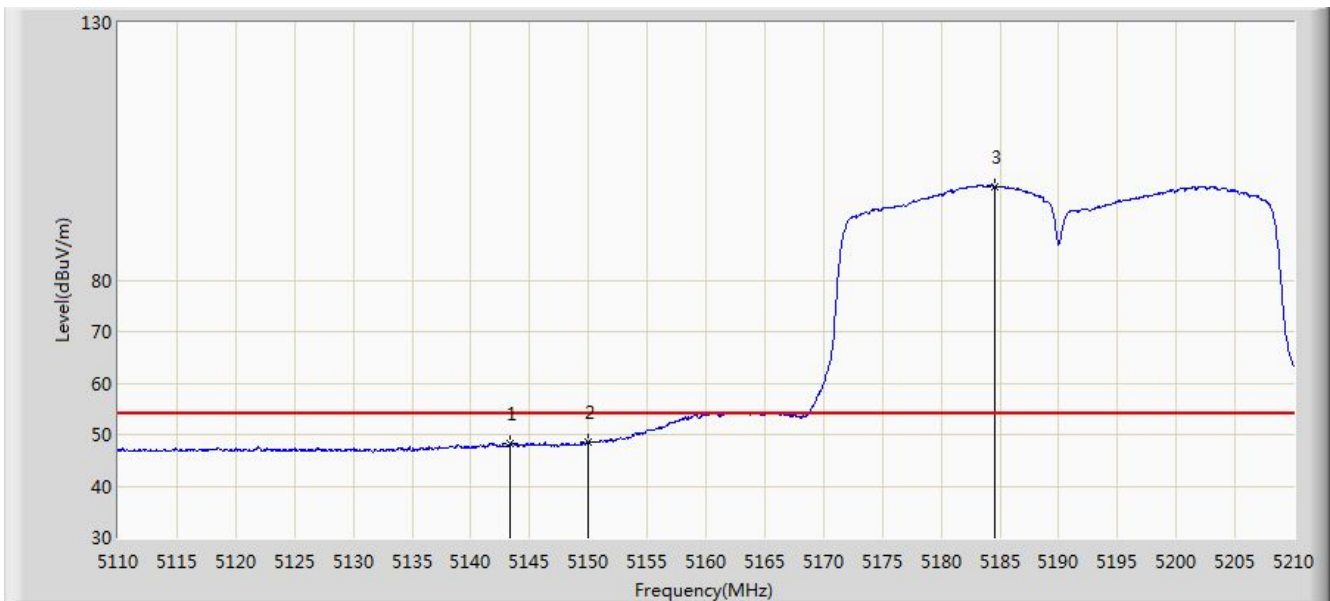


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5143.350	48.177	43.383	-5.823	54.000	4.794	AV
2			5150.000	48.523	43.730	-5.477	54.000	4.793	AV
3		*	5184.550	98.176	93.274	N/A	N/A	4.902	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 01:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

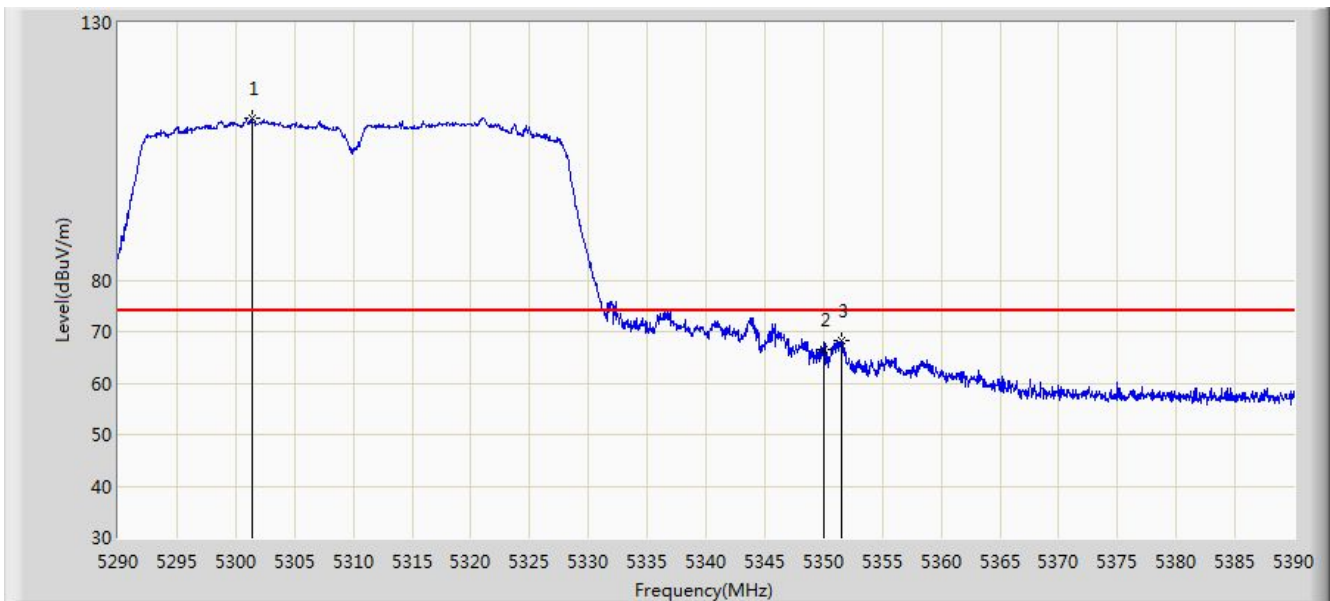


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5301.350	111.330	106.711	N/A	N/A	4.619	PK
2			5350.000	66.581	61.724	-7.419	74.000	4.857	PK
3			5351.500	68.343	63.478	-5.657	74.000	4.864	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 01:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

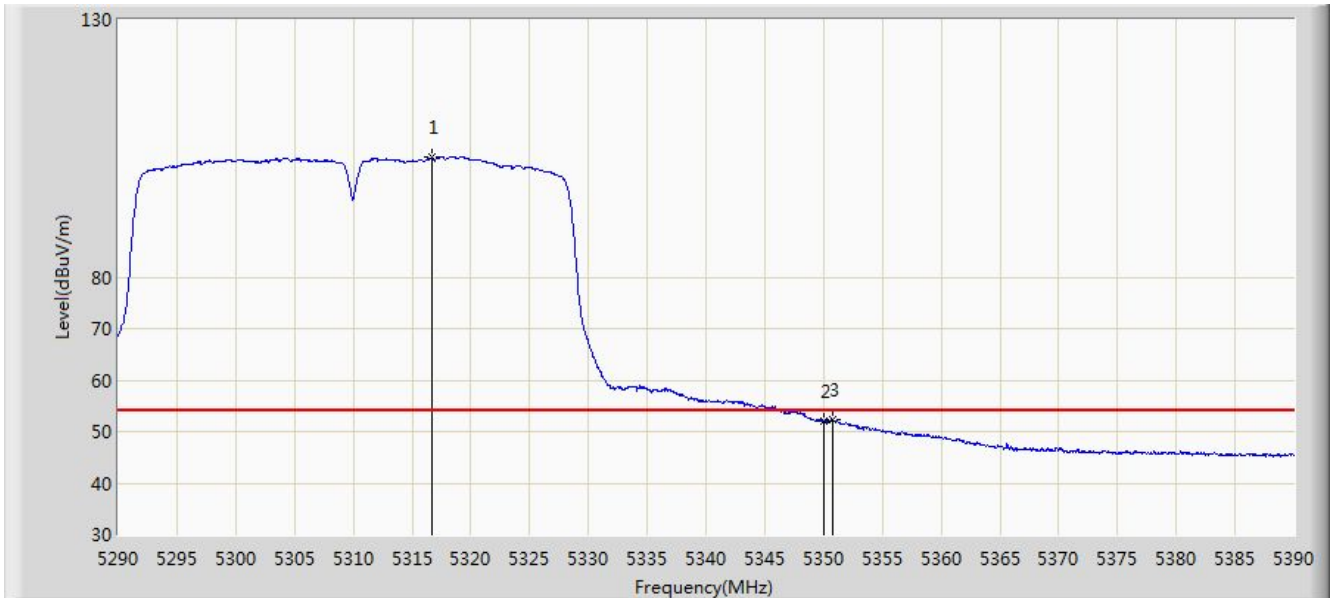


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5316.750	103.206	98.539	N/A	N/A	4.667	AV
2			5350.000	52.043	47.186	-1.957	54.000	4.857	AV
3			5350.800	52.258	47.397	-1.742	54.000	4.862	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 01:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

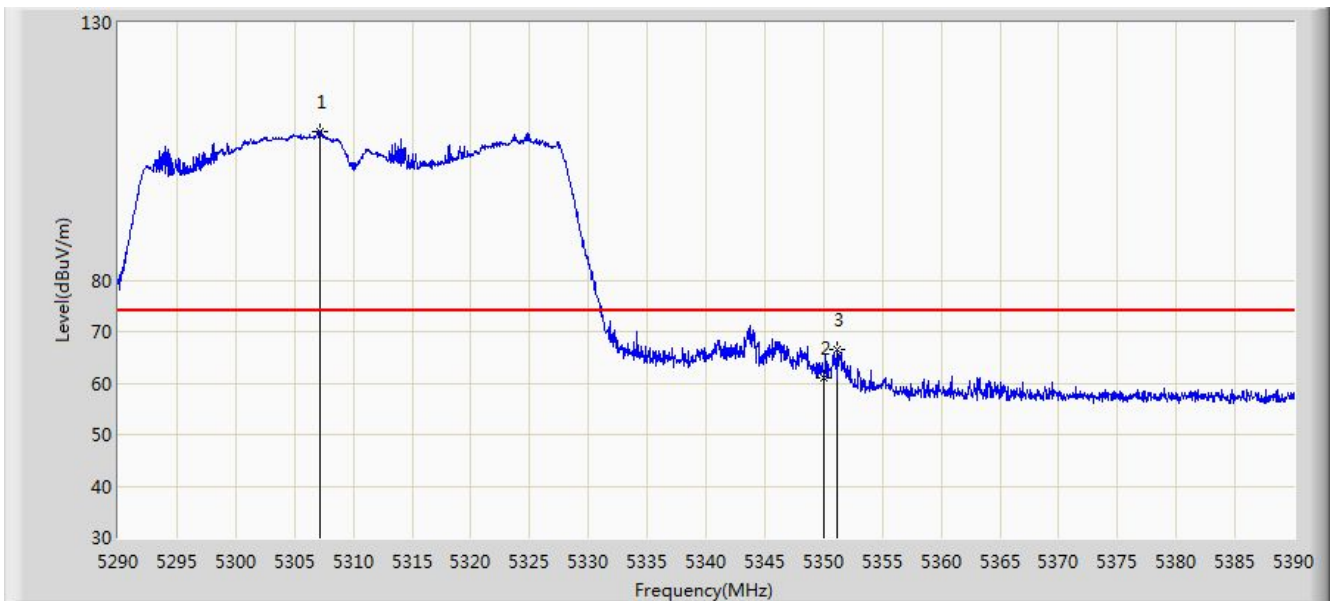


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5307.200	108.733	104.087	N/A	N/A	4.646	PK
2			5350.000	61.097	56.240	-12.903	74.000	4.857	PK
3			5351.100	66.543	61.680	-7.457	74.000	4.863	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 01:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

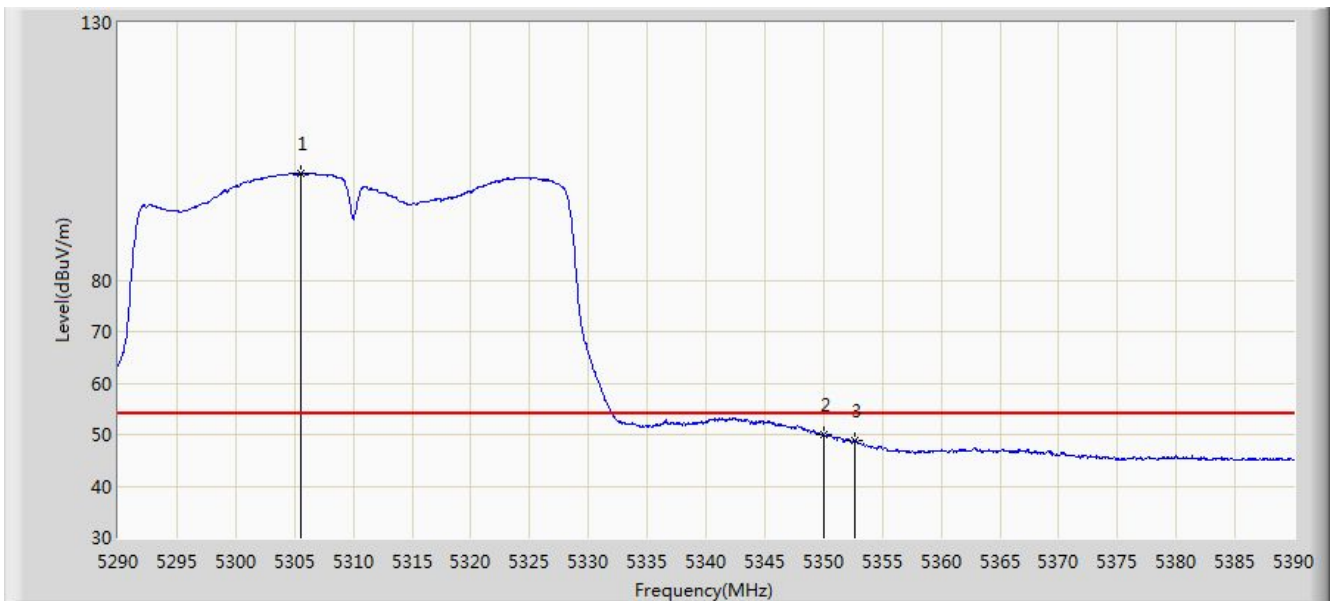


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5305.500	100.726	96.088	N/A	N/A	4.638	AV
2			5350.000	49.985	45.128	-4.015	54.000	4.857	AV
3			5352.600	48.978	44.115	-5.022	54.000	4.863	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 19:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

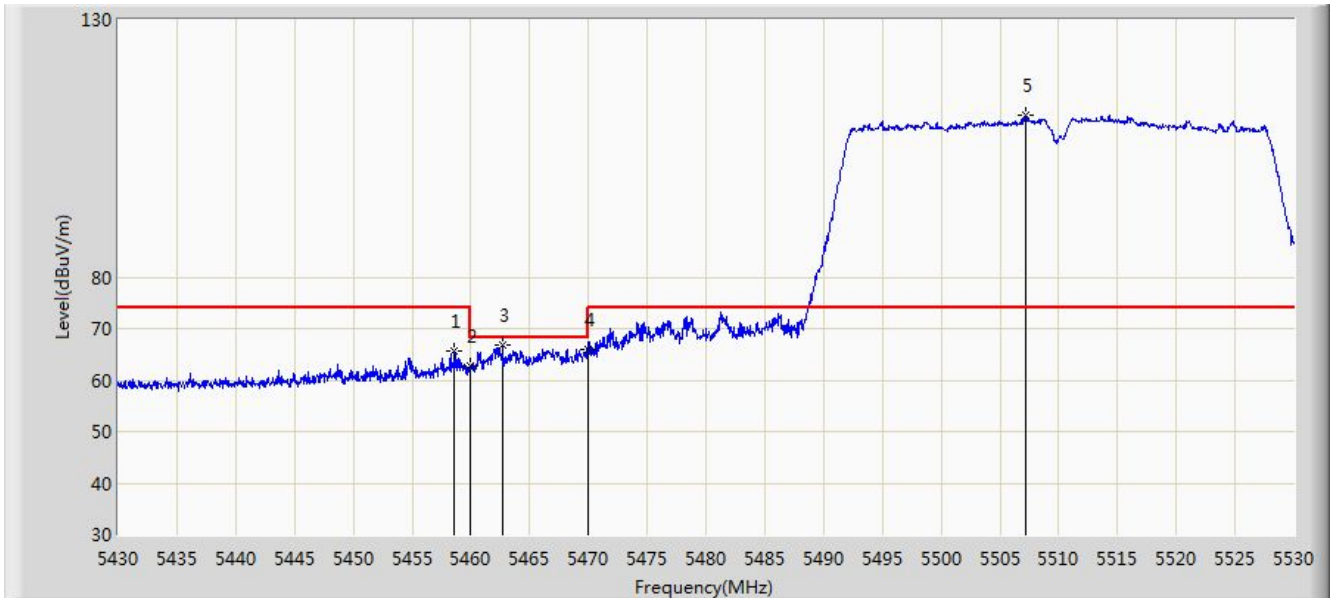


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5458.600	65.749	61.028	-8.251	74.000	4.721	PK
2			5460.000	62.643	57.931	-11.357	74.000	4.711	PK
3			5462.700	66.841	62.148	-1.359	68.200	4.694	PK
4			5470.000	65.872	61.228	-2.328	68.200	4.644	PK
5		*	5507.150	111.438	106.560	N/A	N/A	4.877	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 19:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

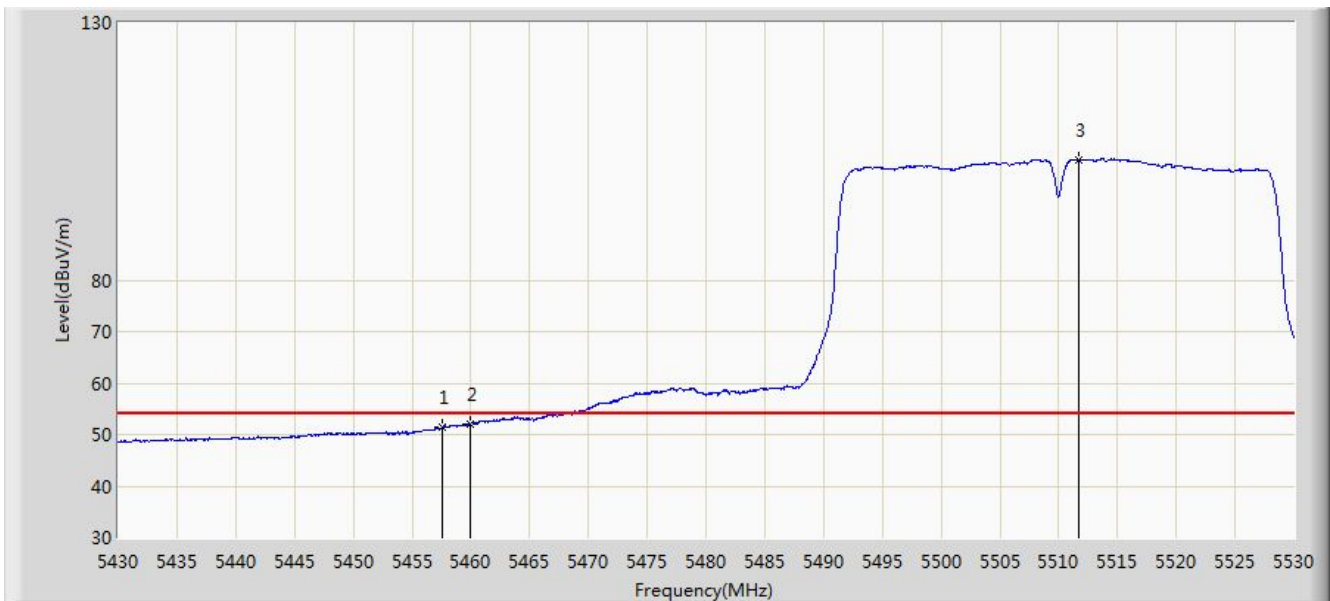


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5457.550	51.446	46.718	-2.554	54.000	4.728	AV
2			5460.000	52.006	47.294	-1.994	54.000	4.711	AV
3		*	5511.750	103.300	98.392	N/A	N/A	4.908	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 19:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

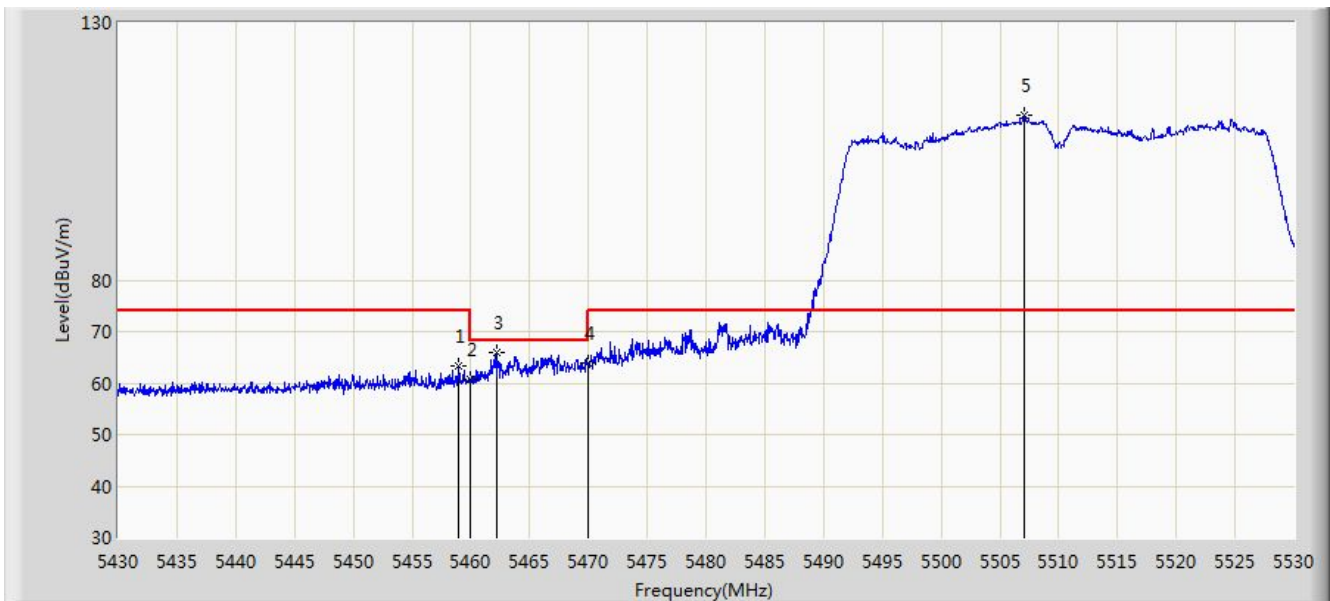


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5458.900	63.406	58.687	-10.594	74.000	4.719	PK
2			5460.000	60.604	55.892	-13.396	74.000	4.711	PK
3			5462.150	65.883	61.186	-2.317	68.200	4.697	PK
4			5470.000	63.782	59.138	-4.418	68.200	4.644	PK
5		*	5507.050	112.031	107.154	N/A	N/A	4.877	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 19:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

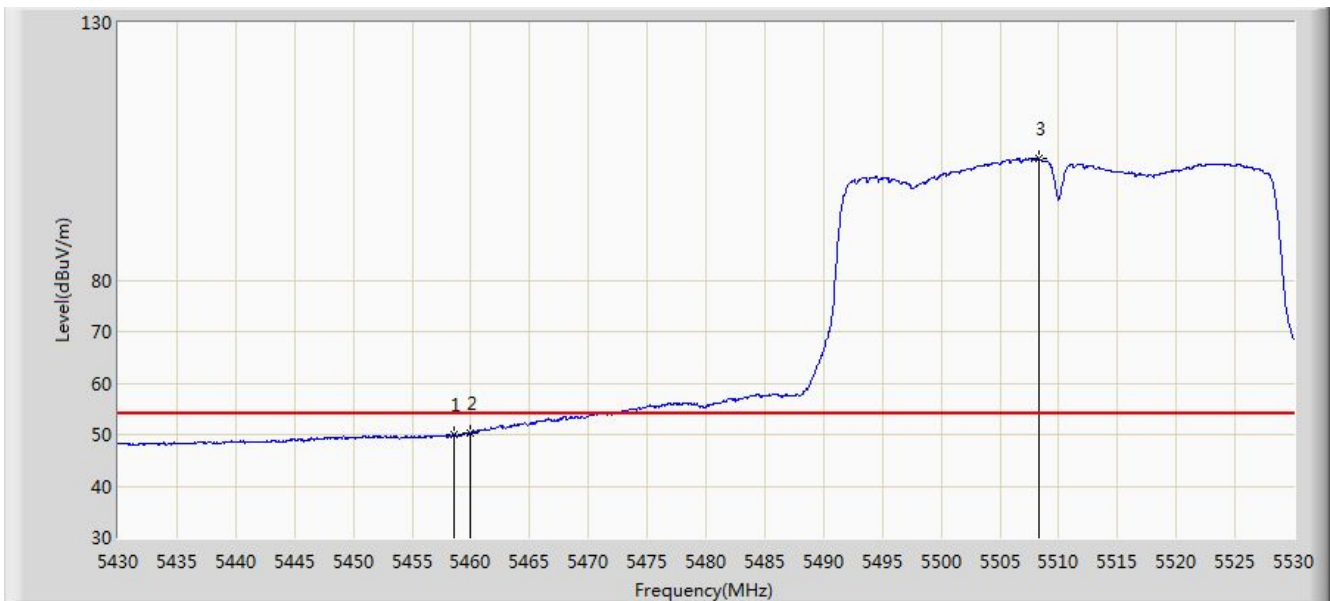


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5458.550	50.037	45.316	-3.963	54.000	4.721	AV
2			5460.000	50.262	45.550	-3.738	54.000	4.711	AV
3		*	5508.350	103.502	98.616	N/A	N/A	4.886	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 19:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

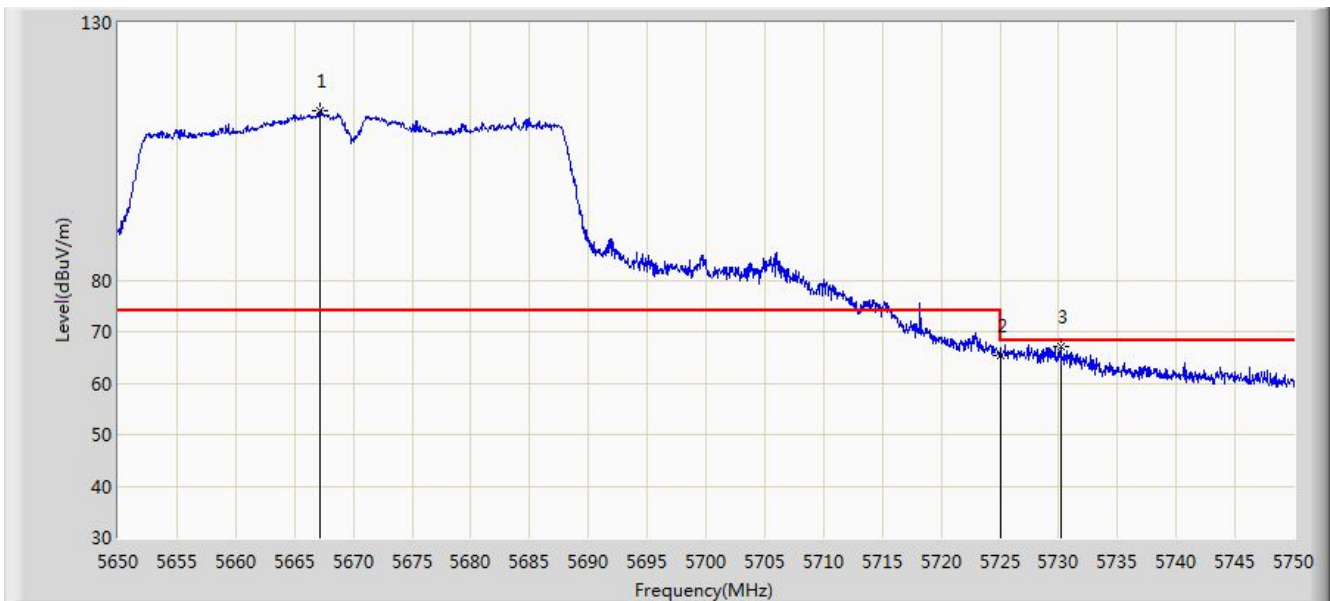


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5667.200	113.010	107.901	N/A	N/A	5.110	PK
2			5725.000	65.373	60.133	-2.827	68.200	5.241	PK
3			5730.150	67.167	61.912	-1.033	68.200	5.255	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 19:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

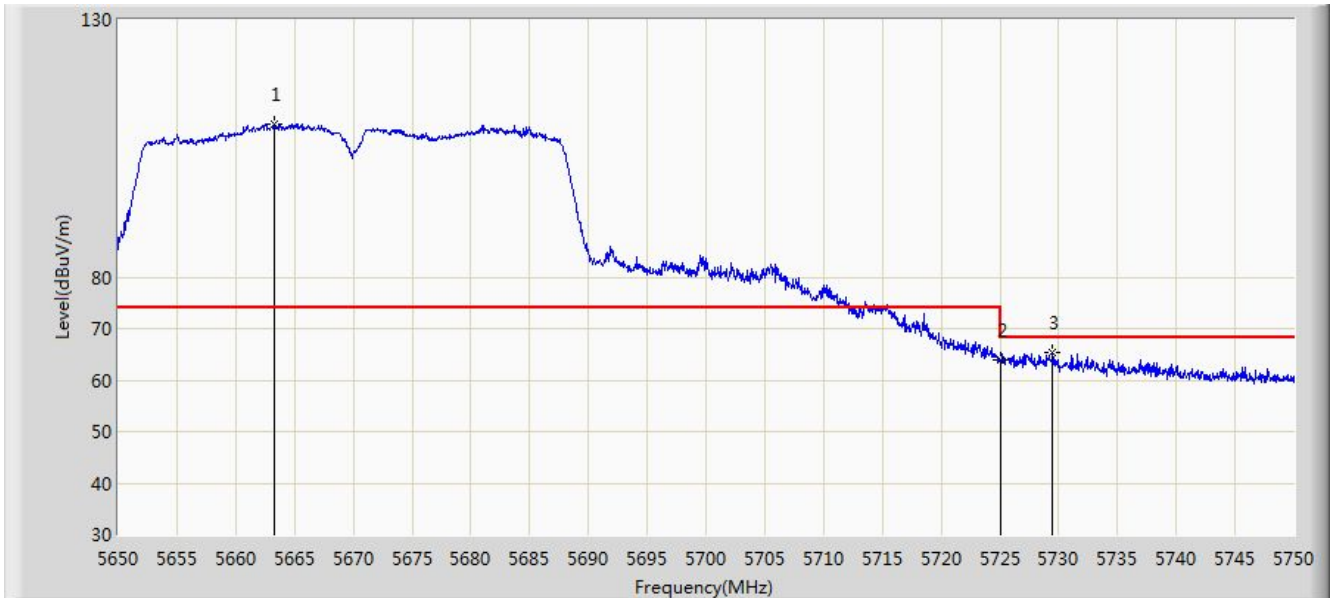


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5663.250	109.732	104.696	N/A	N/A	5.035	PK
2			5725.000	64.025	58.785	-4.175	68.200	5.241	PK
3			5729.500	65.326	60.072	-2.874	68.200	5.254	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 19:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

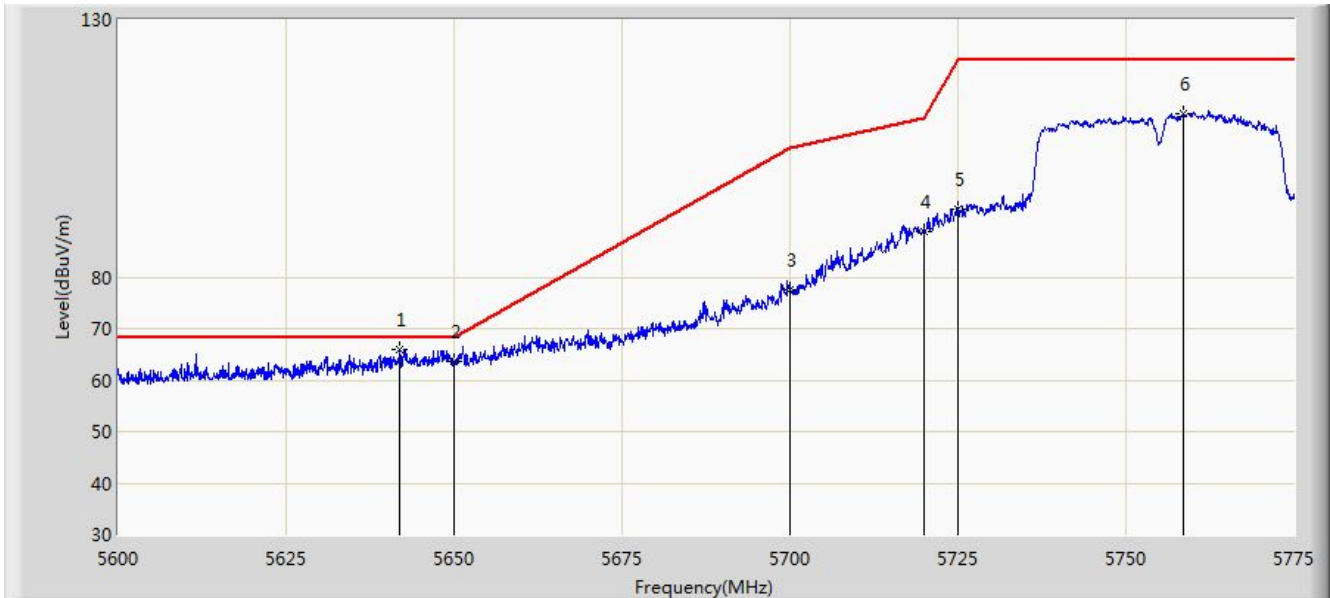


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5641.913	65.895	61.081	-2.305	68.200	4.814	PK
2			5650.000	63.525	58.658	-4.675	68.200	4.867	PK
3			5700.000	77.646	72.427	-27.554	105.200	5.219	PK
4			5720.000	88.936	83.705	-21.864	110.800	5.231	PK
5			5725.000	93.203	87.963	-28.997	122.200	5.241	PK
6			5758.550	111.869	106.404	N/A	N/A	5.465	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 19:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

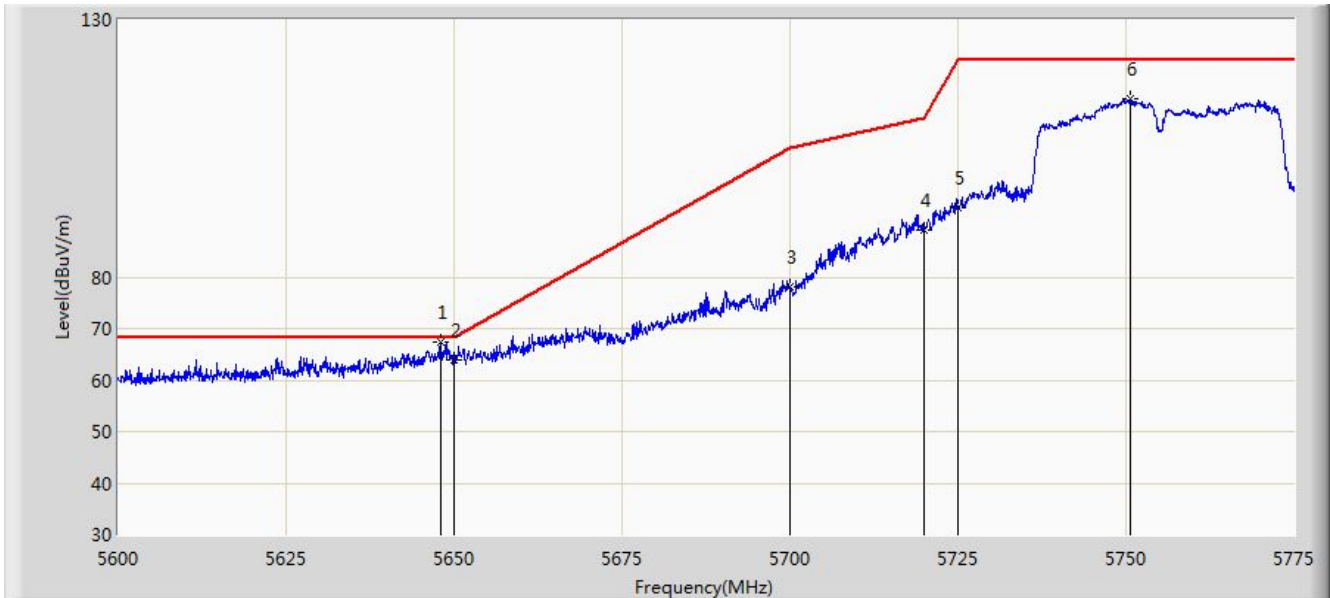


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5647.950	67.347	62.494	-0.853	68.200	4.853	PK
2			5650.000	63.938	59.071	-4.262	68.200	4.867	PK
3			5700.000	78.000	72.781	-27.200	105.200	5.219	PK
4			5720.000	89.186	83.955	-21.614	110.800	5.231	PK
5			5725.000	93.344	88.104	-28.856	122.200	5.241	PK
6			5750.763	114.646	109.283	N/A	N/A	5.363	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 19:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

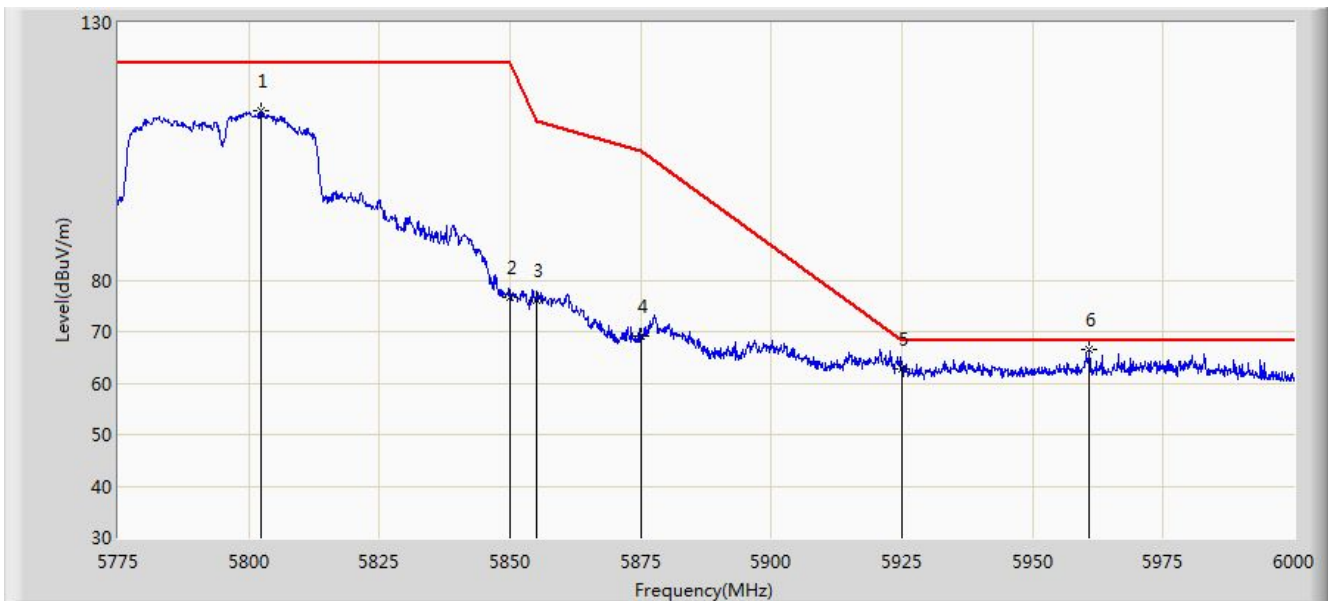


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5802.225	112.875	107.407	N/A	N/A	5.469	PK
2			5850.000	76.712	70.995	-45.488	122.200	5.716	PK
3			5855.000	76.167	70.454	-34.633	110.800	5.713	PK
4			5875.000	69.010	63.330	-36.190	105.200	5.680	PK
5			5925.000	62.776	56.823	-5.424	68.200	5.953	PK
6		*	5960.850	66.442	60.726	-1.758	68.200	5.716	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 19:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

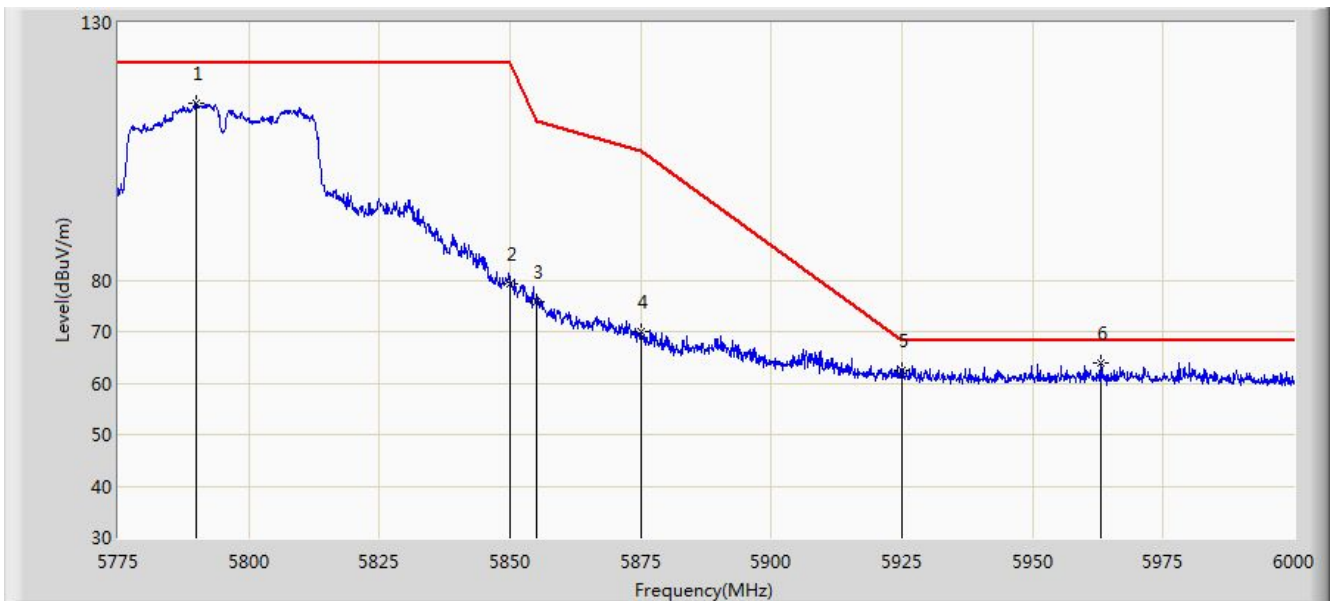


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5790.075	114.320	108.802	N/A	N/A	5.518	PK
2			5850.000	79.250	73.533	-42.950	122.200	5.716	PK
3			5855.000	75.664	69.951	-35.136	110.800	5.713	PK
4			5875.000	70.026	64.346	-35.174	105.200	5.680	PK
5			5925.000	62.417	56.464	-5.783	68.200	5.953	PK
6		*	5963.100	63.843	58.137	-4.357	68.200	5.707	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 19:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

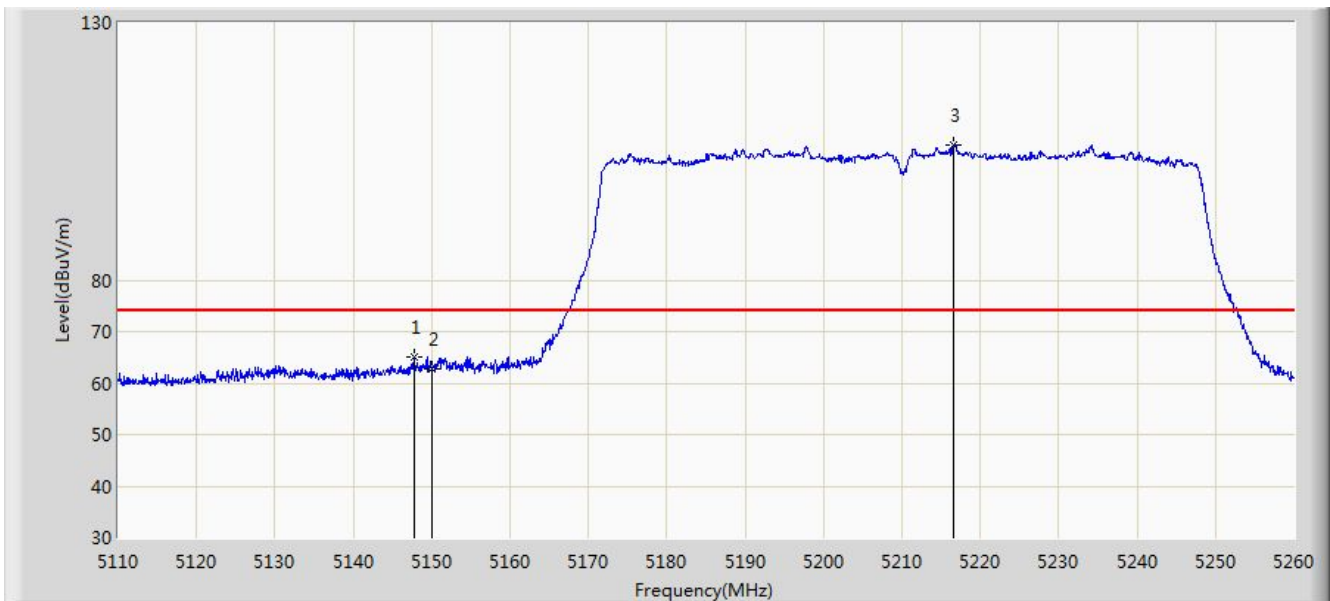


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5147.800	65.197	60.416	-8.803	74.000	4.782	PK
2			5150.000	62.827	58.034	-11.173	74.000	4.793	PK
3		*	5216.650	106.298	101.395	N/A	N/A	4.903	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 19:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

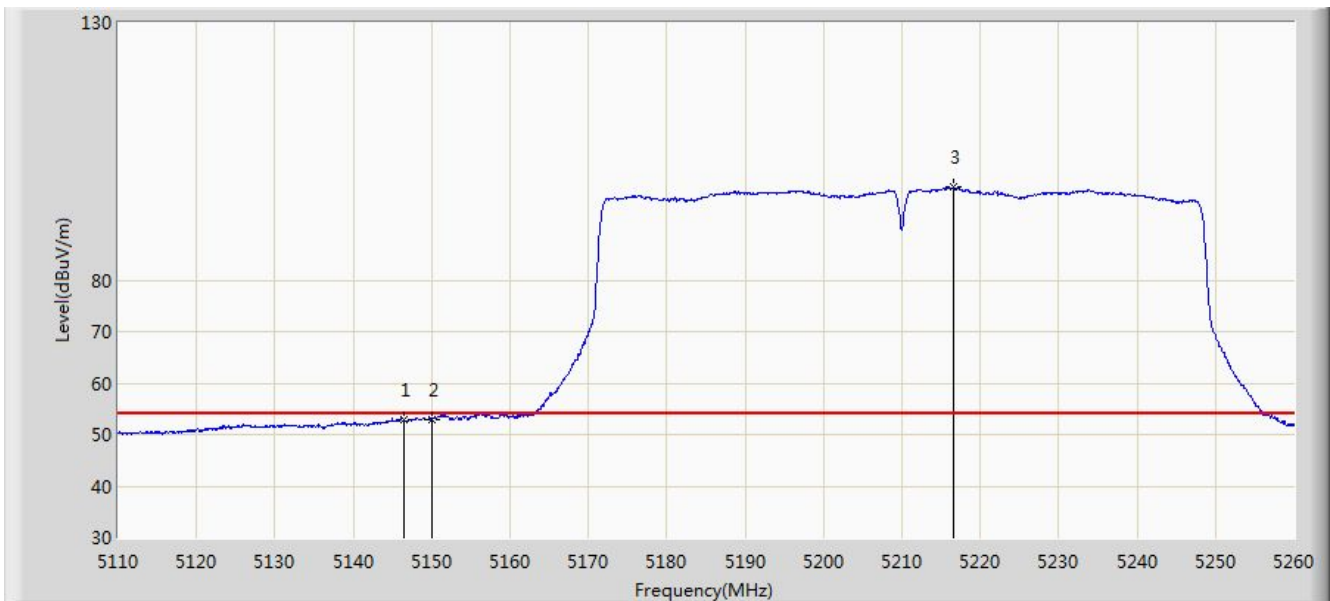


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5146.450	52.848	48.063	-1.152	54.000	4.785	AV
2			5150.000	52.903	48.110	-1.097	54.000	4.793	AV
3		*	5216.500	97.972	93.069	N/A	N/A	4.904	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 19:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

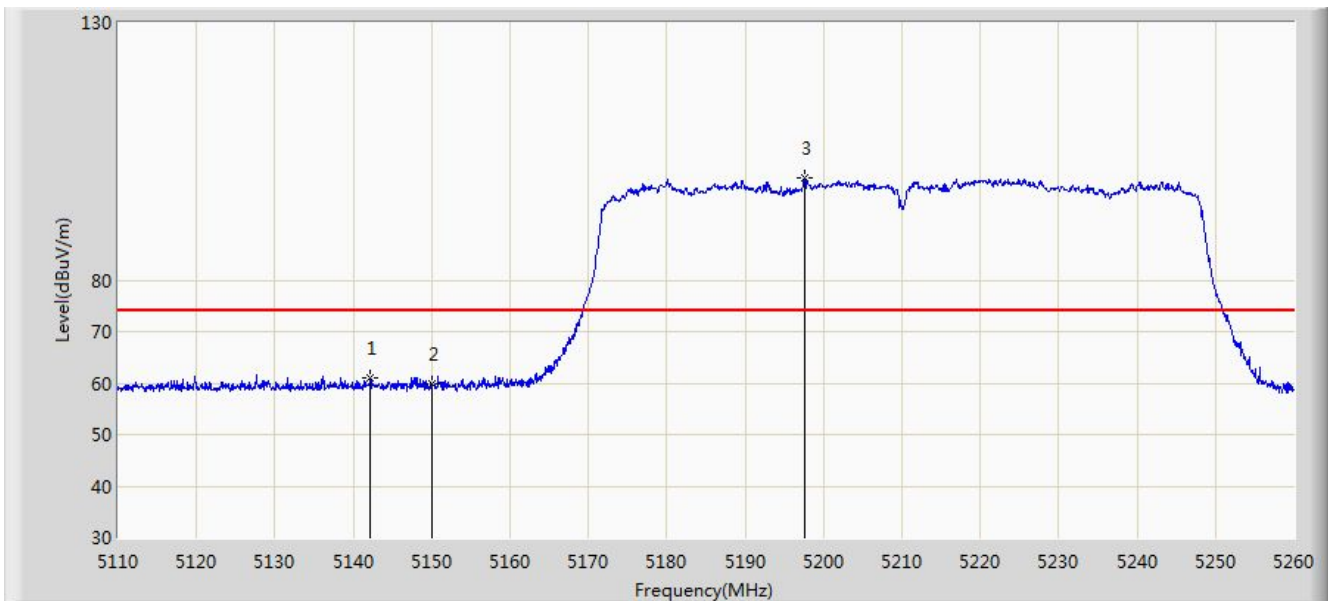


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5142.175	60.971	56.173	-13.029	74.000	4.798	PK
2			5150.000	59.719	54.926	-14.281	74.000	4.793	PK
3		*	5197.675	99.774	94.854	N/A	N/A	4.921	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 19:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

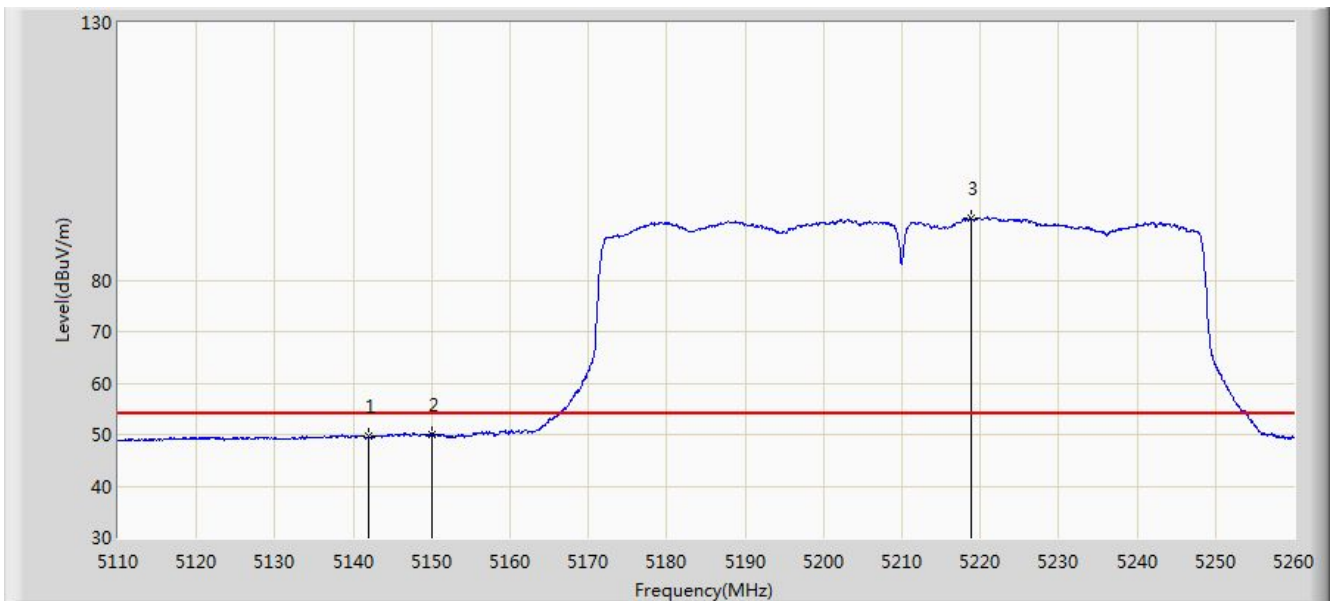


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5141.875	49.840	45.041	-4.160	54.000	4.799	AV
2			5150.000	50.081	45.288	-3.919	54.000	4.793	AV
3		*	5218.750	91.985	87.080	N/A	N/A	4.905	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 20:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

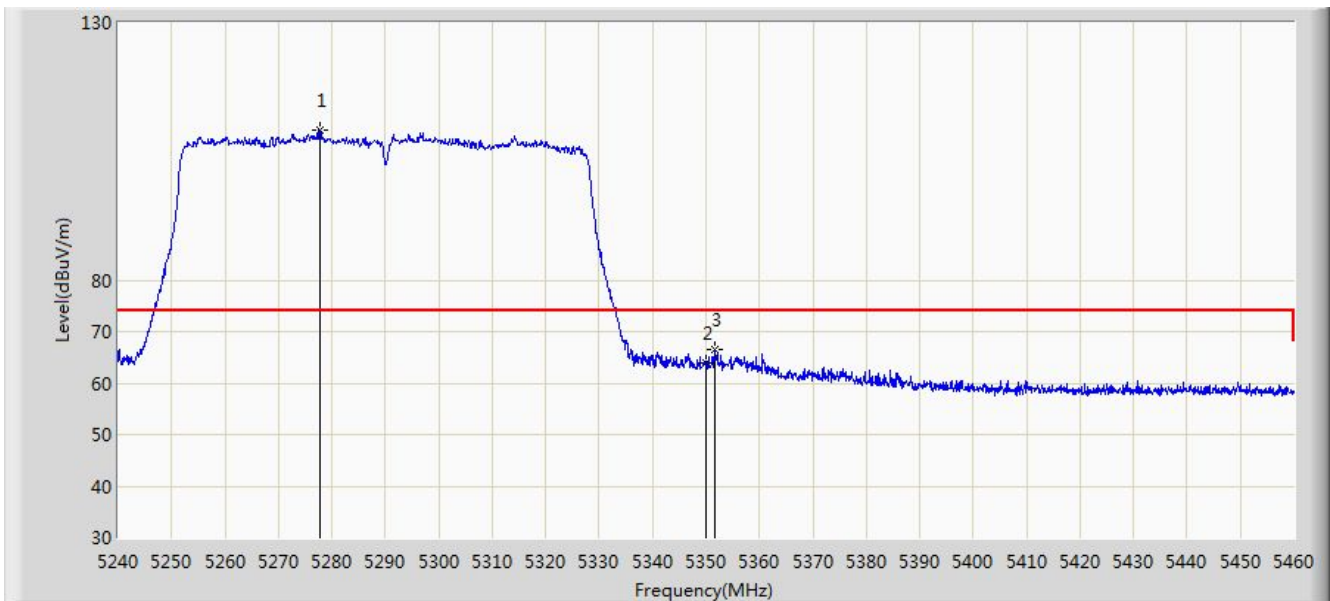


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5277.840	109.233	104.401	N/A	N/A	4.832	PK
2			5350.000	63.992	59.135	-10.008	74.000	4.857	PK
3			5351.760	66.502	61.636	-7.498	74.000	4.866	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 20:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

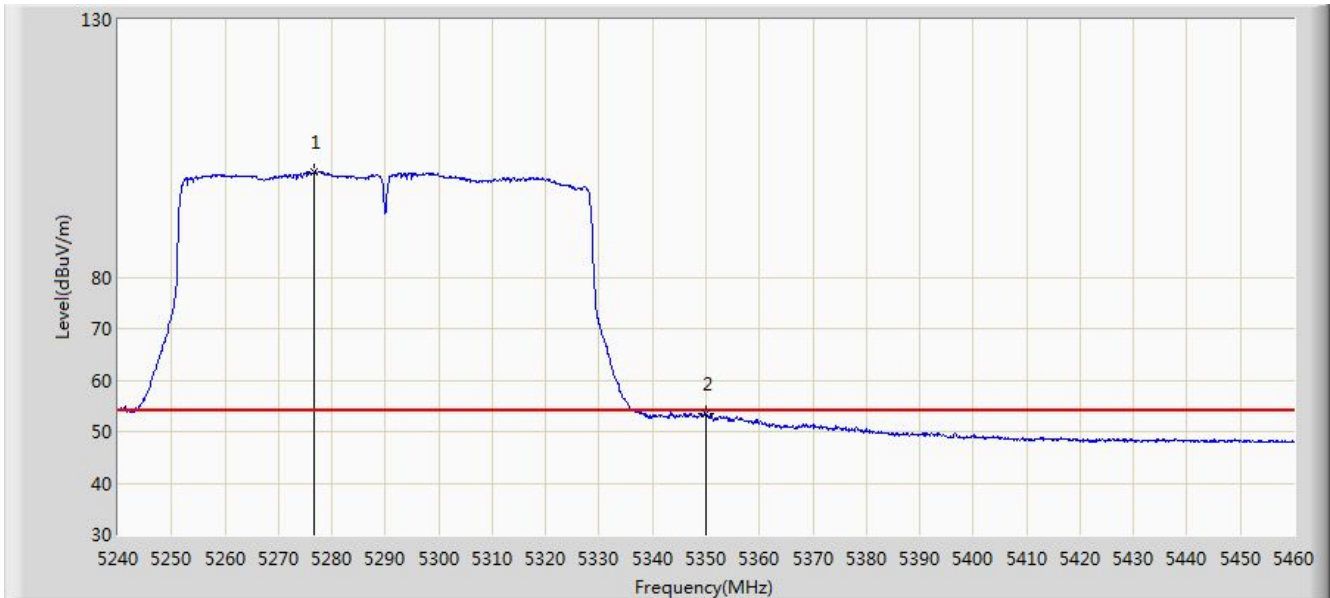


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5276.740	100.432	95.589	N/A	N/A	4.843	AV
2			5350.000	53.373	48.516	-0.627	54.000	4.857	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 20:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

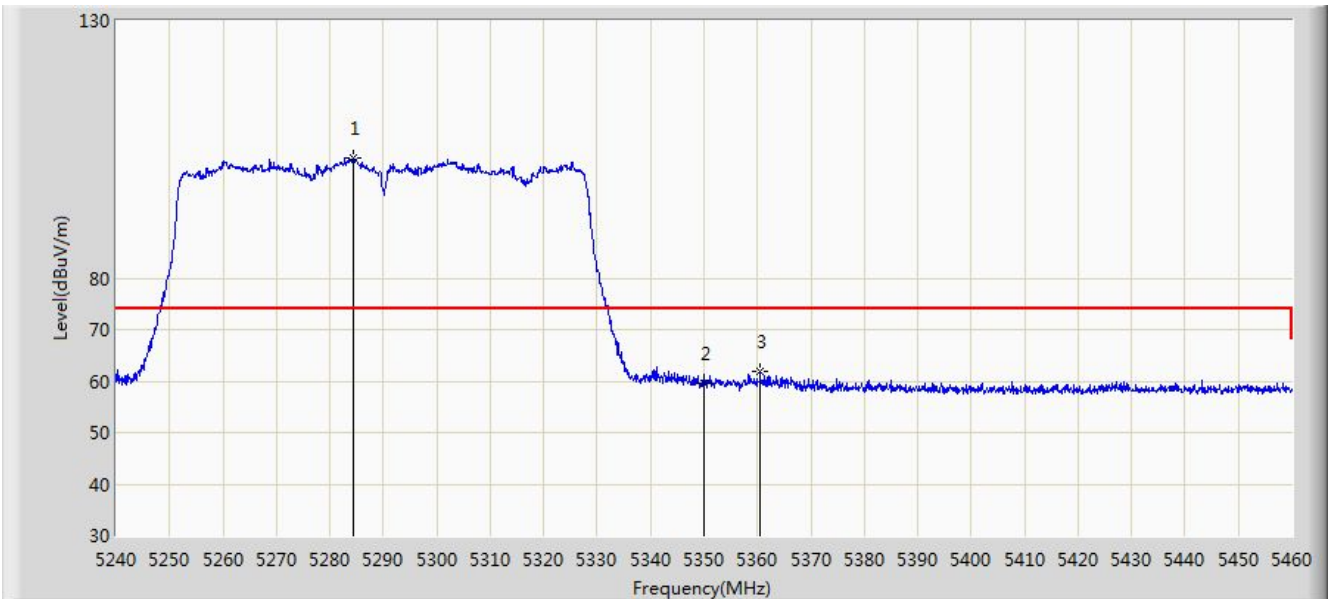


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5284.440	103.225	98.462	N/A	N/A	4.762	PK
2			5350.000	59.650	54.793	-14.350	74.000	4.857	PK
3			5360.450	61.843	57.038	-12.157	74.000	4.806	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 20:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

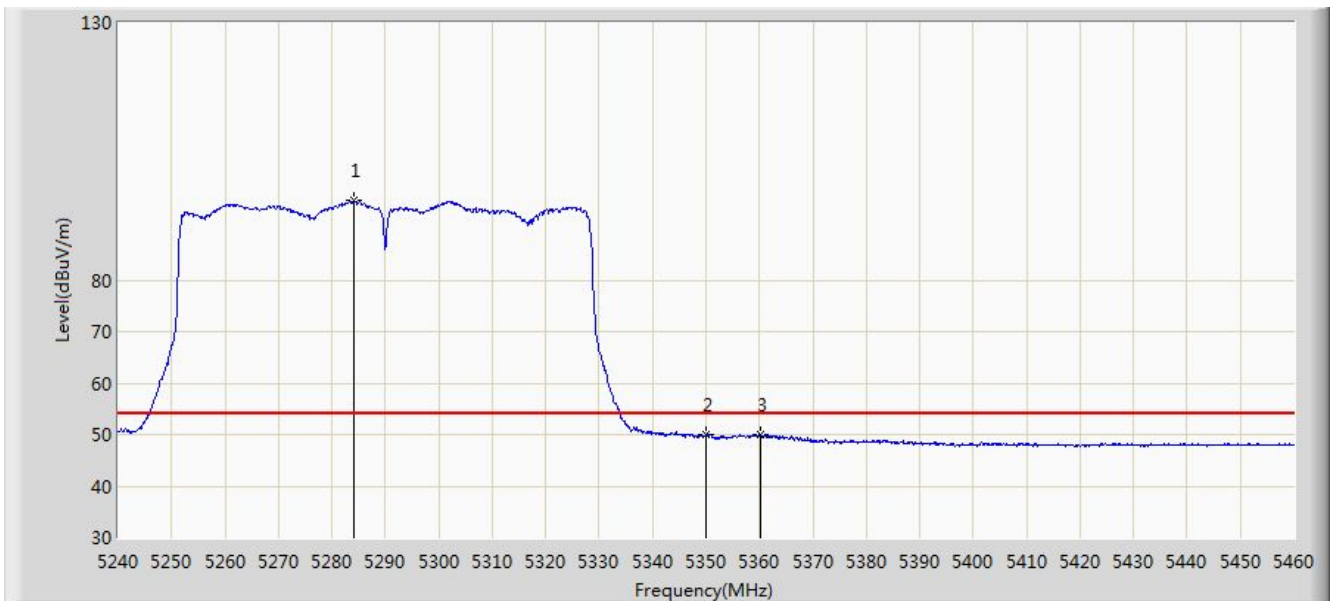


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5284.220	95.419	90.653	N/A	N/A	4.766	AV
2			5350.000	49.929	45.072	-4.071	54.000	4.857	AV
3			5360.120	50.056	45.248	-3.944	54.000	4.808	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 20:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

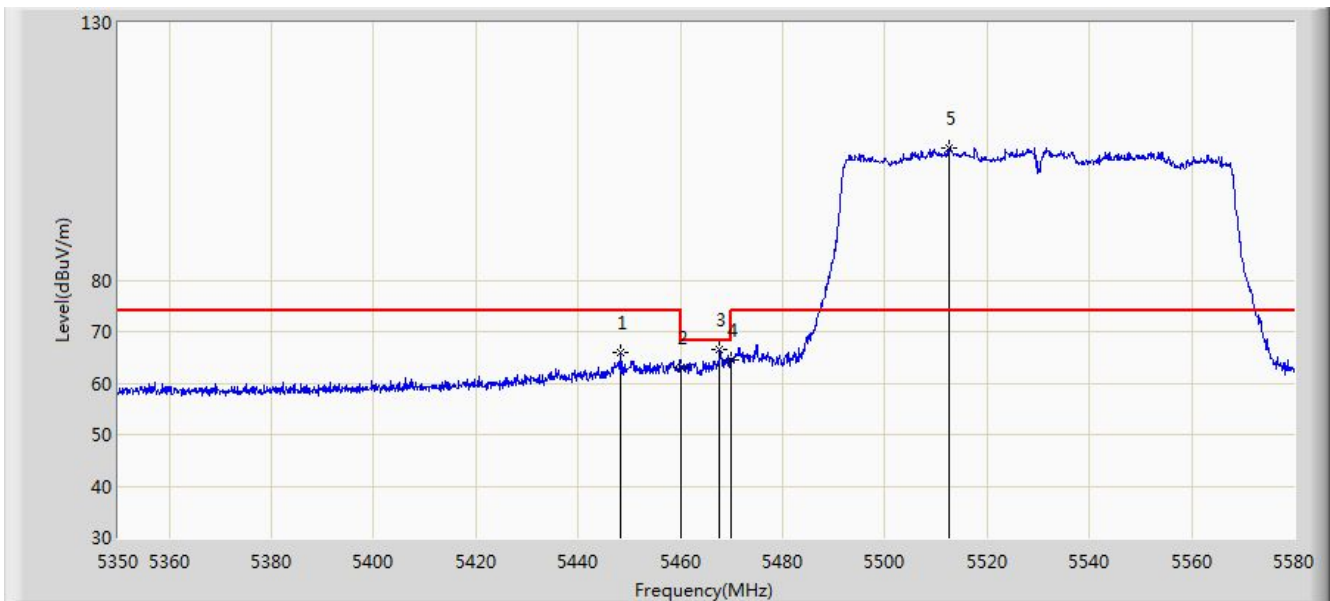


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5448.325	65.824	61.036	-8.176	74.000	4.787	PK
2			5460.000	62.917	58.205	-11.083	74.000	4.711	PK
3			5467.645	66.408	61.748	-1.792	68.200	4.660	PK
4			5470.000	64.551	59.907	-3.649	68.200	4.644	PK
5		*	5512.495	105.670	100.759	N/A	N/A	4.910	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 20:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

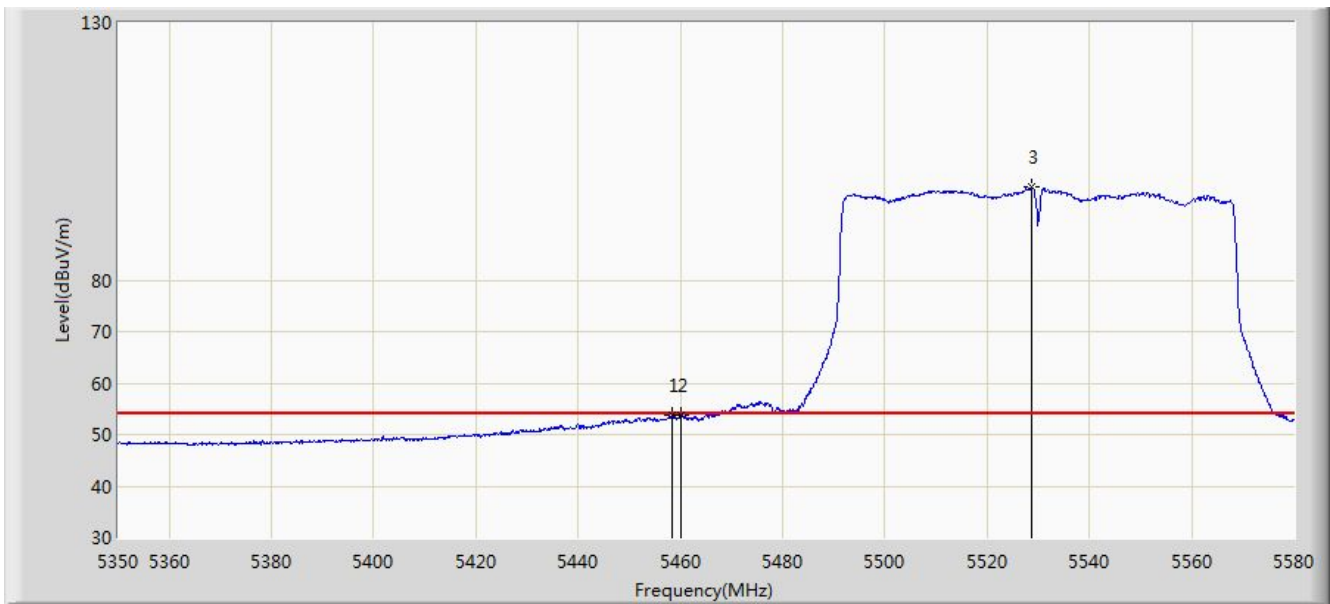


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5458.445	53.721	48.999	-0.279	54.000	4.722	AV
2			5460.000	53.765	49.053	-0.235	54.000	4.711	AV
3		*	5528.710	97.986	93.076	N/A	N/A	4.911	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 20:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

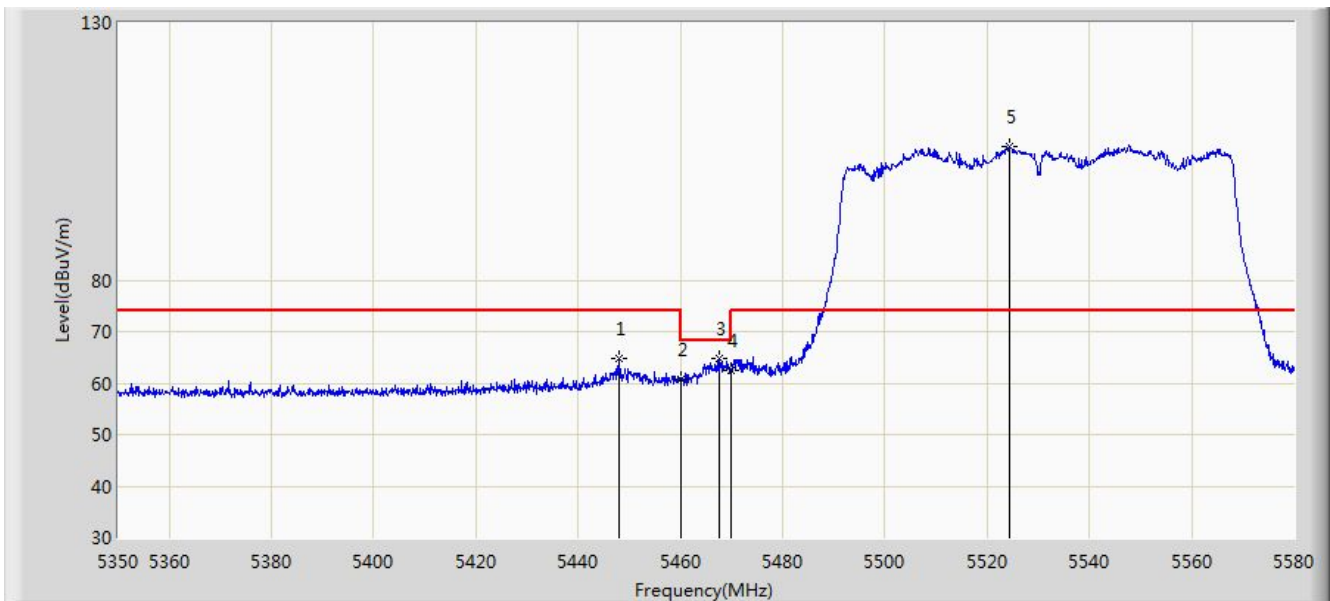


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5448.095	64.681	59.892	-9.319	74.000	4.789	PK
2			5460.000	60.747	56.035	-13.253	74.000	4.711	PK
3			5467.530	64.841	60.180	-3.359	68.200	4.661	PK
4			5470.000	62.532	57.888	-5.668	68.200	4.644	PK
5		*	5524.340	106.024	101.090	N/A	N/A	4.934	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 20:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

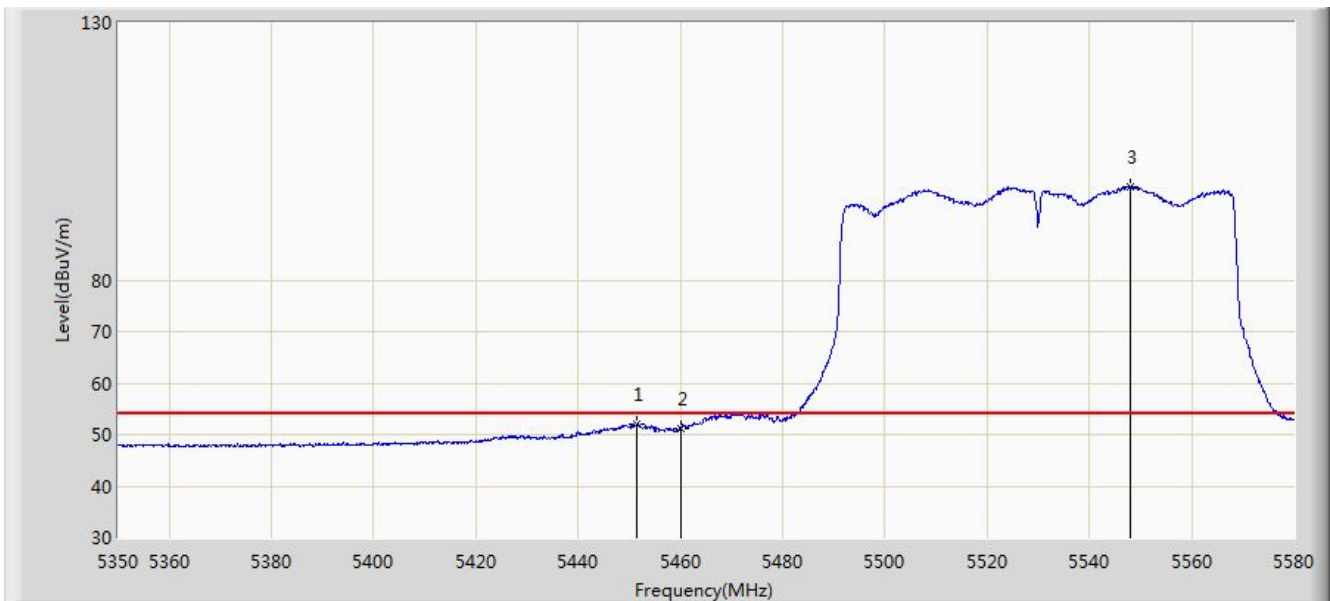


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5451.545	51.957	47.188	-2.043	54.000	4.769	AV
2			5460.000	51.140	46.428	-2.860	54.000	4.711	AV
3		*	5548.145	98.231	93.515	N/A	N/A	4.717	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 20:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

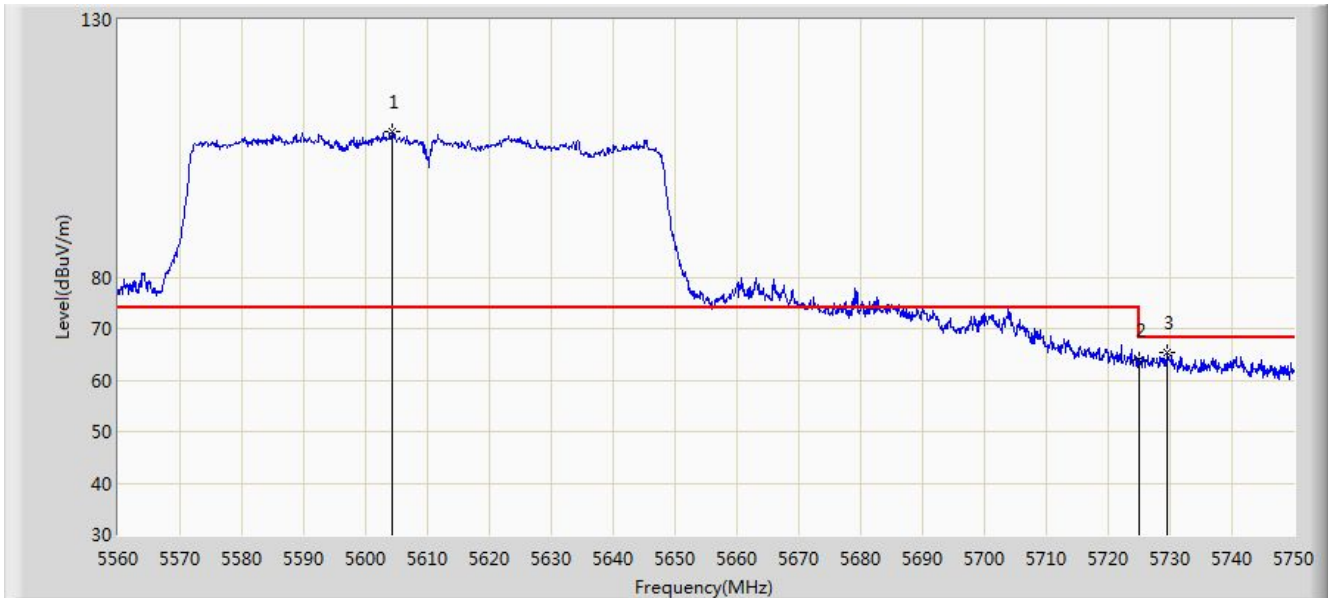


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5604.270	108.163	103.200	N/A	N/A	4.964	PK
2			5725.000	63.847	58.607	-4.353	68.200	5.241	PK
3			5729.575	65.368	60.114	-2.832	68.200	5.253	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 20:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

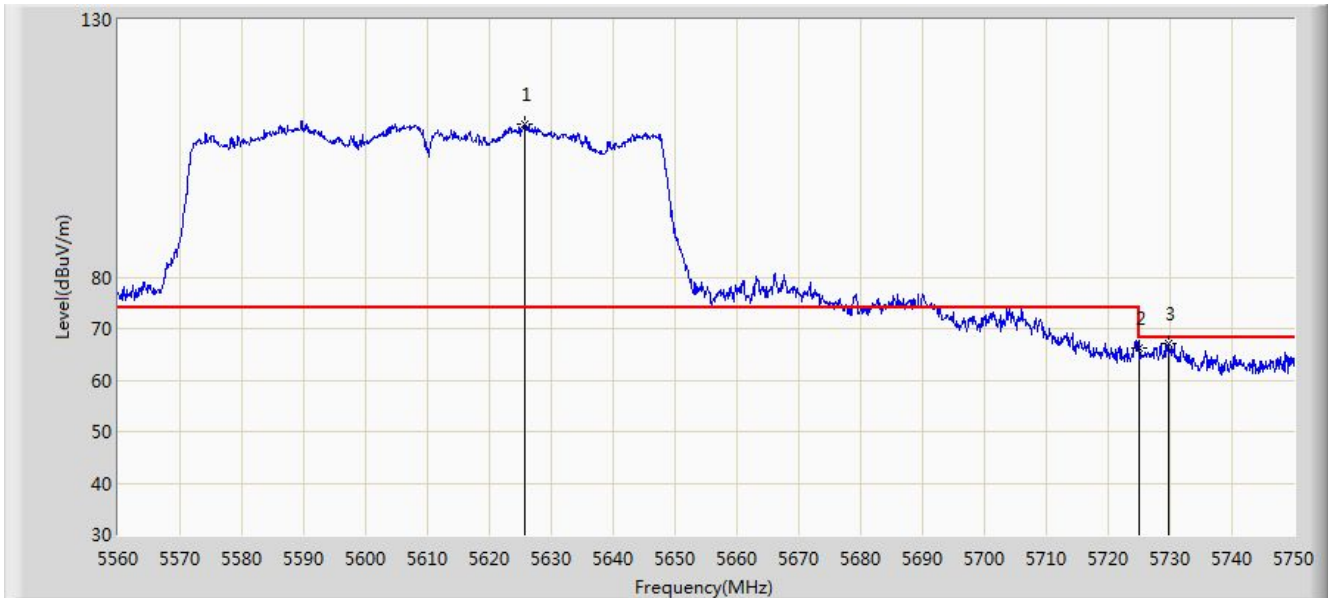


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5625.645	109.737	104.739	N/A	N/A	4.998	PK
2			5725.000	66.337	61.097	-1.863	68.200	5.241	PK
3			5729.860	67.070	61.816	-1.130	68.200	5.253	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 20:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

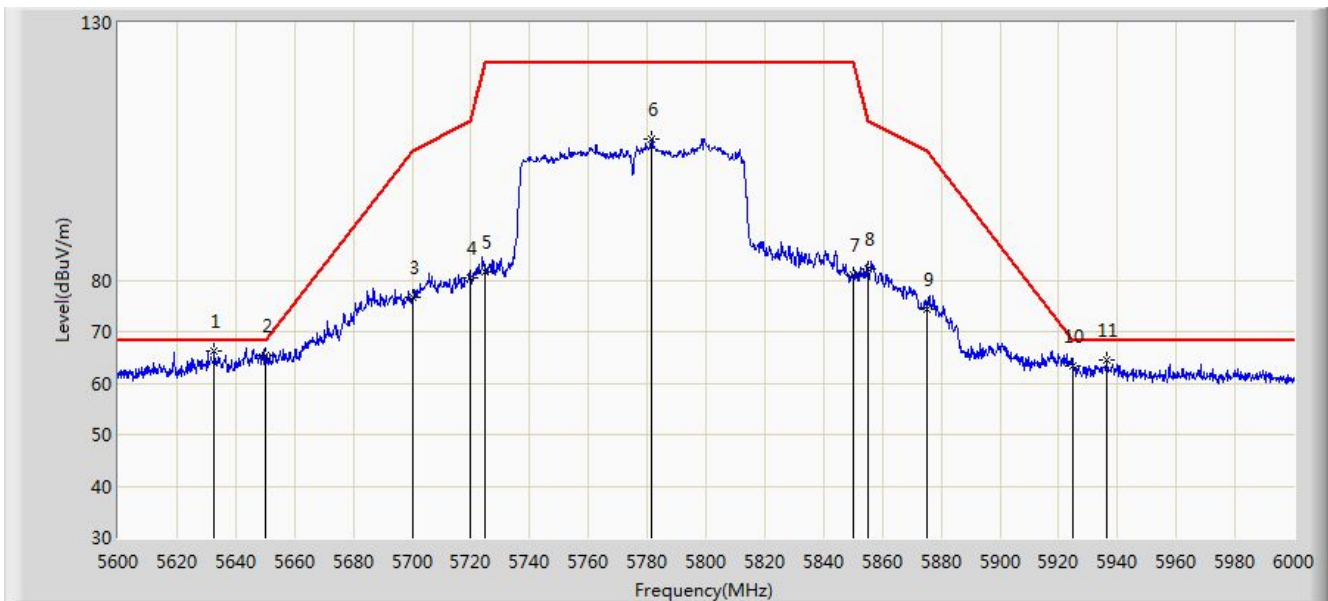


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5632.800	66.305	61.416	-1.895	68.200	4.888	PK
2			5650.000	65.292	60.425	-2.908	68.200	4.867	PK
3			5700.000	76.743	71.524	-28.457	105.200	5.219	PK
4			5720.000	80.306	75.075	-30.494	110.800	5.231	PK
5			5725.000	81.596	76.356	-40.604	122.200	5.241	PK
6			5781.600	107.265	101.675	N/A	N/A	5.589	PK
7			5850.000	81.146	75.429	-41.054	122.200	5.716	PK
8			5855.000	82.158	76.445	-28.642	110.800	5.713	PK
9			5875.000	74.378	68.698	-30.822	105.200	5.680	PK
10			5925.000	63.335	57.382	-4.865	68.200	5.953	PK
11			5936.200	64.420	58.532	-3.780	68.200	5.888	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/12/15 - 20:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

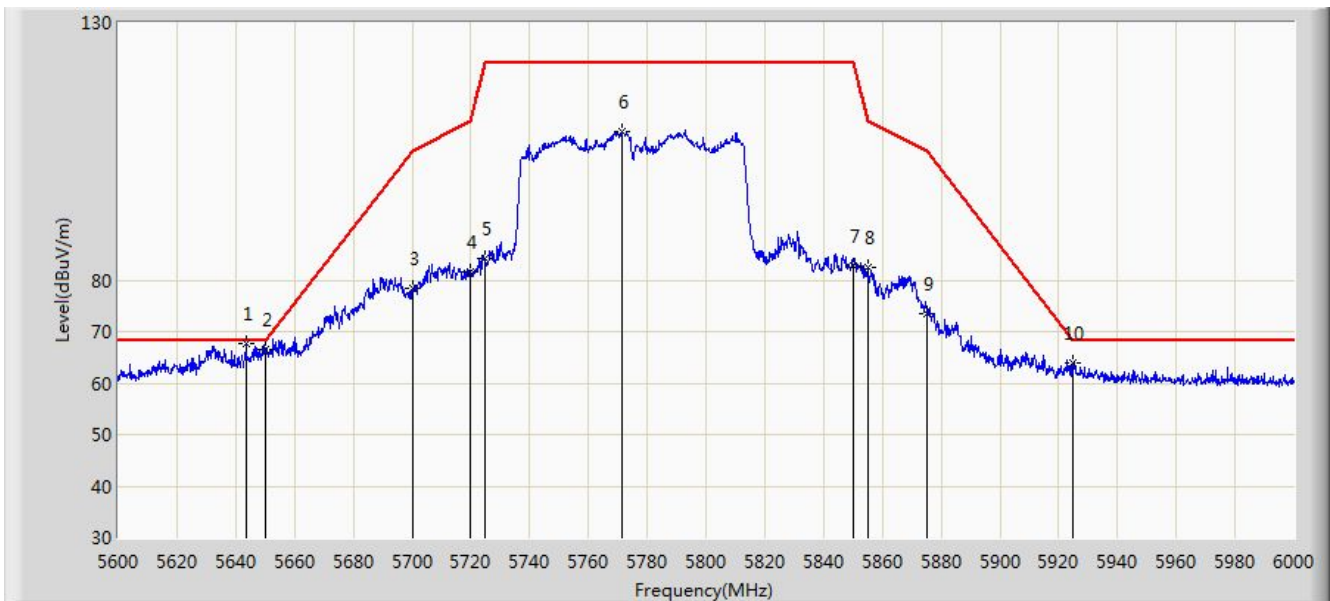


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5643.600	67.720	62.895	-0.480	68.200	4.825	PK
2			5650.000	66.665	61.798	-1.535	68.200	4.867	PK
3			5700.000	78.309	73.090	-26.891	105.200	5.219	PK
4			5720.000	81.690	76.459	-29.110	110.800	5.231	PK
5			5725.000	84.188	78.948	-38.012	122.200	5.241	PK
6			5771.200	108.787	103.231	N/A	N/A	5.556	PK
7			5850.000	82.671	76.954	-39.529	122.200	5.716	PK
8			5855.000	82.477	76.764	-28.323	110.800	5.713	PK
9			5875.000	73.429	67.749	-31.771	105.200	5.680	PK
10			5925.000	64.053	58.100	-4.147	68.200	5.953	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

A.9 AC Conducted Emissions Test Result

Site: WZ-SR2	Time: 2022/04/06 - 13:40
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_E	Polarity: Line
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5745MHz	

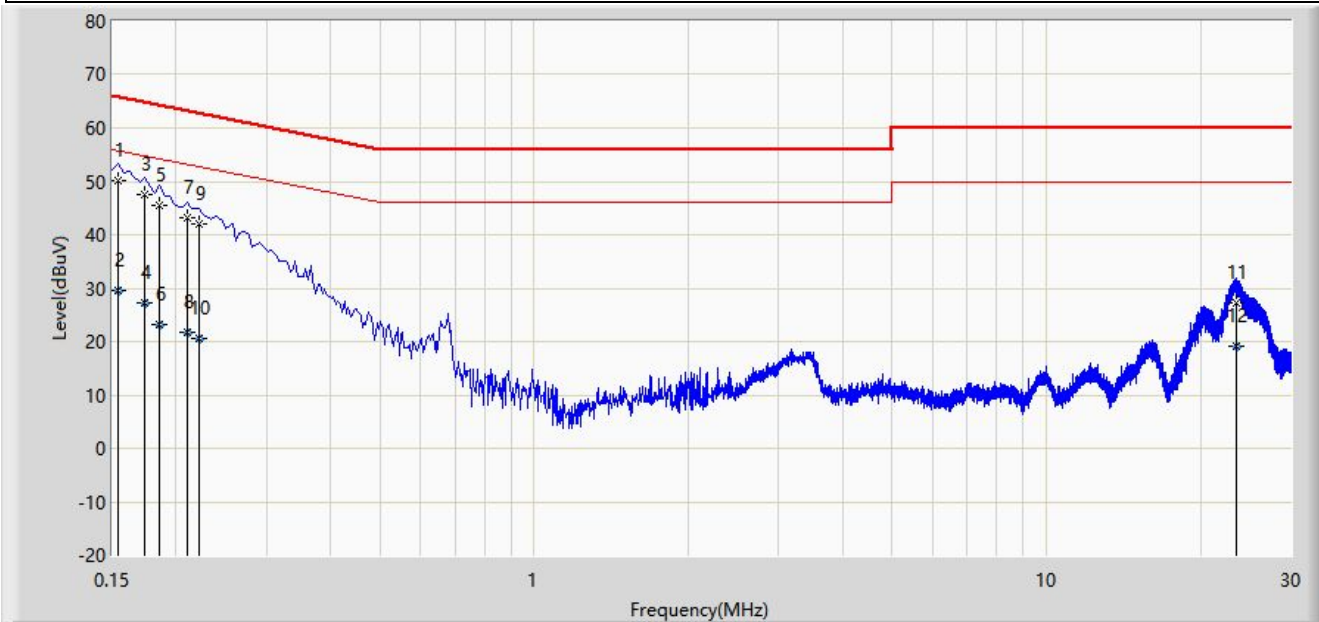


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		*	0.154	50.049	40.148	-15.733	65.781	9.900	QP
2			0.154	29.626	19.725	-26.156	55.781	9.900	AV
3			0.174	47.496	37.596	-17.271	64.767	9.900	QP
4			0.174	27.230	17.330	-27.537	54.767	9.900	AV
5			0.186	45.547	35.647	-18.666	64.213	9.900	QP
6			0.186	23.224	13.324	-30.989	54.213	9.900	AV
7			0.210	43.147	33.246	-20.058	63.205	9.901	QP
8			0.210	21.809	11.909	-31.396	53.205	9.901	AV
9			0.222	41.950	32.048	-20.794	62.744	9.901	QP
10			0.222	20.616	10.715	-32.127	52.744	9.901	AV
11			23.450	27.186	15.475	-32.814	60.000	11.711	QP
12			23.450	19.140	7.428	-30.860	50.000	11.711	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: WZ-SR2	Time: 2022/04/06 - 13:44
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_E	Polarity: Neutral
EUT: Wireless Access Point	Power: 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5745MHz	

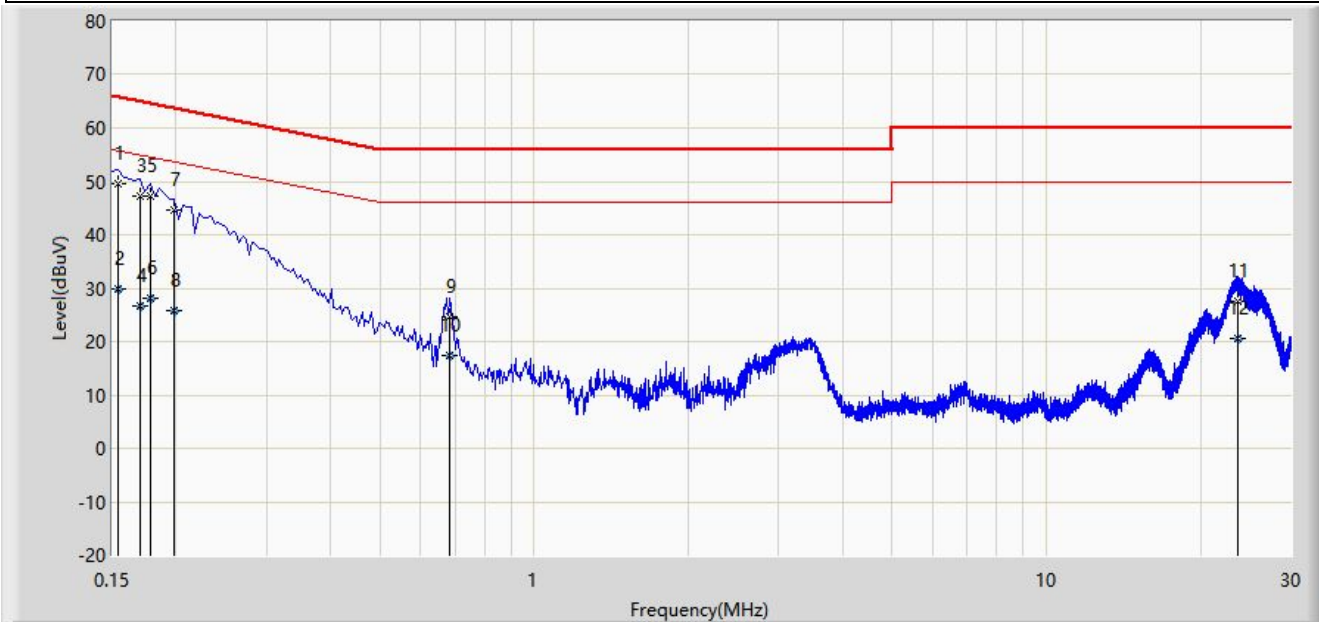

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		*	0.154	49.619	39.700	-16.163	65.781	9.919	QP
2			0.154	29.891	19.972	-25.891	55.781	9.919	AV
3			0.170	47.316	37.400	-17.644	64.960	9.916	QP
4			0.170	26.614	16.698	-28.347	54.960	9.916	AV
5			0.178	47.284	37.369	-17.295	64.578	9.914	QP
6			0.178	28.214	18.299	-26.365	54.578	9.914	AV
7			0.198	44.608	34.696	-19.086	63.694	9.911	QP
8			0.198	25.659	15.748	-28.035	53.694	9.911	AV
9			0.682	24.742	14.795	-31.258	56.000	9.946	QP
10			0.682	17.476	7.530	-28.524	46.000	9.946	AV
11			23.614	27.641	15.794	-32.359	60.000	11.847	QP
12			23.614	20.484	8.637	-29.516	50.000	11.847	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Appendix B – Test Setup Photograph

Refer to “2112RSU018-UT” file.

Appendix C – EUT Photograph

Refer to “2112RSU018-UE” file.

————— The End —————