

MEASUREMENT REPORT

FCC PART 15.407 WLAN 802.11a/n/ac

FCC ID: TK4WSD377

APPLICANT: Compex Systems Pte Ltd

Application Type: Certification

Product: 2.4GHz/5GHz WiFi + Bluetooth Combination Module

Model No.: WSD377

Serial No. WSD377-I ,WSD377-EVK

Brand Name: COMPEX

FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s): Part15 Subpart E (Section 15.407)

Test Procedure(s): ANSI C63.10-2013, KDB 789033 D02v02r01

Test Date: December 13 ~ 29, 2018

Reviewed By:

Jame Yuan

(Jame Yuan)

Approved By:

Robin Wu

(Robin Wu)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v02r01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1812RSU007-U3	Rev. 01	Initial report	12-29-2018	Valid

CONTENTS

Description	Page
§2.1033 General Information	6
1. INTRODUCTION	7
1.1. Scope	7
1.2. MRT Test Location	7
2. PRODUCT INFORMATION	8
2.1. Equipment Description.....	8
2.2. Product Specification Subjective to this Report.....	8
2.3. Working Frequencies for this report	8
2.4. Description of Available Antennas.....	9
2.5. Test Mode	9
2.6. Description of Test Software	9
2.7. Device Capabilities	10
2.8. Test Configuration	12
2.9. EMI Suppression Device(s)/Modifications.....	12
2.10. Labeling Requirements.....	12
3. DESCRIPTION OF TEST	13
3.1. Evaluation Procedure	13
3.2. AC Line Conducted Emissions	13
3.3. Radiated Emissions.....	14
4. ANTENNA REQUIREMENTS.....	15
5. TEST EQUIPMENT CALIBRATION DATE.....	16
6. MEASUREMENT UNCERTAINTY.....	17
7. TEST RESULT	18
7.1. Summary	18
7.2. 26dB Bandwidth Measurement.....	19
7.2.1. Test Limit	19
7.2.2. Test Procedure used.....	19
7.2.3. Test Setting.....	19
7.2.4. Test Setup	19
7.2.5. Test Result.....	20
7.3. 6dB Bandwidth Measurement.....	34
7.3.1. Test Limit	34
7.3.2. Test Procedure used.....	34

7.3.3. Test Setting.....	34
7.3.4. Test Setup	34
7.3.5. Test Result.....	35
7.4. Output Power Measurement	40
7.4.1. Test Limit	40
7.4.2. Test Procedure Used	40
7.4.3. Test Setting.....	40
7.4.4. Test Setup	40
7.4.5. Test Result.....	41
7.5. Transmit Power Control	46
7.5.1. Test Limit	46
7.5.2. Test Procedure Used	46
7.5.3. Test Setting.....	46
7.5.4. Test Setup	46
7.5.5. Test Result.....	46
7.6. Power Spectral Density Measurement.....	47
7.6.1. Test Limit	47
7.6.2. Test Procedure Used	47
7.6.3. Test Setting.....	47
7.6.4. Test Setup	48
7.6.5. Test Result.....	49
7.7. Frequency Stability Measurement.....	63
7.7.1. Test Limit	63
7.7.2. Test Procedure Used	63
7.7.3. Test Setup	64
7.7.4. Test Result.....	65
7.8. Radiated Spurious Emission Measurement	66
7.8.1. Test Limit	66
7.8.2. Test Procedure Used	66
7.8.3. Test Setting.....	66
7.8.4. Test Setup	68
7.8.5. Test Result.....	70
7.9. Radiated Restricted Band Edge Measurement	131
7.9.1. Test Limit	131
7.9.2. Test Procedure Used	132
7.9.3. Test Setting.....	133
7.9.4. Test Setup	134
7.9.5. Test Result.....	135
7.10. AC Conducted Emissions Measurement.....	241

7.10.1. Test Limit	241
7.10.2. Test Procedure	241
7.10.3. Test Setup	242
7.10.4. Test Result.....	243
8. CONCLUSION.....	245
Appendix A - Test Setup Photograph	246
Appendix B - EUT Photograph.....	247

§2.1033 General Information

Applicant:	Compex Systems Pte Ltd
Applicant Address:	No:9 Harrison Road, Harrison Industrial Building, #05-01, Singapore 369651
Manufacturer:	Compex Systems Pte Ltd
Manufacturer Address:	No:9 Harrison Road, Harrison Industrial Building, #05-01, Singapore 369651
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
FCC Registration No.:	893164
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 893164) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	2.4GHz/5GHz WiFi + Bluetooth Combination Module
Model No.:	WSD377
Serial No.:	WSD377-I ,WSD377-EVK
Brand Name:	COMPEX
Wi-Fi Specification:	802.11a/b/g/n/ac
Bluetooth Specification:	v4.2 single mode

Note: The difference between these models is only for different market.

2.2. Product Specification Subjective to this Report

Frequency Range:	For 802.11a/n-HT20/ac-VHT20: 5180~5240MHz, 5260~5320MHz, 5500~5700MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40: 5190~5230MHz, 5270~5310MHz, 5510~5670MHz, 5755~5795MHz For 802.11ac-VHT80: 5210MHz, 5290MHz, 5530MHz, 5610MHz, 5775MHz
Type of Modulation:	802.11a/n/ac: OFDM
Data Rate:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 150Mbps 802.11ac: up to 433.3Mbps

Note: For other features of this EUT, test report will be issued separately.

2.3. Working Frequencies for this report

802.11a/n-HT20/ac-VHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	149	5745 MHz	153	5765 MHz
157	5785 MHz	161	5805 MHz	165	5825 MHz

802.11n-HT40/ac-VHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550 MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
151	5755 MHz	159	5795 MHz	--	--

802.11ac-VHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
102	5610 MHz	155	5775 MHz	--	--

2.4. Description of Available Antennas

Antenna Type	Frequency Band (MHz)	TX Paths	Antenna Gain (dBi)
Dipole Antenna	2400 ~ 2483.5	1*1	5.0
	5150 ~ 5850	1*1	7.0

2.5. Test Mode

Test Mode	Mode 1: Transmit by 802.11a (6Mbps)
	Mode 2: Transmit by 802.11n-HT20 (MCS0)
	Mode 3: Transmit by 802.11n-HT40 (MCS0)
	Mode 4: Transmit by 802.11ac-VHT20 (MCS0)
	Mode 5: Transmit by 802.11ac-VHT40 (MCS0)
	Mode 6: Transmit by 802.11ac-VHT80 (MCS0)

2.6. Description of Test Software

The test utility software used during testing was “QRCT3”, and the version was “v3.0-00268”.

Power setting was referred to operation description.


2.7. Device Capabilities


This device contains the following capabilities:

2.4GHz WLAN (DTS), 5GHz WLAN (UNII), Bluetooth (v2.1 + EDR)

Note: 5GHz (NII) operation is possible in 20MHz, 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Model No.	Test Mode	Duty Cycle
WSD377	802.11a	93.84%
	802.11n-HT20	90.36%
	802.11n-HT40	82.56%
	802.11ac-VHT20	90.36%
	802.11ac-VHT40	82.26%
	802.11ac-VHT80	69.89%

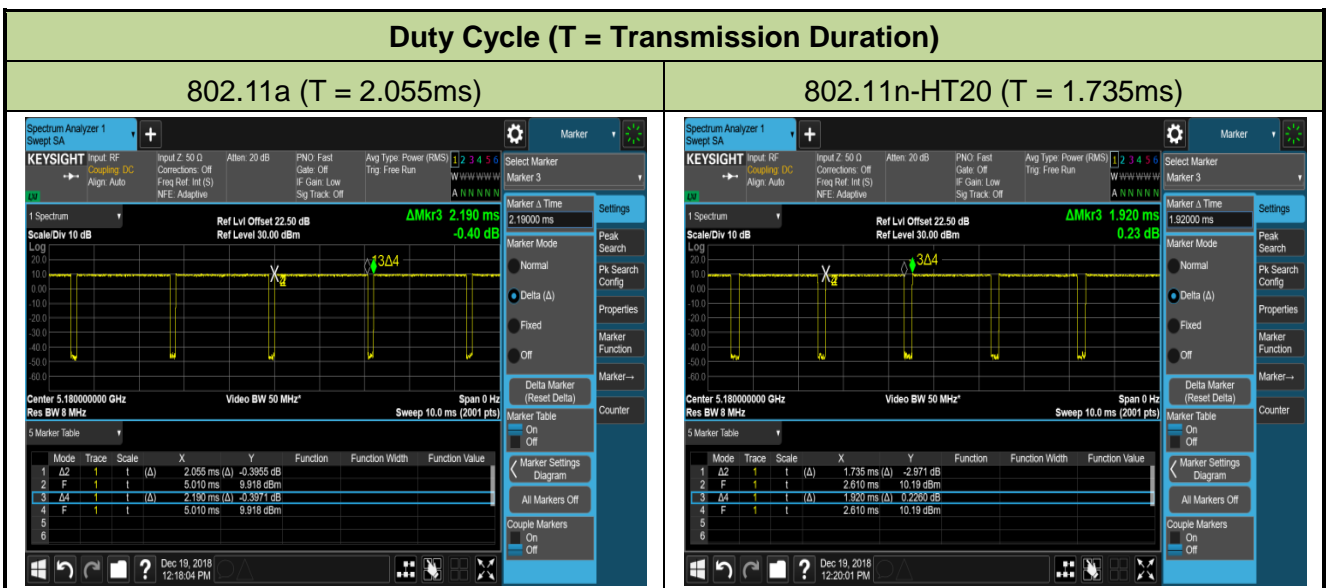

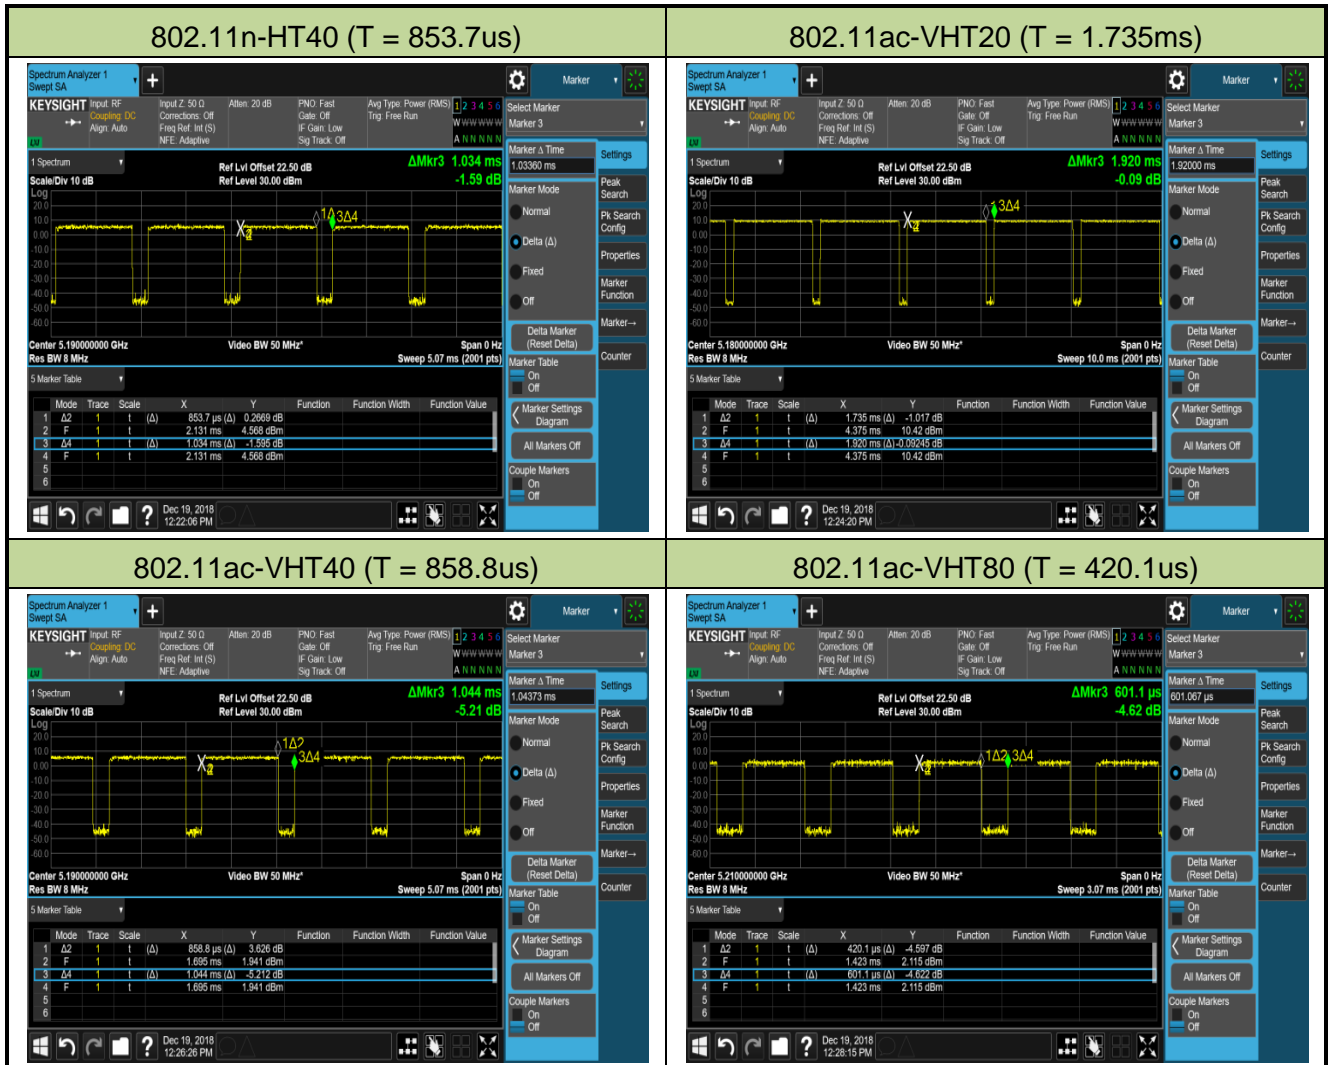

2.8. Test Configuration

The device was tested per the guidance of KDB 789033 D02v02r01, and the guidance provided in ANSI C63.10 was used in the measurement of the **2.4GHz/5GHz WiFi + Bluetooth Combination Module**.

Deviation from measurement procedure.....None

2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlets supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v02r01 were used in the measurement of the **2.4GHz/5GHz WiFi + Bluetooth Combination Module**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remotecontrolled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the EUT uses a unique (IPEX) connector.

Conclusion:

The **2.4GHz/5GHz WiFi + Bluetooth Combination Module** unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2019/04/20
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2019/06/15
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2019/06/15
Temperature/Humidity Meter	Testo	608-H1	MRTSUE06404	1 year	2019/08/15
Shielding Anechoic Chamber	Mikebang	Chamber-SR2	MRTSUE06215	N/A	N/A

Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
PXA Signal Analyzer	Keysight	9030B	MRTSUE06395	1 year	2019/09/05
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2019/08/14
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2019/04/20
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2019/11/09
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2019/04/12
Broad Band Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06023	1 year	2019/10/20
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2019/12/13
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2019/11/16
Amplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2019/06/12
Temperature/Humidity Meter	Testo	608-H1	MRTSUE06403	1 year	2019/08/15
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2019/05/02

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTSUE06452	1 year	2019/07/20
USB wideband power sensor	KEYSIGHT	U2021XA	MRTSUE06446	1 year	2019/07/20
Attenuator	MVE	MVE2211-10	MRTSUE06800	1 year	2019/07/10
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2019/11/06
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2019/08/15

Software	Version	Function
e3	V 8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement - TR3
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement - AC1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB
Output Power - TR3
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Power Spectrum Density - TR3
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.15dB
Occupied Bandwidth - TR3
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%

7. TEST RESULT

7.1. Summary

Product Name: 2.4GHz/5GHz WiFi + Bluetooth Combination Module

FCC ID: TK4WSD377

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	≥ 500kHz		Pass	Section 7.3
15.407(a)(1)(ii), (2), (3)	Maximum Conducted Output Power	Refer to section 7.4		Pass	Section 7.4
15.407(h)(1)	Transmit Power Control	≤ 24 dBm		N/A	Section 7.5
15.407(a)(1)(ii), (2), (3), (5)	Peak Power Spectral Density	Refer to section 7.6		Pass	Section 7.6
15.407(g)	Frequency Stability	± 20 ppm		Pass	Section 7.7
15.407(b)(1), (4)(i)	Undesirable Emissions	Refer to Section 7.8	Radiated	Pass	Section 7.8 & 7.9
15.205, 15.209 15.407(b)(5), (6), (7)	General Field Strength Limits(Restricted Bands andRadiated Emission Limits)	Emissions in restrictedbands must meet theradiated limits detailed in15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.10

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.

7.2. 26dB Bandwidth Measurement

7.2.1. Test Limit

N/A


7.2.2. Test Procedure used

KDB 789033 D02v02r01 - Section C.1

7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. $VBW \geq 3 \times RBW$.
4. Detector = Peak.
5. Trace mode = max hold.

7.2.4. Test Setup

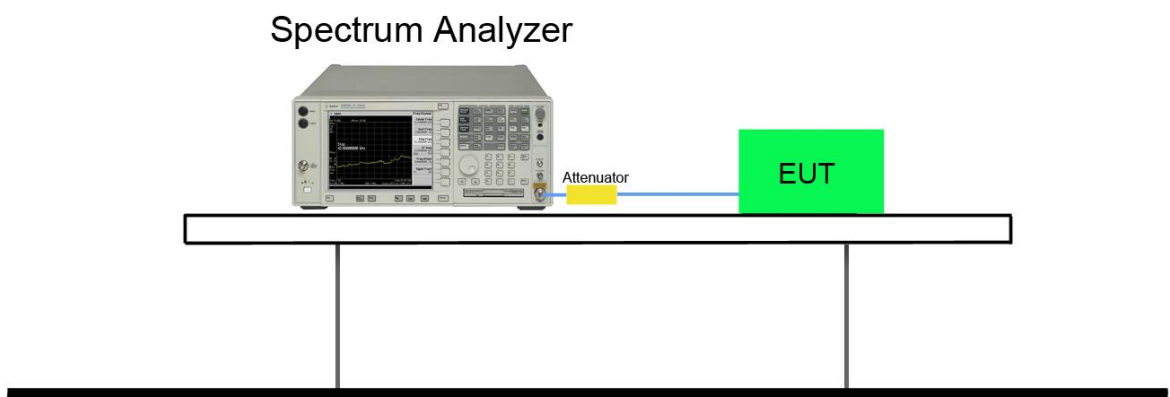

7.2.5. Test Result

Product	2.4GHz/5GHz WiFi + Bluetooth Combination Module	Temperature	24°C
Test Engineer	Flag Yang	Relative Humidity	59%
Test Site	TR3	Test Date	2018/12/19

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11a	6Mbps	36	5180	18.75	16.25
802.11a	6Mbps	44	5220	18.73	16.25
802.11a	6Mbps	48	5240	18.33	16.30
802.11a	6Mbps	52	5260	19.27	16.26
802.11a	6Mbps	60	5300	19.17	16.24
802.11a	6Mbps	64	5320	19.04	16.29
802.11a	6Mbps	100	5500	18.53	16.25
802.11a	6Mbps	120	5600	18.97	16.25
802.11a	6Mbps	140	5700	18.97	16.28
802.11a	6Mbps	149	5745	18.33	16.24
802.11a	6Mbps	157	5785	19.46	16.27
802.11a	6Mbps	165	5825	19.50	16.26
802.11n-HT20	MCS0	36	5180	19.52	17.38
802.11n-HT20	MCS0	44	5220	19.49	17.41
802.11n-HT20	MCS0	48	5240	19.71	17.44
802.11n-HT20	MCS0	52	5260	19.84	17.44
802.11n-HT20	MCS0	60	5300	19.23	17.45
802.11n-HT20	MCS0	64	5320	19.70	17.43
802.11n-HT20	MCS0	100	5500	19.54	17.38
802.11n-HT20	MCS0	120	5600	19.57	17.39
802.11n-HT20	MCS0	140	5700	19.72	17.41
802.11n-HT20	MCS0	149	5745	19.60	17.42
802.11n-HT20	MCS0	157	5785	19.91	17.36
802.11n-HT20	MCS0	165	5825	19.59	17.40




Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11n-HT40	MCS0	38	5190	39.58	35.73
802.11n-HT40	MCS0	46	5230	39.60	35.81
802.11n-HT40	MCS0	54	5270	40.85	35.89
802.11n-HT40	MCS0	62	5310	40.48	35.83
802.11n-HT40	MCS0	102	5510	39.45	35.80
802.11n-HT40	MCS0	118	5590	39.49	35.81
802.11n-HT40	MCS0	134	5670	39.36	35.76
802.11n-HT40	MCS0	151	5755	38.95	35.73
802.11n-HT40	MCS0	159	5795	38.93	35.80
802.11ac-VHT20	MCS0	36	5180	19.72	17.39
802.11ac-VHT20	MCS0	44	5220	19.49	17.44
802.11ac-VHT20	MCS0	48	5240	19.46	17.42
802.11ac-VHT20	MCS0	52	5260	19.38	17.43
802.11ac-VHT20	MCS0	60	5300	19.51	17.41
802.11ac-VHT20	MCS0	64	5320	19.40	17.43
802.11ac-VHT20	MCS0	100	5500	19.16	17.42
802.11ac-VHT20	MCS0	120	5600	19.41	17.45
802.11ac-VHT20	MCS0	140	5700	19.63	17.43
802.11ac-VHT20	MCS0	149	5745	19.19	17.41
802.11ac-VHT20	MCS0	157	5785	19.63	17.43
802.11ac-VHT20	MCS0	165	5825	19.39	17.44
802.11ac-VHT40	MCS0	38	5190	41.55	35.76
802.11ac-VHT40	MCS0	46	5230	39.09	35.85
802.11ac-VHT40	MCS0	54	5270	38.99	35.81
802.11ac-VHT40	MCS0	62	5310	39.95	35.80
802.11ac-VHT40	MCS0	102	5510	38.99	35.78
802.11ac-VHT40	MCS0	118	5590	39.19	35.80
802.11ac-VHT40	MCS0	134	5670	39.26	35.79
802.11ac-VHT40	MCS0	151	5755	38.88	35.79
802.11ac-VHT40	MCS0	159	5795	39.44	35.80


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11ac-VHT80	MCS0	42	5210	81.44	74.89
802.11ac-VHT80	MCS0	58	5290	81.59	75.11
802.11ac-VHT80	MCS0	106	5530	81.89	75.05
802.11ac-VHT80	MCS0	122	5610	81.56	75.06
802.11ac-VHT80	MCS0	155	5775	80.78	74.94

802.11a 26dB Bandwidth & 99% Bandwidth

Channel 36 (5180MHz)

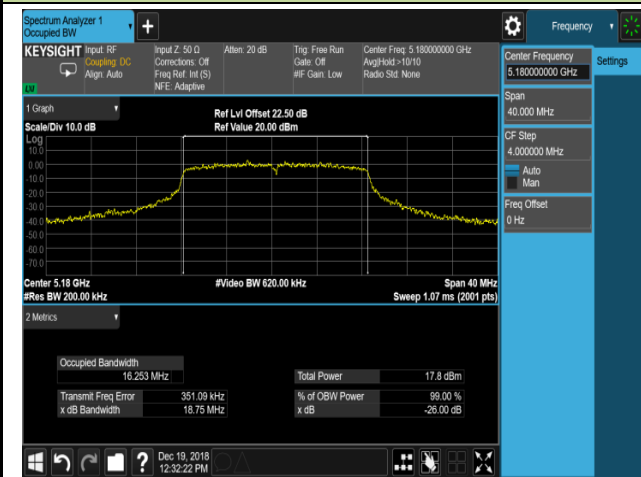


Channel 44 (5220MHz)

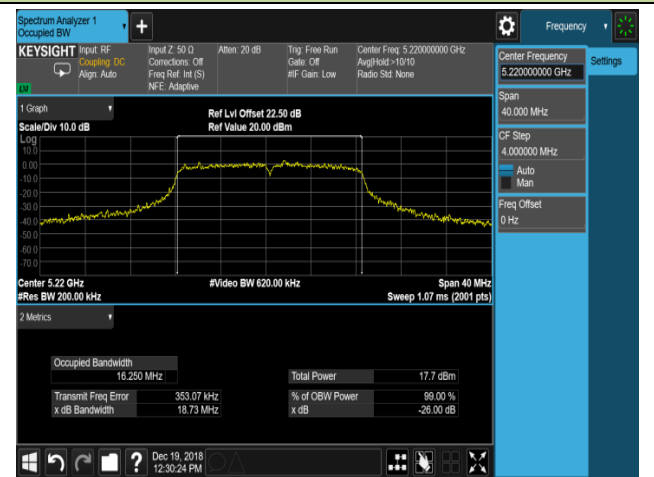


Channel 48 (5240MHz)




Channel 52 (5260MHz)

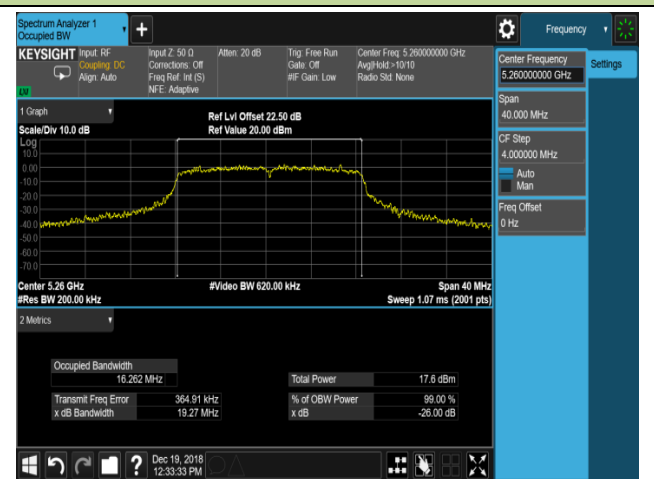


Channel 60 (5300MHz)

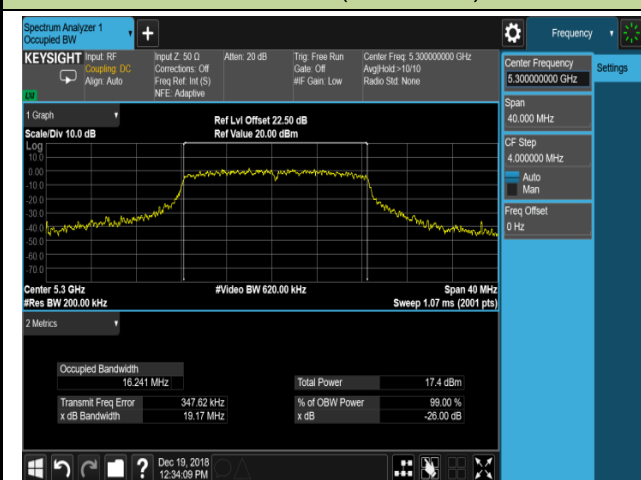


Channel 64 (5320MHz)

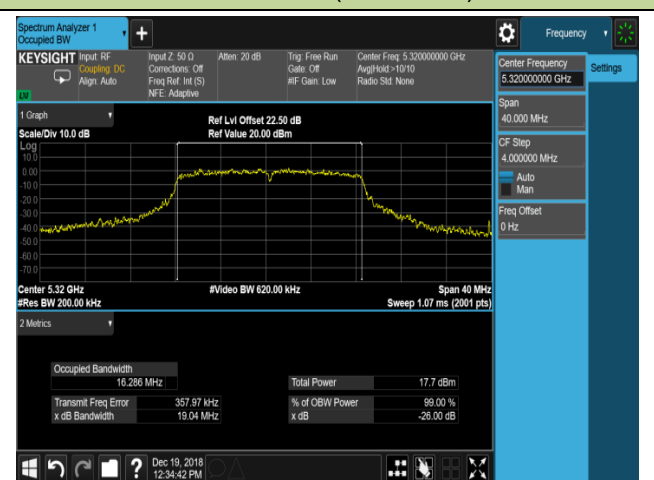

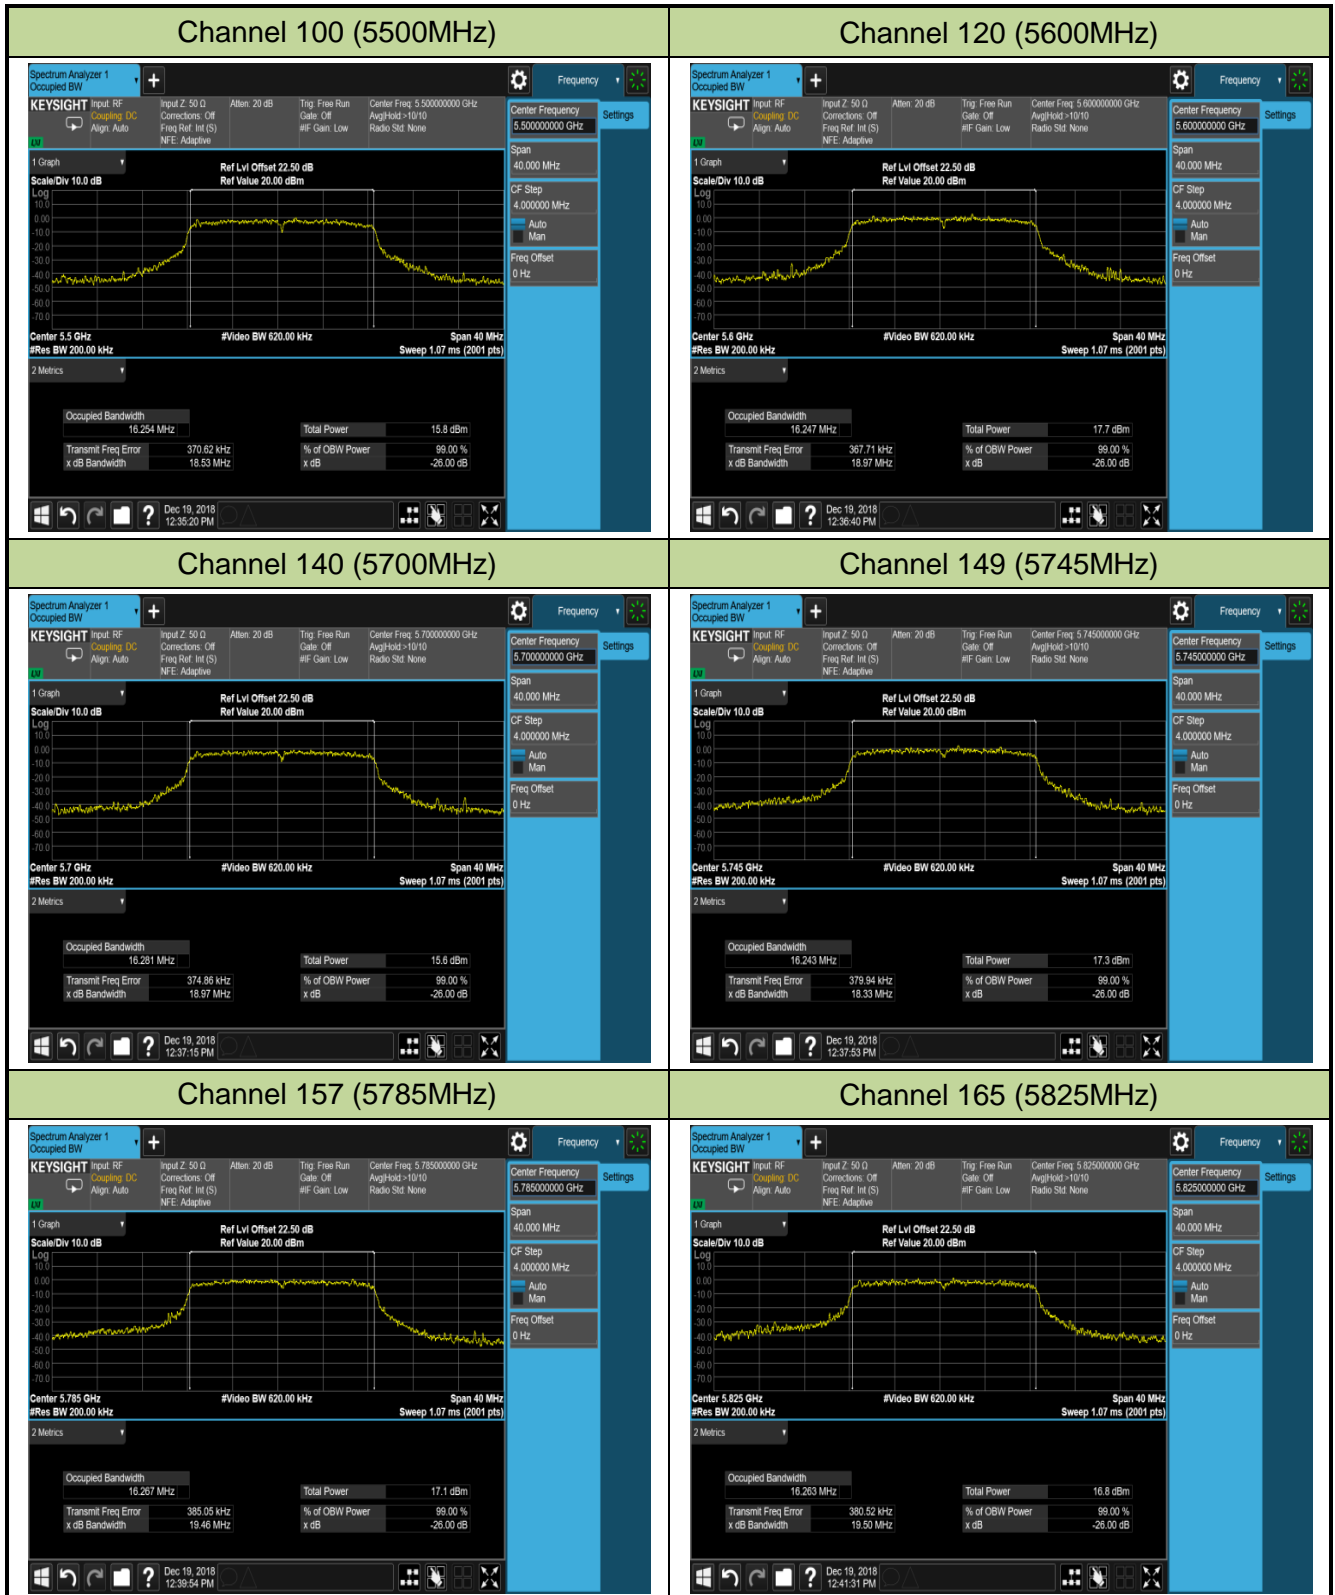


802.11n-HT20 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

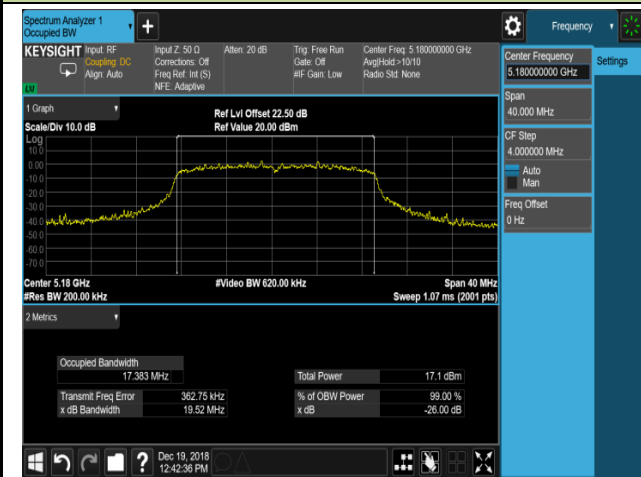

Channel 44 (5220MHz)

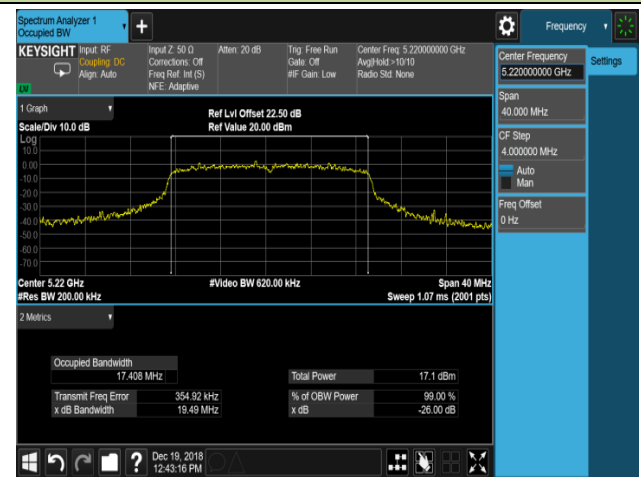


Channel 48 (5240MHz)

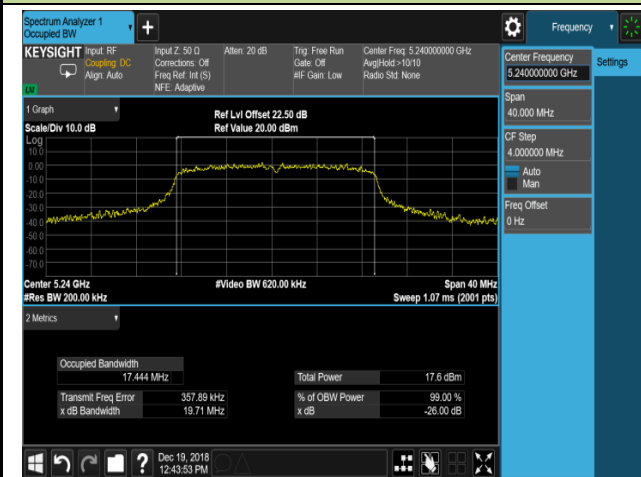

Channel 52 (5260MHz)




Channel 60 (5300MHz)

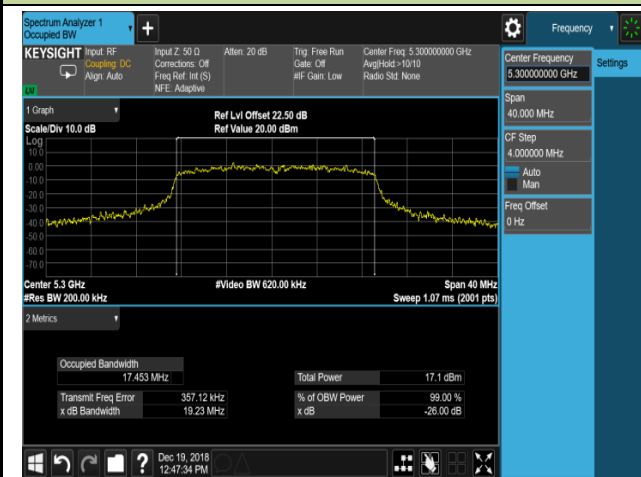


Channel 64 (5320MHz)



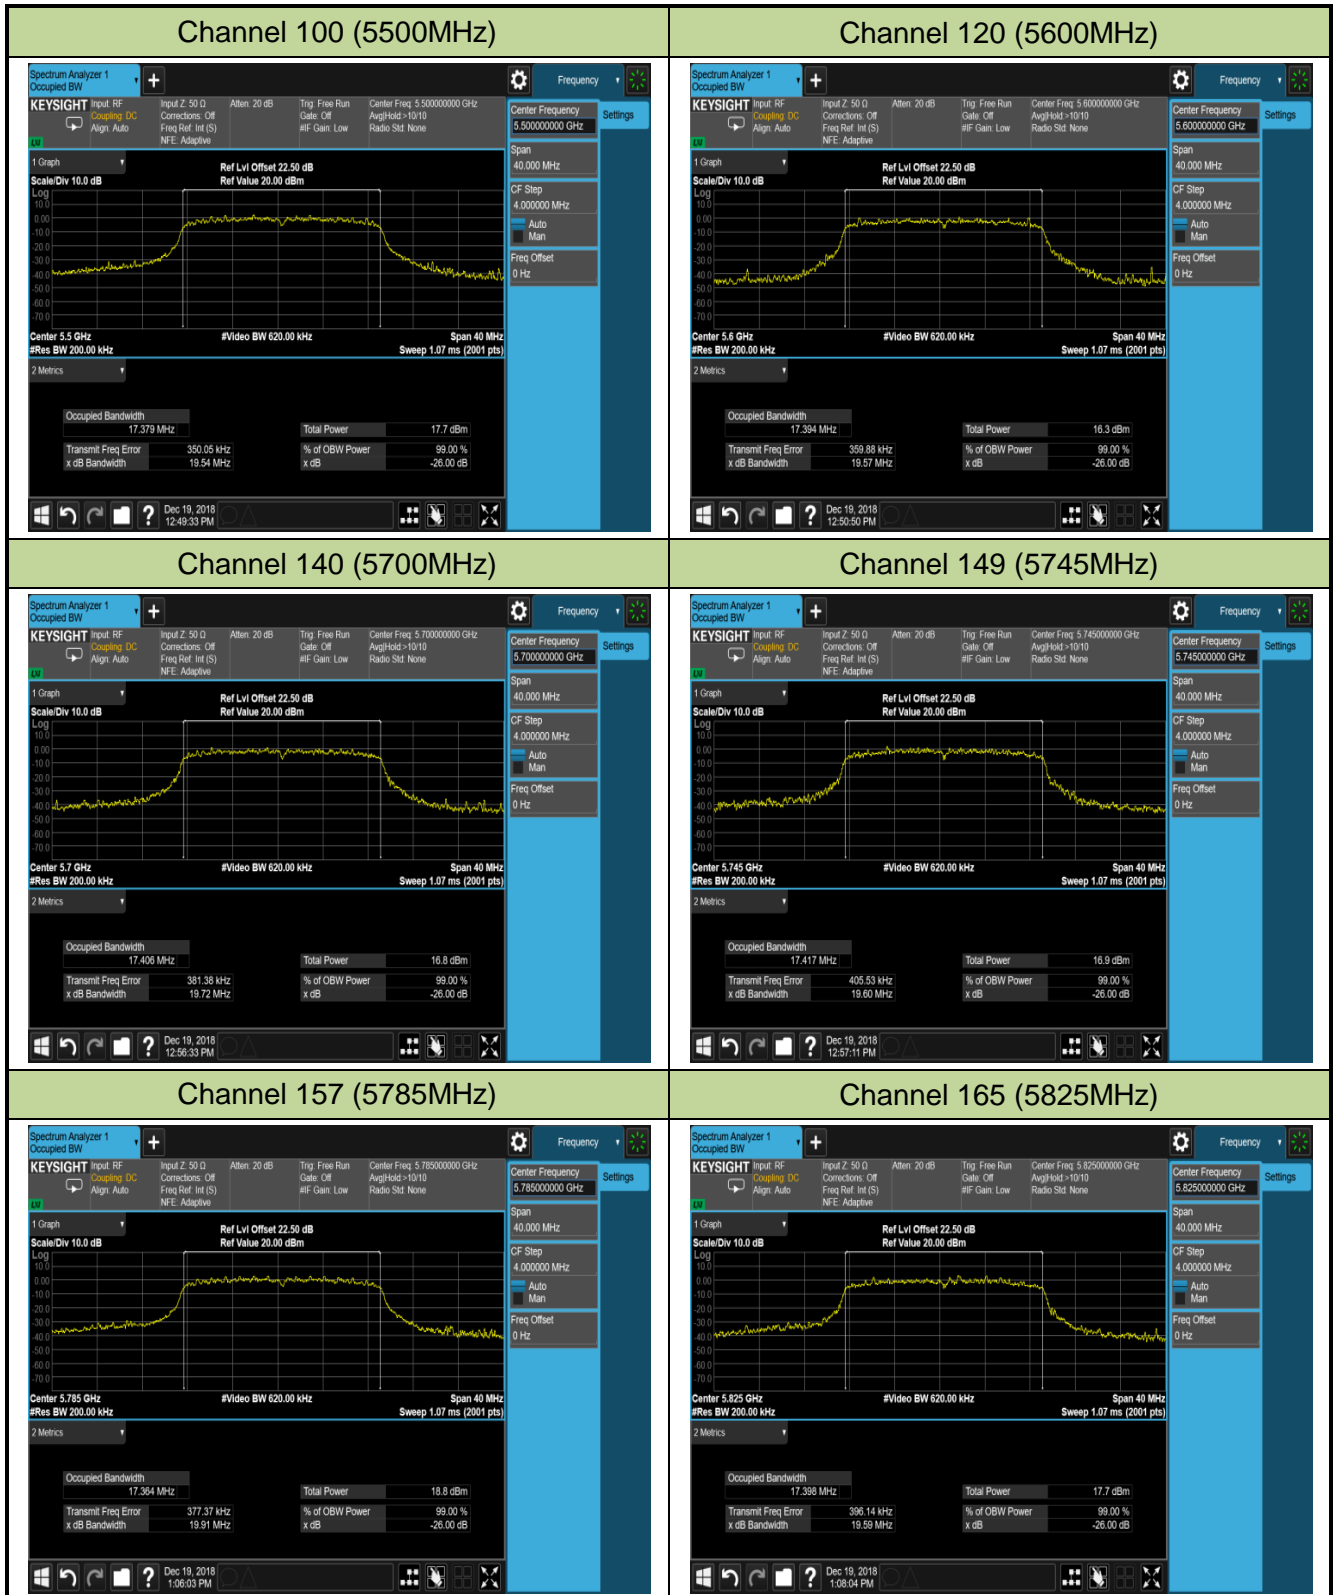


802.11n-HT40 26dB Bandwidth & 99% Bandwidth


Channel 38 (5190MHz)

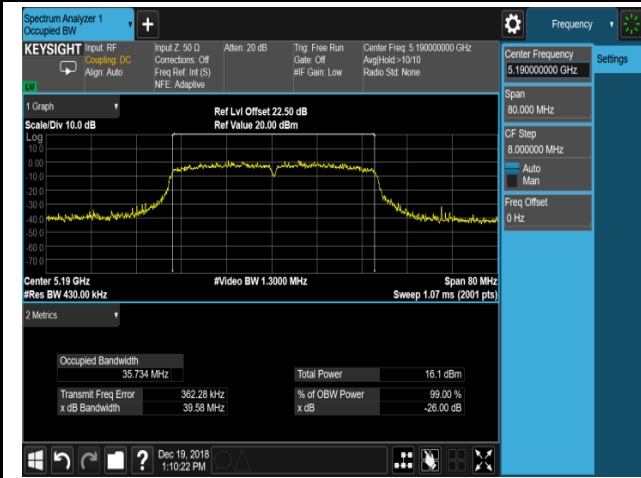


Channel 46 (5230MHz)

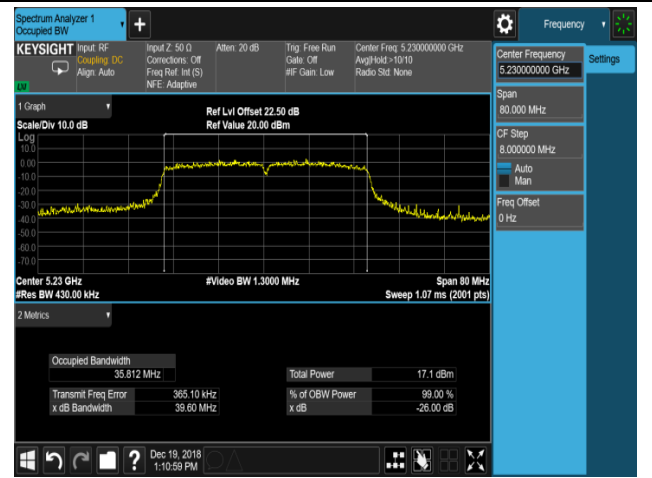


Channel 54 (5270MHz)

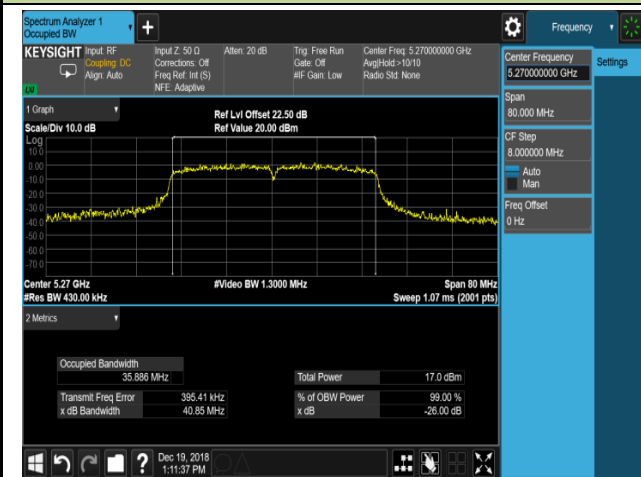


Channel 62 (5310MHz)

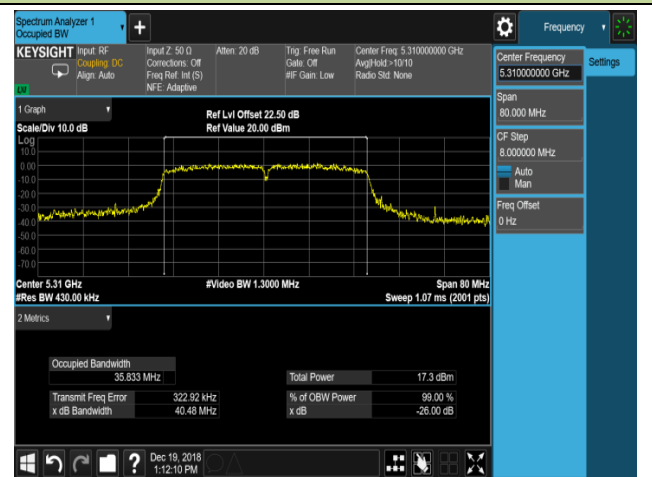

Channel 102 (5510MHz)

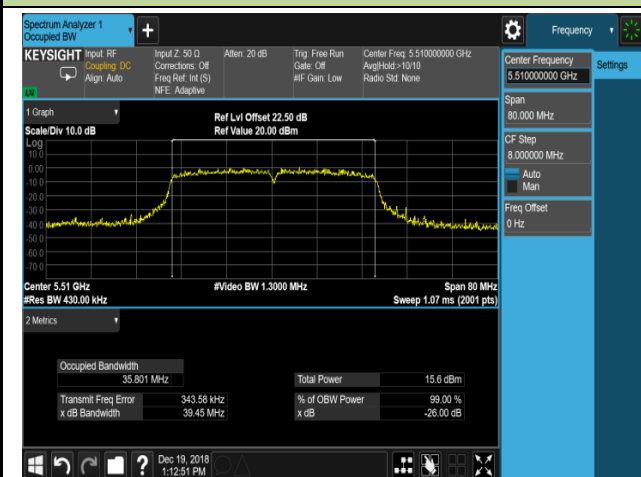


Channel 118 (5590MHz)

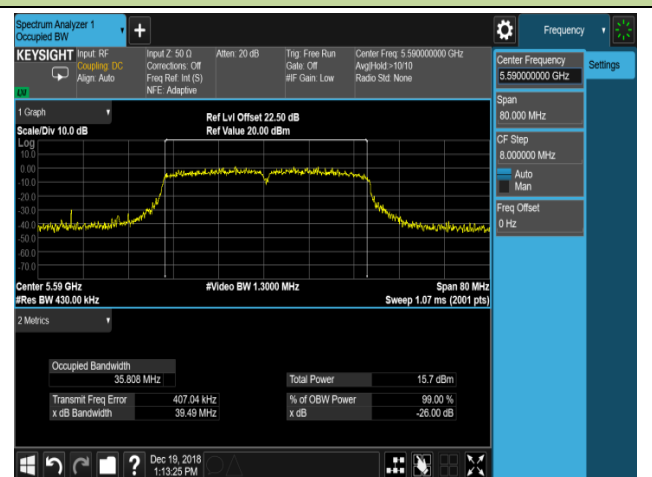




802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth

Channel 36 (5180MHz)

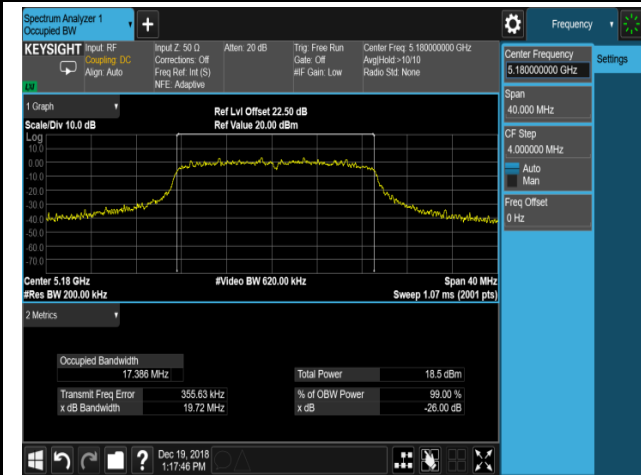

Channel 44 (5220MHz)

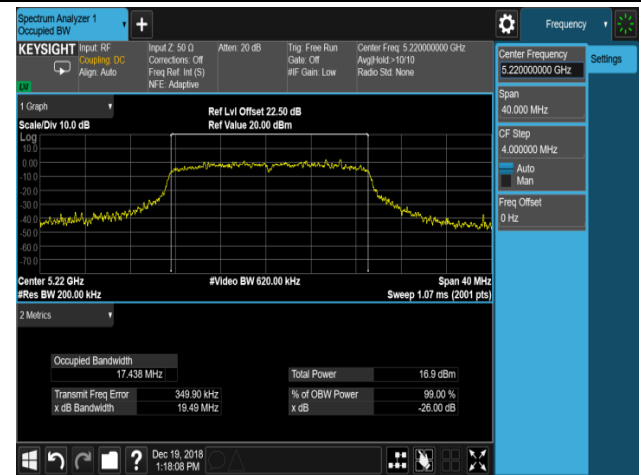


Channel 48 (5240MHz)




Channel 52 (5260MHz)




Channel 60 (5300MHz)

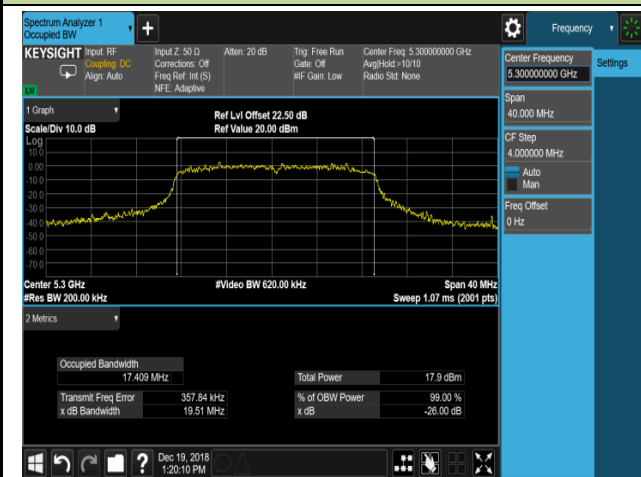


Channel 64 (5320MHz)

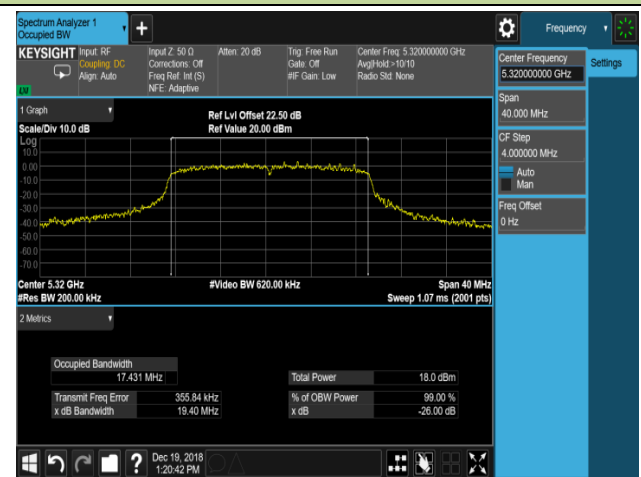

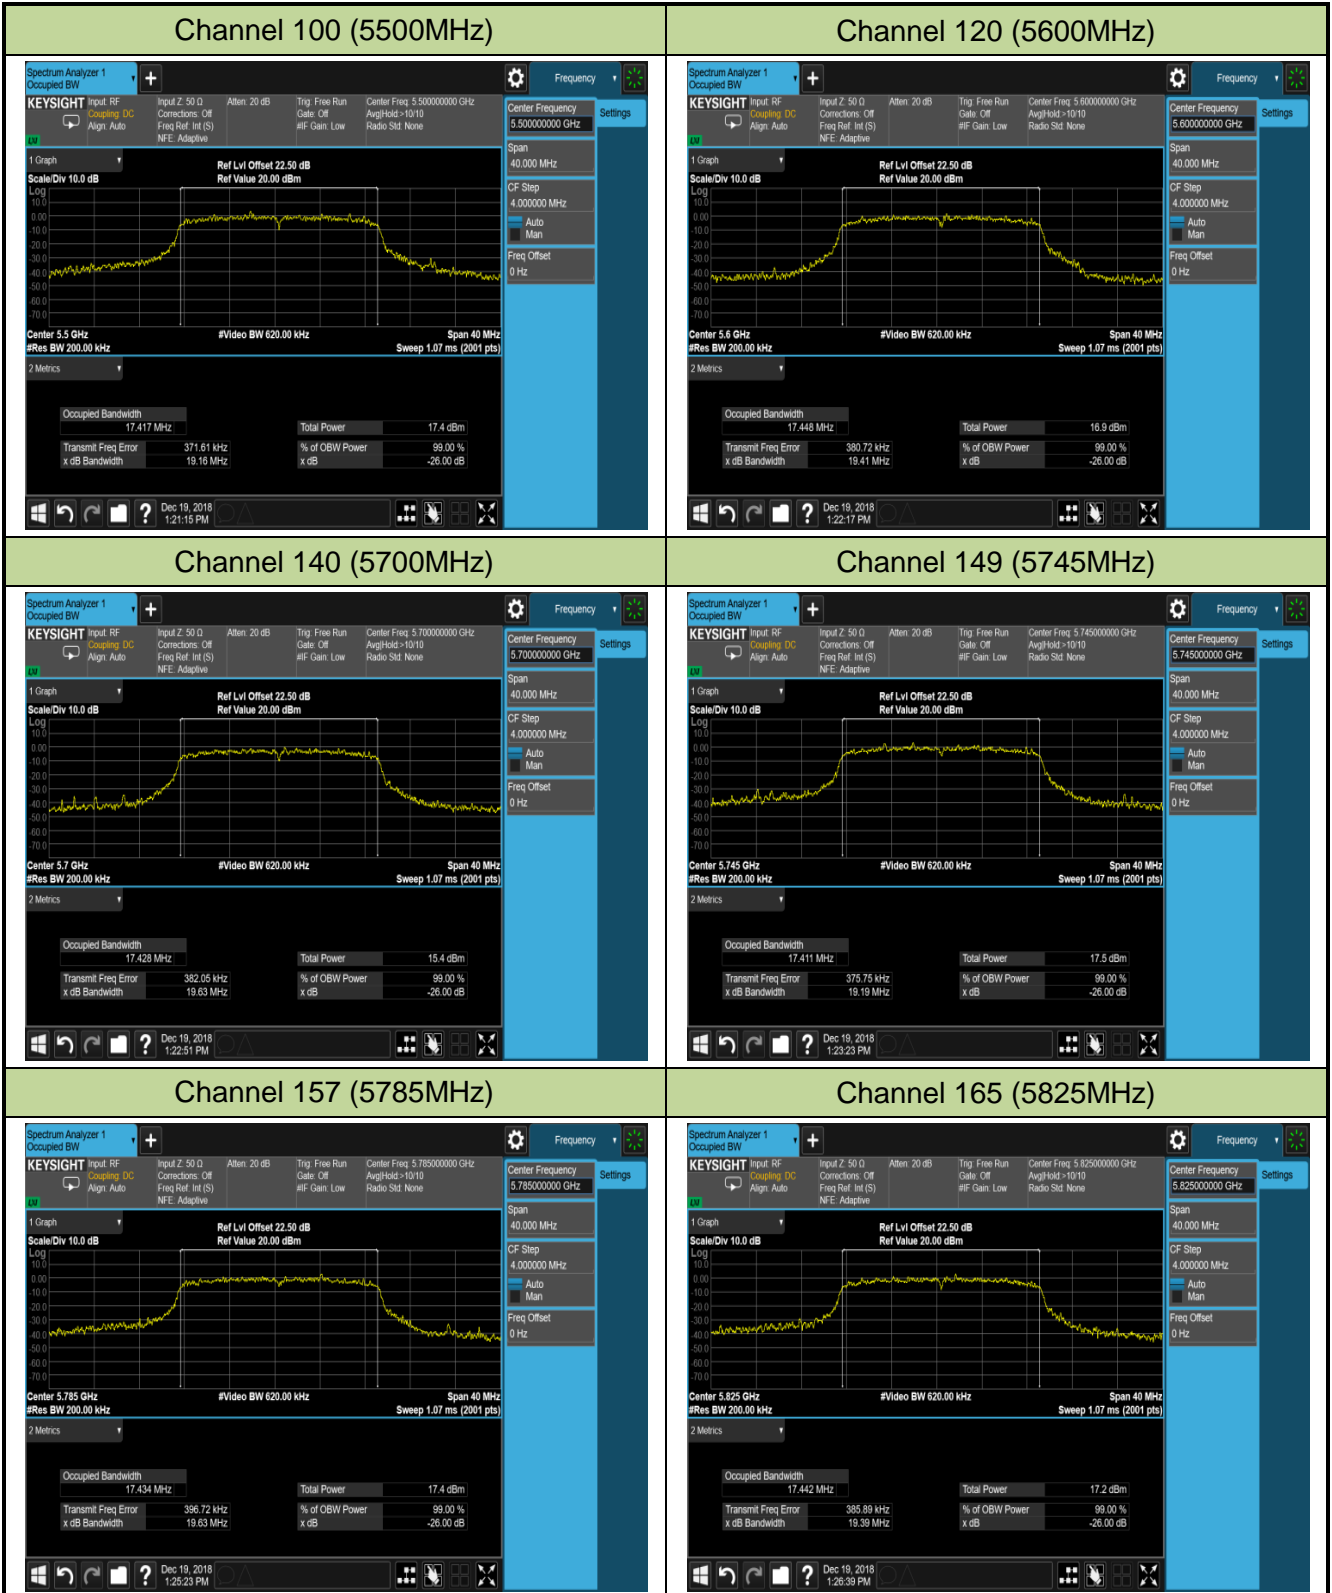


802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth


Channel 38 (5190MHz)

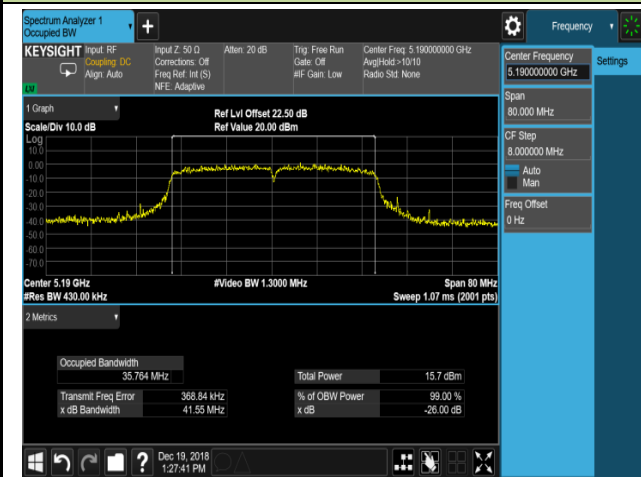

Channel 46 (5230MHz)

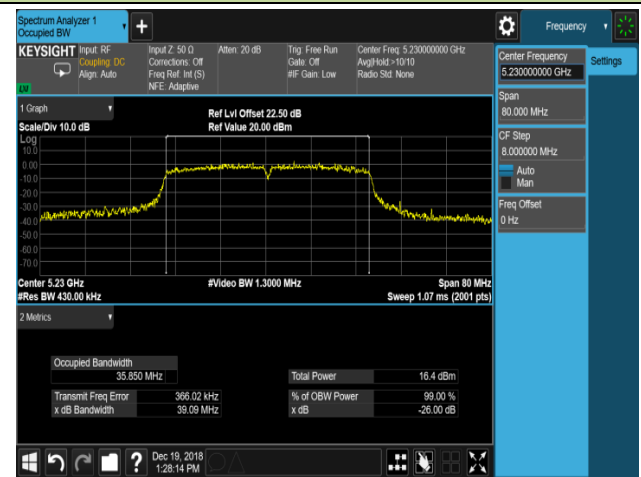


Channel 54 (5270MHz)

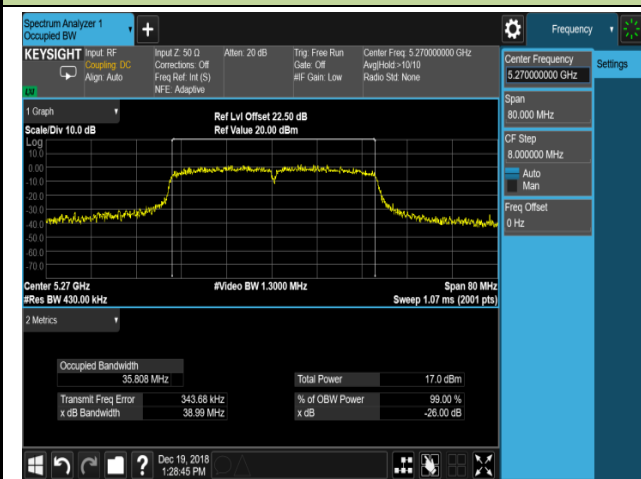

Channel 62 (5310MHz)



Channel 102 (5510MHz)

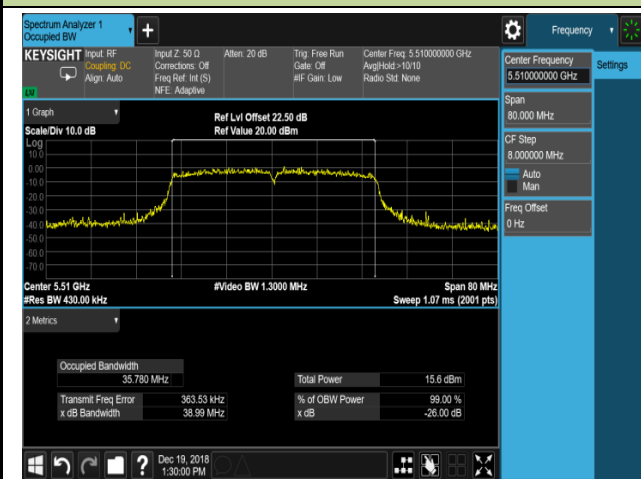

Channel 118 (5590MHz)



