



Test Report for FCC

FCC ID : TKWBLN2-ODB

Report Number		ESTEFC1804-002			
Applicant	Company name	Suprema Inc			
	Address	16F Parkview office Tower, 248, Jeongjail-ro, Bundang-gu, Seongnam-si, Gyeonggi-do			
	Telephone	82-31-710-4908			
	Contact Person	Bongseop Song			
	Factory address	16F Parkview office Tower, 248, Jeongjail-ro, Bundang-gu, Seongnam-si, Gyeonggi-do			
Product	Product name	BioLite N2			
	Model No.	BLN2-ODB	Manufacturer	Suprema Inc	
	Serial No.	NONE	Country of origin	Korea	
Test date	6-Apr-18		Date of issued	17-Apr-18	
Test location	EMC Test Lab 140-16, Eongmali-ro, Majang-myeon, Icheon-si, Gyeonggi-do, R.O.Korea				
Standard	FCC PART 15 Subpart B , ANSI C 63.4(2014)				
Test item	<input checked="" type="checkbox"/> Conducted Emission	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B	Test result	OK
	<input checked="" type="checkbox"/> Radiated Emission	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B	Test result	OK
Measurement facility registration number		659627			
Tested by	Senior Engineer S.B. Lee		(Signature)		
Reviewed by	Engineering Manager J.M. Yang		(Signature)		
Abbreviation	OK, Pass = Complied, Fail = Failed, N/A = not applicable				
* Note					
<ul style="list-style-type: none"> - This test report is not permitted to copy partly without our permission - This test result is dependent on only equipment to be used - This test result based on a single evaluation of one sample of the above mentioned 					

Contents

1. Laboratory Information	3
2. Description of EUT	4
3. Test Standards	5
4. Measurement condition	6
5. Measurement of radiated emission	8
5.1 Measurement equipment	8
5.2 Environmental conditions	8
5.3 Test data(below 1 GHz)	9-1
5.4 Test data(above 1 GHz)	9-2
6. Measurement of conducted emission	10
6.1 Measurement equipment	10
6.2 Environmental conditions	10
6.3 Test data	11
7. Photographs of test setup	12
8. Photographs of EUT	14

Appendix 1. Special diagram



1. Laboratory Information

1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report. ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

1.2 Test Lab.

Corporation Name : ESTECH Co., Ltd.

Head Office : 1015ho, 2cha, world venture center, 123, Gasan digital 2-ro, Geumcheon-gu, Seoul, South Korea

EMC Test Lab : 140-16, Eongmalli-ro, Majang-myeon, Icheon-si, Gyeonggi-do, R.O.Korea

1.3 Official Qualification(s)

MSIT : Granted Accreditation from Ministry of Information & Communication for EMC, Safety and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC requirements

FCC : Conformity Assessment Body(CAB) with registration number 659627 under APEC TEL MRA between the RRA and the FCC.

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE

2. Description of EUT

2.1 Summary of Equipment Under Test

Product	: BioLite N2
Model Number	: BLN2-ODB
Serial Number	: NONE
Manufacturer	: Suprema Inc
Country of origin	: Korea
Sample Receipt Date	: 21-Mar-18
Rating	: DC input : DC 12 V, 2.5 A Adapter : AC (100-240) V, 1.0 A, (50-60) Hz
Testing Voltage	: AC 120 V, 60 Hz
* X-tallist(s) or Frequencies generated	: CPU 1.2 GHz

2.2 General descriptions of EUT

Product Specifications

Category	Feature	Specification
Credential	BioMetric	Fingerprint
	RF Option	<ul style="list-style-type: none"> BLN2-ODB: 125kHz EM & 13.56MHz MIFARE, MIFARE Plus, DESFire/EV1, NFC & 2.4GHz BLE BLN2 OAB: 125kHz EM, HID Prox & 13.56Mhz MIFARE, MIFARE Plus, DESFire/EV1, FelIca, iCI ASS SF/SR, NFC & 2.4GHz/RF
	RF read range*	MIFARE/DESFire/ISO15693: 50 mm, EM/FeliCa: 30 mm
General	CPU	1.2 GHz
	Memory	4GB Flash + 54Mb RAM
	LCD type	1.77" color TFT LCD
	LCD resolution	160 x 128 pixels
	Sound	16-bit
	Operating temperature	-20 °C ~ 50 °C
	Storage temperature	40 °C ~ 70 °C
	Operating humidity	0 % ~ 80 %, non-condensed
	Storage humidity	0 % ~ 90 %, non-condensed
	Dimension (W x H x D)	58 mm x 190 mm x 44 mm (Bottom) / 34 mm (Top)
	Weight	Device: 255 g Bracket: 57 g (including washers and bolts)
	IP rating	IP67
Certificates	CE, FCC, KC, RoHS, REACH, WEEE	
Fingerprint	Image dimension	272 x 320 pixels
	Image bit depth	8 bits 256 grayscale
	Resolution	500 dpi
	Template	SUPRFMA / ISO 19794-2 / ANSI 378
Capacity	Extractor / Matcher	MINEX certified and compliant
	Max. User (1:1)	10,000
	Max. User (1:N)	10,000
	Max. Template (1:1)	20,000 (Two templates per finger)
	Max. Template (1:N)	20,000 (Two templates per finger)
Interface	Max. Text Log	1,000,000
	Ethernet	Supported (10/100 Mbps, auto MDI/MDI-X)
	RS-485	1ch Master / Slave (Selectable)
	Wiegand	1 ch Input / Output (Selectable)
	TTL input	2 ch Input
	Relay	1 Relay
	Tamper	Supported
Electrical	Power	Voltage: DC 12V Current: Max. 0.5 A
	Switch input VIH	Min. 3 V Max. 5 V
	Switch input VIL	Max. 1 V
	Switch pull up resistor	4.7 kΩ (The input ports are pulled up with 4.7 kΩ.)
	Wiegand output VOH	More than 4.8V
	Wiegand output VOL	Less than 0.2 V
	Wiegand output pull-up resistor	Internal pull-up with 1 kΩ
Relay	Voltage: Max. 30 VDC Current: Max. 2A	

* RF read range will vary depending on the installation environment.



3. Test Standards

Test Standard : FCC PART 15 Subpart B

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

Test Method : ANSI C 63.4 (2014)

This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.


4. Measurement Condition

4.1 EUT Operation.

- The EUT was in the following operation mode during all testing.

1. Monitor the operation status of the apparatus under test using the supplier program.
2. Connect LAN cable Notebook Computer to send / receive ping data.
3. Connected with BioStar 2(Slave Device) to monitor operation status.

4.2 Configuration and Peripherals

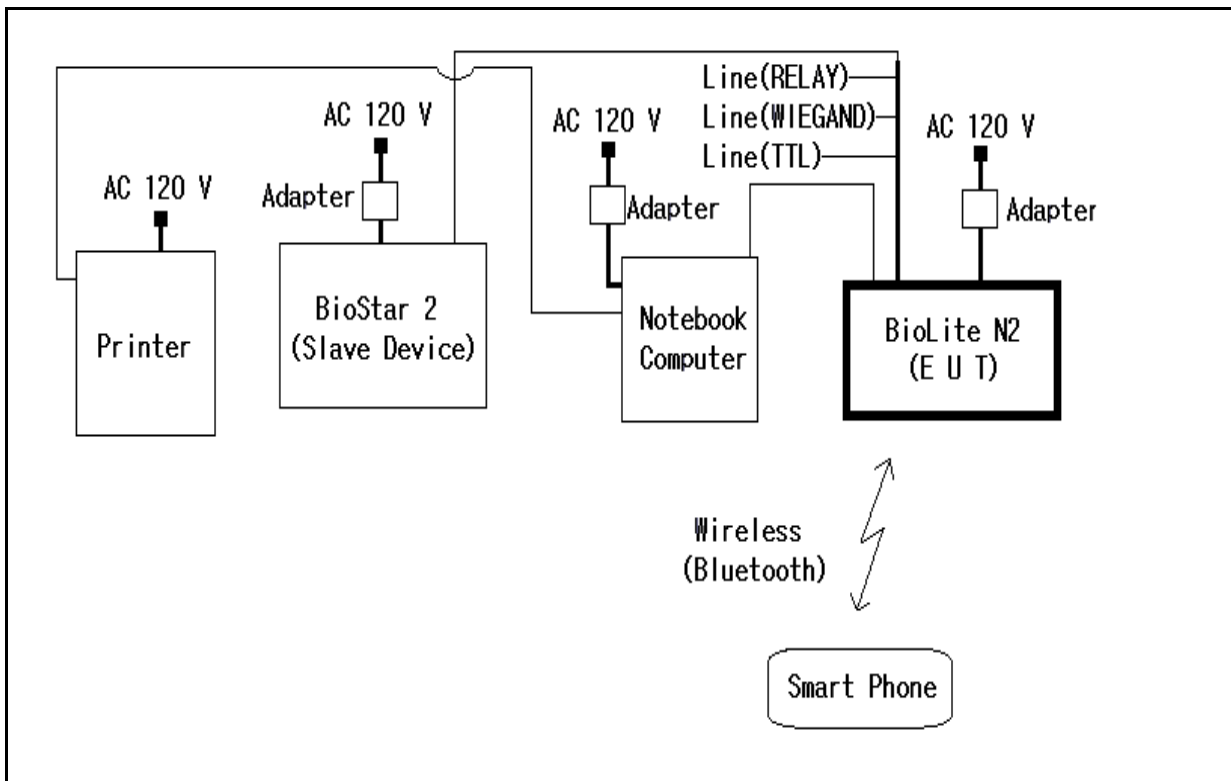

4.3 EUT and Support equipment

Equipment Name	Model Name	S/N	Manufacturer	Remark (FCC ID)
BioLite N2	BLN2-ODB	NONE	Suprema Inc	EUT
Adapter	JPW128KA1200N05	NONE	BridgePower Corp.	
Notebook Computer	GW687AV	CNU0295RBD	HEWLETT-PACKARD COMPANY	
Adapter	Series PPP009H	F1-09031504151D	CANON VITENAM CO., LTD.	
BioStar 2 (Slave Device)	BEP2-OA	NONE	Suprema Inc	
Adapter	JPW128KA1200N05	NONE	BridgePower Corp.	
Printer	K10299	NONE	CANON VITENAM CO., LTD.	
Smart Phone	SM-N910S	R39FA0AADCK	SAMSUNG.	

4.4 Cable Connecting

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
BioLite N2	Power	Adapter	-	2.0	Unshielded	
BioLite N2	Line(RELAY)	-	-	3.0	Shielded	
BioLite N2	Line(WIEGAND)	-	-	3.0	Shielded	
BioLite N2	Line(TTL)	-	-	3.0	Shielded	
BioLite N2	Line(RS-485)	BioStar 2 (Slave Device)	Line(RS-485)	3.0	Shielded	
BioLite N2	LAN	Notebook Computer	LAN	3.0	Unshielded	
BioLite N2	Wireless (Bluetooth)	Smart Phone	Wireless (Bluetooth)	-	-	
Notebook Computer	Power	Adapter	-	2.0	Shielded	
Notebook Computer	USB	Printer	USB	2.0	Shielded	
BioStar 2 (Slave Device)	Power	Adapter	-	2.0	Unshielded	

5. Measurement of radiated disturbance

Above 30 MHz Electric Field strength was measured in accordance with FCC PART 15 Subpart B. The test setup was made according to ANSI C 63.4 (2014) on an 10 m semi-anechoic chamber, which allows a 3 m distance measurement. The EUT was placed in the center of Plastic table. The height of this table was 0.8 m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test setup.

5.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST Receiver	ESCI7	ROHDE & SCHWARZ	100916	31-Oct-18
Logbicon Antenna	VULB 9168	SCHWARZBECK	237	13-Aug-18
Turn Table	DT3000-2t	Innco System GmbH	N/A	N/A
Antenna Mast	MA4000-EP	Innco System GmbH	N/A	N/A
PREAMPLIFIER	8449B	AGILENT	3008A00581	31-Oct-18
Test Receiver	ESPI7	ROHDE & SCHWARZ	100185	31-Oct-18
Horn Antenna	BBHA9120D	SCHWARZBECK	352	3-May-18
Turn Table	DT1500-S	Innco System GmbH	N/A	N/A
Antenna Mast	MA4640-XP-ET	Innco System GmbH	N/A	N/A
Antenna Master & Turn table controller	C02000-P	Innco System GmbH	CO2000/642 /28051111/L	N/A

5.2 Environmental Condition

Below 1 GHz –Test Place : 10 m Semi-anechoic chamber

Temperature (°C) : 22.6 °C

Humidity (% R.H.) : 53.7 % R.H.

Above 1 GHz–Test Place : 3 m Semi-anechoic chamber

Temperature (°C) : 21.4 °C

Humidity (% R.H.) : 51.6 % R.H.

5.3 Test data (Below 1 GHz)

Test Date : 6-Apr-18

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value(Quasi-peak)		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
92.40	24.22	H	2.3	8.30	1.44	43.50	33.96	9.54
168.00	17.37	V	1.0	12.30	1.95	43.50	31.62	11.88
228.00	19.88	V	1.0	10.64	2.31	46.00	32.83	13.17
250.00	29.91	H	1.5	11.56	2.43	46.00	43.90	2.10
300.00	22.90	H	1.0	13.40	2.68	46.00	38.98	7.02
400.00	20.56	H	1.0	15.77	3.10	46.00	39.43	6.57
600.00	19.17	V	1.0	19.82	3.87	46.00	42.86	3.14
Remark	H : Horizontal, V : Vertical *Result Value = Reading + Ant Factor + Cable loss *Margin= Limit - Result *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection							

5.4 Test data (Above 1 GHz)

Test Date : 6-Apr-18

Measurement Distance :

3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
Peak(RBW:1 MHz VBW:1 MHz)								
1844.00	49.24	H	1.0	25.64	-30.67	74.00	44.21	29.79
1844.00	46.36	V	1.0	25.64	-30.67	74.00	41.33	32.67
2422.00	43.99	H	1.0	26.17	-29.86	74.00	40.30	33.70
2422.00	45.72	V	1.0	26.17	-29.86	74.00	42.03	31.97
5164.00	44.46	H	1.0	31.55	-26.78	74.00	49.23	24.77
5164.00	44.86	V	1.0	31.55	-26.78	74.00	49.63	24.37
Average(RBW:1 MHz VBW:10 Hz)								
1844.00	37.91	H	1.0	25.64	-30.67	54.00	32.88	21.12
1844.00	32.59	V	1.0	25.64	-30.67	54.00	27.56	26.44
2422.00	35.53	H	1.0	26.17	-29.86	54.00	31.84	22.16
2422.00	37.75	V	1.0	26.17	-29.86	54.00	34.06	19.94
5164.00	32.44	H	1.0	31.55	-26.78	54.00	37.21	16.79
5164.00	32.14	V	1.0	31.55	-26.78	54.00	36.91	17.09
Remark	<p>H : Horizontal, V : Vertical * Result Value = Reading + Ant Factor + Cable loss - Amplifier Gain * Margin= Limit - Result *The highest operating frequency of the EUT is 1.0 GHz , so the radiated emission measurement was performed up to 13 GHz by requested applicant. *Application method of the highest frequency is in the following *Highest frequency of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. *Highest frequency of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. *Highest frequency of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz. *Highest frequency of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz,</p>							

6. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.15 MHz to 30 MHz was measured in accordance to FCC PART 15 Subpart B . The test setup was made according to ANSI C 63.4 (2014) in a shielded room. The EUT was placed on a non-conductive table at least 0.8 m above the ground plan. A grounded vertical reference plane was positioned in a distance of 0.4 m from the EUT. The distance from the EUT to other metal surfaces was at least 0.8 m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0 m. The test receiver with Quasi Peak detector complies with CISPR 16.

6.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
Test Receiver	ESPI	Rohde & Schwarz	100005	31-Oct-18
LISN	ENV 216	ROHDE & SCHWARZ	101231	23-Aug-18
LISN	ESH3-Z5	Rohde & Schwarz	836679/025	31-Oct-18
Pulse Limiter	ESH3-Z2	Rohde & Schwarz	NONE	31-Oct-18

6.2 Environmental Condition

Test Place : Shielded Room

Temperature (°C) : 21.4 °C

Humidity (% R.H.) : 52.7 % R.H.

6.3 Test data


Test Date : 6-Apr-18

Frequency (MHz)	Correction Factor		Line (H/N)	Quasi-peak Value			Cispr Average Value		
	Lisn (dB)	Cable (dB)		Limit (dB μ V)	Reading (dB μ V)	Result (dB μ V)	Limit (dB μ V)	Reading (dB μ V)	Result (dB)
0.20	0.15	0.19	N	63.82	42.74	43.08	53.82	26.66	27.00
0.26	0.12	0.19	N	61.30	36.55	36.87	51.30	23.24	23.56
0.59	0.16	0.20	N	56.00	39.35	39.71	46.00	35.98	36.34
1.78	0.25	0.26	N	56.00	41.31	41.82	46.00	40.87	41.38
2.37	0.16	0.29	N	56.00	39.48	39.93	46.00	39.33	39.78
11.17	0.63	0.42	N	60.00	34.35	35.40	50.00	29.77	30.82
Remark	H : Hot Line, N : Neutral Line *Correction Factor = Lisn + Cable *Result = Correction Factor + Reading								

7. Photographs of test setup

7.1 Setup for Radiated Test : (30 ~ 1 000) MHz


[Front]

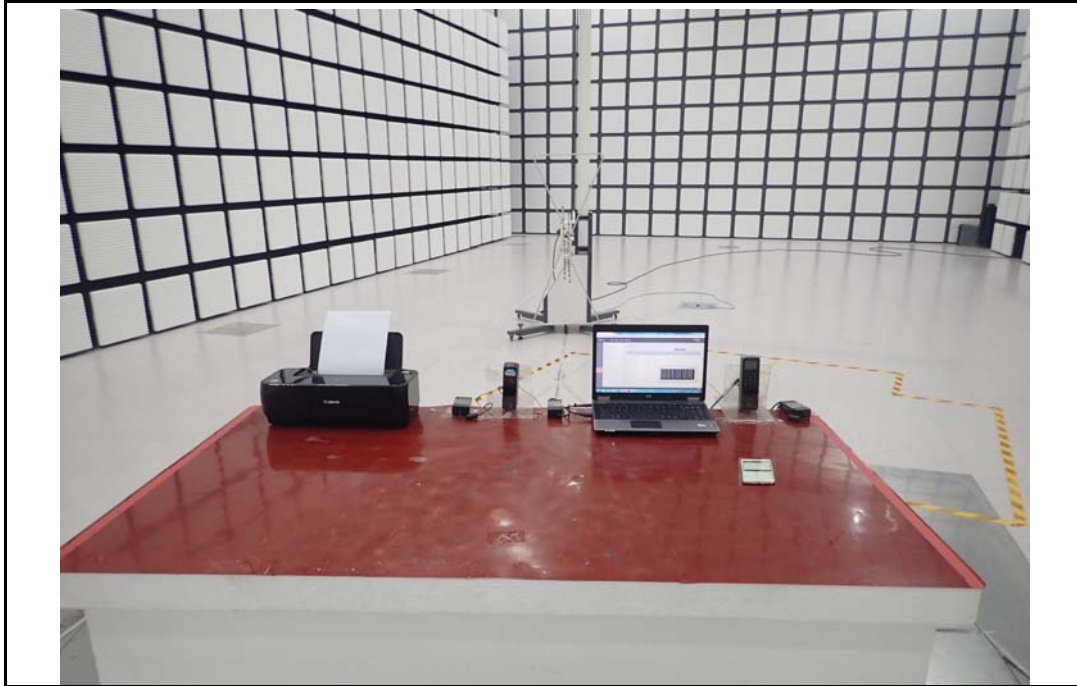


[Rear]



7.2 Setup for Radiated Test : above 1 GHz
[Front]

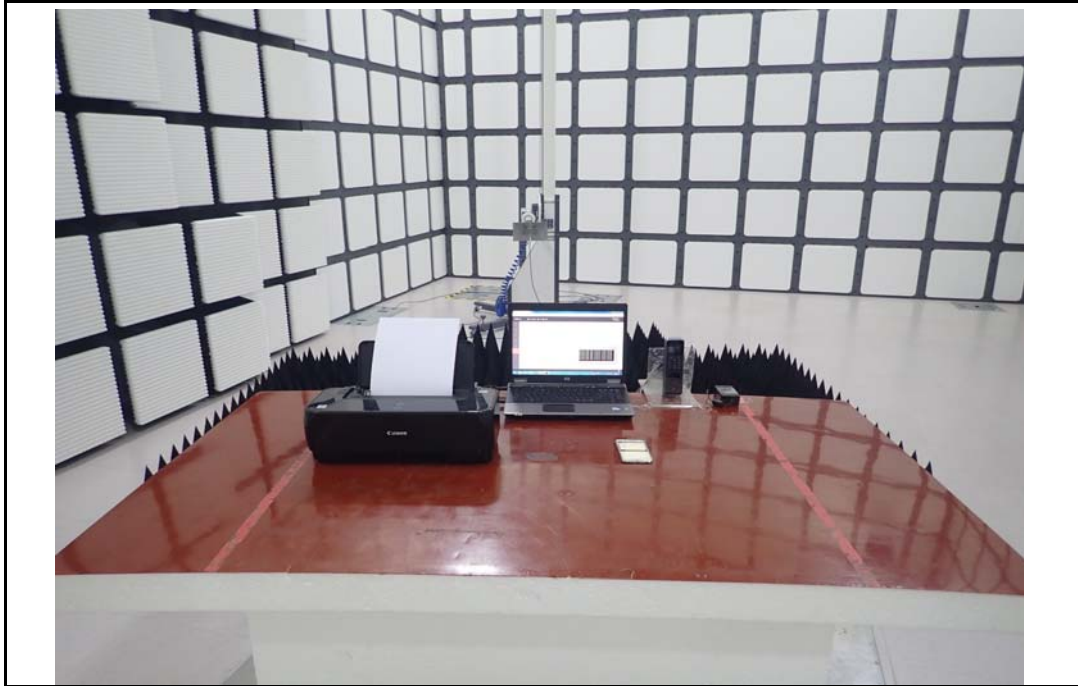

[Rear]

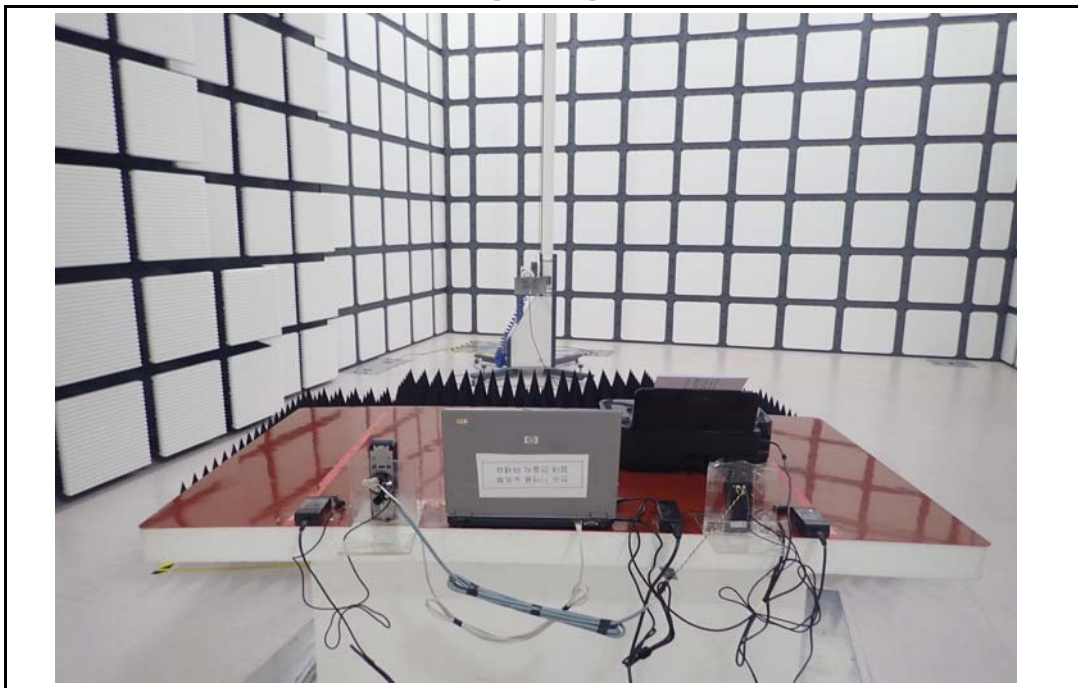

7.3 Setup for Conducted Test : (0.15 ~ 30) MHz

[Front]



[Rear]



8. Photographs of EUT

[Front]




[Rear]



Appendix 1. Special diagram

*HOT

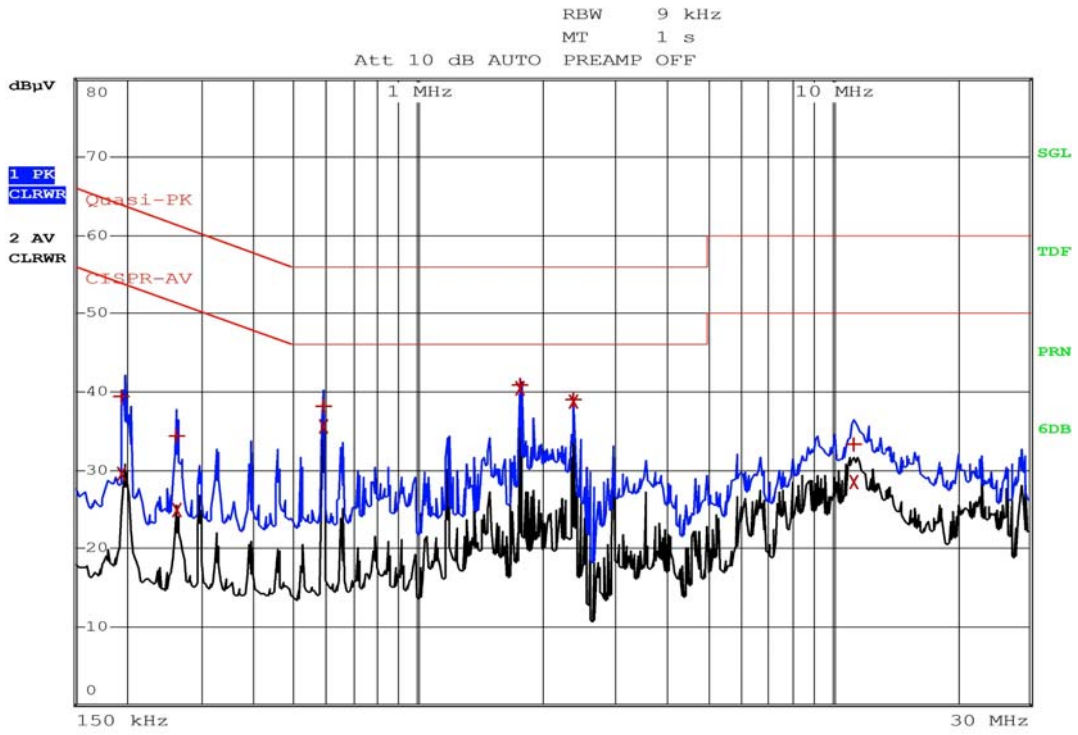


Comment: ESTE-18-03098-HOT
Date: 6.APR.2018 11:34:09

*NEUTRAL



RBW 9 kHz
MT 1 s

Att 10 dB AUTO PREAMP OFF

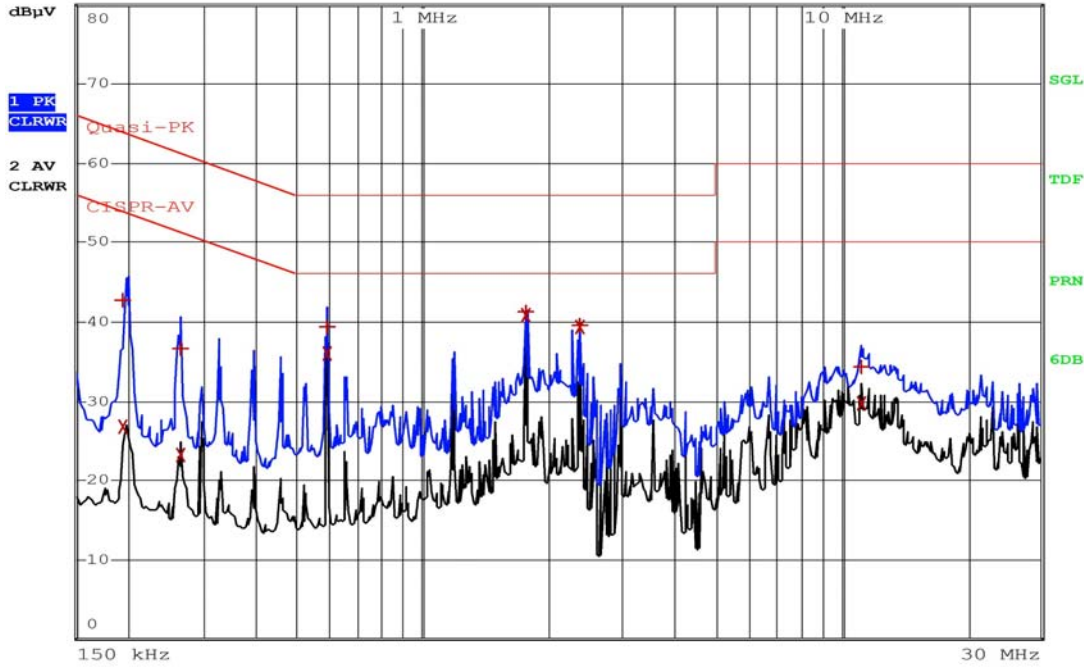

Comment: ESTE-18-03098-NEUTRAL
Date: 6.APR.2018 11:36:20