

**ESTECH Co., Ltd.**Rm 1015, World Venture Center 11,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea**Electromagnetic
Interference
Test Report****Test Report for FCC**

FCC ID:TKWBST2ROC

Report Number		ESTF151104-005			
Applicant	Company name	Suprema Inc.			
	Address	16F Parkview Office Tower, Jeongja-dong, Bundang-gu, Seongnam, Gyeonggi, 463-863 Korea			
	Telephone	82-31-783-4505			
Product	Product name	FINGERPRINT SYSTEM			
	Model No.	BST2R-OC	Manufacturer	Suprema Inc.	
	Serial No.	NONE	Country of origin	Korea	
Test date	7-Apr-11		Date of issue	25-Apr-11	
Testing location	ESTECH Co., Ltd. 97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea				
Standard	FCC PART 15 2010 , ANSI C 63.4 2003				
Test item	<input checked="" type="checkbox"/> Conducted Emission	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B	Test result	OK
	<input checked="" type="checkbox"/> Radiated Emission	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B	Test result	OK
Measurement facility registration number	94696				
Tested by	Engineer S.B.LEE <i>(Signature)</i>				
Reviewed by	Engineering Manager J.M.Yang <i>(Signature)</i>				
Abbreviation	OK, Pass = Complied, Fail = Failed, N/A = not applicable				
<p>* Note</p> <ul style="list-style-type: none"> - This test report is not permitted to copy partly without our permission - This test result is dependent on only equipment to be used - This test result based on a single evaluation of one sample of the above mentioned 					

Contents

1. Laboratory Information	3
2. Description of EUT	4
3. Test Standards	5
4. Measurement condition	6
5. Measurement of radiated emission	8
5.1 Radiated emission limits, general requirements	8
5.2 Measurement equipment	8
5.3 Environmental conditions	8
5.4 Test data	9
6. Measurement of conducted emission	10
6.1 Measurement equipment	10
6.2 Environmental conditions	10
6.3 Test data	11
7. Photographs of test setup	12
8. Photographs of EUT	14

Appendix 1. Spectral diagram

Appendix 2. Antenna Requirement



1. Laboratory Information

1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report. ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

1.2 Test Lab.

Corporation Name : ESTECH Co. Ltd

Head Office : Rm 1015, World Venture Center II, 426-5, Gasan-dong, Geumcheon-gu, Seoul, Korea
(Safety & Telecom. Test Lab)

EMC Test Lab : 58-1 Osan-Ri, GaNam-Myon, YeoJoo-Gun, KyungKi-Do, Korea
97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea

1.3 Official Qualification(s)

KCC : Granted Accreditation from Ministry of Information & Communication for EMC, Safety and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC requirements

FCC : Filed Laboratory at Federal Communications Commission

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE

2. Description of EUT

2.1 Summary of Equipment Under Test

Product : FINGERPRINT SYSTEM
 Model Number : BST2R-OC
 Serial Number : NONE
 Manufacturer : Suprema Inc.
 Country of origin : Korea
 Operating Frequency : 127 kHz
 Antenna Type : Coil Antenna
 Modulation Type : ASK
 Channel Spacing : 1
 Rating : 1. Input : (100 – 240) Va.c., 1.0 A (50 – 60) Hz
 EUT input : 12 Vd.c., 2.5 A
 2. POE(Power Over Ethernet)
 Receipt Date : 30-Mar-11
 X-tail lists : 24.576 MHz, 25.00 MHz, 48.00 MHz, 27.00 MHz, 20.00MHz, 16.00MHz, 12.00MHz*3ea

2.2 General descriptions of EUT

- **CPU : Main B/D CPU - ARM11 667MHz (Samsung S3C6410-667) X 1ea**
Sensor B/D CPU - DSP 400MHz (ADI BP531-400) X 1ea

- **Memory : Main B/D - Flash : Nand MLC 1GByte + Nor 1MByte, SDRAM(mDDR) : 256MByte**
Sensor B/D - Flash : SPI 512Kbyte, SDRAM : 32MByte

- **DISPLAY : 5inch WVGA TFT LCD (800 X 480) X 1ea**
- **LED : 3-Color LED X 2ea**
- **INPUT : Touch Screen X 1ea + 5 Keypad (F1~F4, CALL)**
- **CAMERA : 1.3M CMOS Camera X 1ea**
- **I/O Port : Wiegand In/Out**
 Switch Input X 4ch
 RS-485 X 2ch
 RS-232(Share with RS-485) X 1ch
 Relay(1A@30Vdc) X 2ch
 Ethernet(10/100M) X 1ch
- **Sound Out: System Sound Speaker X 2ea**
- **RF CARD : Mifare / EM**
- **Fingerprint Sensor : OC Sensor Model**
- **Power Input : 12Vdc Adaptor or POE Input**

3. Test Standards

Test Standard : FCC PART 15 (2010)

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

Test Method : ANSI C 63.4 (2003)

This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.

Summary of Test Results


Applied Standard : 47 CFR Part 15, Subpart C				
Standard	Test Type	Result	Remark	Limit
15.203	Antenna Requirement	Pass	See Appendix 2	
15.207	AC Power Conducted Emission	Pass	Meet the requirement	
15.205	Restricted bands	Pass	Meet the requirement	
15.209	Radiated Emission	Pass	Meet the requirement	

4. Measurement Condition

4.1 EUT Operation.

The EUT was measured by transmitter mode continuously.

4.2 Configuration and Peripherals

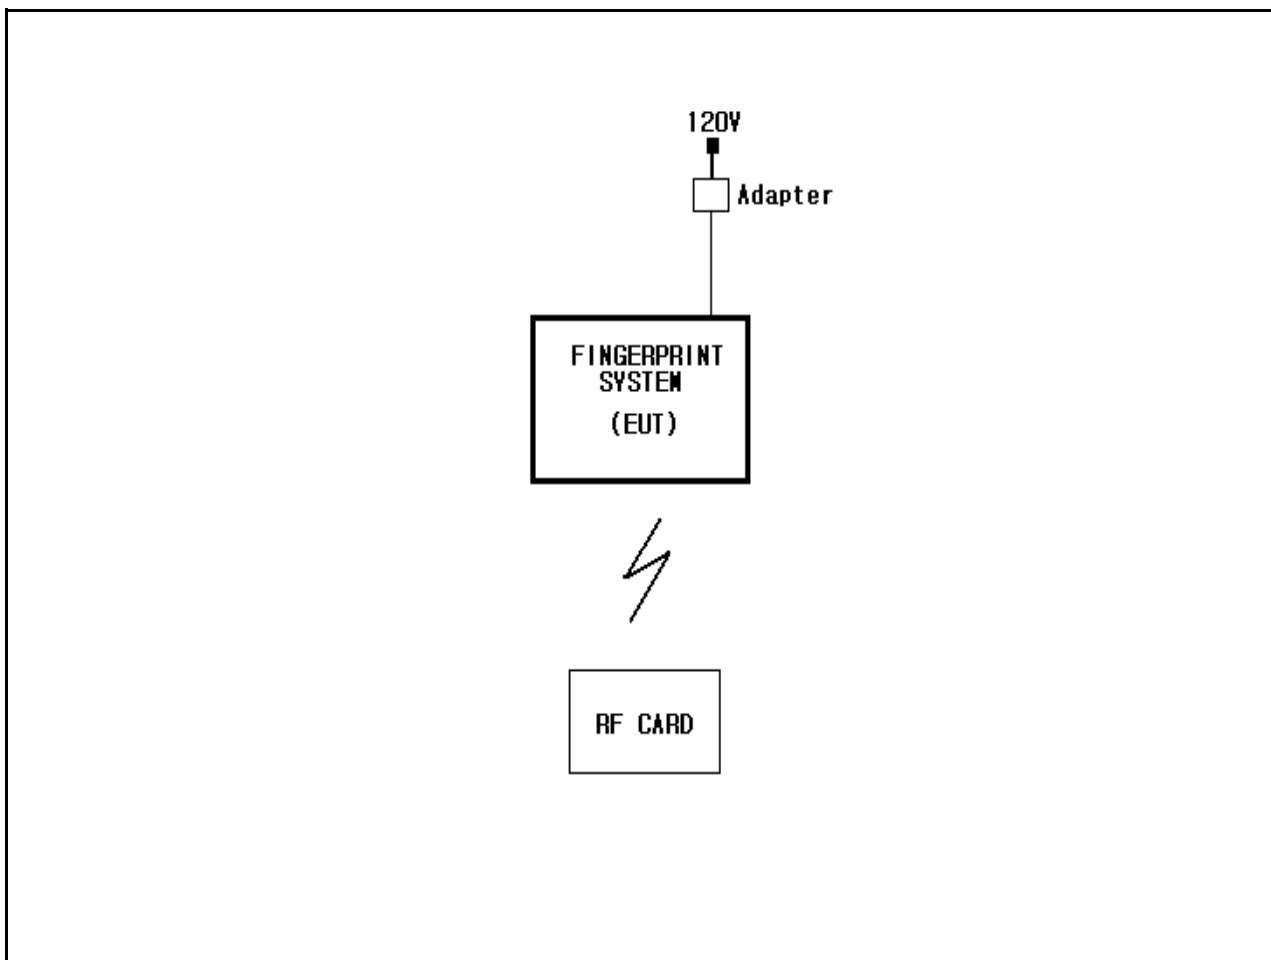

4.3 EUT and Support equipment

Equipment Name	Model Name	S/N	Manufacturer	Remark (FCC ID)
FINGERPRINT SYSTEM	BST2R-OC	NONE	Suprema Inc.	EUT
Adapter	JPW128	KA1200N05	AULT KOREA Corp.	

4.4 Cable Connecting

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
FINGERPRINT SYSTEM	Power	Adapter	-	2	No	

5. Measurement of radiated disturbance

The EUT was placed on the top of a rotating table 0.8 m above the ground at a 3 m Open test site. The table was rotated 360 ° to determine the position of the highest radiation. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 ° to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5.1 Radiated emission limits, general requirements

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength(microvolt/meter)	Distance(meter)
0.009-0.490	2400/F(KHz)	300
0.490-1.705	24000/F(KHz)	30
1.705-30	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

* dBuV/m=20*log(uV/m) * Distance factor=40dB / decade(15.31(f))

5.2 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
Test Receive	ESVS10	Rohde & Schwarz	838562/002	27-Jan-12
Test Receive	ESPI7	Rohde & Schwarz	100185	27-Jan-12
Spectrum Analyzer	R3273	ADVANTEST	110600592	27-Jan-12
Logbicon Antenna	VULB9160	Schwarzbeck	3142	19-May-11
Horn Antenna	BBHA 9120 D	Schwarzbeck	352	14-Jul-12
Amplifier	8447F	HP	2805A02972	27-Jan-12
PREAMPLIFIER	8449B	Sonoma Instrument	300884581	27-Aug-11
Loop Antenna	HFH2-Z2	Rohde & Schwarz	100188	29-Jul-11
Turn Table	2087	EMCO	2129	-
Antenna Mast	2070-01	EMCO	9702-203	-
ANT Mast Controller	2090	EMCO	1535	-
Turn Table Controller	2090	EMCO	1535	-

5.3 Environmental Condition

Test Place : Open site(3m)
 Temperature (°C) : 10 °C
 Humidity (%) : 62 % R.H.

5.4 Test data (9 kHz ~ 30 MHz)

Test Date : 7-Apr-11

Measurement Distance : 3 m

Frequency (kHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value(Qeas-Peak)		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
127.00	64.39	H	1.0	20.00	0.1	105.5	84.47	-21.06

Remark	<p>H : Horizontal, V : Vertical There did not measure any radiated spurious emission in the range 9 kHz to 30 MHz *There is no found Restricted bands. *The 300 m limit was converted to 3m Limit using square factor(x) as it was found by measurements as follows; 3 m Limit(dBuV/m) = 20log(2400/F(KHz))+40log(300/3)= 20log(2400/127)+40log(300/3)</p>
--------	--



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea



**Electromagnetic
Interference
Test Report**

5.4 Test data (30 MHz ~ 1 000 MHz)

Test Date : 7-Apr-11

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value(Quasi-Peak)		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
30.51	16.00	V	1.0	10.45	0.9	40.0	27.33	-12.67
49.91	17.20	H	4.0	11.82	1.1	40.0	30.08	-9.92
84.07	15.10	H	4.0	8.51	1.4	40.0	25.02	-14.98
133.00	17.00	V	1.0	11.69	1.8	43.5	30.51	-12.99
216.07	9.90	V	1.0	11.35	2.5	46.0	23.74	-22.26
225.01	17.00	H	2.8	10.62	2.6	46.0	30.19	-15.81
240.00	14.00	V	1.0	11.48	2.7	46.0	28.17	-17.83
274.95	16.20	V	1.0	12.75	3.0	46.0	32.00	-14.00
316.60	16.00	V	1.0	13.91	3.4	46.0	33.28	-12.72
405.52	15.00	H	1.7	15.90	4.1	46.0	34.96	-11.04
450.00	13.50	H	1.3	16.80	4.5	46.0	34.79	-11.21
516.60	9.20	H	1.0	18.20	4.9	46.0	32.29	-13.71
624.05	12.10	H	1.0	20.41	5.6	46.0	38.15	-7.85
Remark	H : Horizontal, V : Vertical							

6. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.15MHz to 30 MHz was measured in accordance to FCC Part 15 (2010). The test setup was made according to ANSI C 63.4 (2003) in a shielded. The EUT was placed on a non-conductive table at least 0.8 m above the ground plan. A grounded vertical reference plane was positioned in a distance of 0.4 m from the EUT. The distance from the EUT to other metal surfaces was at least 0.8 m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1 m. The test receiver with Quasi Peak detector complies with CISPR 16.

6.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
LISN	ESH3-Z5	Rohde & Schwarz	838979/010	27-Jan-12
LISN	ENV 216	Rohde & Schwarz	101231	13-Aug-11
TEST Receiver	ESPI7	Rohde & Schwarz	100185	24-Aug-11
Pulse Limiter	ESH3Z2	Rohde & Schwarz	NONE	27-Jan-12

6.2 Environmental Condition

Test Place : Shield Room
 Temperature (°C) : 21 °C
 Humidity (%) : 42 % R.H.

6.3 Test data

Test Date : 7-Apr-11

Frequency (MHz)	Correction Factor		Line (H/N)	Quasi-peak Value			Average Value		
	Lisn (dB)	Cable (dB)		Limit (dB μ V)	Reading (dB μ V)	Result (dB μ V)	Limit (dB μ V)	Reading (dB μ V)	Result (dB)
0.19	0.10	0.0	N	63.91	38.62	38.75	53.91	29.36	29.49
0.20	0.10	0.0	N	63.78	36.06	36.19	53.78	27.90	28.03
0.25	0.10	0.1	N	61.66	32.53	32.70	51.66	25.31	25.48
0.26	0.10	0.1	N	61.50	38.21	38.38	51.50	27.59	27.76
0.31	0.10	0.1	N	59.86	33.98	34.19	49.86	27.65	27.86
0.36	0.10	0.1	N	58.73	31.93	32.16	48.73	30.63	30.86
0.63	0.10	0.2	H	56.00	35.29	35.59	46.00	28.32	28.62
0.65	0.10	0.2	N	56.00	31.59	31.89	46.00	25.27	25.57
0.75	0.10	0.2	H	56.00	30.77	31.07	46.00	24.41	24.71
0.95	0.10	0.2	H	56.00	45.61	45.91	46.00	36.33	36.63
0.99	0.10	0.2	H	56.00	34.24	34.54	46.00	27.33	27.63
1.26	0.10	0.2	H	56.00	31.05	31.38	46.00	23.01	23.34
11.14	0.32	0.6	H	60.00	35.95	36.92	50.00	27.93	28.90
11.78	0.34	0.7	N	60.00	36.15	37.16	50.00	33.43	34.44
12.49	0.35	0.7	H	60.00	35.91	36.96	50.00	32.11	33.16
13.72	0.37	0.7	H	60.00	35.38	36.50	50.00	29.40	30.52
16.67	0.50	0.8	N	60.00	37.56	38.86	50.00	37.41	38.71
19.77	0.78	0.8	H	60.00	34.42	36.00	50.00	29.48	31.06
Remark	H : Hot Line, N : Neutral Line								



ESTECH Co., Ltd.

Rm 1015, World Venture Center 11,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea



**Electromagnetic
Interference
Test Report**

7. Photographs of test setup

7.1 Setup for Radiated Test

[Front]



[Rear]



7.2 Setup for Conducted Test : 0.15 MHz ~ 30 MHz

[Front]



[Rear]





ESTECH Co., Ltd.

Rm 1015, World Venture Center 11,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea



**Electromagnetic
Interference
Test Report**

8. Photographs of EUT

[Front]



[Rear]





ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea




**Electromagnetic
Interference
Test Report**

8.1 Photographs of EUT

[Front]




[Label]

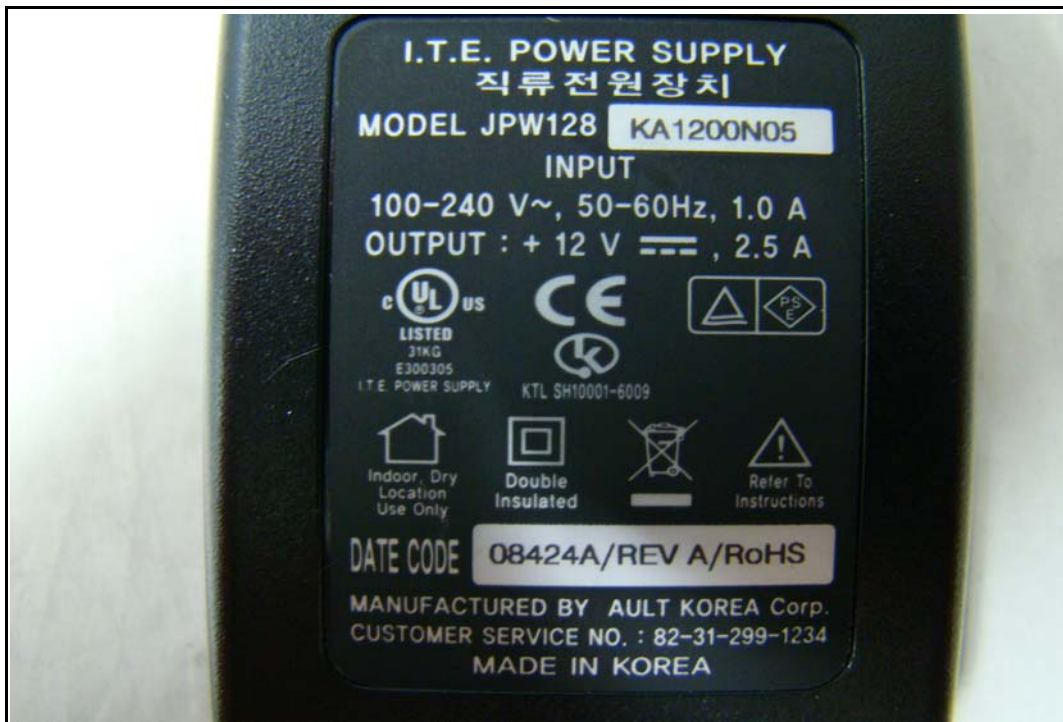

Appendix 1. Spectral diagram

*HOT

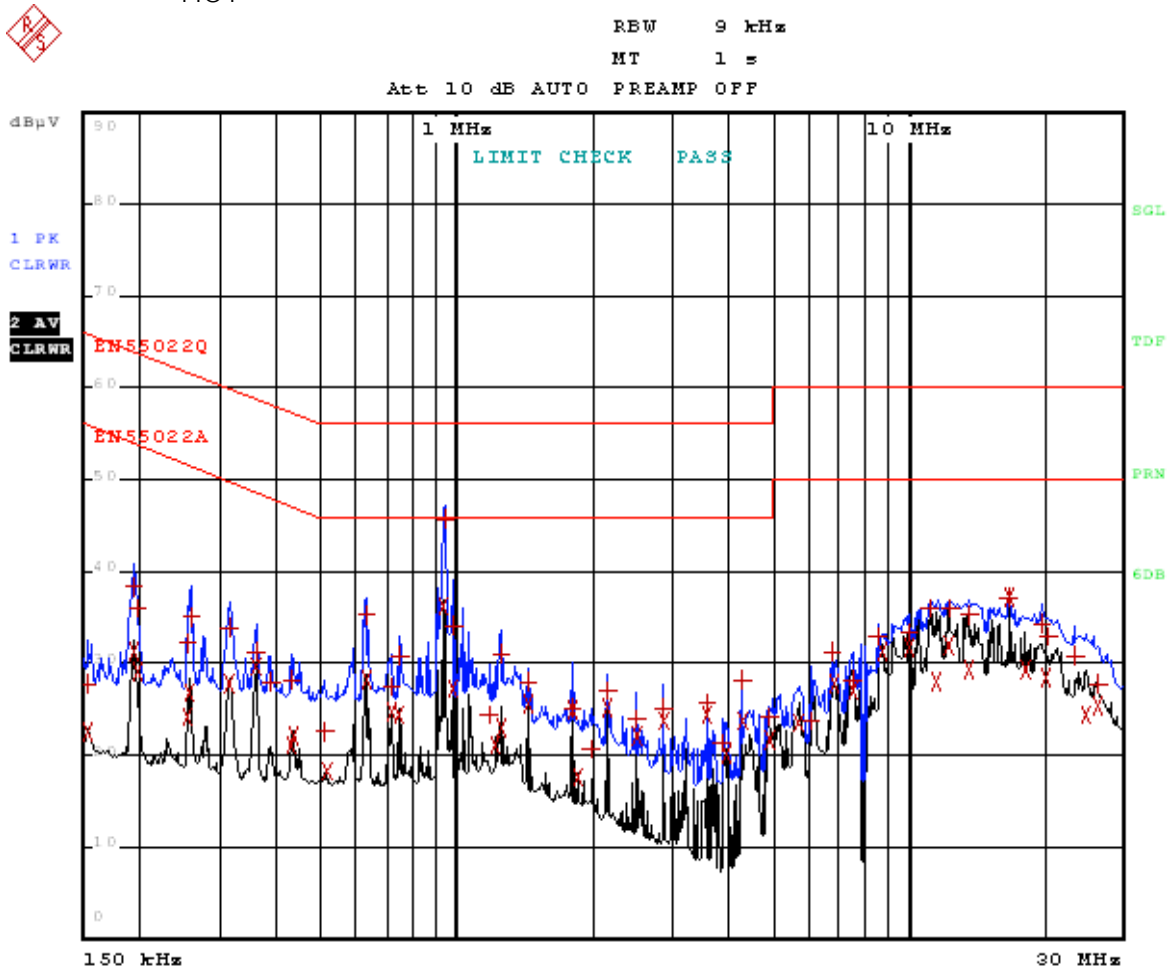


Comment: BioStation T2 (BST2R-OC)_HOT
Date: 7.APR.2011 22:17:53

*NEUTRAL



RBW 9 kHz
MT 1 s

Att 10 dB AUTO PREAMP OFF

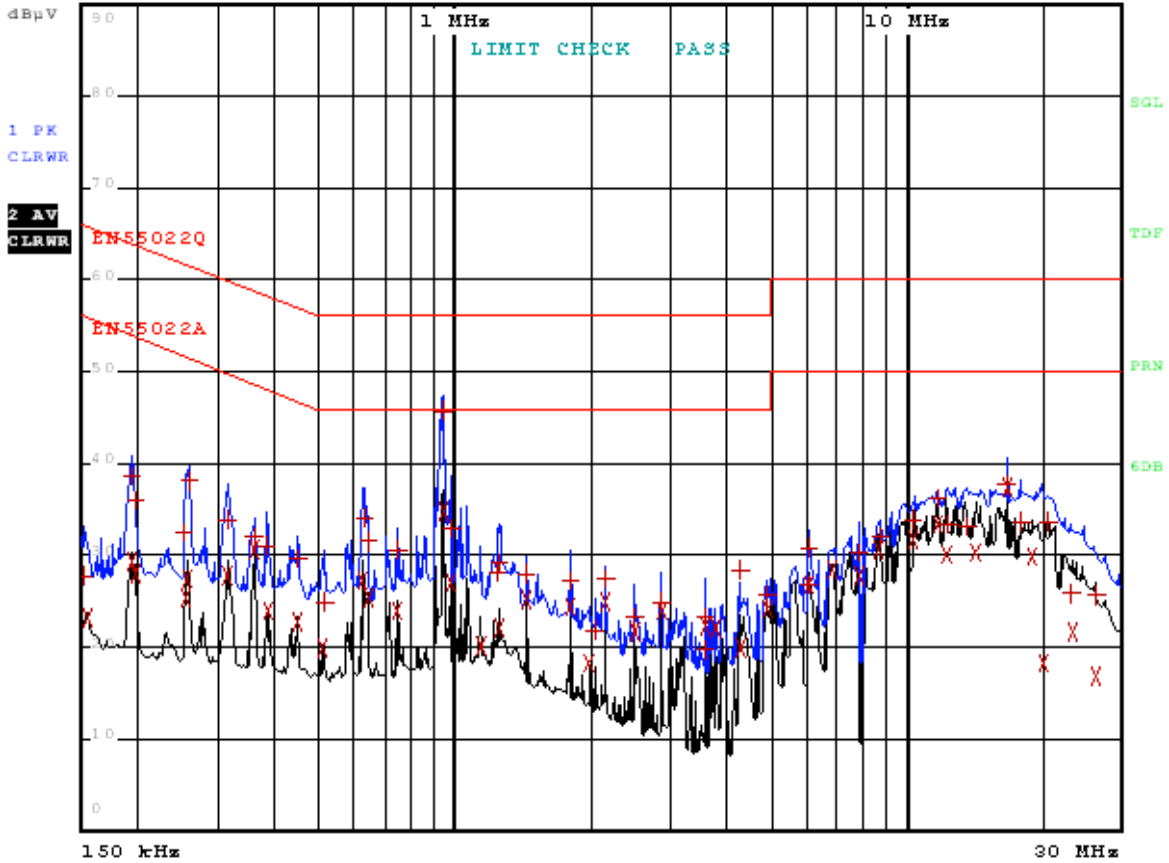

Comment: BioStation T2 (B3T2R-OC)_NEUTRAL
Date: 7.APR.2011 22:12:19

Appendix 2. Antenna Requirement

Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Result

-Complied

The transmitter has an integral Loop coil antenna.