


FCC Test Report

FCC ID : TKZAWV03S-ATA
Equipment : WiFi Router
Model No. : AWV03S-ATA
Applicant : AsiaRF Co., LTD.
Address : 3F, 215, Dehe Road, Yonghe Dist. New Taipei
City Taiwan
Standard : 47 CFR FCC Part 15.247
Received Date : Sep. 02, 2019
Tested Date : Sep. 19 ~ Oct. 01, 2019

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	8
1.4	The Equipment List	9
1.5	Test Standards	10
1.6	Deviation from Test Standard and Measurement Procedure.....	10
1.7	Measurement Uncertainty	10
2	TEST CONFIGURATION	11
2.1	Testing Condition	11
2.2	The Worst Test Modes and Channel Details	11
3	TRANSMITTER TEST RESULTS.....	12
3.1	Conducted Emissions.....	12
3.2	6dB and Occupied Bandwidth	15
3.3	RF Output Power.....	21
3.4	Power Spectral Density	24
3.5	Unwanted Emissions into Restricted Frequency Bands	30
3.6	Emissions in Non-Restricted Frequency Bands.....	58
4	TEST LABORATORY INFORMATION	63

Release Record

Report No.	Version	Description	Issued Date
FR983002AC	Rev. 01	Initial issue	Oct. 08, 2019

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.381MHz 29.51 (Margin -18.74dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 2390.00MHz 53.47 (Margin -0.53dB) - AV	Pass
15.247(b)(3)	Maximum Output Power	Max Power [dBm]: 26.22	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
2400-2483.5	b	2412-2462	1-11 [11]	2	1-11 Mbps
2400-2483.5	g	2412-2462	1-11 [11]	2	6-54 Mbps
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	2	MCS 0-15
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	2	MCS 0-15

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.
 Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
 Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Ant. No.	Type	Gain (dBi)	Connector	Remark
1	PCB	1	---	---

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	12Vdc from adapter
--------------------------	--------------------

1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	AC adapter 1	Brand: SHENZHEN YINGHUIYUAN ELECTRONICS CO, LTD Model: YHY-12004000 Power Rating: I/P: 100-240Vac, 50-60Hz, 2.5A O/P: 12Vdc, 4A Power Line: 1.26m non-shielded with one core
2	AC adapter 2	Brand: ShenZhen Cenwell Technology Co., Ltd. Model: CW1204000 Power Rating: I/P: 100-240Vac, 50/60Hz, 1.2A Max O/P: 12Vdc, 4000mA Power Line: 1.16m non-shielded with one core

1.1.5 Channel List

Frequency band (MHz)		2400~2483.5	
802.11 b / g / n HT20		802.11n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	3	2422
2	2417	4	2427
3	2422	5	2432
4	2427	6	2437
5	2432	7	2442
6	2437	8	2447
7	2442	9	2452
8	2447	---	---
9	2452	---	---
10	2457	---	---
11	2462	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	MT7620 QA, Version: 1.0.6.0		
Duty Cycle and Duty Factor	Mode	Duty Cycle (%)	Duty Factor (dB)
	11b	100.00	0.00
	11g	88.99	0.51
	HT20	87.85	0.56
	HT40	78.18	1.07


1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)	Power Index
11b	2412	01/08
11b	2437	01/09
11b	2462	00/08
11g	2412	0B/13
11g	2437	0E/17
11g	2462	04/0E
HT20	2412	0A/12
HT20	2437	0E/17
HT20	2462	03/0D
HT40	2422	06/0E
HT40	2437	09/12
HT40	2452	00/09

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Notebook	DELL	Latitude E5470	DoC	---
2	Notebook	DELL	Latitude E6430	DoC	---
3	USB flash	Kingston	DTSE9	---	---
4	Telephone	HTT	HTT-806	---	---

1.3 Test Setup Chart

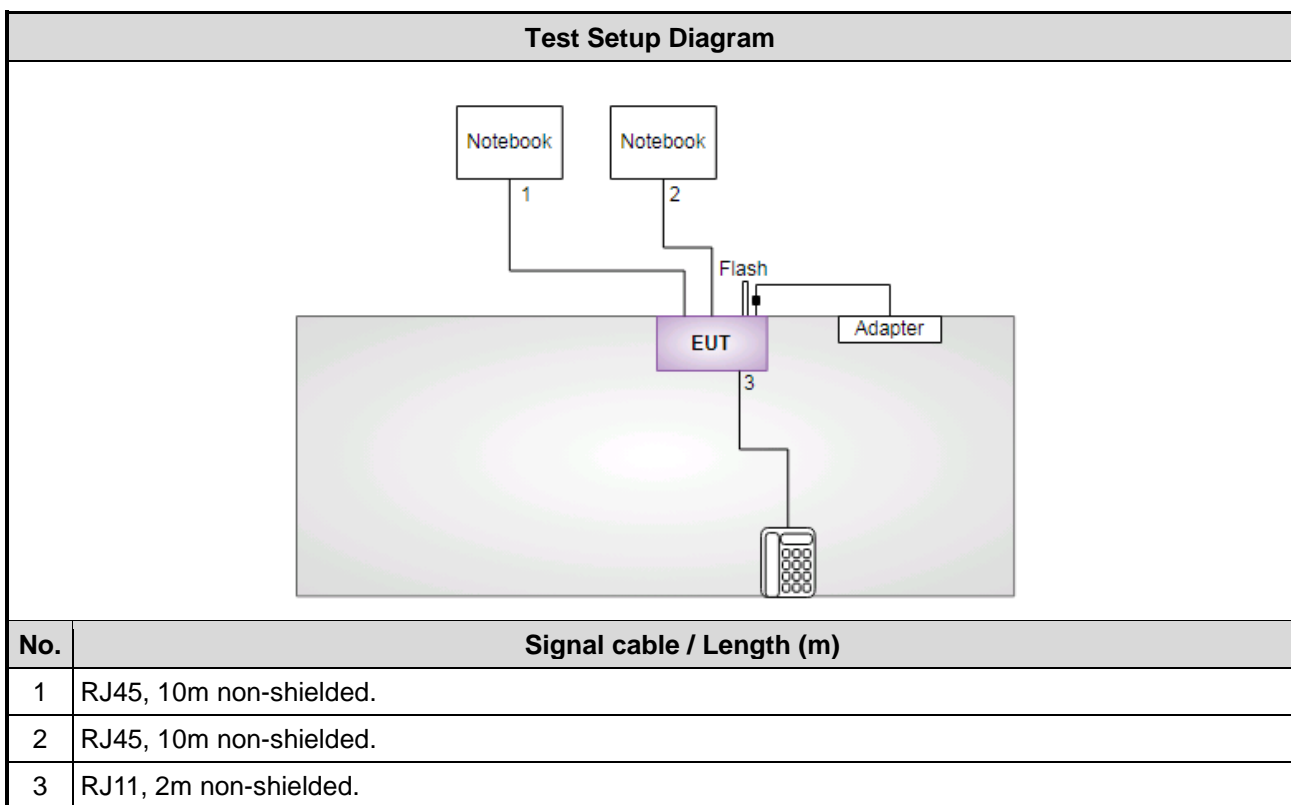

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Oct. 01, 2019				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Jan. 08, 2019	Jan. 07, 2020
LISN	R&S	ENV216	101579	Mar. 08, 2019	Mar. 07, 2020
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 23, 2018	Oct. 23, 2019
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber 3 / (03CH03-WS)				
Tested Date	Sep. 19 ~ Sep. 26, 2019				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Jan. 07, 2019	Jan. 06, 2020
Receiver	R&S	ESR3	101658	Dec. 11, 2018	Dec. 10, 2019
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 17, 2019	Apr. 16, 2020
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Jan. 07, 2019	Jan. 06, 2020
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2018	Nov. 14, 2019
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 09, 2018	Nov. 08, 2019
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 08, 2018	Oct. 07, 2019
Preamplifier	EMC	EMC02325	980187	Aug. 14, 2019	Aug. 13, 2020
Preamplifier	Agilent	83017A	MY53270014	Aug. 07, 2019	Aug. 06, 2020
Preamplifier	EMC	EMC184045B	980192	Aug. 01, 2019	Jul. 31, 2020
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Oct. 01, 2018	Sep. 30, 2019
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Oct. 01, 2018	Sep. 30, 2019
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Oct. 01, 2018	Sep. 30, 2019
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Oct. 01, 2018	Sep. 30, 2019
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Oct. 01, 2018	Sep. 30, 2019
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Oct. 01, 2018	Sep. 30, 2019
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Oct. 01, 2019				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Apr. 17, 2019	Apr. 16, 2020
Spectrum Analyzer	R&S	FSV40	101499	Jan. 07, 2019	Jan. 06, 2020
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 05, 2018	Dec. 04, 2019
Power Meter	Anritsu	ML2495A	1241002	Oct. 09, 2018	Oct. 08, 2019
Power Sensor	Anritsu	MA2411B	1207366	Oct. 09, 2018	Oct. 08, 2019
AC POWER SOURCE	APC	AFC-500W	F312060012	Nov. 29, 2018	Nov. 28, 2019
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

1.6 Deviation from Test Standard and Measurement Procedure

None

1.7 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Radiated emission ≤ 1 GHz	± 3.96 dB
Radiated emission > 1 GHz	± 4.51 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	24°C / 60%	Alex Tsai
Radiated Emissions	03CH03-WS	24-26°C / 64%	Roger Lu Akun Chung
RF Conducted	TH01-WS	23°C / 63%	Brad Wu

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Emissions	11g	2437	6 Mbps	---
Radiated Emissions ≤1GHz	11g	2437	6 Mbps	---
Radiated Emissions >1GHz	11b	2412 / 2437 / 2462	1 Mbps	---
Maximum Output Power	11g	2412 / 2437 / 2462	6 Mbps	
6dB bandwidth	HT20	2412 / 2437 / 2462	MCS 0	
Power spectral density	HT40	2422 / 2437 / 2452	MCS 0	

NOTE:

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.
2. Two adapters (YHY-12004000 & CW1204000) had been covered during the pretest and found that **YHY-12004000** adapter was the conducted emissions worst case and **CW1204000** adapter was the Radiated Emissions worst case.

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.


3.1.3 Test Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions


Modulation	11g	Test Freq. (MHz)	2437
Power Phase	Line		

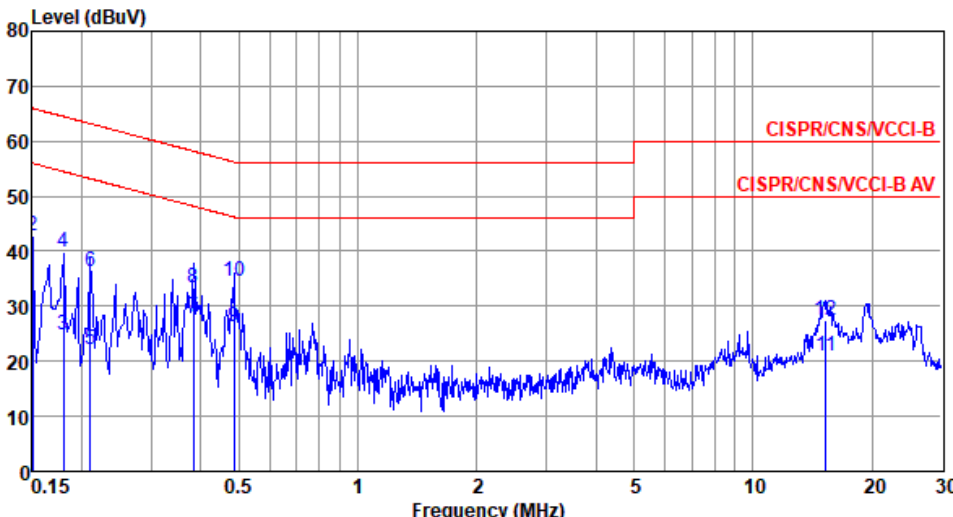

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.150	25.18	56.00	-30.82	15.48	9.53	0.05	Average
2	0.150	42.81	66.00	-23.19	33.11	9.53	0.05	QP
3	0.180	24.87	54.50	-29.63	15.11	9.54	0.06	Average
4	0.180	39.75	64.50	-24.75	29.99	9.54	0.06	QP
5	0.211	22.18	53.18	-31.00	12.37	9.54	0.07	Average
6	0.211	36.43	63.18	-26.75	26.62	9.54	0.07	QP
7	0.383	27.94	48.21	-20.27	18.03	9.57	0.08	Average
8	0.383	33.49	58.21	-24.72	23.58	9.57	0.08	QP
9*	0.486	26.23	46.23	-20.00	16.30	9.58	0.08	Average
10	0.486	34.46	56.23	-21.77	24.53	9.58	0.08	QP
11	15.307	20.81	50.00	-29.19	10.13	9.66	0.56	Average
12	15.307	27.46	60.00	-32.54	16.78	9.66	0.56	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Modulation	11g	Test Freq. (MHz)	2437
Power Phase	Neutral		

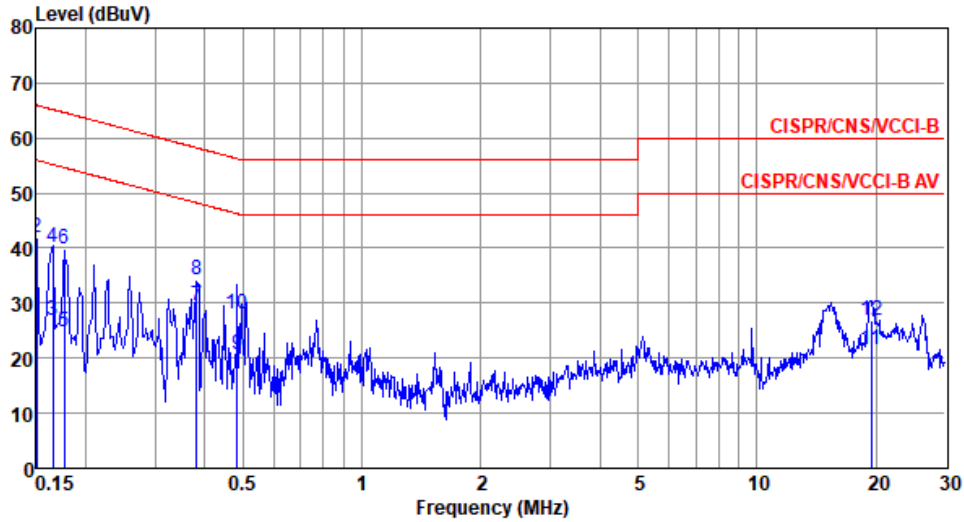

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.150	23.93	56.00	-32.07	14.20	9.57	0.05	Average
2	0.150	41.94	66.00	-24.06	32.21	9.57	0.05	QP
3	0.165	26.88	55.21	-28.33	17.13	9.57	0.06	Average
4	0.165	40.22	65.21	-24.99	30.47	9.57	0.06	QP
5	0.177	24.71	54.64	-29.93	14.94	9.58	0.06	Average
6	0.177	39.80	64.64	-24.84	30.03	9.58	0.06	QP
7*	0.381	29.51	48.25	-18.74	19.70	9.61	0.08	Average
8	0.381	34.17	58.25	-24.08	24.36	9.61	0.08	QP
9	0.484	20.72	46.27	-25.55	10.88	9.62	0.08	Average
10	0.484	27.90	56.27	-28.37	18.06	9.62	0.08	QP
11	19.428	21.50	50.00	-28.50	10.64	9.81	0.60	Average
12	19.428	26.75	60.00	-33.25	15.89	9.81	0.60	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures

6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup



3.2.4 Test Result of 6dB and Occupied Bandwidth

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	10.072M	12.301M	12M3G1D	10.072M	12.156M
802.11g_Nss1,(6Mbps)_2TX	16.377M	17.366M	17M4D1D	16.304M	16.715M
802.11n HT20_Nss1,(MCS0)_2TX	17.101M	18.017M	18M0D1D	17.101M	17.656M
802.11n HT40_Nss1,(MCS0)_2TX	36.377M	36.469M	36M5D1D	35.942M	36.324M

Max-N dB = Maximum 6dB downbandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB downbandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	10.072M	12.301M	10.072M	12.301M
2437MHz	Pass	500k	10.072M	12.301M	10.072M	12.301M
2462MHz	Pass	500k	10.072M	12.156M	10.072M	12.301M
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	16.304M	16.715M	16.377M	16.86M
2437MHz	Pass	500k	16.377M	16.715M	16.377M	17.366M
2462MHz	Pass	500k	16.377M	16.715M	16.377M	16.715M
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	17.101M	17.656M	17.101M	17.728M
2437MHz	Pass	500k	17.101M	17.656M	17.101M	18.017M
2462MHz	Pass	500k	17.101M	17.656M	17.101M	17.656M
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	500k	35.942M	36.469M	36.232M	36.324M
2437MHz	Pass	500k	36.087M	36.469M	36.232M	36.469M
2452MHz	Pass	500k	36.232M	36.469M	36.377M	36.469M

Port X-N dB = Port X 6dB downbandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

802.11b_Nss1,(1Mbps)_2TX

EBW


2412MHz

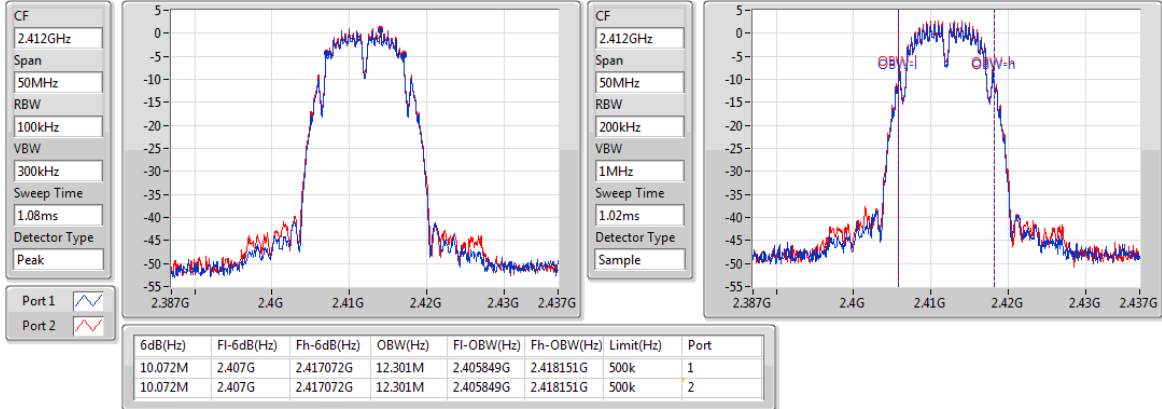

802.11b_Nss1,(1Mbps)_2TX

EBW


2437MHz

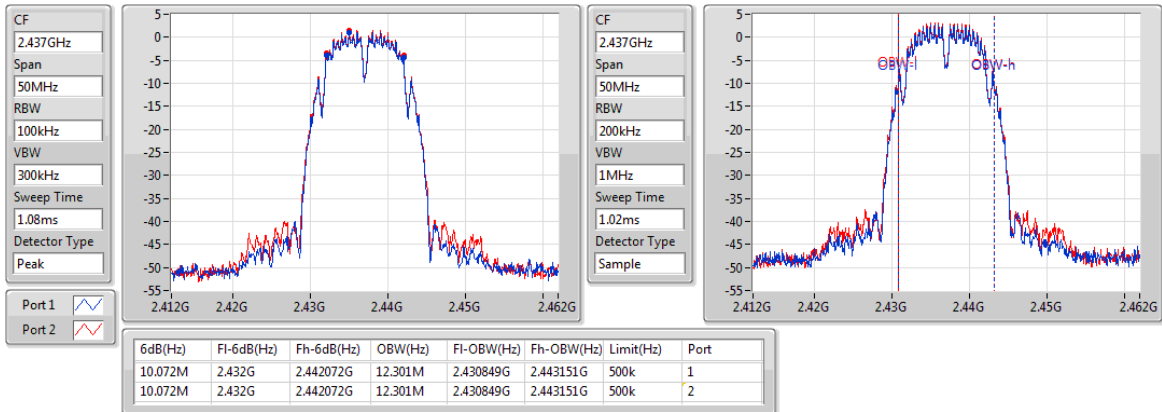

802.11b_Nss1,(1Mbps)_2TX

EBW


2462MHz

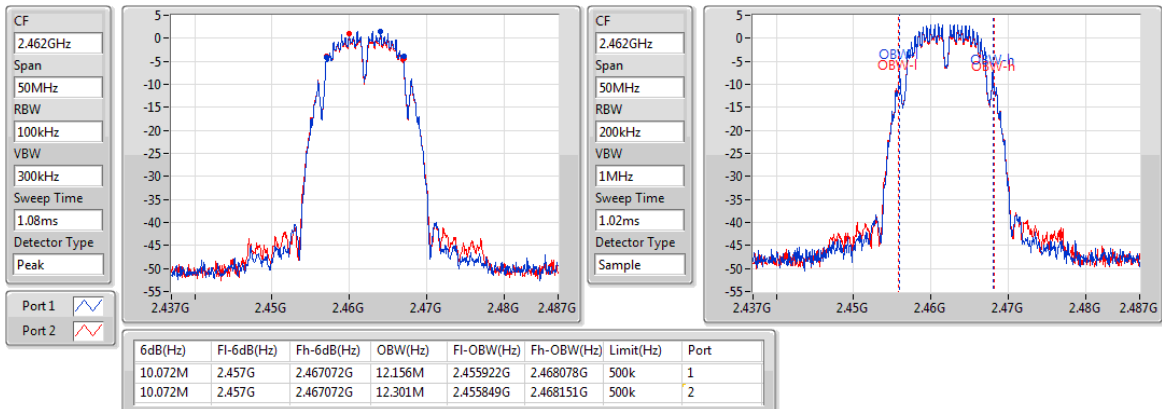

802.11g_Nss1,(6Mbps)_2TX

EBW


2412MHz

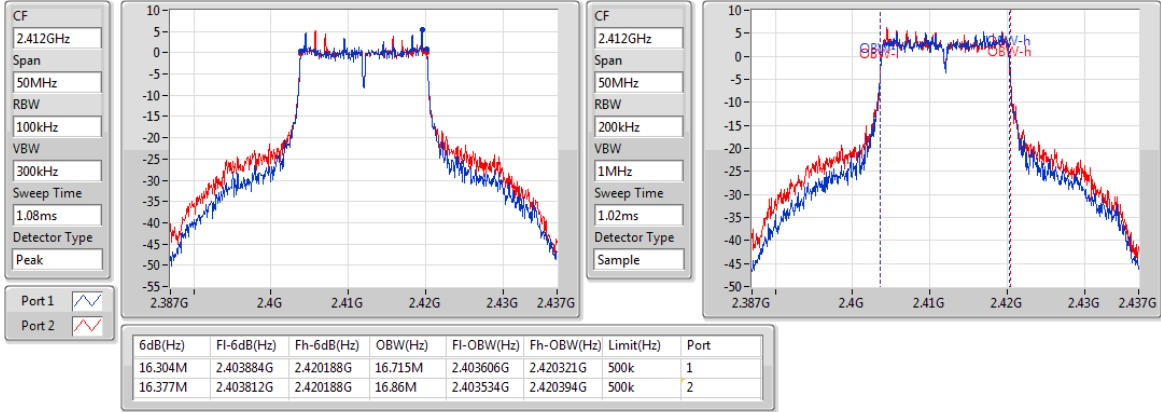

802.11g_Nss1,(6Mbps)_2TX

EBW


2437MHz

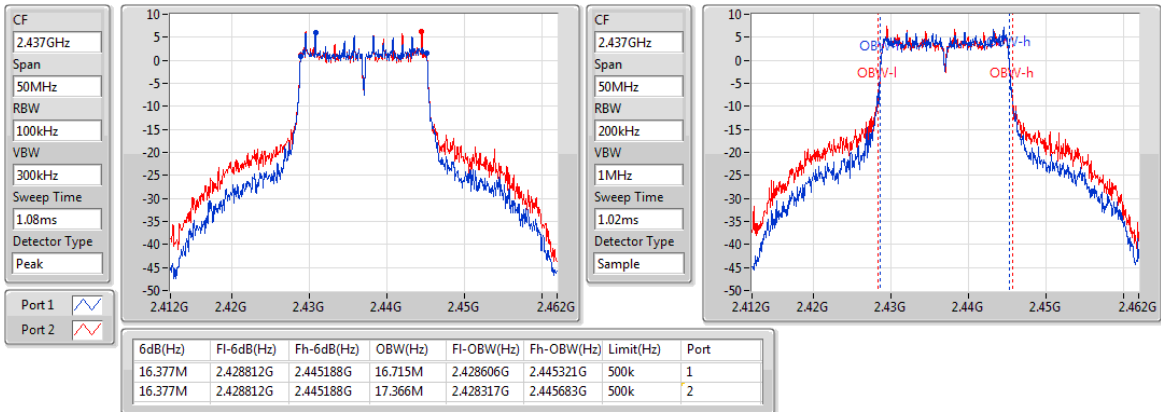

802.11g_Nss1,(6Mbps)_2TX

EBW


2462MHz

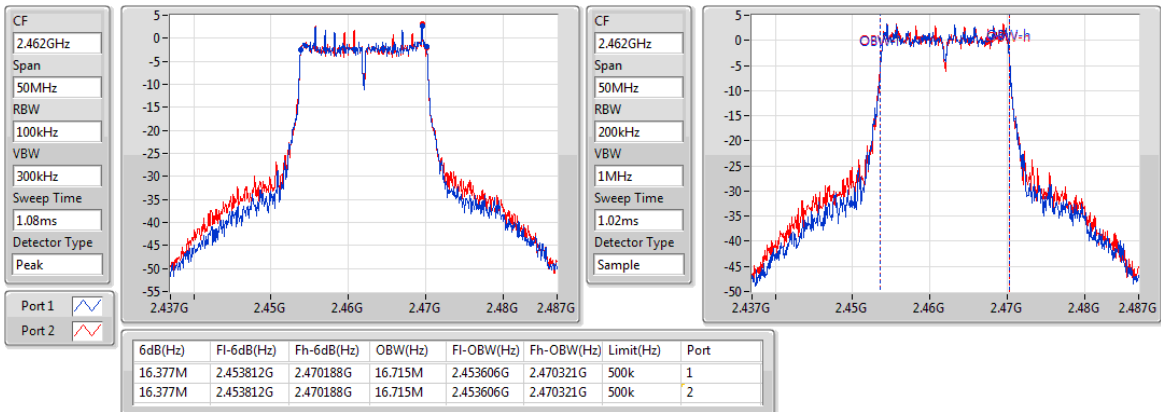

802.11n HT20_Nss1,(MCS0)_2TX

EBW


2412MHz

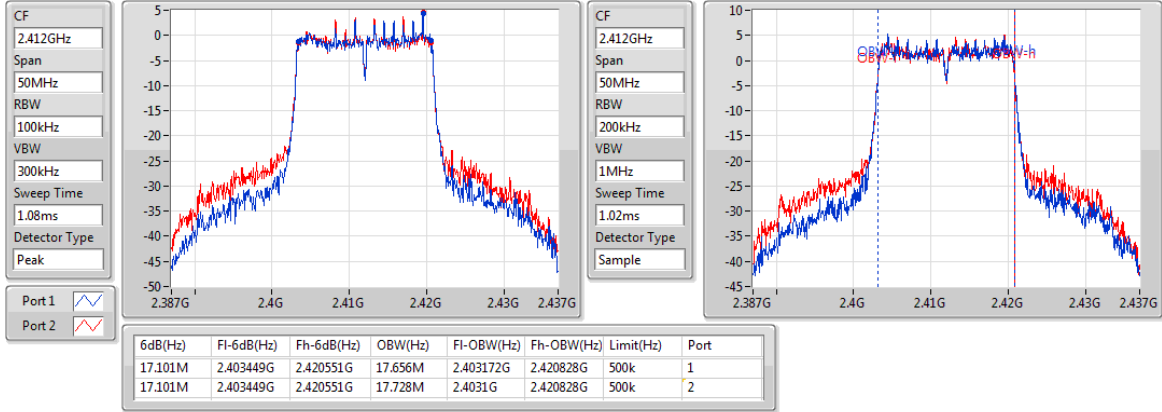

802.11n HT20_Nss1,(MCS0)_2TX

EBW


2437MHz

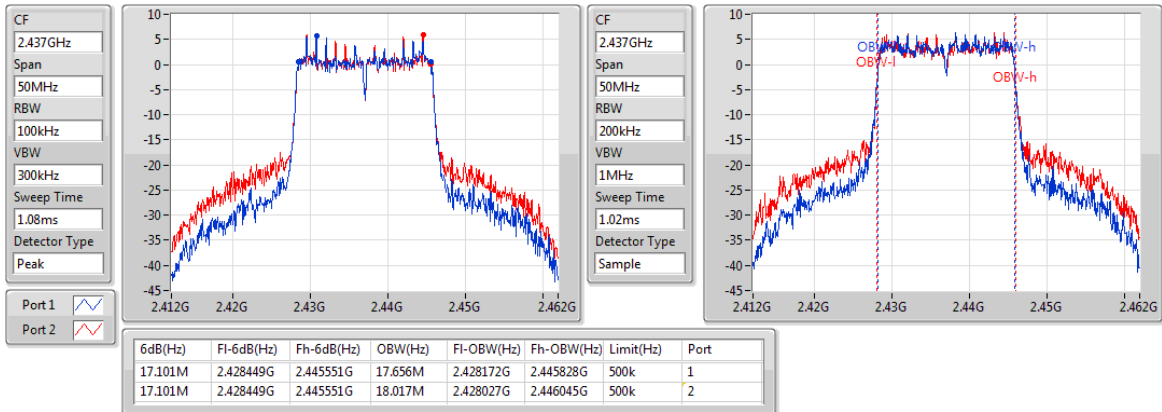

802.11n HT20_Nss1,(MCS0)_2TX

EBW


2462MHz

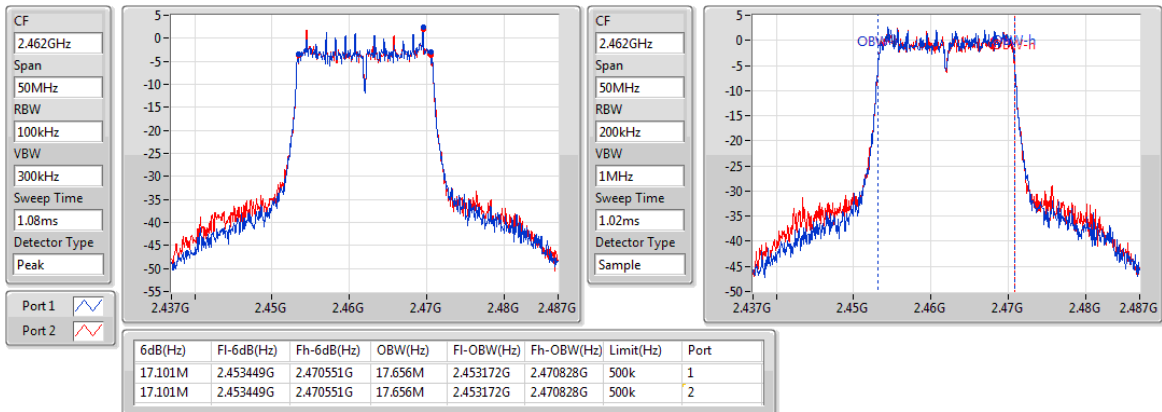

802.11n HT40_Nss1,(MCS0)_2TX

EBW


2422MHz

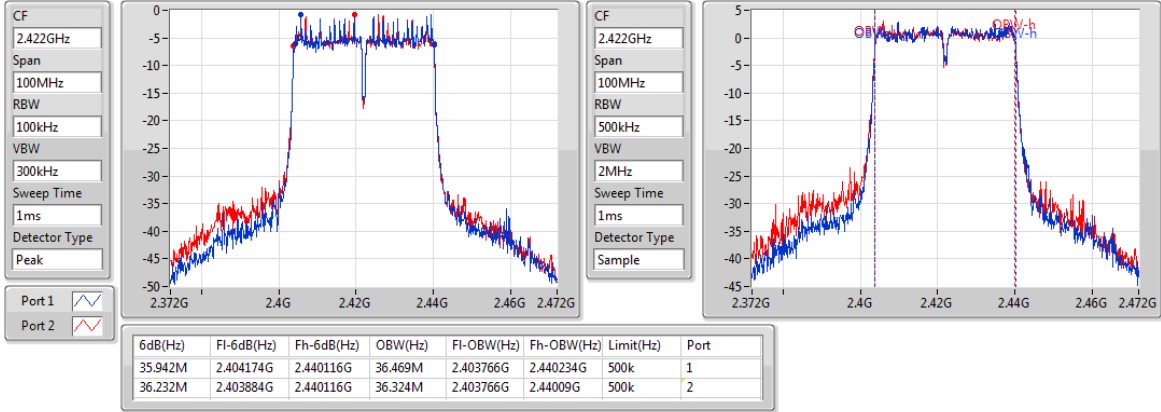

802.11n HT40_Nss1,(MCS0)_2TX

EBW


2437MHz

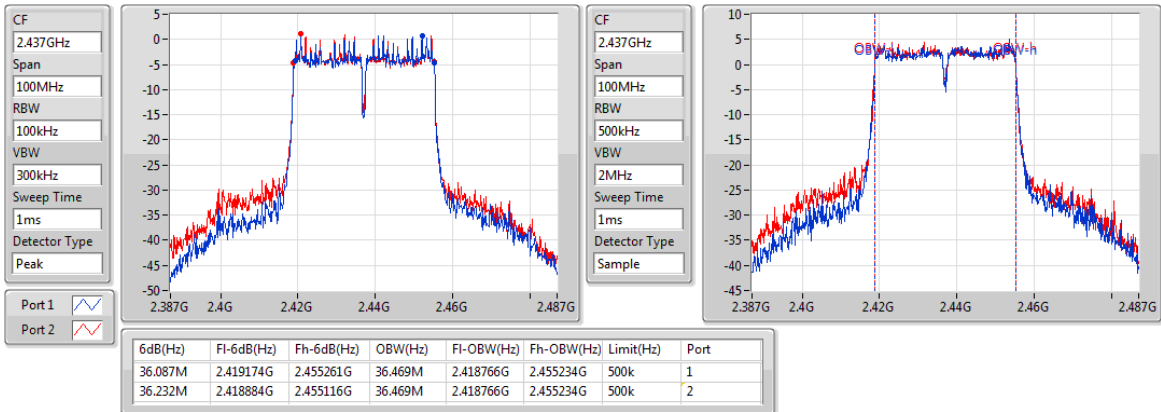

802.11n HT40_Nss1,(MCS0)_2TX

EBW

2452MHz

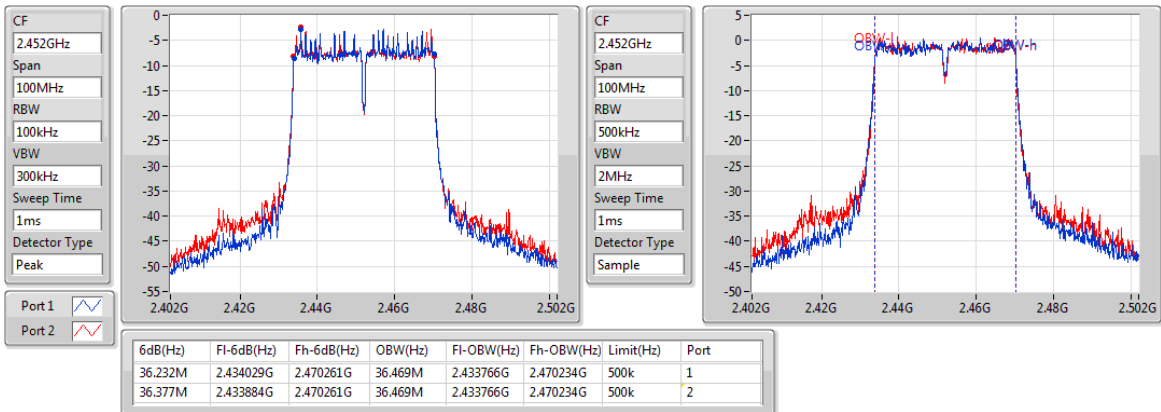

3.3 RF Output Power

3.3.1 Limit of RF Output Power


Conducted power shall not exceed 1Watt.

Antenna gain $\leq 6\text{dBi}$, no any corresponding reduction is in output power limit.

3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup

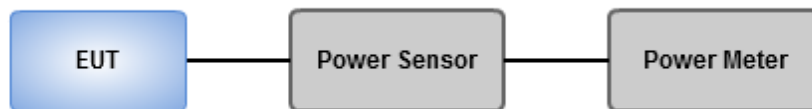

3.3.4 Test Result of Maximum Output Power

Summary of Peak Conducted Output Power

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_2TX	18.80	0.07586
802.11g_Nss1,(6Mbps)_2TX	26.22	0.41879
802.11n HT20_Nss1,(MCS0)_2TX	25.88	0.38726
802.11n HT40_Nss1,(MCS0)_2TX	25.09	0.32285

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	1.00	15.11	15.64	18.39	30.00	19.39	36.00
2437MHz	Pass	1.00	15.42	16.13	18.80	30.00	19.80	36.00
2462MHz	Pass	1.00	15.48	15.64	18.57	30.00	19.57	36.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	1.00	23.13	22.68	25.92	30.00	26.92	36.00
2437MHz	Pass	1.00	23.64	22.74	26.22	30.00	27.22	36.00
2462MHz	Pass	1.00	21.25	21.92	24.61	30.00	25.61	36.00
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	1.00	22.26	22.52	25.40	30.00	26.40	36.00
2437MHz	Pass	1.00	23.38	22.29	25.88	30.00	26.88	36.00
2462MHz	Pass	1.00	21.57	21.53	24.56	30.00	25.56	36.00
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2422MHz	Pass	1.00	20.97	21.31	24.15	30.00	25.15	36.00
2437MHz	Pass	1.00	22.23	21.93	25.09	30.00	26.09	36.00
2452MHz	Pass	1.00	18.68	19.10	21.91	30.00	22.91	36.00

DG = Directional Gain; Port X = Port X output power

Summary of Conducted (Average) Output Power

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_2TX	15.24	0.03342
802.11g_Nss1,(6Mbps)_2TX	20.64	0.11588
802.11n HT20_Nss1,(MCS0)_2TX	20.19	0.10447
802.11n HT40_Nss1,(MCS0)_2TX	18.72	0.07447

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	1.00	11.72	12.21	14.98		15.98	-
2437MHz	Pass	1.00	11.94	12.50	15.24		16.24	-
2462MHz	Pass	1.00	12.14	12.20	15.18		16.18	-
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-		-	-
2412MHz	Pass	1.00	16.34	16.95	19.67		20.67	-
2437MHz	Pass	1.00	17.59	17.66	20.64		21.64	-
2462MHz	Pass	1.00	14.34	15.03	17.71		18.71	-
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-		-	-
2412MHz	Pass	1.00	15.88	16.22	19.06		20.06	-
2437MHz	Pass	1.00	17.24	17.12	20.19		21.19	-
2462MHz	Pass	1.00	13.66	14.18	16.94		17.94	-
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-		-	-
2422MHz	Pass	1.00	14.34	14.51	17.44		18.44	-
2437MHz	Pass	1.00	15.44	15.96	18.72		19.72	-
2452MHz	Pass	1.00	11.84	12.24	15.05		16.05	-

DG = Directional Gain; Port X = Port X output power

Note :Conducted average output power is for reference only

3.4 Power Spectral Density

3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

Peak PSD

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.


Average PSD, duty cycle \geq 98%

1. Set the RBW = 30 kHz, VBW = 100 kHz.
2. Detector = RMS, Sweep time = auto couple.
3. Sweep time = auto couple.
4. Employ trace averaging (RMS) mode over a minimum of 100 traces.
5. Use the peak marker function to determine the maximum amplitude level.

Average PSD, duty cycle $<$ 98%

1. Set the RBW = 30 kHz, VBW = 100 kHz. Detector = RMS.
2. Set the sweep time to: ≥ 10 (number of measurement points in sweep) x (total on/off period of the transmitted signal).
3. Perform the measurement over a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log (1/x)$, where x is the duty cycle.

3.4.3 Test Setup

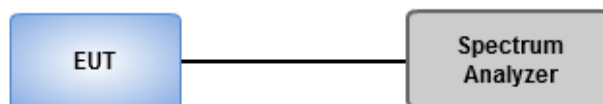

3.4.4 Test Result of Power Spectral Density

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	-14.16
802.11g_Nss1,(6Mbps)_2TX	-7.97
802.11n HT20_Nss1,(MCS0)_2TX	-7.61
802.11n HT40_Nss1,(MCS0)_2TX	-13.04

RBW=3kHz.

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.01	-17.98	-17.37	-14.66	8.00
2437MHz	Pass	4.01	-17.40	-16.95	-14.16	8.00
2462MHz	Pass	4.01	-16.92	-17.43	-14.16	8.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.01	-11.39	-12.16	-9.03	8.00
2437MHz	Pass	4.01	-10.83	-10.17	-7.97	8.00
2462MHz	Pass	4.01	-12.83	-13.13	-10.39	8.00
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.01	-10.98	-12.27	-9.13	8.00
2437MHz	Pass	4.01	-10.91	-9.78	-7.61	8.00
2462MHz	Pass	4.01	-14.07	-13.74	-11.58	8.00
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	4.01	-16.30	-15.41	-13.32	8.00
2437MHz	Pass	4.01	-15.44	-15.38	-13.04	8.00
2452MHz	Pass	4.01	-18.32	-17.52	-15.67	8.00


DG = Directional Gain;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port Xpower density;

802.11b_Nss1,(1Mbps)_2TX

PSD

2412MHz

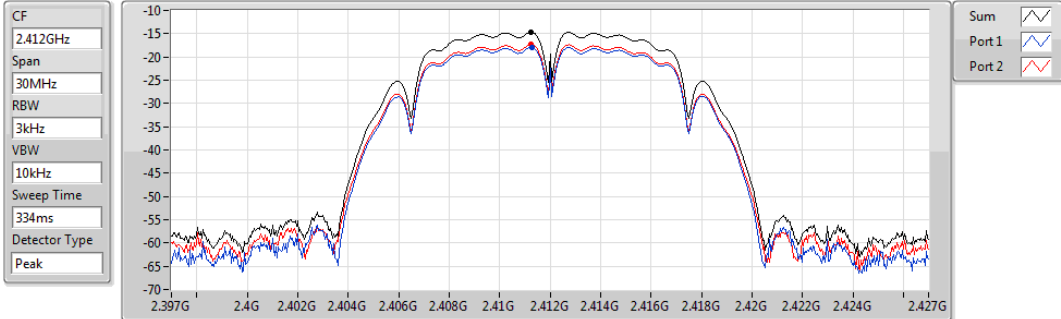


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-14.66	-14.66	-17.98	-17.37

802.11b_Nss1,(1Mbps)_2TX

PSD

2437MHz

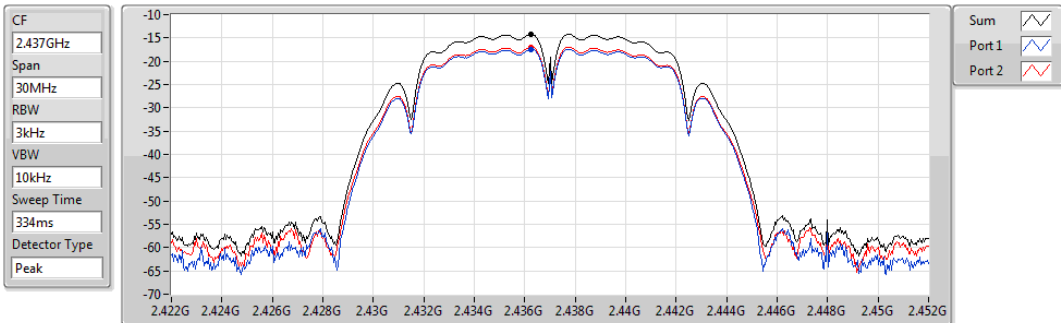


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-14.16	-14.16	-17.40	-16.95

802.11b_Nss1,(1Mbps)_2TX

PSD

2462MHz

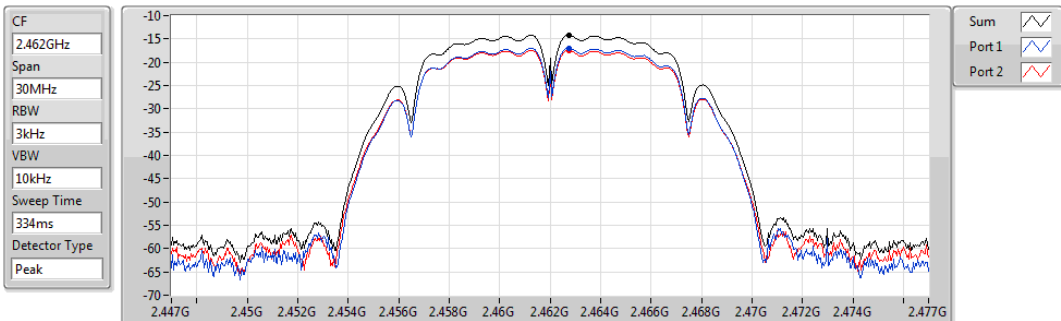


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-14.16	-14.16	-16.92	-17.43

802.11g_Nss1,(6Mbps)_2TX

PSD

2412MHz

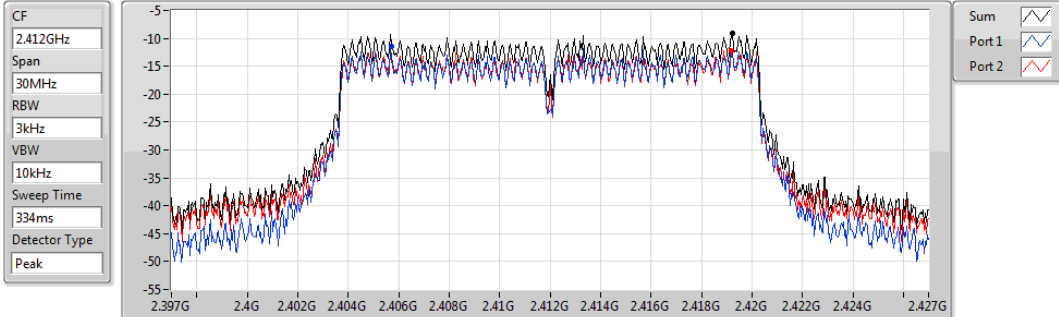


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-9.03	-9.03	-11.39	-12.16

802.11g_Nss1,(6Mbps)_2TX

PSD

2437MHz

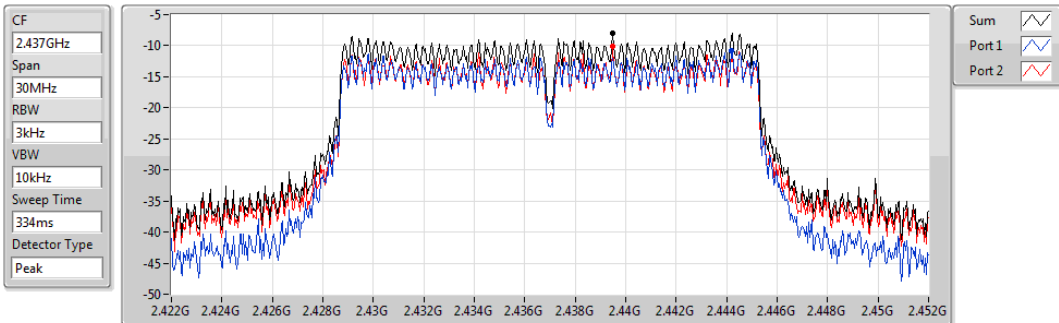


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-7.97	-7.97	-10.83	-10.17

802.11g_Nss1,(6Mbps)_2TX

PSD

2462MHz

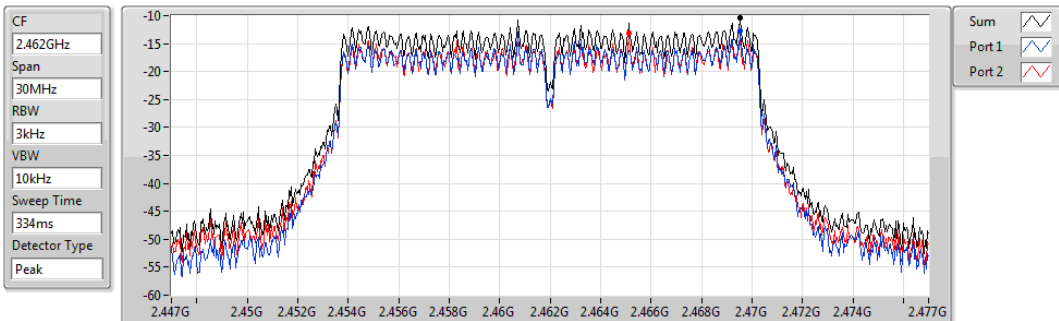


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-10.39	-10.39	-12.83	-13.13

802.11n HT20_Nss1,(MCS0)_2TX

PSD

2412MHz

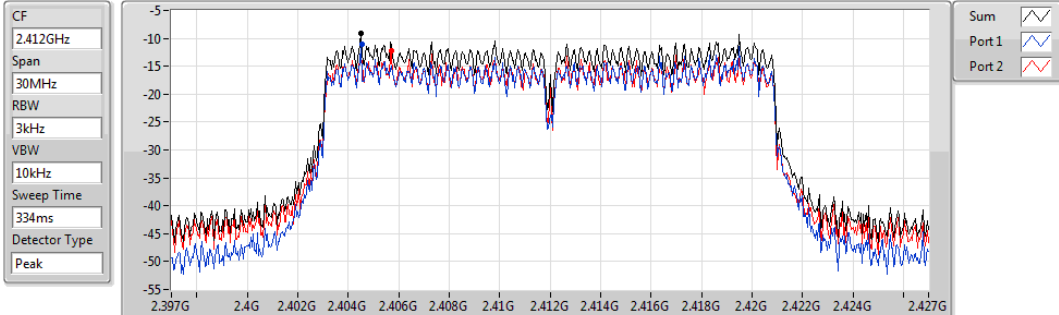


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.13	-9.13	-10.98	-12.27

802.11n HT20_Nss1,(MCS0)_2TX

PSD

2437MHz

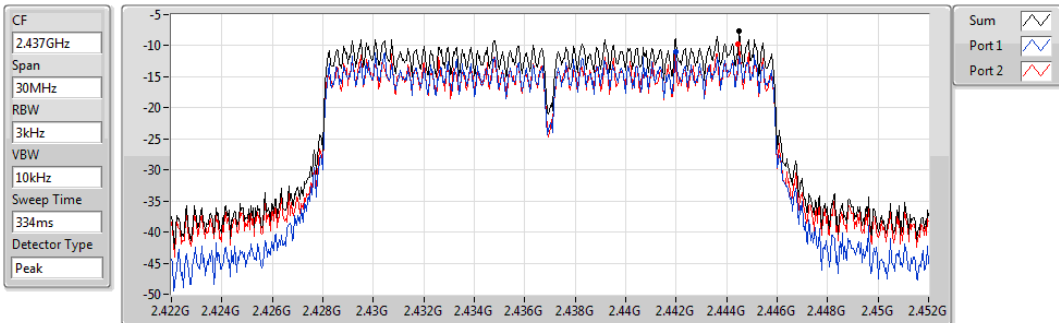


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.61	-7.61	-10.91	-9.78

802.11n HT20_Nss1,(MCS0)_2TX

PSD

2462MHz

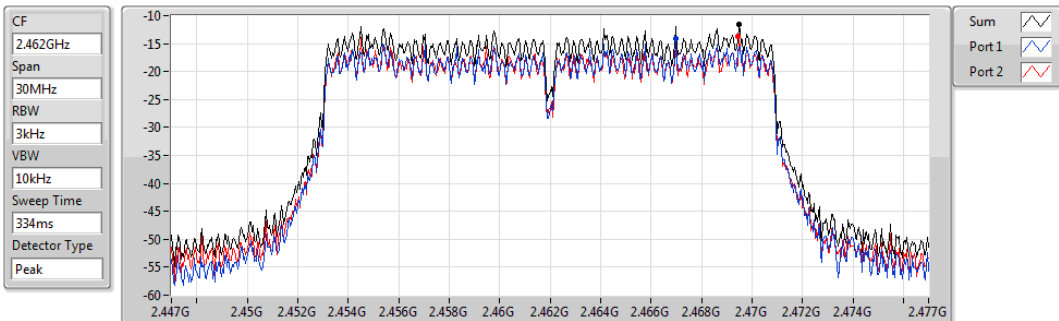


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-11.58	-11.58	-14.07	-13.74

802.11n HT40_Nss1,(MCS0)_2TX

PSD

2422MHz

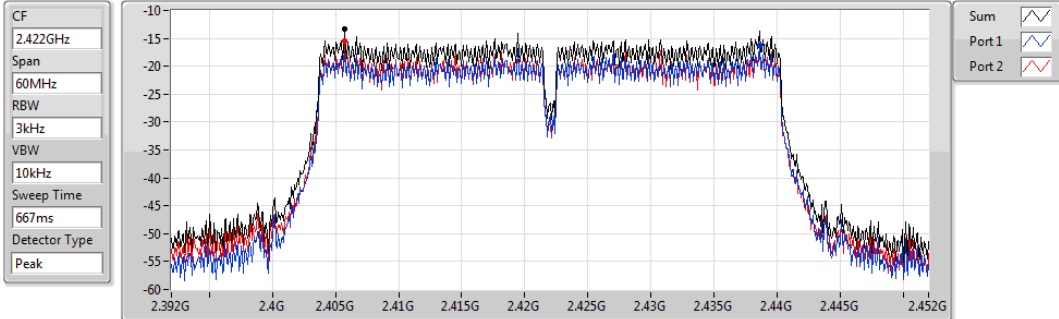


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-13.32	-13.32	-16.30	-15.41

802.11n HT40_Nss1,(MCS0)_2TX

PSD

2437MHz

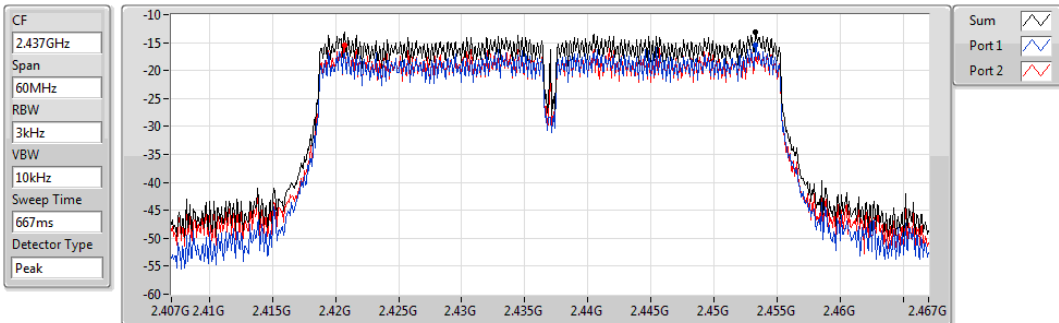


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-13.04	-13.04	-15.44	-15.38

802.11n HT40_Nss1,(MCS0)_2TX

PSD

2452MHz

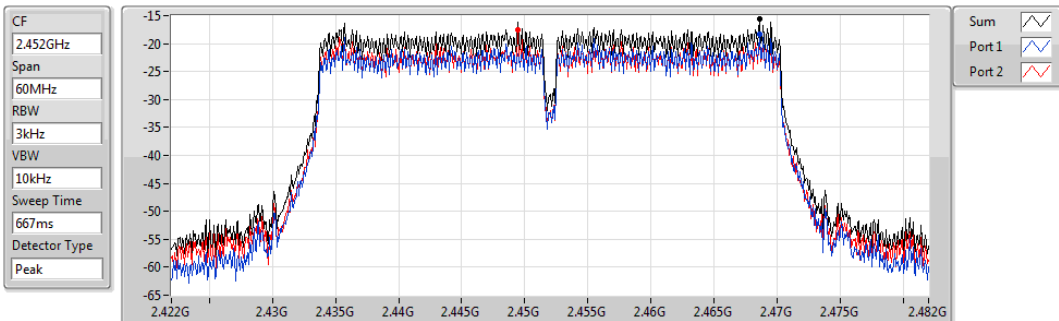

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-15.67	-15.67	-18.32	-17.52

3.5 Unwanted Emissions into Restricted Frequency Bands

3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup

Radiated Emissions below 1 GHz




Radiated Emissions above 1 GHz

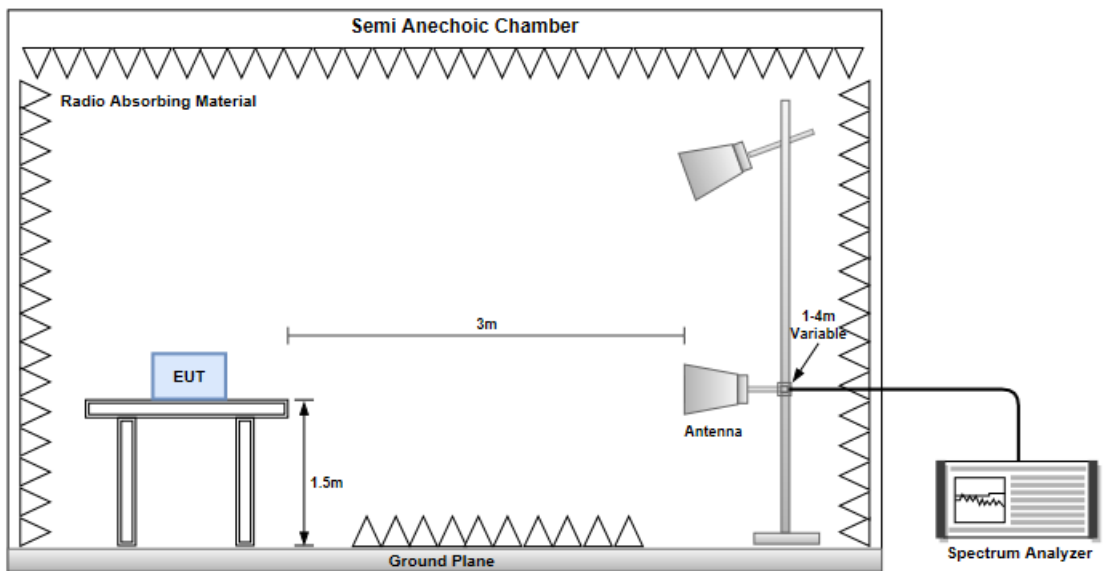

3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)


Modulation	11g	Test Freq. (MHz)	2437
Polarization	Horizontal		

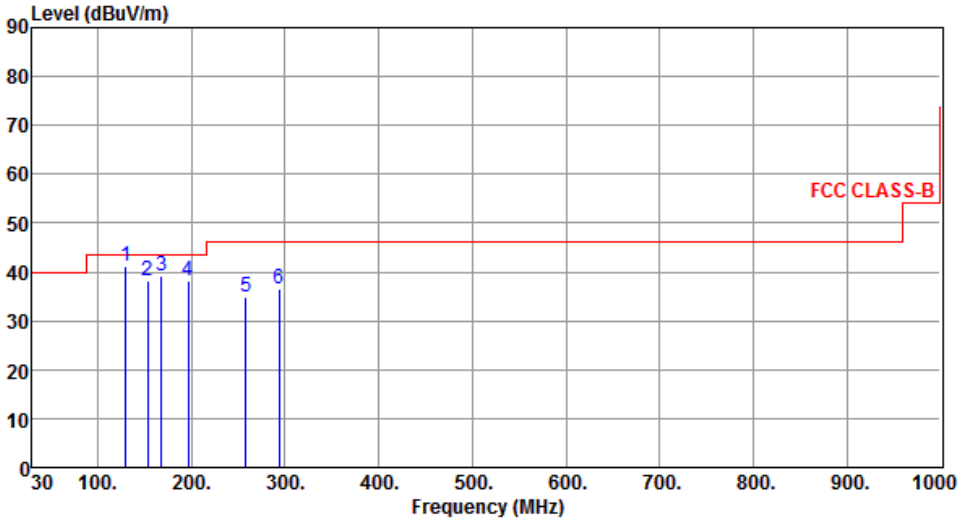

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	129.91	41.07	43.50	-2.43	51.23	-10.16	QP	166	260
2	153.69	38.34	43.50	-5.16	47.02	-8.68	QP	169	93
3	167.74	39.21	43.50	-4.29	48.22	-9.01	QP	165	250
4	196.84	38.24	43.50	-5.26	50.09	-11.85	QP	163	256
5	257.95	34.88	46.00	-11.12	44.74	-9.86	Peak	---	---
6	293.84	36.64	46.00	-9.36	45.11	-8.47	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	11g	Test Freq. (MHz)	2437
Polarization	Vertical		

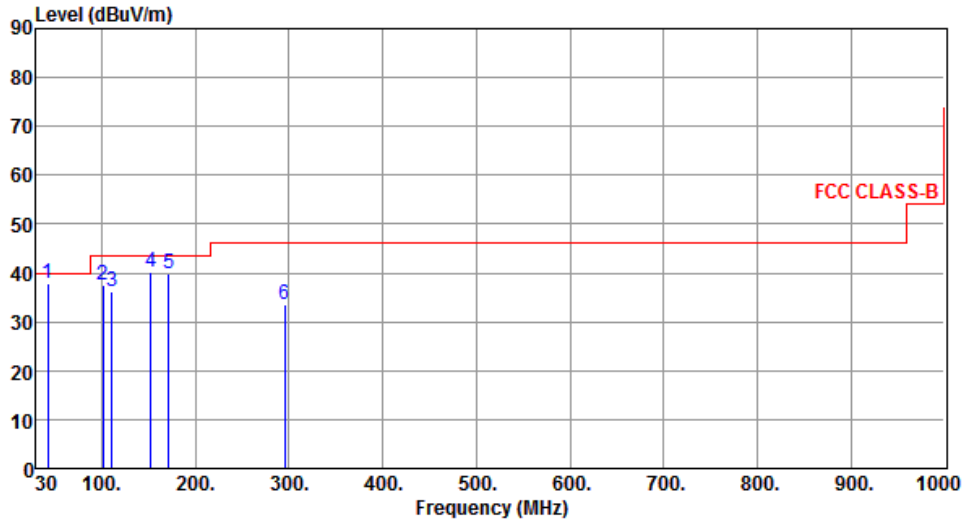

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	42.61	38.00	40.00	-2.00	46.98	-8.98	QP	123	65
2	101.78	37.63	43.50	-5.87	51.04	-13.41	Peak	---	---
3	110.51	36.12	43.50	-7.38	48.26	-12.14	Peak	---	---
4	152.22	40.12	43.50	-3.38	48.80	-8.68	Peak	---	---
5	171.62	39.73	43.50	-3.77	48.97	-9.24	Peak	---	---
6	295.78	33.58	46.00	-12.42	42.00	-8.42	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

Modulation	11b	Test Freq. (MHz)	2412
Polarization	Horizontal		

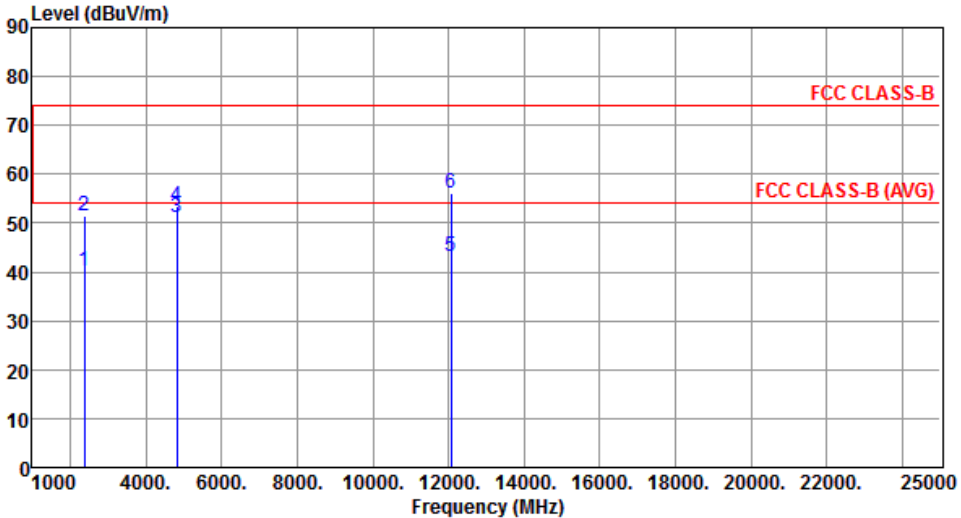


The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (1000 to 25000). Two horizontal red lines represent the FCC CLASS-B limit at approximately 74 dBuV/m and the FCC CLASS-B (AVG) limit at approximately 54 dBuV/m. Six vertical blue lines represent individual test points, each labeled with a number (1-6) at its top. The data points are summarized in the table below.

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	40.18	54.00	-13.82	39.76	0.42	Average	100	45
2	2390.00	51.51	74.00	-22.49	51.09	0.42	Peak	100	45
3	4824.00	51.05	54.00	-2.95	44.66	6.39	Average	100	132
4	4824.00	53.41	74.00	-20.59	47.02	6.39	Peak	100	132
5	12060.00	43.11	54.00	-10.89	26.53	16.58	Average	100	15
6	12060.00	56.15	74.00	-17.85	39.57	16.58	Peak	100	15

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11b	Test Freq. (MHz)	2412
Polarization	Vertical		

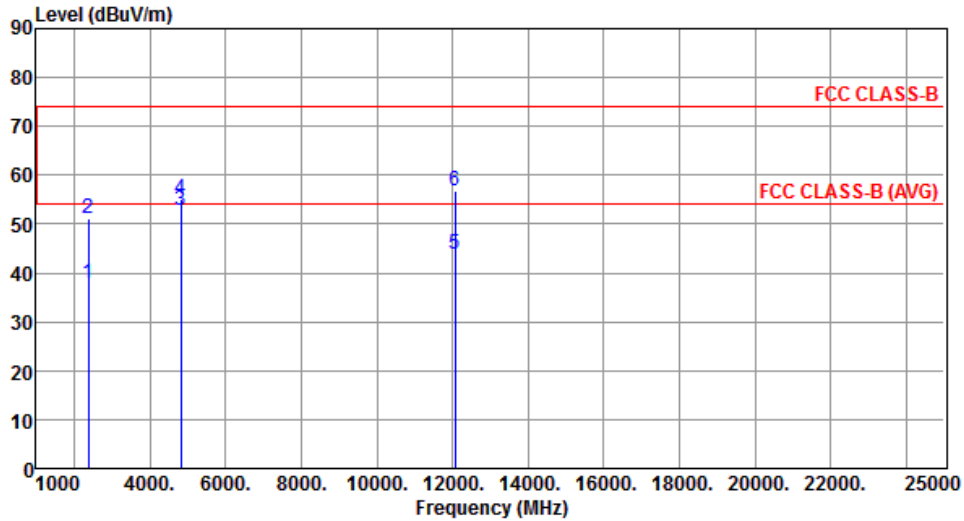


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.95	54.00	-16.05	37.53	0.42	Average	376	122
2	2390.00	51.01	74.00	-22.99	50.59	0.42	Peak	376	122
3	4824.00	52.79	54.00	-1.21	46.40	6.39	Average	100	218
4	4824.00	55.13	74.00	-18.87	48.74	6.39	Peak	100	218
5	12060.00	43.78	54.00	-10.22	27.20	16.58	Average	100	221
6	12060.00	56.64	74.00	-17.36	40.06	16.58	Peak	100	221

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11b	Test Freq. (MHz)	2437
Polarization	Horizontal		

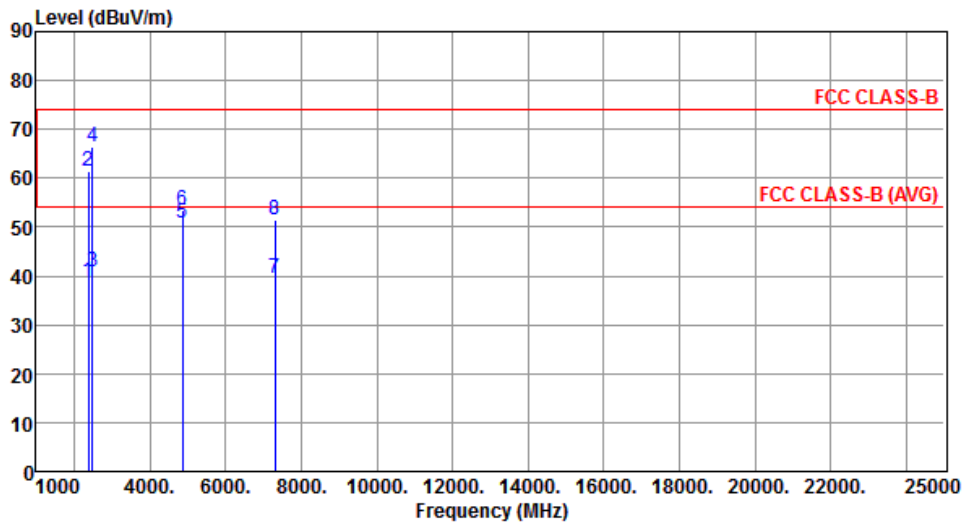


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.95	54.00	-15.05	38.53	0.42	Average	100	40
2	2390.00	61.43	74.00	-12.57	61.01	0.42	Peak	100	40
3	2483.50	40.69	54.00	-13.31	40.43	0.26	Average	100	40
4	2483.50	66.45	74.00	-7.55	66.19	0.26	Peak	100	40
5	4874.00	50.94	54.00	-3.06	44.51	6.43	Average	100	131
6	4874.00	53.42	74.00	-20.58	46.99	6.43	Peak	100	131
7	7311.00	39.37	54.00	-14.63	27.55	11.82	Average	100	156
8	7311.00	51.40	74.00	-22.60	39.58	11.82	Peak	100	156

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11b	Test Freq. (MHz)	2437
Polarization	Vertical		

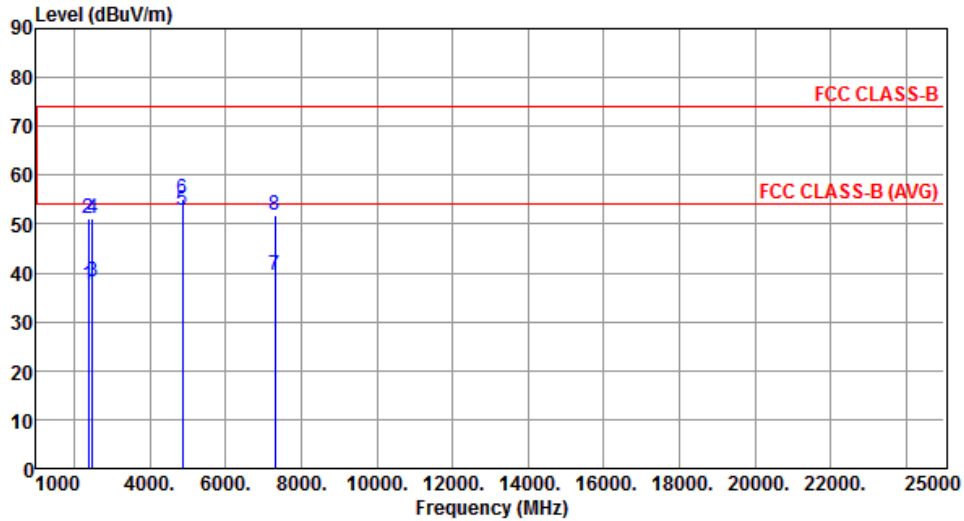


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.51	54.00	-16.49	37.09	0.42	Average	367	93
2	2390.00	51.17	74.00	-22.83	50.75	0.42	Peak	367	93
3	2483.50	38.07	54.00	-15.93	37.81	0.26	Average	367	93
4	2483.50	51.02	74.00	-22.98	50.76	0.26	Peak	367	93
5	4874.00	52.89	54.00	-1.11	46.46	6.43	Average	100	152
6	4874.00	55.23	74.00	-18.77	48.80	6.43	Peak	100	152
7	7311.00	39.38	54.00	-14.62	27.56	11.82	Average	100	80
8	7311.00	51.69	74.00	-22.31	39.87	11.82	Peak	100	80

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11b	Test Freq. (MHz)	2462
Polarization	Horizontal		

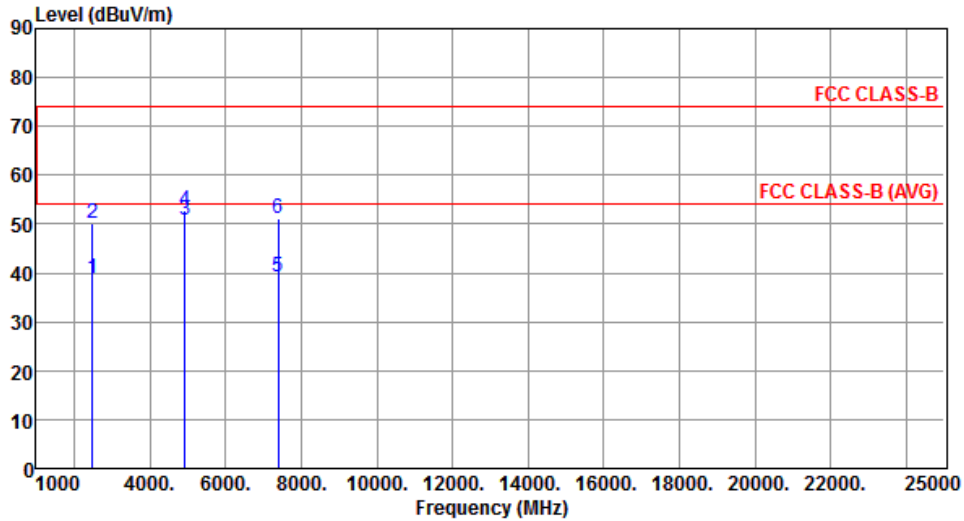


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	38.92	54.00	-15.08	38.66	0.26	Average	100	42
2	2483.50	50.06	74.00	-23.94	49.80	0.26	Peak	100	42
3	4924.00	50.97	54.00	-3.03	44.44	6.53	Average	100	132
4	4924.00	52.97	74.00	-21.03	46.44	6.53	Peak	100	132
5	7386.00	39.14	54.00	-14.86	27.52	11.62	Average	100	155
6	7386.00	51.21	74.00	-22.79	39.59	11.62	Peak	100	155

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11b	Test Freq. (MHz)	2462
Polarization	Vertical		

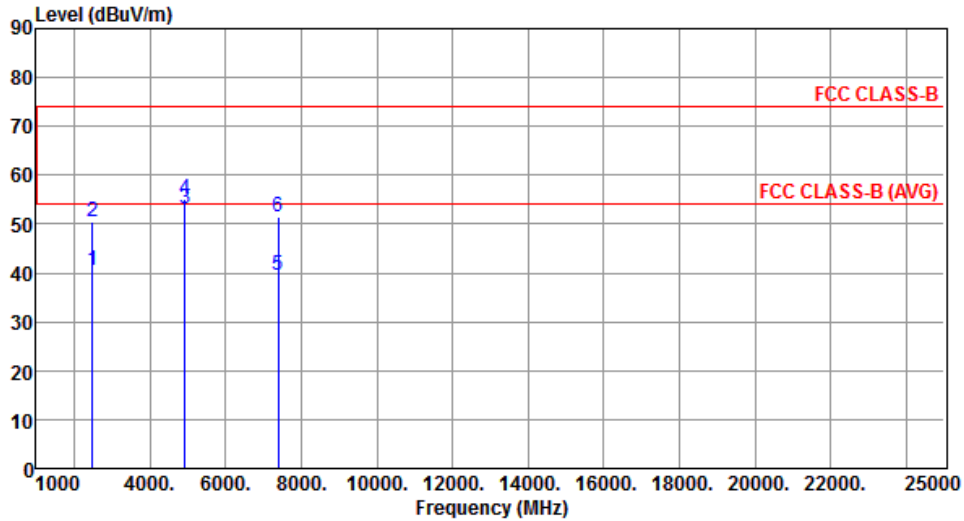

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	40.62	54.00	-13.38	40.36	0.26	Average	350	95
2	2483.50	50.36	74.00	-23.64	50.10	0.26	Peak	350	95
3	4924.00	53.22	54.00	-0.78	46.69	6.53	Average	100	267
4	4924.00	55.22	74.00	-18.78	48.69	6.53	Peak	100	267
5	7386.00	39.39	54.00	-14.61	27.77	11.62	Average	100	81
6	7386.00	51.43	74.00	-22.57	39.81	11.62	Peak	100	81


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

Modulation	11g	Test Freq. (MHz)	2412
Polarization	Horizontal		

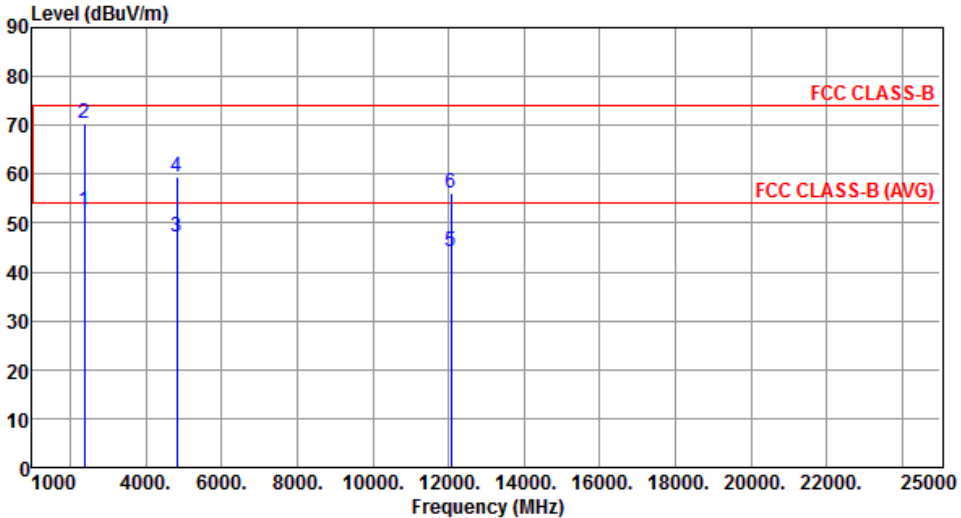


The graph plots Level (dBUV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (1000 to 25000). Two horizontal red lines represent FCC CLASS-B (at ~74 dB) and FCC CLASS-B (AVG) (at ~54 dB). Six vertical blue lines represent individual test points, labeled 1 through 6, with their emission levels and margins indicated by numbers at the top of the lines.

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.61	54.00	-1.39	52.19	0.42	Average	110	37
2	2390.00	70.48	74.00	-3.52	70.06	0.42	Peak	110	37
3	4824.00	47.11	54.00	-6.89	40.72	6.39	Average	100	139
4	4824.00	59.38	74.00	-14.62	52.99	6.39	Peak	100	139
5	12060.00	44.25	54.00	-9.75	27.67	16.58	Average	100	15
6	12060.00	56.25	74.00	-17.75	39.67	16.58	Peak	100	15

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	11g	Test Freq. (MHz)	2412
Polarization	Vertical		

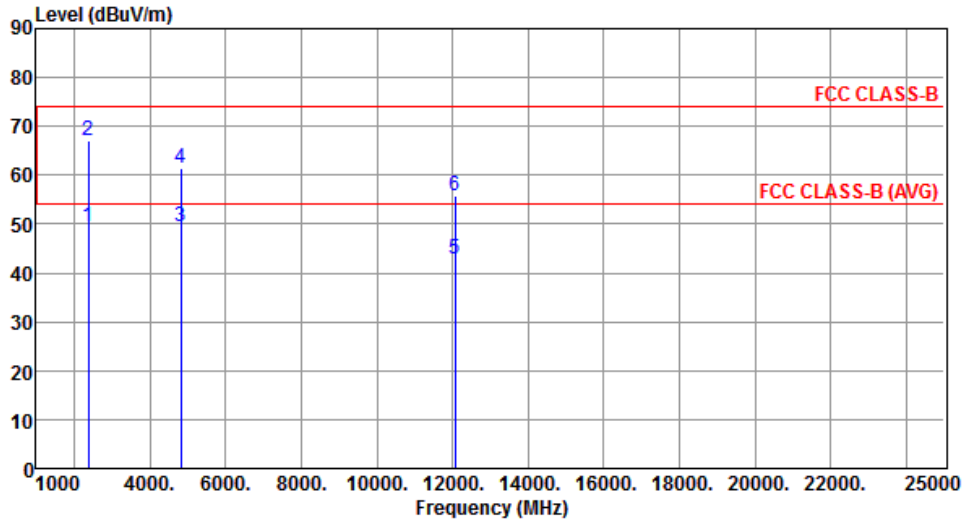


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	49.37	54.00	-4.63	48.95	0.42	Average	348	95
2	2390.00	67.13	74.00	-6.87	66.71	0.42	Peak	348	95
3	4824.00	49.35	54.00	-4.65	42.96	6.39	Average	113	272
4	4824.00	61.39	74.00	-12.61	55.00	6.39	Peak	113	272
5	12060.00	42.88	54.00	-11.12	26.30	16.58	Average	100	115
6	12060.00	55.89	74.00	-18.11	39.31	16.58	Peak	100	115

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11g	Test Freq. (MHz)	2437
Polarization	Horizontal		

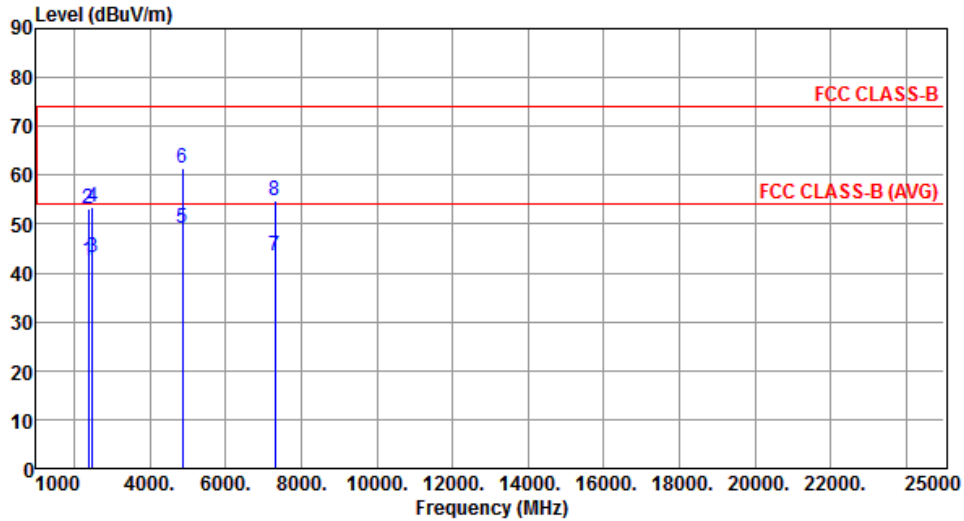


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	42.52	54.00	-11.48	42.10	0.42	Average	113	45
2	2390.00	53.18	74.00	-20.82	52.76	0.42	Peak	113	45
3	2483.50	43.13	54.00	-10.87	42.87	0.26	Average	113	45
4	2483.50	53.54	74.00	-20.46	53.28	0.26	Peak	113	45
5	4874.00	49.18	54.00	-4.82	42.75	6.43	Average	100	136
6	4874.00	61.45	74.00	-12.55	55.02	6.43	Peak	100	136
7	7311.00	43.66	54.00	-10.34	31.84	11.82	Average	100	155
8	7311.00	54.67	74.00	-19.33	42.85	11.82	Peak	100	155

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11g	Test Freq. (MHz)	2437
Polarization	Vertical		

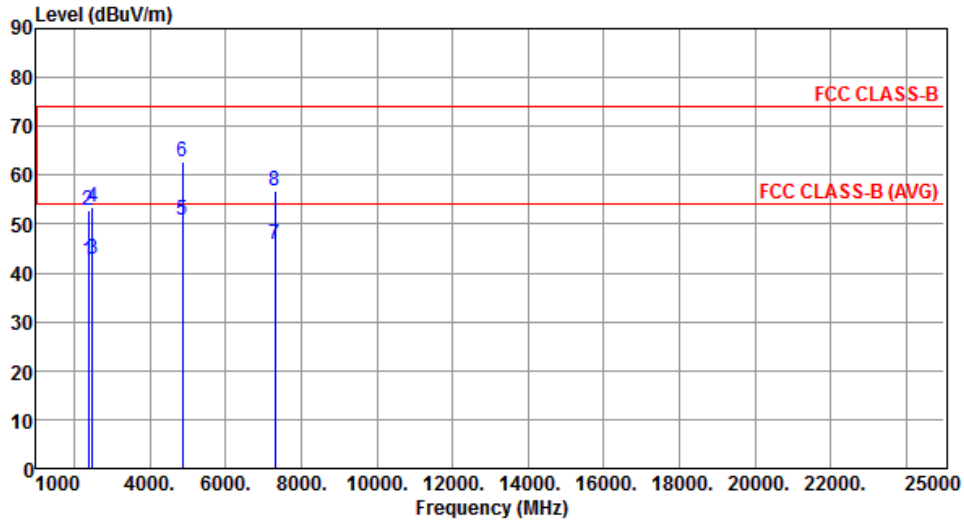


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	42.61	54.00	-11.39	42.19	0.42	Average	350	92
2	2390.00	52.90	74.00	-21.10	52.48	0.42	Peak	350	92
3	2483.50	42.95	54.00	-11.05	42.69	0.26	Average	350	92
4	2483.50	53.46	74.00	-20.54	53.20	0.26	Peak	350	92
5	4874.00	50.88	54.00	-3.12	44.45	6.43	Average	114	271
6	4874.00	62.66	74.00	-11.34	56.23	6.43	Peak	114	271
7	7311.00	45.75	54.00	-8.25	33.93	11.82	Average	100	79
8	7311.00	56.77	74.00	-17.23	44.95	11.82	Peak	100	79

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11g	Test Freq. (MHz)	2462
Polarization	Horizontal		

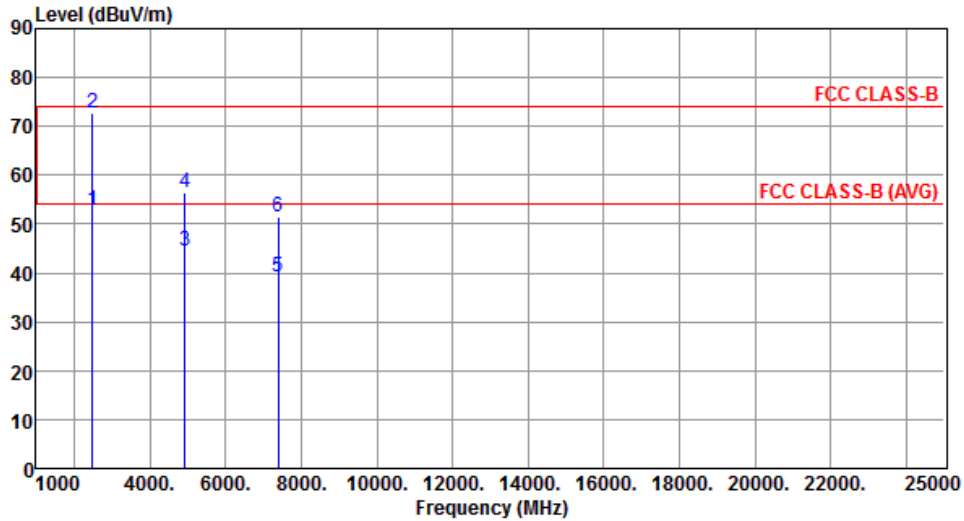


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.74	54.00	-1.26	52.48	0.26	Average	104	42
2	2483.50	72.79	74.00	-1.21	72.53	0.26	Peak	104	42
3	4924.00	44.57	54.00	-9.43	38.04	6.53	Average	100	133
4	4924.00	56.58	74.00	-17.42	50.05	6.53	Peak	100	133
5	7386.00	39.06	54.00	-14.94	27.44	11.62	Average	100	157
6	7386.00	51.41	74.00	-22.59	39.79	11.62	Peak	100	157

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11g	Test Freq. (MHz)	2462
Polarization	Vertical		

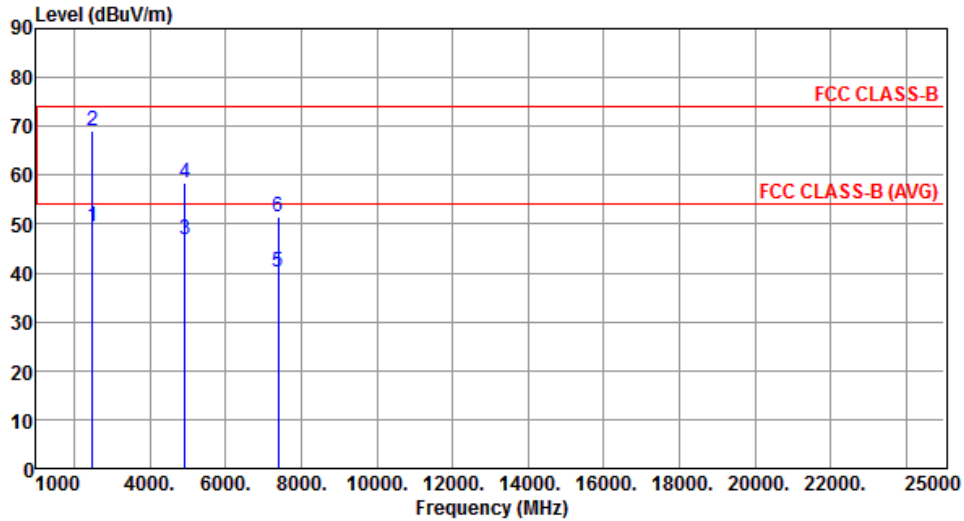

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	49.62	54.00	-4.38	49.36	0.26	Average	347	92
2	2483.50	68.98	74.00	-5.02	68.72	0.26	Peak	347	92
3	4924.00	46.71	54.00	-7.29	40.18	6.53	Average	116	271
4	4924.00	58.60	74.00	-15.40	52.07	6.53	Peak	116	271
5	7386.00	40.07	54.00	-13.93	28.45	11.62	Average	100	83
6	7386.00	51.41	74.00	-22.59	39.79	11.62	Peak	100	83


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

Modulation	HT20	Test Freq. (MHz)	2412
Polarization	Horizontal		

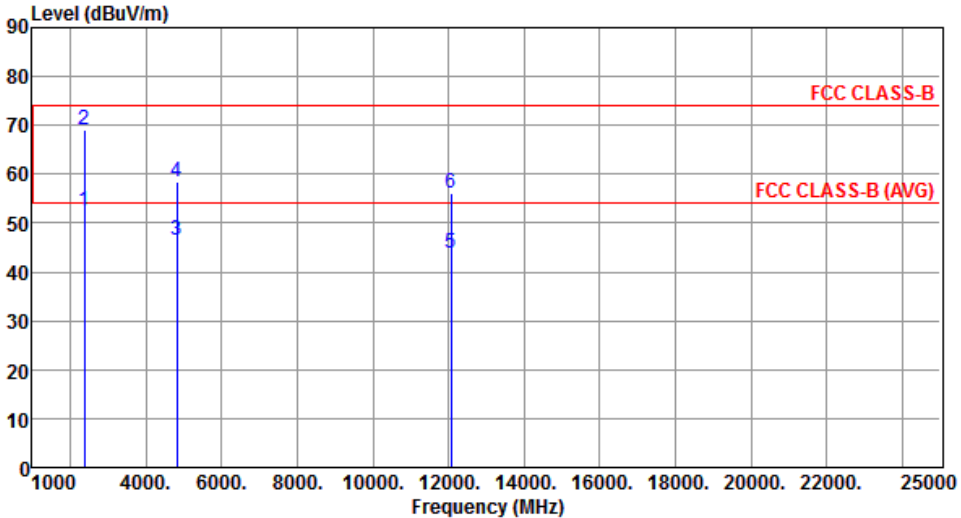


The graph plots Level (dBUV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (1000 to 25000). Two horizontal red lines represent FCC CLASS-B (at ~74 dBuV/m) and FCC CLASS-B (AVG) (at ~54 dBuV/m). Six vertical blue lines represent individual test points, labeled 1 through 6, with their emission levels and margins indicated by the numbers above the lines.

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.55	54.00	-1.45	52.13	0.42	Average	107	39
2	2390.00	69.19	74.00	-4.81	68.77	0.42	Peak	107	39
3	4824.00	46.42	54.00	-7.58	40.03	6.39	Average	100	133
4	4824.00	58.41	74.00	-15.59	52.02	6.39	Peak	100	133
5	12060.00	43.81	54.00	-10.19	27.23	16.58	Average	100	20
6	12060.00	55.96	74.00	-18.04	39.38	16.58	Peak	100	20

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	HT20	Test Freq. (MHz)	2412
Polarization	Vertical		

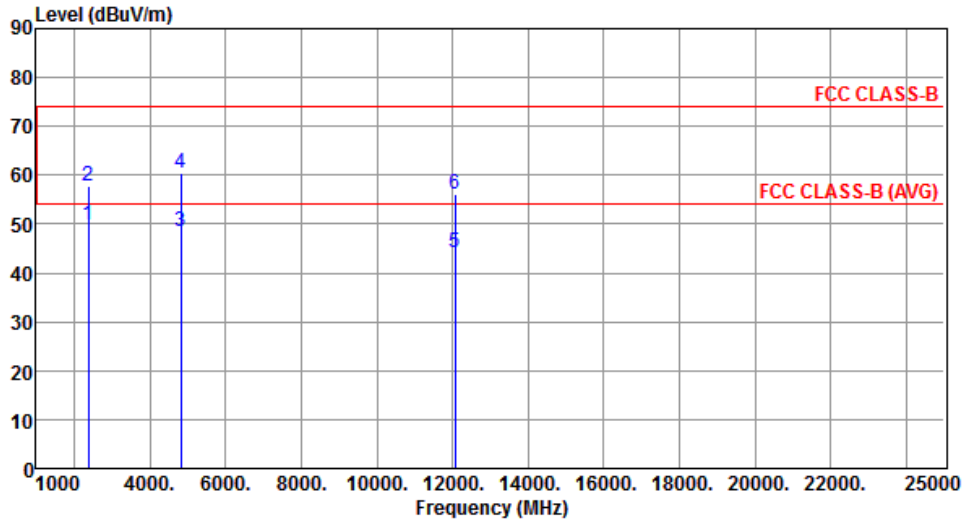


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	49.87	54.00	-4.13	49.45	0.42	Average	346	94
2	2390.00	57.81	74.00	-16.19	57.39	0.42	Peak	346	94
3	4824.00	48.37	54.00	-5.63	41.98	6.39	Average	113	275
4	4824.00	60.45	74.00	-13.55	54.06	6.39	Peak	113	275
5	12060.00	44.12	54.00	-9.88	27.54	16.58	Average	100	113
6	12060.00	56.16	74.00	-17.84	39.58	16.58	Peak	100	113

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	2437
Polarization	Horizontal		

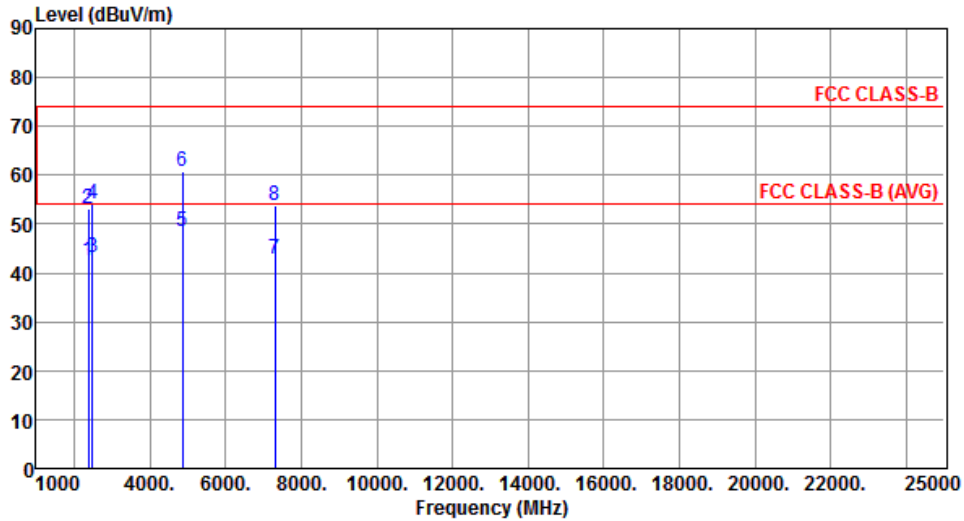


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	42.58	54.00	-11.42	42.16	0.42	Average	111	42
2	2390.00	53.28	74.00	-20.72	52.86	0.42	Peak	111	42
3	2483.50	43.17	54.00	-10.83	42.91	0.26	Average	111	42
4	2483.50	54.13	74.00	-19.87	53.87	0.26	Peak	111	42
5	4874.00	48.46	54.00	-5.54	42.03	6.43	Average	100	140
6	4874.00	60.68	74.00	-13.32	54.25	6.43	Peak	100	140
7	7311.00	42.77	54.00	-11.23	30.95	11.82	Average	100	150
8	7311.00	53.80	74.00	-20.20	41.98	11.82	Peak	100	150

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	2437
Polarization	Vertical		

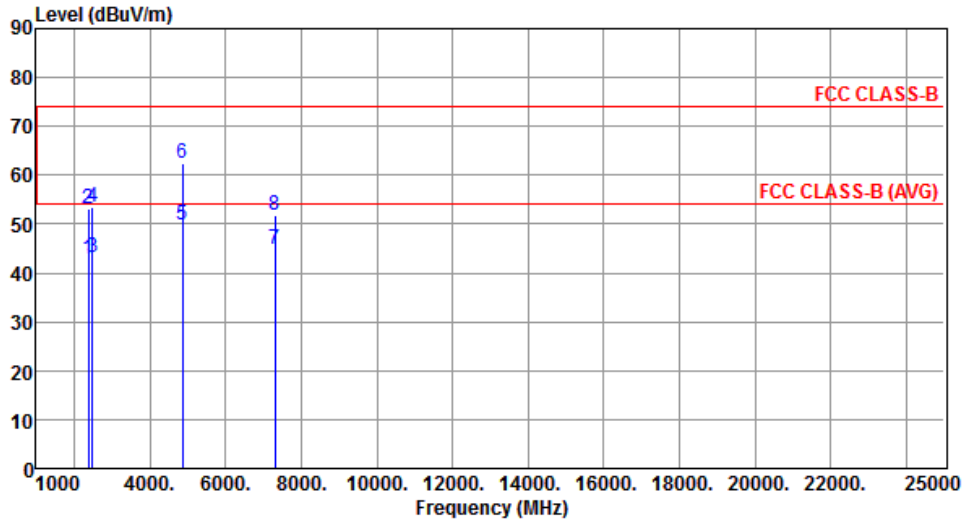


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	42.76	54.00	-11.24	42.34	0.42	Average	350	91
2	2390.00	53.15	74.00	-20.85	52.73	0.42	Peak	350	91
3	2483.50	43.04	54.00	-10.96	42.78	0.26	Average	350	91
4	2483.50	53.54	74.00	-20.46	53.28	0.26	Peak	350	91
5	4874.00	49.97	54.00	-4.03	43.54	6.43	Average	110	270
6	4874.00	62.27	74.00	-11.73	55.84	6.43	Peak	110	270
7	7311.00	44.77	54.00	-9.23	32.95	11.82	Average	100	82
8	7311.00	51.70	74.00	-22.30	39.88	11.82	Peak	100	82

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	2462
Polarization	Horizontal		

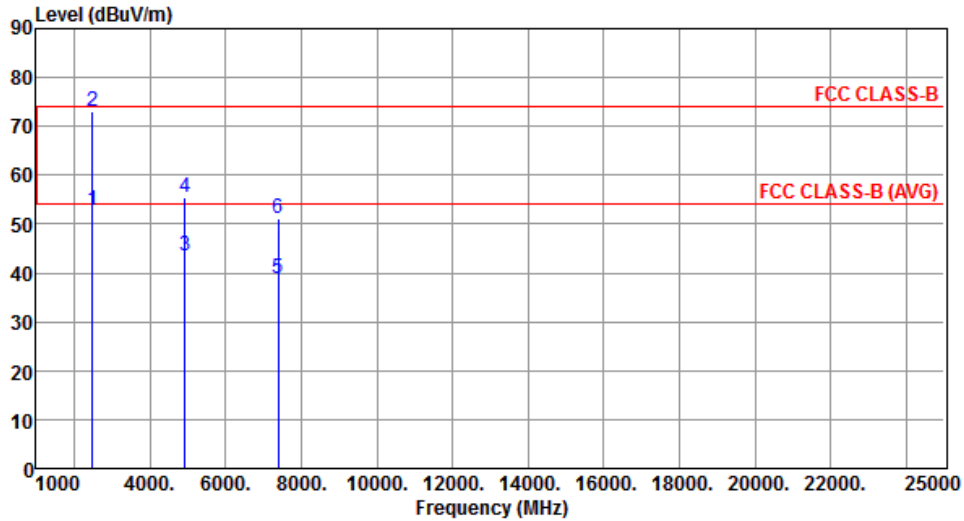


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.68	54.00	-1.32	52.42	0.26	Average	107	39
2	2483.50	72.97	74.00	-1.03	72.71	0.26	Peak	107	39
3	4924.00	43.67	54.00	-10.33	37.14	6.53	Average	100	132
4	4924.00	55.60	74.00	-18.40	49.07	6.53	Peak	100	132
5	7386.00	38.95	54.00	-15.05	27.33	11.62	Average	100	150
6	7386.00	51.25	74.00	-22.75	39.63	11.62	Peak	100	150

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	2462
Polarization	Vertical		

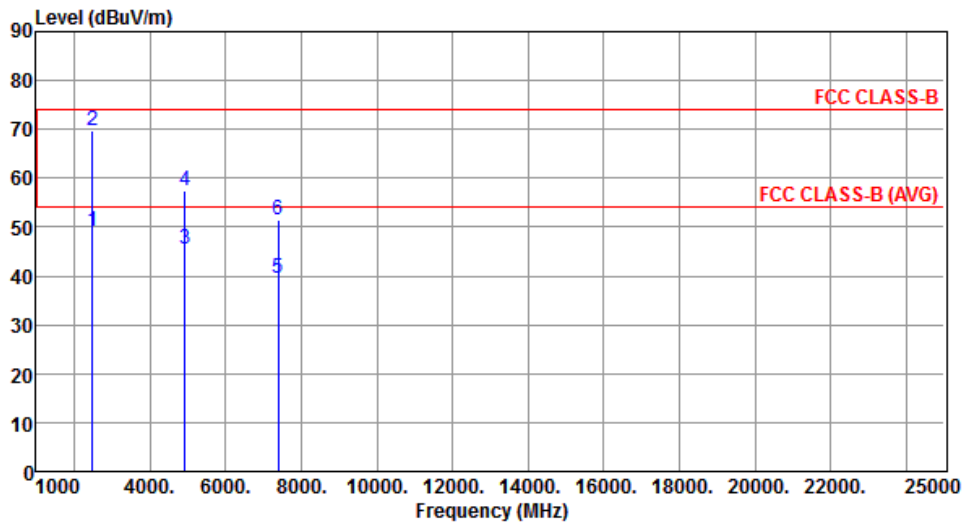


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	49.15	54.00	-4.85	48.89	0.26	Average	337	93
2	2483.50	69.62	74.00	-4.38	69.36	0.26	Peak	337	93
3	4924.00	45.60	54.00	-8.40	39.07	6.53	Average	115	273
4	4924.00	57.61	74.00	-16.39	51.08	6.53	Peak	115	273
5	7386.00	39.44	54.00	-14.56	27.82	11.62	Average	100	110
6	7386.00	51.44	74.00	-22.56	39.82	11.62	Peak	100	110

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

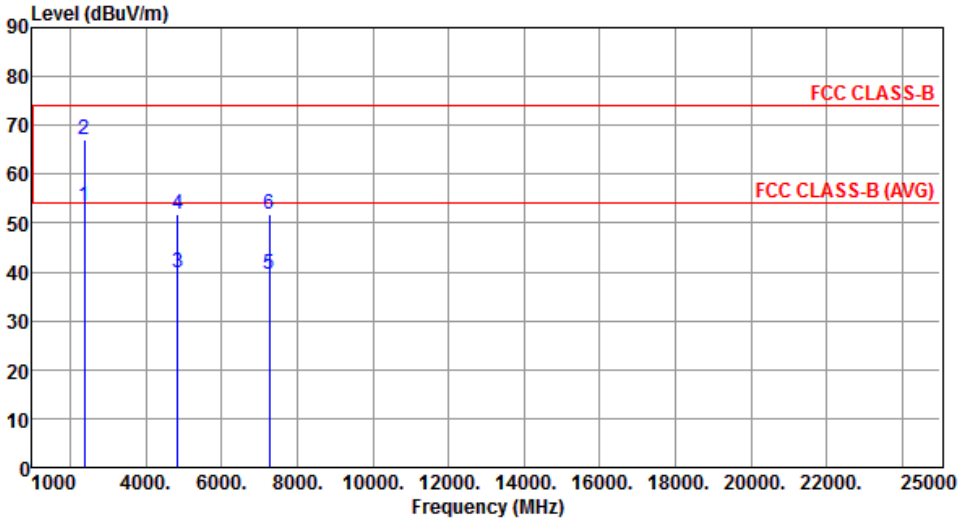Modulation	HT40	Test Freq. (MHz)	2422						
Polarization	Horizontal								
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	53.47	54.00	-0.53	53.05	0.42	Average	105	34
2	2390.00	67.18	74.00	-6.82	66.76	0.42	Peak	105	34
3	4844.00	39.77	54.00	-14.23	33.32	6.45	Average	100	132
4	4844.00	51.76	74.00	-22.24	45.31	6.45	Peak	100	132
5	7266.00	39.45	54.00	-14.55	27.58	11.87	Average	100	152
6	7266.00	51.77	74.00	-22.23	39.90	11.87	Peak	100	152

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	HT40	Test Freq. (MHz)	2422
Polarization	Vertical		

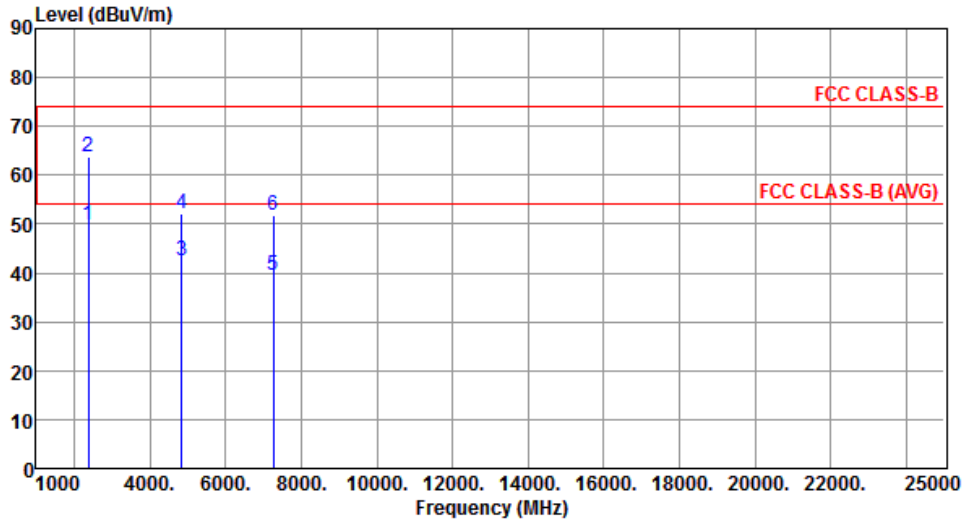


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	49.87	54.00	-4.13	49.45	0.42	Average	346	98
2	2390.00	63.74	74.00	-10.26	63.32	0.42	Peak	346	98
3	4844.00	42.51	54.00	-11.49	36.06	6.45	Average	113	272
4	4844.00	52.06	74.00	-21.94	45.61	6.45	Peak	113	272
5	7266.00	39.53	54.00	-14.47	27.66	11.87	Average	100	112
6	7266.00	51.82	74.00	-22.18	39.95	11.87	Peak	100	112

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	2437
Polarization	Horizontal		

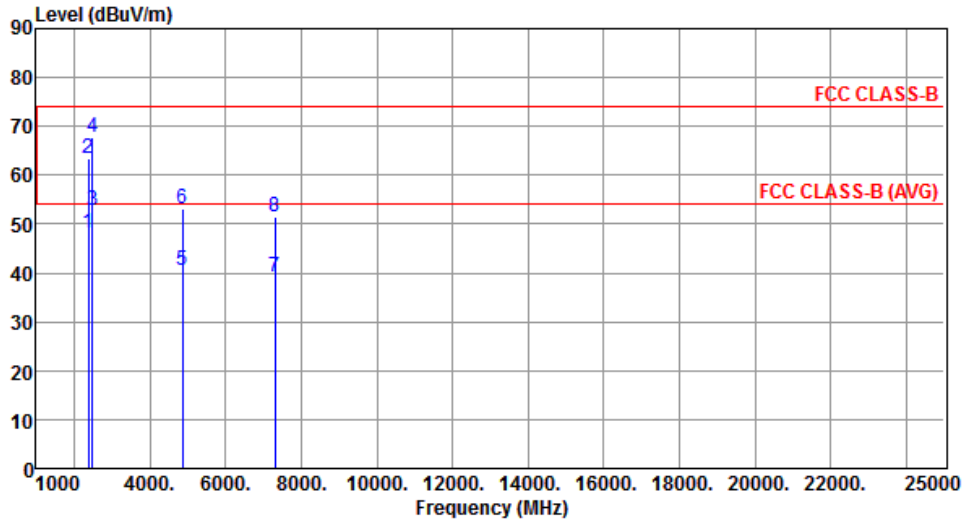


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	48.22	54.00	-5.78	47.80	0.42	Average	106	34
2	2390.00	63.56	74.00	-10.44	63.14	0.42	Peak	106	34
3	2483.50	52.85	54.00	-1.15	52.59	0.26	Average	106	34
4	2483.50	67.71	74.00	-6.29	67.45	0.26	Peak	106	34
5	4874.00	40.65	54.00	-13.35	34.22	6.43	Average	100	133
6	4874.00	53.12	74.00	-20.88	46.69	6.43	Peak	100	133
7	7311.00	39.12	54.00	-14.88	27.30	11.82	Average	100	151
8	7311.00	51.62	74.00	-22.38	39.80	11.82	Peak	100	151

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	2437
Polarization	Vertical		

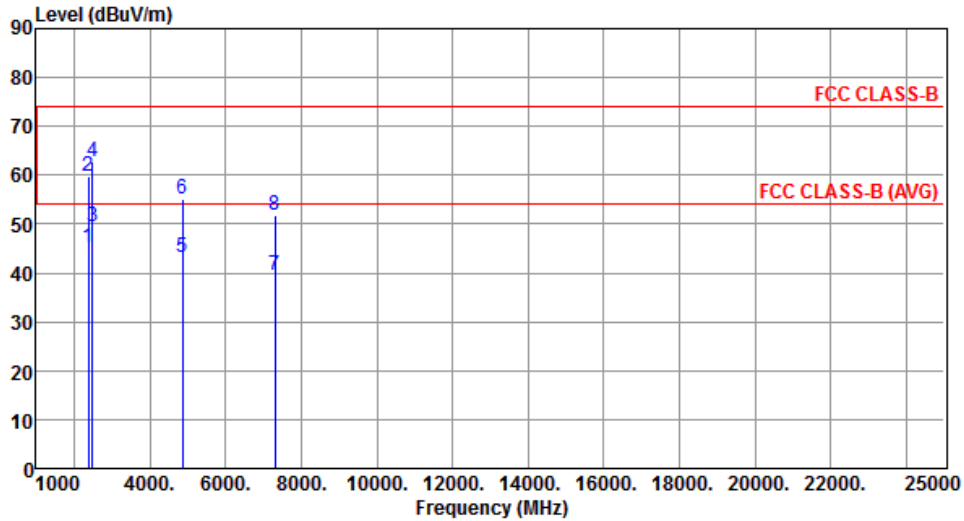


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	45.14	54.00	-8.86	44.72	0.42	Average	349	95
2	2390.00	59.79	74.00	-14.21	59.37	0.42	Peak	349	95
3	2483.50	49.49	54.00	-4.51	49.23	0.26	Average	349	95
4	2483.50	62.67	74.00	-11.33	62.41	0.26	Peak	349	95
5	4874.00	43.21	54.00	-10.79	36.78	6.43	Average	112	280
6	4874.00	55.12	74.00	-18.88	48.69	6.43	Peak	112	280
7	7311.00	39.66	54.00	-14.34	27.84	11.82	Average	100	118
8	7311.00	51.78	74.00	-22.22	39.96	11.82	Peak	100	118

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	2452
Polarization	Horizontal		

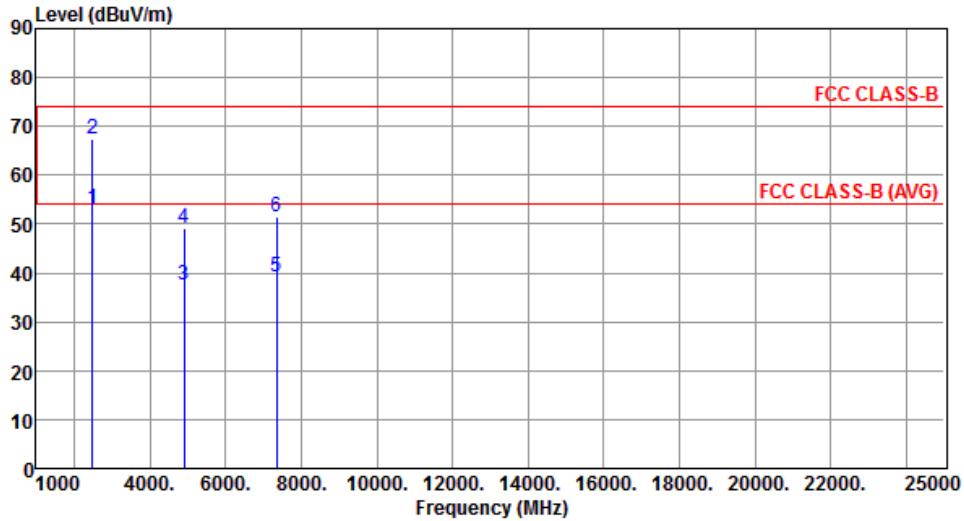


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	53.27	54.00	-0.73	53.01	0.26	Average	100	40
2	2483.50	67.54	74.00	-6.46	67.28	0.26	Peak	100	40
3	4904.00	37.49	54.00	-16.51	31.06	6.43	Average	100	133
4	4904.00	49.17	74.00	-24.83	42.74	6.43	Peak	100	133
5	7356.00	39.21	54.00	-14.79	27.51	11.70	Average	100	153
6	7356.00	51.53	74.00	-22.47	39.83	11.70	Peak	100	153

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	2452
Polarization	Vertical		

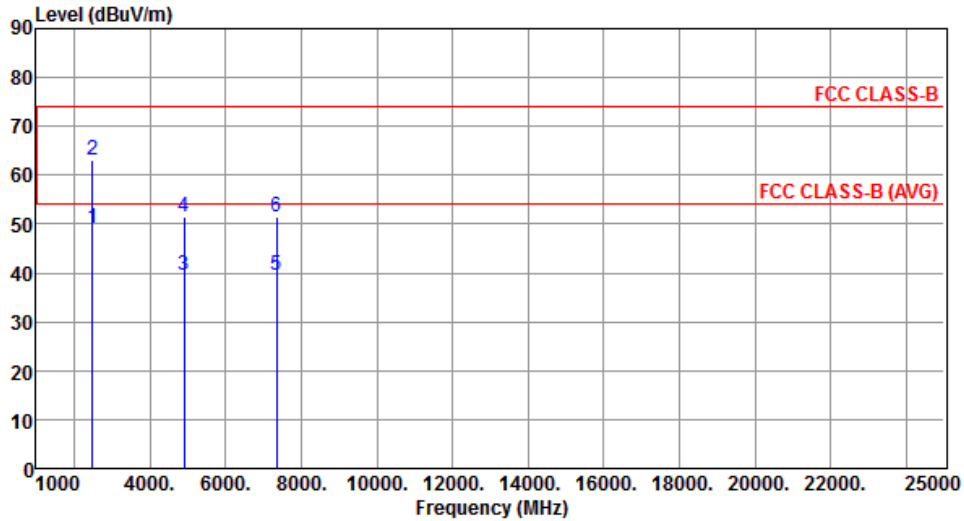

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	49.20	54.00	-4.80	48.94	0.26	Average	336	91
2	2483.50	63.03	74.00	-10.97	62.77	0.26	Peak	336	91
3	4904.00	39.57	54.00	-14.43	33.14	6.43	Average	106	276
4	4904.00	51.51	74.00	-22.49	45.08	6.43	Peak	106	276
5	7356.00	39.42	54.00	-14.58	27.72	11.70	Average	100	111
6	7356.00	51.64	74.00	-22.36	39.94	11.70	Peak	100	111

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6 Emissions in Non-Restricted Frequency Bands

3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.6.2 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level


Emission level measurement




1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level




3.6.3 Test Setup



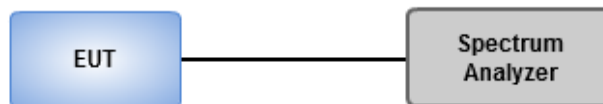


3.6.4 Unwanted Emissions into Non-Restricted Frequency Bands

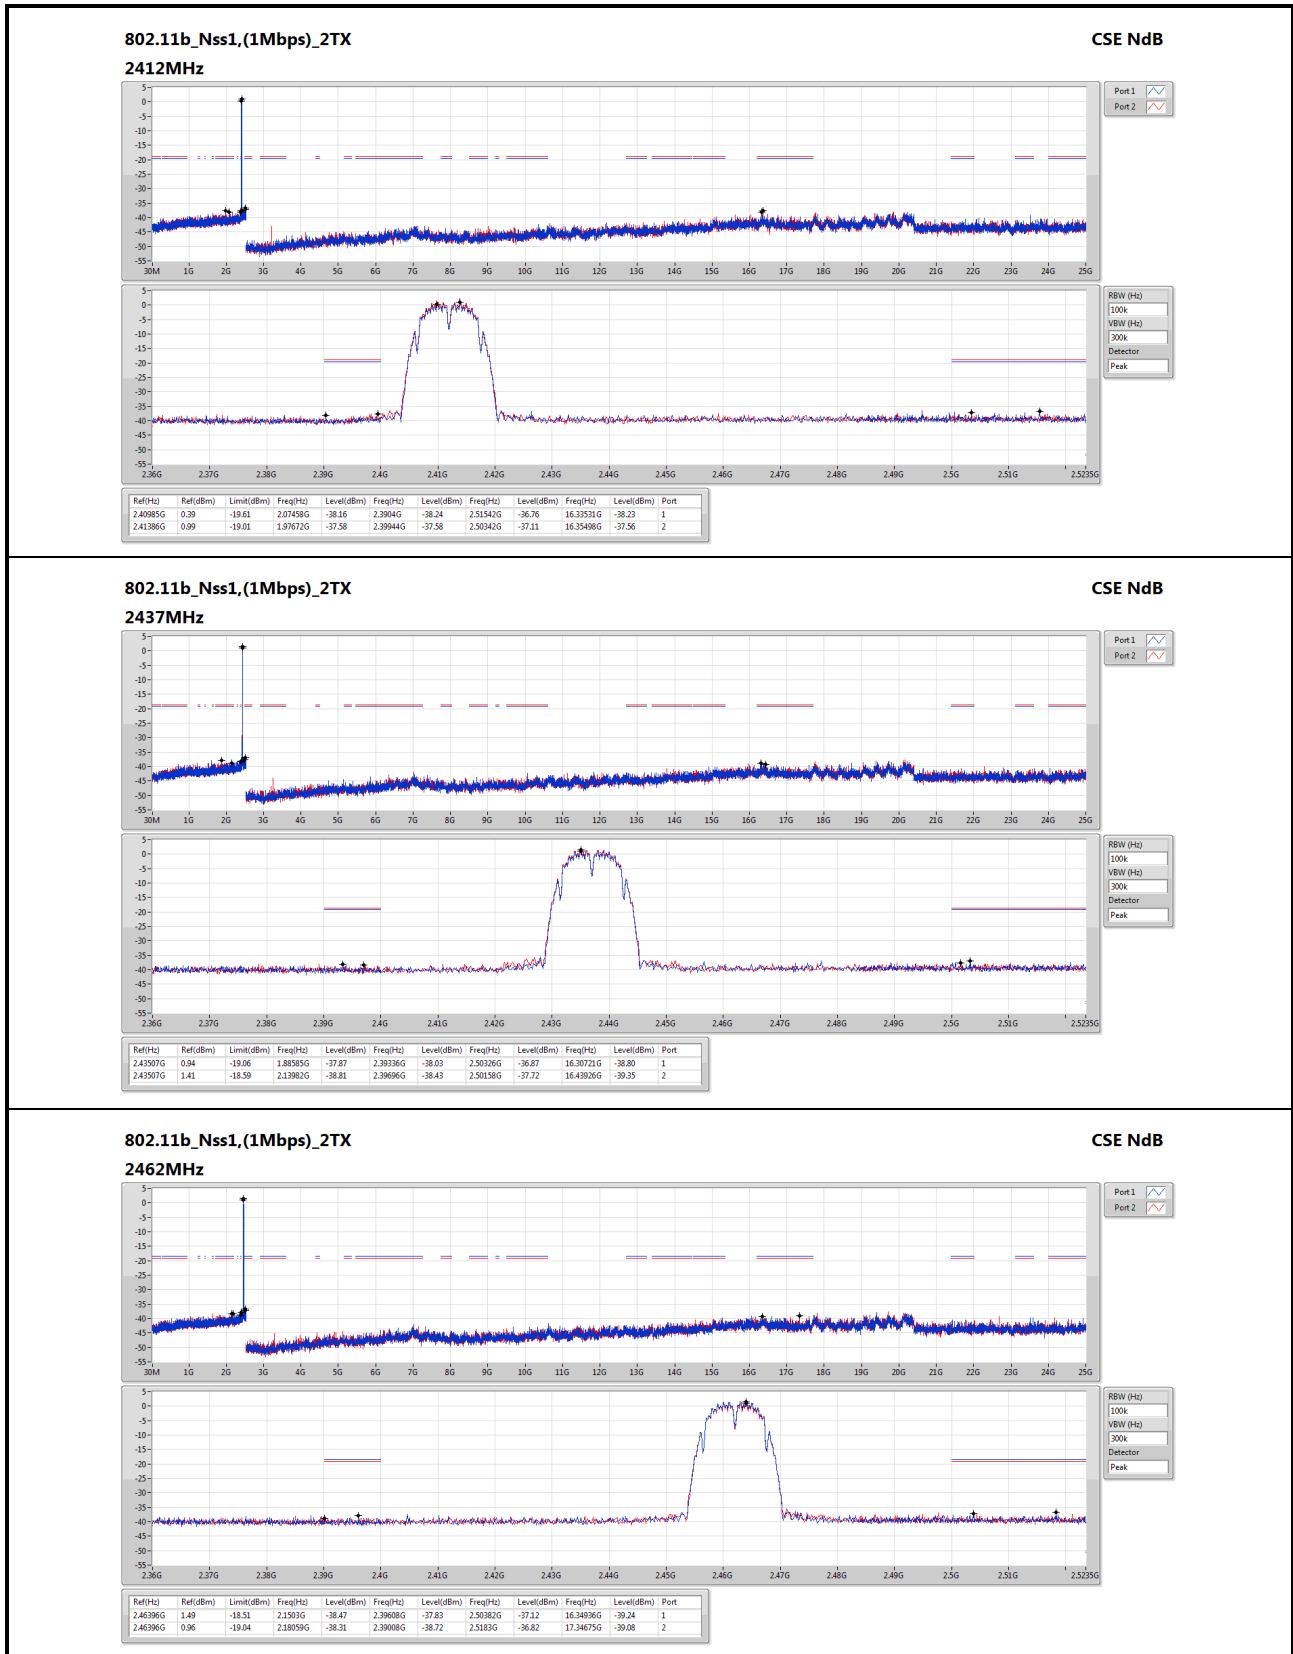
802.11b_Nss1,(1Mbps)_2TX
CSE NdB

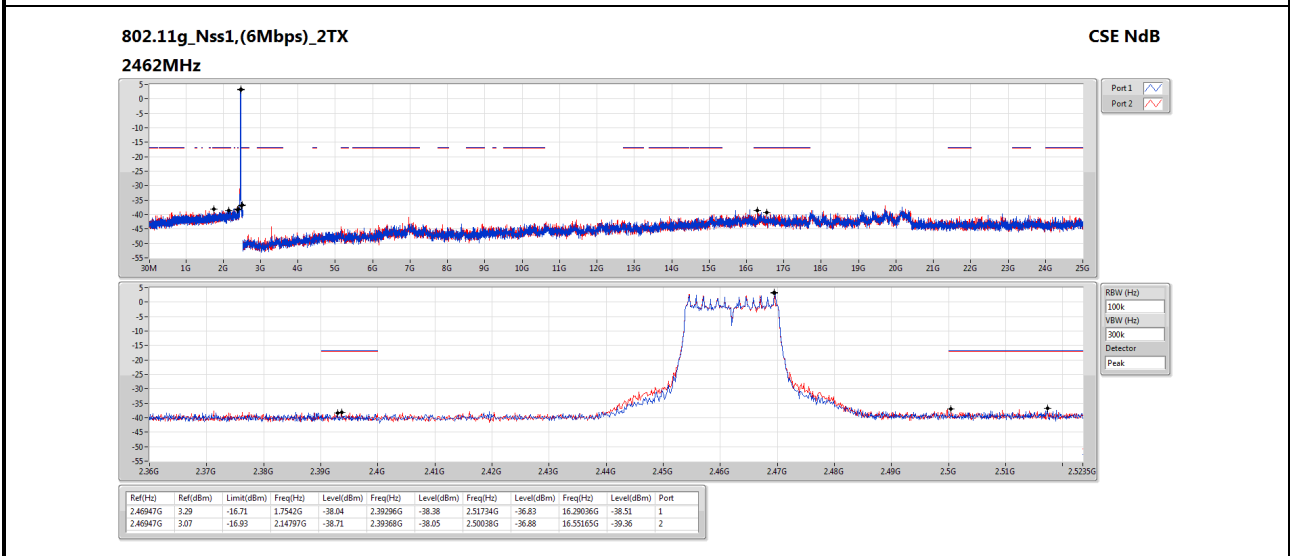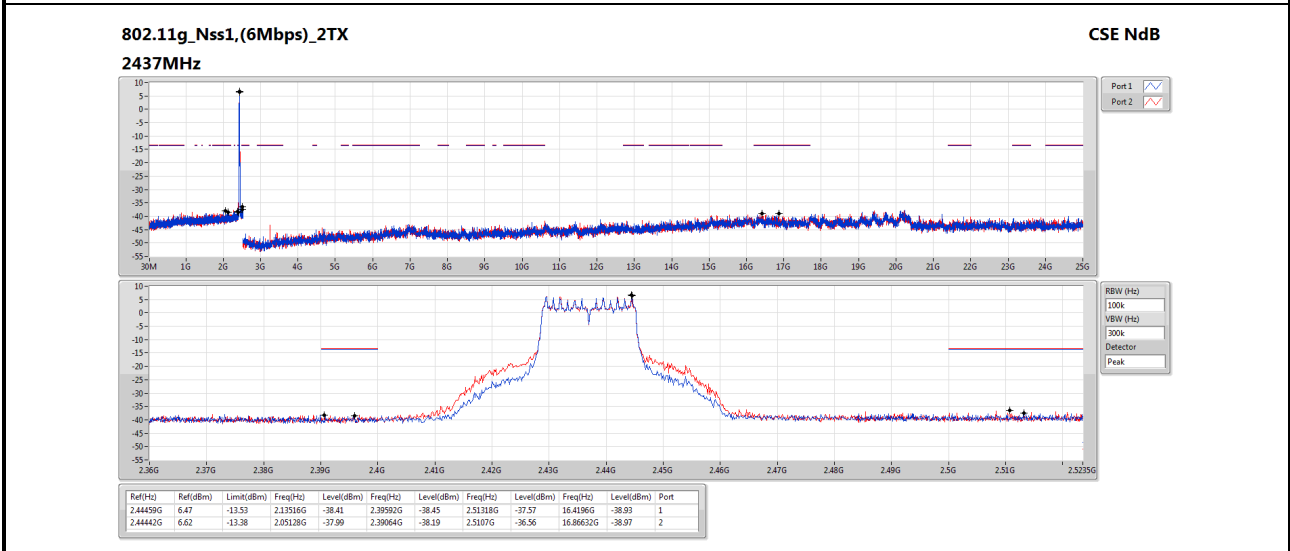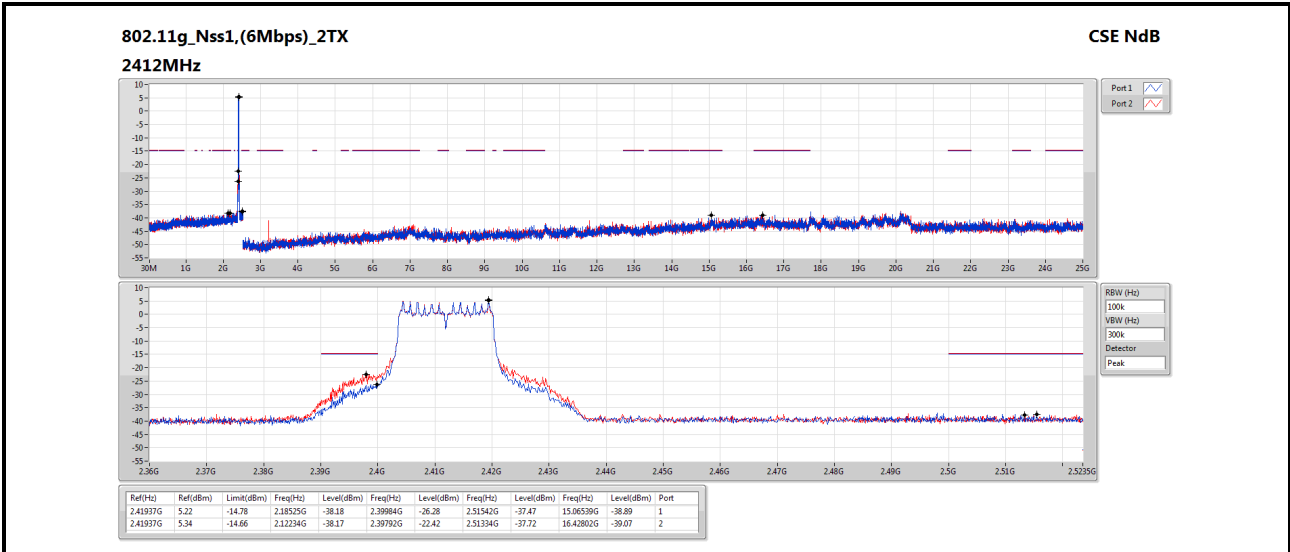

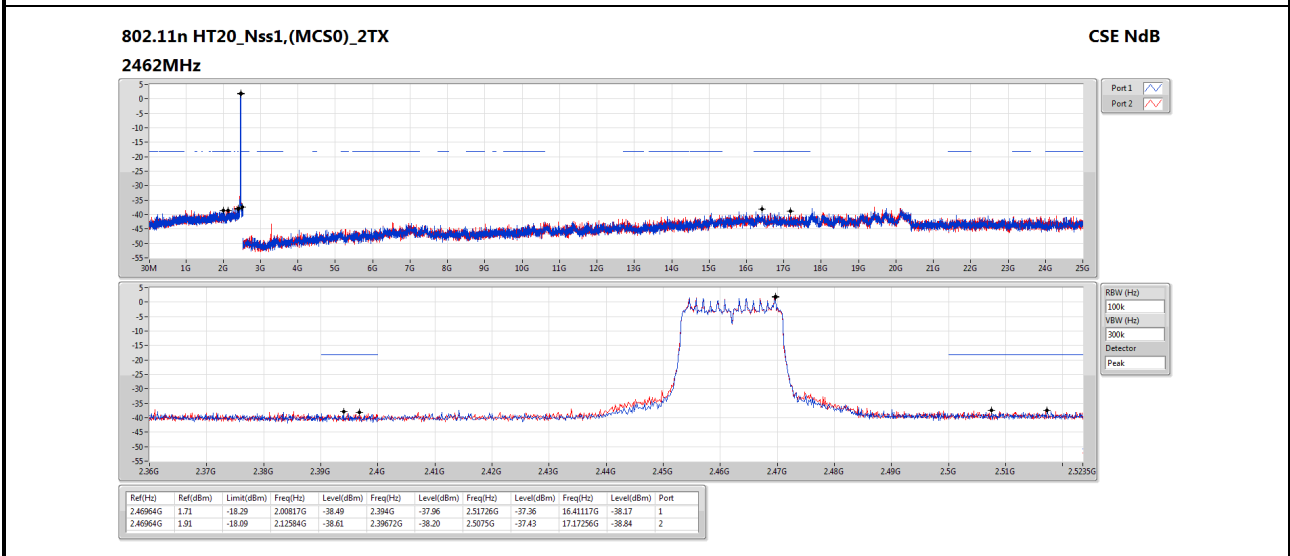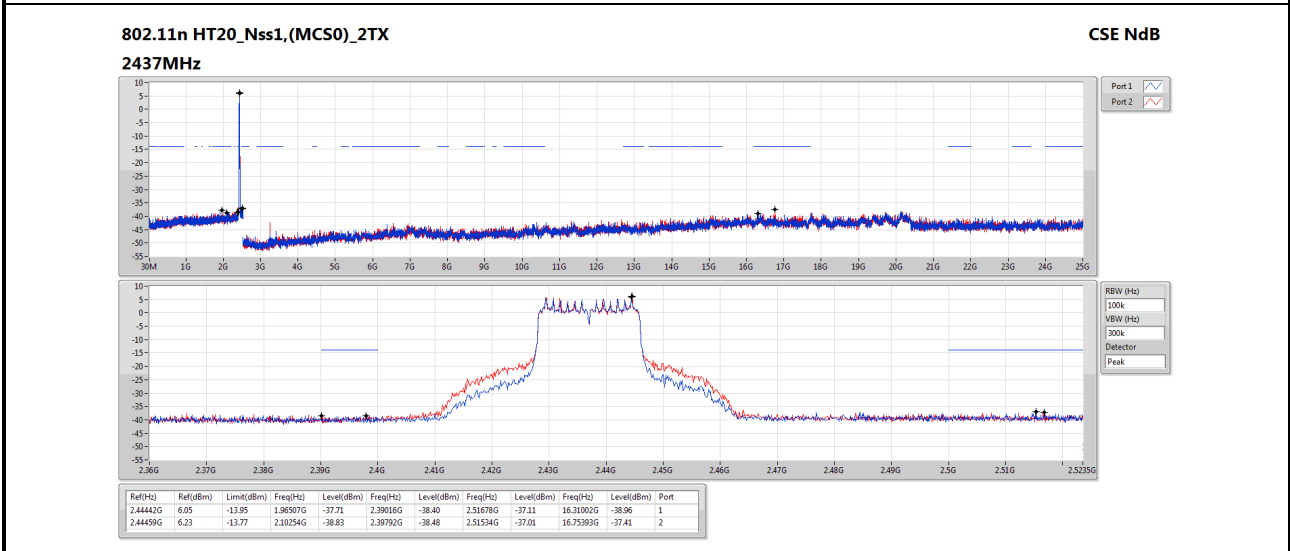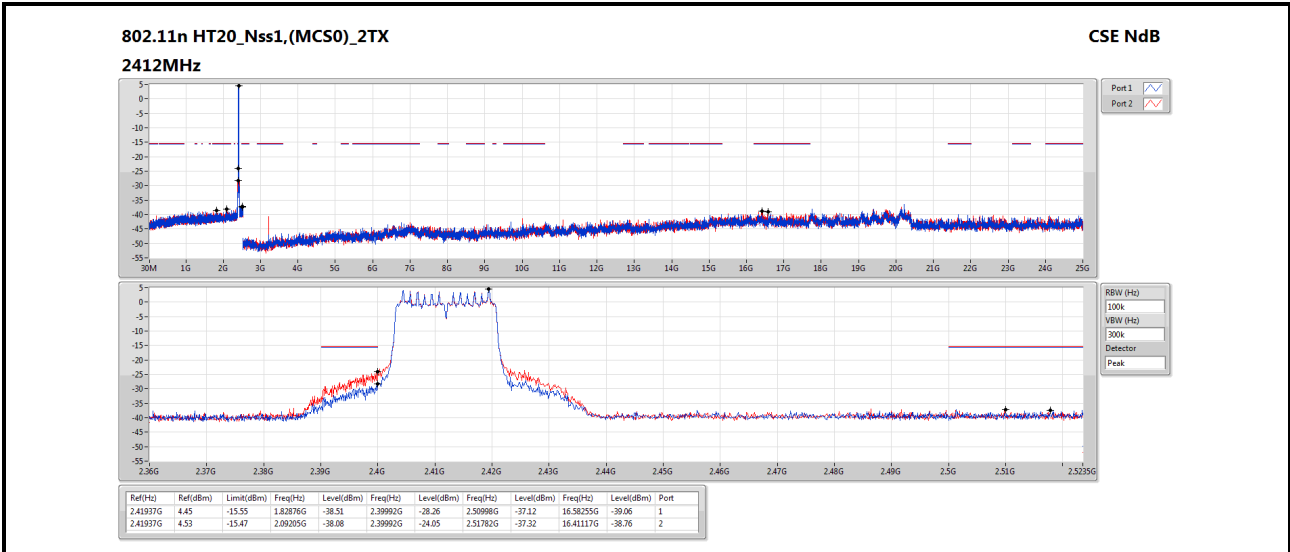

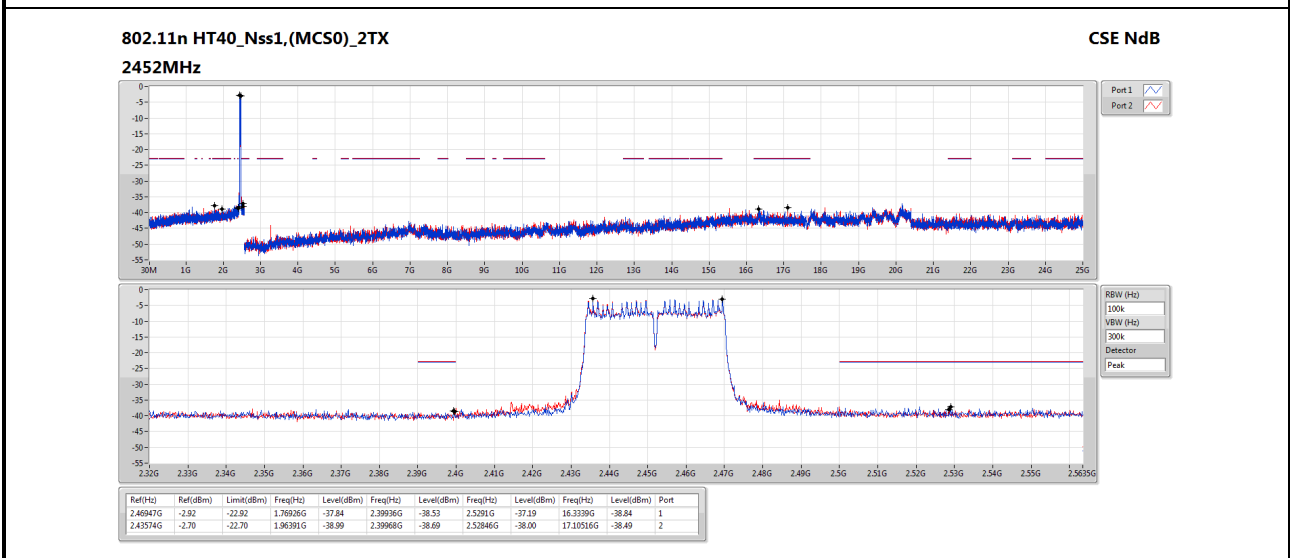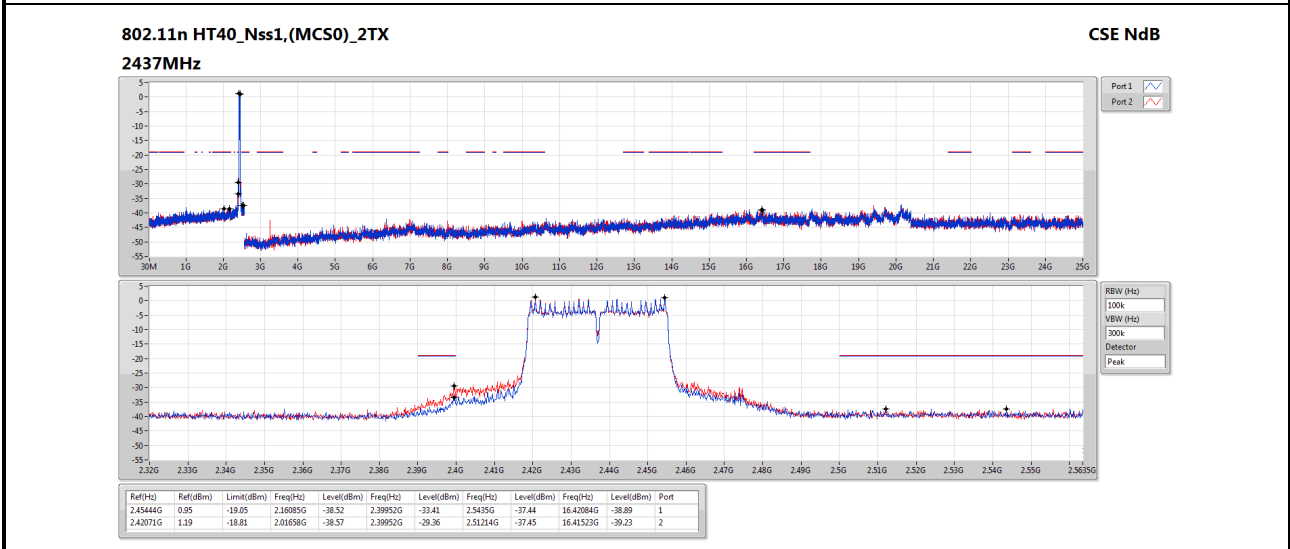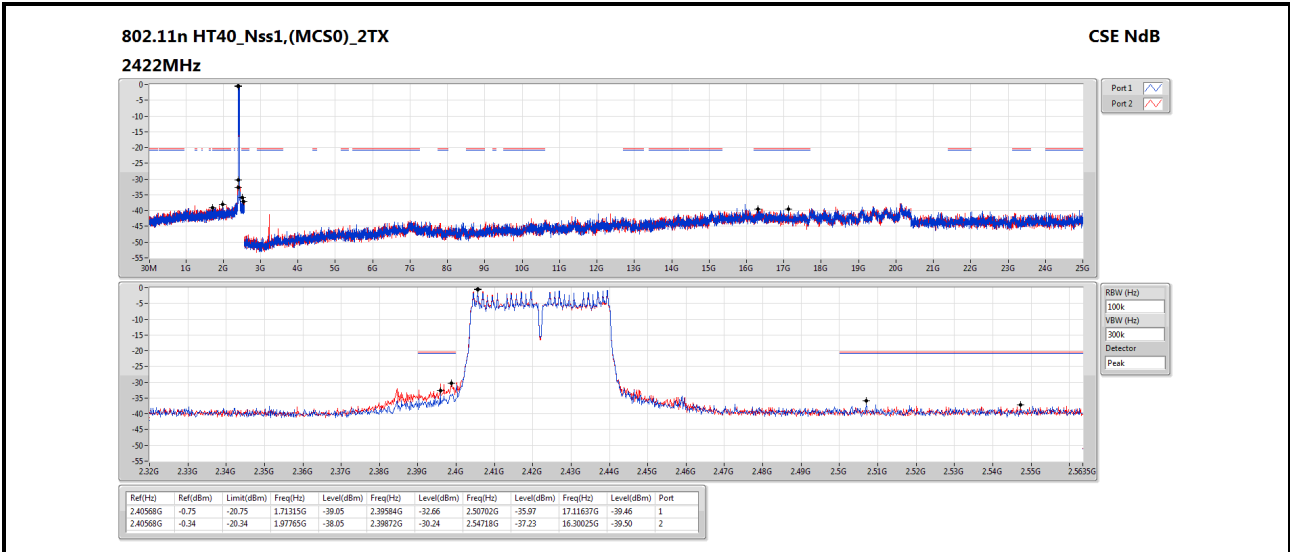

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==