


FCC PART 15.247
EMI MEASUREMENT AND TEST REPORT
For

PF Digital Inc.
6819 Elm St, Suite 16. McLean, Virginia 22101, USA

FCC ID: TL5WPF-588

Sep. 18, 2009

This Report Concerns: Original Report	Equipment Type : eStarling connected touchscreen frame
Test Engineer:	Jack Liu
Report No.:	BST09092442615R-3
Receive EUT Date/Test Date:	Sep.18,2009/ Sep.10-18,2009
Reviewed By:	Christina 
Prepared By:	 Shenzhen BST Technology Co.,Ltd. 3F, Weames Technology Building, No. 10 Kefa Road, Science Park, Nanshan District, Shenzhen, Guangdong, China Tel: 0755-26747751~3 Fax: 0755-26747751~3 ext.826

Note: The test report is specially limited to the above company and this particular sample only. It may not be duplicated without prior written consent of Shenzhen BST Technology Co.,Ltd. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the US Government.

TABLE OF CONTENTS

1.	GENERAL INFORMATION	4
1.1.	Report information	4
1.2.	Measurement Uncertainty	4
2.	PRODUCT DESCRIPTION	5
2.1.	EUT Description	5
2.2.	Block Diagram of EUT Configuration.....	5
2.3.	Support Equipment List	5
2.4.	Test Conditions	6
3.	FCC ID LABEL.....	6
4.	TEST RESULTS SUMMARY	7
	Modifications	7
5.	TEST EQUIPMENT USED	8
6.	§15.247 (I) AND §1.1307 (B) (1) - MAXIMUM PERMISSIBLE EXPOSURE (MPE)	9
6.1.	Standard Applicable.....	9
6.2.	Test Data	9
6.3.	Test Result	10
7.	§15.203 - ANTENNA REQUIREMENT	11
7.1.	Standard Applicable.....	11
7.2.	Antenna Connector Construction.....	11
8.	§15.207 - CONDUCTED EMISSIONS.....	12
8.1.	Applicable Standard.....	12
8.2.	Test Procedure	12
8.3.	Plot(s) of Test Data	13
9.	§15.209, §15.205, §15.247(D) - SPURIOUS EMISSIONS	15
9.1.	Test Equipment	15
9.2.	Test Procedure	15
9.3.	Radiated Test Setup	15
9.4.	Radiated Emission Limit.....	15
9.5.	Radiated Emission Test Result	16
10.	§15.247(A) (2) – 6DB BANDWIDTH TESTING.....	25
10.1.	Test Equipment	25
10.2.	Test Procedure	25
10.3.	Applicable Standard	25
10.3.	Test Result:Pass.	25
11.	§15.247(B) (3) - MAXIMUM PEAK OUTPUT POWER.....	29
11.1.	Test Equipment	29
11.2.	Test Procedure	29
11.3.	Applicable Standard.....	29
11.4.	Test Result	29
12.	§15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	31
12.1.	Test Equipment	31

12.2. Test Procedure31

12.3. Applicable Standard.....31

12.4. Test Result31

13. **§15.247(E) - POWER SPECTRAL DENSITY40**

13.1. Test Equipment40

13.2. Test Procedure40

13.3. Applicable Standard.....40

13.4. Test Result40

1. GENERAL INFORMATION

1.1. Report information

1.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that BST approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that BST in any way guarantees the later performance of the product/equipment.

1.1.2. The sample/s mentioned in this report is/are supplied by Applicant, BST therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through BST, unless the applicant has authorized BST in writing to do so.

Test Facility -

The test site used to collect the radiated data is located on the address of Solid Industrial Co.,Ltd. (FCC Registered Test Site Number: 759397) on

333 Bulong Highway Buji Longgang Shenzhen Guangdong China

The Test Site is constructed and calibrated to meet the FCC requirements.

1.2. Measurement Uncertainty

Available upon request.

2. PRODUCT DESCRIPTION

2.1. EUT Description

Applicant : PF Digital Inc.
 Address : 6819 Elm St, Suite 16. McLean, Virginia 22101, USA
 Manufacturer : SHENZHEN XINHAO PRECISE GROUPWARE CO.,LTD.
 Address : South The Second Industrial Park. Hourui, Xixiang,
 Bao'an District, Shenzhen, China
 EUT Description : eStarling connected touchscreen frame
 Modulation : OFDM
 Model Number : WPF-588
 Antenna connected : Soldered
 Antenna gain : 2dBi(2.4GHz)
 Antenna Manufacturer : Shuang ying electronics.,LTD.

2.2. Block Diagram of EUT Configuration

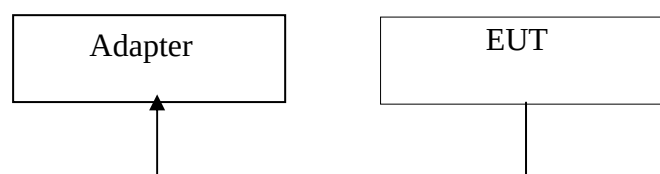


Figure 1 EUT SETUP

2.3. Support Equipment List

Table 2 Ancillary Equipment

Name	Model No	S/N	Manufacturer	Used “√”
POWER ADAPTOR	TL-026	/	PF Digital Inc.	√

2.4. Test Conditions

Temperature: 23~25°C

Relative Humidity: 55~63 %

3. FCC ID LABEL

FCC ID: TL5WPF-588

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and**
- 2. This device must accept any interference received, including interference that may cause undesired operation.**

Label Location on EUT

EUT Bottom View/ FCC ID Label Location



4. TEST RESULTS SUMMARY

FCC 15 Subpart C, Paragraph 15.247

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247 (i), §1.1307 (b)(1)	Maximum Permissible Exposure (MPE)	Pass
§15.203	Antenna Requirement	Pass
§15.207 (a)	Conducted Emissions	Pass
§15.247(d)	Spurious Emissions at Antenna Port	Pass
§15.205	Restricted Bands	Pass
§15.209, §15.205, 1§15.247(d)	Spurious Emissions	Pass
§15.247 (a)(2)	6 dB Bandwidth	Pass
§15.247(b)(3)	Maximum Peak Output Power	Pass
§15.247(d)	100kHz Bandwidth of Frequency Band Edge	Pass
§15.247(e)	Power Spectral Density	Pass

Modifications

No modification was made.

5. TEST EQUIPMENT USED

Equipment/Facilities	Manufacturer	Model #	Serial no.	Date of Cal.	Cal. Interval
Cable	Resenberger	N/A	NO.1	Mar 10, 2009	1 Year
Cable	SCHWARZBECK	N/A	NO.2	Mar 10, 2009	1 Year
Cable	SCHWARZBECK	N/A	NO.3	Mar 10, 2009	1 Year
LISN	Rohde & Schwarz	ESH3-Z5	100305	Mar 10, 2009	1 Year
50 Ω Coaxial Switch	ANRITSU CORP	MP59B	6200283933	Mar 10, 2009	1 Year
EMI Test Receiver	Rohde & Schwarz	ESP13	100180	Oct.18,2008	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSP40	100273	Sep.10,2009	1 Year
3m Semi-Anechoic Chamber	Albatross Projects	9m×6m×6m	N/A	Feb.20,2009	1 Year
Signal Generator	FLUKE	PM5418 + Y/C	LO747012	Feb.20,2009	1 Year
Signal Generator	FLUKE	PM5418TX	LO738007	Feb.20,2009	1 Year
Loop Antenna	SCHWARZBECK	FMZB1516	113	Jan.30,2009	1 Year
Trilog-Super Broadband Antenna	SCHWARZBECK	VULB9161	9161-4079	Sep.22,2008	1 Year
Broad-Band Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-564	Sep.22,2008	1 Year
Ultra Broadband Antenna	Rohde & Schwarz	HL-562	100110	June.15,2009	1 Year
AMN	Rohde & Schwarz	ESH3-Z5	100196	Oct.11,2008	1 Year
AMN	Rohde & Schwarz	ESH3-Z5	100197	Oct.11,2008	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	N/A	N/A	N/A
Power Meter	Rohde & Schwarz	NRVD	100041	Feb.20,2009	1 Year
EMI Test Receiver	Rohde & Schwarz	ESCS30	100003	Feb.20,2009	1 Year
Coaxial Cable with N-connectors	SCHWARZBECK	AK9515H	95549	Sep.22,2008	1 Year
Radio Communication Test Set	Rohde & Schwarz	CMS 54	846621/024	Feb.20,2009	1 Year
Modulation Analyzer	Hewlett-Packard	8901B	2303A00362	Feb.20,2009	1 Year
Absorbing clamp	Rohde & Schwarz	MDS-21	N/A	Oct.29,2008	1 Year

6. §15.247 (I) AND §1.1307 (B) (1) - Maximum Permissible exposure (MPE)

6.1. Standard Applicable

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3–3.0	614	1.63	*(100)	30
3.0–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

6.2. Test Data

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

S: Power density, in mW/cm²

P: Power input to the antenna, in mW

G: numeric gain of the antenna

R: distance to the center of the antenna, in cm

802.11b Mode

Maximum peak output power at antenna input terminal (dBm):	<u>19.78</u>
Maximum peak output power at antenna input terminal (mW):	<u>95.06</u>
Prediction distance (cm):	<u>20</u>
Prediction frequency (MHz):	<u>2412</u>
Antenna Gain, typical (dBi):	<u>2.0</u>
Maximum Antenna Gain (numeric):	<u>1.585</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.030</u>
MPE limit for Occupational exposure at predication frequency (mW/cm ²):	<u>1.0</u>

802.11g Mode

Maximum peak output power at antenna input terminal (dBm):	<u>19.32</u>
Maximum peak output power at antenna input terminal (mW):	<u>85.51</u>
Prediction distance (cm):	<u>20</u>
Prediction frequency (MHz):	<u>2442</u>
Antenna Gain, typical (dBi):	<u>2.0</u>
Maximum Antenna Gain (numeric):	<u>1.585</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.0270</u>
MPE limit for Occupational exposure at predication frequency (mW/cm ²):	<u>1.0</u>

6.3. Test Result

The device is compliant with the requirement MPE limit of General Population/Uncontrolled Exposure at predication frequency 1.0 mW/cm² .And the precaution is outlined in the user's manual to prevent to high level of RF energy.

7. §15.203 - ANTENNA REQUIREMENT

7.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.2. Antenna Connector Construction

The EUT uses a unique coupling antenna. The Antenna gain is 2.0dBi. please refer to the EUT internal photos.

8. §15.207 - CONDUCTED EMISSIONS

8.1. Applicable Standard

The specification used was with the FCC Part 15.207 limits.

8.2. Test Procedure

During the conducted emission test, the EUT was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.


Test Result


Test Mode: Operating

Line Conducted Emissions				FCC Part 15.207	
Frequency (MHz)	Amplitude (dBμV)	Detector (QP/AV)	Conductor (Hot/Neutral)	Limit (dBμV)	Margin (dB)
3.800	41.20	AV	Hot	46.00	4.80
0.400	41.80	AV	Hot	47.85	6.05
1.500	39.50	AV	Hot	46.00	6.50
3.800	37.20	AV	Neutral	46.00	8.80
0.200	43.50	AV	Hot	53.61	10.11
23.590	39.40	AV	Hot	50.00	10.60
3.800	45.00	QP	Hot	56.00	11.00
0.200	50.60	QP	Hot	63.61	13.01
23.390	36.70	AV	Neutral	50.00	13.30
23.580	46.60	QP	Hot	60.00	13.40
0.200	39.50	AV	Neutral	53.61	14.11
7.490	35.70	AV	Hot	50.00	14.30
1.000	31.50	AV	Neutral	46.00	14.50
0.400	43.30	QP	Hot	57.85	14.55
0.500	41.10	QP	Neutral	56.00	14.90
1.500	40.90	QP	Hot	56.00	15.10
23.480	44.80	QP	Neutral	60.00	15.20
3.800	40.00	QP	Neutral	56.00	16.00
0.200	47.50	QP	Neutral	63.61	16.11
2.200	28.70	AV	Neutral	46.00	17.30
0.200	35.50	AV	Neutral	53.61	18.11
7.490	40.30	QP	Hot	60.00	19.70
1.000	34.60	QP	Neutral	56.00	21.40
2.200	32.00	QP	Neutral	56.00	24.00

8.3. Plot(s) of Test Data

Plot(s) of Test Data is presented hereinafter as reference.

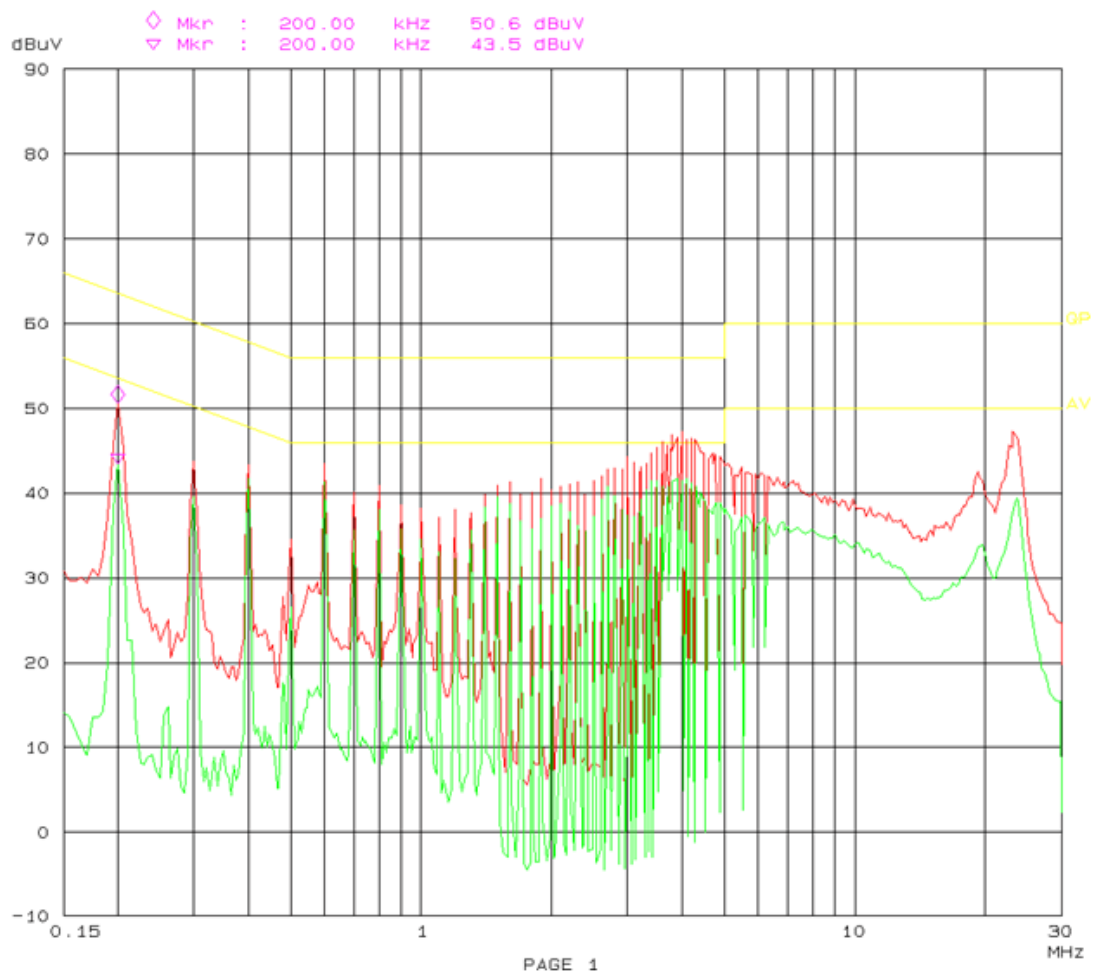

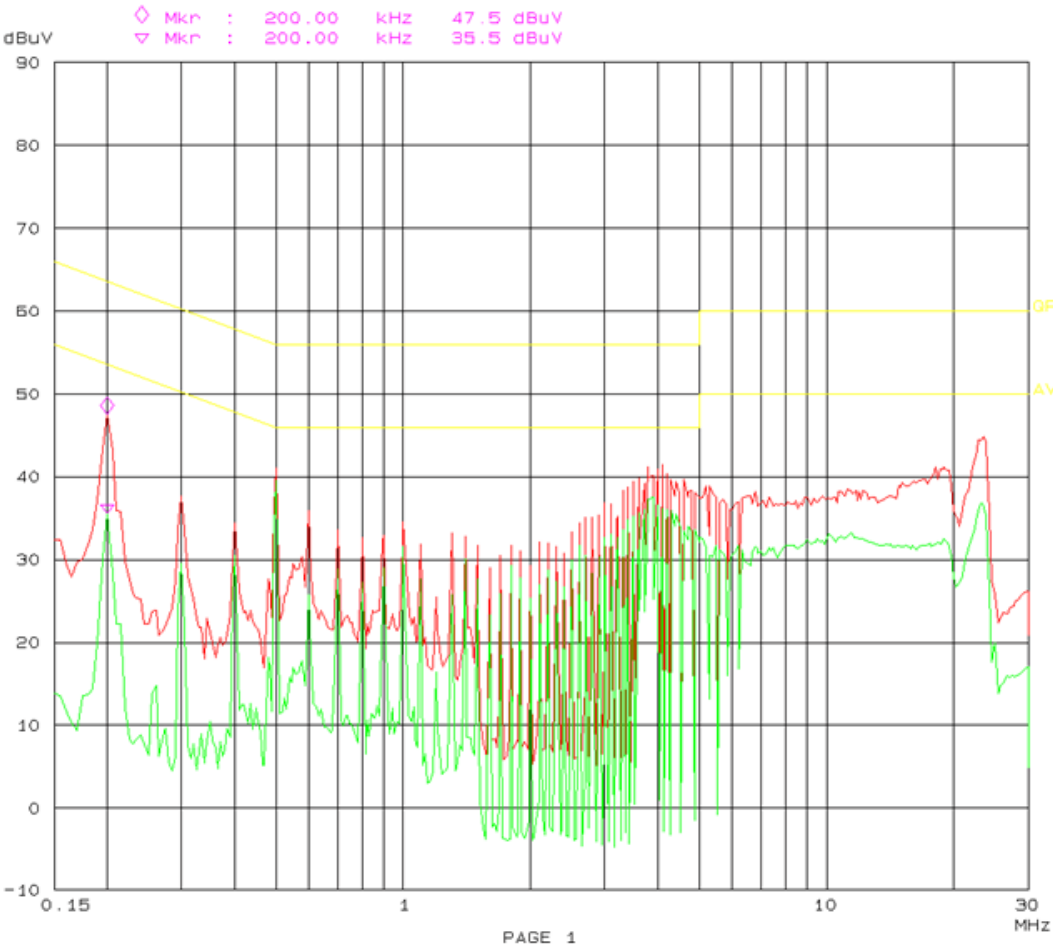

9. §15.209, §15.205, §15.247(D) - Spurious Emissions


9.1. Test Equipment

Please refer to section 4 this report.

9.2. Test Procedure

The out of band emission tests were performed in the 3-meter chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part Subpart C limits.

9.3. Radiated Test Setup

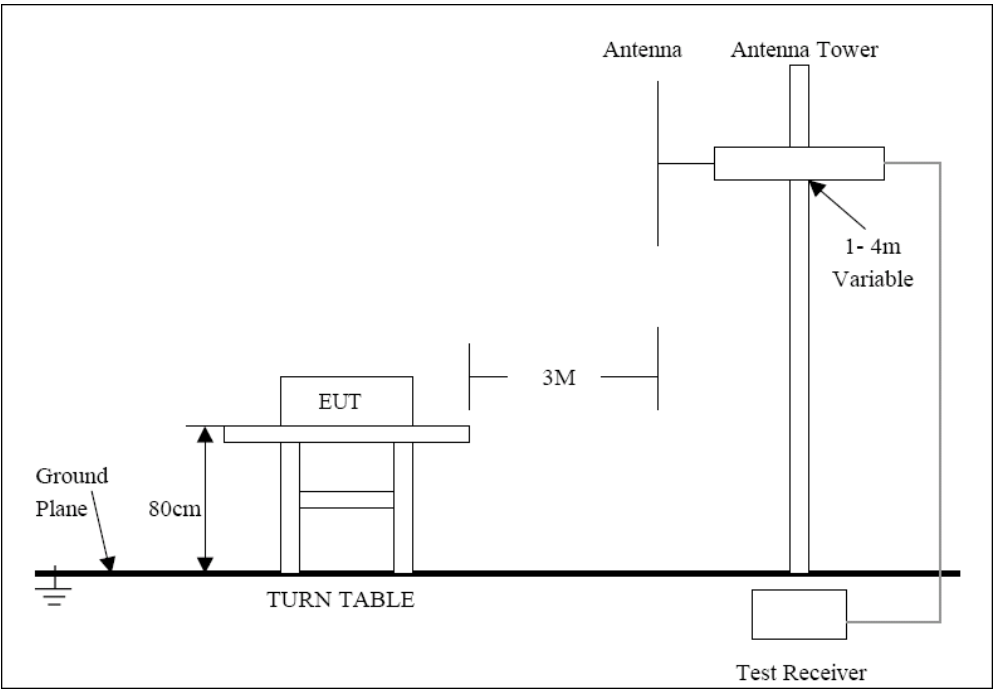

For the accrual test configuration,pleas refer to the related items-photos of Testing.


9.4. Radiated Emission Limit

CARRIER FREQUENCY WILL NOT EXCEEDS 48.0 dBuV/m AT 3M. OUT-OF-BAND EMISSIONS SHALL NOT EXCEED:

Frequency (MHz)	Distance (m)	Field Strength (dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
ABOVE 960	3	54.0

9.5. Radiated Emission Test Result

Test Mode: *Operating*

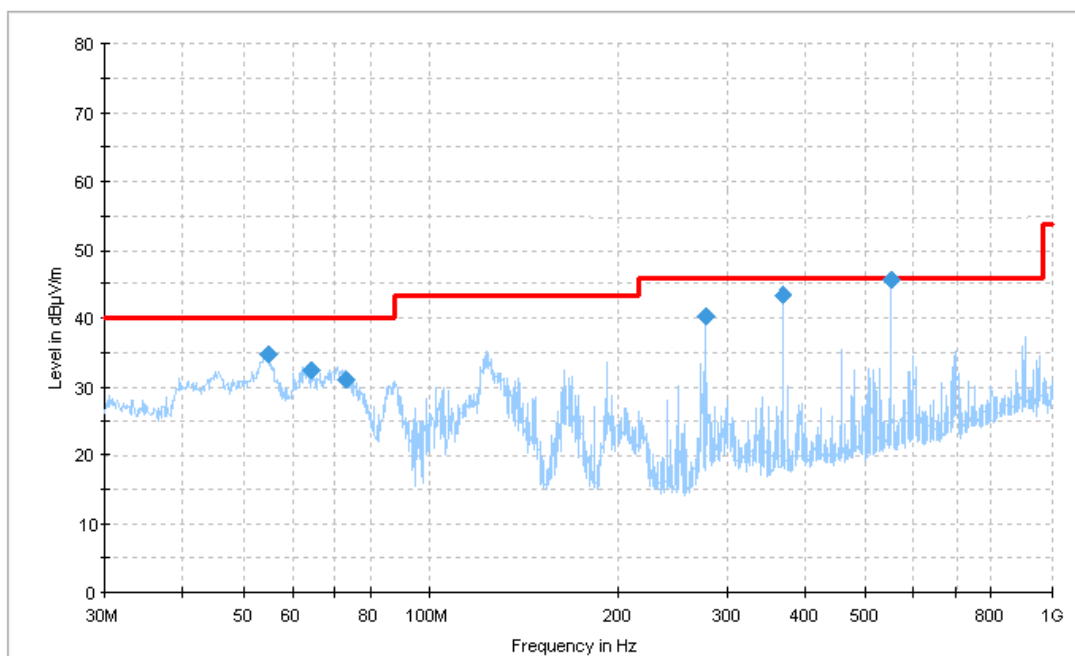

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dBμV/m)	Margin (dB)
551.995425	44.6	178.0	H	2.0	-5.8	46.0	1.4*
368.002200	43.3	105.0	H	269.0	-9.2	46.0	2.7*
54.949375	34.6	105.0	V	147.0	-17.7	40.0	5.4
276.007250	40.2	106.0	H	243.0	-11.1	46.0	5.8
64.167150	32.5	104.0	V	125.0	-17.1	40.0	7.5
73.188575	31.1	103.0	V	0.0	-16.9	40.0	8.9

Above 1GHz:
802.11b

Indicated		Detector (PK/AV)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247		
Frequency (MHz)	Receiver Reading (dBμV/m)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel (2412MHz)											
7236	37.5	AV	360	1.5	V	35.4	4.51	33.7	43.71	54	10.29
4824	39.3	AV	250	1.2	V	31.3	4.64	33.4	41.84	54	12.16
7236	35.2	AV	45	1.4	H	35.4	4.51	33.7	41.41	54	12.59
4824	38.6	AV	60	1.6	H	31.3	4.64	33.4	41.14	54	12.86
4824	53.6	PK	180	1.3	V	31.3	4.64	33.4	56.14	74	17.86
7236	48.6	PK	300	1.5	V	35.4	4.51	33.7	54.81	74	19.19
7236	47.7	PK	100	1.5	H	35.4	4.51	33.7	53.91	74	20.09
4824	49.9	PK	210	1.1	H	31.3	4.64	33.4	52.44	74	21.56
Middle Channel (2437MHz)											
7311	40.6	AV	180	1.5	V	35.4	4.75	33.7	47.05	54	6.95
7311	39.1	AV	185	1.3	H	35.4	4.75	33.7	45.55	54	8.45
4874	41.7	AV	200	1.5	V	31.3	4.64	33.4	44.24	54	9.76
4874	40.5	AV	360	1.5	H	31.3	4.64	33.4	43.04	54	10.96
7311	53.8	PK	120	1.2	V	35.4	4.75	33.7	60.25	74	13.75
4874	55.6	PK	75	1.5	V	31.3	4.64	33.4	58.14	74	15.86
7311	50.4	PK	220	1.4	H	35.4	4.75	33.7	56.85	74	17.15
4874	52.6	PK	0	1.1	H	31.3	4.64	33.4	55.14	74	18.86
HighChannel (2462MHz)											
7386	42.0	AV	160	1.3	V	35.3	4.75	33.7	48.35	54	5.65
7386	41.9	AV	245	1.4	H	35.3	4.75	33.7	48.25	54	5.75
4924	43.8	AV	360	1.5	V	32.0	4.64	33.4	47.04	54	6.96
4924	42.4	AV	45	1.5	H	32.0	4.64	33.4	45.64	54	8.36
7386	52.2	PK	90	1.2	V	35.3	4.75	33.7	58.55	74	15.45
4924	55.1	PK	0	1.4	V	32.0	4.64	33.4	58.34	74	15.66
4924	54.6	PK	200	1.4	H	32.0	4.64	33.4	57.84	74	16.16
7386	51.3	PK	180	1.2	H	35.3	4.75	33.7	57.65	74	16.35


802.11g

Indicated		Detector (PK/AV)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247		
Frequency (MHz)	Receiver Reading (dBμV/m)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel (2412MHz)											
7236	38.6	AV	220	1.3	V	35.4	4.51	33.7	44.81	54	9.19
7236	37.8	AV	200	1.4	H	35.4	4.51	33.7	44.01	54	9.99
4824	40.7	AV	90	1.5	V	31.3	4.64	33.4	43.24	54	10.76
4824	39.1	AV	45	1.5	H	31.3	4.64	33.4	41.64	54	12.36
7236	46.5	PK	165	1.4	V	35.4	4.51	33.7	52.71	74	21.29
4824	49.8	PK	320	1.2	V	31.3	4.64	33.4	52.34	74	21.66
4824	47.5	PK	0	1.5	H	31.3	4.64	33.4	50.04	74	23.96
7236	42.7	PK	120	1.2	H	35.4	4.51	33.7	48.91	74	25.09
Middle Channel (2437MHz)											
7311	38.6	AV	200	1.5	H	35.4	4.75	33.7	45.05	54	8.95
4874	40.5	AV	120	1.4	H	31.3	4.64	33.4	43.04	54	10.96
7311	35.9	AV	320	1.3	V	35.4	4.75	33.7	42.35	54	11.65
4874	36.7	AV	190	1.3	V	31.3	4.64	33.4	39.24	54	14.76
7311	44.2	PK	45	1.5	H	35.4	4.75	33.7	50.65	74	23.35
7311	43.2	PK	360	1.4	V	35.4	4.75	33.7	49.65	74	24.35
4874	46.8	PK	0	1.4	V	31.3	4.64	33.4	49.34	74	24.66
4874	45.3	PK	60	1.2	H	31.3	4.64	33.4	47.84	74	26.16
HighChannel (2462MHz)											
7386	38.2	AV	160	1.3	V	35.3	4.75	33.7	44.55	54	9.45
4924	41.3	AV	360	1.5	V	32.0	4.55	33.4	44.45	54	9.55
4924	40.5	AV	45	1.5	H	32.0	4.55	33.4	43.65	54	10.35
7386	37.1	AV	245	1.4	H	35.3	4.75	33.7	43.45	54	10.55
4924	54.7	PK	0	1.4	V	32.0	4.55	33.4	57.85	74	16.15
7386	50.6	PK	90	1.2	V	35.3	4.75	33.7	56.95	74	17.05
7386	47.6	PK	180	1.2	H	35.3	4.75	33.7	53.95	74	20.05
4924	49.4	PK	200	1.4	H	32.0	4.55	33.4	52.55	74	21.45

Antenna port conducted spurious emissions

802.11b mode:

Low channel

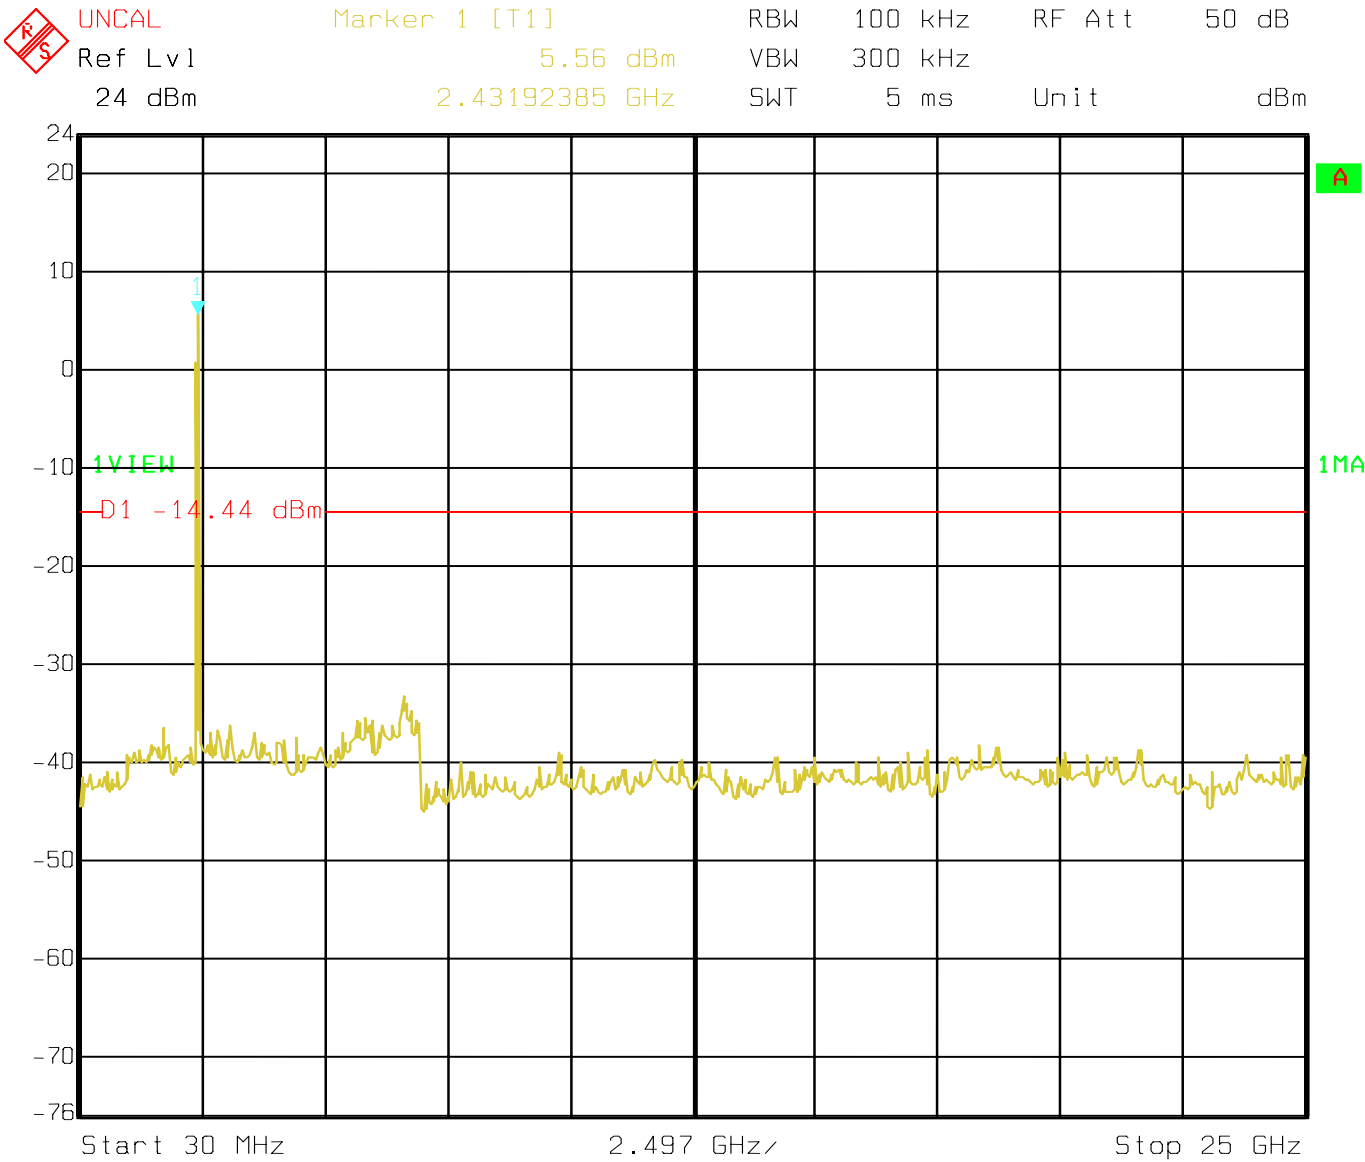

Middle channel



UNCAL

Marker 1 [T1]

RBW 100 kHz

RF Att 50 dB

Ref Lvl 24 dBm


4.65 dBm

VBW 300 kHz

SWT 5 ms

Unit dBm

2.43192385 GHz

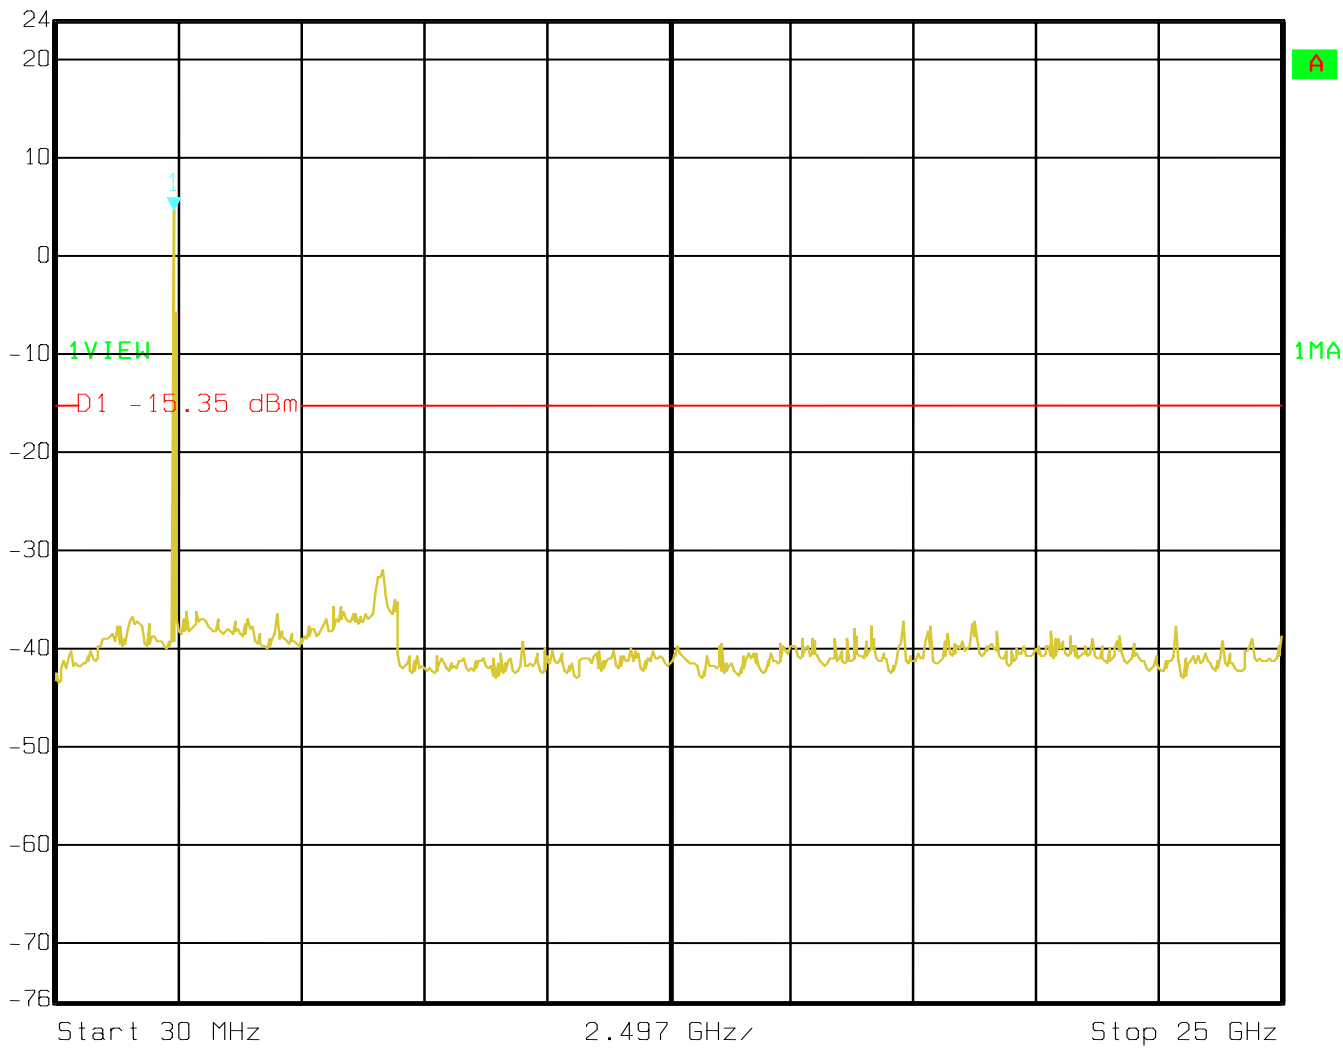

High channel




UNCAL

Marker 1 [T1]

RBW 100 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm


Ref Lvl
24 dBm

4.54 dBm
2.48196393 GHz

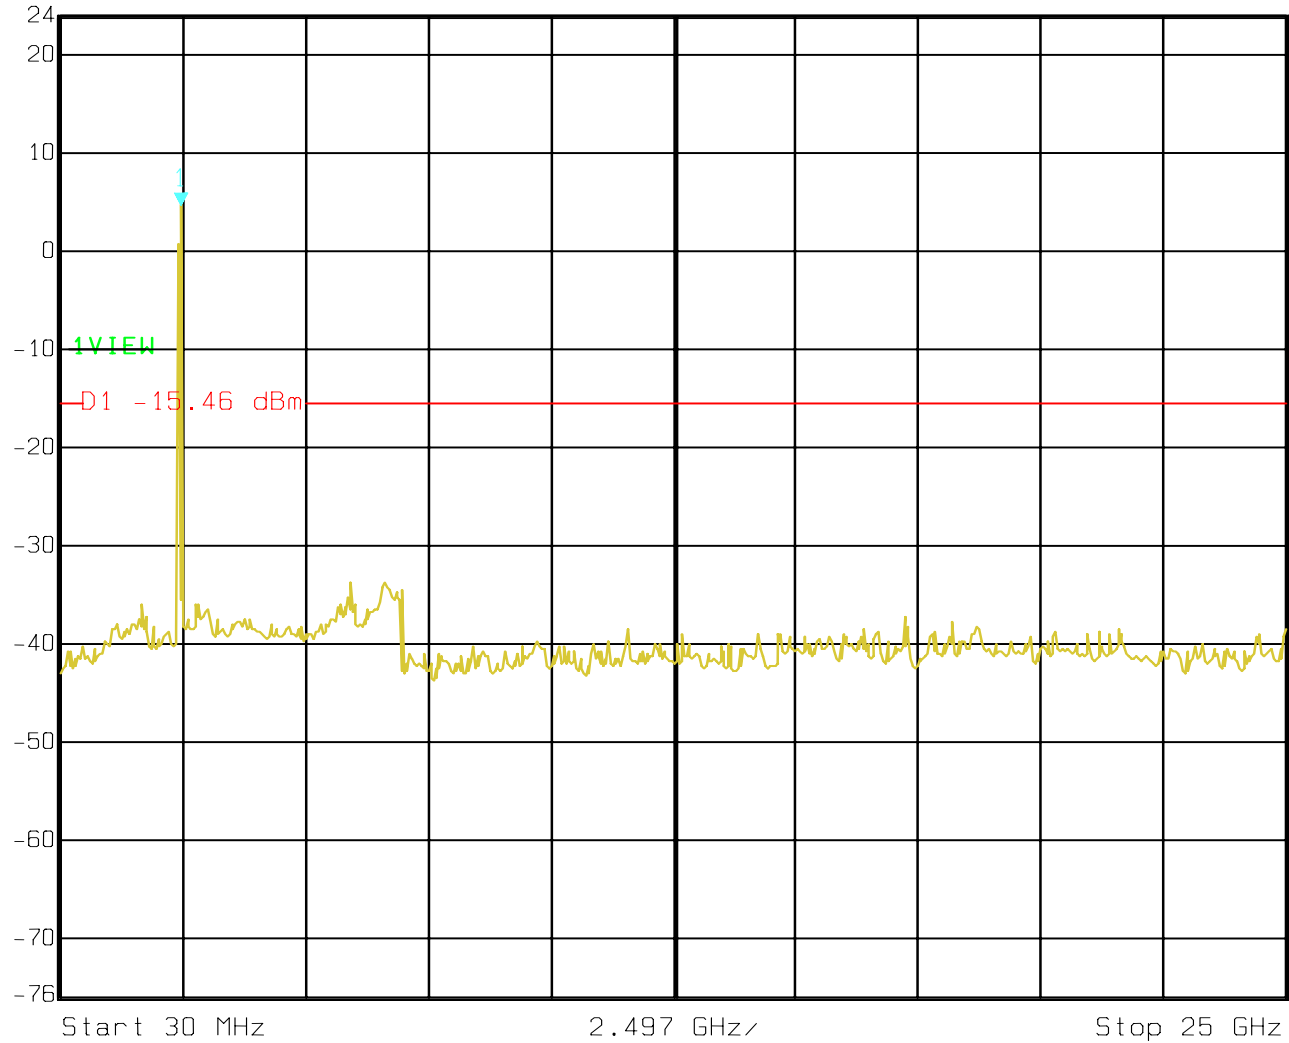

802.11g mode:

Low channel

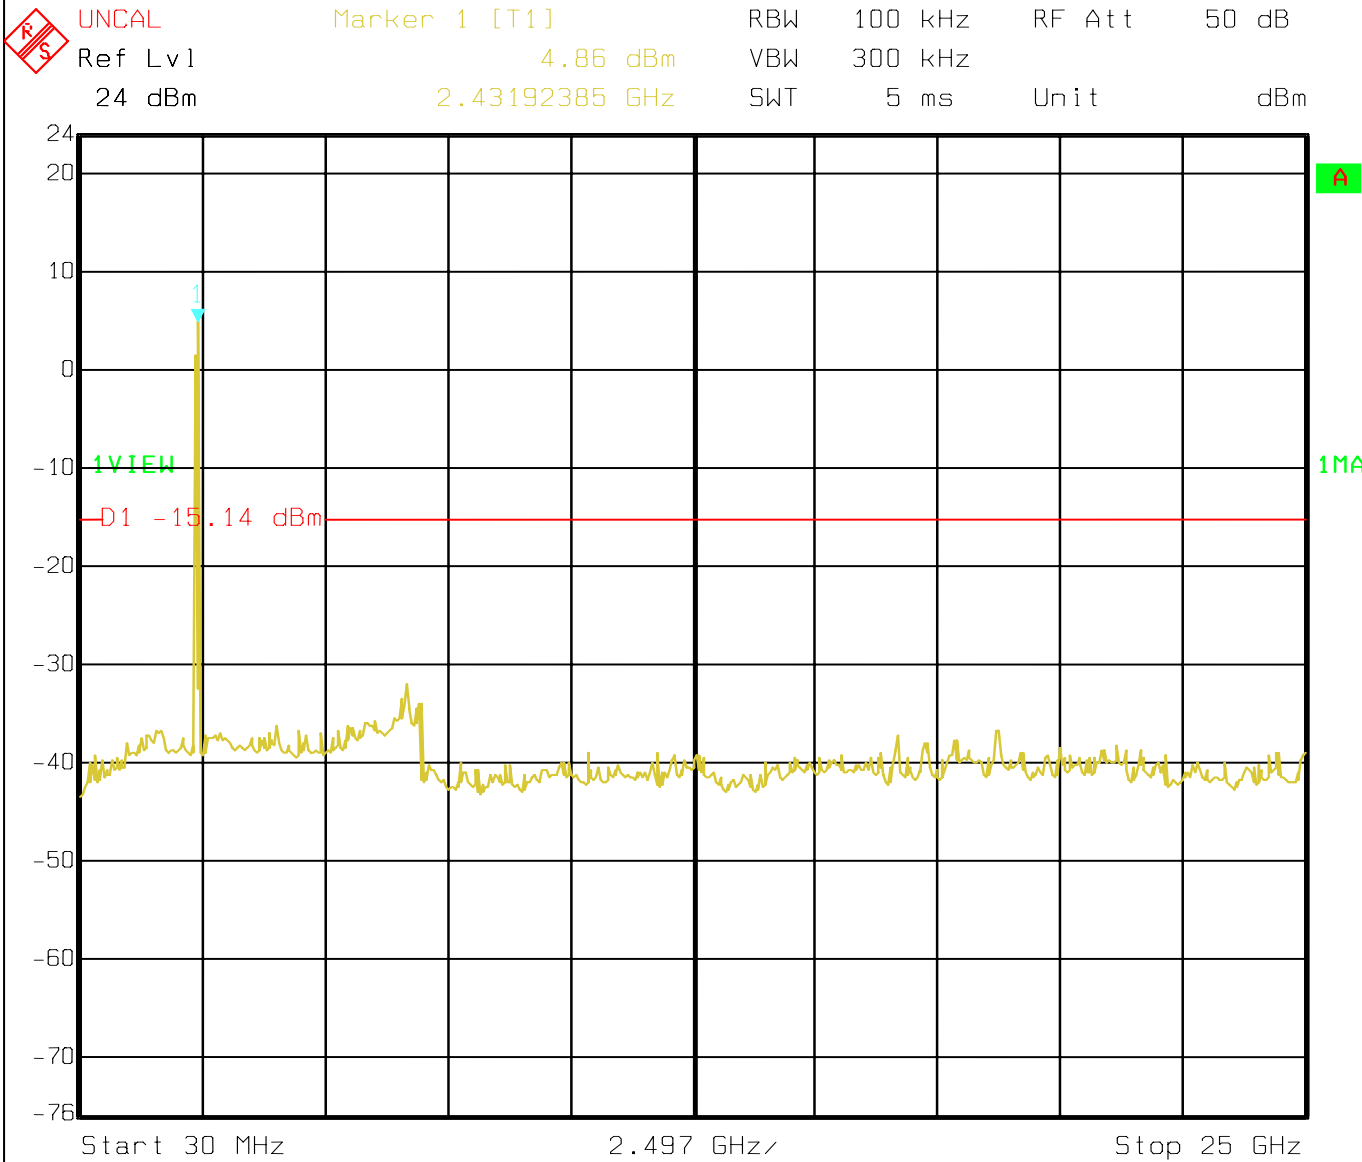

Middle channel

 **UNCAL**

Marker 1 [T1]

RBW 100 kHz RF Att 50 dB


Ref Lvl 24 dBm

5.19 dBm


VBW 300 kHz

2.43192385 GHz

SWT 5 ms Unit dBm

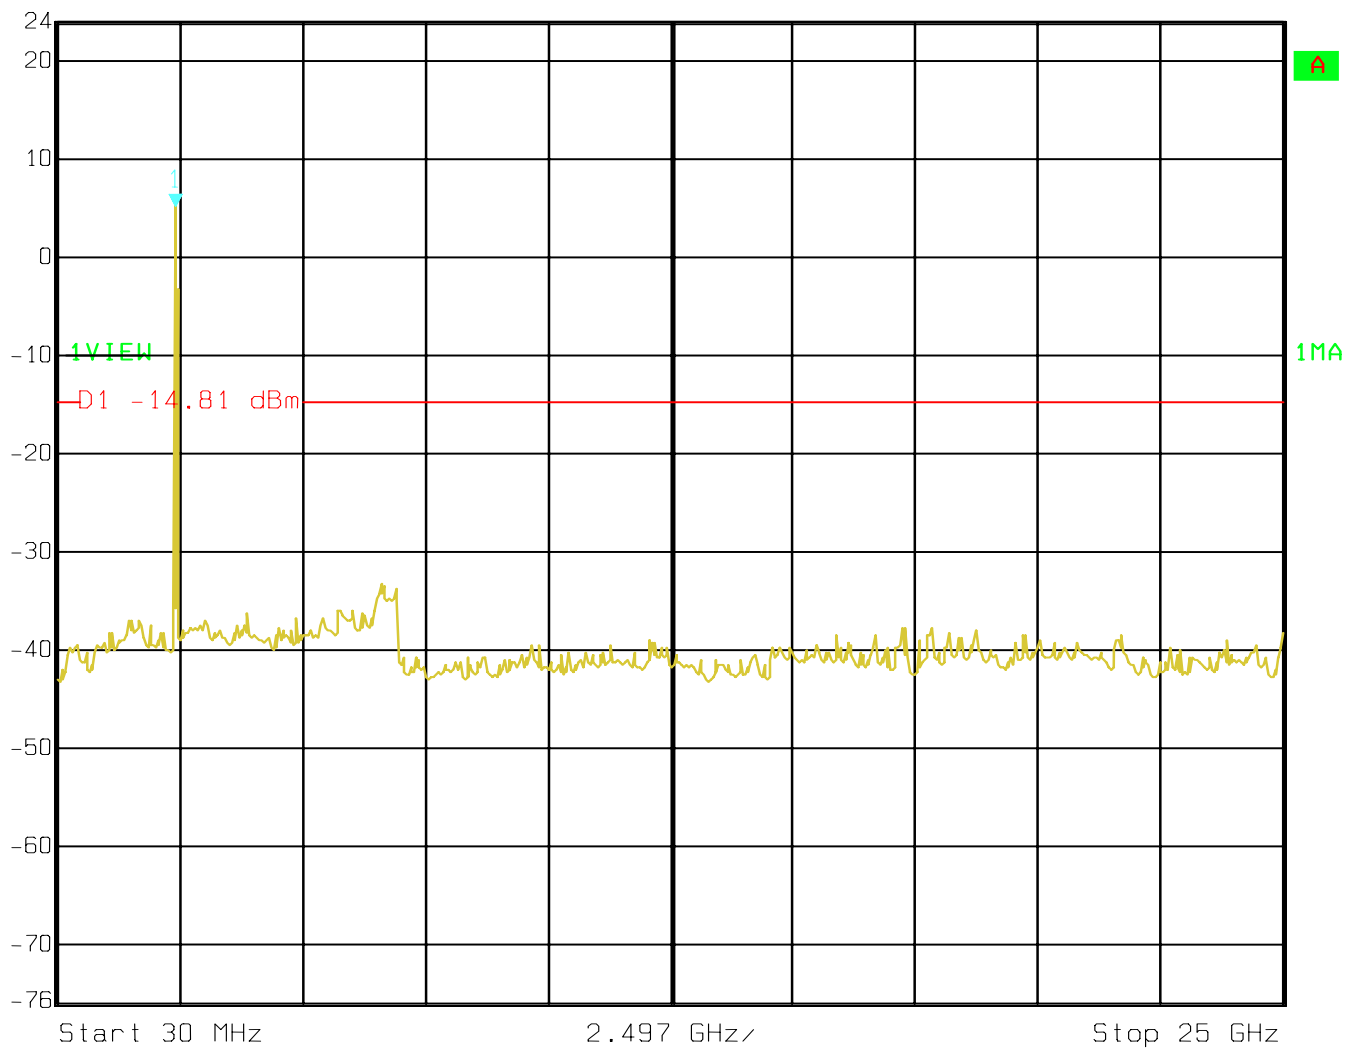

High channel

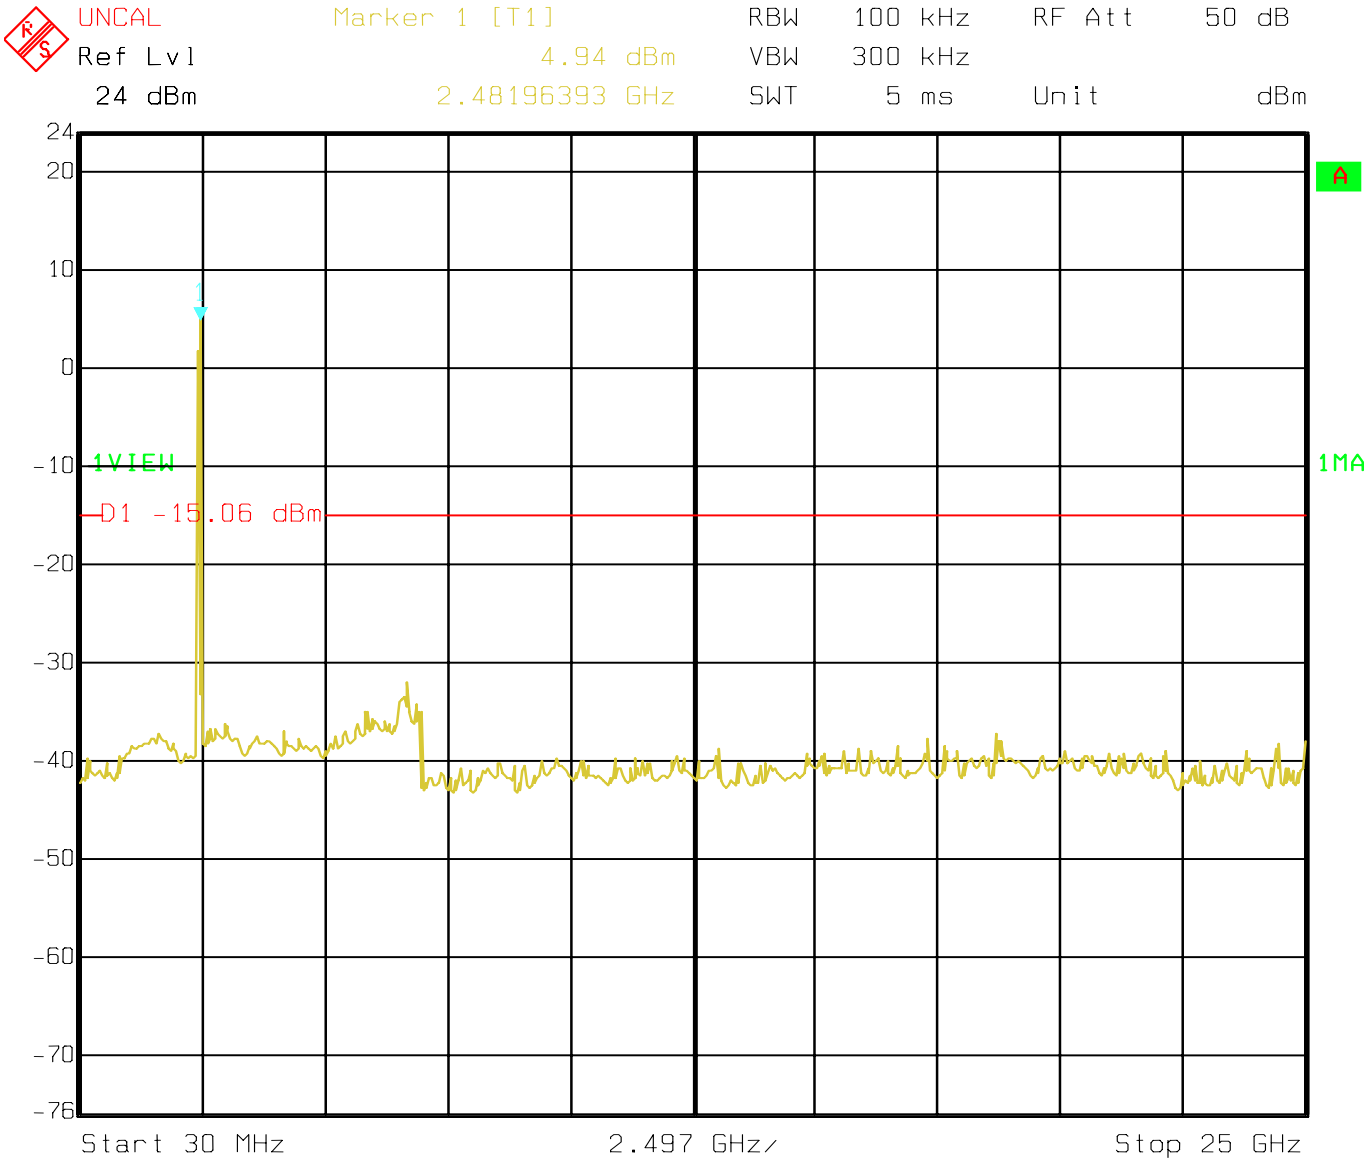

10. §15.247(A) (2) – 6DB BANDWIDTH TESTING

10.1. Test Equipment

Please refer to Section 4 this report.

10.2. Test Procedure

1. Set EUT in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=100KHz, VBW $\geq$ RBW, Span=40MHz, Sweep=auto.
4. Mark the peak frequency and -6dB(upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

10.3. Applicable Standard



Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

10.3. Test Result: Pass.


Please refer to the following tables

Channel Frequency (MHz)	Data Rate (Mbps)	6dB Bandwidth (kHz)	Limit (kHz)	Ref. Plot
802.11b Mode				
2412	1	11200	>500	PLOT 1
2437	1	12000	>500	PLOT 2
2462	1	11900	>500	PLOT 3
802.11g Mode				
2412	6	16400	>500	PLOT 4
2437	6	16500	>500	PLOT 5
2462	6	16400	>500	PLOT 6

802.11b Mode:

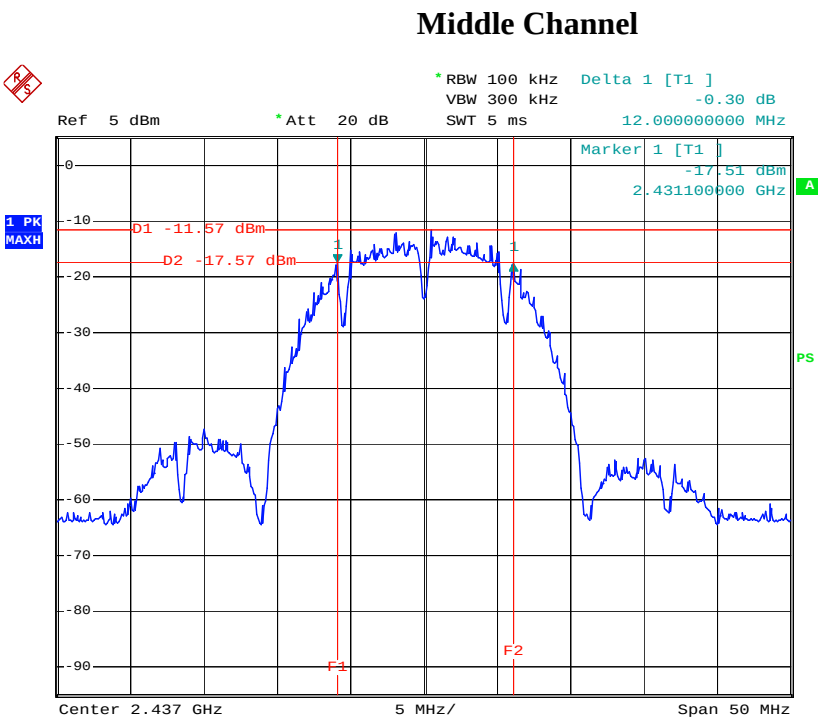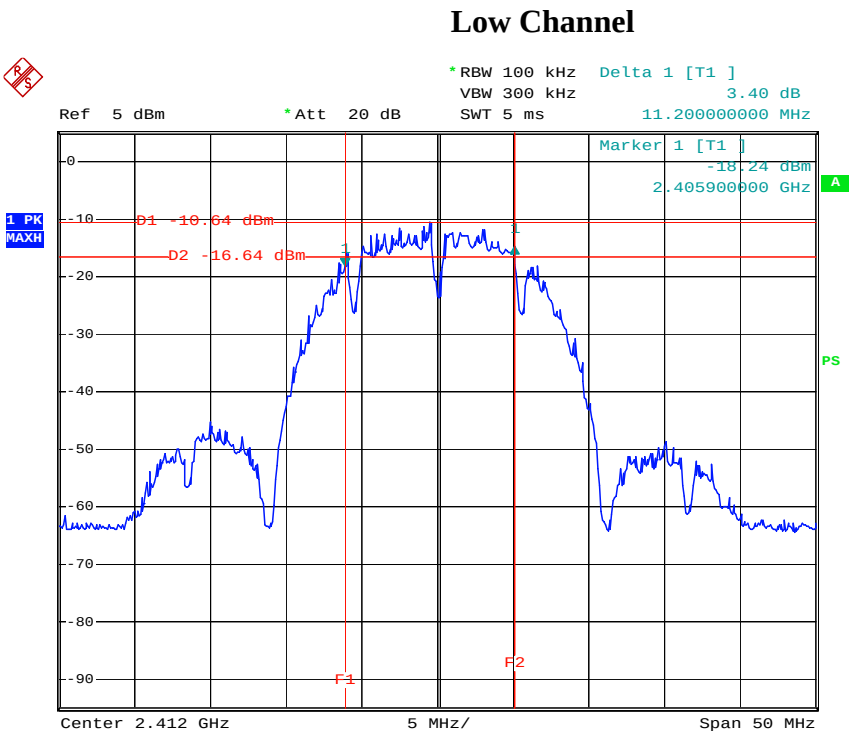


High Channel

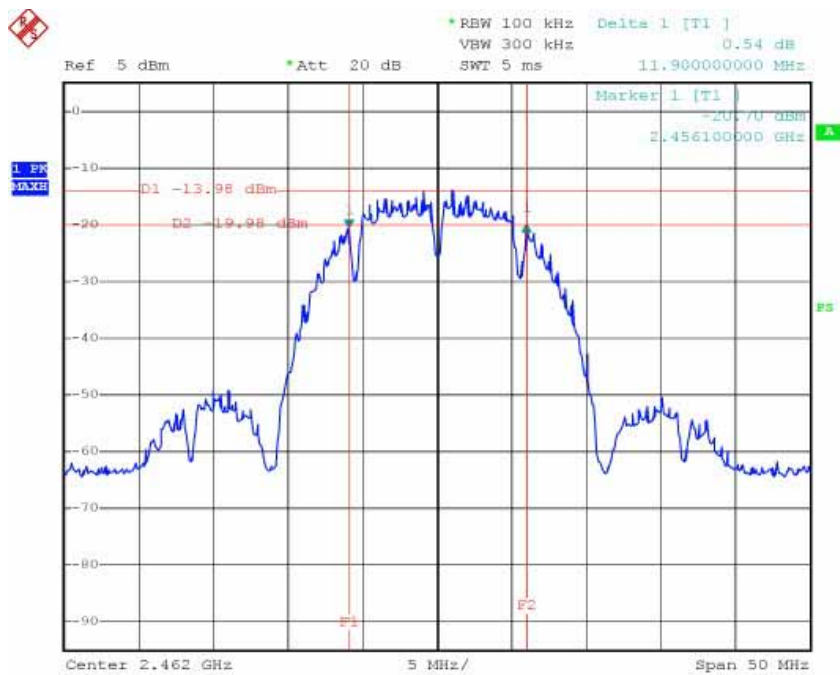


802.11g Mode:


Low Channel

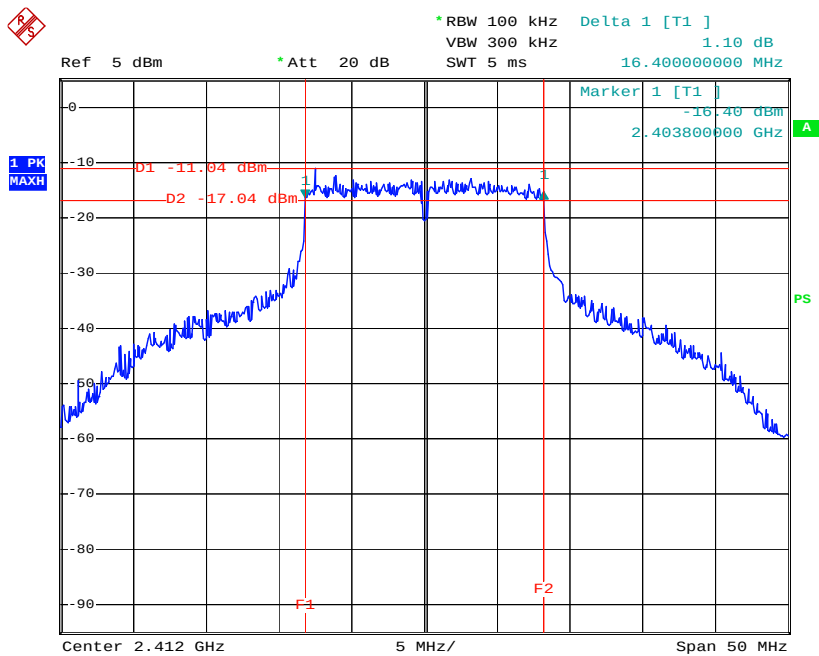

Middle Channel

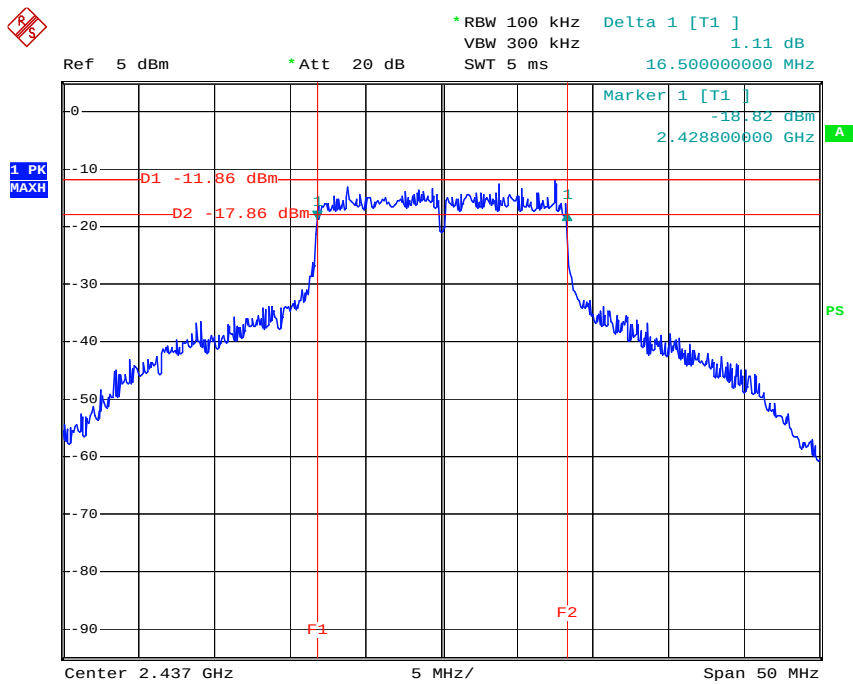

High Channel

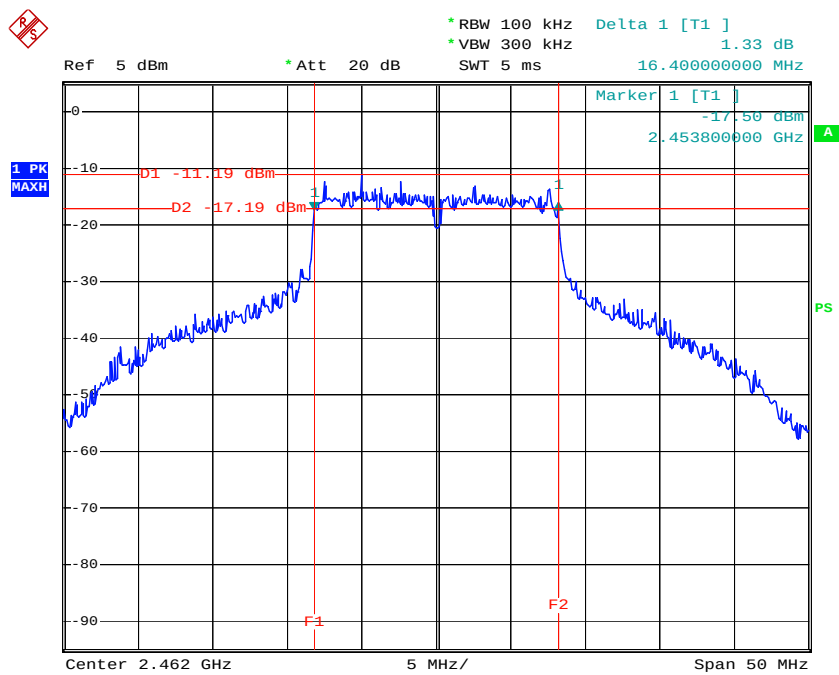

11. §15.247(B) (3) - Maximum Peak Output Power

11.1. Test Equipment

Please refer to Section 4 this report.

11.2. Test Procedure

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz.
3. Set VBW $\geq$ 3 MHz.
4. Use sample detector mode if bin width (i.e., span/number of points in spectrum display) $<$ 0.5 RBW. Otherwise use peak detector mode.
5. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run”.
6. Trace average 100 traces in power averaging mode.
7. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

11.3. Applicable Standard

According to §15.247(b) (3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

11.4. Test Result

Pass

802.11b Mode:

Channel	Frequency (MHz)	Data Rate (Mbps)	Conducted Power (dBm)	Limit (dBm)
Low	2412	1	19.78	30
Mid	2437	1	19.74	30
High	2462	1	19.51	30

802.11g Mode:

Channel	Frequency (MHz)	Data Rate (Mbps)	Conducted Power (dBm)	Limit (dBm)
Low	2412	6	19.05	30
Mid	2437	6	19.32	30
High	2462	6	19.19	30

12. §15.247(D) – 100 KHZ Bandwidth of Frequency Band Edge

12.1.Test Equipment

Please refer to Section 4 this report.

12.2.Test Procedure

1, Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

2, Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.

3,Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Note: For Rdstrictred Band

RBW=1MHz

VBW=1 MHz

4, Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

5,Repeat above procedures until all measured frequencies were complete.

12.3.Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


12.4.Test Result

PASS


802.11b Mode:

Lowest channel

PK detector:

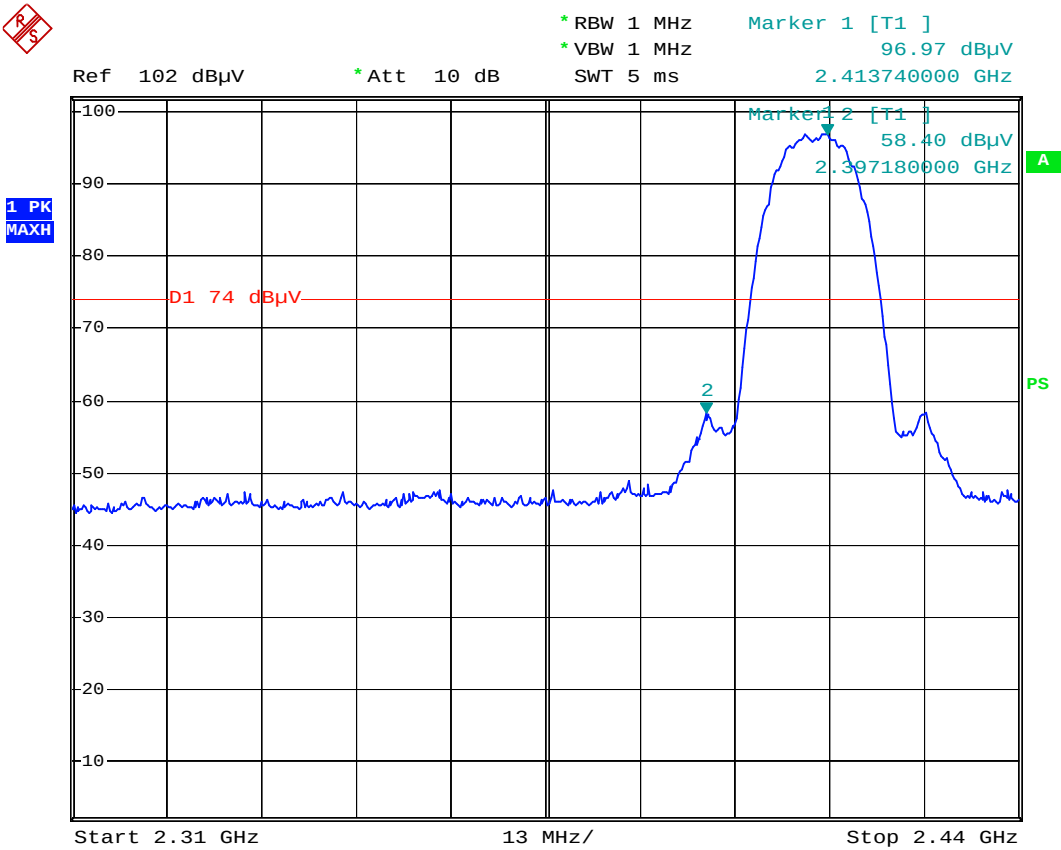


AV detector:

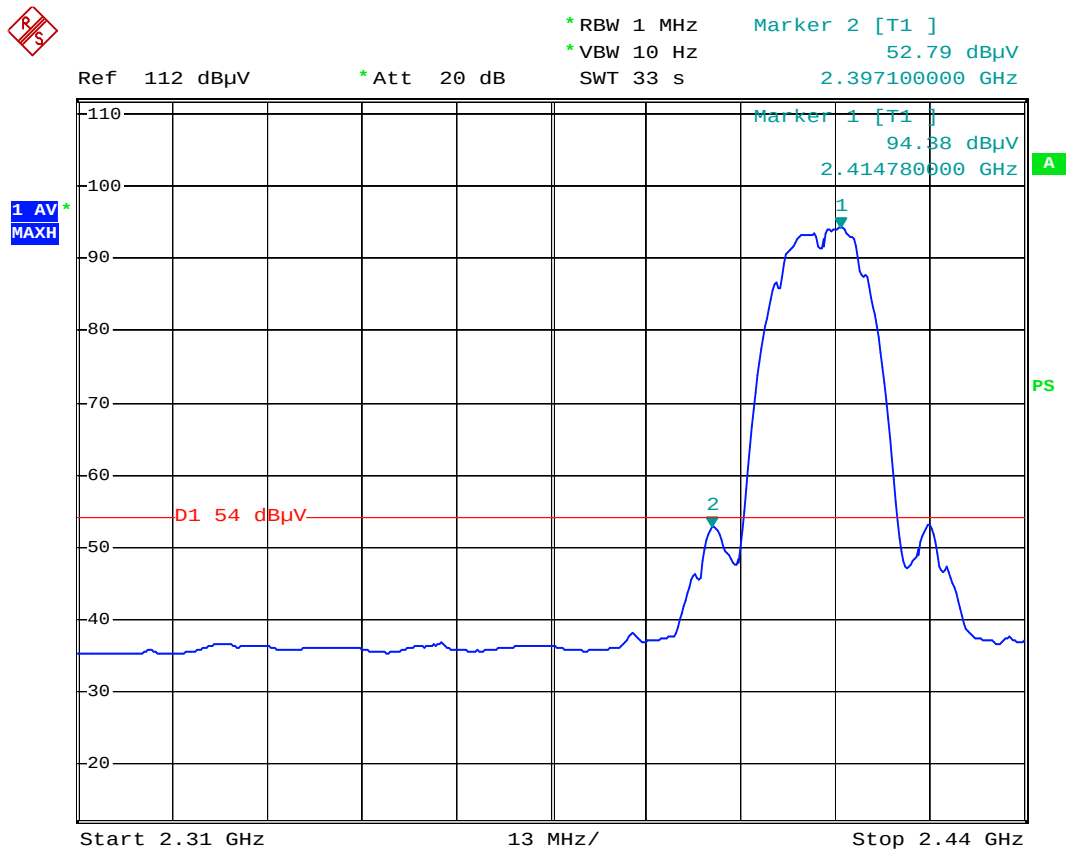


Highest Channel

PK detector:

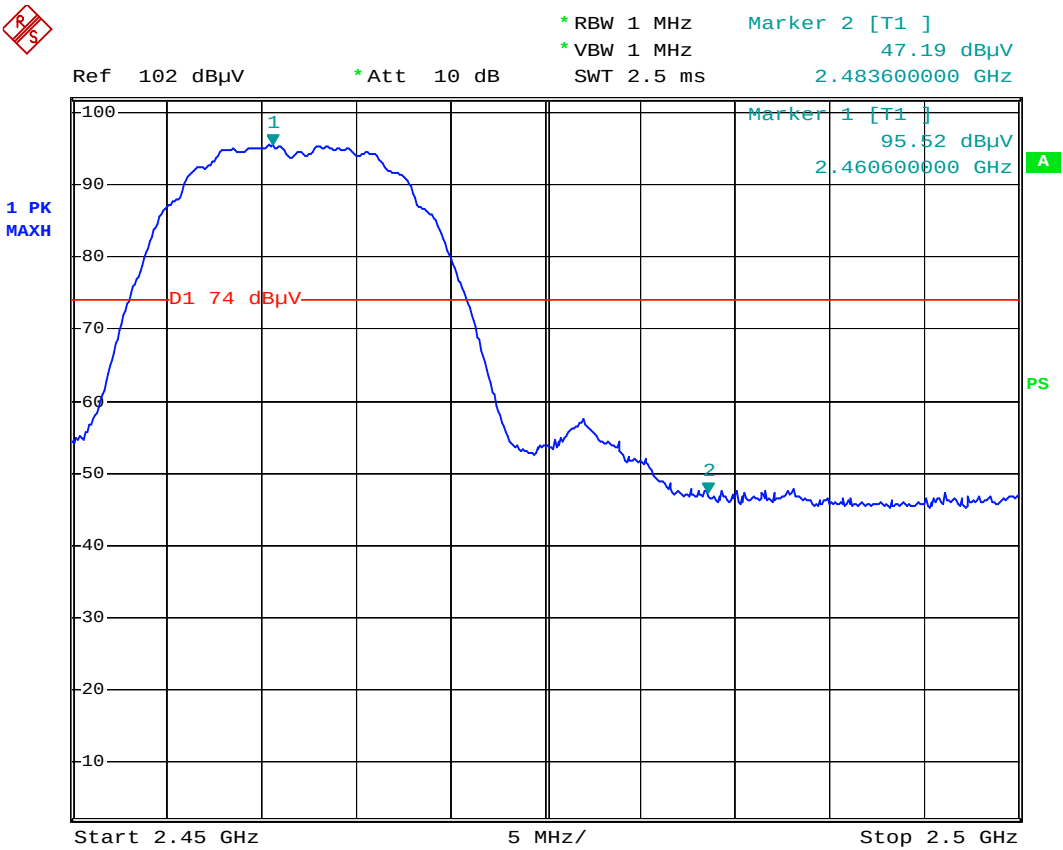


AV detector:

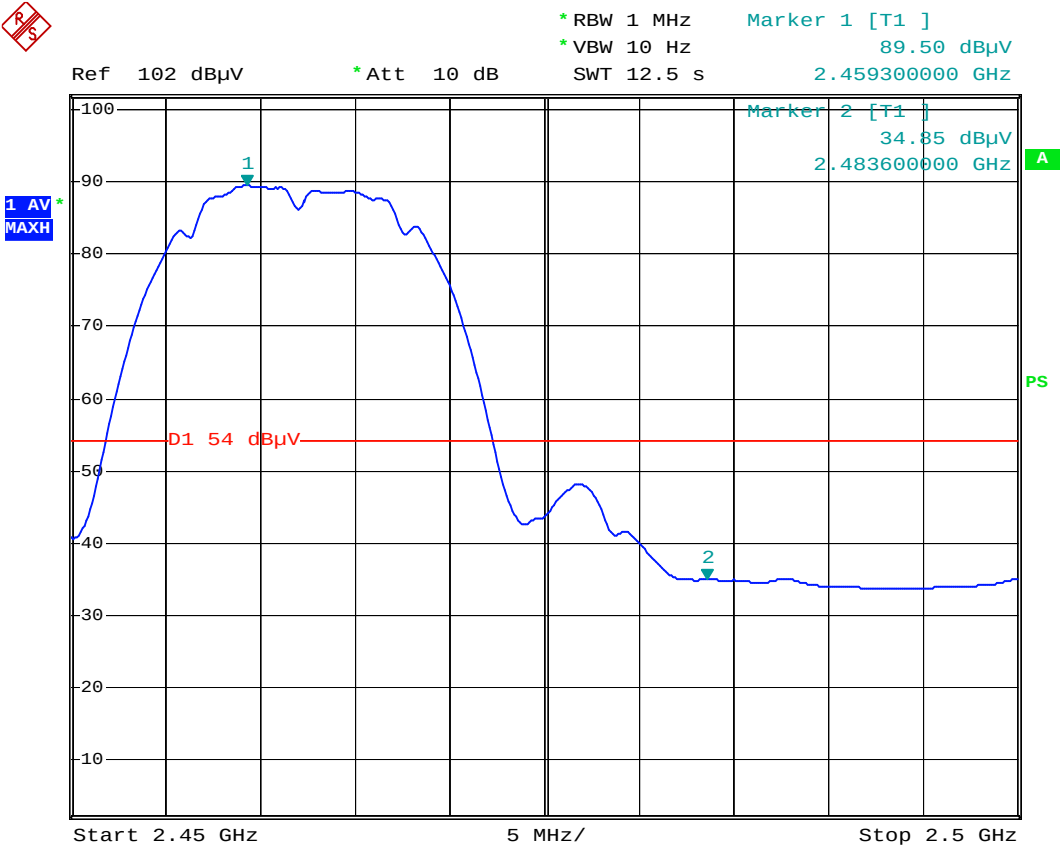


802.11g Mode:

Lowest Channel

PK detector:

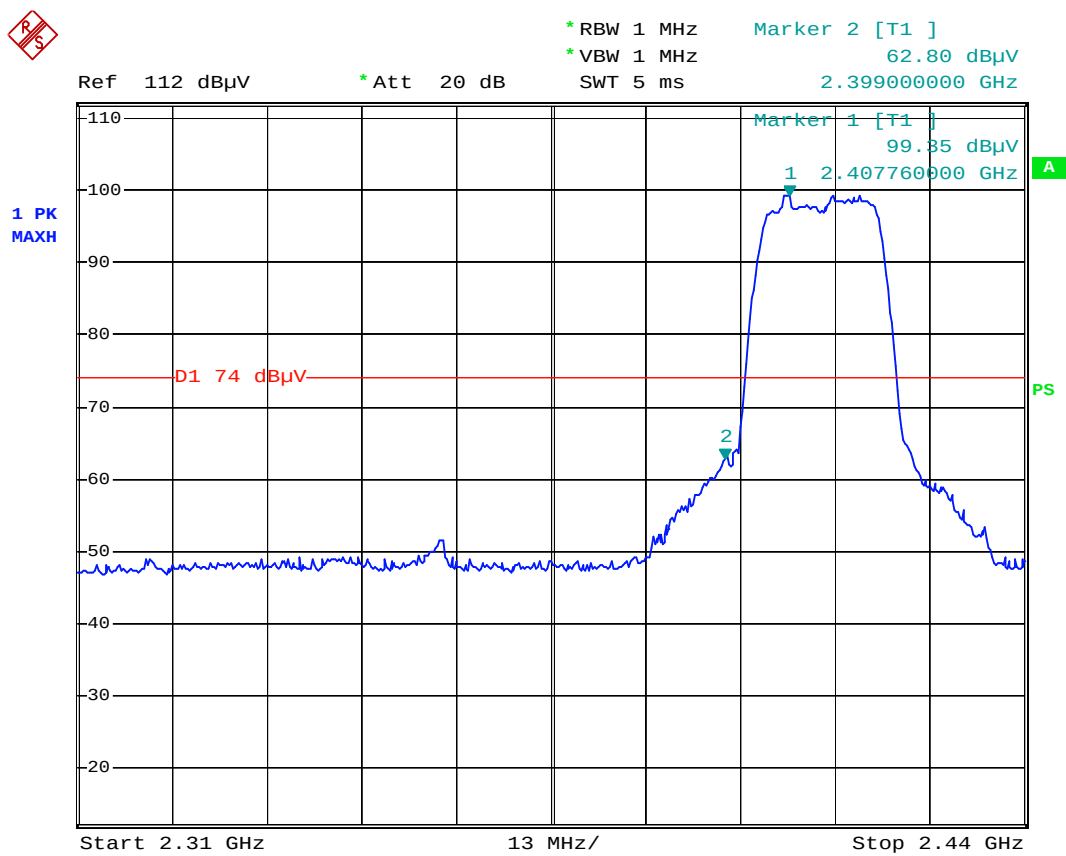


AV detector:

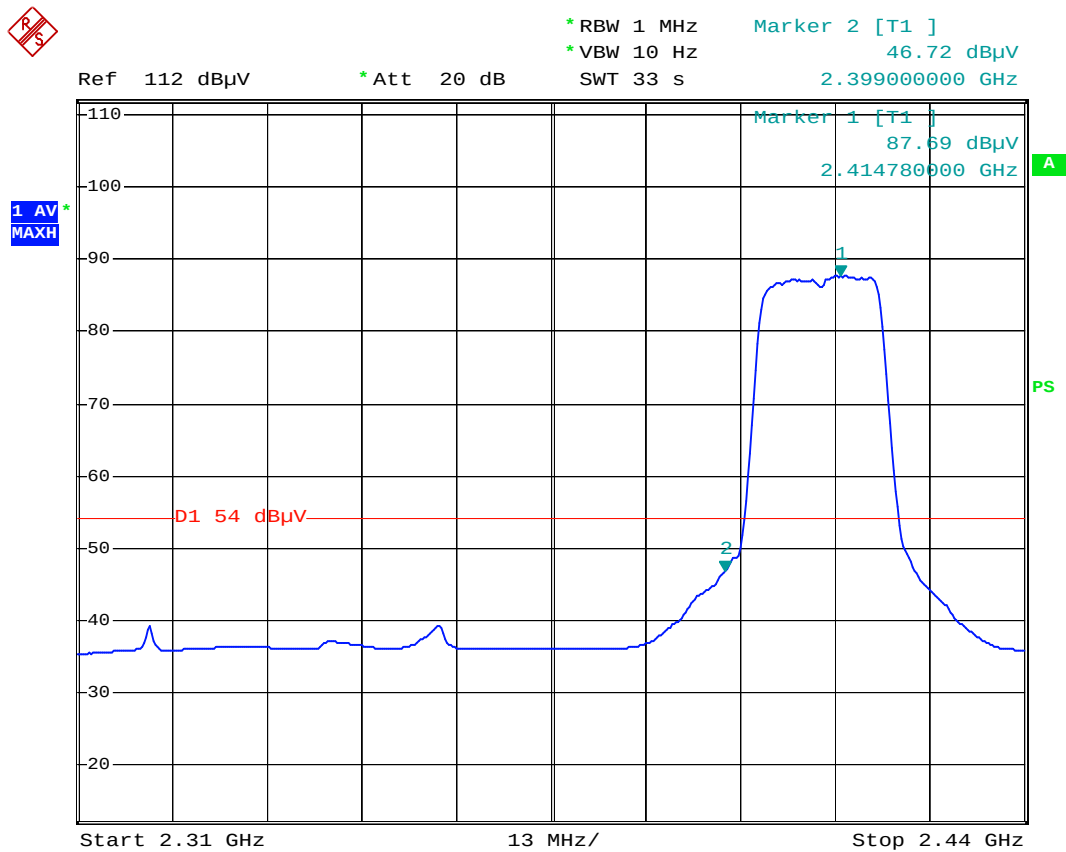


Highest Channel

PK detector:

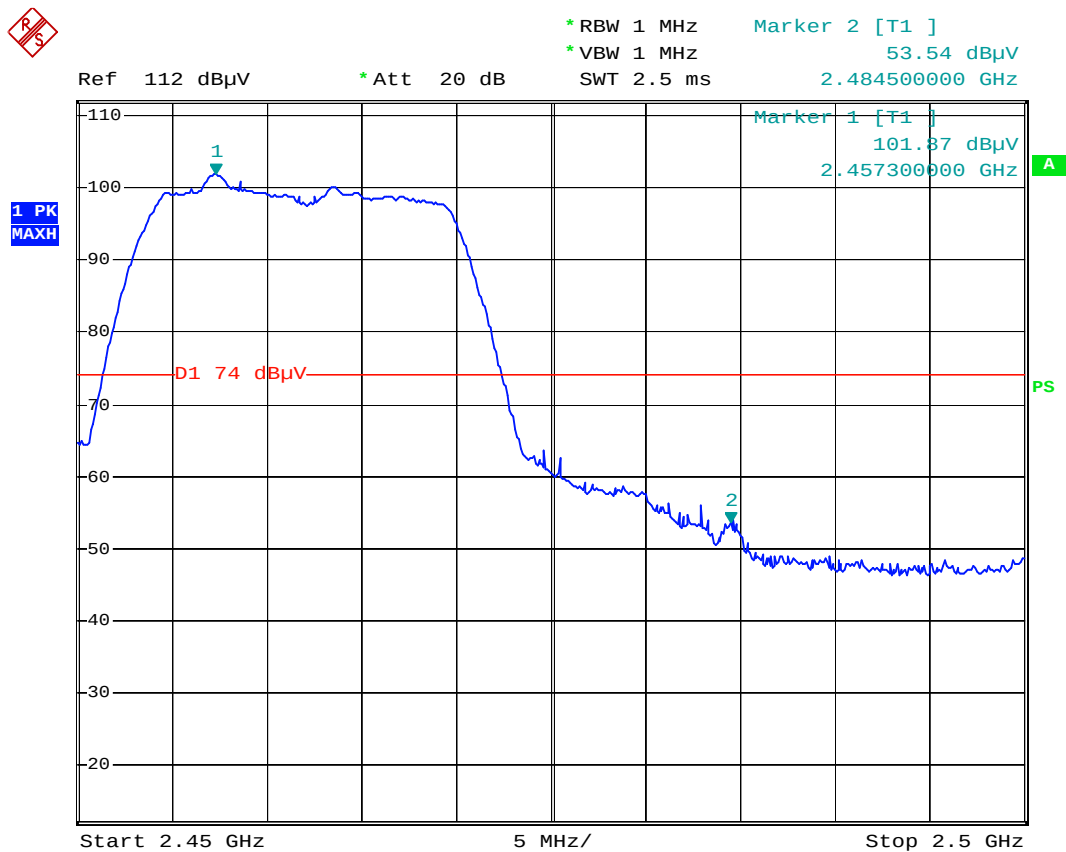

AV detector:

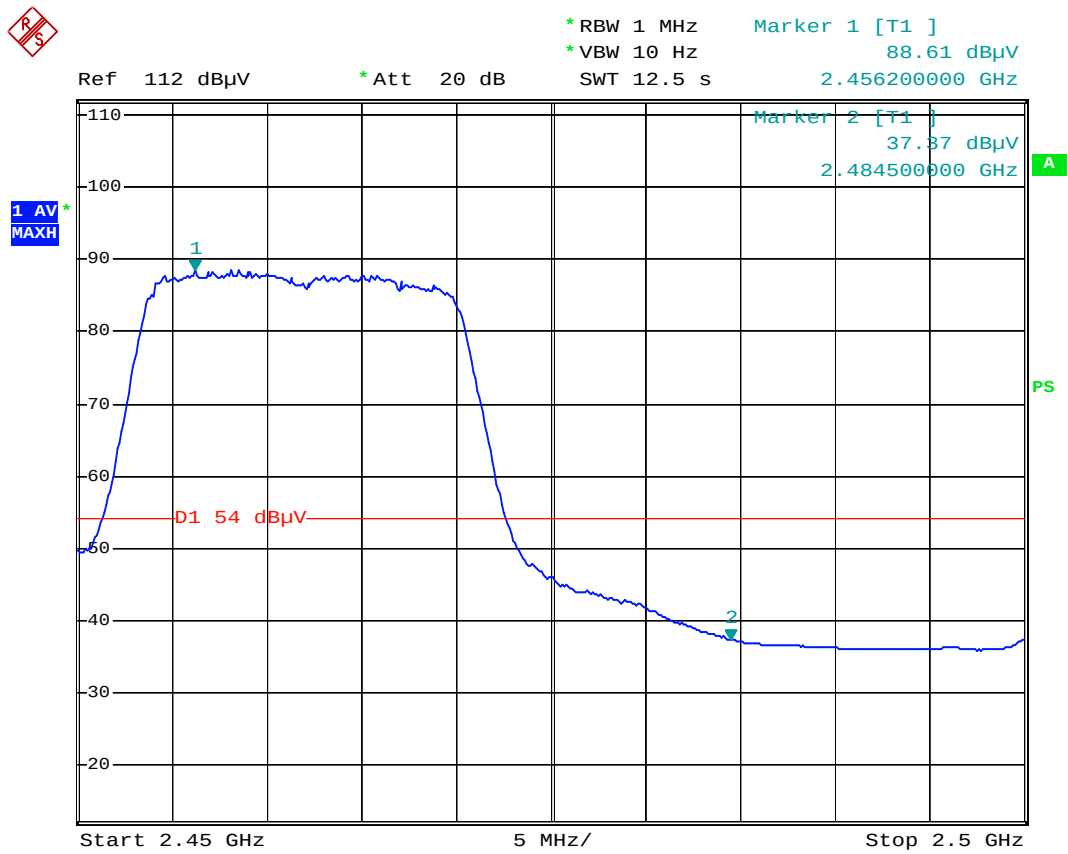

13. §15.247(E) - Power Spectral Density

13.1. Test Equipment

Please refer to Section 4 this report.

13.2. Test Procedure

- 1, Set EUT in the transmitting mode.
- 2, Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3, Set the spectrum analyzer as RBW=3KHz, VBW=10KHz, Span=1.5MHz, Sweep=500S.
- 4, Record the max. reading
- 5, Repeat the above procedure until the measurements for all frequencies are completed.

13.3. Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


13.4. Test Result

PASS


Channel Frequency (MHz)	Data Rate (Mbps)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	RESULT
802.11b Mode				
2412	1	-2.33	8	Compliant
2437	1	-2.40	8	Compliant
2462	1	-3.40	8	Compliant
802.11g Mode				
2412	6	-3.95	8	Compliant
2437	6	-4.07	8	Compliant
2462	6	-3.60	8	Compliant

802.11b Mode:


Low Channel

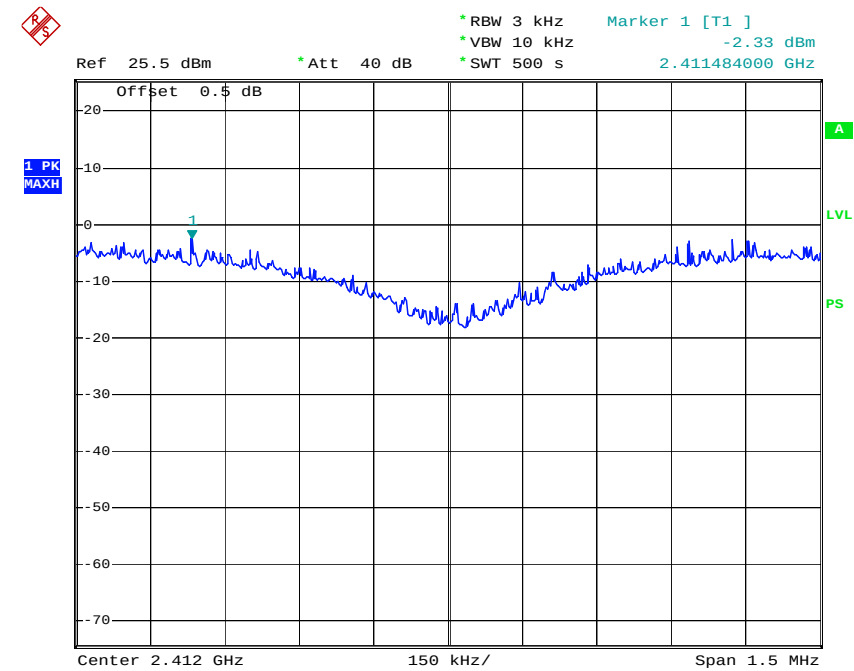

Middle Channel

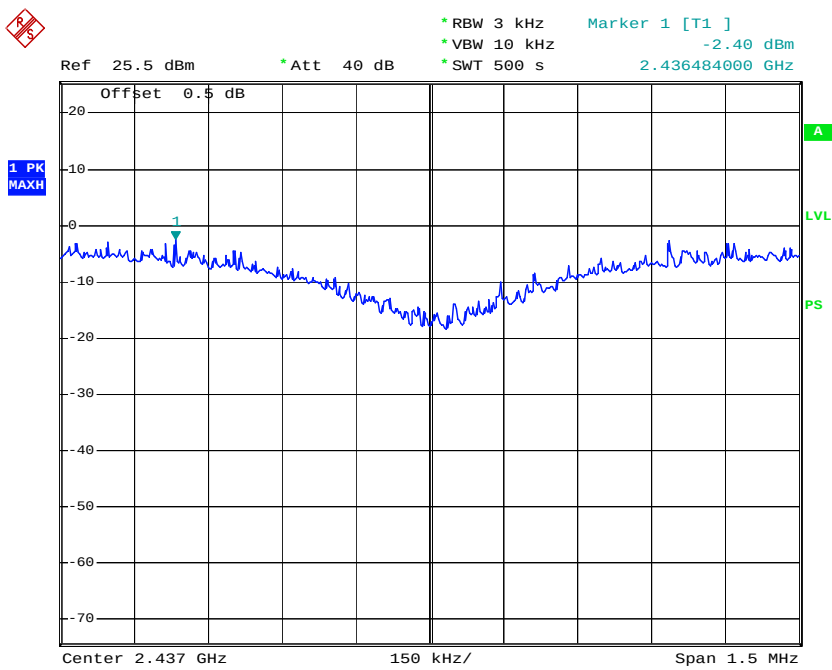


High Channel

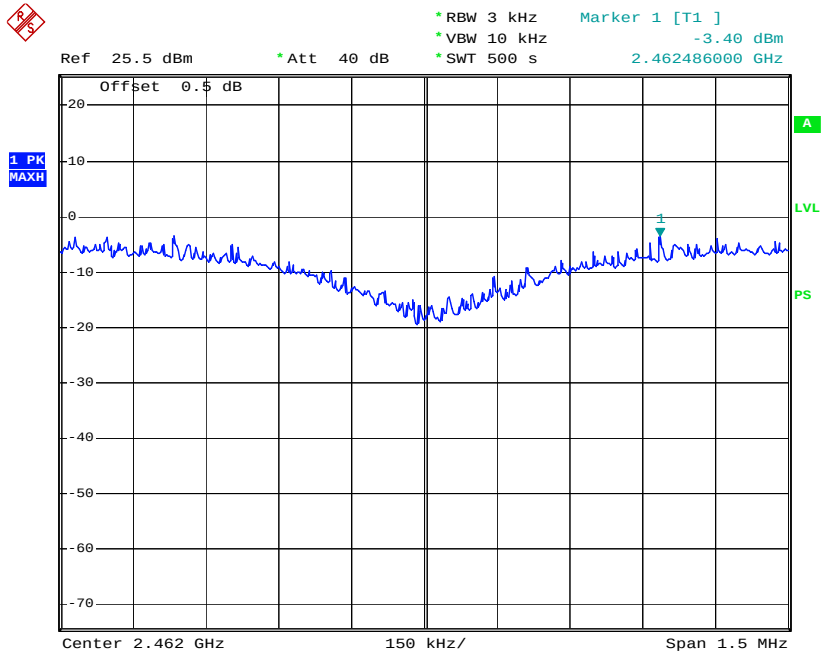


802.11g Mode:

Low Channel

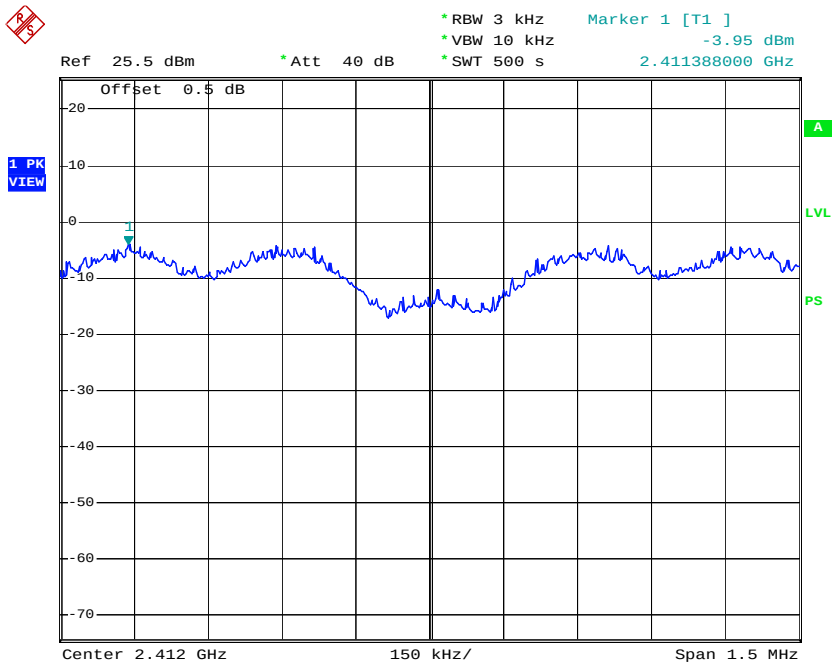

Middle Channel

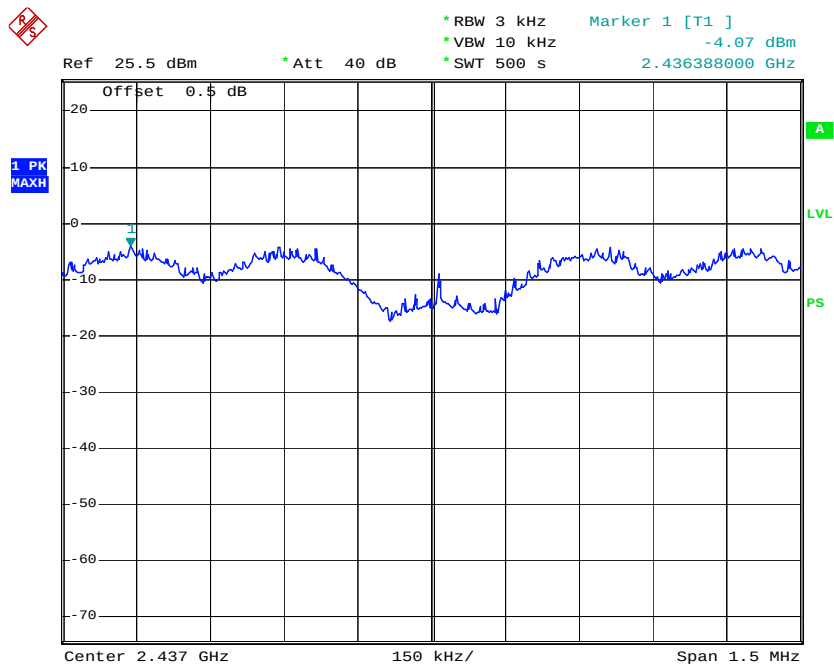

High Channel

