

WiFi 5.8GHz Band

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5745.7$ MHz; $\sigma = 6.08$ S/m; $\epsilon_r = 47.063$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge 3/802.11a/Main Ant/CH149/Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.965 W/kg


Edge/Edge 3/802.11a/Main Ant/CH149/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

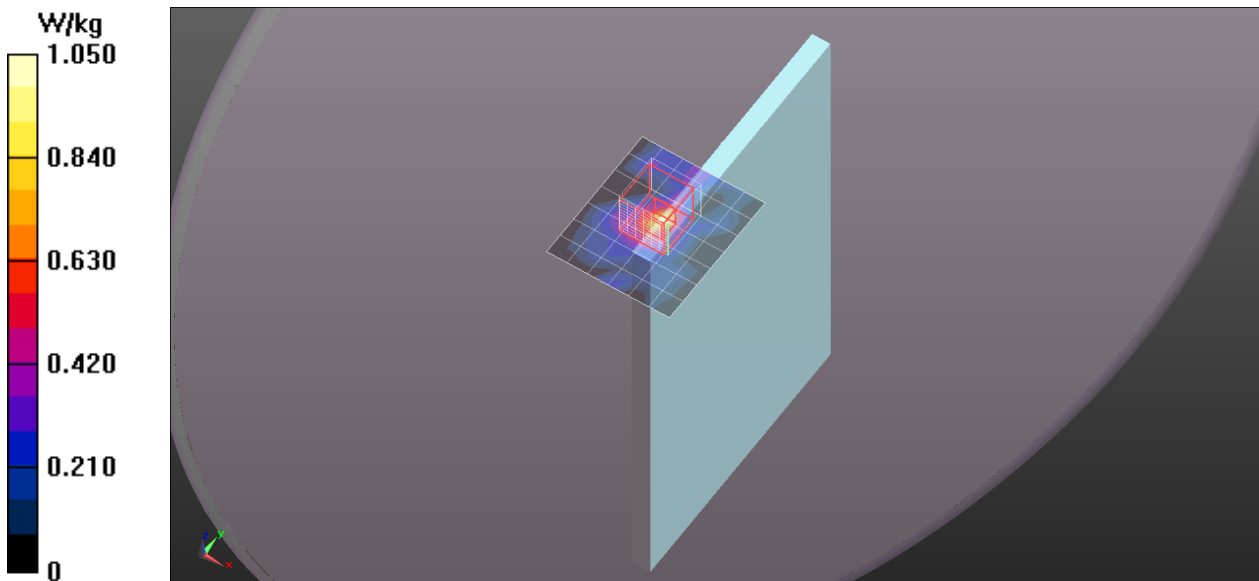

WiFi 5.8GHz Band

Frequency: 5805 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5805.1$ MHz; $\sigma = 6.189$ S/m; $\epsilon_r = 47.041$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge 3/802.11a/Main Ant/CH161/Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.15 W/kg


Edge/Edge 3/802.11a/Main Ant/CH161/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.521 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 0.464 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 1.20 W/kg

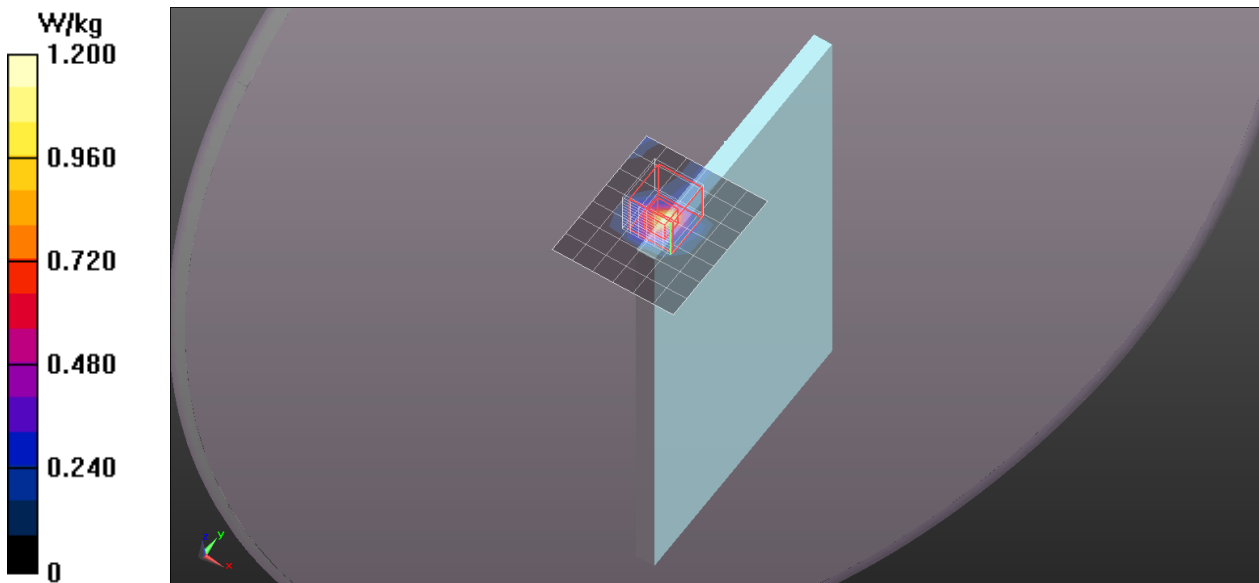

WiFi 5.8GHz Band

Frequency: 5825 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C
Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.195$ S/m; $\epsilon_r = 47.047$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge 3/802.11a/Main Ant/CH165/Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.36 W/kg

Edge/Edge 3/802.11a/Main Ant/CH165/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 2.73 W/kg

Peak SAR (extrapolated) = 2.73 W/kg

SAR(1 g) = 0.641 W/kg; SAR(10 g) = 0.171 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.62 W/kg

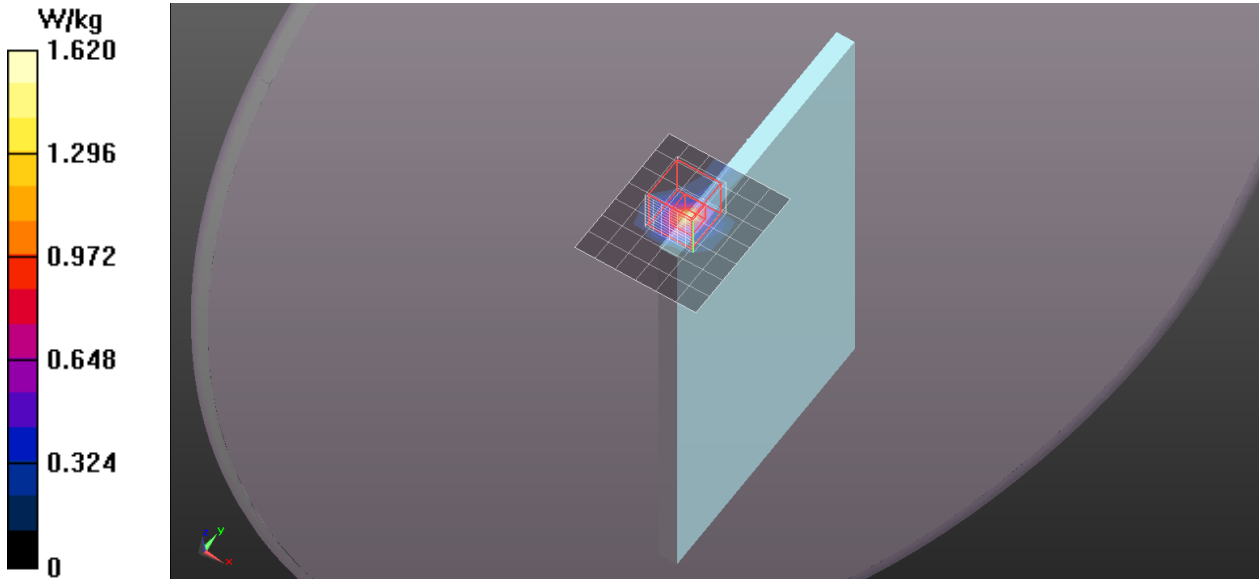

WiFi 5.8GHz Band

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5745.7$ MHz; $\sigma = 5.749$ S/m; $\epsilon_r = 47.73$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge 1/802.11a/Aux Ant/CH149/Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.393 W/kg


Edge/Edge 1/802.11a/Aux Ant/CH149/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.057 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.604 W/kg

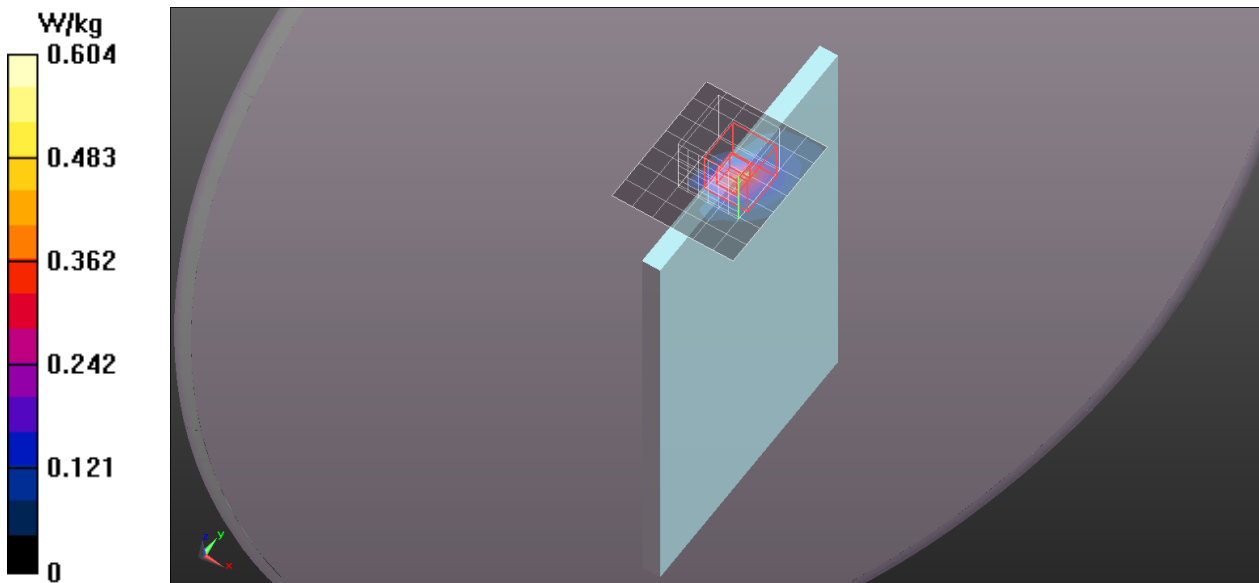

WiFi 5.8GHz Band

Frequency: 5805 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5805.1$ MHz; $\sigma = 5.842$ S/m; $\epsilon_r = 47.583$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge 1/802.11a/Aux Ant/CH161/Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.347 W/kg


Edge/Edge 1/802.11a/Aux Ant/CH161/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.609 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.726 W/kg

SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.478 W/kg

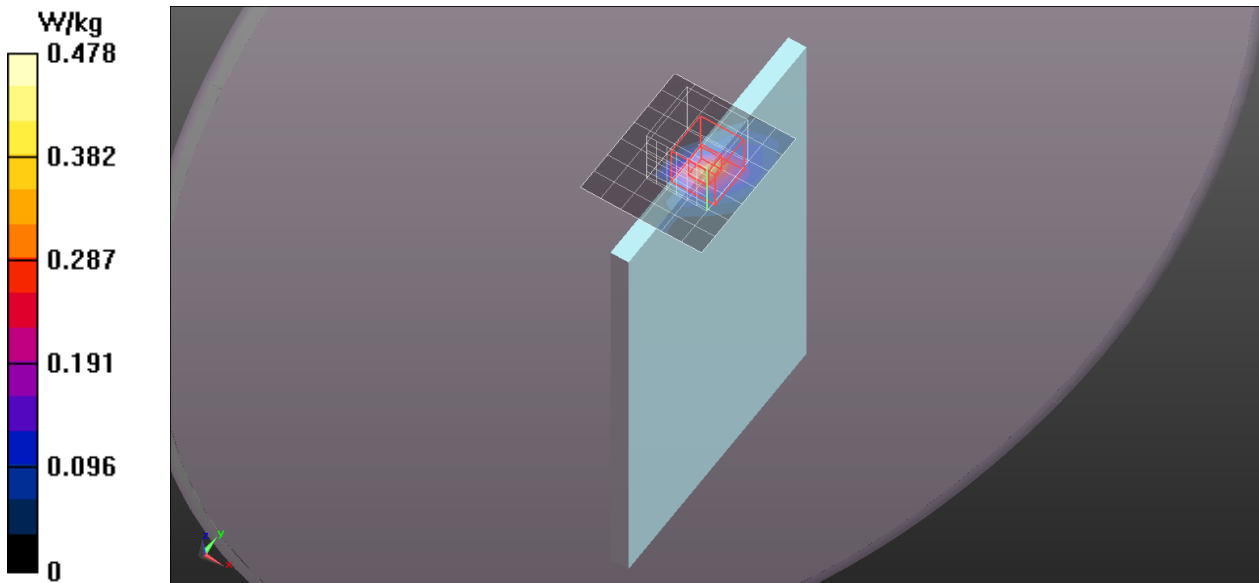

WiFi 5.8GHz Band

Frequency: 5825 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C
Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.864$ S/m; $\epsilon_r = 47.564$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge 1/802.11a/Aux Ant/CH165/Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.326 W/kg

Edge/Edge 1/802.11a/Aux Ant/CH165/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=2mm


Reference Value = 2.837 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.058 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.443 W/kg

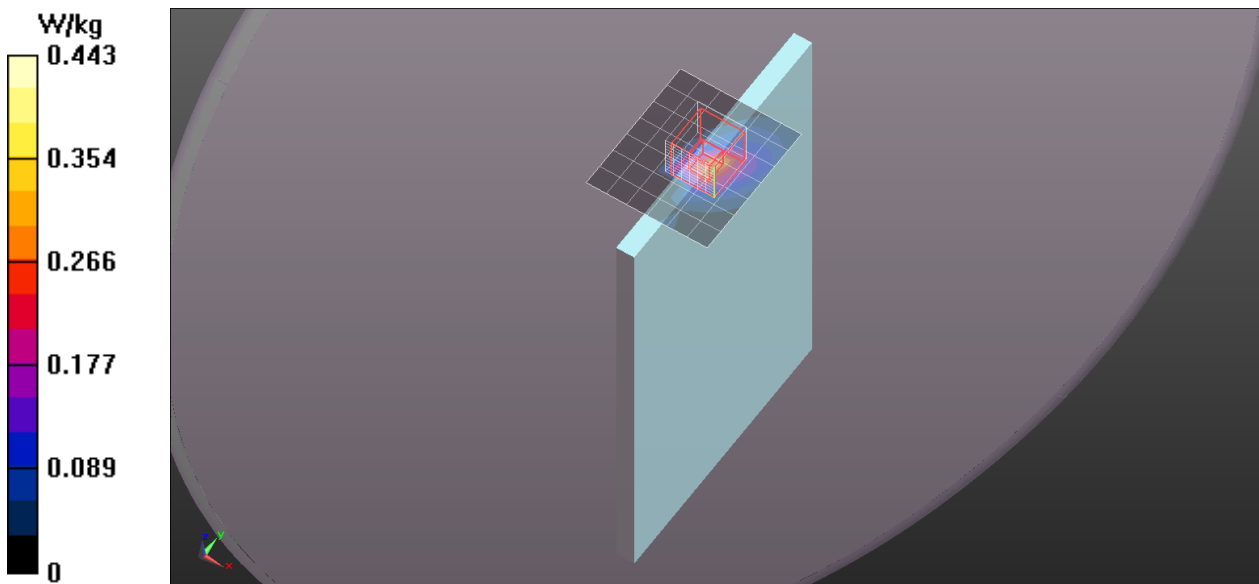

WiFi 5.8GHz Band

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5745.7$ MHz; $\sigma = 5.749$ S/m; $\epsilon_r = 47.73$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Rear Touch/802.11a/Main Ant/CH149/Area Scan (8x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.77 W/kg

Rear/Rear Touch/802.11a/Main Ant/CH149/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 3.59 W/kg

SAR(1 g) = 0.607 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 1.86 W/kg

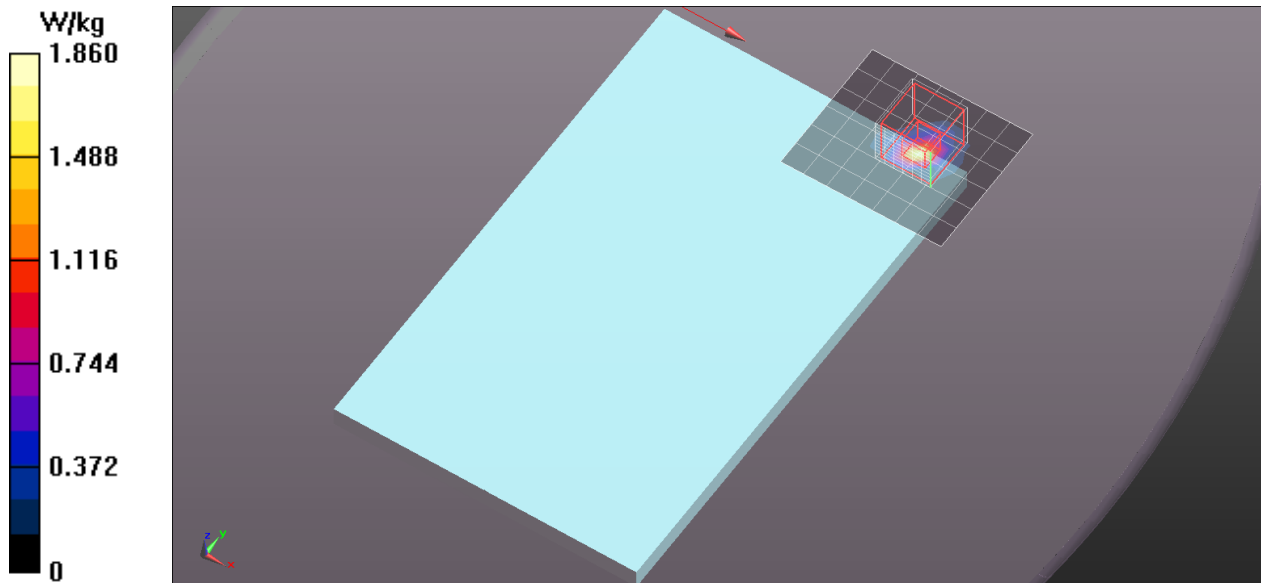

WiFi 5.8GHz Band

Frequency: 5805 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5805.1$ MHz; $\sigma = 6.189$ S/m; $\epsilon_r = 47.041$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Rear Touch/802.11a/Main Ant/CH161/Area Scan (8x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.56 W/kg

Rear/Rear Touch/802.11a/Main Ant/CH161/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 5.12 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.404 W/kg


Maximum value of SAR (measured) = 2.87 W/kg

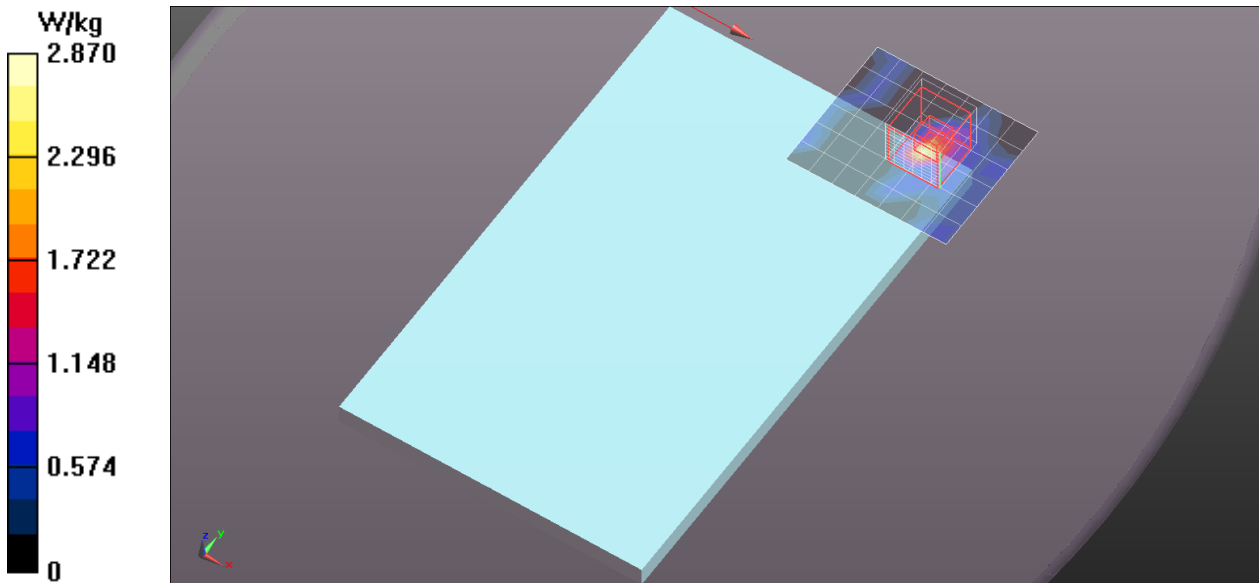

WiFi 5.8GHz Band

Frequency: 5805 MHz; Duty Cycle: 1:1

Rear/Rear Touch/802.11a/Main Ant/CH161/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 2.83 W/kg

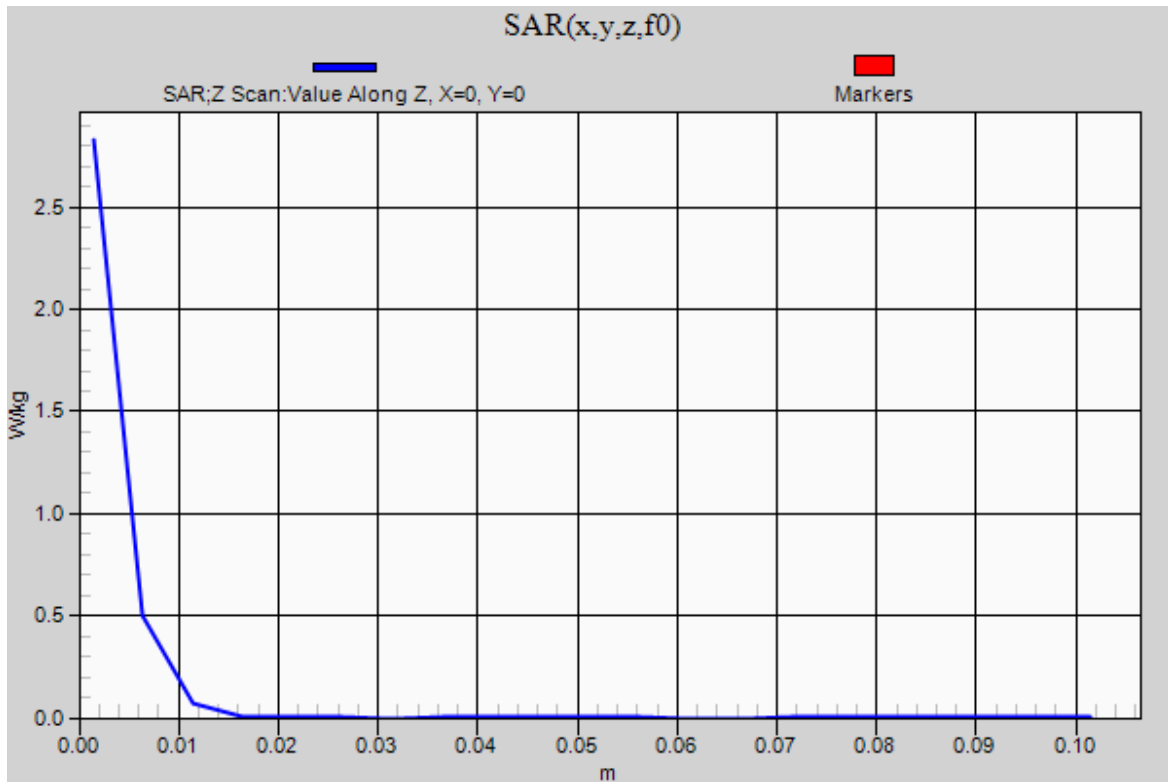

WiFi 5.8GHz Band

Frequency: 5825 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.195$ S/m; $\epsilon_r = 47.047$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Rear Touch/802.11a/Main Ant/CH165/Area Scan (8x7x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.38 W/kg

Rear/Rear Touch/802.11a/Main Ant/CH165/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 10.4 W/kg

SAR(1 g) = 0.927 W/kg; SAR(10 g) = 0.234 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.91 W/kg

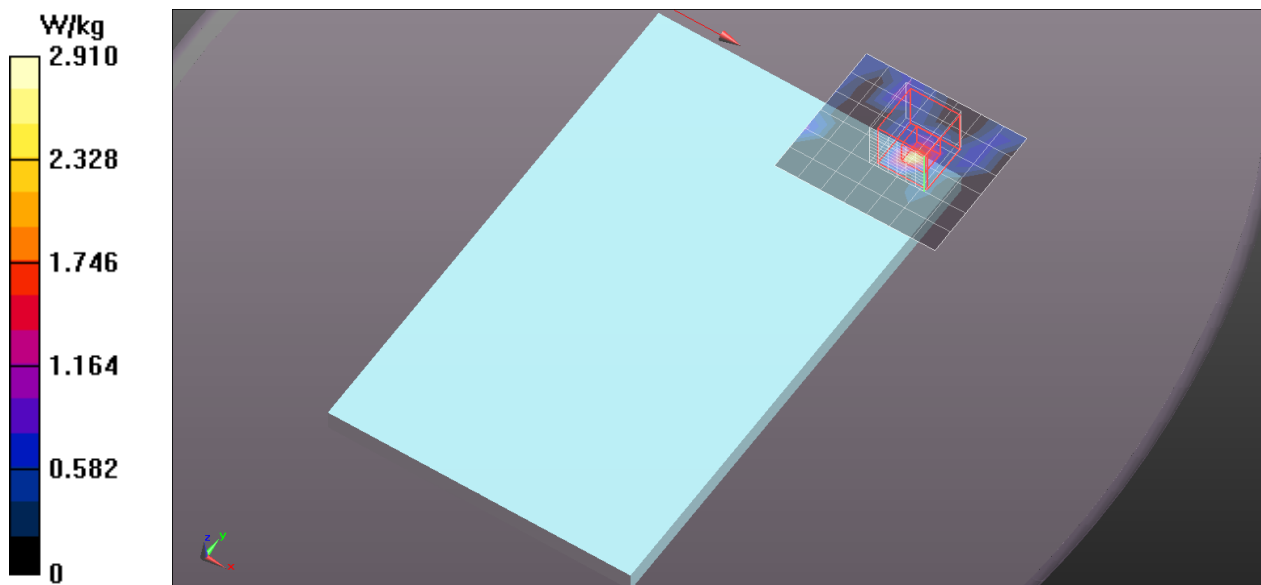

WiFi 5.8GHz Band

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5745.7$ MHz; $\sigma = 5.749$ S/m; $\epsilon_r = 47.73$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Rear Touch/802.11a/Aux Ant/CH149/Area Scan (8x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.452 W/kg


Rear/Rear Touch/802.11a/Aux Ant/CH149/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.990 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.530 W/kg

SAR(1 g) = 0.464 W/kg; SAR(10 g) = 0.444 W/kg

Maximum value of SAR (measured) = 0.519 W/kg

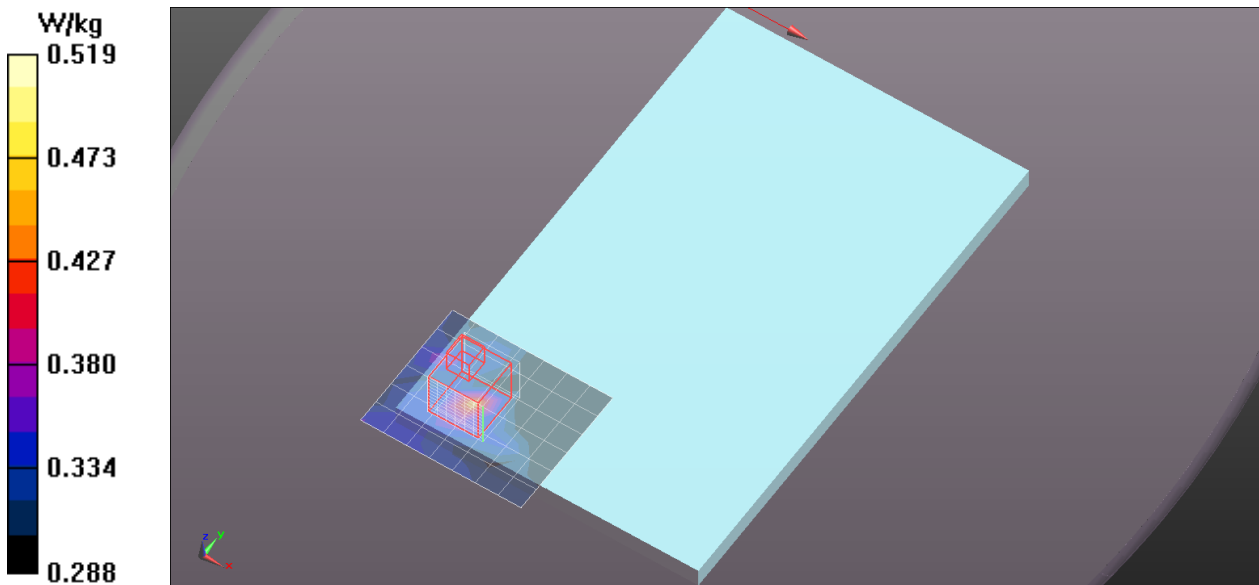

WiFi 5.8GHz Band

Frequency: 5805 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5805.1$ MHz; $\sigma = 5.842$ S/m; $\epsilon_r = 47.583$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Rear Touch/802.11a/Aux Ant/CH161/Area Scan (8x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.417 W/kg

Rear/Rear Touch/802.11a/Aux Ant/CH161/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.597 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.488 W/kg; SAR(10 g) = 0.459 W/kg

Maximum value of SAR (measured) = 0.558 W/kg

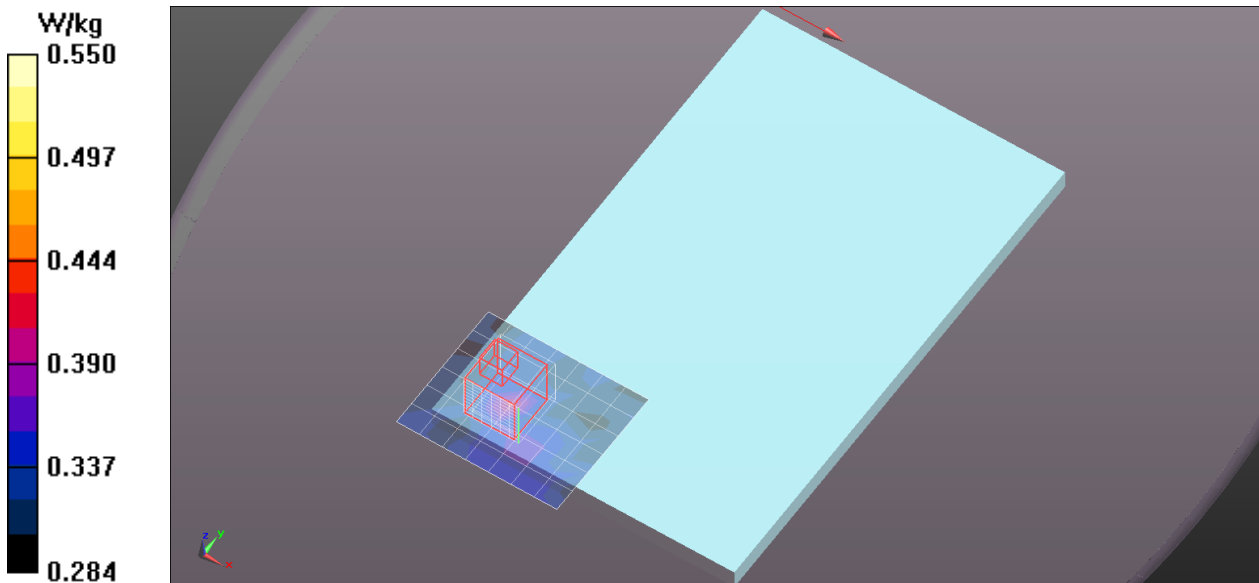

WiFi 5.8GHz Band

Frequency: 5825 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C
Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.864$ S/m; $\epsilon_r = 47.564$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Rear Touch/802.11a/Aux Ant/CH165/Area Scan (8x7x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.409 W/kg

Rear/Rear Touch/802.11a/Aux Ant/CH165/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm


Reference Value = 8.117 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.545 W/kg

SAR(1 g) = 0.490 W/kg; SAR(10 g) = 0.461 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.545 W/kg

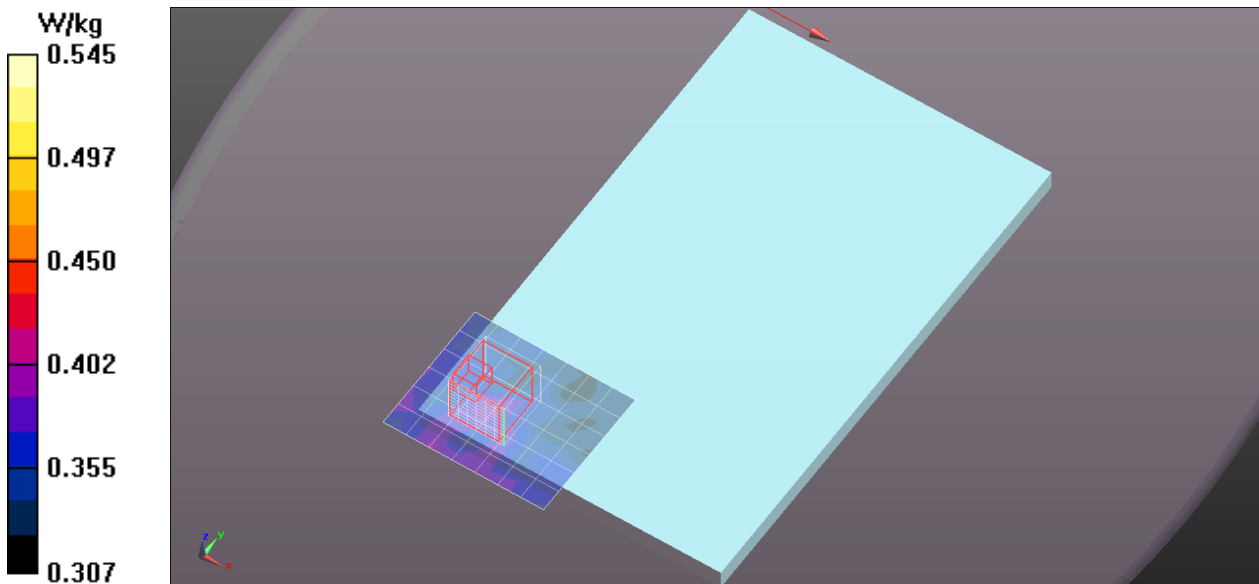

WiFi 5.8GHz Band

Frequency: 5805 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5805.1$ MHz; $\sigma = 6.189$ S/m; $\epsilon_r = 47.041$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/Rear Touch/802.11a/Main Ant/CH161_Repeat/Area Scan (8x7x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.10 W/kg

Rear/Rear Touch/802.11a/Main Ant/CH161_Repeat/Zoom Scan (7x7x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.726 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 5.83 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 2.83 W/kg

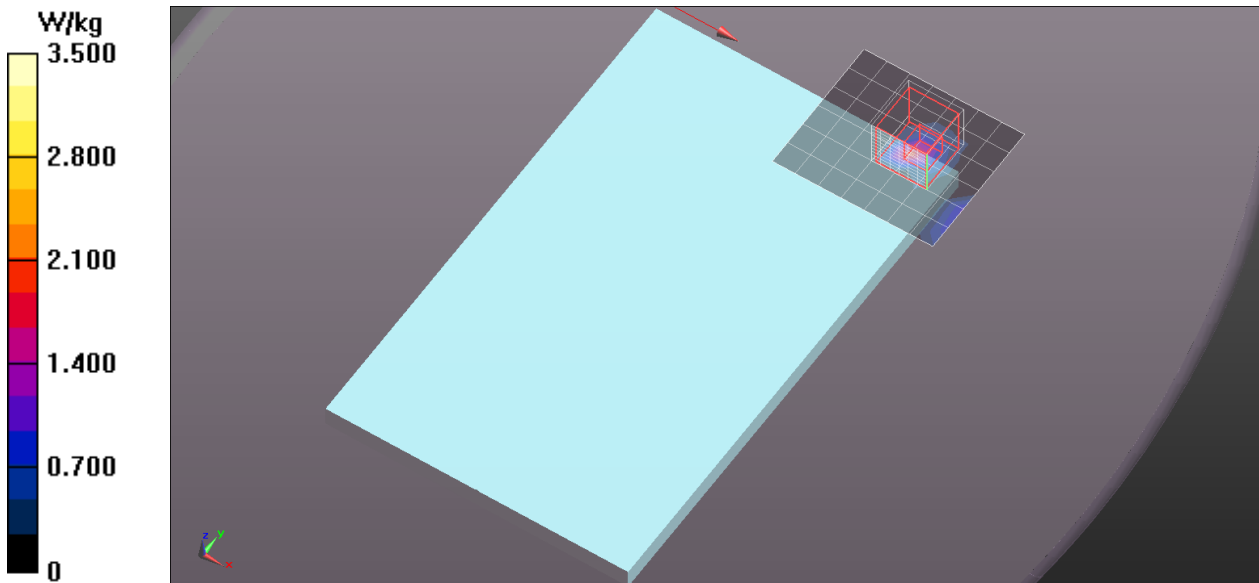

WiFi 5.8GHz Band

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5745.7$ MHz; $\sigma = 5.946$ S/m; $\epsilon_r = 48.444$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge 2/802.11a/Main Ant/CH149/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.385 W/kg


Edge/Edge 2/802.11a/Main Ant/CH149/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.559 W/kg

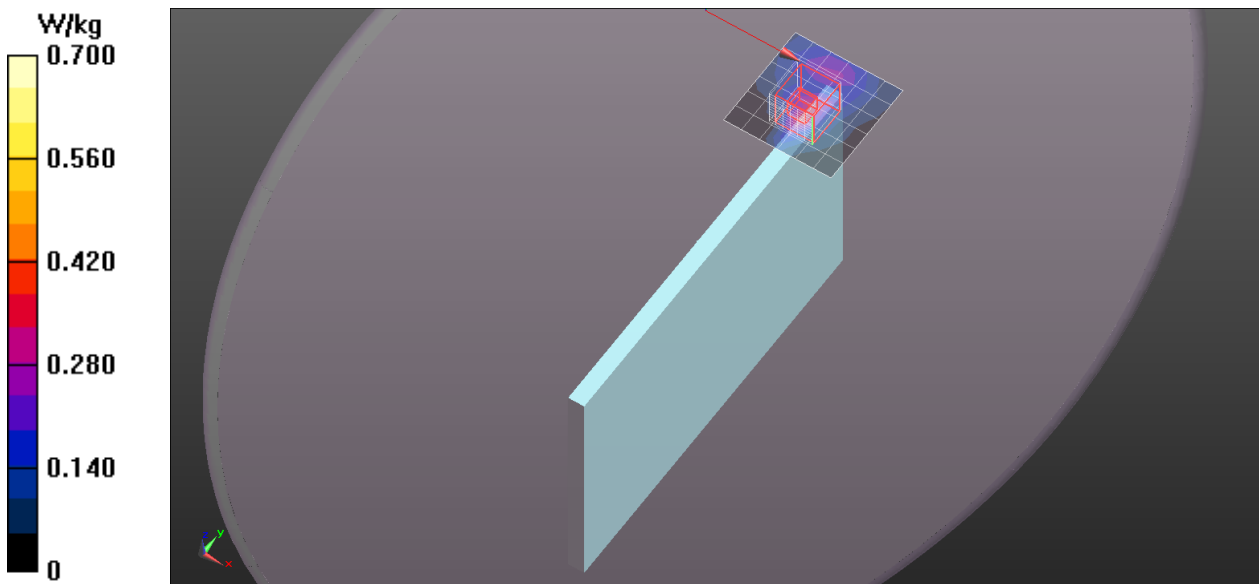

WiFi 5.8GHz Band

Frequency: 5805 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5805.1$ MHz; $\sigma = 6.061$ S/m; $\epsilon_r = 48.367$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge 2/802.11a/Main Ant/CH161/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.618 W/kg


Edge/Edge 2/802.11a/Main Ant/CH161/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.696 W/kg

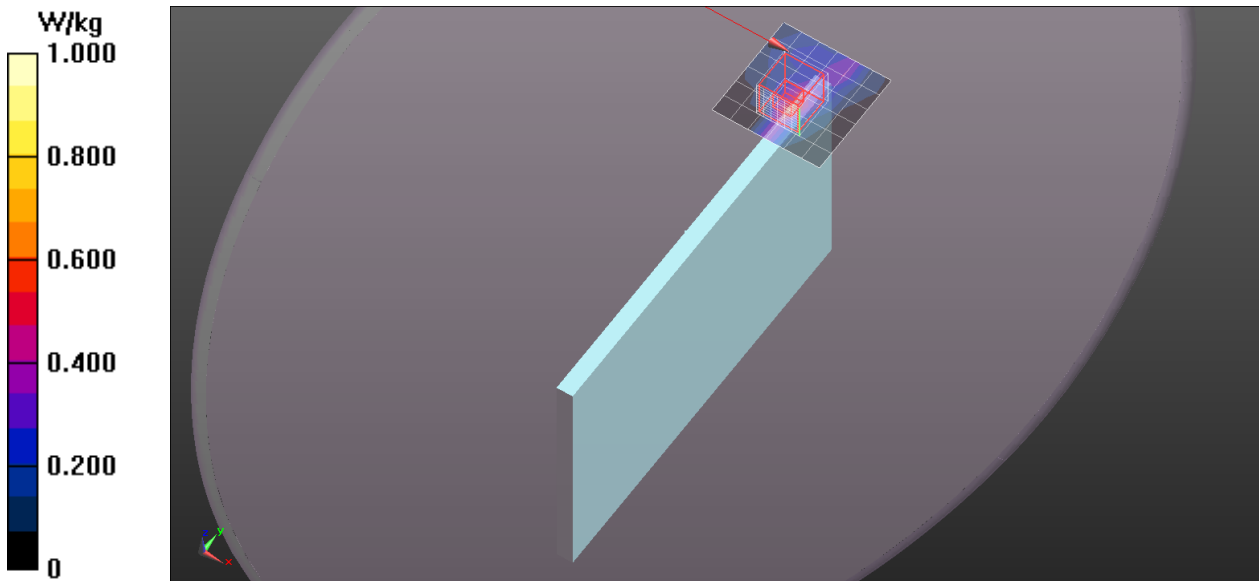

WiFi 5.8GHz Band

Frequency: 5825 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C
Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.08$ S/m; $\epsilon_r = 48.362$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2013/03/12
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge 2/802.11a/Main Ant/CH165/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.612 W/kg

Edge/Edge 2/802.11a/Main Ant/CH165/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.611 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.34 W/kg

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.077 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.661 W/kg

