

Partial FCC RF Test Report


APPLICANT : AzureWave Technologies, Inc.
EQUIPMENT : IEEE 802.11 a/b/g/n Wireless LAN and
Bluetooth Combo LGA Module
BRAND NAME : AzureWave
MODEL NAME : AW-AM691NF
FCC ID : TLZ-AM691NF
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

This is a partial report which is included the peak output power measurement, radiated band edges and spurious emission measurement test item. The product was received on Oct. 25, 2013 and testing was completed on Dec. 05, 2013. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test 6

 1.5 Modification of EUT 6

 1.6 Testing Site 7

 1.7 Applied Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Descriptions of Test Mode 8

 2.2 Test Mode 9

 2.3 Connection Diagram of Test System 9

 2.4 EUT Operation Test Setup 9

3 TEST RESULT 10

 3.1 Peak Output Power Measurement 10

 3.2 Radiated Band Edges and Spurious Emission Measurement 12

 3.3 Antenna Requirements 23

4 LIST OF MEASURING EQUIPMENT 24

5 UNCERTAINTY OF EVALUATION 25

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(b)(1)	RSS-210 A8.1(b)	Peak Output Power	≤ 125 mW	Pass	-
3.2	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 14.93 dB at 53.760 MHz
3.3	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

AzureWave Technologies, Inc.
8 F., No. 94, Baozhong Rd., Xindian, Taipei, Taiwan 231

1.2 Manufacturer

AzureWave Technologies, Inc.
8 F., No. 94, Baozhong Rd., Xindian, Taipei, Taiwan 231

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	IEEE 802.11 a/b/g/n Wireless LAN and Bluetooth Combo LGA Module
Brand Name	AzureWave
Model Name	AW-AM691NF
FCC ID	TLZ-AM691NF
Sample 1	EUT with JTIE Antenna
Sample 2	EUT with WNC Antenna
Installed in Tablet	Brand Name: lenovo Model Name: 20337xxxxxx; 80DExxxxxx; Lenovo Miix 2 10 tabletxxxxxx; 20359xxxxxx; 80DVxxxxxx; Lenovo Miix 2 10xxxxxx(x=0-9, A-Z or blank)
EUT supports Radios application	WLAN 11a/b/g/n (HT20/HT40) Bluetooth v2.1 + EDR Bluetooth v4.0 + LE
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 10.09 dBm (0.0102 W) Bluetooth EDR (2Mbps) : 9.27 dBm (0.0085 W) Bluetooth EDR (3Mbps) : 9.70 dBm (0.0093 W)
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

Antenna Information		
Manufacturer	JTIE	
Antenna Type	Main: PIFA Antenna	Aux.: PIFA Antenna
Peak gain	WLAN (2.4GHz) : 2.70 dBi WLAN (5GHz): 3.16 dBi	Bluetooth : -0.90 dBi WLAN (2.4GHz) : -0.90 dBi WLAN (5GHz) : 1.85 dB
Manufacturer	WNC	
Antenna Type	Main: PIFA Antenna	Aux.: PIFA Antenna
Peak gain	WLAN (2.4GHz) : 0.47 dBi WLAN (5GHz) : 0.81 dBi	Bluetooth : -1.27 dBi WLAN (2.4GHz) : -1.27 dBi WLAN (5GHz) : 1.09 dBi

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH02-HY	03CH07-HY	722060/4086B-1

Note: The test site complies with ANSI C63.4 2003 requirement.

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	9.55 dBm	9.27 dBm	9.70 dBm
Ch39	2441MHz	9.95 dBm	9.04 dBm	9.41 dBm
Ch78	2480MHz	10.09 dBm	9.03 dBm	9.41 dBm

Remark:


1. All the test data for each data rate were verified, but only the worst case was reported.
 2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (X plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.

2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Radiated Test Cases	Bluetooth BR 1Mbps GFSK
	Mode 1: CH00_2402 MHz
	Mode 2: CH39_2441 MHz
	Mode 3: CH78_2480 MHz
Remark:	
1. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and the conducted spurious emissions and conducted band edge measurement for each data rate are no worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission.	
2. All the radiated test cases were performed with Sample 1.	

2.3 Connection Diagram of Test System

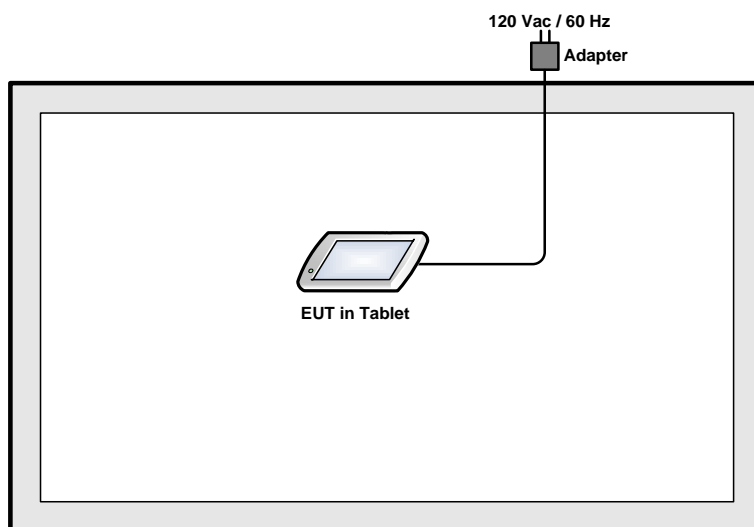

2.4 EUT Operation Test Setup

For Bluetooth function, programmed RF utility, "Command" installed in the Tablet make the EUT provides functions like channel selection and power level for continuous transmitting and receiving signals.

3 Test Result

3.1 Peak Output Power Measurement

3.1.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, 3Mbps and AFH are 0.125 watts.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.1.4 Test Setup

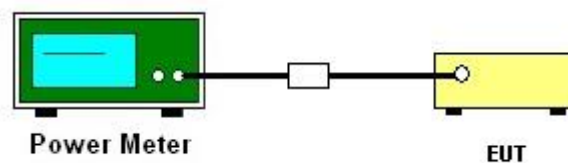



3.1.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Book Lin	Relative Humidity :	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	9.55	20.97	Pass
39	2441	9.95	20.97	Pass
78	2480	10.09	20.97	Pass

Note: For AFH mode using 20 hopping channels, the maximum output power limit is 20.97dBm.

Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Book Lin	Relative Humidity :	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	9.27	20.97	Pass
39	2441	9.04	20.97	Pass
78	2480	9.03	20.97	Pass

Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Book Lin	Relative Humidity :	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	9.70	20.97	Pass
39	2441	9.41	20.97	Pass
78	2480	9.41	20.97	Pass



3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3 Test Procedures

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-27.09dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.2.4 Test Setup


For radiated emissions below 30MHz

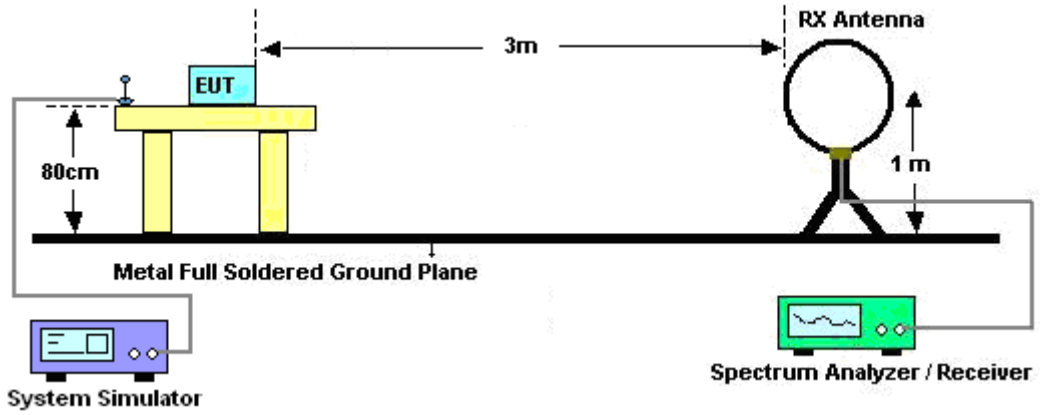

For radiated emissions from 30MHz to 1GHz

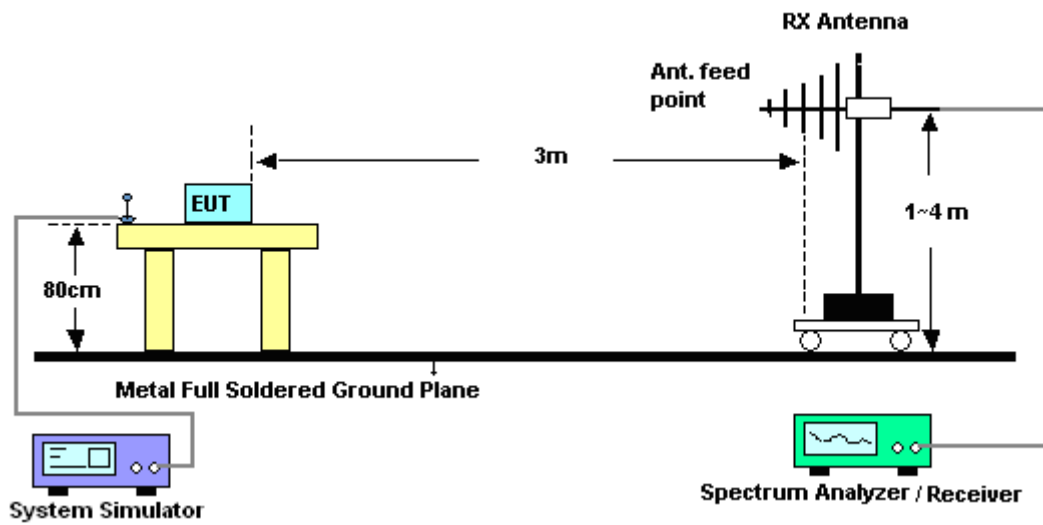

For radiated emissions above 1GHz

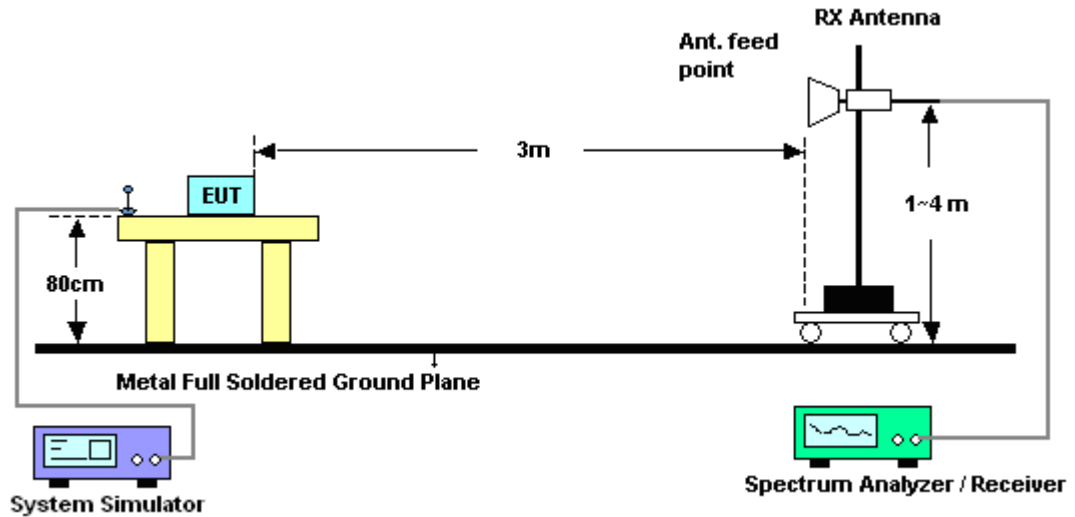


3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.




3.2.6 Duty cycle correction factor for average measurement

DH5 on time (One Pulse) Plot on Channel 39

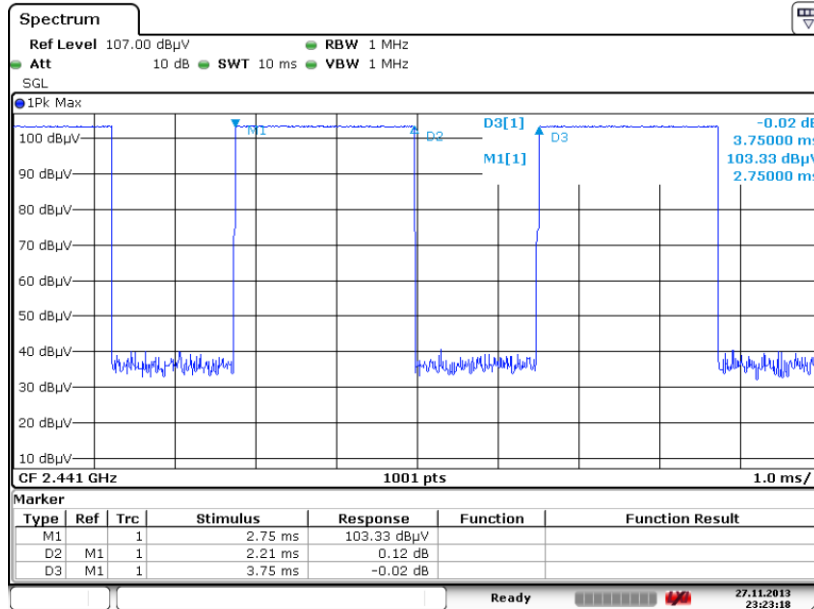

Date: 27.NOV.2013 23:23:19

DH5 on time (Count Pulses) Plot on Channel 39

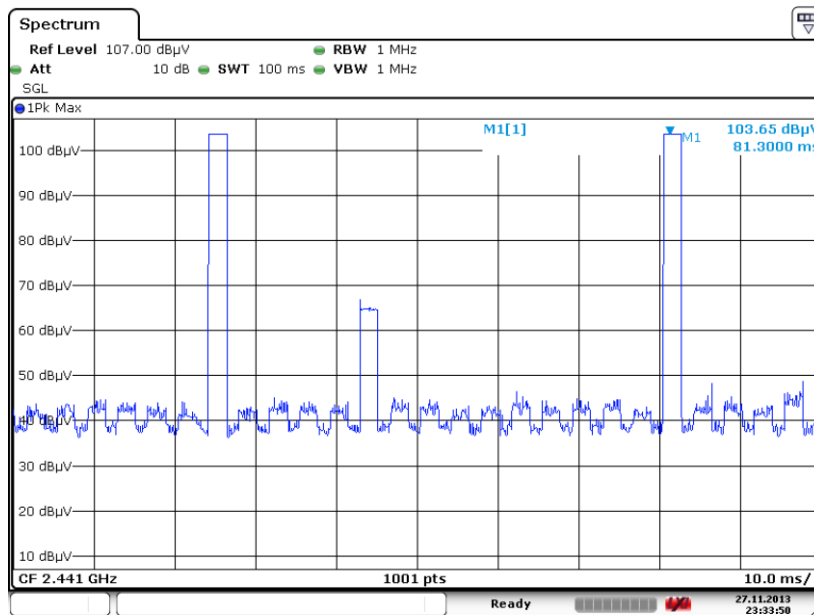

Date: 27.NOV.2013 23:33:50

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.21 / 100 = 4.42 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -27.09 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.



Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.21 \text{ ms} \times 20 \text{ channels} = 44.2 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2$ hops

Thus, the maximum possible ON time:

$$2.21 \text{ ms} \times 2 = 4.42 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(4.42 \text{ ms}/100\text{ms}) = -27.09 \text{ dB}$$



3.2.7 Test Result of Radiated Spurious at Band Edges

Test Mode :	1Mbps	Temperature :	22~25°C
Test Channel :	00	Relative Humidity :	51~54%
		Test Engineer :	Eric Shih

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2357.25	49.34	-24.66	74	44.45	32.26	6.88	34.25	106	135	Peak
2357.25	22.25	-31.75	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2316.3	46.04	-27.96	74	41.25	32.21	6.8	34.22	166	320	Peak
2316.3	18.95	-35.05	54	-	-	-	-	-	-	Average

Test Mode :	1Mbps	Temperature :	22~25°C
Test Channel :	78	Relative Humidity :	51~54%
		Test Engineer :	Eric Shih

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.13	50.61	-23.39	74	45.6	32.38	7.06	34.43	104	132	Peak
2484.13	23.52	-30.48	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2494.57	47.21	-26.79	74	42.23	32.4	7.06	34.48	197	342	Peak
2494.57	20.12	-33.88	54	-	-	-	-	-	-	Average

Note: Average Emission Level = Peak Emission Level + duty cycle correction factor(-27.09)



3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Note: Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

Test Mode :	1Mbps	Temperature :	22~25°C
Test Channel :	00	Relative Humidity :	51~54%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	2402 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	108.29	-	-	103.38	32.3	6.91	34.3	106	135	Peak
2402	81.2	-	-	-	-	-	-	-	-	Average
4803	41.33	-32.67	74	57.56	33.98	8.75	58.96	100	0	Peak
4803	14.24	-39.76	54	-	-	-	-	-	-	Average

- Note:** 1. Other harmonics are lower than background noise.
 2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-27.09)

Test Mode :	1Mbps	Temperature :	22~25°C
Test Channel :	00	Relative Humidity :	51~54%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	2402 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	100.13	-	-	95.22	32.3	6.91	34.3	166	320	Peak
2402	73.04	-	-	-	-	-	-	-	-	Average
4803	42.31	-31.69	74	58.54	33.98	8.75	58.96	100	0	Peak
4803	15.22	-38.78	54	-	-	-	-	-	-	Average

- Note:** 1. Other harmonics are lower than background noise.
 2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-27.09)



Test Mode :	1Mbps	Temperature :	22~25°C
Test Channel :	39	Relative Humidity :	51~54%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	2442 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2442	108.48	-	-	103.53	32.35	6.99	34.39	162	133	Peak
2442	81.39	-	-	-	-	-	-	-	-	Average
4881	40.49	-33.51	74	56.52	33.95	8.85	58.83	100	0	Peak
4881	13.4	-40.6	54	-	-	-	-	-	-	Average
7323	42.38	-31.62	74	53.68	35.53	10.91	57.74	100	0	Peak
7323	15.29	-38.71	54	-	-	-	-	-	-	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-27.09)

Test Mode :	1Mbps	Temperature :	22~25°C
Test Channel :	39	Relative Humidity :	51~54%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	2442 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2442	100.08	-	-	95.13	32.35	6.99	34.39	100	353	Peak
2442	72.99	-	-	-	-	-	-	-	-	Average
4881	41.73	-32.27	74	57.76	33.95	8.85	58.83	100	0	Peak
4881	14.64	-39.36	54	-	-	-	-	-	-	Average
7323	42.63	-31.37	74	53.93	35.53	10.91	57.74	100	0	Peak
7323	15.54	-38.46	54	-	-	-	-	-	-	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-27.09)



Test Mode :	1Mbps	Temperature :	22~25°C
Test Channel :	78	Relative Humidity :	51~54%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.89	24.81	-15.19	40	37.92	17.76	0.55	31.42	133	57	Peak
162.03	19.35	-24.15	43.5	39.08	10.22	1.22	31.17	-	-	Peak
284.88	22.48	-23.52	46	38.87	12.95	1.66	31	-	-	Peak
585.6	22.38	-23.62	46	30.85	19.54	2.65	30.66	-	-	Peak
839.7	25.92	-20.08	46	29.86	23.2	3.24	30.38	-	-	Peak
899.9	28.04	-17.96	46	31.8	23.2	3.34	30.3	-	-	Peak
2480	109.08	-	-	104.07	32.38	7.06	34.43	104	132	Peak
2480	81.99	-	-	-	-	-	-	-	-	Average
4959	41.97	-32.03	74	57.8	33.91	8.92	58.66	100	0	Peak
4959	14.88	-39.12	54	-	-	-	-	-	-	Average
7440	40.38	-33.62	74	51.68	35.51	11.04	57.85	100	0	Peak
7440	13.29	-40.71	54	-	-	-	-	-	-	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-27.09)



Test Mode :	1Mbps	Temperature :	22~25°C
Test Channel :	78	Relative Humidity :	51~54%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
53.76	25.07	-14.93	40	48.35	7.2	0.72	31.2	192	221	Peak
140.97	20.89	-22.61	43.5	39.29	11.5	1.2	31.1	-	-	Peak
284.61	22.19	-23.81	46	38.59	12.92	1.66	30.98	-	-	Peak
449.8	20.45	-25.55	46	31.6	17.3	2.3	30.75	-	-	Peak
813.1	26.57	-19.43	46	31.44	22.29	3.17	30.33	-	-	Peak
925.8	28.15	-17.85	46	30.92	24.18	3.4	30.35	-	-	Peak
2480	101.61	-	-	96.6	32.38	7.06	34.43	197	342	Peak
2480	74.52	-	-	-	-	-	-	-	-	Average
4959	41.7	-32.3	74	57.53	33.91	8.92	58.66	100	0	Peak
4959	14.61	-39.39	54	-	-	-	-	-	-	Average
7440	39.8	-34.2	74	51.1	35.51	11.04	57.85	100	0	Peak
7440	12.71	-41.29	54	-	-	-	-	-	-	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-27.09)



3.3 Antenna Requirements

3.3.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	Dec. 05, 2013	Jun. 06, 2014	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB412923 44	300MHz~40GHz	Feb. 05, 2013	Dec. 05, 2013	Feb. 04, 2014	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US404415 48	300MHz~40GHz	Feb. 05, 2013	Dec. 05, 2013	Feb. 04, 2014	Conducted (TH02-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Sep. 06, 2013	Nov. 27, 2013 ~ Nov. 28, 2013	Sep. 05, 2014	Radiation (03CH07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9kHz~30GHz	Nov. 20, 2013	Nov. 27, 2013 ~ Nov. 28, 2013	Nov. 19, 2014	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	860004/00 01	9kHz~30MHz	Jul. 03, 2012	Nov. 27, 2013 ~ Nov. 28, 2013	Jul. 03, 2014	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Oct. 10, 2013	Nov. 27, 2013 ~ Nov. 28, 2013	Oct. 09, 2014	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 22, 2013	Nov. 27, 2013 ~ Nov. 28, 2013	Aug. 21, 2014	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 251	15GHz- 40GHz	Oct. 03, 2013	Nov. 27, 2013 ~ Nov. 28, 2013	Oct. 02, 2014	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	30MHz~1GHz	Feb. 26, 2013	Nov. 27, 2013 ~ Nov. 28, 2013	Feb. 25, 2014	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A019 17	1GHz~26.5GHz	Aug. 12, 2013	Nov. 27, 2013 ~ Nov. 28, 2013	Aug. 11, 2014	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	159088	DC~18G High Gain	Feb. 27, 2013	Nov. 27, 2013 ~ Nov. 28, 2013	Feb. 26, 2014	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Nov. 27, 2013 ~ Nov. 28, 2013	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	ChainTek 3000	N/A	N/A	N/A	Nov. 27, 2013 ~ Nov. 28, 2013	N/A	Radiation (03CH07-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.50
---	------

