



FCC TEST REPORT (BLUETOOTH/DTS)

REPORT NO.: RF140804E03

MODEL NO.: AW-BT715C

FCC ID: TLZ- BT715C

RECEIVED: Aug. 04, 2014

TESTED: Aug. 11 to 26, 2014

ISSUED: Sep. 26, 2014

APPLICANT: AzureWave Technologies, Inc.

ADDRESS: 8 F., No. 94, Baozhong Rd., Xindian, Taipei, Taiwan
231

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
Taiwan, R.O.C.

TEST LOCATION (2): No.49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
Taiwan, R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by
TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1 CERTIFICATION	6
2 SUMMARY OF TEST RESULTS	7
2.1 MEASUREMENT UNCERTAINTY	9
3 GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	12
3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	13
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	17
3.5 DUTY CYCLE OF TEST SIGNAL	18
3.6 DESCRIPTION OF SUPPORT UNITS	19
3.7 CONFIGURATION OF SYSTEM UNDER TEST	19
4 TEST PROCEDURES AND RESULTS (BT-EDR)	20
4.1 CONDUCTED EMISSION MEASUREMENT	20
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	20
4.1.2 TEST INSTRUMENTS	20
4.1.3 TEST PROCEDURES	21
4.1.4 DEVIATION FROM TEST STANDARD	21
4.1.5 TEST SETUP	21
4.1.6 EUT OPERATING CONDITIONS	22
4.1.7 TEST RESULTS	23
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT	25
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	25
4.2.2 TEST INSTRUMENTS	26
4.2.3 TEST PROCEDURES	28
4.2.4 DEVIATION FROM TEST STANDARD	28
4.2.5 TEST SETUP	29
4.2.6 EUT OPERATING CONDITIONS	29
4.2.7 TEST RESULTS(MODE 1)	30
4.2.8 TEST RESULTS(MODE 2)	37
4.2.9 TEST RESULTS(MODE 3)	44
4.2.10 TEST RESULTS(MODE 4)	51
4.3 NUMBER OF HOPPING FREQUENCY USED	58
4.3.1 LIMIT OF HOPPING FREQUENCY USED	58
4.3.2 TEST INSTRUMENTS	58
4.3.3 TEST PROCEDURES	58
4.3.4 DEVIATION FROM TEST STANDARD	58
4.3.5 TEST SETUP	59
4.3.6 TEST RESULTS	59
4.4 DWELL TIME ON EACH CHANNEL	60
4.4.1 LIMIT OF DWELL TIME USED	60



4.4.2	TEST INSTRUMENTS.....	60
4.4.3	TEST PROCEDURES.....	60
4.4.4	DEVIATION FROM TEST STANDARD	61
4.4.5	TEST SETUP.....	61
4.4.6	TEST RESULTS	62
4.5	CHANNEL BANDWIDTH	66
4.5.1	LIMITS OF CHANNEL BANDWIDTH	66
4.5.2	TEST INSTRUMENTS.....	66
4.5.3	TEST PROCEDURE.....	66
4.5.4	DEVIATION FROM TEST STANDARD	66
4.5.5	TEST SETUP.....	67
4.5.6	EUT OPERATING CONDITION	67
4.5.7	TEST RESULTS	68
4.6	HOPPING CHANNEL SEPARATION.....	69
4.6.1	LIMIT OF HOPPING CHANNEL SEPARATION	69
4.6.2	TEST INSTRUMENTS.....	69
4.6.3	TEST PROCEDURES	69
4.6.4	DEVIATION FROM TEST STANDARD	69
4.6.5	TEST SETUP.....	69
4.6.6	TEST RESULTS	70
4.7	MAXIMUM PEAK OUTPUT POWER.....	71
4.7.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	71
4.7.2	INSTRUMENTS.....	71
4.7.3	TEST PROCEDURES	71
4.7.4	DEVIATION FROM TEST STANDARD	71
4.7.5	TEST SETUP.....	72
4.7.6	EUT OPERATING CONDITION	72
4.7.7	TEST RESULTS	73
4.8	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	74
4.8.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	74
4.8.2	TEST INSTRUMENTS.....	74
4.8.3	TEST PROCEDURE.....	74
4.8.4	DEVIATION FROM TEST STANDARD	74
4.8.5	TEST SETUP.....	74
4.8.6	EUT OPERATING CONDITION	74
4.8.7	TEST RESULTS	75
5	TEST TYPES AND RESULTS (BT-LE).....	78
5.1	CONDUCTED EMISSION MEASUREMENT	78
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	78
5.1.2	TEST INSTRUMENTS.....	78
5.1.3	TEST PROCEDURES	79
5.1.4	DEVIATION FROM TEST STANDARD	79
5.1.5	TEST SETUP.....	79
5.1.6	EUT OPERATING CONDITIONS	79
5.1.7	TEST RESULTS	80
5.2	RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	82



5.2.1	LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	82
5.2.2	TEST INSTRUMENTS.....	83
5.2.3	TEST PROCEDURES	85
5.2.4	DEVIATION FROM TEST STANDARD	86
5.2.5	TEST SETUP.....	86
5.2.6	EUT OPERATING CONDITIONS	86
5.2.7	TEST RESULTS(MODE 1).....	87
5.2.8	TEST RESULTS(MODE 2).....	91
5.2.9	TEST RESULTS(MODE 3).....	95
5.2.10	TEST RESULTS(MODE 4).....	99
5.3	6DB BANDWIDTH MEASUREMENT	103
5.3.1	LIMITS OF 6DB BANDWIDTH MEASUREMENT	103
5.3.2	TEST INSTRUMENTS.....	103
5.3.3	TEST PROCEDURE.....	103
5.3.4	DEVIATION FROM TEST STANDARD	103
5.3.5	TEST SETUP.....	103
5.3.6	EUT OPERATING CONDITIONS	103
5.3.7	TEST RESULTS	104
5.4	CONDUCTED OUTPUT POWER MEASUREMENT.....	105
5.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	105
5.4.2	TEST INSTRUMENTS.....	105
5.4.3	TEST PROCEDURES	105
5.4.4	DEVIATION FROM TEST STANDARD	106
5.4.5	TEST SETUP.....	106
5.4.6	EUT OPERATING CONDITIONS	106
5.4.7	TEST RESULTS	107
5.5	POWER SPECTRAL DENSITY MEASUREMENT	108
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	108
5.5.2	TEST INSTRUMENTS.....	108
5.5.3	TEST PROCEDURE.....	108
5.5.4	DEVIATION FROM TEST STANDARD	108
5.5.5	TEST SETUP.....	108
5.5.6	EUT OPERATING CONDITION	108
5.5.7	TEST RESULTS	109
5.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	110
5.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	110
5.6.2	TEST INSTRUMENTS.....	110
5.6.3	TEST PROCEDURE.....	110
5.6.4	DEVIATION FROM TEST STANDARD	111
5.6.5	TEST SETUP.....	111
5.6.6	EUT OPERATING CONDITION	111
5.6.7	TEST RESULTS	111
6	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	113
7	INFORMATION ON THE TESTING LABORATORIES	114
8	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	115



A D T

RELEASE CONTROL RECORD


ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF140804E03	Original release	Sep. 26, 2014




1 CERTIFICATION

PRODUCT : Bluetooth Module
BRAND NAME : AzureWave
MODEL NO. : AW-BT715C
TEST SAMPLE : ENGINEERING SAMPLE
APPLICANT : AzureWave Technologies, Inc.
TESTED DATE : Aug. 11 to 26, 2014
STANDARDS : **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment (Model: AW-BT715C) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : , **DATE:** Sep. 26, 2014
(Claire Kuan, Specialist)

APPROVED BY : , **DATE:** Sep. 26, 2014
(May Chen, Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For BT-EDR mode:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.48dB at 2.71094MHz.
15.247(a)(1) (iii)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
15.247(a)(1) (iii)	Dwell Time on Each Channel	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -3.1dB at 669.47MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is IPEX and R-SMA not a standard connector.

NOTE: Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.



A D T

For BT-LE mode:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.36dB at 2.72266 MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -3.2dB at 136.43MHz & 669.47MHz & 676.02MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is IPEX and R-SMA not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.86 dB
Radiated emissions (30MHz-1GHz)	5.37 dB
Radiated emissions (1GHz -6GHz)	3.72 dB
Radiated emissions (6GHz -18GHz)	4.00 dB
Radiated emissions (18GHz -40GHz)	4.11 dB



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Bluetooth Module
MODEL NO.	AW-BT715C
POWER SUPPLY	3.3Vdc from host equipment
MODULATION TYPE	GFSK, $\pi/4$ -DQPSK, 8DPSK for FHSS GFSK for DTS
MODULATION TECHNOLOGY	FHSS, DTS
DATE RATE	Up to 3Mbps for BT-EDR mode Up to 1Mbps for BT-LE mode
FREQUENCY RANGE	2402MHz ~ 2480MHz
NUMBER OF CHANNEL	BT-EDR mode: 79 BT-LE mode: 40
MAX. OUTPUT POWER	BT-EDR mode: 3.864mW BT-LE mode: 2.173mW
ANTENNA TYPE	Please see NOTE
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	NA

NOTE:

1. There is Bluetooth 4.0 technology used for the EUT.
2. The antennas provided to the EUT, please refer to the following table:

Ant. No.	Vender	Model No.	Antenna Type	Antenna Connector	Cable Loss (dB)	Net Gain (dBi)	Cable Length (mm)	Frequency range (GHz to GHz)
1	Yageo	ANT9520LL06R2400A	Chip	RP-SMA	-	2.85	-	2.4~2.5
2	Yageo	ANT1204F001R2400A	Chip	I-PEX	0.4	1.27	65	2.4~2.5
3	Yageo	ANT8010LL04R2400A	Chip	RP-SMA	-	5.46	-	2.4~2.5
4	Taoglas	FXP74.07.0100A	PIFA	I-PEX	0.5	4	100	2.4~2.5
5	MAG LAYERS	MSA-4008-25GC1-A1	PIFA	I-PEX	0.7	4	150	2.4~2.5
6	Taoglas	FXP73.07.0100A	PCB	I-PEX	0.5	2.5	100	2.4~2.5
7	Yageo	ANTX100P001B24003	PCB	I-PEX	0.5	4.4	100	2.4~2.5
8	MAG LAYERS	FPA-4605-2G4C1-A18	PCB	I-PEX	0.8	2.75	170	2.4~2.5
9	Taoglas	GW11.A153	Dipole	RP-SMA	-	2.3	-	2.4~2.5
10	Taoglas	FXP830.24.0100B	Dipole	I-PEX	0.5	1.8	100	2.4~2.5
11	MAG LAYERS	EDA-1713-2G4C1-B16	Dipole	I-PEX	0.5	5	100	2.4~2.5

From the above antennas, Ant. No. 3, 5, 7 & 11 were selected as representative antennas for the test and its data was recorded in this report.

3. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

79 channels are provided for BT-EDR mode

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

40 channels are provided for BT-LE mode:

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

For BT-EDR mode:

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
1	√	√	√	√	√	Chip antenna
2	-	√	√	-	-	PIFA antenna
3	-	√	√	-	-	PCB antenna
4	-	√	√	-	-	Dipole antenna

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

NOTE: For radiated emission, the EUT's antennas (Chip/PIFA/PCB) had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

POWER LINE CONDUCTED EMISSION:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	78	FHSS	8DPSK	3DH5

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	78	FHSS	8DPSK	3DH5

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	3DH5



ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 78	FHSS	GFSK	DH5
0 to 78	0, 78	FHSS	8DPSK	3DH5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
PLC	30deg. C, 70%RH	120Vac, 60Hz	Mike Hsieh
RE<1G	25deg. C, 69%RH	120Vac, 60Hz	Andy Ho
RE≥1G	23deg. C, 67%RH	120Vac, 60Hz	Robert Cheng
APCM	25deg. C, 60%RH	120Vac, 60Hz	James Chan
OB	25deg. C, 60%RH	120Vac, 60Hz	James Chan



For BT-LE mode:

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
1	√	√	√	√	√	Chip antenna
2	-	√	√	-	-	PIFA antenna
3	-	√	√	-	-	PCB antenna
4	-	√	√	-	-	Dipole antenna

Where **PLC:** Power Line Conducted Emission **RE < 1G:** Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM:** Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

NOTE: For radiated emission, the EUT’s antennas (Chip/PIFA/PCB) had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
BT-LE	0 to 39	39	DTS	GFSK	1

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
BT-LE	0 to 39	39	DTS	GFSK	1



RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
BT-LE	0 to 39	0, 19, 39	DTS	GFSK	1

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
BT-LE	0 to 39	0, 19, 39	DTS	GFSK	1

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
BT-LE	0 to 39	0, 19, 39	DTS	GFSK	1

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
PLC	30deg. C, 70%RH	120Vac, 60Hz	Mike Hsieh
RE<1G	25deg. C, 69%RH	120Vac, 60Hz	Andy Ho
RE≥1G	23deg. C, 67%RH	120Vac, 60Hz	Robert Cheng
APCM	25deg. C, 60%RH	120Vac, 60Hz	James Chan
OB	25deg. C, 60%RH	120Vac, 60Hz	James Chan



3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v03r02

ANSI C63.10-2009


All test items have been performed and recorded as per the above standards.

3.5 DUTY CYCLE OF TEST SIGNAL

Duty cycle of test signal is < 98 %, duty factor shall be considered.

For **BT_LE-GFSK**:

Duty cycle = 0.389 ms/0.626 ms = 0.621, Duty factor = $10 * \log(1/0.621) = 2.1$

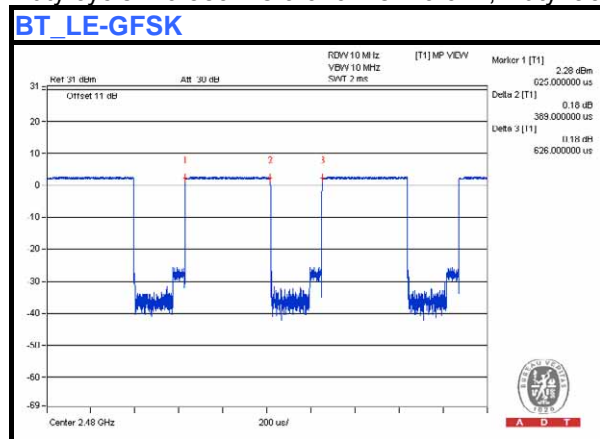

3.6 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


No.	Product	Brand	Model No.	Serial No.	FCC ID	Remark
A	NOTEBOOK COMPUTER	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab
B	TEST TOOL	AzureWave	NA	NA	NA	Supplied by client

NOTE:

1. All power cords of the above support units are non-shielded (1.8 m).

No.	Cable	Qty.	Length (m)	Shielded (Yes/ No)	Cores (Number)	Remark
1	USB	1	1.8	Yes	0	Supplied by client

3.7 CONFIGURATION OF SYSTEM UNDER TEST

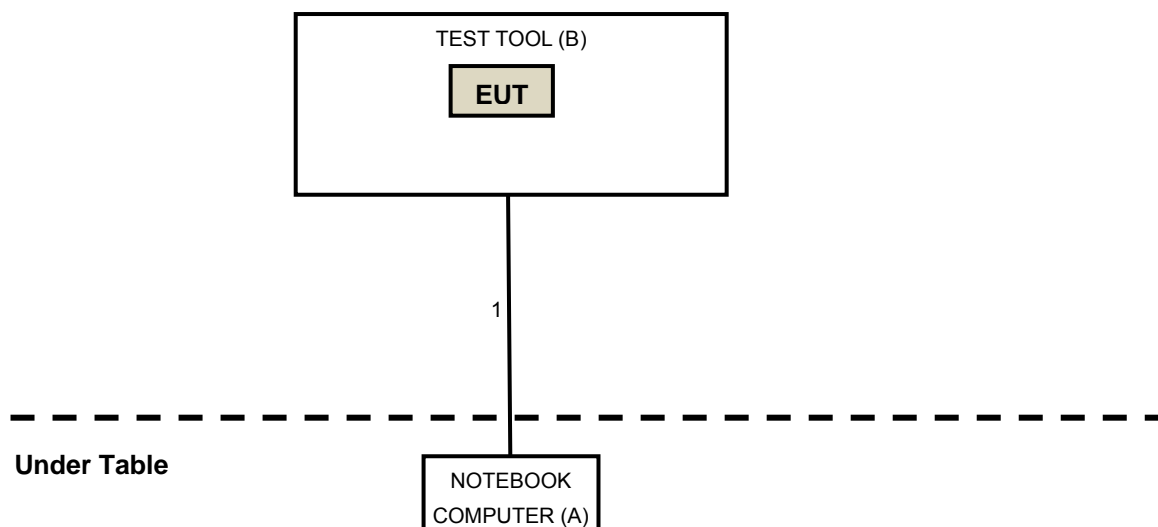

4 TEST PROCEDURES AND RESULTS (BT-EDR)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100375	Apr. 29, 2014	Apr. 28, 2015
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 12, 2013	Sep. 11, 2014
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100071	Nov. 13, 2013	Nov. 12, 2014
RF Cable (JYEBAO)	5DFB	COCCAB-001	Mar. 10, 2014	Mar. 09, 2015
50 ohms Terminator	N/A	EMC-03	Sep. 24, 2013	Sep. 23, 2014
50 ohms Terminator	N/A	EMC-02	Oct. 01, 2013	Sep. 30, 2014
Software ADT	BV ADT_Cond_V7.3.7. 3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Aug. 11, 2014

4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) were not recorded.

NOTE: The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

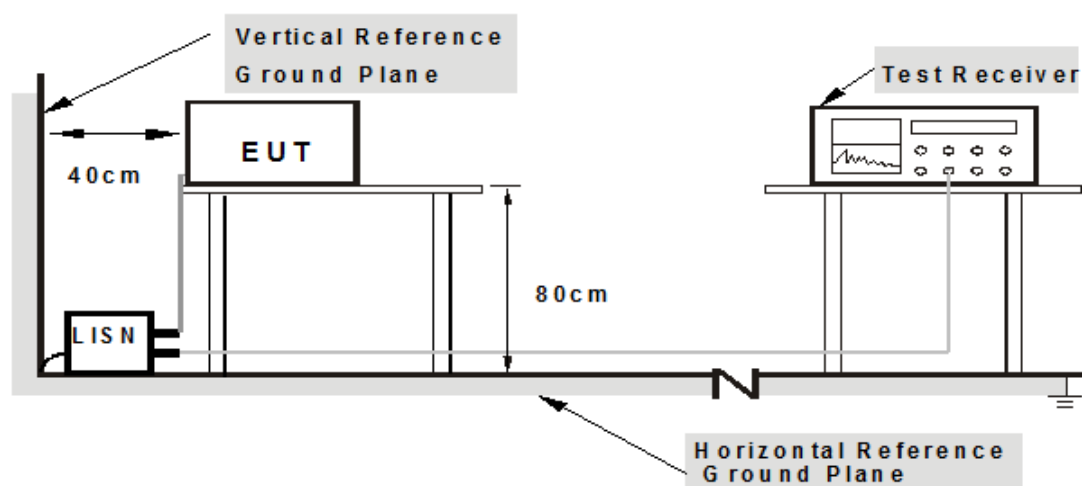

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Connect the EUT with the support unit A (Notebook Computer) which is placed on a testing table.
2. The support unit A (Notebook Computer) runs test program “Blue Tool [Ver 1.8.4.4]” to enable EUT under transmission/receiving condition continuously at specific channel frequency.


4.1.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.23984	0.07	33.01	22.75	33.08	22.82	62.10	52.10	-29.02	-29.28
2	0.32969	0.08	32.60	17.84	32.68	17.92	59.46	49.46	-26.78	-31.54
3	0.63438	0.11	22.86	11.05	22.97	11.16	56.00	46.00	-33.03	-34.84
4	2.71094	0.20	37.45	31.32	37.65	31.52	56.00	46.00	-18.35	-14.48
5	16.24219	0.62	33.95	28.48	34.57	29.10	60.00	50.00	-25.43	-20.90
6	23.54688	0.81	31.83	24.91	32.64	25.72	60.00	50.00	-27.36	-24.28

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

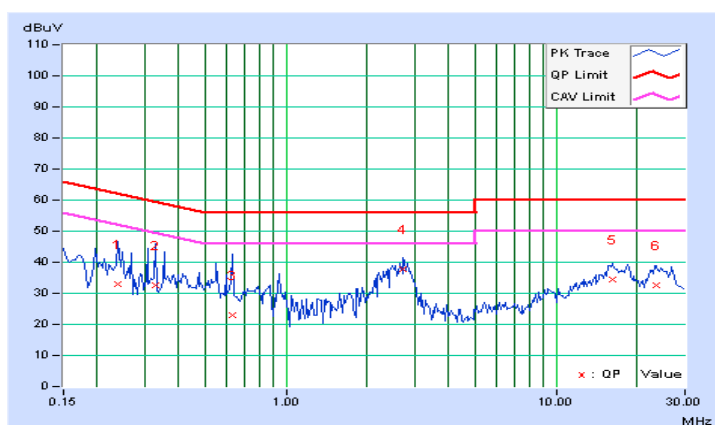




A D T

PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.21641	0.07	39.67	24.18	39.74	24.25	62.96	52.96	-23.21	-28.70
2	0.43906	0.09	32.79	26.99	32.88	27.08	57.08	47.08	-24.20	-20.00
3	0.75156	0.11	28.00	18.90	28.11	19.01	56.00	46.00	-27.89	-26.99
4	2.73438	0.21	37.22	30.41	37.43	30.62	56.00	46.00	-18.57	-15.38
5	16.75391	0.63	31.34	26.20	31.97	26.83	60.00	50.00	-28.03	-23.17
6	23.82422	0.81	28.85	22.30	29.66	23.11	60.00	50.00	-30.34	-26.89

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

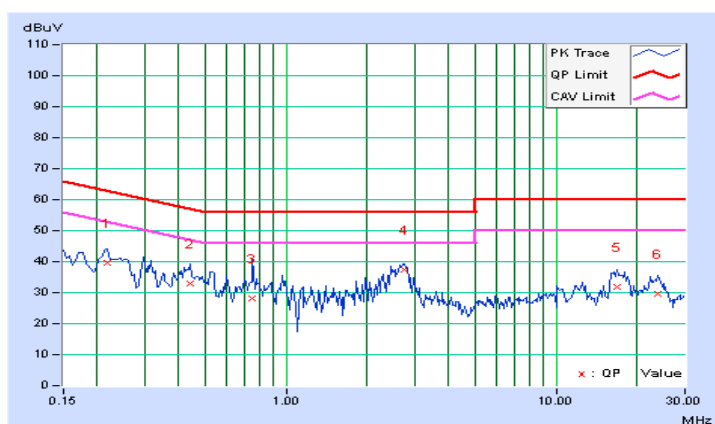

4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB.

4.2.2 TEST INSTRUMENTS

For Below 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	July 21,2014	July 20,2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 26, 2014	Feb. 25, 2015
RF Cable	NA	CHGCAB_001	Oct. 05, 2013	Oct. 04, 2014
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 18, 2013	Nov. 17, 2014
Pre-Amplifier Agilent	8449B	3008A02578	June 24, 2014	June 23, 2015
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 12, 2013	Dec. 11, 2014
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: Aug. 18, 2014



A D T

For Above 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY50010156	Jan. 15, 2014	Jan. 14, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Feb. 27, 2014	Feb. 26, 2015
RF Cable	NA	CHHCAB_001	Oct. 06, 2013	Oct. 05, 2014
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Horn_Antenna AISI	AIH.8018	0000220091110	Dec. 06, 2013	Dec. 05, 2014
Pre-Amplifier Agilent	8449B	3008A01923	Oct. 29, 2013	Oct. 28, 2014
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 12, 2013	Dec. 11, 2014
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
5. The CANADA Site Registration No. is IC 7450H-3.
6. Tested Date: Aug. 26, 2014

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 1MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

<Frequency Range below 1GHz>

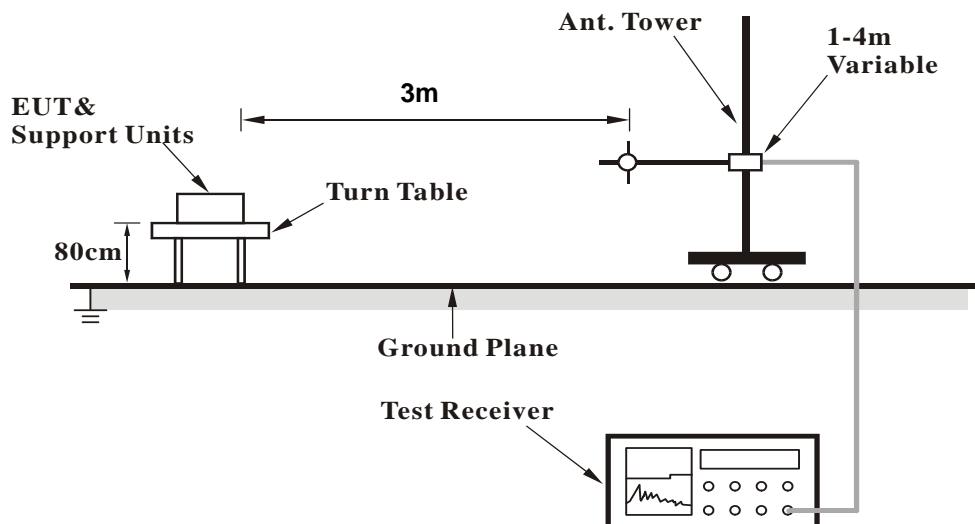

<Frequency Range above 1GHz>

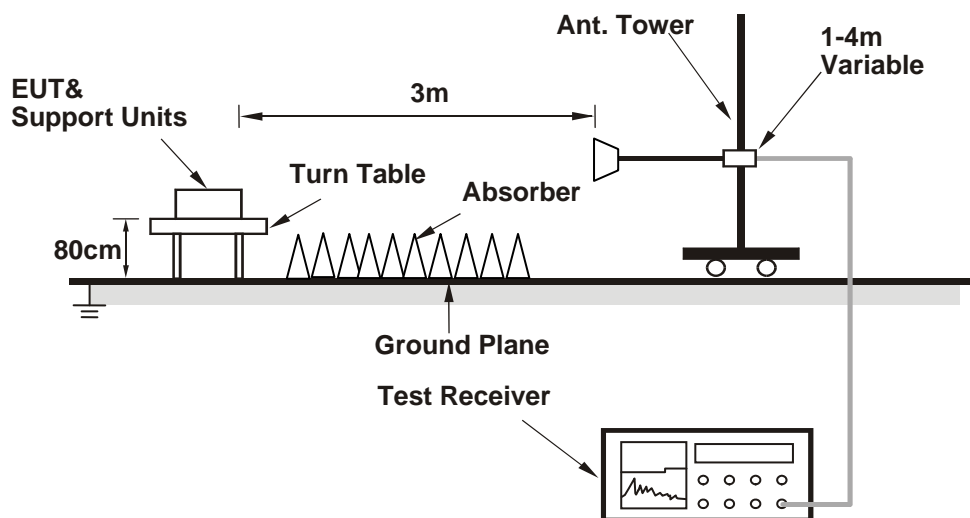

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS(MODE 1)

BELOW 1GHz WORST-CASE DATA

BT_8DPSK

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	95.96	33.6 QP	43.5	-9.9	2.00 H	279	52.19	-18.59
2	166.29	36.8 QP	43.5	-6.8	1.50 H	197	50.26	-13.51
3	240.01	36.2 QP	46.0	-9.8	1.00 H	324	50.98	-14.77
4	642.17	40.0 QP	46.0	-6.0	2.00 H	360	44.10	-4.12
5	676.02	42.8 QP	46.0	-3.2	1.00 H	340	46.66	-3.87
6	896.84	42.8 QP	46.0	-3.2	1.50 H	246	42.83	-0.02
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	118.61	31.7 QP	43.5	-11.8	1.50 V	214	47.02	-15.29
2	165.99	34.3 QP	43.5	-9.3	1.00 V	111	47.74	-13.49
3	676.36	40.9 QP	46.0	-5.1	1.50 V	293	44.73	-3.86
4	698.52	42.6 QP	46.0	-3.4	1.50 V	312	46.10	-3.54
5	719.48	40.2 QP	46.0	-5.8	1.50 V	325	43.45	-3.28
6	876.33	38.1 QP	46.0	-7.9	1.00 V	277	38.48	-0.42

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

ABOVE 1GHz DATA

BT_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	48.1 PK	74.0	-25.9	1.07 H	147	53.70	-5.60
2	2390.00	18.0 AV	54.0	-36.0	1.07 H	147	23.60	-5.60
3	*2402.00	103.0 PK			1.07 H	147	108.59	-5.59
4	*2402.00	72.9 AV			1.07 H	147	78.49	-5.59
5	4804.00	49.9 PK	74.0	-24.1	1.06 H	151	46.01	3.89
6	4804.00	19.8 AV	54.0	-34.2	1.06 H	151	15.91	3.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.8 PK	74.0	-26.2	1.16 V	140	53.40	-5.60
2	2390.00	17.7 AV	54.0	-36.3	1.16 V	140	23.30	-5.60
3	*2402.00	97.3 PK			1.15 V	302	102.89	-5.59
4	*2402.00	67.2 AV			1.15 V	302	72.79	-5.59
5	4804.00	47.2 PK	74.0	-26.8	1.05 V	89	43.31	3.89
6	4804.00	17.1 AV	54.0	-36.9	1.05 V	89	13.21	3.89

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
- Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	103.4 PK			1.04 H	132	108.80	-5.40
2	*2441.00	73.3 AV			1.04 H	132	78.70	-5.40
3	4882.00	49.4 PK	74.0	-24.6	1.03 H	126	45.60	3.80
4	4882.00	19.3 AV	54.0	-34.7	1.03 H	126	15.50	3.80
5	7323.00	53.6 PK	74.0	-20.4	1.00 H	210	45.32	8.28
6	7323.00	23.5 AV	54.0	-30.5	1.00 H	210	15.22	8.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	96.5 PK			1.16 V	139	101.90	-5.40
2	*2441.00	66.4 AV			1.16 V	139	71.80	-5.40
3	4882.00	46.8 PK	74.0	-27.2	1.08 V	91	43.00	3.80
4	4882.00	16.7 AV	54.0	-37.3	1.08 V	91	12.90	3.80
5	7323.00	53.2 PK	74.0	-20.8	1.02 V	62	44.92	8.28
6	7323.00	23.1 AV	54.0	-30.9	1.02 V	62	14.82	8.28

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	103.2 PK			1.04 H	148	108.43	-5.23
2	*2480.00	73.1 AV			1.04 H	148	78.33	-5.23
3	2483.50	47.3 PK	74.0	-26.7	1.04 H	148	52.50	-5.20
4	2483.50	17.2 AV	54.0	-36.8	1.04 H	148	22.40	-5.20
5	4960.00	49.2 PK	74.0	-24.8	1.00 H	141	45.37	3.83
6	4960.00	19.1 AV	54.0	-34.9	1.00 H	141	15.27	3.83
7	7440.00	53.6 PK	74.0	-20.4	1.00 H	215	44.92	8.68
8	7440.00	23.5 AV	54.0	-30.5	1.00 H	215	14.82	8.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	96.8 PK			1.16 V	140	102.03	-5.23
2	*2480.00	66.7 AV			1.16 V	140	71.93	-5.23
3	2483.50	46.9 PK	74.0	-27.1	1.16 V	140	52.10	-5.20
4	2483.50	16.8 AV	54.0	-37.2	1.16 V	140	22.00	-5.20
5	4960.00	47.0 PK	74.0	-27.0	1.10 V	98	43.17	3.83
6	4960.00	16.9 AV	54.0	-37.1	1.10 V	98	13.07	3.83
7	7440.00	53.4 PK	74.0	-20.6	1.00 V	67	44.72	8.68
8	7440.00	23.3 AV	54.0	-30.7	1.00 V	67	14.62	8.68

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
- Average value = peak reading + $20\log(\text{duty cycle})$.



BT_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	48.3 PK	74.0	-25.7	1.07 H	146	53.90	-5.60
2	2390.00	18.2 AV	54.0	-35.8	1.07 H	146	23.80	-5.60
3	*2402.00	102.2 PK			1.07 H	146	107.79	-5.59
4	*2402.00	72.1 AV			1.07 H	146	77.69	-5.59
5	4804.00	49.3 PK	74.0	-24.7	1.00 H	130	45.41	3.89
6	4804.00	19.2 AV	54.0	-34.8	1.00 H	130	15.31	3.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	48.1 PK	74.0	-25.9	1.16 V	139	53.70	-5.60
2	2390.00	18.0 AV	54.0	-36.0	1.16 V	139	23.60	-5.60
3	*2402.00	95.3 PK			1.16 V	139	100.89	-5.59
4	*2402.00	65.2 AV			1.16 V	139	70.79	-5.59
5	4804.00	47.2 PK	74.0	-26.8	1.09 V	94	43.31	3.89
6	4804.00	17.1 AV	54.0	-36.9	1.09 V	94	13.21	3.89

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * " : Fundamental frequency.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
- Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	102.3 PK			1.06 H	145	107.70	-5.40
2	*2441.00	72.2 AV			1.06 H	145	77.60	-5.40
3	4882.00	49.4 PK	74.0	-24.6	1.05 H	137	45.60	3.80
4	4882.00	19.3 AV	54.0	-34.7	1.05 H	137	15.50	3.80
5	7323.00	53.6 PK	74.0	-20.4	1.00 H	214	45.32	8.28
6	7323.00	23.5 AV	54.0	-30.5	1.00 H	214	15.22	8.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	94.9 PK			1.16 V	139	100.30	-5.40
2	*2441.00	64.8 AV			1.16 V	139	70.20	-5.40
3	4882.00	47.2 PK	74.0	-26.8	1.15 V	107	43.40	3.80
4	4882.00	17.1 AV	54.0	-36.9	1.15 V	107	13.30	3.80
5	7323.00	53.7 PK	74.0	-20.3	1.00 V	64	45.42	8.28
6	7323.00	23.6 AV	54.0	-30.4	1.00 V	64	15.32	8.28

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	102.3 PK			1.05 H	144	107.53	-5.23
2	*2480.00	72.2 AV			1.05 H	144	77.43	-5.23
3	2483.50	48.1 PK	74.0	-25.9	1.05 H	144	53.30	-5.20
4	2483.50	18.0 AV	54.0	-36.0	1.05 H	144	23.20	-5.20
5	4960.00	49.6 PK	74.0	-24.4	1.00 H	156	45.77	3.83
6	4960.00	19.5 AV	54.0	-34.5	1.00 H	156	15.67	3.83
7	7440.00	53.6 PK	74.0	-20.4	1.00 H	227	44.92	8.68
8	7440.00	23.5 AV	54.0	-30.5	1.00 H	227	14.82	8.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	95.6 PK			1.15 V	138	100.83	-5.23
2	*2480.00	65.5 AV			1.15 V	138	70.73	-5.23
3	2483.50	47.9 PK	74.0	-26.1	1.15 V	138	53.10	-5.20
4	2483.50	17.8 AV	54.0	-36.2	1.15 V	138	23.00	-5.20
5	4960.00	46.5 PK	74.0	-27.5	1.10 V	88	42.67	3.83
6	4960.00	16.4 AV	54.0	-37.6	1.10 V	88	12.57	3.83
7	7440.00	53.7 PK	74.0	-20.3	1.00 V	67	45.02	8.68
8	7440.00	23.6 AV	54.0	-30.4	1.00 V	67	14.92	8.68

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
- Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

4.2.8 TEST RESULTS(MODE 2)

BELOW 1GHz WORST-CASE DATA

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	96.15	34.0 QP	43.5	-9.5	2.00 H	291	52.61	-18.57
2	165.99	33.1 QP	43.5	-10.4	1.50 H	216	46.63	-13.49
3	298.74	36.0 QP	46.0	-10.0	1.00 H	221	48.42	-12.41
4	643.09	40.5 QP	46.0	-5.6	1.00 H	360	44.54	-4.09
5	669.47	42.9 QP	46.0	-3.1	1.50 H	43	46.80	-3.93
6	719.62	39.2 QP	46.0	-6.8	1.50 H	52	42.48	-3.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	166.29	35.3 QP	43.5	-8.2	1.00 V	89	48.78	-13.51
2	626.79	38.2 QP	46.0	-7.8	1.50 V	307	42.54	-4.38
3	642.89	39.0 QP	46.0	-7.0	1.50 V	314	43.12	-4.10
4	676.41	40.3 QP	46.0	-5.8	1.50 V	327	44.11	-3.86
5	697.55	41.4 QP	46.0	-4.6	1.50 V	325	44.93	-3.57
6	840.97	38.6 QP	46.0	-7.4	1.00 V	305	39.47	-0.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

ABOVE 1GHz DATA

BT_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.5 PK	74.0	-23.5	1.42 H	124	56.10	-5.60
2	2390.00	20.4 AV	54.0	-33.6	1.42 H	124	26.00	-5.60
3	*2402.00	100.2 PK			1.42 H	124	105.79	-5.59
4	*2402.00	70.1 AV			1.42 H	124	75.69	-5.59
5	4804.00	48.7 PK	74.0	-25.3	1.00 H	145	44.81	3.89
6	4804.00	18.6 AV	54.0	-35.4	1.00 H	145	14.71	3.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.5 PK	74.0	-24.5	1.32 V	257	55.10	-5.60
2	2390.00	19.4 AV	54.0	-34.6	1.32 V	257	25.00	-5.60
3	*2402.00	97.0 PK			1.32 V	257	102.59	-5.59
4	*2402.00	66.9 AV			1.32 V	257	72.49	-5.59
5	4804.00	46.5 PK	74.0	-27.5	1.04 V	100	42.61	3.89
6	4804.00	16.4 AV	54.0	-37.6	1.04 V	100	12.51	3.89

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
- Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	100.4 PK			1.43 H	125	105.80	-5.40
2	*2441.00	70.3 AV			1.43 H	125	75.70	-5.40
3	4882.00	49.5 PK	74.0	-24.5	1.02 H	149	45.70	3.80
4	4882.00	19.4 AV	54.0	-34.6	1.02 H	149	15.60	3.80
5	7323.00	53.5 PK	74.0	-20.5	1.00 H	200	45.22	8.28
6	7323.00	23.4 AV	54.0	-30.6	1.00 H	200	15.12	8.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	97.2 PK			1.31 V	250	102.60	-5.40
2	*2441.00	67.1 AV			1.31 V	250	72.50	-5.40
3	4882.00	46.4 PK	74.0	-27.6	1.00 V	102	42.60	3.80
4	4882.00	16.3 AV	54.0	-37.7	1.00 V	102	12.50	3.80
5	7323.00	52.7 PK	74.0	-21.3	1.00 V	33	44.42	8.28
6	7323.00	22.6 AV	54.0	-31.4	1.00 V	33	14.32	8.28

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	100.3 PK			1.43 H	122	105.53	-5.23
2	*2480.00	70.2 AV			1.43 H	122	75.43	-5.23
3	2483.50	50.3 PK	74.0	-23.7	1.43 H	122	55.50	-5.20
4	2483.50	20.2 AV	54.0	-33.8	1.43 H	122	25.40	-5.20
5	4960.00	49.6 PK	74.0	-24.4	1.00 H	142	45.77	3.83
6	4960.00	19.5 AV	54.0	-34.5	1.00 H	142	15.67	3.83
7	7440.00	53.7 PK	74.0	-20.3	1.00 H	209	45.02	8.68
8	7440.00	23.6 AV	54.0	-30.4	1.00 H	209	14.92	8.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	96.8 PK			1.23 V	165	102.03	-5.23
2	*2480.00	66.7 AV			1.23 V	165	71.93	-5.23
3	2483.50	49.4 PK	74.0	-24.6	1.23 V	165	54.60	-5.20
4	2483.50	19.3 AV	54.0	-34.7	1.23 V	165	24.50	-5.20
5	4960.00	46.7 PK	74.0	-27.3	1.00 V	99	42.87	3.83
6	4960.00	16.6 AV	54.0	-37.4	1.00 V	99	12.77	3.83
7	7440.00	52.4 PK	74.0	-21.6	1.00 V	38	43.72	8.68
8	7440.00	22.3 AV	54.0	-31.7	1.00 V	38	13.62	8.68

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
- Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

BT_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.2 PK	74.0	-23.8	1.44 H	110	55.80	-5.60
2	2390.00	20.1 AV	54.0	-33.9	1.44 H	110	25.70	-5.60
3	*2402.00	100.5 PK			1.44 H	110	106.09	-5.59
4	*2402.00	70.4 AV			1.44 H	110	75.99	-5.59
5	4804.00	49.4 PK	74.0	-24.6	1.00 H	126	45.51	3.89
6	4804.00	19.3 AV	54.0	-34.7	1.00 H	126	15.41	3.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.5 PK	74.0	-24.5	1.31 V	259	55.10	-5.60
2	2390.00	19.4 AV	54.0	-34.6	1.31 V	259	25.00	-5.60
3	*2402.00	97.2 PK			1.31 V	259	102.79	-5.59
4	*2402.00	67.1 AV			1.31 V	259	72.69	-5.59
5	4804.00	46.7 PK	74.0	-27.3	1.01 V	72	42.81	3.89
6	4804.00	16.6 AV	54.0	-37.4	1.01 V	72	12.71	3.89

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * " : Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	100.0 PK			1.42 H	124	105.40	-5.40
2	*2441.00	69.9 AV			1.42 H	124	75.30	-5.40
3	4882.00	49.8 PK	74.0	-24.2	1.00 H	154	46.00	3.80
4	4882.00	19.7 AV	54.0	-34.3	1.00 H	154	15.90	3.80
5	7323.00	52.5 PK	74.0	-21.5	1.00 H	218	44.22	8.28
6	7323.00	22.4 AV	54.0	-31.6	1.00 H	218	14.12	8.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	97.2 PK			1.27 V	242	102.60	-5.40
2	*2441.00	67.1 AV			1.27 V	242	72.50	-5.40
3	4882.00	46.7 PK	74.0	-27.3	1.00 V	96	42.90	3.80
4	4882.00	16.6 AV	54.0	-37.4	1.00 V	96	12.80	3.80
5	7323.00	52.4 PK	74.0	-21.6	1.04 V	25	44.12	8.28
6	7323.00	22.3 AV	54.0	-31.7	1.04 V	25	14.02	8.28

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	100.4 PK			1.37 H	115	105.63	-5.23
2	*2480.00	70.3 AV			1.37 H	115	75.53	-5.23
3	2483.50	50.4 PK	74.0	-23.6	1.37 H	115	55.60	-5.20
4	2483.50	20.3 AV	54.0	-33.7	1.37 H	115	25.50	-5.20
5	4960.00	49.1 PK	74.0	-24.9	1.00 H	125	45.27	3.83
6	4960.00	19.0 AV	54.0	-35.0	1.00 H	125	15.17	3.83
7	7440.00	53.0 PK	74.0	-21.0	1.02 H	223	44.32	8.68
8	7440.00	22.9 AV	54.0	-31.1	1.02 H	223	14.22	8.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	97.0 PK			1.36 V	255	102.23	-5.23
2	*2480.00	66.9 AV			1.36 V	255	72.13	-5.23
3	2483.50	49.6 PK	74.0	-24.4	1.36 V	255	54.80	-5.20
4	2483.50	19.5 AV	54.0	-34.5	1.36 V	255	24.70	-5.20
5	4960.00	46.7 PK	74.0	-27.3	1.05 V	77	42.87	3.83
6	4960.00	16.6 AV	54.0	-37.4	1.05 V	77	12.77	3.83
7	7440.00	52.6 PK	74.0	-21.4	1.00 V	31	43.92	8.68
8	7440.00	22.5 AV	54.0	-31.5	1.00 V	31	13.82	8.68

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. Average value = peak reading + $20\log(\text{duty cycle})$.

4.2.9 TEST RESULTS(MODE 3)

BELOW 1GHz WORST-CASE DATA

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	96.15	34.6 QP	43.5	-9.0	2.00 H	296	53.12	-18.57
2	166.29	33.3 QP	43.5	-10.2	1.50 H	0	46.84	-13.51
3	299.32	36.3 QP	46.0	-9.7	1.00 H	222	48.69	-12.39
4	432.02	35.4 QP	46.0	-10.6	1.50 H	311	43.99	-8.61
5	674.66	40.1 QP	46.0	-5.9	1.00 H	360	43.94	-3.86
6	768.36	40.4 QP	46.0	-5.6	1.00 H	360	42.09	-1.65
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	96.11	32.0 QP	43.5	-11.5	2.00 V	0	50.54	-18.57
2	165.99	34.1 QP	43.5	-9.4	1.00 V	86	47.63	-13.49
3	668.65	38.5 QP	46.0	-7.5	1.50 V	341	42.46	-3.95
4	697.94	38.4 QP	46.0	-7.6	1.50 V	311	41.95	-3.57
5	824.38	42.3 QP	46.0	-3.7	1.00 V	295	43.35	-1.02
6	898.39	38.8 QP	46.0	-7.2	1.00 V	281	38.75	0.03

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

ABOVE 1GHz DATA

BT_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.5 PK	74.0	-23.5	1.42 H	124	56.10	-5.60
2	2390.00	20.4 AV	54.0	-33.6	1.42 H	124	26.00	-5.60
3	*2402.00	100.2 PK			1.42 H	124	105.79	-5.59
4	*2402.00	70.1 AV			1.42 H	124	75.69	-5.59
5	4804.00	48.7 PK	74.0	-25.3	1.00 H	145	44.81	3.89
6	4804.00	18.6 AV	54.0	-35.4	1.00 H	145	14.71	3.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.5 PK	74.0	-24.5	1.32 V	257	55.10	-5.60
2	2390.00	19.4 AV	54.0	-34.6	1.32 V	257	25.00	-5.60
3	*2402.00	97.0 PK			1.32 V	257	102.59	-5.59
4	*2402.00	66.9 AV			1.32 V	257	72.49	-5.59
5	4804.00	46.5 PK	74.0	-27.5	1.04 V	100	42.61	3.89
6	4804.00	16.4 AV	54.0	-37.6	1.04 V	100	12.51	3.89

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
- Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	100.4 PK			1.43 H	125	105.80	-5.40
2	*2441.00	70.3 AV			1.43 H	125	75.70	-5.40
3	4882.00	49.5 PK	74.0	-24.5	1.02 H	149	45.70	3.80
4	4882.00	19.4 AV	54.0	-34.6	1.02 H	149	15.60	3.80
5	7323.00	53.5 PK	74.0	-20.5	1.00 H	200	45.22	8.28
6	7323.00	23.4 AV	54.0	-30.6	1.00 H	200	15.12	8.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	97.2 PK			1.31 V	250	102.60	-5.40
2	*2441.00	67.1 AV			1.31 V	250	72.50	-5.40
3	4882.00	46.4 PK	74.0	-27.6	1.00 V	102	42.60	3.80
4	4882.00	16.3 AV	54.0	-37.7	1.00 V	102	12.50	3.80
5	7323.00	52.7 PK	74.0	-21.3	1.00 V	33	44.42	8.28
6	7323.00	22.6 AV	54.0	-31.4	1.00 V	33	14.32	8.28

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	100.3 PK			1.43 H	122	105.53	-5.23
2	*2480.00	70.2 AV			1.43 H	122	75.43	-5.23
3	2483.50	50.3 PK	74.0	-23.7	1.43 H	122	55.50	-5.20
4	2483.50	20.2 AV	54.0	-33.8	1.43 H	122	25.40	-5.20
5	4960.00	49.6 PK	74.0	-24.4	1.00 H	142	45.77	3.83
6	4960.00	19.5 AV	54.0	-34.5	1.00 H	142	15.67	3.83
7	7440.00	53.7 PK	74.0	-20.3	1.00 H	209	45.02	8.68
8	7440.00	23.6 AV	54.0	-30.4	1.00 H	209	14.92	8.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	96.8 PK			1.23 V	165	102.03	-5.23
2	*2480.00	66.7 AV			1.23 V	165	71.93	-5.23
3	2483.50	49.4 PK	74.0	-24.6	1.23 V	165	54.60	-5.20
4	2483.50	19.3 AV	54.0	-34.7	1.23 V	165	24.50	-5.20
5	4960.00	46.7 PK	74.0	-27.3	1.00 V	99	42.87	3.83
6	4960.00	16.6 AV	54.0	-37.4	1.00 V	99	12.77	3.83
7	7440.00	52.4 PK	74.0	-21.6	1.00 V	38	43.72	8.68
8	7440.00	22.3 AV	54.0	-31.7	1.00 V	38	13.62	8.68

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
- Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

BT_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.2 PK	74.0	-23.8	1.44 H	110	55.80	-5.60
2	2390.00	20.1 AV	54.0	-33.9	1.44 H	110	25.70	-5.60
3	*2402.00	100.5 PK			1.44 H	110	106.09	-5.59
4	*2402.00	70.4 AV			1.44 H	110	75.99	-5.59
5	4804.00	49.4 PK	74.0	-24.6	1.00 H	126	45.51	3.89
6	4804.00	19.3 AV	54.0	-34.7	1.00 H	126	15.41	3.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.5 PK	74.0	-24.5	1.31 V	259	55.10	-5.60
2	2390.00	19.4 AV	54.0	-34.6	1.31 V	259	25.00	-5.60
3	*2402.00	97.2 PK			1.31 V	259	102.79	-5.59
4	*2402.00	67.1 AV			1.31 V	259	72.69	-5.59
5	4804.00	46.7 PK	74.0	-27.3	1.01 V	72	42.81	3.89
6	4804.00	16.6 AV	54.0	-37.4	1.01 V	72	12.71	3.89

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * " : Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	100.0 PK			1.42 H	124	105.40	-5.40
2	*2441.00	69.9 AV			1.42 H	124	75.30	-5.40
3	4882.00	49.8 PK	74.0	-24.2	1.00 H	154	46.00	3.80
4	4882.00	19.7 AV	54.0	-34.3	1.00 H	154	15.90	3.80
5	7323.00	52.5 PK	74.0	-21.5	1.00 H	218	44.22	8.28
6	7323.00	22.4 AV	54.0	-31.6	1.00 H	218	14.12	8.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	97.2 PK			1.27 V	242	102.60	-5.40
2	*2441.00	67.1 AV			1.27 V	242	72.50	-5.40
3	4882.00	46.7 PK	74.0	-27.3	1.00 V	96	42.90	3.80
4	4882.00	16.6 AV	54.0	-37.4	1.00 V	96	12.80	3.80
5	7323.00	52.4 PK	74.0	-21.6	1.04 V	25	44.12	8.28
6	7323.00	22.3 AV	54.0	-31.7	1.04 V	25	14.02	8.28

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	100.4 PK			1.37 H	115	105.63	-5.23
2	*2480.00	70.3 AV			1.37 H	115	75.53	-5.23
3	2483.50	50.4 PK	74.0	-23.6	1.37 H	115	55.60	-5.20
4	2483.50	20.3 AV	54.0	-33.7	1.37 H	115	25.50	-5.20
5	4960.00	49.1 PK	74.0	-24.9	1.00 H	125	45.27	3.83
6	4960.00	19.0 AV	54.0	-35.0	1.00 H	125	15.17	3.83
7	7440.00	53.0 PK	74.0	-21.0	1.02 H	223	44.32	8.68
8	7440.00	22.9 AV	54.0	-31.1	1.02 H	223	14.22	8.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	97.0 PK			1.36 V	255	102.23	-5.23
2	*2480.00	66.9 AV			1.36 V	255	72.13	-5.23
3	2483.50	49.6 PK	74.0	-24.4	1.36 V	255	54.80	-5.20
4	2483.50	19.5 AV	54.0	-34.5	1.36 V	255	24.70	-5.20
5	4960.00	46.7 PK	74.0	-27.3	1.05 V	77	42.87	3.83
6	4960.00	16.6 AV	54.0	-37.4	1.05 V	77	12.77	3.83
7	7440.00	52.6 PK	74.0	-21.4	1.00 V	31	43.92	8.68
8	7440.00	22.5 AV	54.0	-31.5	1.00 V	31	13.82	8.68

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. Average value = peak reading + $20\log(\text{duty cycle})$.

4.2.10 TEST RESULTS(MODE 4)

BELOW 1GHz WORST-CASE DATA

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.99	32.0 QP	40.0	-8.0	2.00 H	302	45.50	-13.46
2	95.96	34.8 QP	43.5	-8.7	2.00 H	285	53.38	-18.59
3	166.29	35.2 QP	43.5	-8.3	1.50 H	195	48.69	-13.51
4	239.96	38.9 QP	46.0	-7.1	1.00 H	327	53.67	-14.77
5	669.81	41.7 QP	46.0	-4.3	1.50 H	360	45.58	-3.92
6	719.67	39.7 QP	46.0	-6.3	1.50 H	0	42.96	-3.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	136.43	40.3 QP	43.5	-3.2	1.15 V	334	54.21	-13.90
2	162.70	32.9 QP	43.5	-10.6	1.00 V	226	46.25	-13.37
3	642.17	40.3 QP	46.0	-5.7	1.50 V	294	44.43	-4.12
4	675.92	39.8 QP	46.0	-6.3	1.50 V	311	43.62	-3.87
5	840.63	38.6 QP	46.0	-7.4	1.00 V	283	39.53	-0.90
6	895.58	40.9 QP	46.0	-5.1	1.50 V	14	41.00	-0.07

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

ABOVE 1GHz DATA

BT_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.0 PK	74.0	-29.0	1.00 H	326	50.60	-5.60
2	2390.00	14.9 AV	54.0	-39.1	1.00 H	326	20.50	-5.60
3	*2402.00	88.7 PK			1.00 H	326	94.29	-5.59
4	*2402.00	58.6 AV			1.00 H	326	64.19	-5.59
5	4804.00	46.8 PK	74.0	-27.2	1.00 H	134	42.91	3.89
6	4804.00	16.7 AV	54.0	-37.3	1.00 H	134	12.81	3.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.9 PK	74.0	-23.1	1.07 V	244	56.50	-5.60
2	2390.00	20.8 AV	54.0	-33.2	1.07 V	244	26.40	-5.60
3	*2402.00	104.3 PK			1.07 V	244	109.89	-5.59
4	*2402.00	74.2 AV			1.07 V	244	79.79	-5.59
5	4804.00	48.9 PK	74.0	-25.1	1.07 V	68	45.01	3.89
6	4804.00	18.8 AV	54.0	-35.2	1.07 V	68	14.91	3.89

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
- Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	88.7 PK			1.00 H	311	94.10	-5.40
2	*2441.00	58.6 AV			1.00 H	311	64.00	-5.40
3	4882.00	46.8 PK	74.0	-27.2	1.00 H	134	43.00	3.80
4	4882.00	16.7 AV	54.0	-37.3	1.00 H	134	12.90	3.80
5	7323.00	52.6 PK	74.0	-21.4	1.00 H	217	44.32	8.28
6	7323.00	22.5 AV	54.0	-31.5	1.00 H	217	14.22	8.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	103.8 PK			1.12 V	244	109.20	-5.40
2	*2441.00	73.7 AV			1.12 V	244	79.10	-5.40
3	4882.00	49.3 PK	74.0	-24.7	1.06 V	77	45.50	3.80
4	4882.00	19.2 AV	54.0	-34.8	1.06 V	77	15.40	3.80
5	7323.00	54.3 PK	74.0	-19.7	1.02 V	63	46.02	8.28
6	7323.00	24.2 AV	54.0	-29.8	1.02 V	63	15.92	8.28

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	89.0 PK			1.04 H	322	94.23	-5.23
2	*2480.00	58.9 AV			1.04 H	322	64.13	-5.23
3	2483.50	44.7 PK	74.0	-29.3	1.04 H	322	49.90	-5.20
4	2483.50	14.6 AV	54.0	-39.4	1.04 H	322	19.80	-5.20
5	4960.00	46.4 PK	74.0	-27.6	1.00 H	134	42.57	3.83
6	4960.00	16.3 AV	54.0	-37.7	1.00 H	134	12.47	3.83
7	7440.00	53.3 PK	74.0	-20.7	1.00 H	208	44.62	8.68
8	7440.00	23.2 AV	54.0	-30.8	1.00 H	208	14.52	8.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	104.1 PK			1.06 V	246	109.33	-5.23
2	*2480.00	74.0 AV			1.06 V	246	79.23	-5.23
3	2483.50	48.8 PK	74.0	-25.2	1.06 V	246	54.00	-5.20
4	2483.50	18.7 AV	54.0	-35.3	1.06 V	246	23.90	-5.20
5	4960.00	49.2 PK	74.0	-24.8	1.00 V	97	45.37	3.83
6	4960.00	19.1 AV	54.0	-34.9	1.00 V	97	15.27	3.83
7	7440.00	53.6 PK	74.0	-20.4	1.00 V	74	44.92	8.68
8	7440.00	23.5 AV	54.0	-30.5	1.00 V	74	14.82	8.68

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

BT_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.1 PK	74.0	-28.9	1.00 H	317	50.70	-5.60
2	2390.00	15.0 AV	54.0	-39.0	1.00 H	317	20.60	-5.60
3	*2402.00	88.5 PK			1.00 H	317	94.09	-5.59
4	*2402.00	58.4 AV			1.00 H	317	63.99	-5.59
5	4804.00	46.9 PK	74.0	-27.1	1.00 H	165	43.01	3.89
6	4804.00	16.8 AV	54.0	-37.2	1.00 H	165	12.91	3.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	48.5 PK	74.0	-25.5	1.04 V	233	54.10	-5.60
2	2390.00	18.4 AV	54.0	-35.6	1.04 V	233	24.00	-5.60
3	*2402.00	103.9 PK			1.04 V	233	109.49	-5.59
4	*2402.00	73.8 AV			1.04 V	233	79.39	-5.59
5	4804.00	48.8 PK	74.0	-25.2	1.01 V	91	44.91	3.89
6	4804.00	18.7 AV	54.0	-35.3	1.01 V	91	14.81	3.89

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * " : Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	88.7 PK			1.00 H	319	94.10	-5.40
2	*2441.00	58.6 AV			1.00 H	319	64.00	-5.40
3	4882.00	46.9 PK	74.0	-27.1	1.00 H	155	43.10	3.80
4	4882.00	16.8 AV	54.0	-37.2	1.00 H	155	13.00	3.80
5	7323.00	53.6 PK	74.0	-20.4	1.03 H	187	45.32	8.28
6	7323.00	23.5 AV	54.0	-30.5	1.03 H	187	15.22	8.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	103.7 PK			1.08 V	231	109.10	-5.40
2	*2441.00	73.6 AV			1.08 V	231	79.00	-5.40
3	4882.00	49.0 PK	74.0	-25.0	1.00 V	96	45.20	3.80
4	4882.00	18.9 AV	54.0	-35.1	1.00 V	96	15.10	3.80
5	7323.00	53.5 PK	74.0	-20.5	1.05 V	78	45.22	8.28
6	7323.00	23.4 AV	54.0	-30.6	1.05 V	78	15.12	8.28

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	89.0 PK			1.06 H	328	94.23	-5.23
2	*2480.00	58.9 AV			1.06 H	328	64.13	-5.23
3	2483.50	45.1 PK	74.0	-28.9	1.06 H	328	50.30	-5.20
4	2483.50	15.0 AV	54.0	-39.0	1.06 H	328	20.20	-5.20
5	4960.00	46.3 PK	74.0	-27.7	1.00 H	156	42.47	3.83
6	4960.00	16.2 AV	54.0	-37.8	1.00 H	156	12.37	3.83
7	7440.00	53.2 PK	74.0	-20.8	1.02 H	206	44.52	8.68
8	7440.00	23.1 AV	54.0	-30.9	1.02 H	206	14.42	8.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	103.7 PK			1.06 V	242	108.93	-5.23
2	*2480.00	73.6 AV			1.06 V	242	78.83	-5.23
3	2483.50	47.9 PK	74.0	-26.1	1.06 V	242	53.10	-5.20
4	2483.50	17.8 AV	54.0	-36.2	1.06 V	242	23.00	-5.20
5	4960.00	49.2 PK	74.0	-24.8	1.05 V	97	45.37	3.83
6	4960.00	19.1 AV	54.0	-34.9	1.05 V	97	15.27	3.83
7	7440.00	53.5 PK	74.0	-20.5	1.08 V	78	44.82	8.68
8	7440.00	23.4 AV	54.0	-30.6	1.08 V	78	14.72	8.68

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
- Average value = peak reading + $20\log(\text{duty cycle})$.

4.3 NUMBER OF HOPPING FREQUENCY USED

4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 hopping frequencies, and should be equally spaced.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 26, 2014


4.3.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD


No deviation

4.3.5 TEST SETUP



4.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer the test result. On the plots, it shows that the hopping frequencies are equally spaced.

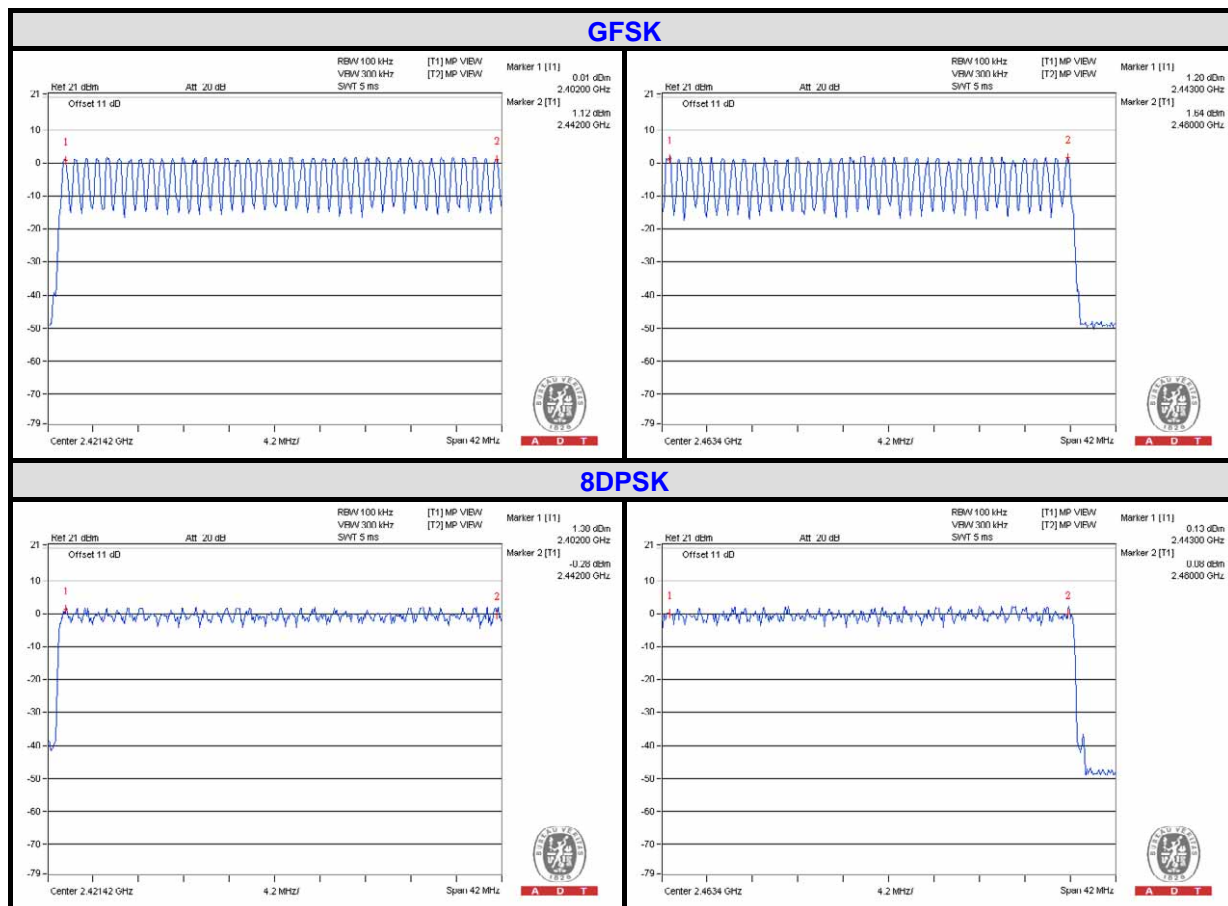

4.4 DWELL TIME ON EACH CHANNEL

4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 26, 2014

4.4.3 TEST PROCEDURES


- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.



4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP





4.4.6 TEST RESULTS

For GFSK:



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) *6.32=316 times	0.492	155.47	400
DH3	26 (times / 5 sec) *6.32=164.32 times	1.73	284.27	400
DH5	17 (times / 5 sec) *6.32=107.44 times	3.12	335.21	400

NOTE: Test plots of the transmitting time slot are shown on next page.





A D T



DH1

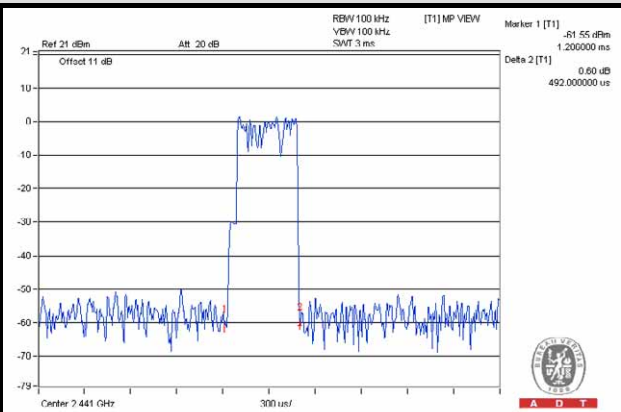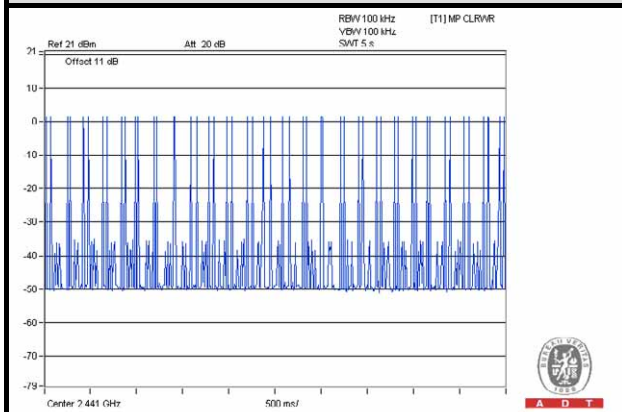

DH3

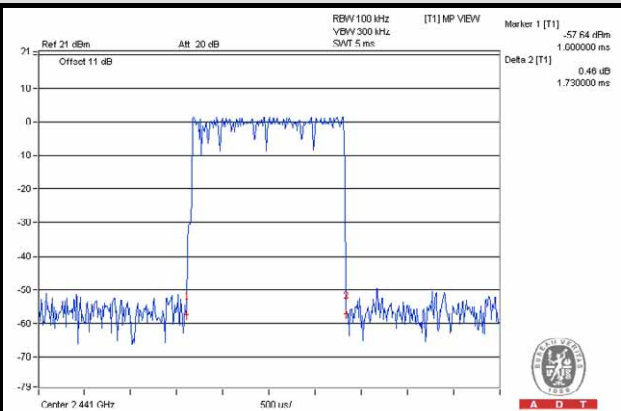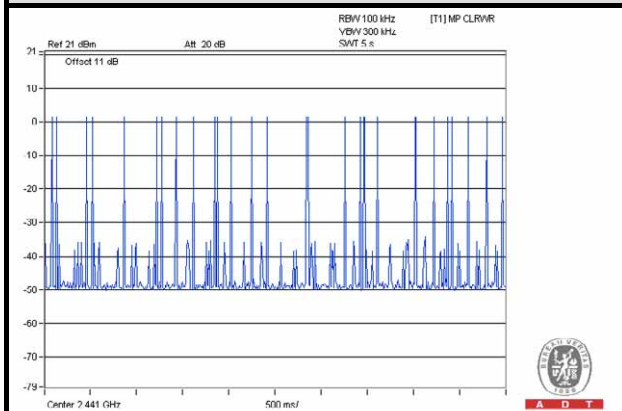

DH5

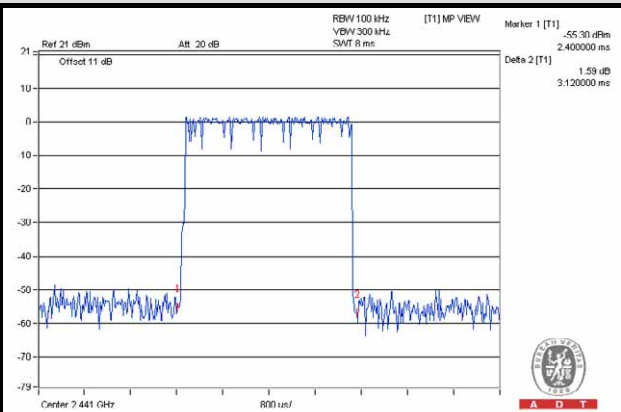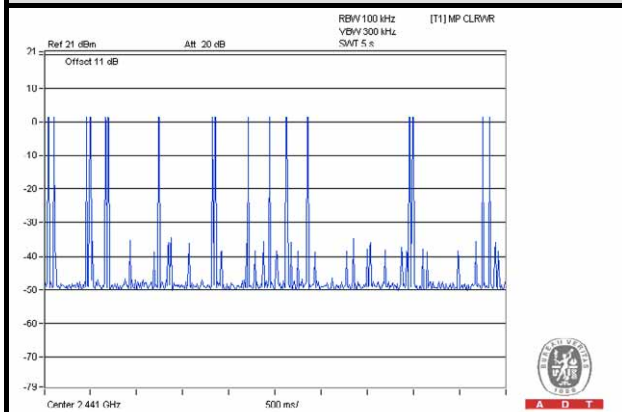



A D T

For 8DPSK:



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
3DH1	51 times / 5 sec) *6.32=322.32 times	0.48	154.71	400
3DH3	25 (times / 5 sec) *6.32=158 times	1.75	276.5	400
3DH5	17 (times / 5 sec) *6.32=107.44 times	3.024	324.9	400

NOTE: Test plots of the transmitting time slot are shown on next page.





A D T



3DH1

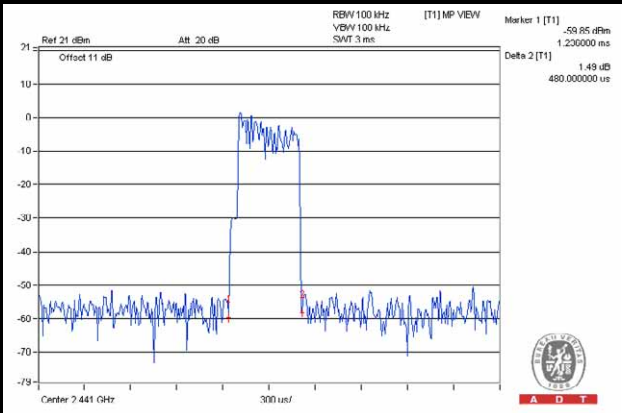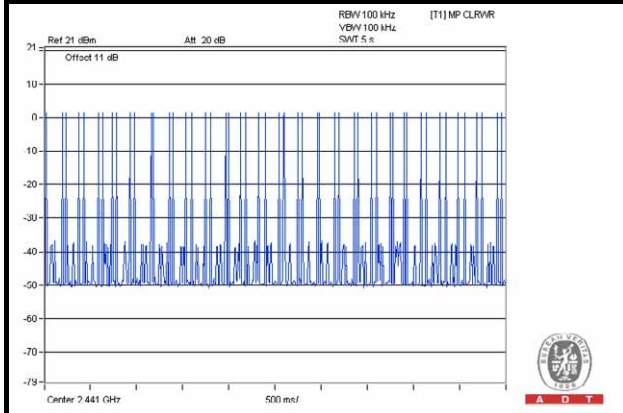

3DH3

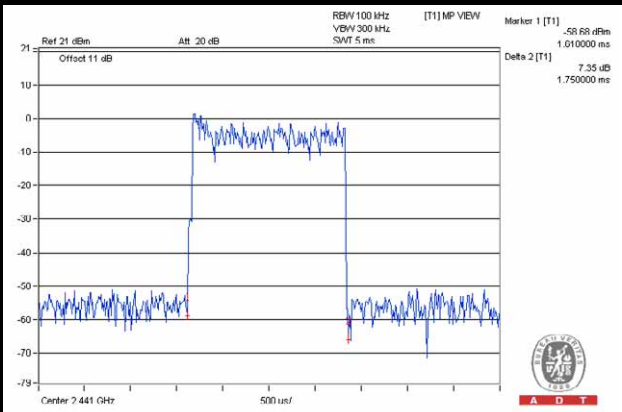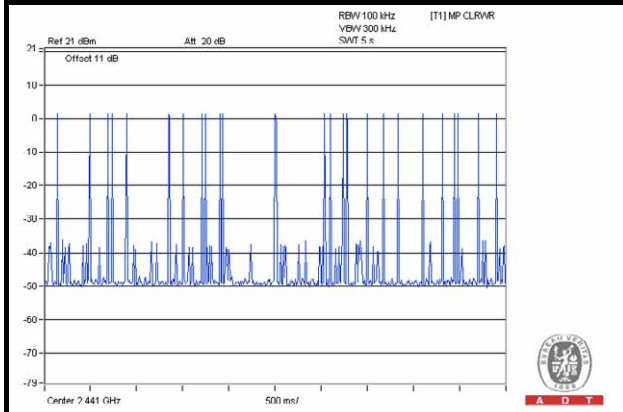

3DH5

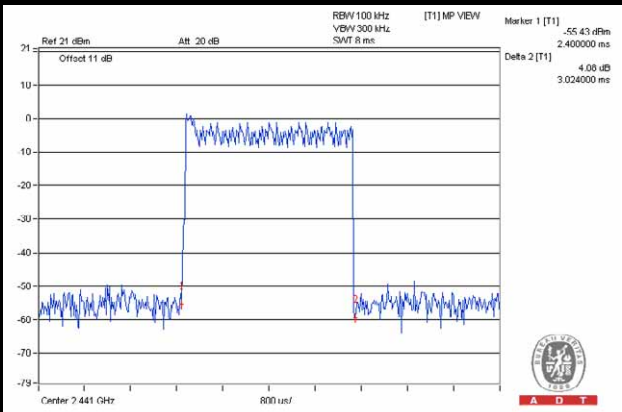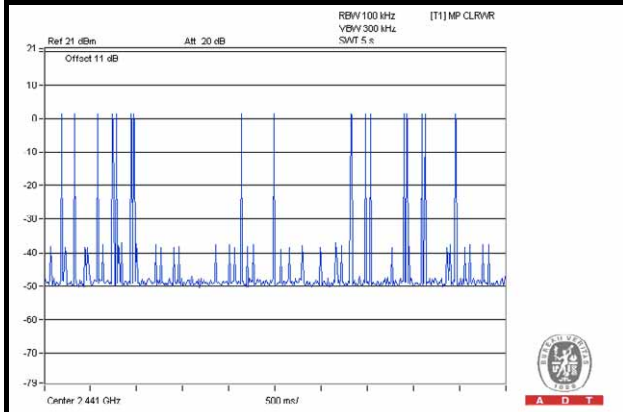

4.5 CHANNEL BANDWIDTH

4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 26, 2014


4.5.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



A D T

4.5.7 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	
		GFSK	8DPSK
0	2402	0.93	1.30
39	2441	0.93	1.30
78	2480	0.93	1.30

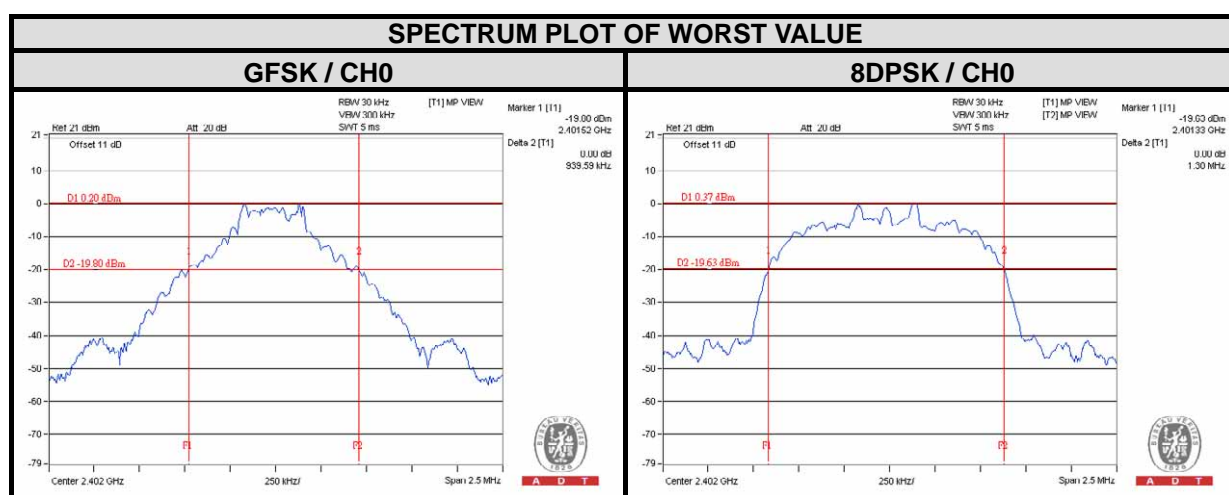

4.6 HOPPING CHANNEL SEPARATION

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25 kHz or two-thirds of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 26, 2014


4.6.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- c. By using the MaxHold function record the separation of two adjacent channels.
- d. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP






A D T

4.6.6 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)		20dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)		PASS / FAIL
		GFSK	8DPSK	GFSK	8DPSK	GFSK	8DPSK	
0	2402	1.00	1.00	0.93	1.30	0.62	0.87	PASS
39	2441	1.01	1.00	0.93	1.30	0.62	0.87	PASS
78	2480	1.00	1.01	0.93	1.30	0.62	0.87	PASS

NOTE: The minimum limit is two-third 20dB bandwidth.

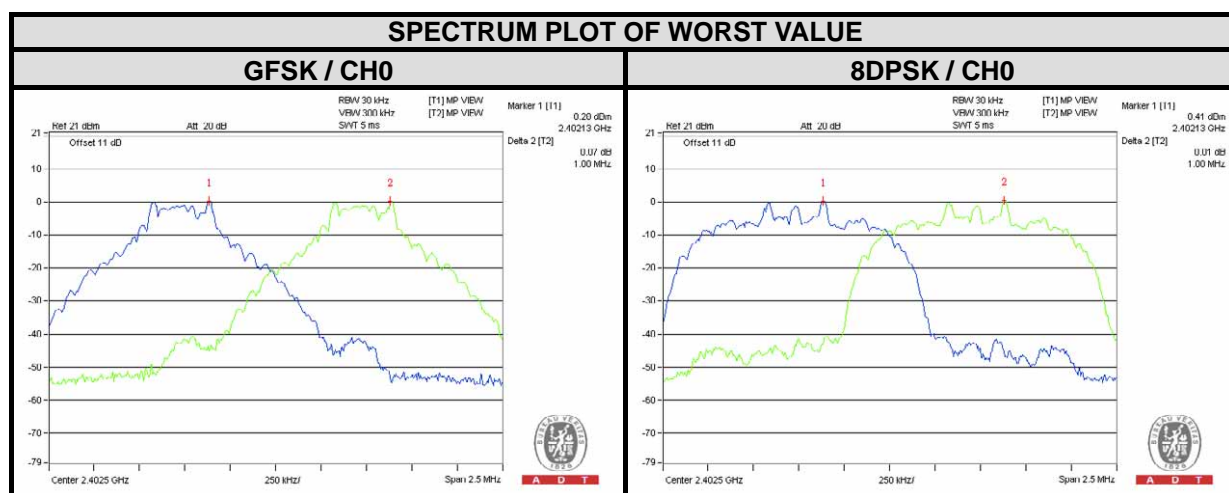

4.7 MAXIMUM PEAK OUTPUT POWER

4.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Limit is 125mW.

4.7.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 26, 2014


4.7.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.7.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



A D T

4.7.7 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	OUTPUT POWER (mW)		OUTPUT POWER (dBm)		POWER LIMIT (mW)	PASS / FAIL
		GFSK	8DPSK	GFSK	8DPSK		
0	2402	1.766	3.404	2.47	5.32	125	PASS
39	2441	1.919	3.733	2.83	5.72	125	PASS
78	2480	1.991	3.864	2.99	5.87	125	PASS

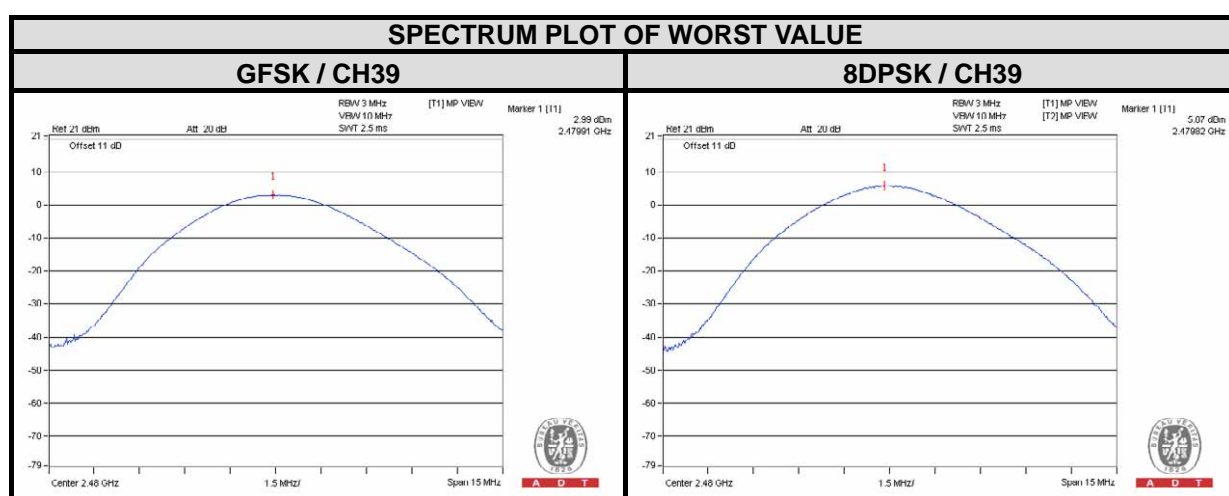

4.8 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.8.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 26, 2014


4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set RBW a of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation

4.8.5 TEST SETUP



4.8.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.7 TEST RESULTS



The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.





A D T

GFSK



Hopping disabled_Low Channel

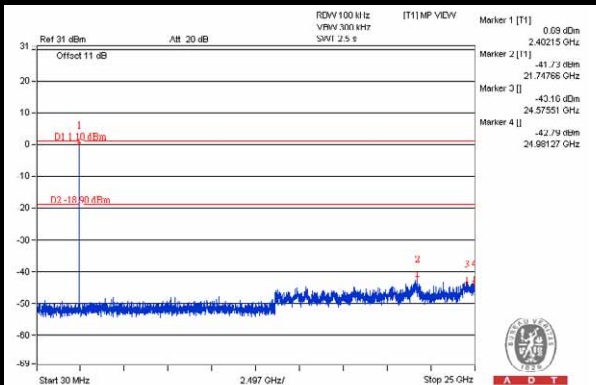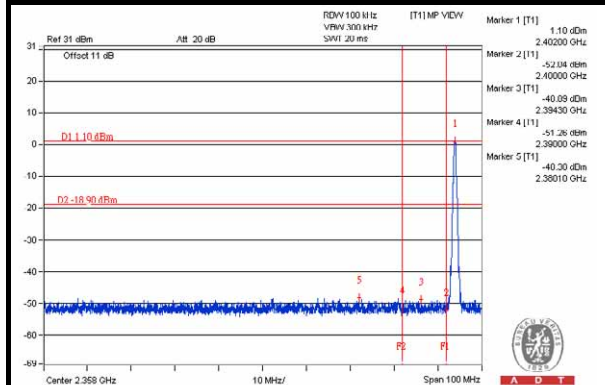



Hopping disabled_High Channel

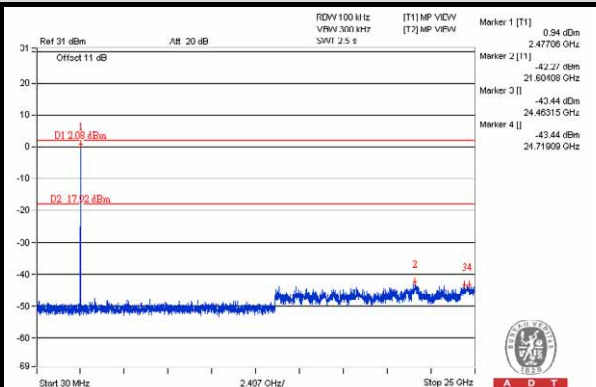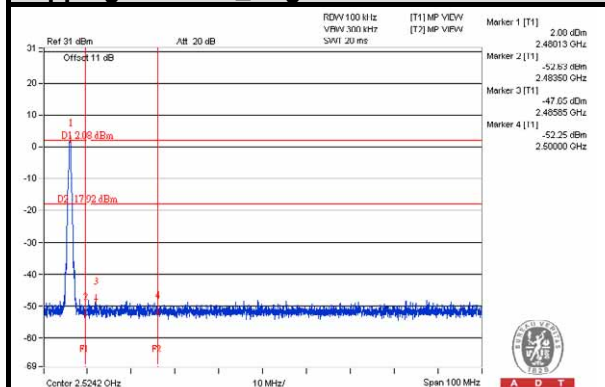

Hopping enabled_Low Channel

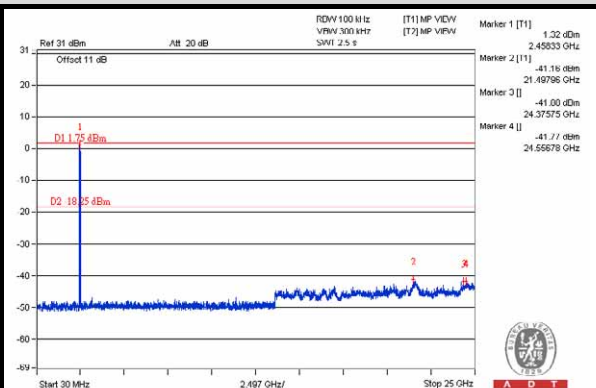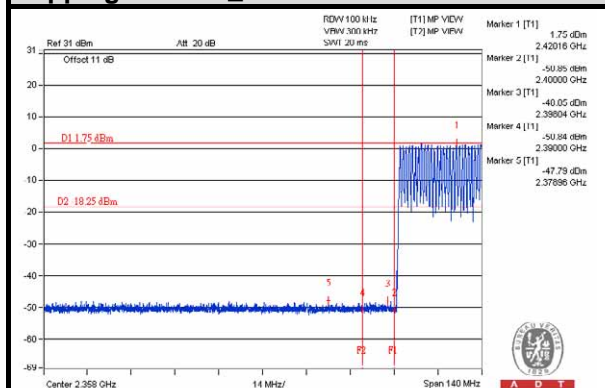

Hopping enabled_High Channel

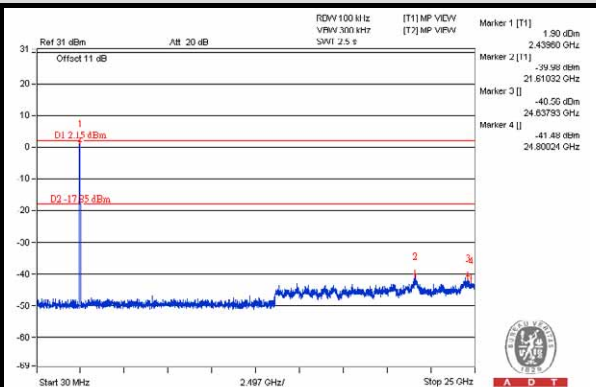
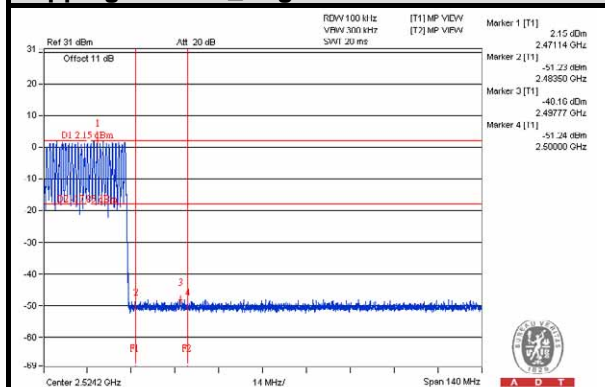






A D T

8DPSK



Hopping disabled_Low Channel

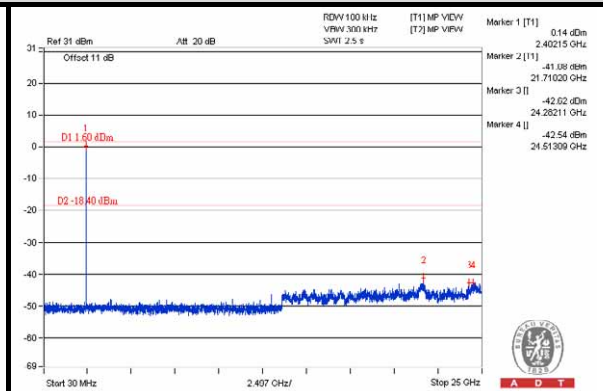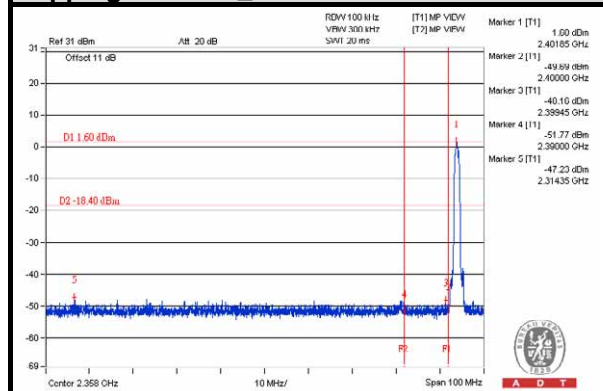



Hopping disabled_High Channel

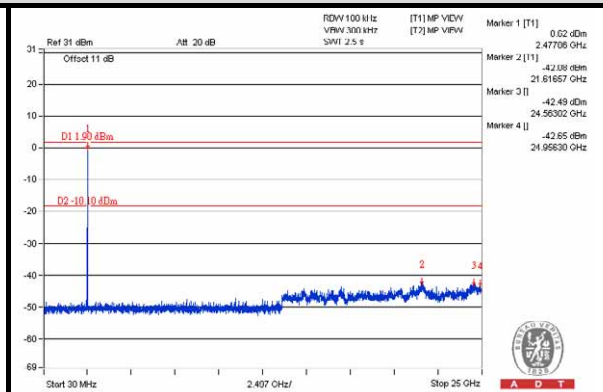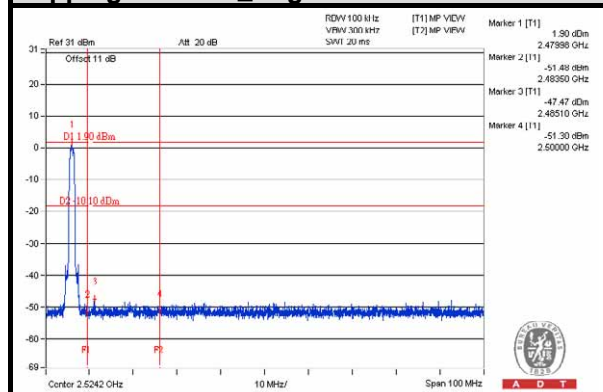

Hopping enabled_Low Channel

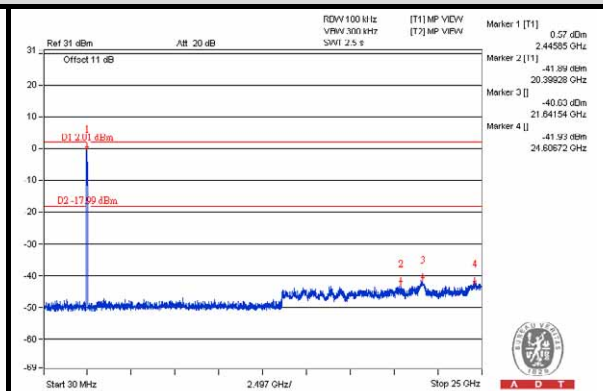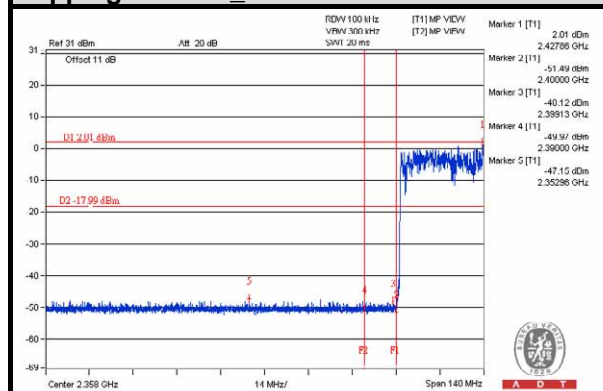

Hopping enabled_High Channel

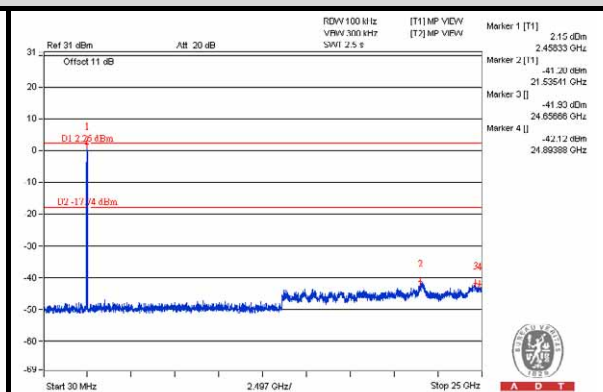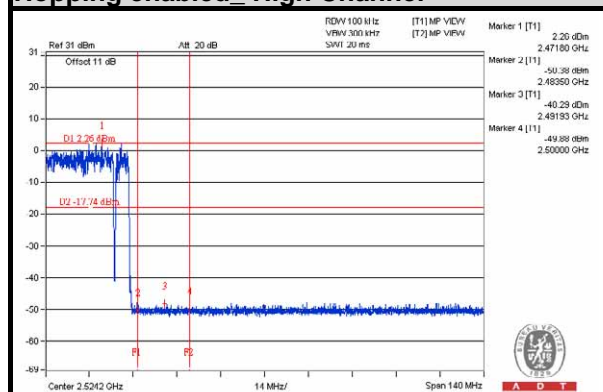

5 TEST TYPES AND RESULTS (BT-LE)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100375	Apr. 29, 2014	Apr. 28, 2015
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 12, 2013	Sep. 11, 2014
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100071	Nov. 13, 2013	Nov. 12, 2014
RF Cable (JYEBAO)	5DFB	COCCAB-001	Mar. 10, 2014	Mar. 09, 2015
50 ohms Terminator	N/A	EMC-03	Sep. 24, 2013	Sep. 23, 2014
50 ohms Terminator	N/A	EMC-02	Oct. 01, 2013	Sep. 30, 2014
Software ADT	BV ADT_Cond_V7.3.7. 3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Aug. 11, 2014

5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


NOTE:

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

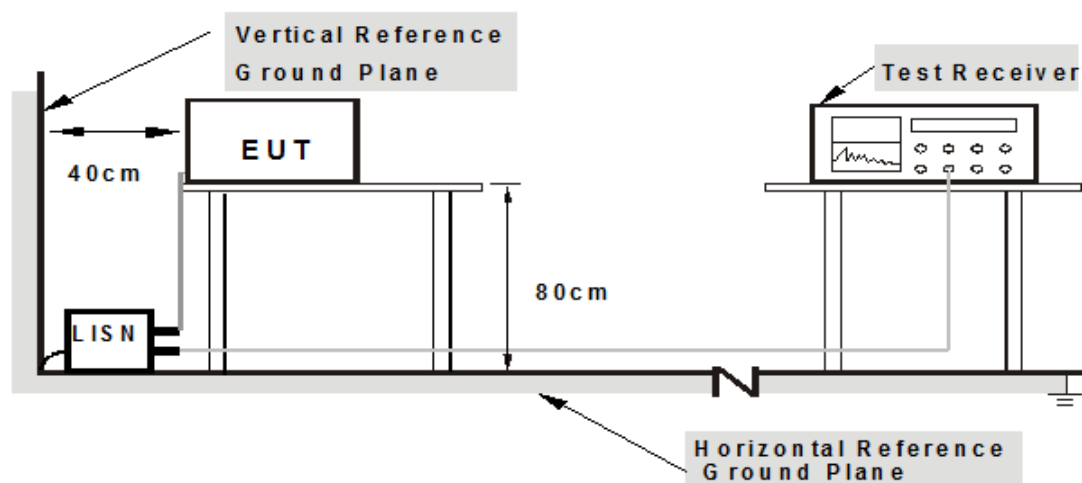

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.1.6 EUT OPERATING CONDITIONS

Same 4.1.6


5.1.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	----------	--------------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16953	0.07	41.62	37.28	41.69	37.35	64.98	54.98	-23.30	-17.64
2	0.22422	0.07	33.83	19.10	33.90	19.17	62.66	52.66	-28.76	-33.49
3	0.42734	0.09	31.26	17.13	31.35	17.22	57.30	47.30	-25.95	-30.08
4	2.72266	0.20	37.89	31.44	38.09	31.64	56.00	46.00	-17.91	-14.36
5	18.10156	0.66	33.75	28.54	34.41	29.20	60.00	50.00	-25.59	-20.80
6	24.37500	0.83	33.65	24.96	34.48	25.79	60.00	50.00	-25.52	-24.21

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

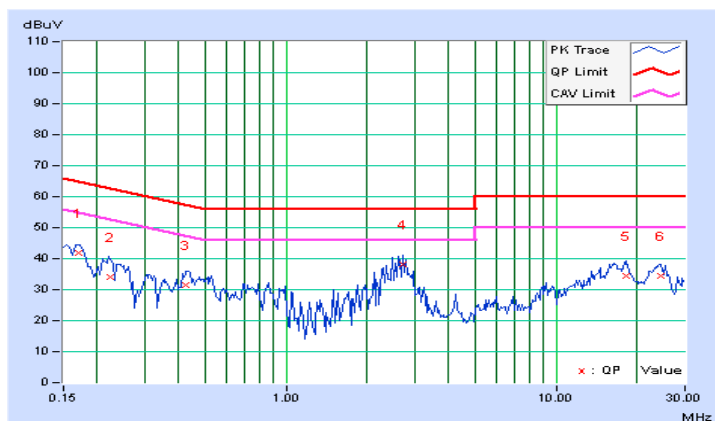




A D T

PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.21641	0.07	39.67	24.18	39.74	24.25	62.96	52.96	-23.21	-28.70
2	0.43906	0.09	32.79	26.99	32.88	27.08	57.08	47.08	-24.20	-20.00
3	0.75156	0.11	28.00	18.90	28.11	19.01	56.00	46.00	-27.89	-26.99
4	2.73438	0.21	37.22	30.41	37.43	30.62	56.00	46.00	-18.57	-15.38
5	16.75391	0.63	31.34	26.20	31.97	26.83	60.00	50.00	-28.03	-23.17
6	23.82422	0.81	28.85	22.30	29.66	23.11	60.00	50.00	-30.34	-26.89

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

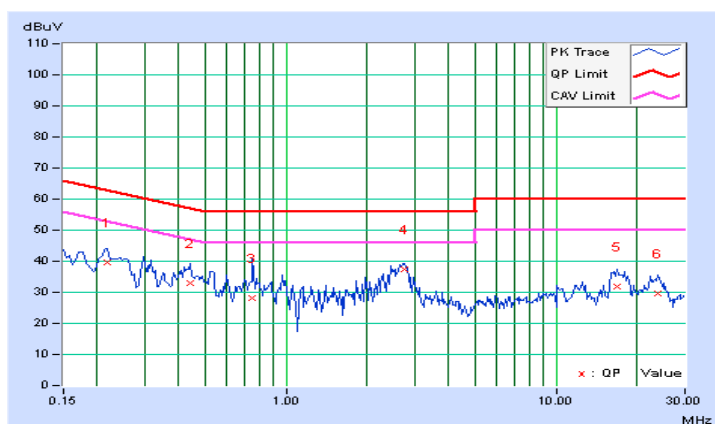

5.2 RADIATED EMISSION AND BANDEGE MEASUREMENT

5.2.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB.



A D T

5.2.2 TEST INSTRUMENTS

For Below 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	July 21, 2014	July 20, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 26, 2014	Feb. 25, 2015
RF Cable	NA	CHGCAB_001	Oct. 05, 2013	Oct. 04, 2014
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 18, 2013	Nov. 17, 2014
Pre-Amplifier Agilent	8449B	3008A02578	June 24, 2014	June 23, 2015
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 12, 2013	Dec. 11, 2014
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
Pre-Amplifier SPACEK LABS	SLKKA-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: Aug. 18, 2014



A D T

For Above 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY50010156	Jan. 15, 2014	Jan. 14, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Feb. 27, 2014	Feb. 26, 2015
RF Cable	NA	CHHCAB_001	Oct. 06, 2013	Oct. 05, 2014
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Horn_Antenna AISI	AIH.8018	0000220091110	Dec. 06, 2013	Dec. 05, 2014
Pre-Amplifier Agilent	8449B	3008A01923	Oct. 29, 2013	Oct. 28, 2014
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 12, 2013	Dec. 11, 2014
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
5. The CANADA Site Registration No. is IC 7450H-3.
6. Tested Date: Aug. 26, 2014

5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

5.2.4 DEVIATION FROM TEST STANDARD


No deviation

5.2.5 TEST SETUP

<Frequency Range below 1GHz>

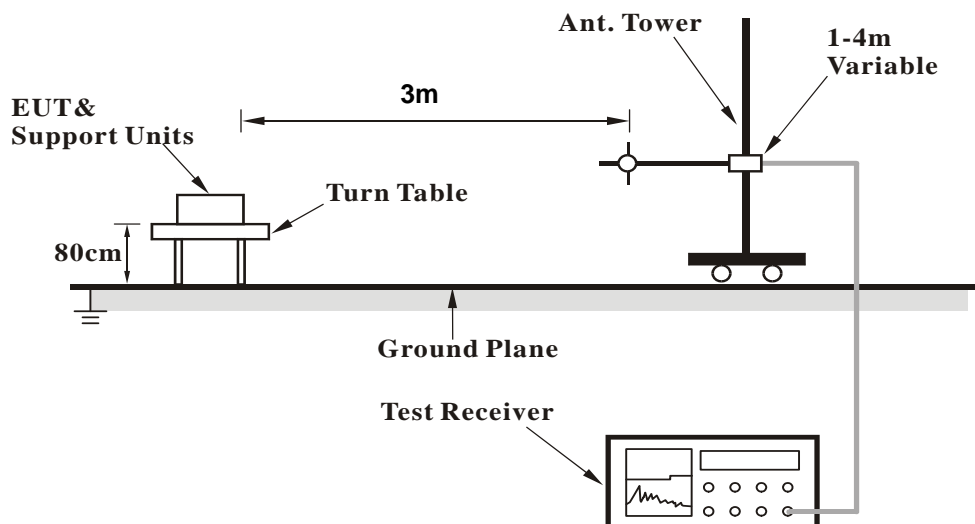

<Frequency Range above 1GHz>

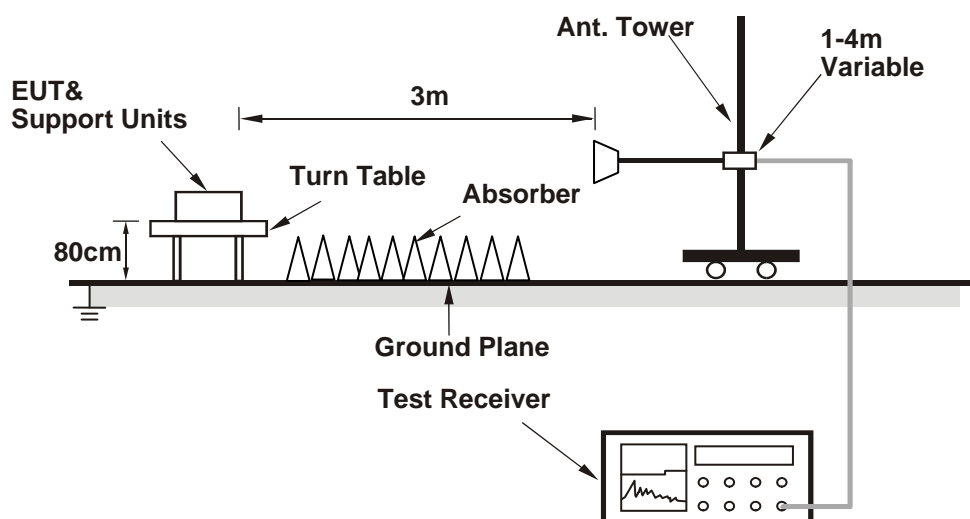

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2.6 EUT OPERATING CONDITIONS

Same as 5.1.6

5.2.7 TEST RESULTS(MODE 1)

BELOW 1GHz WORST-CASE DATA

BT_LE-GFSK

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	95.96	34.6 QP	43.5	-8.9	2.00 H	184	53.22	-18.59
2	166.29	36.8 QP	43.5	-6.7	1.50 H	263	50.29	-13.51
3	240.01	37.2 QP	46.0	-8.8	1.00 H	319	51.97	-14.77
4	642.17	40.0 QP	46.0	-6.0	2.00 H	149	44.11	-4.12
5	676.02	42.8 QP	46.0	-3.2	1.00 H	336	46.69	-3.87
6	896.84	42.7 QP	46.0	-3.3	1.50 H	246	42.76	-0.02
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	118.61	32.8 QP	43.5	-10.7	1.50 V	223	48.05	-15.29
2	165.99	35.4 QP	43.5	-8.1	1.00 V	189	48.85	-13.49
3	676.36	40.8 QP	46.0	-5.2	1.50 V	149	44.68	-3.86
4	698.52	42.5 QP	46.0	-3.5	1.50 V	284	46.06	-3.54
5	719.48	40.2 QP	46.0	-5.8	1.50 V	265	43.44	-3.28
6	876.33	37.5 QP	46.0	-8.5	1.00 V	249	37.91	-0.42

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

ABOVE 1GHz DATA

BT_LE-GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.8 PK	74.0	-20.2	1.20 H	242	59.40	-5.60
2	2390.00	47.7 AV	54.0	-6.3	1.20 H	242	53.30	-5.60
3	*2402.00	103.4 PK			1.20 H	242	108.99	-5.59
4	*2402.00	100.4 AV			1.20 H	242	105.99	-5.59
5	4804.00	54.8 PK	74.0	-19.2	1.00 H	80	50.91	3.89
6	4804.00	43.2 AV	54.0	-10.8	1.00 H	80	39.31	3.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.6 PK	74.0	-26.4	1.07 V	152	53.20	-5.60
2	2390.00	40.3 AV	54.0	-13.7	1.07 V	152	45.90	-5.60
3	*2402.00	97.4 PK			1.07 V	152	102.99	-5.59
4	*2402.00	90.2 AV			1.07 V	152	95.79	-5.59
5	4804.00	54.7 PK	74.0	-19.3	1.02 V	289	50.81	3.89
6	4804.00	42.9 AV	54.0	-11.1	1.02 V	289	39.01	3.89

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	103.5 PK			1.24 H	227	108.91	-5.41
2	*2440.00	100.5 AV			1.24 H	227	105.91	-5.41
3	4880.00	54.3 PK	74.0	-19.7	1.04 H	91	50.50	3.80
4	4880.00	42.6 AV	54.0	-11.4	1.04 H	91	38.80	3.80
5	7320.00	51.6 PK	74.0	-22.4	1.03 H	142	43.33	8.27
6	7320.00	44.2 AV	54.0	-9.8	1.03 H	142	35.93	8.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	97.6 PK			1.04 V	151	103.01	-5.41
2	*2440.00	90.1 AV			1.04 V	151	95.51	-5.41
3	4880.00	53.7 PK	74.0	-20.3	1.00 V	300	49.90	3.80
4	4880.00	42.5 AV	54.0	-11.5	1.00 V	300	38.70	3.80
5	7320.00	49.4 PK	74.0	-24.6	1.07 V	150	41.13	8.27
6	7320.00	39.9 AV	54.0	-14.1	1.07 V	150	31.63	8.27

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	102.9 PK			1.22 H	242	108.13	-5.23
2	*2480.00	100.1 AV			1.22 H	242	105.33	-5.23
3	2492.00	53.7 PK	74.0	-20.3	1.14 H	252	58.88	-5.18
4	2492.00	47.7 AV	54.0	-6.3	1.14 H	252	52.88	-5.18
5	4960.00	51.4 PK	74.0	-22.6	1.00 H	157	47.57	3.83
6	4960.00	42.2 AV	54.0	-11.8	1.00 H	157	38.37	3.83
7	7440.00	54.2 PK	74.0	-19.8	1.00 H	95	45.52	8.68
8	7440.00	42.8 AV	54.0	-11.2	1.00 H	95	34.12	8.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	97.2 PK			1.10 V	150	102.43	-5.23
2	*2480.00	90.2 AV			1.10 V	150	95.43	-5.23
3	2492.00	48.1 PK	74.0	-25.9	1.10 V	150	53.28	-5.18
4	2492.00	40.6 AV	54.0	-13.4	1.10 V	150	45.78	-5.18
5	4960.00	47.6 PK	74.0	-26.4	1.00 V	148	43.77	3.83
6	4960.00	38.6 AV	54.0	-15.4	1.00 V	148	34.77	3.83
7	7440.00	54.0 PK	74.0	-20.0	1.00 V	294	45.32	8.68
8	7440.00	42.5 AV	54.0	-11.5	1.00 V	294	33.82	8.68

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * " : Fundamental frequency.

5.2.8 TEST RESULTS(MODE 2)

BELOW 1GHz WORST-CASE DATA

BT_LE-GFSK

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	96.15	34.1 QP	43.5	-9.4	2.00 H	274	52.65	-18.57
2	165.99	35.3 QP	43.5	-8.2	1.50 H	189	48.83	-13.49
3	298.74	36.4 QP	46.0	-9.6	1.00 H	206	48.84	-12.41
4	643.09	40.5 QP	46.0	-5.5	1.00 H	228	44.58	-4.09
5	669.47	42.8 QP	46.0	-3.2	1.50 H	185	46.75	-3.93
6	719.62	39.2 QP	46.0	-6.8	1.50 H	173	42.50	-3.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	166.29	35.3 QP	43.5	-8.2	1.00 V	155	48.85	-13.51
2	626.79	38.2 QP	46.0	-7.8	1.50 V	249	42.61	-4.38
3	642.89	39.4 QP	46.0	-6.6	1.50 V	203	43.51	-4.10
4	676.41	40.3 QP	46.0	-5.7	1.50 V	225	44.12	-3.86
5	697.55	41.4 QP	46.0	-4.6	1.50 V	305	44.95	-3.57
6	840.97	38.6 QP	46.0	-7.4	1.00 V	289	39.53	-0.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

ABOVE 1GHz DATA

BT_LE-GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.7 PK	74.0	-24.3	1.52 H	21	55.30	-5.60
2	2390.00	43.9 AV	54.0	-10.1	1.52 H	21	49.50	-5.60
3	*2402.00	101.1 PK			1.52 H	21	106.69	-5.59
4	*2402.00	100.0 AV			1.52 H	21	105.59	-5.59
5	4804.00	54.3 PK	74.0	-19.7	1.01 H	81	50.41	3.89
6	4804.00	42.4 AV	54.0	-11.6	1.01 H	81	38.51	3.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.9 PK	74.0	-26.1	1.49 V	248	53.50	-5.60
2	2390.00	42.6 AV	54.0	-11.4	1.49 V	248	48.20	-5.60
3	*2402.00	97.8 PK			1.49 V	248	103.39	-5.59
4	*2402.00	96.5 AV			1.49 V	248	102.09	-5.59
5	4804.00	51.3 PK	74.0	-22.7	1.00 V	172	47.41	3.89
6	4804.00	42.2 AV	54.0	-11.8	1.00 V	172	38.31	3.89

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	101.0 PK			1.51 H	46	106.41	-5.41
2	*2440.00	100.4 AV			1.51 H	46	105.81	-5.41
3	4880.00	54.6 PK	74.0	-19.4	1.01 H	92	50.80	3.80
4	4880.00	43.0 AV	54.0	-11.0	1.01 H	92	39.20	3.80
5	7320.00	52.1 PK	74.0	-21.9	1.00 H	148	43.83	8.27
6	7320.00	44.5 AV	54.0	-9.5	1.00 H	148	36.23	8.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	97.7 PK			1.53 V	235	103.11	-5.41
2	*2440.00	96.5 AV			1.53 V	235	101.91	-5.41
3	4880.00	51.2 PK	74.0	-22.8	1.00 V	176	47.40	3.80
4	4880.00	41.8 AV	54.0	-12.2	1.00 V	176	38.00	3.80
5	7320.00	51.4 PK	74.0	-22.6	1.00 V	76	43.13	8.27
6	7320.00	43.2 AV	54.0	-10.8	1.00 V	76	34.93	8.27

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	100.8 PK			1.42 H	36	106.03	-5.23
2	*2480.00	99.9 AV			1.42 H	36	105.13	-5.23
3	2492.00	49.2 PK	74.0	-24.8	1.42 H	36	54.38	-5.18
4	2492.00	43.8 AV	54.0	-10.2	1.42 H	36	48.98	-5.18
5	4960.00	54.1 PK	74.0	-19.9	1.03 H	89	50.27	3.83
6	4960.00	42.2 AV	54.0	-11.8	1.03 H	89	38.37	3.83
7	7440.00	51.9 PK	74.0	-22.1	1.08 H	147	43.22	8.68
8	7440.00	43.7 AV	54.0	-10.3	1.08 H	147	35.02	8.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	97.2 PK			1.50 V	257	102.43	-5.23
2	*2480.00	96.1 AV			1.50 V	257	101.33	-5.23
3	2492.00	47.0 PK	74.0	-27.0	1.50 V	257	52.18	-5.18
4	2492.00	41.9 AV	54.0	-12.1	1.50 V	257	47.08	-5.18
5	4960.00	51.3 PK	74.0	-22.7	1.00 V	176	47.47	3.83
6	4960.00	42.0 AV	54.0	-12.0	1.00 V	176	38.17	3.83
7	7440.00	50.8 PK	74.0	-23.2	1.00 V	87	42.12	8.68
8	7440.00	42.9 AV	54.0	-11.1	1.00 V	87	34.22	8.68

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

5.2.9 TEST RESULTS(MODE 3)

BELOW 1GHz WORST-CASE DATA

BT_LE-GFSK

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	96.15	34.5 QP	43.5	-9.0	2.00 H	149	53.11	-18.57
2	166.29	35.4 QP	43.5	-8.1	1.50 H	120	48.90	-13.51
3	299.32	36.3 QP	46.0	-9.7	1.00 H	226	48.72	-12.39
4	432.02	37.5 QP	46.0	-8.6	1.50 H	148	46.06	-8.61
5	674.66	40.2 QP	46.0	-5.8	1.00 H	261	44.09	-3.86
6	768.36	40.5 QP	46.0	-5.5	1.00 H	119	42.13	-1.65

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	96.11	33.9 QP	43.5	-9.6	2.00 V	214	52.49	-18.57
2	165.99	34.2 QP	43.5	-9.3	1.00 V	225	47.68	-13.49
3	668.65	38.5 QP	46.0	-7.5	1.50 V	256	42.47	-3.95
4	697.94	38.3 QP	46.0	-7.7	1.50 V	309	41.89	-3.57
5	824.38	42.4 QP	46.0	-3.6	1.00 V	306	43.38	-1.02
6	898.39	39.8 QP	46.0	-6.2	1.00 V	249	39.74	0.03

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

ABOVE 1GHz DATA

BT_LE-GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.8 PK	74.0	-24.2	1.48 H	33	55.40	-5.60
2	2390.00	44.2 AV	54.0	-9.8	1.48 H	33	49.80	-5.60
3	*2402.00	101.6 PK			1.48 H	33	107.19	-5.59
4	*2402.00	100.4 AV			1.48 H	33	105.99	-5.59
5	4804.00	54.5 PK	74.0	-19.5	1.09 H	94	50.61	3.89
6	4804.00	42.7 AV	54.0	-11.3	1.09 H	94	38.81	3.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.2 PK	74.0	-26.8	1.45 V	260	52.80	-5.60
2	2390.00	42.1 AV	54.0	-11.9	1.45 V	260	47.70	-5.60
3	*2402.00	92.0 PK			1.45 V	260	97.59	-5.59
4	*2402.00	90.7 AV			1.45 V	260	96.29	-5.59
5	4804.00	51.0 PK	74.0	-23.0	1.00 V	159	47.11	3.89
6	4804.00	41.9 AV	54.0	-12.1	1.00 V	159	38.01	3.89

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	101.8 PK			1.47 H	47	107.21	-5.41
2	*2440.00	100.3 AV			1.47 H	47	105.71	-5.41
3	4880.00	54.6 PK	74.0	-19.4	1.01 H	107	50.80	3.80
4	4880.00	42.7 AV	54.0	-11.3	1.01 H	107	38.90	3.80
5	7320.00	52.1 PK	74.0	-21.9	1.00 H	135	43.83	8.27
6	7320.00	44.6 AV	54.0	-9.4	1.00 H	135	36.33	8.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	92.3 PK			1.50 V	247	97.71	-5.41
2	*2440.00	91.0 AV			1.50 V	247	96.41	-5.41
3	4880.00	51.5 PK	74.0	-22.5	1.00 V	169	47.70	3.80
4	4880.00	42.1 AV	54.0	-11.9	1.00 V	169	38.30	3.80
5	7320.00	51.1 PK	74.0	-22.9	1.00 V	91	42.83	8.27
6	7320.00	43.0 AV	54.0	-11.0	1.00 V	91	34.73	8.27

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	101.5 PK			1.43 H	26	106.73	-5.23
2	*2480.00	100.1 AV			1.43 H	26	105.33	-5.23
3	2492.00	49.9 PK	74.0	-24.1	1.43 H	26	55.08	-5.18
4	2492.00	44.1 AV	54.0	-9.9	1.43 H	26	49.28	-5.18
5	4960.00	54.6 PK	74.0	-19.4	1.08 H	86	50.77	3.83
6	4960.00	42.9 AV	54.0	-11.1	1.08 H	86	39.07	3.83
7	7440.00	51.4 PK	74.0	-22.6	1.07 H	134	42.72	8.68
8	7440.00	44.1 AV	54.0	-9.9	1.07 H	134	35.42	8.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	92.8 PK			1.41 V	270	98.03	-5.23
2	*2480.00	90.7 AV			1.41 V	270	95.93	-5.23
3	2492.00	47.3 PK	74.0	-26.7	1.41 V	270	52.48	-5.18
4	2492.00	42.2 AV	54.0	-11.8	1.41 V	270	47.38	-5.18
5	4960.00	51.0 PK	74.0	-23.0	1.02 V	144	47.17	3.83
6	4960.00	42.0 AV	54.0	-12.0	1.02 V	144	38.17	3.83
7	7440.00	50.8 PK	74.0	-23.2	1.01 V	95	42.12	8.68
8	7440.00	42.9 AV	54.0	-11.1	1.01 V	95	34.22	8.68

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

5.2.10 TEST RESULTS(MODE 4)

BELOW 1GHz WORST-CASE DATA

BT_LE-GFSK

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.99	32.1 QP	40.0	-7.9	2.00 H	250	45.55	-13.46
2	95.96	34.8 QP	43.5	-8.7	2.00 H	285	53.42	-18.59
3	166.29	35.2 QP	43.5	-8.3	1.50 H	146	48.73	-13.51
4	239.96	38.9 QP	46.0	-7.1	1.00 H	315	53.69	-14.77
5	669.81	41.6 QP	46.0	-4.4	1.50 H	152	45.54	-3.92
6	719.67	39.7 QP	46.0	-6.3	1.50 H	243	42.98	-3.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	136.43	40.3 QP	43.5	-3.2	1.15 V	330	54.20	-13.90
2	162.70	33.9 QP	43.5	-9.6	1.00 V	215	47.29	-13.37
3	642.17	40.4 QP	46.0	-5.6	1.50 V	148	44.48	-4.12
4	675.92	39.8 QP	46.0	-6.2	1.50 V	305	43.66	-3.87
5	840.63	38.7 QP	46.0	-7.3	1.00 V	179	39.56	-0.90
6	895.58	40.9 QP	46.0	-5.1	1.50 V	248	41.01	-0.07

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

ABOVE 1GHz DATA

BT_LE-GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.4 PK	74.0	-28.6	1.15 H	213	51.00	-5.60
2	2390.00	35.5 AV	54.0	-18.5	1.15 H	213	41.10	-5.60
3	*2402.00	90.7 PK			1.15 H	213	96.29	-5.59
4	*2402.00	87.8 AV			1.15 H	213	93.39	-5.59
5	4804.00	47.2 PK	74.0	-26.8	1.00 H	202	43.31	3.89
6	4804.00	38.4 AV	54.0	-15.6	1.00 H	202	34.51	3.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	51.5 PK	74.0	-22.5	1.15 V	256	57.10	-5.60
2	2390.00	46.7 AV	54.0	-7.3	1.15 V	256	52.30	-5.60
3	*2402.00	104.3 PK			1.15 V	256	109.89	-5.59
4	*2402.00	103.0 AV			1.15 V	256	108.59	-5.59
5	4804.00	50.1 PK	74.0	-23.9	1.10 V	143	46.21	3.89
6	4804.00	41.7 AV	54.0	-12.3	1.10 V	143	37.81	3.89

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	91.0 PK			1.12 H	223	96.41	-5.41
2	*2440.00	88.2 AV			1.12 H	223	93.61	-5.41
3	4880.00	46.7 PK	74.0	-27.3	1.03 H	195	42.90	3.80
4	4880.00	37.9 AV	54.0	-16.1	1.03 H	195	34.10	3.80
5	7320.00	51.4 PK	74.0	-22.6	1.00 H	302	43.13	8.27
6	7320.00	39.9 AV	54.0	-14.1	1.00 H	302	31.63	8.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	104.7 PK			1.14 V	252	110.11	-5.41
2	*2440.00	103.4 AV			1.14 V	252	108.81	-5.41
3	4880.00	50.5 PK	74.0	-23.5	1.00 V	136	46.70	3.80
4	4880.00	41.9 AV	54.0	-12.1	1.00 V	136	38.10	3.80
5	7320.00	53.7 PK	74.0	-20.3	1.00 V	65	45.43	8.27
6	7320.00	42.5 AV	54.0	-11.5	1.00 V	65	34.23	8.27

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	90.2 PK			1.14 H	200	95.43	-5.23
2	*2480.00	87.6 AV			1.14 H	200	92.83	-5.23
3	2483.50	45.7 PK	74.0	-28.3	1.14 H	220	50.90	-5.20
4	2483.50	36.0 AV	54.0	-18.0	1.14 H	220	41.20	-5.20
5	4960.00	46.5 PK	74.0	-27.5	1.06 H	203	42.67	3.83
6	4960.00	38.0 AV	54.0	-16.0	1.06 H	203	34.17	3.83
7	7440.00	51.9 PK	74.0	-22.1	1.05 H	289	43.22	8.68
8	7440.00	40.4 AV	54.0	-13.6	1.05 H	289	31.72	8.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	104.3 PK			1.15 V	253	109.53	-5.23
2	*2480.00	102.9 AV			1.15 V	253	108.13	-5.23
3	2483.50	51.3 PK	74.0	-22.7	1.12 V	260	56.50	-5.20
4	2483.50	46.7 AV	54.0	-7.3	1.12 V	260	51.90	-5.20
5	4960.00	49.5 PK	74.0	-24.5	1.00 V	133	45.67	3.83
6	4960.00	41.3 AV	54.0	-12.7	1.00 V	133	37.47	3.83
7	7440.00	53.7 PK	74.0	-20.3	1.00 V	56	45.02	8.68
8	7440.00	42.6 AV	54.0	-11.4	1.00 V	56	33.92	8.68

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * " : Fundamental frequency.

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

5.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 26, 2014


5.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

5.3.4 DEVIATION FROM TEST STANDARD

No deviation

5.3.5 TEST SETUP

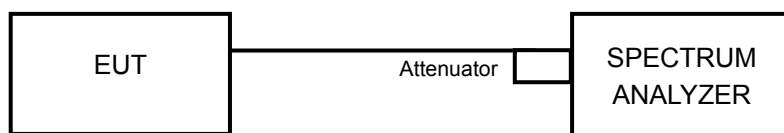

5.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

5.3.7 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	0.73	0.5	PASS
19	2440	0.73	0.5	PASS
39	2480	0.73	0.5	PASS

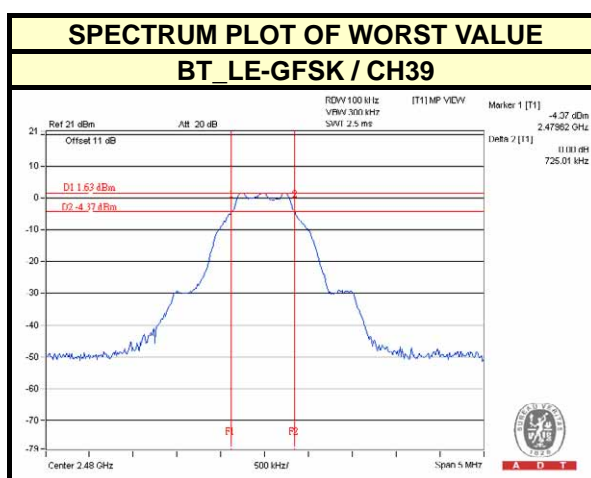

5.4 CONDUCTED OUTPUT POWER MEASUREMENT

5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

5.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power meter Anritsu	ML2495A	1014008	Apr. 30, 2014	Apr. 29, 2015
Power sensor Anritsu	MA2411B	0917122	Apr. 30, 2014	Apr. 29, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 26, 2014


5.4.3 TEST PROCEDURES

The peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the peak power level.

5.4.4 DEVIATION FROM TEST STANDARD

No deviation.

5.4.5 TEST SETUP



5.4.6 EUT OPERATING CONDITIONS

Same as Item 5.3.6



5.4.7 TEST RESULTS

FOR PEAK POWER

BT_LE-GFSK

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
0	2402	1.901	2.79	30	PASS
19	2440	2.109	3.24	30	PASS
39	2480	2.173	3.37	30	PASS

FOR AVERAGE POWER

BT_LE-GFSK

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
0	2402	1.734	2.39
19	2440	1.914	2.82
39	2480	1.991	2.99

5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 26, 2014


5.5.3 TEST PROCEDURE

1. Set the RBW = 3 kHz, VBW =10 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum amplitude level.

5.5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5.5 TEST SETUP



5.5.6 EUT OPERATING CONDITION

Same as Item 5.3.6




A D T

5.5.7 TEST RESULTS

BT_LE-GFSK

Channel	FREQUENCY (MHz)	PSD (dBm)	LIMIT (dBm)	PASS /FAIL
0	2402	-12.58	8	PASS
19	2440	-12.31	8	PASS
39	2480	-12.19	8	PASS

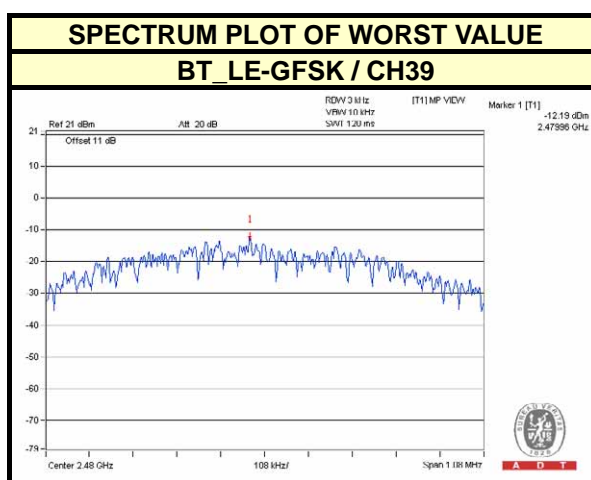

5.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

5.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 26, 2014

5.6.3 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Use the peak marker function to determine the maximum amplitude level.

5.6.4 DEVIATION FROM TEST STANDARD

No deviation

5.6.5 TEST SETUP



5.6.6 EUT OPERATING CONDITION

Same as Item 5.3.6

5.6.7 TEST RESULTS



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.





A D T

BT LE-GFSK



CH 0

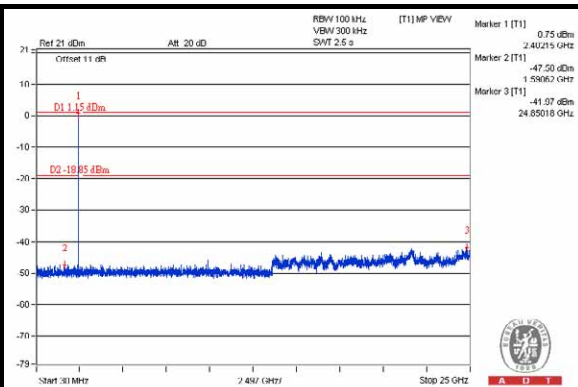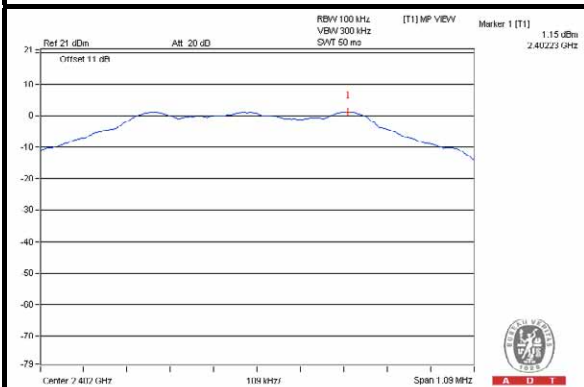


CH 19

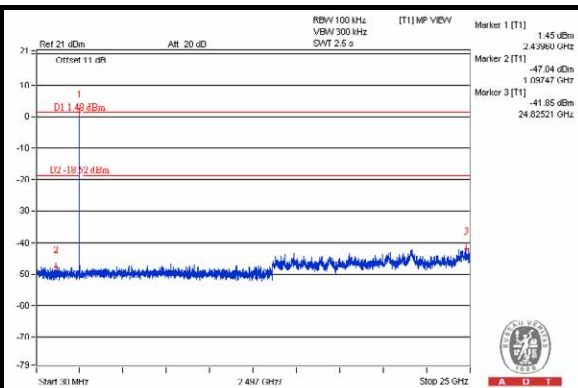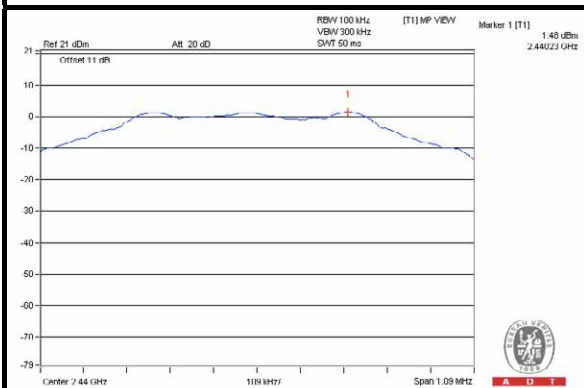


CH 39

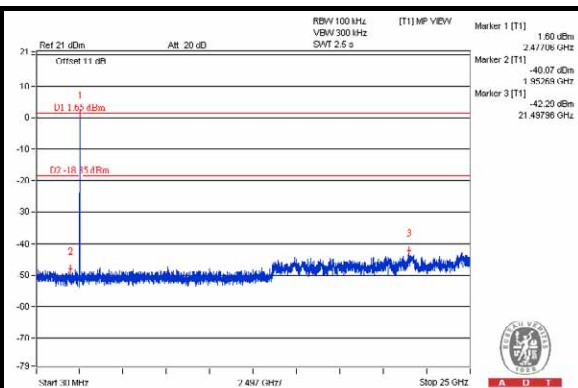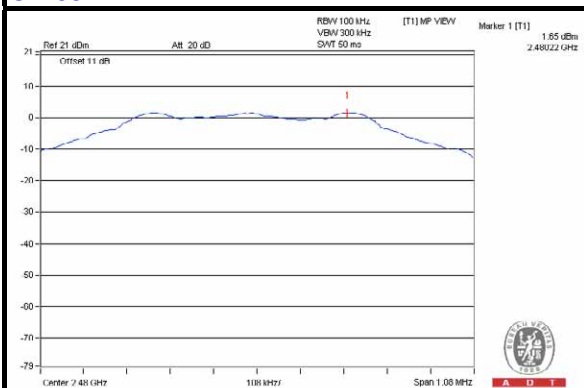

CH 0 Band edge

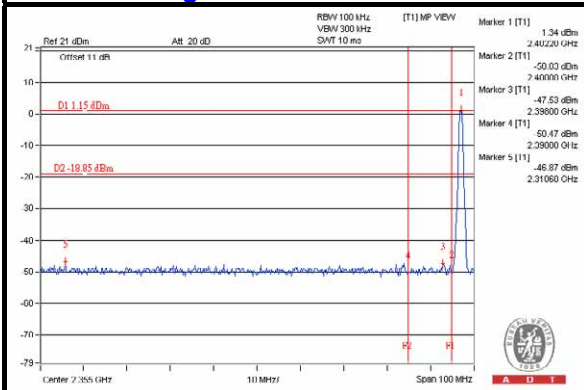

CH 39 Band edge

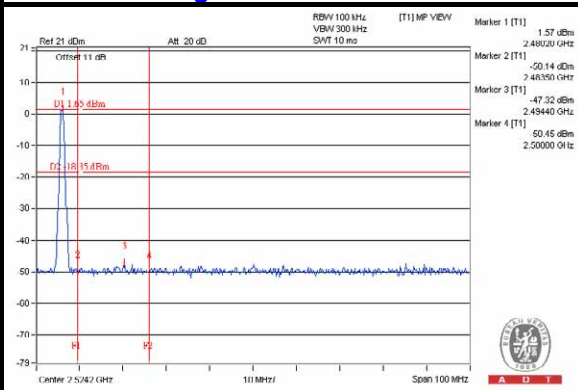



6 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



7 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

8 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---