

FCC Test Report (WLAN)

Report No.: RF140605E01L R1

FCC ID: TLZ-CB178NF

Test Model: AW-CB178NF, AW-CB178NF(UART)

Series Model: AW-CB178NF-ZP

Received Date: June 19, 2017

Test Date: July 13 to 18, 2017

Issued Date: Aug. 01, 2017

Applicant: AzureWave Technologies, Inc.

Address: 8F., No.94, Baozhong Rd. , Xindian Dist., New Taipei City , Taiwan 231

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (1): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

| | |
|--|-----------|
| Release Control Record | 3 |
| 1 Certificate of Conformity | 4 |
| 2 Summary of Test Results | 5 |
| 2.1 Measurement Uncertainty | 5 |
| 2.2 Modification Record | 5 |
| 3 General Information | 6 |
| 3.1 General Description of EUT (WLAN) | 6 |
| 3.2 Description of Test Modes | 10 |
| 3.2.1 Test Mode Applicability and Tested Channel Detail | 11 |
| 3.3 Duty Cycle of Test Signal | 13 |
| 3.4 Description of Support Units | 14 |
| 3.4.1 Configuration of System under Test | 15 |
| 3.5 General Description of Applied Standards | 16 |
| 4 Test Types and Results | 17 |
| 4.1 Radiated Emission and Bandedge Measurement | 17 |
| 4.1.1 Limits of Radiated Emission and Bandedge Measurement | 17 |
| 4.1.2 Test Instruments | 18 |
| 4.1.3 Test Procedures | 20 |
| 4.1.4 Deviation from Test Standard | 20 |
| 4.1.5 Test Setup | 21 |
| 4.1.6 EUT Operating Conditions | 23 |
| 4.1.7 Test Results | 24 |
| 4.2 Conducted Output Power Measurement | 37 |
| 4.2.1 Limits of Conducted Output Power Measurement | 37 |
| 4.2.2 Test Setup | 37 |
| 4.2.3 Test Instruments | 37 |
| 4.2.4 Test Procedures | 37 |
| 4.2.5 Deviation from Test Standard | 37 |
| 4.2.6 EUT Operating Conditions | 37 |
| 4.2.7 Test Results | 38 |
| 4.3 Pictures of Test Arrangements | 40 |
| Appendix – Information on the Testing Laboratories | 41 |

Release Control Record

| Issue No. | Description | Date Issued |
|-----------------|---|---------------|
| RF140605E01L | Original release. | July 25, 2017 |
| RF140605E01L R1 | Revised the model name of Set 6 Antenna | Aug. 01, 2017 |

1 Certificate of Conformity

Product: 802.11ac/a/b/g/n 2X2 MIMO WLAN & Bluetooth NGFF module

Brand: AzureWave

Test Model: AW-CB178NF, AW-CB178NF(UART)

Series Model: AW-CB178NF-ZP


Sample Status: ENGINEERING SAMPLE


Applicant: AzureWave Technologies, Inc.

Test Date: July 13 to 18, 2017

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  _____, **Date:** Aug. 01, 2017
Wendy Wu / Specialist

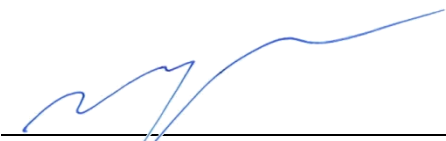Approved by :  _____, **Date:** Aug. 01, 2017
May Chen / Manager

2 Summary of Test Results

| 47 CFR FCC Part 15, Subpart C (SECTION 15.247) | | | |
|--|--|--------|--|
| FCC Clause | Test Item | Result | Remarks |
| 15.205 / 15.209 / 15.247(d) | Radiated Emissions and Band Edge Measurement | PASS | Meet the requirement of limit. Minimum passing margin is -0.1dB at 2390MHz. |
| 15.247(b) | Conducted power | PASS | Meet the requirement of limit. |

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement | Frequency | Expanded Uncertainty (k=2) (\pm) |
|--------------------------------|---------------|--------------------------------------|
| Radiated Emissions up to 1 GHz | 30MHz ~ 1GHz | 5.32 dB |
| Radiated Emissions above 1 GHz | 1GHz ~ 6GHz | 5.14 dB |
| | 6GHz ~ 18GHz | 5.04 dB |
| | 18GHz ~ 40GHz | 5.25 dB |

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (WLAN)

| | |
|-----------------------|---|
| Product | 802.11ac/a/b/g/n 2X2 MIMO WLAN & Bluetooth NGFF module |
| Brand | AzureWave |
| Test Model | AW-CB178NF, AW-CB178NF(UART) |
| Series Model | AW-CB178NF-ZP |
| Status of EUT | ENGINEERING SAMPLE |
| Power Supply Rating | 3.3Vdc from host equipment |
| Modulation Type | CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode |
| Modulation Technology | DSSS, OFDM |
| Transfer Rate | 802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n : up to 300Mbps 802.11ac: up to 866.7Mbps |
| Operating Frequency | For 15.407 5.18 ~ 5.24GHz, 5.26 ~ 5.32GHz, 5.50 ~ 5.58GHz & 5.66 ~ 5.70GHz, 5.745 ~ 5.825GHz For 15.247 2.412 ~ 2.462GHz |
| Number of Channel | For 15.407 21 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 9 for 802.11n (HT40), 802.11ac (VHT40) 4 for 802.11ac (VHT80) For 15.247 11 for 802.11b/g, 802.11n (HT20) 7 for 802.11n (HT40) |
| Output Power | For 15.407 802.11a: 88.452mW 802.11ac (VHT20): 95.932mW 802.11ac (VHT40): 69.218mW 802.11ac (VHT80): 14.66mW For 15.247: 802.11b: 182.395mW 802.11g: 680.997mW 802.11n (HT20): 715.475mW 802.11n (HT40): 288.679mW |
| Antenna Type | Refer to Note |
| Antenna Connector | Refer to Note |
| Accessory Device | NA |
| Data Cable Supplied | NA |

Note:

1. This report is prepared for FCC Class II change. The difference compared with the Report No.: RF140605E01D design is as the following:

- ◆ Add two sets of new Dipole antennas (Set 5, Set 6) as below table:

| Original Antenna | | | | | | | | | | |
|-------------------------|---------------------------|---|--|------------------------------|--------|-----------------|------------------------------|-------------------|----------------|-------------------|
| Set 1 Antenna | | | | | | | | | | |
| Transmitter Circuit | Brand | Model | Ant. Gain (dBi) < Excluding cable loss> | Cable Loss (dB) | | Net. Gain (dBi) | Frequency range (MHz to MHz) | Ant. Type | Connector Type | Cable Length (mm) |
| | | | | 100 mm | 180 mm | | | | | |
| Chain (0) | Microsoft | 2118433-1 | 2.18 | 1 | 0.54 | 0.64 | 2400~2484 | PCB | R-SMA | 100+180 |
| | | | 2.34 | 1.3 | 0.96 | 0.08 | 5150~5850 | | | |
| Chain (1) | Microsoft | 2118433-1 | 2.18 | 1 | 0.54 | 0.64 | 2400~2484 | PCB | R-SMA | 100+180 |
| | | | 2.34 | 1.3 | 0.96 | 0.08 | 5150~5850 | | | |
| Set 2 Antenna | | | | | | | | | | |
| Transmitter Circuit | Brand | Model | Ant. Gain(dBi) <Including cable loss> | Frequency range (MHz to MHz) | | Ant. Type | Connector Type | Cable Length (mm) | | |
| Chain (0) | Walsin | RFPCA310715EML B301 | 3.06 | 2400~2500 | | PIFA | mini - ipex | 150 | | |
| | | | 4.81 | 5150~5850 | | | | | | |
| Chain (1) | Walsin | RFPCA310715EML B301 | 3.06 | 2400~2500 | | PIFA | mini - ipex | 150 | | |
| | | | 4.81 | 5150~5850 | | | | | | |
| Set 3 Antenna | | | | | | | | | | |
| Transmitter Circuit | Brand | Model | Ant. Gain(dBi) <Including cable loss> | Frequency range (MHz to MHz) | | Ant. Type | Connector Type | Cable Length (mm) | | |
| Chain (0) | Wistron NeWeb Corporation | 81EAX15.G12 | 1.02 | 2400~2484 | | PIFA | mini - ipex | 254 | | |
| | | | -1.03 | 5150~5850 | | | | | | |
| Chain (1) | Wistron NeWeb Corporation | 81EAX15.G12 | 1.02 | 2400~2484 | | PIFA | mini - ipex | 563 | | |
| | | | -1.03 | 5150~5850 | | | | | | |
| Set 4 Antenna | | | | | | | | | | |
| Transmitter Circuit | Brand | Model | Antenna Gain(dBi) Including 1285mm cable loss Excluding 60mm cable loss | Cable Loss (dB) | | Net. Gain (dBi) | Frequency range (MHz to MHz) | Ant. Type | Connector Type | Cable Length (mm) |
| | | | | 1285 mm | 60 mm | | | | | |
| Chain (0) | TE | 2118406-3 | 0.38 | NA | -0.35 | 0.03 | 2300~3800 | PCB | R-SMA | 1285 +60 |
| | | | -0.18 | NA | -0.73 | -0.91 | 5150~5875 | | | |
| Chain (1) | TE | 2118406-3 | 0.38 | NA | -0.35 | 0.03 | 2300~3800 | PCB | R-SMA | 1285 +60 |
| | | | -0.18 | NA | -0.73 | -0.91 | 5150~5875 | | | |
| Newly Antenna | | | | | | | | | | |
| Set 5 Antenna | | | | | | | | | | |
| Transmitter Circuit | Brand | Model | Ant. Gain(dBi) <Including cable loss> | Frequency range (MHz to MHz) | | Ant. Type | Connector Type | Cable Length (mm) | | |
| Chain (0) | Ventev | Main Antenna: 593861- MWAS-2382-5.50 | 2.4 | 2400~2500 | | Dipole | N Plug | 140 +/- 10 | | |
| | | | 3.55 | 4900~5825 | | | | | | |
| Chain (1) | Ventev | Aux Antenna:593861- MWAS-2382-9.00 | 2.4 | 2400~2500 | | Dipole | N Plug | 230 +/- 10 | | |
| | | | 3.55 | 4900~5825 | | | | | | |

Set 6 Antenna

| Transmitter Circuit | Brand | Model | Antenna Gain(dBi) Including Cable loss | Frequency range (MHz to MHz) | Ant. Type | Connector Type | Cable Length (mm) |
|---------------------|--------|--|---|---------------------------------|-----------|---|----------------------|
| Chain (0) | Cortec | AN2450-74L02BRS+ SMASFR8-3200B-40X00I | 1.5 | 2400~2500 | Dipole | SMA Male Reverse/ SMA Female Reverse | 200 +/- 3 |
| | | | 2.0 | 5150~5850 | | | |
| Chain (1) | Cortec | AN2450-74L02BRS+ SMASFR8-3200B-40X00I | 1.5 | 2400~2500 | Dipole | SMA Male Reverse/ SMA Female Reverse | 200 +/- 3 |
| | | | 2.0 | 5150~5850 | | | |

Note: 1. From the above 1TX configuration mode, the worst case was found in transmission circuit on Chain (1).
 2. For BT mode will fix transmission on Chain (0).
 3. From the above antenna sets, Set 1, Set 2 and Set 5 Antenna were selected as representative antenna for the test and its data was recorded in this report.

2. According to above conditions, only Output Power and Radiated Emissions test items of the newly antenna need to be performed. And all data was verified to meet the requirements.

3. The EUT has three model names, which are identical to each other in all aspects except for the following:

| Brand | Model | Description |
|-----------|------------------|------------------------|
| AzureWave | AW-CB178NF(UART) | With UART interface |
| | AW-CB178NF | Without UART interface |
| | AW-CB178NF-ZP | With UART interface |

From the model names, the radiated emission worst case was found in model No.: **AW-CB178NF**. Therefore only the test data of the mode was recorded in this report.

4. There are Bluetooth 4.0 technology and WLAN (2.4GHz and 5GHz) technology used for the EUT.

5. For WLAN: 2.4GHz and 5GHz technology cannot transmit at same time.

6. WLAN/BT coexistence mode:

| Condition | Technology | |
|-----------|--------------------------|----|
| 1 | WLAN(2.4GHz) 1TX only | BT |
| 2 | WLAN(5GHz) 1TX only | BT |

From above coexistence mode, radiated emission of the simultaneous operation has been evaluated and no non-compliance was found.

7. The EUT incorporates a MIMO function.

| MODULATION MODE | DATA RATE (MCS) | TX & RX CONFIGURATION | |
|----------------------------|-----------------|-----------------------|-----------------|
| 802.11a | 6 ~ 54Mbps | 1Tx (diversity) | 1Rx (diversity) |
| | | 2TX(CDD) | 2Rx |
| 802.11b | 1 ~ 11Mbps | 1Tx (diversity) | 1Rx (diversity) |
| | | 2TX(CDD) | 2Rx |
| 802.11g | 6 ~ 54Mbps | 1Tx (diversity) | 1Rx (diversity) |
| | | 2TX(CDD) | 2Rx |
| 802.11n (HT20) | MCS 0~7 | 1Tx (diversity) | 1Rx (diversity) |
| | MCS 8~15 | 2Tx | 2Rx |
| 802.11n (HT40) | MCS 0~7 | 1Tx (diversity) | 1Rx (diversity) |
| | MCS 8~15 | 2Tx | 2Rx |
| 802.11ac (VHT20) (5GHz) | MCS0~8 Nss=1 | 1Tx (diversity) | 1Rx (diversity) |
| | MCS0~8 Nss=2 | 2Tx | 2Rx |
| 802.11ac (VHT40) (5GHz) | MCS0~9 Nss=1 | 1Tx (diversity) | 1Rx (diversity) |
| | MCS0~9 Nss=2 | 2Tx | 2Rx |
| 802.11ac (VHT80) (5GHz) | MCS0~9 Nss=1 | 1Tx (diversity) | 1Rx (diversity) |
| | MCS0~9 Nss=2 | 2Tx | 2Rx |

Note: The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report.

8. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 1 | 2412MHz | 7 | 2442MHz |
| 2 | 2417MHz | 8 | 2447MHz |
| 3 | 2422MHz | 9 | 2452MHz |
| 4 | 2427MHz | 10 | 2457MHz |
| 5 | 2432MHz | 11 | 2462MHz |
| 6 | 2437MHz | | |

7 channels are provided for 802.11n (HT40):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 3 | 2422MHz | 7 | 2442MHz |
| 4 | 2427MHz | 8 | 2447MHz |
| 5 | 2432MHz | 9 | 2452MHz |
| 6 | 2437MHz | | |

3.2.1 Test Mode Applicability and Tested Channel Detail

| EUT CONFIGURE MODE | APPLICABLE TO | | | DESCRIPTION |
|--------------------|---------------|-----------|------|-------------|
| | RE \geq 1G | RE $<$ 1G | APCM | |
| - | √ | √ | √ | - |

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE $<$ 1G: Radiated Emission below 1GHz
APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|----------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b | 1 to 11 | 1, 6, 11 | DSSS | DBPSK | 1 |
| 802.11g | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6 |
| 802.11n (HT20) | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6.5 |
| 802.11n (HT40) | 3 to 9 | 3, 6, 9 | OFDM | BPSK | 13.5 |

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|----------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11n (HT20) | 1 to 11 | 6, | OFDM | BPSK | 6.5 |

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.


| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|----------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b | 1 to 11 | 1, 6, 11 | DSSS | DBPSK | 1 |
| 802.11g | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6 |
| 802.11n (HT20) | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6.5 |
| 802.11n (HT40) | 3 to 9 | 3, 6, 9 | OFDM | BPSK | 13.5 |

Test Condition:

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER (SYSTEM) | TESTED BY |
|---------------|--------------------------|-------------------------|---------------|
| RE \geq 1G | 25deg. C, 68%RH | 120Vac, 60Hz | Weiwei Lo |
| RE<1G | 25deg. C, 65%RH | 120Vac, 60Hz | Weiwei Lo |
| APCM | 25deg. C, 60%RH | 120Vac, 60Hz | Anderson Chen |

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is 100 %, duty factor is not required.

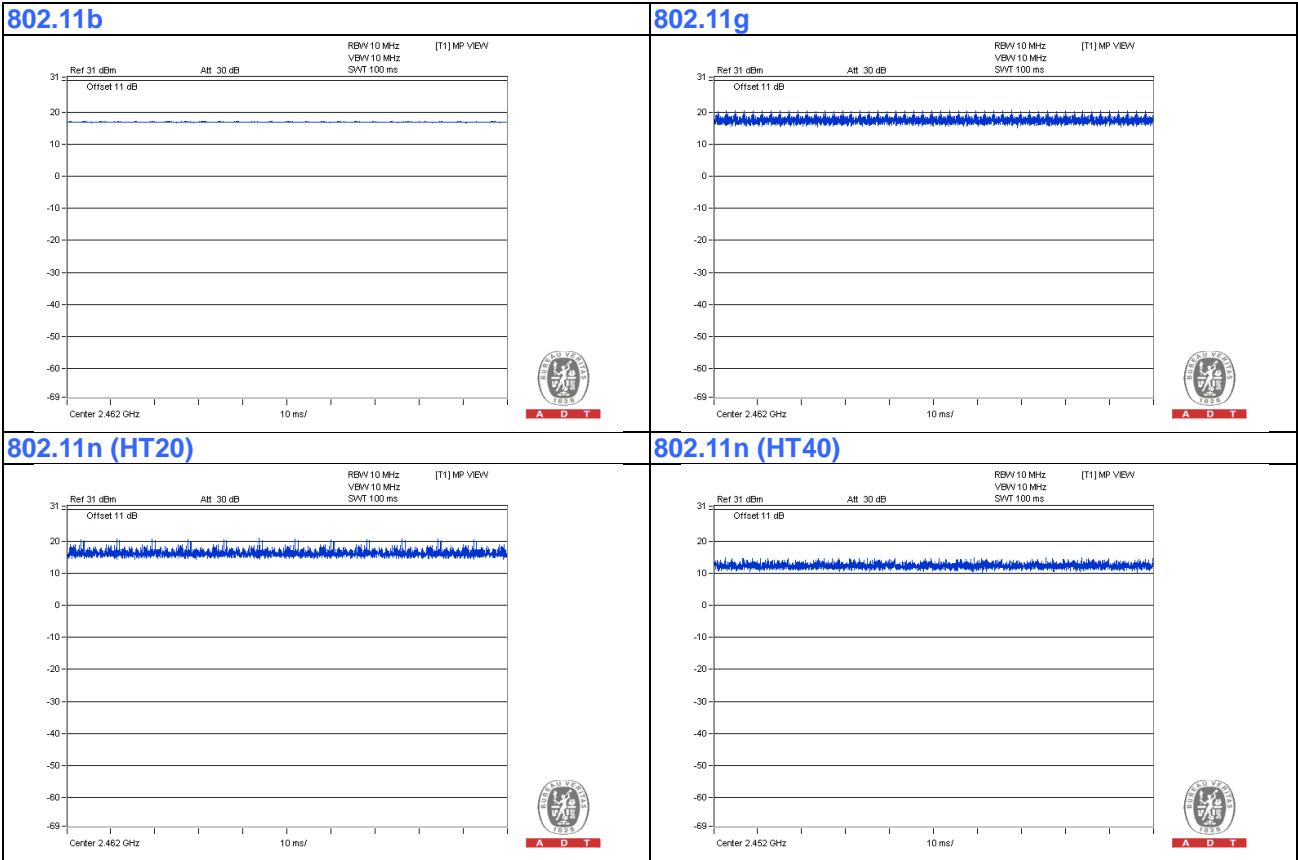

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


| ID | Product | Brand | Model No. | Serial No. | FCC ID | Remarks |
|----|--------------|-------|-----------|------------|---------|--------------------|
| A. | Laptop | DELL | E6420 | B92T3R1 | FCC DoC | Provided by Lab |
| B. | PCIE Fixture | NA | NA | NA | NA | Supplied by client |
| C. | Laptop | DELL | E6440 | F9LYQ32 | FCC DoC | Provided by Lab |
| D. | USB Dongle | NA | NA | NA | NA | Provided by Lab |

Note:

1. All power cords of the above support units are non-shielded (1.8m).

| ID | Descriptions | Qty. | Length (m) | Shielding (Yes/No) | Cores (Qty.) | Remarks |
|----|--------------|------|------------|--------------------|--------------|-----------------|
| 1. | RJ-45 Cable | 1 | 10 | No | 0 | Provided by Lab |

3.4.1 Configuration of System under Test

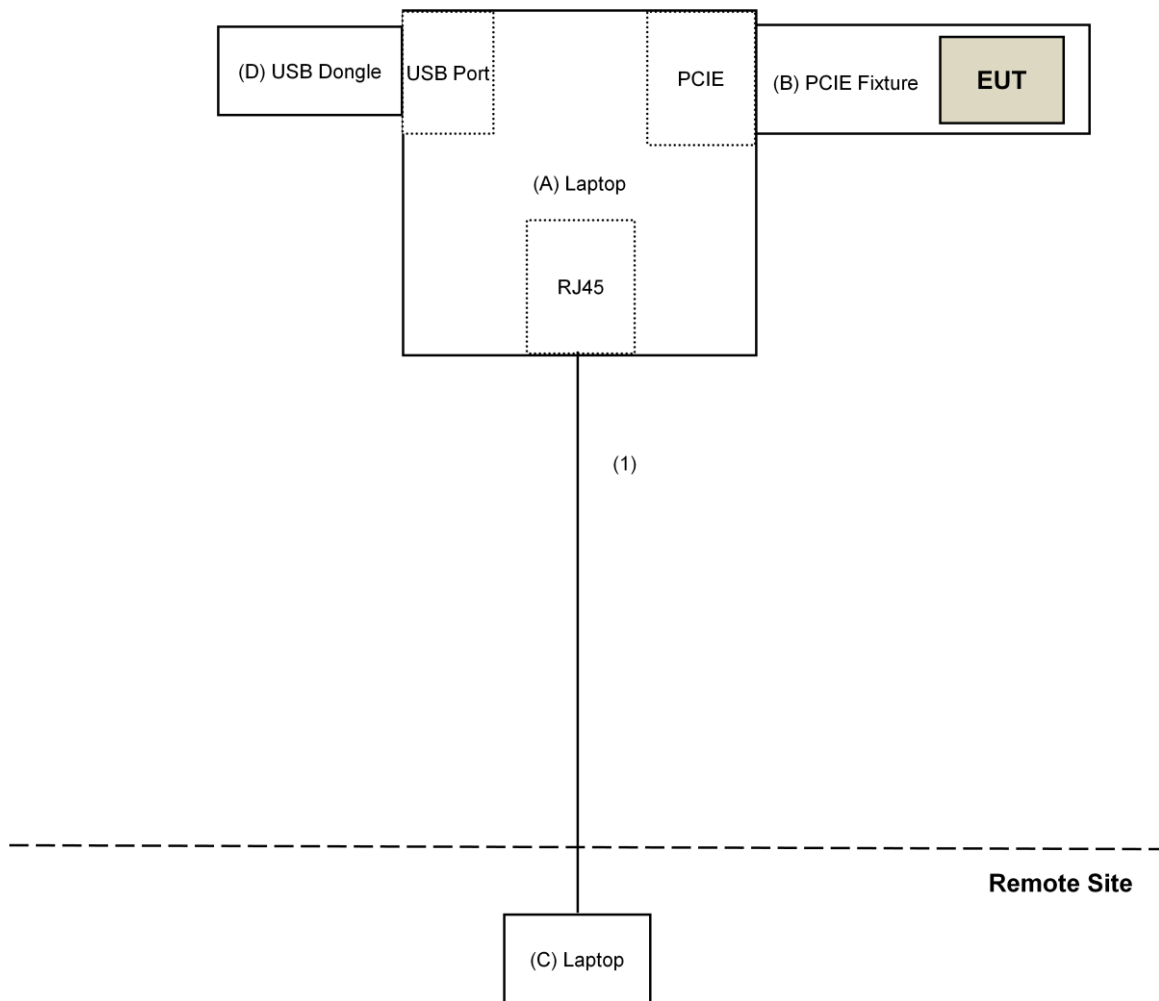

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 DTS Meas Guidance v04
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|--|---|-------------------------------|---|---|
| Test Receiver Agilent | N9038A | MY50010156 | Aug. 18, 2016 | Aug. 17, 2017 |
| Pre-Amplifier(*) EMCI | EMC001340 | 980142 | Jan. 20, 2016 | Jan. 19, 2018 |
| Loop Antenna(*) Electro-Metrics | EM-6879 | 264 | Dec. 16, 2016 | Dec. 15, 2018 |
| RF Cable | NA | LOOPCAB-001 LOOPCAB-002 | Jan. 17, 2017 | Jan. 16, 2018 |
| Pre-Amplifier Mini-Circuits | ZFL-1000VH2B | AMP-ZFL-05 | May 06, 2017 | May 05, 2018 |
| Trilog Broadband Antenna SCHWARZBECK | VULB 9168 | 9168-361 | Dec. 29, 2016 | Dec. 28, 2017 |
| RF Cable | 8D | 966-3-1 966-3-2 966-3-3 | Apr. 01, 2017 | Mar. 31, 2018 |
| Fixed attenuator Mini-Circuits | UNAT-5+ | PAD-3m-3-01 | Oct. 05, 2016 | Oct. 04, 2017 |
| Horn_Antenna SCHWARZBECK | BBHA9120-D | 9120D-406 | Dec. 28, 2016 | Dec. 27, 2017 |
| Pre-Amplifier EMCI | EMC12630SE | 980384 | Feb. 02, 2017 | Feb. 01, 2018 |
| RF Cable | EMC104-SM-SM-1 200 EMC104-SM-SM-2 000 EMC104-SM-SM-5 000 | 160922 150317 150322 | Feb. 02, 2017 Mar. 29, 2017 Mar. 29, 2017 | Feb. 01, 2018 Mar. 28, 2018 Mar. 28, 2018 |
| Spectrum Analyzer Keysight | N9030A | MY54490520 | July 29, 2016 | July 28, 2017 |
| Pre-Amplifier EMCI | EMC184045SE | 980386 | Feb. 02, 2017 | Feb. 01, 2018 |
| Horn_Antenna SCHWARZBECK | BBHA 9170 | BBHA9170608 | Dec. 15, 2016 | Dec. 14, 2017 |
| RF Cable | SUCOFLEX 102 | 36432/2 36433/2 | Jan. 15, 2017 | Jan. 14, 2018 |
| Software | ADT_Radiated_V8. 7.08 | NA | NA | NA |
| Antenna Tower & Turn Table Max-Full | MF-7802 | MF780208406 | NA | NA |
| Boresight Antenna Fixture | FBA-01 | FBA-SIP01 | NA | NA |
| Spectrum Analyzer R&S | FSv40 | 100964 | July 1, 2017 | June 30, 2018 |
| Power meter Anritsu | ML2495A | 1014008 | May 11, 2017 | May 10, 2018 |
| Power sensor Anritsu | MA2411B | 0917122 | May 11, 2017 | May 10, 2018 |

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 3.
4. The CANADA Site Registration No. is 20331-1.
5. Loop antenna was used for all emissions below 30 MHz.
6. Tested Date: July 13 to 17, 2017.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

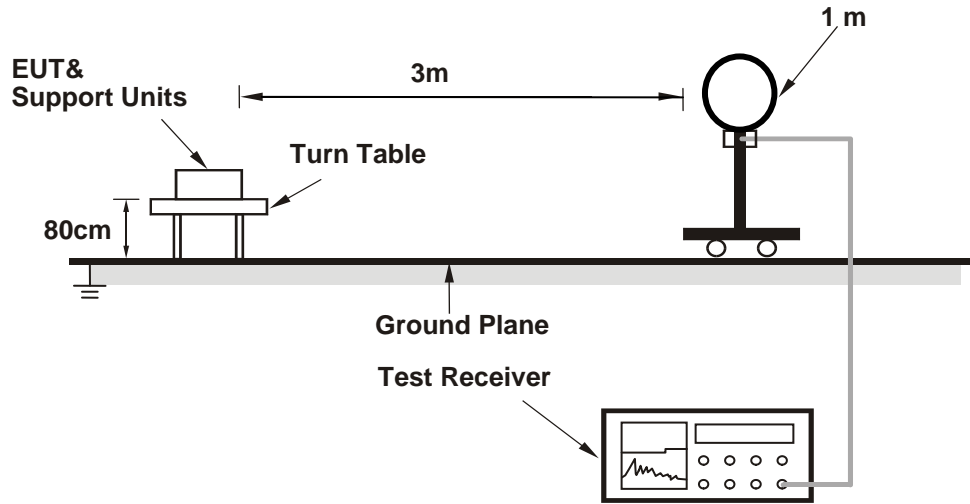

For Radiated emission 30MHz to 1GHz

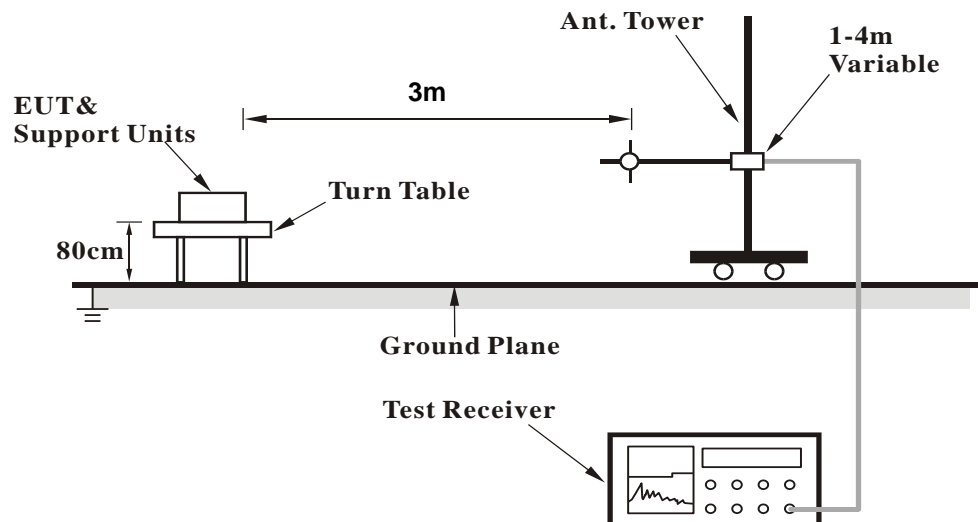

For Radiated emission above 1GHz

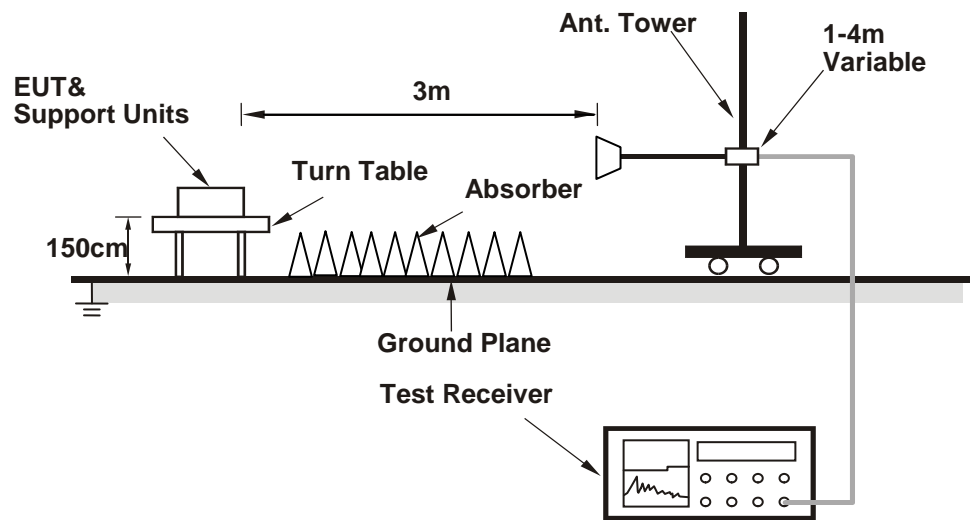

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Contorlling software (DutApiMimoBtFmBrdigeEth.exe [Labtool v2.0.0.43]) has been activated to set the EUT on specific status.

4.1.7 Test Results

Above 1GHz Data :

802.11b

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 1 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 55.4 PK | 74.0 | -18.6 | 2.35 H | 126 | 57.0 | -1.6 |
| 2 | 2390.00 | 41.1 AV | 54.0 | -12.9 | 2.35 H | 126 | 42.7 | -1.6 |
| 3 | *2412.00 | 96.4 PK | | | 2.35 H | 126 | 97.9 | -1.5 |
| 4 | *2412.00 | 94.1 AV | | | 2.35 H | 126 | 95.6 | -1.5 |
| 5 | 4824.00 | 39.5 PK | 74.0 | -34.5 | 1.00 H | 212 | 36.5 | 3.0 |
| 6 | 4824.00 | 32.5 AV | 54.0 | -21.5 | 1.00 H | 212 | 29.5 | 3.0 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 55.8 PK | 74.0 | -18.2 | 2.74 V | 338 | 57.4 | -1.6 |
| 2 | 2390.00 | 44.7 AV | 54.0 | -9.3 | 2.74 V | 338 | 46.3 | -1.6 |
| 3 | *2412.00 | 107.6 PK | | | 2.74 V | 338 | 109.1 | -1.5 |
| 4 | *2412.00 | 105.3 AV | | | 2.74 V | 338 | 106.8 | -1.5 |
| 5 | 4824.00 | 48.8 PK | 74.0 | -25.2 | 3.66 V | 360 | 45.8 | 3.0 |
| 6 | 4824.00 | 46.3 AV | 54.0 | -7.7 | 3.66 V | 360 | 43.3 | 3.0 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 6 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2437.00 | 96.6 PK | | | 2.32 H | 117 | 98.1 | -1.5 |
| 2 | *2437.00 | 94.1 AV | | | 2.32 H | 117 | 95.6 | -1.5 |
| 3 | 4874.00 | 40.1 PK | 74.0 | -33.9 | 1.25 H | 197 | 36.9 | 3.2 |
| 4 | 4874.00 | 32.4 AV | 54.0 | -21.6 | 1.25 H | 197 | 29.2 | 3.2 |
| 5 | 7311.00 | 40.3 PK | 74.0 | -33.7 | 1.66 H | 211 | 31.4 | 8.9 |
| 6 | 7311.00 | 31.5 AV | 54.0 | -22.5 | 1.66 H | 211 | 22.6 | 8.9 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2437.00 | 106.5 PK | | | 3.31 V | 329 | 108.0 | -1.5 |
| 2 | *2437.00 | 104.2 AV | | | 3.31 V | 329 | 105.7 | -1.5 |
| 3 | 4874.00 | 48.8 PK | 74.0 | -25.2 | 3.21 V | 280 | 45.6 | 3.2 |
| 4 | 4874.00 | 46.7 AV | 54.0 | -7.3 | 3.21 V | 280 | 43.5 | 3.2 |
| 5 | 7311.00 | 43.1 PK | 74.0 | -30.9 | 1.99 V | 320 | 34.2 | 8.9 |
| 6 | 7311.00 | 32.0 AV | 54.0 | -22.0 | 1.99 V | 320 | 23.1 | 8.9 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|------------------------|---------------|--------------------------|--------------|
| CHANNEL | TX Channel 11 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2462.00 | 99.1 PK | | | 2.29 H | 114 | 100.5 | -1.4 |
| 2 | *2462.00 | 96.8 AV | | | 2.29 H | 114 | 98.2 | -1.4 |
| 3 | 2483.50 | 55.6 PK | 74.0 | -18.4 | 2.29 H | 114 | 57.0 | -1.4 |
| 4 | 2483.50 | 41.3 AV | 54.0 | -12.7 | 2.29 H | 114 | 42.7 | -1.4 |
| 5 | 4924.00 | 39.2 PK | 74.0 | -34.8 | 1.17 H | 209 | 35.9 | 3.3 |
| 6 | 4924.00 | 32.9 AV | 54.0 | -21.1 | 1.17 H | 209 | 29.6 | 3.3 |
| 7 | 7386.00 | 40.8 PK | 74.0 | -33.2 | 1.69 H | 200 | 31.7 | 9.1 |
| 8 | 7386.00 | 31.8 AV | 54.0 | -22.2 | 1.69 H | 200 | 22.7 | 9.1 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2462.00 | 109.4 PK | | | 2.66 V | 336 | 110.8 | -1.4 |
| 2 | *2462.00 | 107.1 AV | | | 2.66 V | 336 | 108.5 | -1.4 |
| 3 | 2483.50 | 56.1 PK | 74.0 | -17.9 | 2.66 V | 336 | 57.5 | -1.4 |
| 4 | 2483.50 | 44.1 AV | 54.0 | -9.9 | 2.66 V | 336 | 45.5 | -1.4 |
| 5 | 4924.00 | 48.7 PK | 74.0 | -25.3 | 3.23 V | 277 | 45.4 | 3.3 |
| 6 | 4924.00 | 46.7 AV | 54.0 | -7.3 | 3.23 V | 277 | 43.4 | 3.3 |
| 7 | 7386.00 | 42.9 PK | 74.0 | -31.1 | 2.03 V | 332 | 33.8 | 9.1 |
| 8 | 7386.00 | 32.5 AV | 54.0 | -21.5 | 2.03 V | 332 | 23.4 | 9.1 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 1 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 55.6 PK | 74.0 | -18.4 | 1.02 H | 274 | 57.2 | -1.6 |
| 2 | 2390.00 | 42.8 AV | 54.0 | -11.2 | 1.02 H | 274 | 44.4 | -1.6 |
| 3 | *2412.00 | 97.3 PK | | | 1.02 H | 274 | 98.8 | -1.5 |
| 4 | *2412.00 | 87.5 AV | | | 1.02 H | 274 | 89.0 | -1.5 |
| 5 | 4824.00 | 38.7 PK | 74.0 | -35.3 | 1.19 H | 246 | 35.7 | 3.0 |
| 6 | 4824.00 | 25.9 AV | 54.0 | -28.1 | 1.19 H | 246 | 22.9 | 3.0 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 70.7 PK | 74.0 | -3.3 | 2.52 V | 354 | 72.3 | -1.6 |
| 2 | 2390.00 | 53.9 AV | 54.0 | -0.1 | 2.52 V | 354 | 55.5 | -1.6 |
| 3 | *2412.00 | 109.7 PK | | | 2.52 V | 354 | 111.2 | -1.5 |
| 4 | *2412.00 | 100.5 AV | | | 2.52 V | 354 | 102.0 | -1.5 |
| 5 | 4824.00 | 42.6 PK | 74.0 | -31.4 | 3.03 V | 16 | 39.6 | 3.0 |
| 6 | 4824.00 | 29.7 AV | 54.0 | -24.3 | 3.03 V | 16 | 26.7 | 3.0 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 6 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 55.2 PK | 74.0 | -18.8 | 1.09 H | 264 | 56.8 | -1.6 |
| 2 | 2390.00 | 42.7 AV | 54.0 | -11.3 | 1.09 H | 264 | 44.3 | -1.6 |
| 3 | *2437.00 | 100.8 PK | | | 1.09 H | 264 | 102.3 | -1.5 |
| 4 | *2437.00 | 90.3 AV | | | 1.09 H | 264 | 91.8 | -1.5 |
| 5 | 2483.50 | 55.5 PK | 74.0 | -18.5 | 1.09 H | 264 | 56.9 | -1.4 |
| 6 | 2483.50 | 41.3 AV | 54.0 | -12.7 | 1.09 H | 264 | 42.7 | -1.4 |
| 7 | 4874.00 | 38.7 PK | 74.0 | -35.3 | 1.20 H | 242 | 35.5 | 3.2 |
| 8 | 4874.00 | 25.6 AV | 54.0 | -28.4 | 1.20 H | 242 | 22.4 | 3.2 |
| 9 | 7311.00 | 54.3 PK | 74.0 | -19.7 | 2.04 H | 168 | 45.4 | 8.9 |
| 10 | 7311.00 | 38.1 AV | 54.0 | -15.9 | 2.04 H | 168 | 29.2 | 8.9 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 57.3 PK | 74.0 | -16.7 | 2.50 V | 360 | 58.9 | -1.6 |
| 2 | 2390.00 | 43.0 AV | 54.0 | -11.0 | 2.50 V | 360 | 44.6 | -1.6 |
| 3 | *2437.00 | 113.3 PK | | | 2.50 V | 360 | 114.8 | -1.5 |
| 4 | *2437.00 | 103.3 AV | | | 2.50 V | 360 | 104.8 | -1.5 |
| 5 | 2483.50 | 57.8 PK | 74.0 | -16.2 | 2.50 V | 360 | 59.2 | -1.4 |
| 6 | 2483.50 | 43.1 AV | 54.0 | -10.9 | 2.50 V | 360 | 44.5 | -1.4 |
| 7 | 4874.00 | 42.2 PK | 74.0 | -31.8 | 3.01 V | 29 | 39.0 | 3.2 |
| 8 | 4874.00 | 29.4 AV | 54.0 | -24.6 | 3.01 V | 29 | 26.2 | 3.2 |
| 9 | 7311.00 | 51.3 PK | 74.0 | -22.7 | 2.00 V | 302 | 42.4 | 8.9 |
| 10 | 7311.00 | 33.0 AV | 54.0 | -21.0 | 2.00 V | 302 | 24.1 | 8.9 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|------------------------|---------------|--------------------------|--------------|
| CHANNEL | TX Channel 11 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2462.00 | 96.4 PK | | | 1.06 H | 261 | 97.8 | -1.4 |
| 2 | *2462.00 | 86.3 AV | | | 1.06 H | 261 | 87.7 | -1.4 |
| 3 | 2483.50 | 55.6 PK | 74.0 | -18.4 | 1.06 H | 261 | 57.0 | -1.4 |
| 4 | 2483.50 | 41.6 AV | 54.0 | -12.4 | 1.06 H | 261 | 43.0 | -1.4 |
| 5 | 4924.00 | 38.3 PK | 74.0 | -35.7 | 1.21 H | 232 | 35.0 | 3.3 |
| 6 | 4924.00 | 25.2 AV | 54.0 | -28.8 | 1.21 H | 232 | 21.9 | 3.3 |
| 7 | 7386.00 | 54.6 PK | 74.0 | -19.4 | 2.02 H | 178 | 45.5 | 9.1 |
| 8 | 7386.00 | 38.5 AV | 54.0 | -15.5 | 2.02 H | 178 | 29.4 | 9.1 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2462.00 | 109.4 PK | | | 2.65 V | 360 | 110.8 | -1.4 |
| 2 | *2462.00 | 99.7 AV | | | 2.65 V | 360 | 101.1 | -1.4 |
| 3 | 2483.50 | 66.8 PK | 74.0 | -7.2 | 2.65 V | 360 | 68.2 | -1.4 |
| 4 | 2483.50 | 49.2 AV | 54.0 | -4.8 | 2.65 V | 360 | 50.6 | -1.4 |
| 5 | 4924.00 | 42.2 PK | 74.0 | -31.8 | 3.07 V | 24 | 38.9 | 3.3 |
| 6 | 4924.00 | 29.2 AV | 54.0 | -24.8 | 3.07 V | 24 | 25.9 | 3.3 |
| 7 | 7386.00 | 51.1 PK | 74.0 | -22.9 | 2.03 V | 312 | 42.0 | 9.1 |
| 8 | 7386.00 | 32.5 AV | 54.0 | -21.5 | 2.03 V | 312 | 23.4 | 9.1 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 1 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 54.1 PK | 74.0 | -19.9 | 1.06 H | 247 | 55.7 | -1.6 |
| 2 | 2390.00 | 41.8 AV | 54.0 | -12.2 | 1.06 H | 247 | 43.4 | -1.6 |
| 3 | *2412.00 | 96.0 PK | | | 1.06 H | 247 | 97.5 | -1.5 |
| 4 | *2412.00 | 85.4 AV | | | 1.06 H | 247 | 86.9 | -1.5 |
| 5 | 4824.00 | 38.0 PK | 74.0 | -36.0 | 1.12 H | 232 | 35.0 | 3.0 |
| 6 | 4824.00 | 24.9 AV | 54.0 | -29.1 | 1.12 H | 232 | 21.9 | 3.0 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 70.9 PK | 74.0 | -3.1 | 3.01 V | 360 | 72.5 | -1.6 |
| 2 | 2390.00 | 51.1 AV | 54.0 | -2.9 | 3.01 V | 360 | 52.7 | -1.6 |
| 3 | *2412.00 | 108.6 PK | | | 3.01 V | 360 | 110.1 | -1.5 |
| 4 | *2412.00 | 98.8 AV | | | 3.01 V | 360 | 100.3 | -1.5 |
| 5 | 4824.00 | 42.5 PK | 74.0 | -31.5 | 3.07 V | 4 | 39.5 | 3.0 |
| 6 | 4824.00 | 29.2 AV | 54.0 | -24.8 | 3.07 V | 4 | 26.2 | 3.0 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 6 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 54.6 PK | 74.0 | -19.4 | 1.09 H | 274 | 56.2 | -1.6 |
| 2 | 2390.00 | 42.3 AV | 54.0 | -11.7 | 1.09 H | 274 | 43.9 | -1.6 |
| 3 | *2437.00 | 100.3 PK | | | 1.09 H | 274 | 101.8 | -1.5 |
| 4 | *2437.00 | 90.0 AV | | | 1.09 H | 274 | 91.5 | -1.5 |
| 5 | 2483.50 | 55.3 PK | 74.0 | -18.7 | 1.09 H | 274 | 56.7 | -1.4 |
| 6 | 2483.50 | 40.9 AV | 54.0 | -13.1 | 1.09 H | 274 | 42.3 | -1.4 |
| 7 | 4874.00 | 38.4 PK | 74.0 | -35.6 | 1.26 H | 233 | 35.2 | 3.2 |
| 8 | 4874.00 | 25.3 AV | 54.0 | -28.7 | 1.26 H | 233 | 22.1 | 3.2 |
| 9 | 7311.00 | 53.8 PK | 74.0 | -20.2 | 1.99 H | 178 | 44.9 | 8.9 |
| 10 | 7311.00 | 37.7 AV | 54.0 | -16.3 | 1.99 H | 178 | 28.8 | 8.9 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 61.7 PK | 74.0 | -12.3 | 2.75 V | 360 | 63.3 | -1.6 |
| 2 | 2390.00 | 44.0 AV | 54.0 | -10.0 | 2.75 V | 360 | 45.6 | -1.6 |
| 3 | *2437.00 | 112.8 PK | | | 2.75 V | 360 | 114.3 | -1.5 |
| 4 | *2437.00 | 102.9 AV | | | 2.75 V | 360 | 104.4 | -1.5 |
| 5 | 2483.50 | 65.8 PK | 74.0 | -8.2 | 2.75 V | 360 | 67.2 | -1.4 |
| 6 | 2483.50 | 43.7 AV | 54.0 | -10.3 | 2.75 V | 360 | 45.1 | -1.4 |
| 7 | 4874.00 | 42.3 PK | 74.0 | -31.7 | 3.06 V | 28 | 39.1 | 3.2 |
| 8 | 4874.00 | 29.4 AV | 54.0 | -24.6 | 3.06 V | 28 | 26.2 | 3.2 |
| 9 | 7311.00 | 50.9 PK | 74.0 | -23.1 | 2.05 V | 299 | 42.0 | 8.9 |
| 10 | 7311.00 | 32.7 AV | 54.0 | -21.3 | 2.05 V | 299 | 23.8 | 8.9 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|------------------------|---------------|--------------------------|--------------|
| CHANNEL | TX Channel 11 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2462.00 | 96.6 PK | | | 1.07 H | 260 | 98.0 | -1.4 |
| 2 | *2462.00 | 85.9 AV | | | 1.07 H | 260 | 87.3 | -1.4 |
| 3 | 2483.50 | 54.4 PK | 74.0 | -19.6 | 1.07 H | 260 | 55.8 | -1.4 |
| 4 | 2483.50 | 41.9 AV | 54.0 | -12.1 | 1.07 H | 260 | 43.3 | -1.4 |
| 5 | 4924.00 | 38.7 PK | 74.0 | -35.3 | 1.17 H | 234 | 35.4 | 3.3 |
| 6 | 4924.00 | 25.3 AV | 54.0 | -28.7 | 1.17 H | 234 | 22.0 | 3.3 |
| 7 | 7386.00 | 54.6 PK | 74.0 | -19.4 | 1.98 H | 170 | 45.5 | 9.1 |
| 8 | 7386.00 | 38.4 AV | 54.0 | -15.6 | 1.98 H | 170 | 29.3 | 9.1 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2462.00 | 109.1 PK | | | 2.65 V | 360 | 110.5 | -1.4 |
| 2 | *2462.00 | 98.8 AV | | | 2.65 V | 360 | 100.2 | -1.4 |
| 3 | 2483.50 | 67.3 PK | 74.0 | -6.7 | 2.65 V | 360 | 68.7 | -1.4 |
| 4 | 2483.50 | 50.5 AV | 54.0 | -3.5 | 2.65 V | 360 | 51.9 | -1.4 |
| 5 | 4924.00 | 41.8 PK | 74.0 | -32.2 | 3.03 V | 12 | 38.5 | 3.3 |
| 6 | 4924.00 | 28.7 AV | 54.0 | -25.3 | 3.03 V | 12 | 25.4 | 3.3 |
| 7 | 7386.00 | 50.8 PK | 74.0 | -23.2 | 2.04 V | 301 | 41.7 | 9.1 |
| 8 | 7386.00 | 32.0 AV | 54.0 | -22.0 | 2.04 V | 301 | 22.9 | 9.1 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT40)

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 3 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 55.6 PK | 74.0 | -18.4 | 1.09 H | 245 | 57.2 | -1.6 |
| 2 | 2390.00 | 43.0 AV | 54.0 | -11.0 | 1.09 H | 245 | 44.6 | -1.6 |
| 3 | *2422.00 | 92.5 PK | | | 1.09 H | 245 | 94.1 | -1.6 |
| 4 | *2422.00 | 81.5 AV | | | 1.09 H | 245 | 83.1 | -1.6 |
| 5 | 4844.00 | 38.1 PK | 74.0 | -35.9 | 1.11 H | 238 | 35.0 | 3.1 |
| 6 | 4844.00 | 24.9 AV | 54.0 | -29.1 | 1.11 H | 238 | 21.8 | 3.1 |
| 7 | 7266.00 | 54.6 PK | 74.0 | -19.4 | 1.95 H | 157 | 45.7 | 8.9 |
| 8 | 7266.00 | 38.1 AV | 54.0 | -15.9 | 1.95 H | 157 | 29.2 | 8.9 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 68.7 PK | 74.0 | -5.3 | 2.70 V | 254 | 70.3 | -1.6 |
| 2 | 2390.00 | 53.1 AV | 54.0 | -0.9 | 2.70 V | 254 | 54.7 | -1.6 |
| 3 | *2422.00 | 103.9 PK | | | 2.70 V | 254 | 105.5 | -1.6 |
| 4 | *2422.00 | 93.7 AV | | | 2.70 V | 254 | 95.3 | -1.6 |
| 5 | 4844.00 | 42.2 PK | 74.0 | -31.8 | 3.01 V | 23 | 39.1 | 3.1 |
| 6 | 4844.00 | 28.9 AV | 54.0 | -25.1 | 3.01 V | 23 | 25.8 | 3.1 |
| 7 | 7266.00 | 51.3 PK | 74.0 | -22.7 | 1.99 V | 315 | 42.4 | 8.9 |
| 8 | 7266.00 | 32.3 AV | 54.0 | -21.7 | 1.99 V | 315 | 23.4 | 8.9 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 6 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 55.1 PK | 74.0 | -18.9 | 1.07 H | 236 | 56.7 | -1.6 |
| 2 | 2390.00 | 42.7 AV | 54.0 | -11.3 | 1.07 H | 236 | 44.3 | -1.6 |
| 3 | *2437.00 | 94.6 PK | | | 1.07 H | 236 | 96.1 | -1.5 |
| 4 | *2437.00 | 82.9 AV | | | 1.07 H | 236 | 84.4 | -1.5 |
| 5 | 2483.50 | 55.1 PK | 74.0 | -18.9 | 1.07 H | 236 | 56.5 | -1.4 |
| 6 | 2483.50 | 41.0 AV | 54.0 | -13.0 | 1.07 H | 236 | 42.4 | -1.4 |
| 7 | 4874.00 | 39.0 PK | 74.0 | -35.0 | 1.23 H | 218 | 35.8 | 3.2 |
| 8 | 4874.00 | 25.5 AV | 54.0 | -28.5 | 1.23 H | 218 | 22.3 | 3.2 |
| 9 | 7311.00 | 54.7 PK | 74.0 | -19.3 | 1.97 H | 158 | 45.8 | 8.9 |
| 10 | 7311.00 | 38.2 AV | 54.0 | -15.8 | 1.97 H | 158 | 29.3 | 8.9 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 2390.00 | 65.0 PK | 74.0 | -9.0 | 3.34 V | 360 | 66.6 | -1.6 |
| 2 | 2390.00 | 50.2 AV | 54.0 | -3.8 | 3.34 V | 360 | 51.8 | -1.6 |
| 3 | *2437.00 | 106.1 PK | | | 3.34 V | 360 | 107.6 | -1.5 |
| 4 | *2437.00 | 95.2 AV | | | 3.34 V | 360 | 96.7 | -1.5 |
| 5 | 2483.50 | 59.2 PK | 74.0 | -14.8 | 3.34 V | 360 | 60.6 | -1.4 |
| 6 | 2483.50 | 45.1 AV | 54.0 | -8.9 | 3.34 V | 360 | 46.5 | -1.4 |
| 7 | 4874.00 | 41.4 PK | 74.0 | -32.6 | 3.01 V | 13 | 38.2 | 3.2 |
| 8 | 4874.00 | 28.5 AV | 54.0 | -25.5 | 3.01 V | 13 | 25.3 | 3.2 |
| 9 | 7311.00 | 51.1 PK | 74.0 | -22.9 | 2.08 V | 307 | 42.2 | 8.9 |
| 10 | 7311.00 | 32.1 AV | 54.0 | -21.9 | 2.08 V | 307 | 23.2 | 8.9 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 9 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2452.00 | 94.2 PK | | | 1.09 H | 237 | 95.7 | -1.5 |
| 2 | *2452.00 | 82.6 AV | | | 1.09 H | 237 | 84.1 | -1.5 |
| 3 | 2483.50 | 55.2 PK | 74.0 | -18.8 | 1.09 H | 237 | 56.6 | -1.4 |
| 4 | 2483.50 | 42.9 AV | 54.0 | -11.1 | 1.09 H | 237 | 44.3 | -1.4 |
| 5 | 4904.00 | 38.7 PK | 74.0 | -35.3 | 1.14 H | 235 | 35.5 | 3.2 |
| 6 | 4904.00 | 25.0 AV | 54.0 | -29.0 | 1.14 H | 235 | 21.8 | 3.2 |
| 7 | 7356.00 | 54.5 PK | 74.0 | -19.5 | 2.00 H | 158 | 45.4 | 9.1 |
| 8 | 7356.00 | 38.6 AV | 54.0 | -15.4 | 2.00 H | 158 | 29.5 | 9.1 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *2452.00 | 105.8 PK | | | 2.67 V | 356 | 107.3 | -1.5 |
| 2 | *2452.00 | 94.9 AV | | | 2.67 V | 356 | 96.4 | -1.5 |
| 3 | 2483.50 | 65.1 PK | 74.0 | -8.9 | 2.67 V | 356 | 66.5 | -1.4 |
| 4 | 2483.50 | 51.7 AV | 54.0 | -2.3 | 2.67 V | 356 | 53.1 | -1.4 |
| 5 | 4904.00 | 42.3 PK | 74.0 | -31.7 | 3.09 V | 20 | 39.1 | 3.2 |
| 6 | 4904.00 | 29.2 AV | 54.0 | -24.8 | 3.09 V | 20 | 26.0 | 3.2 |
| 7 | 7356.00 | 51.3 PK | 74.0 | -22.7 | 2.03 V | 297 | 42.2 | 9.1 |
| 8 | 7356.00 | 32.4 AV | 54.0 | -21.6 | 2.03 V | 297 | 23.3 | 9.1 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:
802.11n (HT20)

| | | | |
|------------------------|--------------|--------------------------|-----------------|
| CHANNEL | TX Channel 6 | DETECTOR FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 9kHz~1GHz | | |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 100.02 | 32.4 QP | 43.5 | -11.1 | 2.70 H | 312 | 45.0 | -12.6 |
| 2 | 250.43 | 39.9 QP | 46.0 | -6.1 | 1.90 H | 310 | 49.5 | -9.6 |
| 3 | 562.90 | 27.2 QP | 46.0 | -18.8 | 1.20 H | 271 | 29.0 | -1.8 |
| 4 | 719.45 | 30.6 QP | 46.0 | -15.4 | 1.23 H | 330 | 30.2 | 0.4 |
| 5 | 797.31 | 33.1 QP | 46.0 | -12.9 | 1.33 H | 346 | 31.1 | 2.0 |
| 6 | 939.29 | 33.6 QP | 46.0 | -12.4 | 1.80 H | 283 | 29.9 | 3.7 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 41.92 | 36.5 QP | 40.0 | -3.5 | 1.00 V | 320 | 45.2 | -8.7 |
| 2 | 248.54 | 30.5 QP | 46.0 | -15.5 | 1.50 V | 294 | 40.1 | -9.6 |
| 3 | 401.36 | 27.2 QP | 46.0 | -18.8 | 2.30 V | 303 | 32.5 | -5.3 |
| 4 | 537.85 | 29.8 QP | 46.0 | -16.2 | 1.19 V | 332 | 32.2 | -2.4 |
| 5 | 700.69 | 28.6 QP | 46.0 | -17.4 | 2.20 V | 359 | 28.2 | 0.4 |
| 6 | 873.31 | 32.1 QP | 46.0 | -13.9 | 2.20 V | 344 | 29.5 | 2.6 |

REMARKS:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Output Power Measurement

4.2.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.2.2 Test Setup



4.2.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.2.4 Test Procedures

A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the power level.

4.2.5 Deviation from Test Standard

No deviation.

4.2.6 EUT Operating Conditions

Same as Item 4.3.6.

4.2.7 Test Results

FOR PEAK POWER

802.11b

| Channel | Frequency (MHz) | Peak Power (dBm) | | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass /Fail |
|---------|-----------------|------------------|---------|------------------|-------------------|-------------|------------|
| | | Chain 0 | Chain 1 | | | | |
| 1 | 2412 | 17.67 | 17.99 | 121.43 | 20.84 | 30.00 | Pass |
| 6 | 2437 | 19.39 | 19.80 | 182.395 | 22.61 | 30.00 | Pass |
| 11 | 2462 | 19.39 | 19.74 | 181.085 | 22.58 | 30.00 | Pass |

802.11g

| Channel | Frequency (MHz) | Peak Power (dBm) | | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass /Fail |
|---------|-----------------|------------------|---------|------------------|-------------------|-------------|------------|
| | | Chain 0 | Chain 1 | | | | |
| 1 | 2412 | 16.68 | 17.00 | 96.678 | 19.85 | 30.00 | Pass |
| 6 | 2437 | 25.22 | 25.42 | 680.997 | 28.33 | 30.00 | Pass |
| 11 | 2462 | 16.99 | 16.50 | 94.671 | 19.76 | 30.00 | Pass |

802.11n (HT20)

| Channel | Frequency (MHz) | Peak Power (dBm) | | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass /Fail |
|---------|-----------------|------------------|---------|------------------|-------------------|-------------|------------|
| | | Chain 0 | Chain 1 | | | | |
| 1 | 2412 | 20.55 | 22.18 | 278.697 | 24.45 | 30.00 | Pass |
| 6 | 2437 | 25.46 | 25.61 | 715.475 | 28.55 | 30.00 | Pass |
| 11 | 2462 | 22.10 | 23.15 | 368.719 | 25.67 | 30.00 | Pass |

802.11n (HT40)

| Channel | Frequency (MHz) | Peak Power (dBm) | | Total Power (mW) | Total Power (dBm) | Limit (dBm) | Pass /Fail |
|---------|-----------------|------------------|---------|------------------|-------------------|-------------|------------|
| | | Chain 0 | Chain 1 | | | | |
| 3 | 2422 | 19.10 | 20.02 | 181.745 | 22.59 | 30.00 | Pass |
| 6 | 2437 | 21.98 | 21.17 | 288.679 | 24.60 | 30.00 | Pass |
| 9 | 2452 | 20.33 | 21.64 | 253.776 | 24.04 | 30.00 | Pass |

FOR AVERAGE POWER

802.11b

| Channel | Frequency (MHz) | Average Power (dBm) | | Total Power (mW) | Total Power (dBm) |
|---------|-----------------|---------------------|---------|------------------|-------------------|
| | | Chain 0 | Chain 1 | | |
| 1 | 2412 | 14.75 | 14.91 | 60.828 | 17.84 |
| 6 | 2437 | 16.44 | 16.78 | 91.698 | 19.62 |
| 11 | 2462 | 16.68 | 16.66 | 92.904 | 19.68 |

802.11g

| Channel | Frequency (MHz) | Average Power (dBm) | | Total Power (mW) | Total Power (dBm) |
|---------|-----------------|---------------------|---------|------------------|-------------------|
| | | Chain 0 | Chain 1 | | |
| 1 | 2412 | 13.41 | 14.21 | 48.291 | 16.84 |
| 6 | 2437 | 17.38 | 17.32 | 108.653 | 20.36 |
| 11 | 2462 | 13.44 | 14.00 | 47.199 | 16.74 |

802.11n (HT20)

| Channel | Frequency (MHz) | Average Power (dBm) | | Total Power (mW) | Total Power (dBm) |
|---------|-----------------|---------------------|---------|------------------|-------------------|
| | | Chain 0 | Chain 1 | | |
| 1 | 2412 | 12.90 | 13.96 | 44.387 | 16.47 |
| 6 | 2437 | 17.10 | 17.19 | 103.646 | 20.16 |
| 11 | 2462 | 13.22 | 14.01 | 46.166 | 16.64 |

802.11n (HT40)

| Channel | Frequency (MHz) | Average Power (dBm) | | Total Power (mW) | Total Power (dBm) |
|---------|-----------------|---------------------|---------|------------------|-------------------|
| | | Chain 0 | Chain 1 | | |
| 3 | 2422 | 10.12 | 11.14 | 23.282 | 13.67 |
| 6 | 2437 | 12.88 | 12.94 | 39.088 | 15.92 |
| 9 | 2452 | 11.49 | 12.12 | 30.386 | 14.83 |

4.3 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---