

Wi-Fi 2.4G Band

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.989$ S/m; $\epsilon_r = 50.96$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2015/3/19
- Probe: EX3DV4 - SN3665; ConvF(7.23, 7.23, 7.23); Calibrated: 2015/5/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge 4/Aux Ant/802.11b/Ch6/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.262 W/kg

Edge 4/Aux Ant/802.11b/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 3.847 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.497 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.086 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.374 W/kg

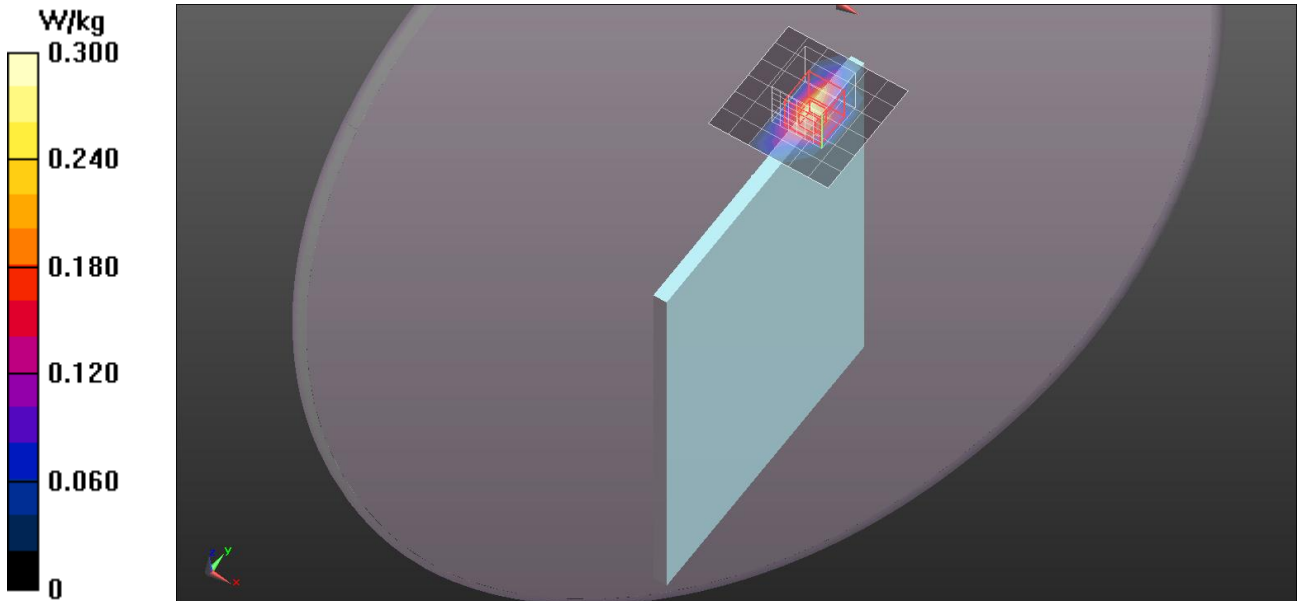


Wi-Fi 2.4G Band

Frequency: 2437 MHz; Duty Cycle: 1:1

Edge 4/Aux Ant/802.11b/Ch6/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.389 W/kg

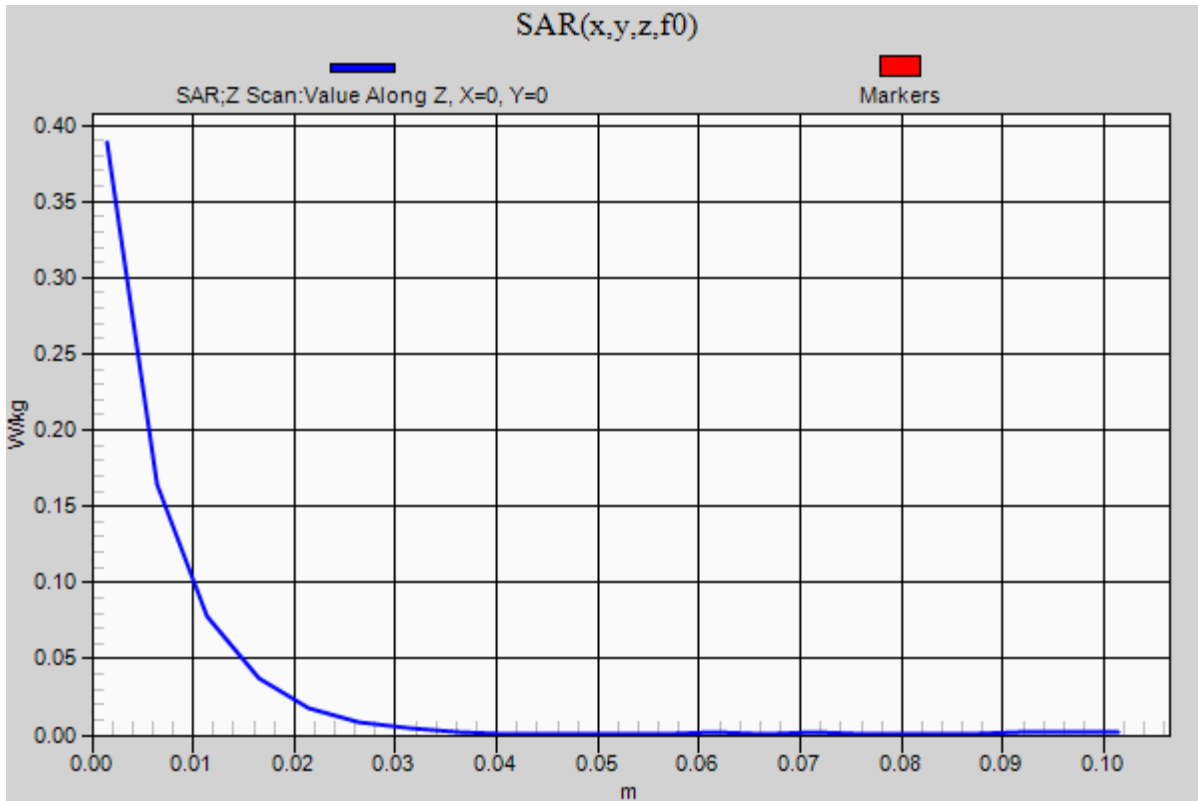

Wi-Fi 5G Band

Frequency: 5300 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5300.2$ MHz; $\sigma = 5.413$ S/m; $\epsilon_r = 48.224$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2015/3/19
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2015/5/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge 4/Aux Ant/802.11a/Ch60/Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.31 W/kg

Edge 4/Aux Ant/802.11a/Ch60/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm,


dz=2mm

Reference Value = 2.200 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 3.22 W/kg

SAR(1 g) = 0.745 W/kg; SAR(10 g) = 0.225 W/kg


Maximum value of SAR (measured) = 1.82 W/kg

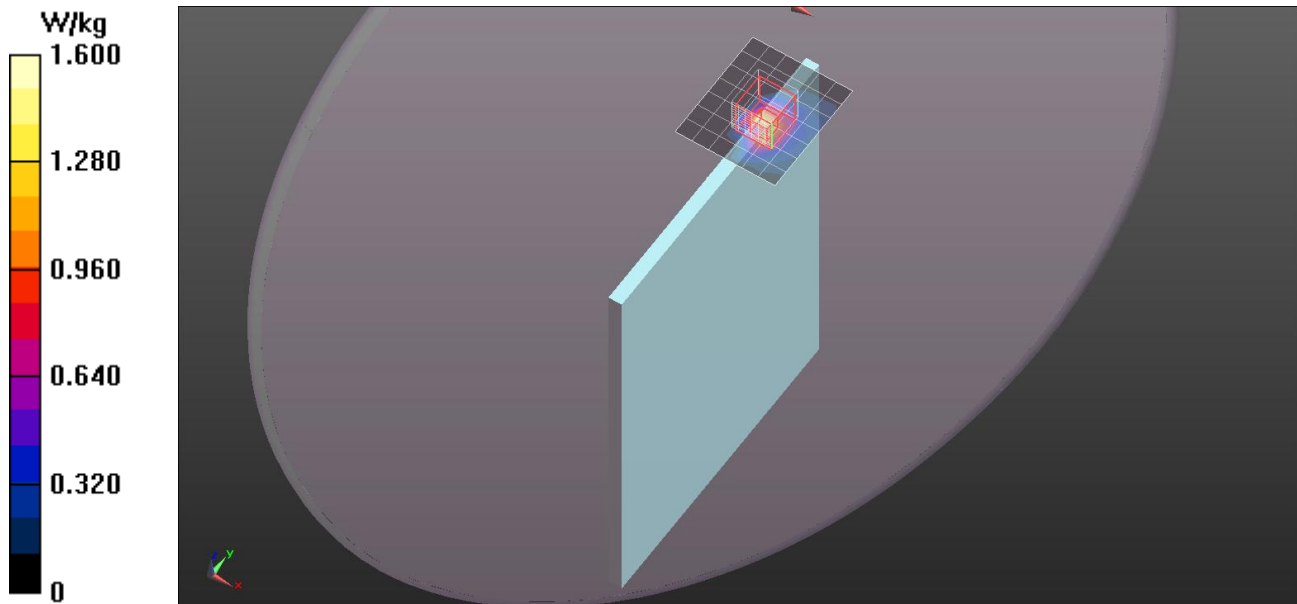

Wi-Fi 5G Band

Frequency: 5300 MHz; Duty Cycle: 1:1

Edge 4/Aux Ant/802.11a/Ch60/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.88 W/kg

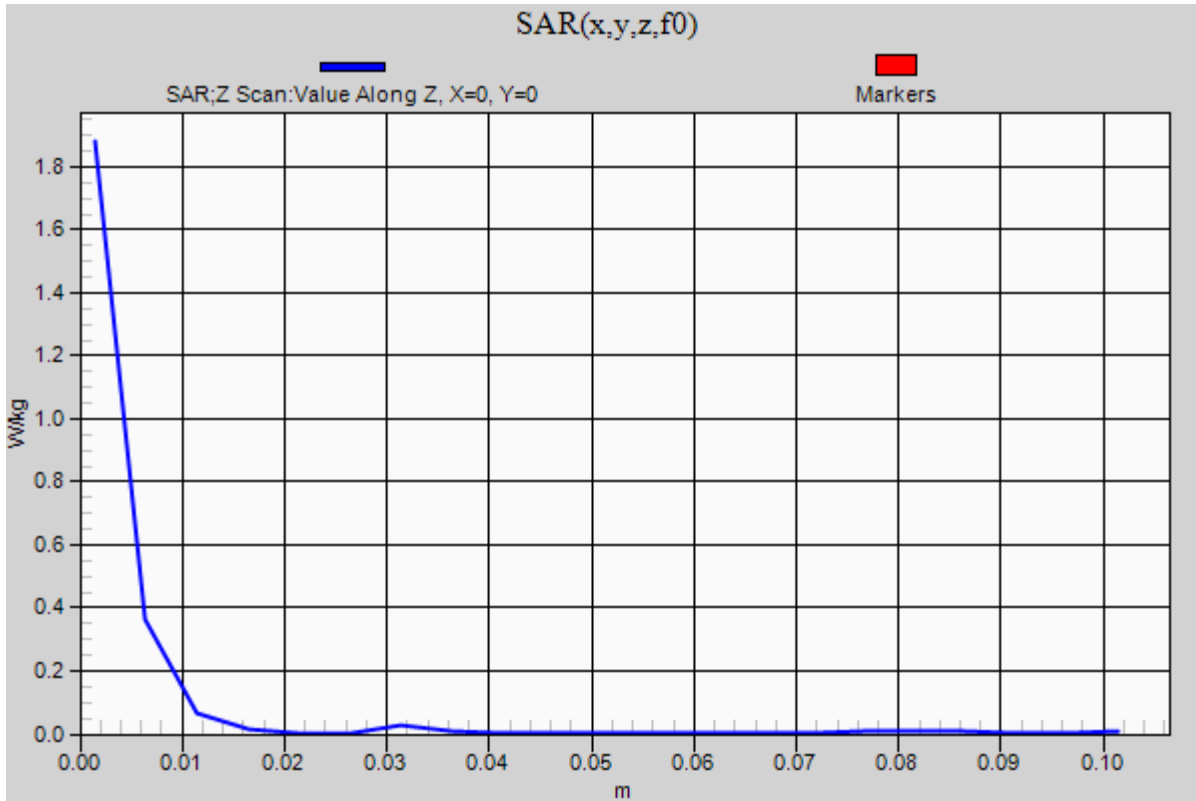

Wi-Fi 5G Band

Frequency: 5560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5560.9$ MHz; $\sigma = 5.697$ S/m; $\epsilon_r = 47.714$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2015/3/19
- Probe: EX3DV4 - SN3665; ConvF(3.74, 3.74, 3.74); Calibrated: 2015/5/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge 4/Aux Ant/802.11a/Ch112/Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.10 W/kg

Edge 4/Aux Ant/802.11a/Ch112/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm



Reference Value = 0.6600 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.73 W/kg

Peak SAR (extrapolated) = 2.73 W/kg

SAR(1 g) = 0.607 W/kg; SAR(10 g) = 0.186 W/kg


Maximum value of SAR (measured) = 1.53 W/kg

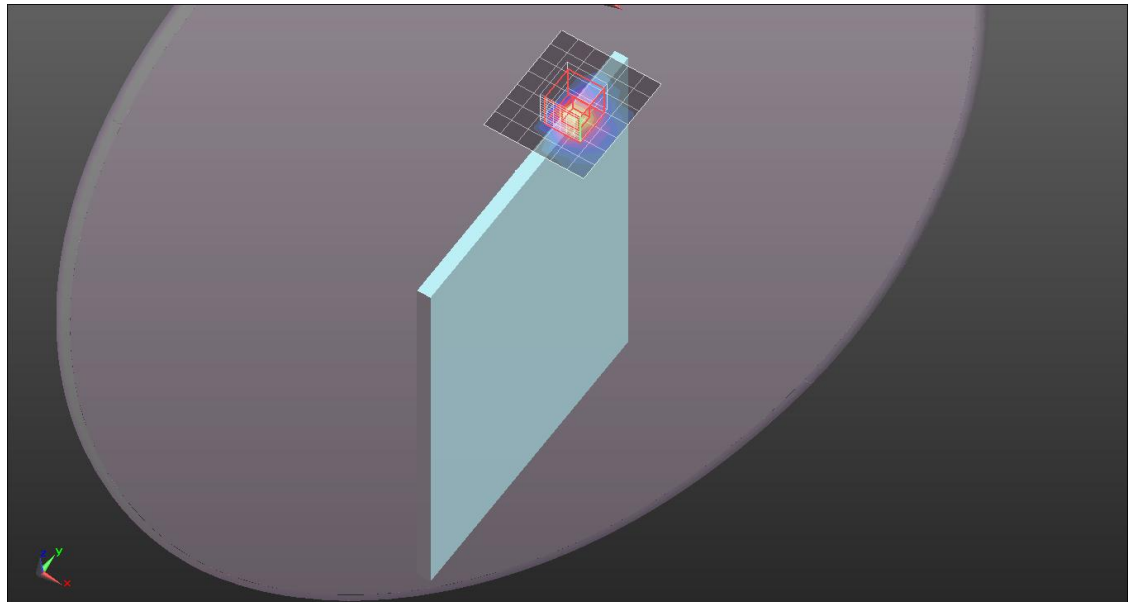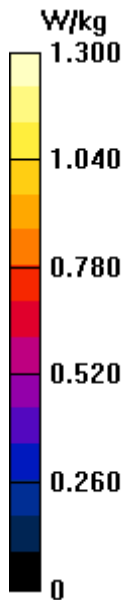

Wi-Fi 5G Band

Frequency: 5560 MHz; Duty Cycle: 1:1

Edge 4/Aux Ant/802.11a/Ch112/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.53 W/kg

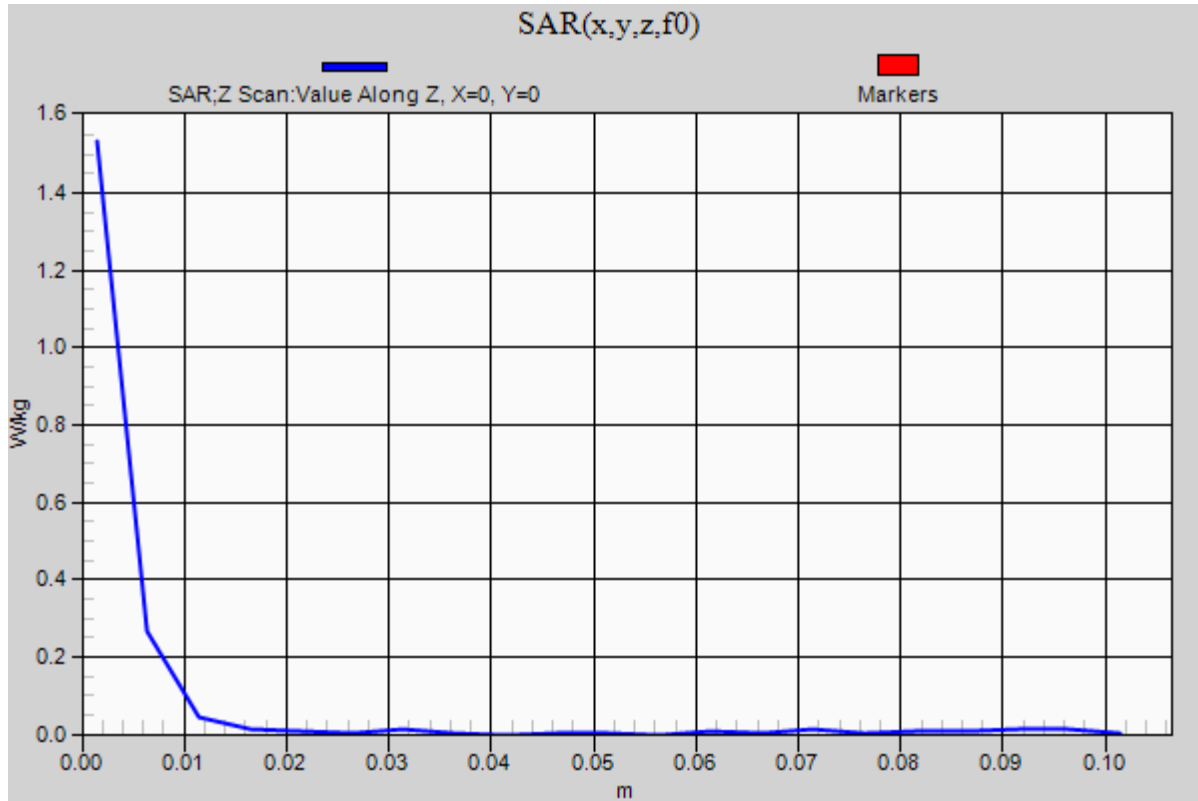

Wi-Fi 5G Band

Frequency: 5805 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5805.1$ MHz; $\sigma = 6.057$ S/m; $\epsilon_r = 47.255$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2015/3/19
- Probe: EX3DV4 - SN3665; ConvF(4.18, 4.18, 4.18); Calibrated: 2015/5/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge 4/Aux Ant/802.11a/Ch161/Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.06 W/kg


Edge 4/Aux Ant/802.11a/Ch161/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.64 W/kg

SAR(1 g) = 0.584 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 1.46 W/kg

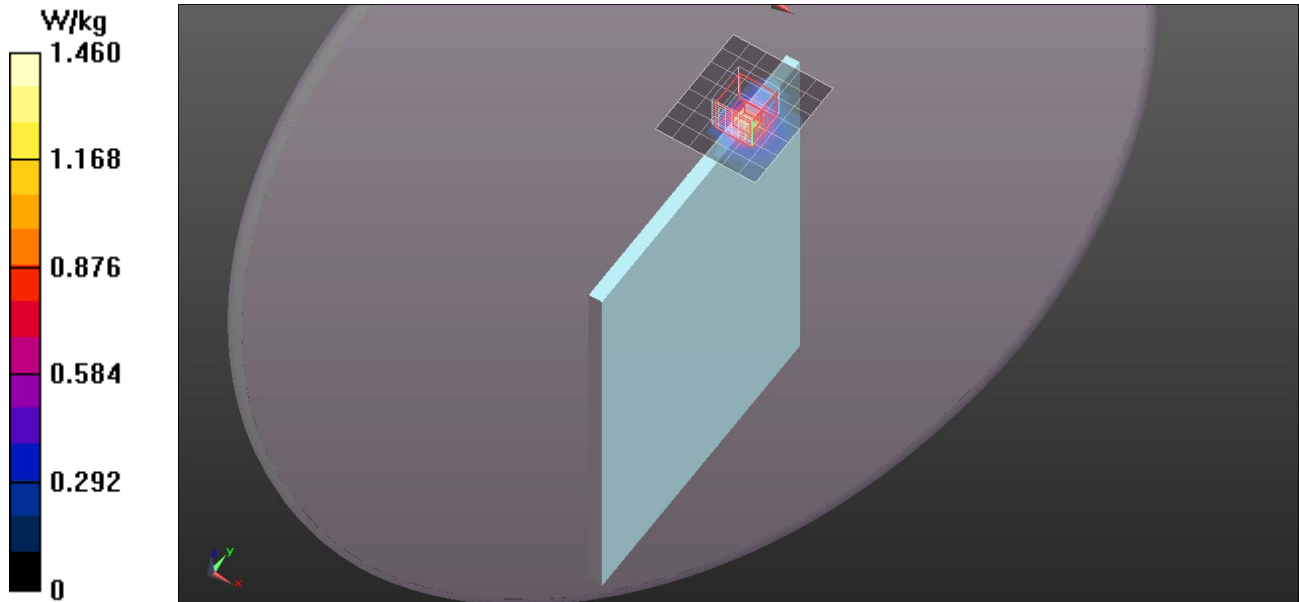

Wi-Fi 5G Band

Frequency: 5805 MHz; Duty Cycle: 1:1

Edge 4/Aux Ant/802.11a/Ch161/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.46 W/kg

