



RADIO TEST REPORT

FCC ID : TLZ-NM430SM
Equipment : IEEE 802.11 1X1 b/g/n Wireless LAN and Bluetooth 4.2 12mm x 12mm Stamp LGA module
Brand Name : AzureWave
Model Name : AW-NM430SM, AW-NM430
Applicant : AzureWave Technologies, Inc.
8F., No.94, Baozhong Rd. , Xindian Dist., New Taipei City , Taiwan 231
Manufacturer : AzureWave Technologies, Inc.
8F., No.94, Baozhong Rd. , Xindian Dist., New Taipei City , Taiwan 231
Standard : 47 CFR FCC Part 15.247

The product was received on Mar. 25, 2021, and testing was started from Mar. 25, 2021 and completed on Aug. 03, 2021. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.



Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

1.1 Information.....5

1.2 Applicable Standards7

1.3 Testing Location Information7

1.4 Measurement Uncertainty7

2 Test Configuration of EUT8

2.1 Test Channel Mode8

2.2 The Worst Case Measurement Configuration9

2.3 EUT Operation during Test10

2.4 Accessories10

2.5 Support Equipment.....10

2.6 Test Setup Diagram11

3 Transmitter Test Result14

3.1 AC Power-line Conducted Emissions14

3.2 DTS Bandwidth16

3.3 Maximum Conducted Output Power17

3.4 Power Spectral Density20

3.5 Emissions in Non-restricted Frequency Bands22

3.6 Emissions in Restricted Frequency Bands.....23

4 Test Equipment and Calibration Data27

Appendix A. Test Results of AC Power-line Conducted Emissions

Appendix B. Test Results of DTS Bandwidth

Appendix C. Test Results of Maximum Conducted Output Power

Appendix D. Test Results of Power Spectral Density

Appendix E. Test Results of Emissions in Non-restricted Frequency Bands

Appendix F. Test Results of Emissions in Restricted Frequency Bands

Appendix G. Test Photos

Photographs of EUT v01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen
Report Producer: Sandy Chuang



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20)	2412-2462	1-11 [11]
2400-2483.5	n (HT40)	2422-2452	3-9 [7]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11b	20	1TX
2.4-2.4835GHz	802.11g	20	1TX
2.4-2.4835GHz	802.11n HT20	20	1TX
2.4-2.4835GHz	802.11n HT40	40	1TX

Note:

- ◆ 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- ◆ 11g, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ◆ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Antenna Gain(dBi)		
1	1	MAG. LAYERS	MSA-4008-25GC1-A2	PIFA	I-PEX	2.98		
Ant.	Port	Brand	Model Name	Antenna Type	Connector	Antenna Gain(dBi)	Cable Loss(dB)	Net Gain (dBi)
2	1	YAGEO	ANT3216A063R2400A	Chip	N/A	1.69	2	-0.31

Note 1: The above information was declared by manufacturer.

Note 2: For conducted test: Only the higher gain antenna "Ant. 1" was tested and recorded in the report.

<WLAN 2.4GHz Function>

For IEEE 802.11b/g/n (1TX/1RX):

Only Port 1 can be used as transmitting/receiving.

<Bluetooth Function> (1TX/1RX)

Only Port 1 can be used as transmitting/receiving.



1.1.3 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
802.11b	1	0	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11g	1	0	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11n HT20	1	0	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11n HT40	1	0	n/a (DC>=0.98)	n/a (DC>=0.98)

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From host system			
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming		
Function	<input checked="" type="checkbox"/> Point-to-multipoint	<input type="checkbox"/> Point-to-point		
Test Software Version	Realtek 11n 8723 SDIO WLAN MP Diagnostic Program 0.16 20180914			

Note: The above information was declared by manufacturer.

1.1.5 Table for Multiple Listing

The model names in the following table are all refer to the identical product.

Model Name	Description
AW-NM430SM	All the model names are identical, the difference model names served as marketing strategy.
AW-NM430	

Note 1: From the above models, model: AW-NM430SM was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.247
- ♦ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH02-CB	Lucas Huang	20.5-20.8 / 52-64	Mar. 30, 2021
Radiated (Below 1GHz)	10CH01-CB	Peter Wu	23~24 / 58~59	Aug. 03, 2021
Radiated (Above 1GHz)	03CH02-CB	Stim Sun	20.4-21.5 / 57-59	Mar. 25, 2021~Mar. 27, 2021
AC Conduction	CO02-CB	Ryo Fan	22~24 / 57~59	Jul. 26, 2021

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	1.6 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	5.0 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.9 dB	Confidence levels of 95%
Conducted Emission	2.8 dB	Confidence levels of 95%
Output Power Measurement	1.4 dB	Confidence levels of 95%
Power Density Measurement	2.8 dB	Confidence levels of 95%
Bandwidth Measurement	0.4%	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode	Power Setting
802.11b_Nss1,(1Mbps)_1TX	-
2412MHz	31
2437MHz	30
2462MHz	33
802.11g_Nss1,(6Mbps)_1TX	-
2412MHz	40
2417MHz	45
2437MHz	55
2457MHz	43
2462MHz	40
802.11n HT20_Nss1,(MCS0)_1TX	-
2412MHz	41
2417MHz	44
2437MHz	55
2457MHz	43
2462MHz	40
802.11n HT40_Nss1,(MCS0)_1TX	-
2422MHz	36
2427MHz	36
2437MHz	41
2447MHz	38
2452MHz	37



2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	EUT + Antenna 1
2	EUT + Antenna 2
Mode 2 generated the worst test result, so it was recorded in this report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density
Test Condition	Conducted measurement at transmit chains
1	EUT + Antenna 1

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
1	EUT in Y axis + Antenna 1
2	EUT in Z axis + Antenna 1
Mode 2 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3 will follow this same test mode.	
3	EUT in Z axis + Antenna 2
For operating mode 3 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
The EUT was performed at X axis, Y axis and Z axis position, and the worst case as below:	
1	EUT in Y axis + Antenna 1
2	EUT in Y axis + Antenna 2



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	Normal Link
1	Bluetooth + WLAN 2.4GHz

Refer to Sporton Test Report No.: FA131818 for Co-location RF Exposure Evaluation.

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.

2.4 Accessories

N/A

2.5 Support Equipment


For AC Conduction / Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Fixture	ASUS	TINKER BOARD S R2.0	N/A
B	TV	ASUS	VP28U	N/A
C	AP Router	ASUS	RP-N53	MSQ-RPN53
D	Tablet	Samsung	TAB3	N/A
E	Keyboard	iCooky	SK068	N/A
F	Mouse	HP	FM100	N/A
G	Adapter	ENG	6A-181WP05	N/A


For Radiated (above 1GHz) / RF Conducted:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Fixture	AzureWave	2430SM I5	N/A

2.6 Test Setup Diagram

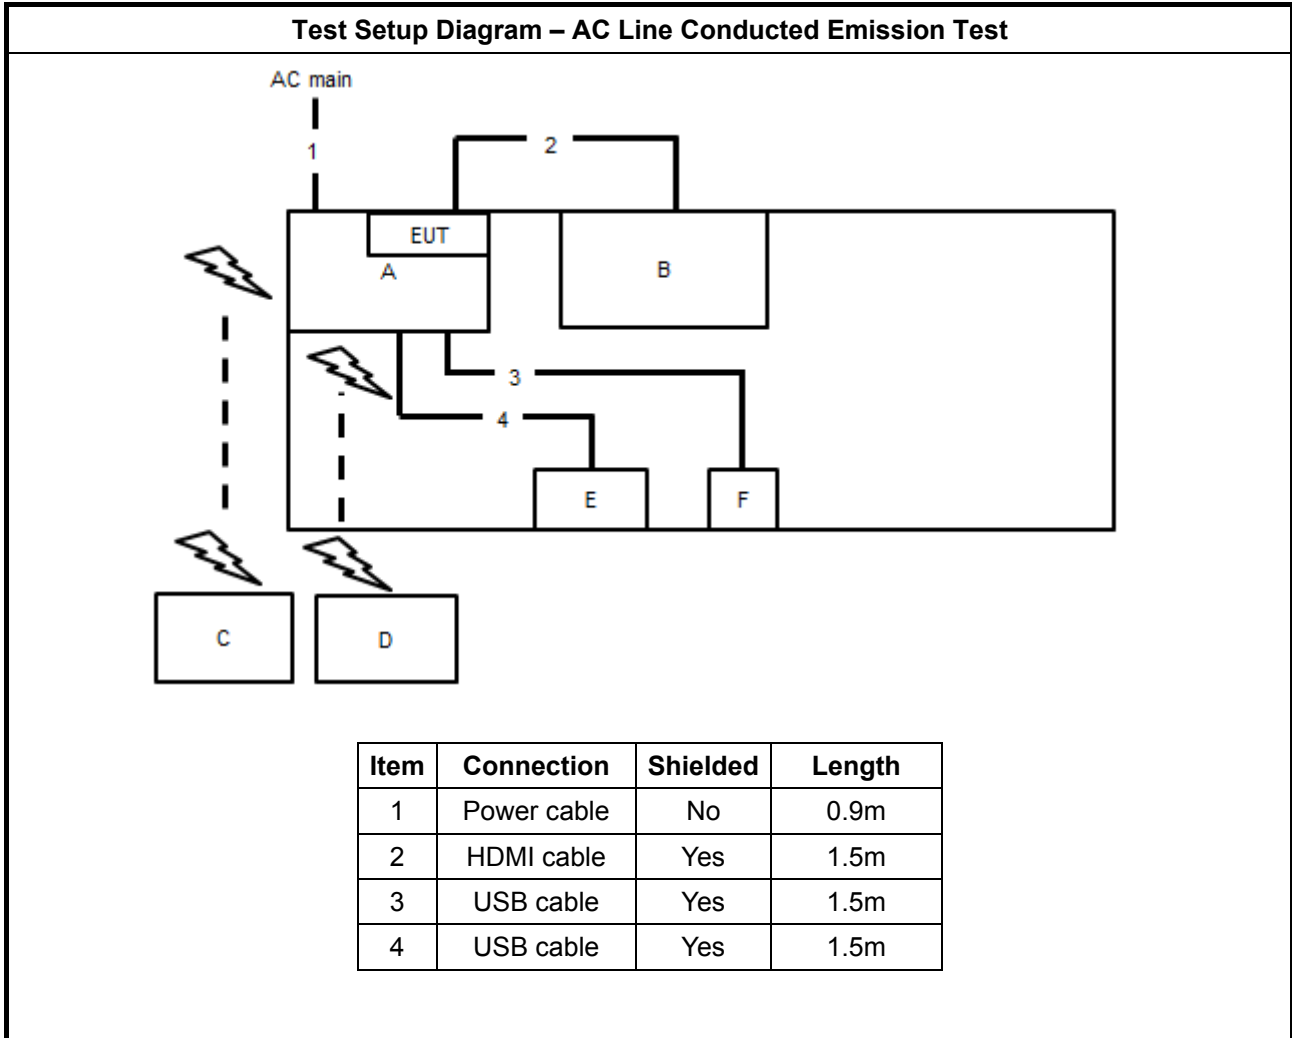


Test Setup Diagram - Radiated Test < 1GHz

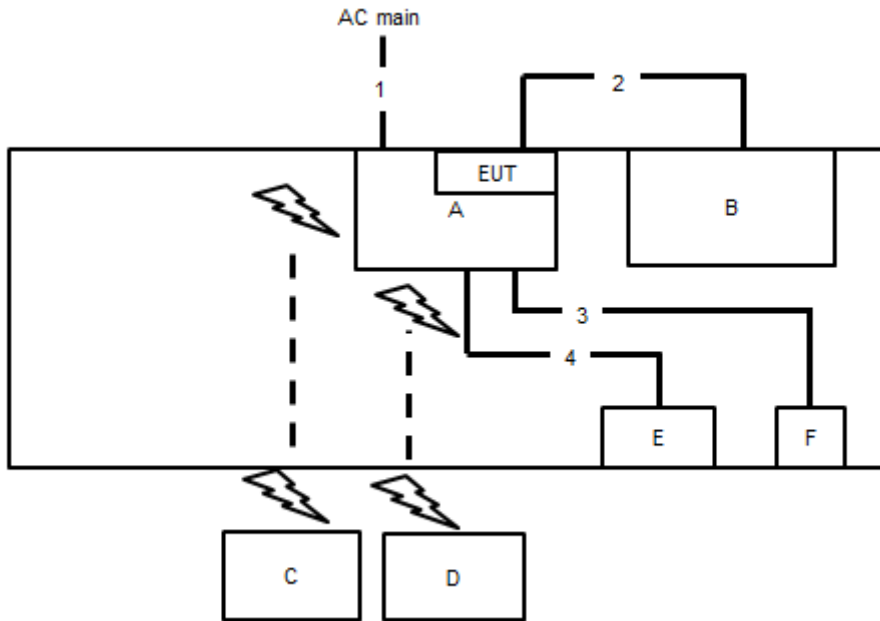

Item	Connection	Shielded	Length
1	Power cable	No	0.9m
2	HDMI cable	Yes	1.5m
3	USB cable	Yes	1.5m
4	USB cable	Yes	1.5m

Test Setup Diagram - Radiated Test > 1GHz

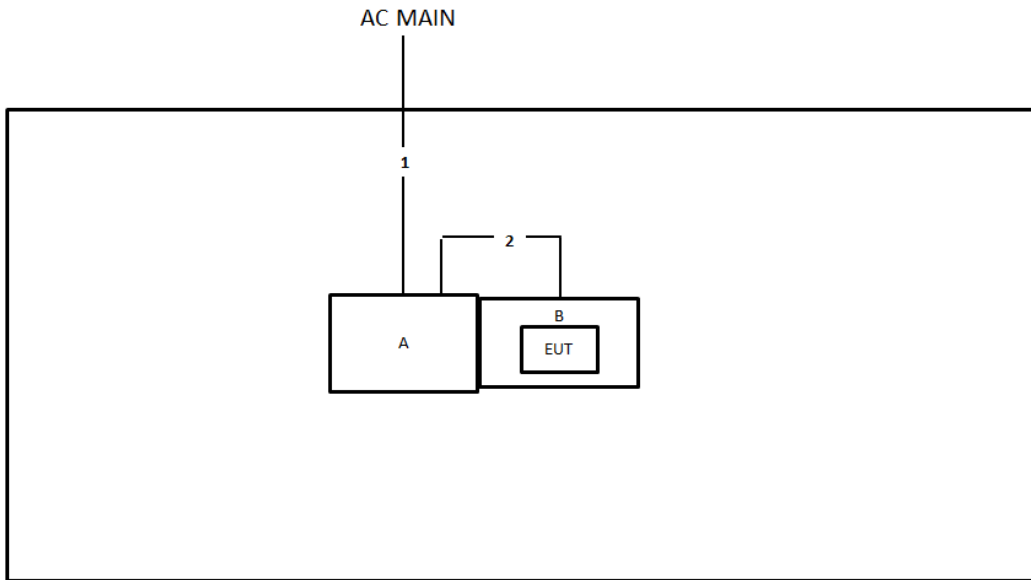

Item	Connection	Shielded	Length
1	Power cable	No	2.6m
2	USB cable	Yes	1m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

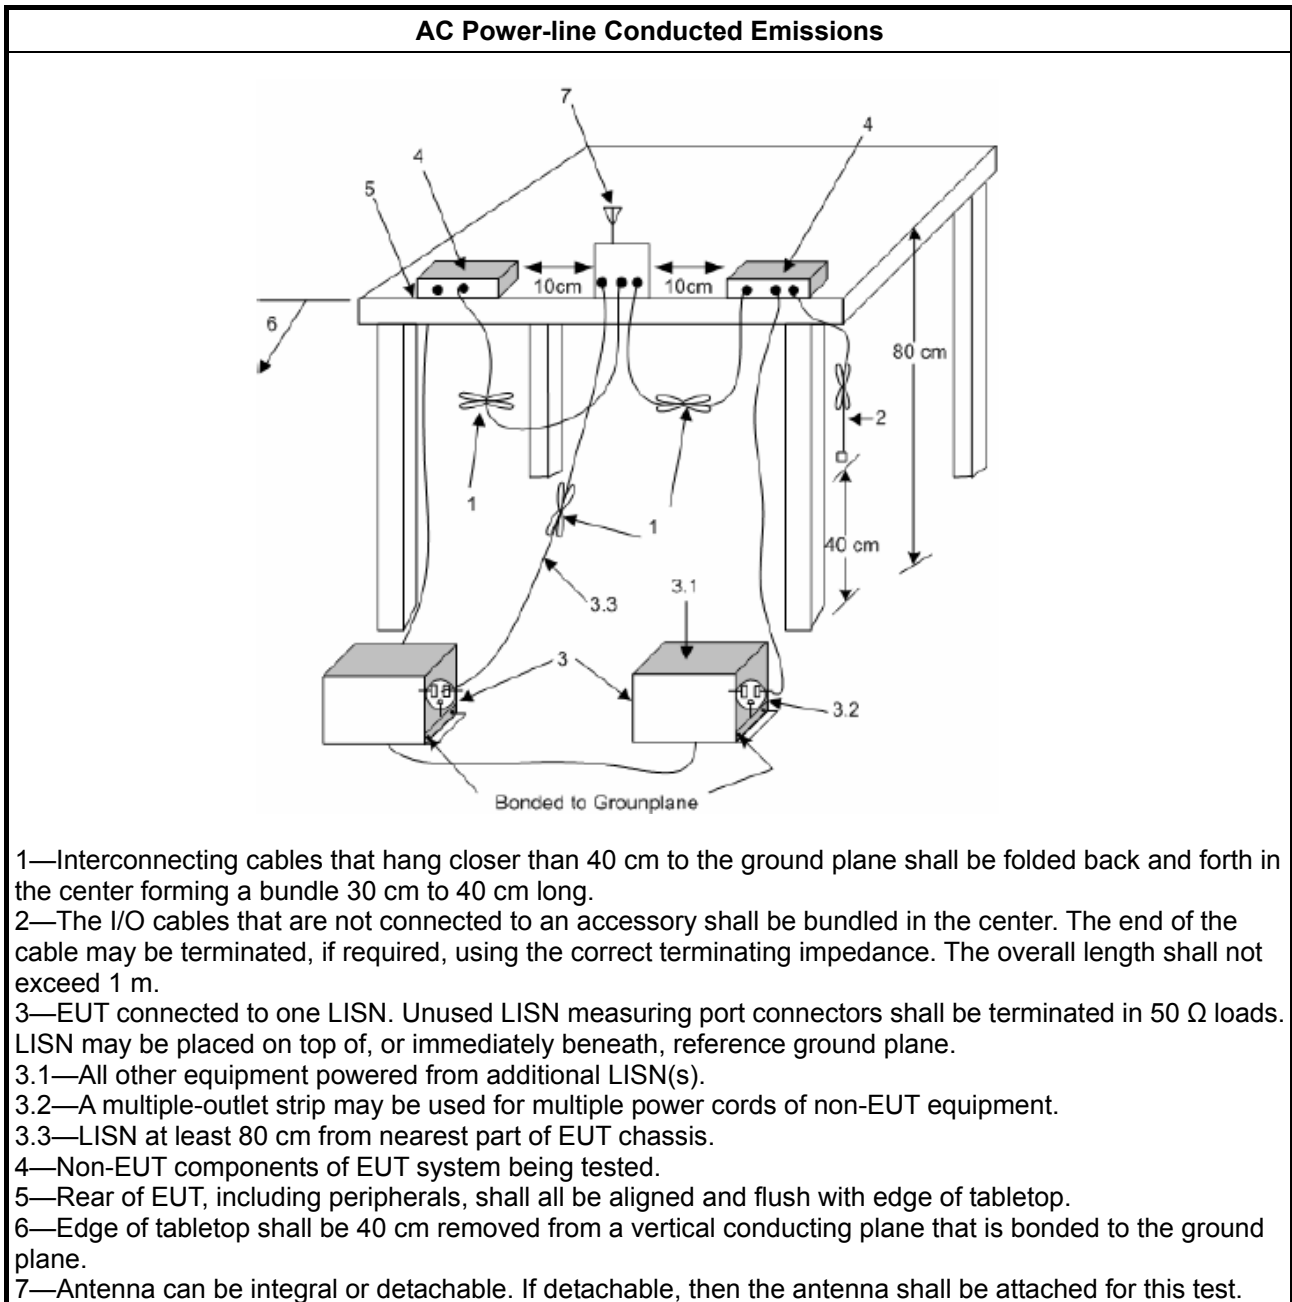

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
<ul style="list-style-type: none"> ▪ 6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<ul style="list-style-type: none"> ▪ For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

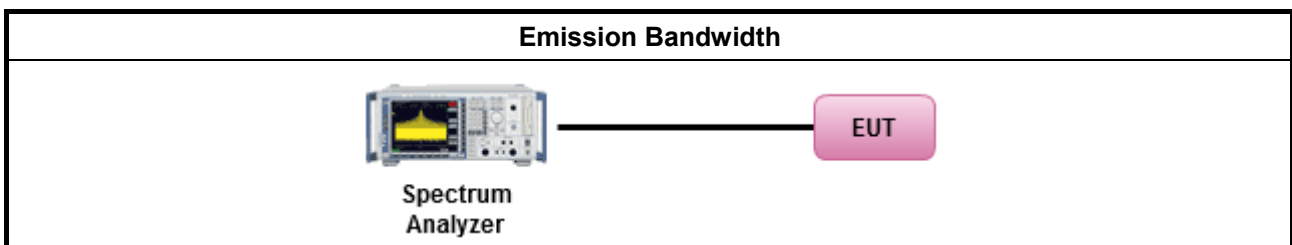

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	<ul style="list-style-type: none">▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	<ul style="list-style-type: none">▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	<ul style="list-style-type: none">▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none">▪ Smart antenna system (SAS):
	<ul style="list-style-type: none">- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none">- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none">- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ Maximum Peak Conducted Output Power 	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
<ul style="list-style-type: none"> ▪ Maximum Conducted Output Power 	
[duty cycle ≥ 98% or external video / power trigger]	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2 Method AVGSA-1.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
<ul style="list-style-type: none"> ▪ For conducted measurement. 	
<ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. 	
<ul style="list-style-type: none"> ▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$ 	

3.3.4 Test Setup

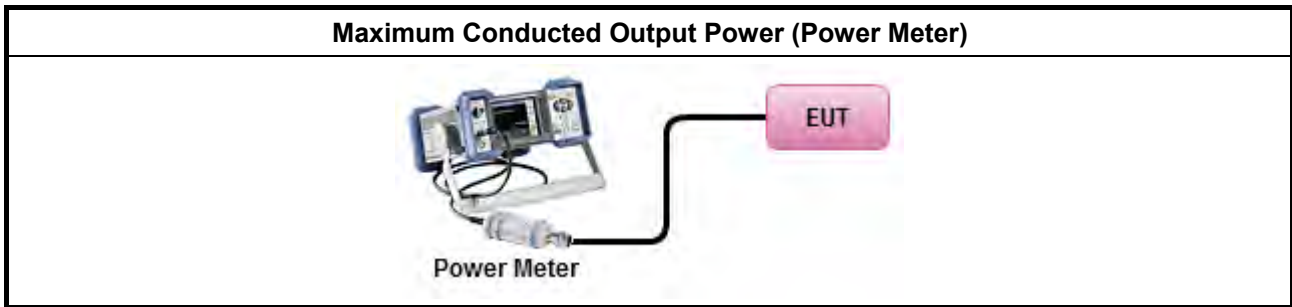

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<ul style="list-style-type: none"> Power Spectral Density (PSD) \leq 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method
<ul style="list-style-type: none"> Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD.
<ul style="list-style-type: none"> For conducted measurement. <ul style="list-style-type: none"> If The EUT supports multiple transmit chains using options given below: <ul style="list-style-type: none"> <input type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. <input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits, <input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

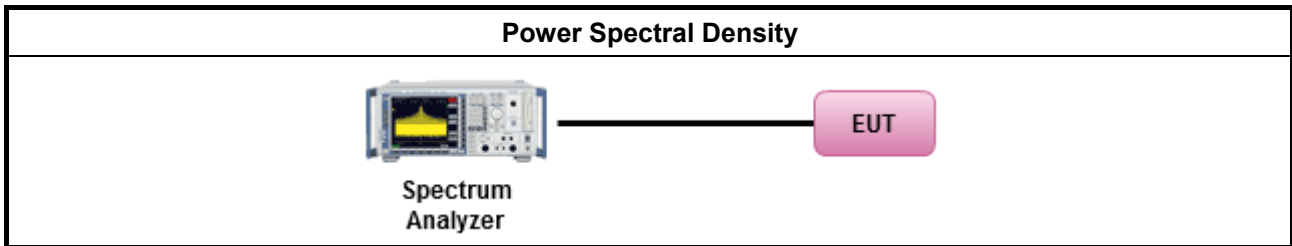

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

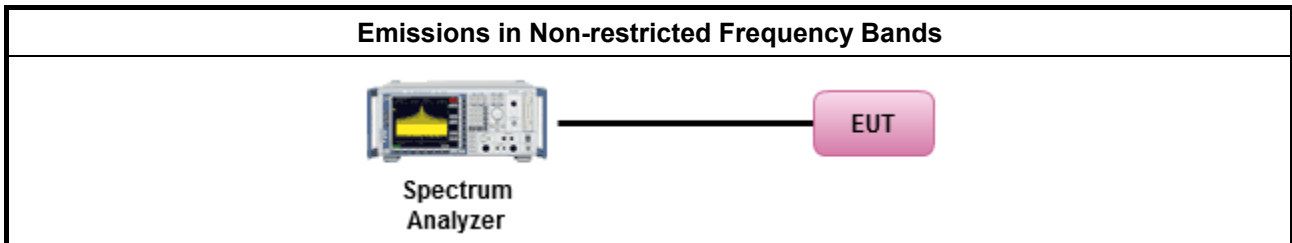

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor]. 	
<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band. 	
<ul style="list-style-type: none"> ▪ For the transmitter unwanted emissions shall be measured using following options below: 	
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle ≥98%).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW≥1/T).
	<input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
<ul style="list-style-type: none"> ▪ For the transmitter band-edge emissions shall be measured using following options below: 	
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 558074 clause 8.7 & C63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	<ul style="list-style-type: none"> ▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	<ul style="list-style-type: none"> ▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

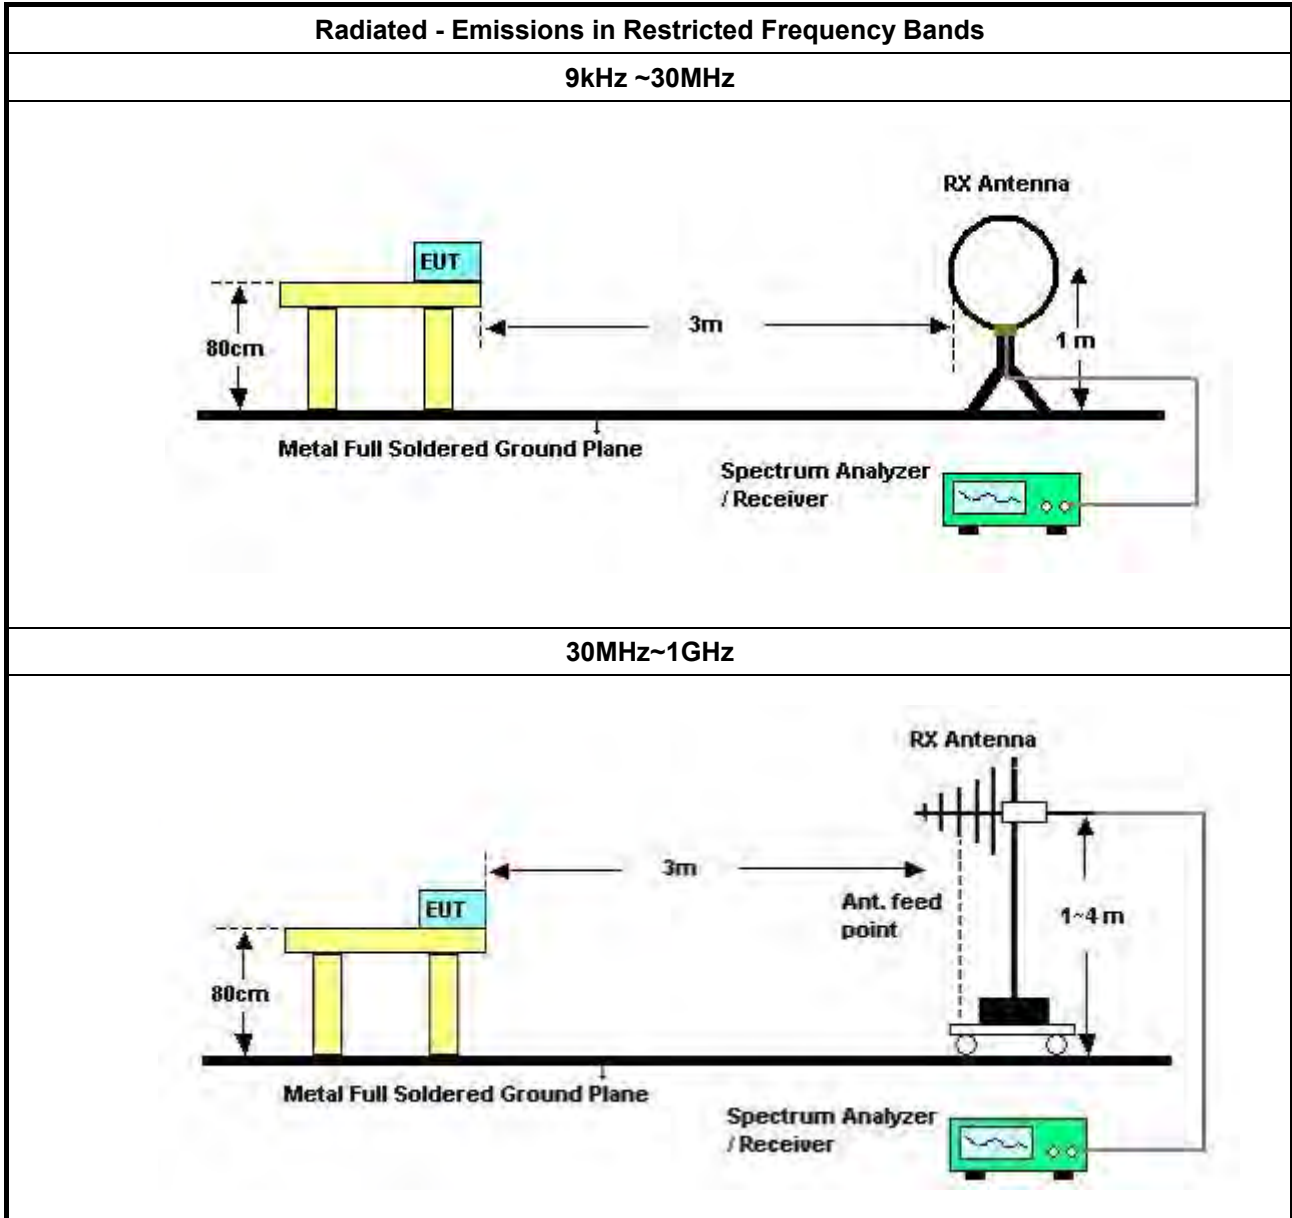

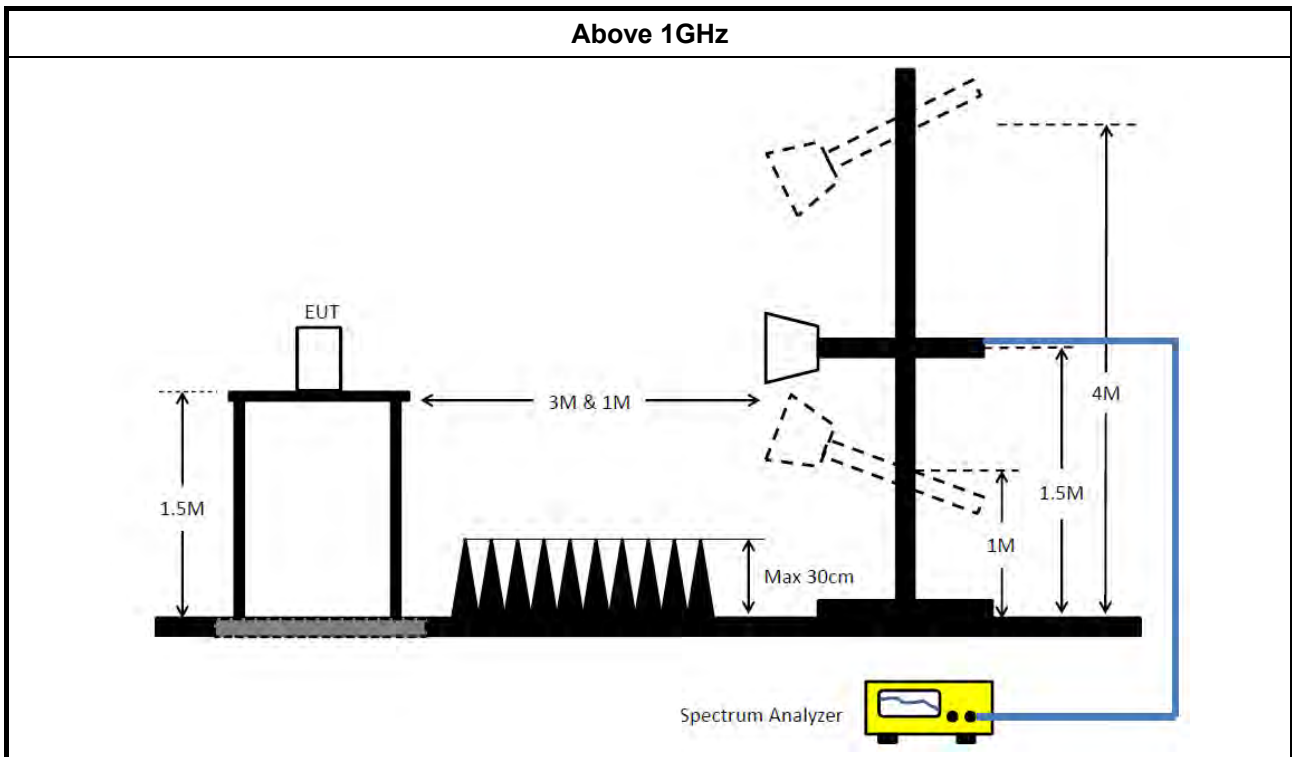

3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Dec. 04, 2020	Dec. 03, 2021	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 20, 2020	Nov. 19, 2021	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	May 05, 2021	May 04, 2022	Conduction (CO02-CB)
COND Cable	Woken	Cable	2	0.15MHz ~ 30MHz	Oct. 20, 2020	Oct. 19, 2021	Conduction (CO02-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO02-CB)
Pulse Limiter	Schwarzbeck	VTSD 9561F-N	00378	9kHz ~ 30MHz	Mar. 18, 2021	Mar. 17, 2022	Conduction (CO02-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Apr. 14, 2021	Apr. 13, 2022	Radiation (10CH01-CB)
10m Semi Anechoic Chamber NSA	TDK	SAC-10M	10CH01-CB	30MHz~1GHz 10m,3m	Jan. 28, 2021	Jan. 27, 2022	Radiation (10CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10783	9kHz ~ 1.3GHz	Mar. 11, 2021	Mar. 10, 2022	Radiation (10CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10784	9kHz ~ 1.3GHz	Mar. 11, 2021	Mar. 10, 2022	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-01	25MHz ~ 1GHz	Oct. 20, 2020	Oct. 19, 2021	Radiation (10CH01-CB)
High Cable	Woken	SUCOFLEX 104	low cable-02	25MHz ~ 1GHz	Oct. 20, 2020	Oct. 19, 2021	Radiation (10CH01-CB)
Bilog Antenna with 6dB Attenuator	Chase & EMCI	CBL6111A &N-6-06	1543 &AT-N0609	30MHz ~ 1GHz	Jul. 01, 2021	Jun. 30, 2022	Radiation (10CH01-CB)
EMI Test Receiver	Rohde&Schwarz	ESCI	100186	9kHz ~ 3GHz	Jul. 12, 2021	Jul. 11, 2022	Radiation (10CH01-CB)
Spectrum Analyzer	Rohde&Schwarz	FSV30	101026	9kHz ~ 30GHz	Mar. 08, 2021	Mar. 07, 2022	Radiation (10CH01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (10CH01-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz 3m	Mar. 28, 2020	Mar. 27, 2021	Radiation (03CH02-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz 3m	Mar. 27, 2021	Mar. 26, 2022	Radiation (03CH02-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1370	1GHz~18GHz	Sep. 21, 2020	Sep. 20, 2021	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2020	Jul. 20, 2021	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jul. 13, 2020	Jul. 12, 2021	Radiation (03CH02-CB)
Pre-Amplifier	MITEQ	TTA1840-35-H G	1864479	18GHz ~ 40GHz	Jul. 08, 2020	Jul. 07, 2021	Radiation (03CH02-CB)
Spectrum analyzer	R&S	FSU	100015	9kHz~26GHz	Oct. 15, 2020	Oct. 14, 2021	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH02-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Jul. 27, 2020	Jul. 26, 2021	Conducted (TH02-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Sep. 17, 2020	Sep. 16, 2021	Conducted (TH02-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Sep. 17, 2020	Sep. 16, 2021	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-01	1 GHz – 18 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-02	1 GHz – 18 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-03	1 GHz – 18 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz – 18 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-05	1 GHz – 18 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH02-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH02-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 2	Pass	QP	150k	51.69	66.00	-14.31	Line

26/07/2021


Mode 2

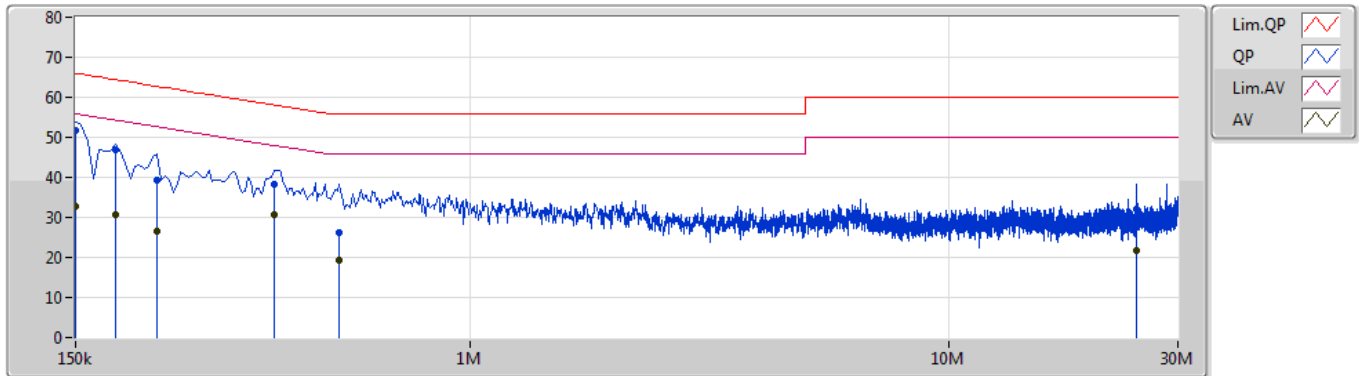

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	150k	51.69	66.00	-14.31	10.29	Line	"Worst"	41.40	0.07	0.07	10.15
AV	150k	32.69	56.00	-23.31	10.29	Line	-	22.40	0.07	0.07	10.15
QP	181.5k	46.81	64.41	-17.60	10.30	Line	-	36.51	0.07	0.07	10.16
AV	181.5k	30.78	54.41	-23.63	10.30	Line	-	20.48	0.07	0.07	10.16
QP	222k	39.18	62.75	-23.57	10.29	Line	-	28.89	0.07	0.07	10.15
AV	222k	26.57	52.75	-26.18	10.29	Line	-	16.28	0.07	0.07	10.15
QP	388.5k	38.14	58.10	-19.96	10.25	Line	-	27.89	0.08	0.06	10.11
AV	388.5k	30.52	48.10	-17.58	10.25	Line	-	20.27	0.08	0.06	10.11
QP	532.5k	26.36	56.00	-29.64	10.26	Line	-	16.10	0.08	0.07	10.11
AV	532.5k	19.37	46.00	-26.63	10.26	Line	-	9.11	0.08	0.07	10.11
QP	24.617M	31.94	60.00	-28.06	11.01	Line	-	20.93	0.53	0.28	10.20
AV	24.617M	21.72	50.00	-28.28	11.01	Line	-	10.71	0.53	0.28	10.20

Mode 2

26/07/2021

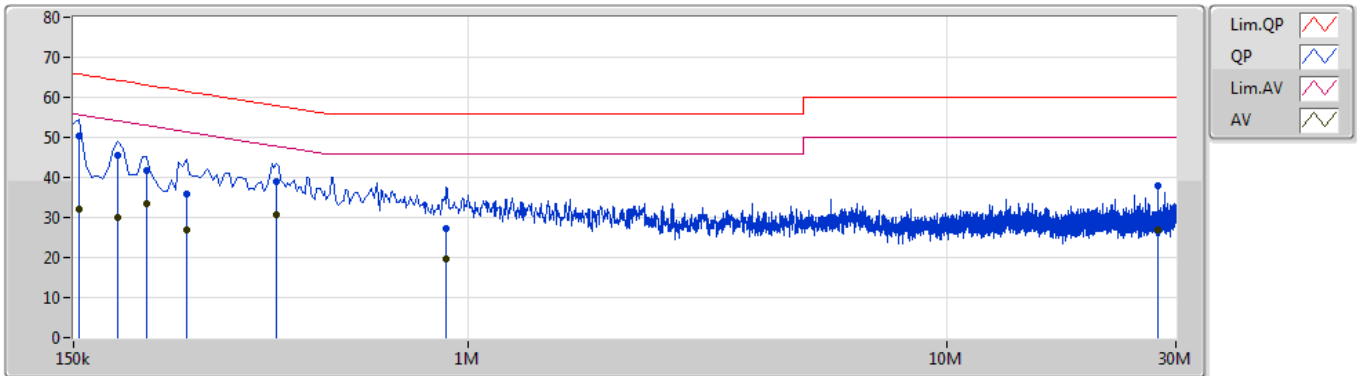

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	154.5k	50.21	65.75	-15.54	10.28	Neutral	"Worst"	39.93	0.06	0.07	10.15
AV	154.5k	32.23	55.75	-23.52	10.28	Neutral	-	21.95	0.06	0.07	10.15
QP	186k	45.47	64.20	-18.73	10.29	Neutral	-	35.18	0.06	0.07	10.16
AV	186k	30.03	54.20	-24.17	10.29	Neutral	-	19.74	0.06	0.07	10.16
QP	213k	41.59	63.09	-21.50	10.29	Neutral	-	31.30	0.06	0.07	10.16
AV	213k	33.58	53.09	-19.51	10.29	Neutral	-	23.29	0.06	0.07	10.16
QP	258k	35.87	61.49	-25.62	10.27	Neutral	-	25.60	0.06	0.07	10.14
AV	258k	26.83	51.49	-24.66	10.27	Neutral	-	16.56	0.06	0.07	10.14
QP	397.5k	39.11	57.91	-18.80	10.23	Neutral	-	28.88	0.06	0.06	10.11
AV	397.5k	30.52	47.91	-17.39	10.23	Neutral	-	20.29	0.06	0.06	10.11
QP	901.5k	27.29	56.00	-28.71	10.26	Neutral	-	17.03	0.08	0.08	10.10
AV	901.5k	19.73	46.00	-26.27	10.26	Neutral	-	9.47	0.08	0.08	10.10
QP	27.456M	37.82	60.00	-22.18	10.86	Neutral	-	26.96	0.38	0.29	10.19
AV	27.456M	26.88	50.00	-23.12	10.86	Neutral	-	16.02	0.38	0.29	10.19

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	10M	14.993M	15M0G1D	9.05M	14.943M
802.11g_Nss1,(6Mbps)_1TX	16.325M	25.387M	25M4D1D	16.275M	16.717M
802.11n HT20_Nss1,(MCS0)_1TX	17.55M	26.312M	26M3D1D	17.5M	17.866M
802.11n HT40_Nss1,(MCS0)_1TX	35.35M	36.082M	36M1D1D	35.05M	35.982M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-
2412MHz	Pass	500k	10M	14.943M
2437MHz	Pass	500k	10M	14.993M
2462MHz	Pass	500k	9.05M	14.993M
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-
2412MHz	Pass	500k	16.325M	16.742M
2437MHz	Pass	500k	16.275M	25.387M
2462MHz	Pass	500k	16.3M	16.717M
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-
2412MHz	Pass	500k	17.55M	17.891M
2437MHz	Pass	500k	17.5M	26.312M
2462MHz	Pass	500k	17.55M	17.866M
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-
2422MHz	Pass	500k	35.15M	35.982M
2437MHz	Pass	500k	35.05M	36.082M
2452MHz	Pass	500k	35.35M	36.032M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

802.11b_Nss1,(1Mbps)_1TX

EBW

2412MHz

29/03/2021

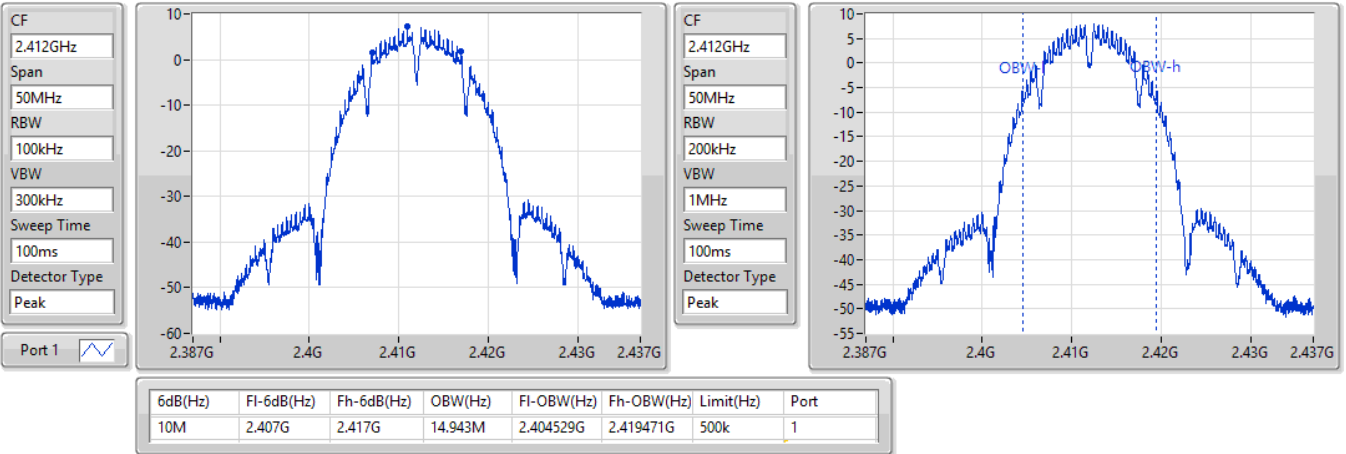


802.11b_Nss1,(1Mbps)_1TX

EBW

2437MHz

29/03/2021

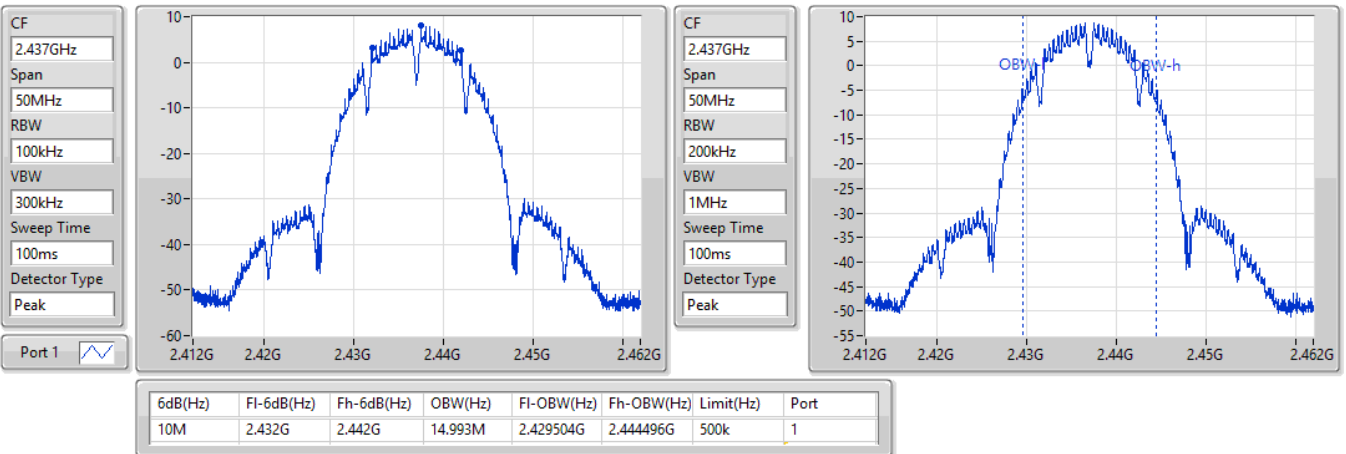


802.11b_Nss1,(1Mbps)_1TX

EBW

2462MHz

29/03/2021

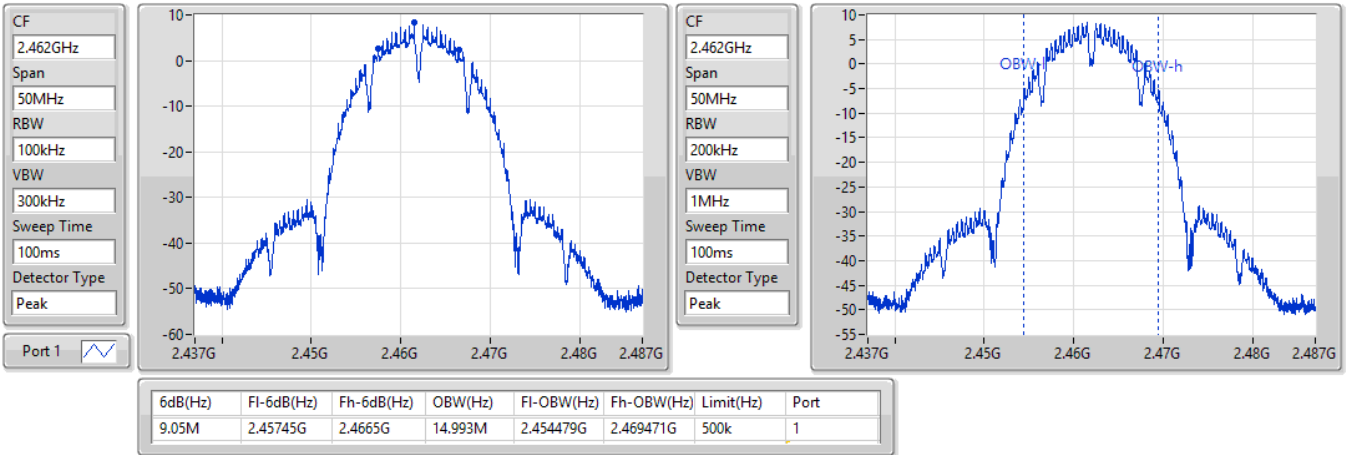


802.11g_Nss1,(6Mbps)_1TX

EBW

2412MHz

29/03/2021

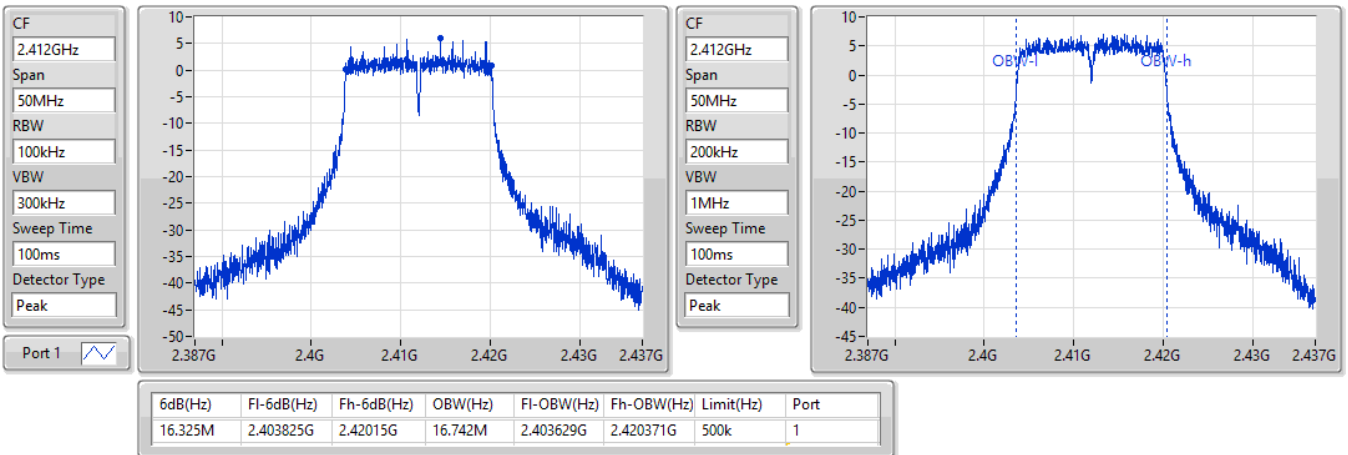


802.11g_Nss1,(6Mbps)_1TX

EBW

2437MHz

29/03/2021

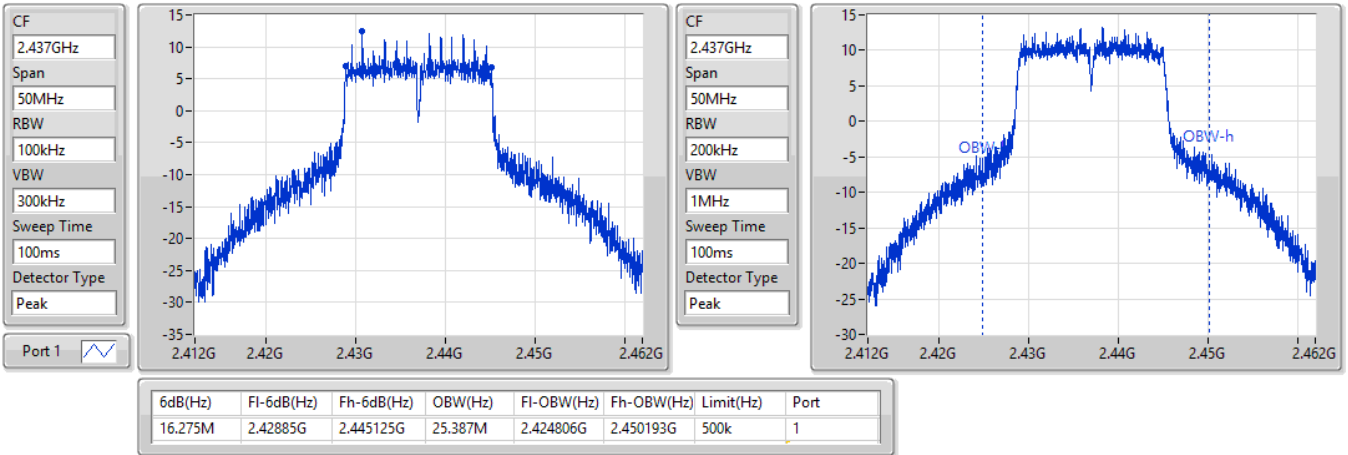


802.11g_Nss1,(6Mbps)_1TX

EBW

2462MHz

29/03/2021

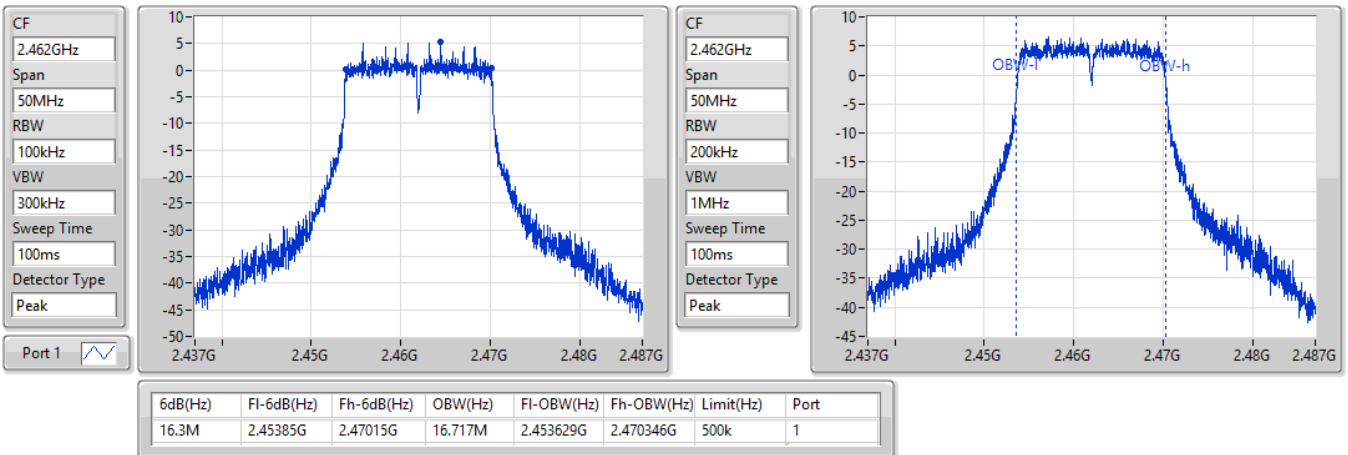


802.11n HT20_Nss1,(MCS0)_1TX

EBW

2412MHz

29/03/2021

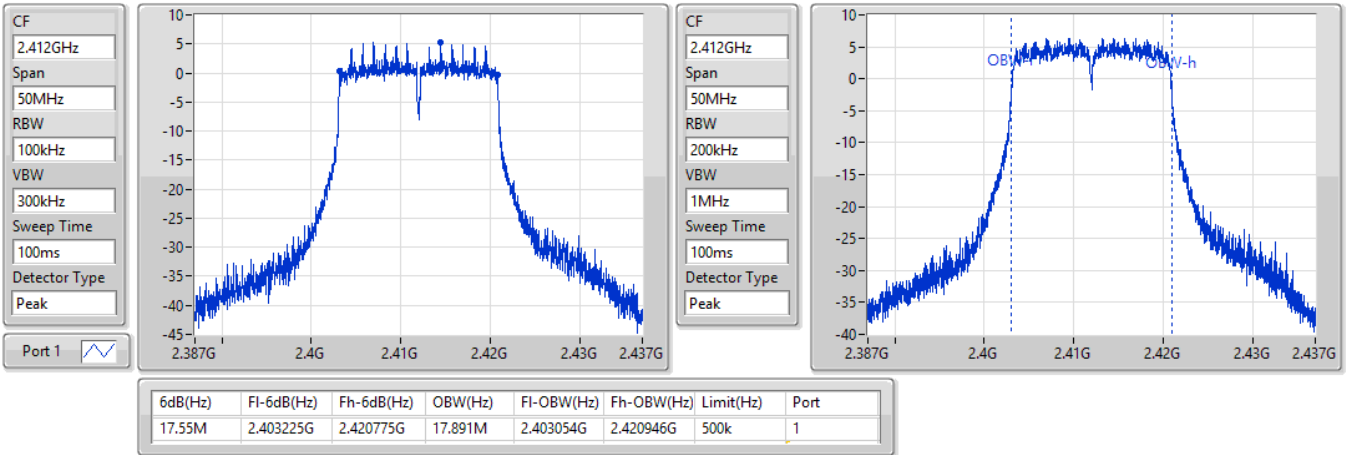


802.11n HT20_Nss1,(MCS0)_1TX

EBW

2437MHz

29/03/2021

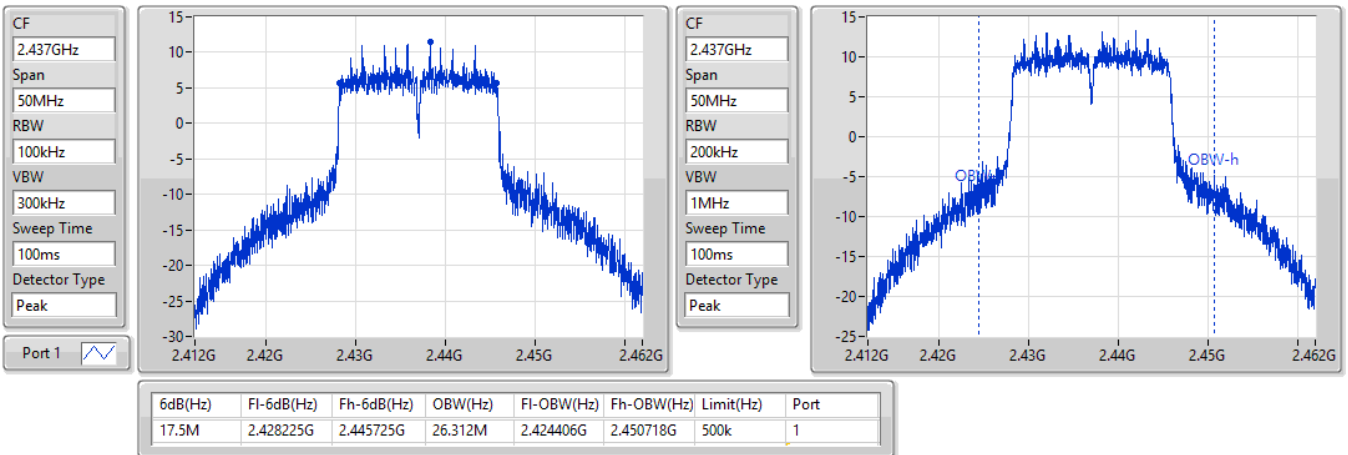


802.11n HT20_Nss1,(MCS0)_1TX

EBW

2462MHz

29/03/2021

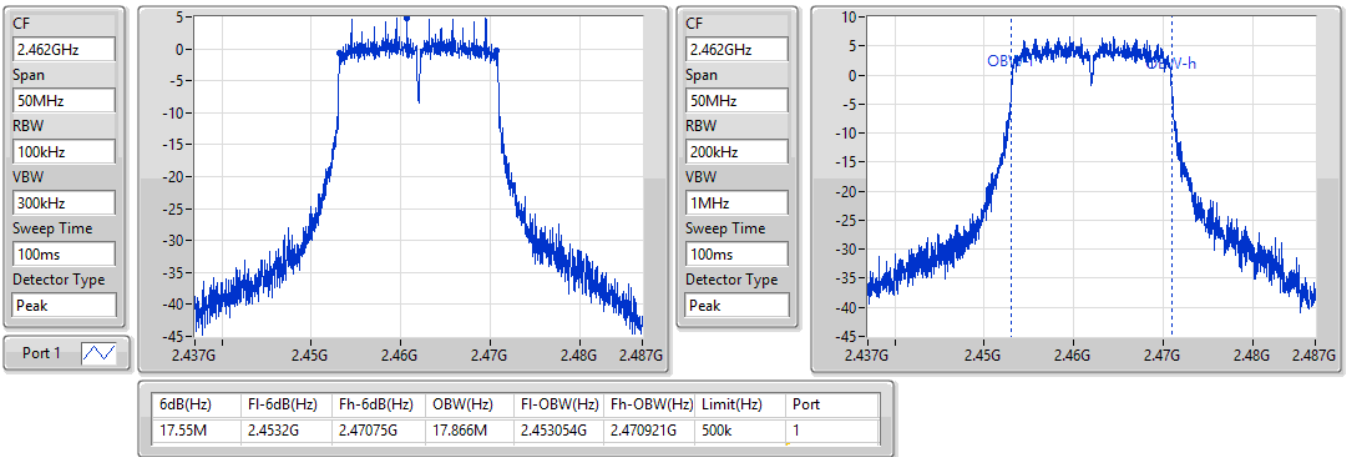


802.11n HT40_Nss1,(MCS0)_1TX

EBW

2422MHz

29/03/2021

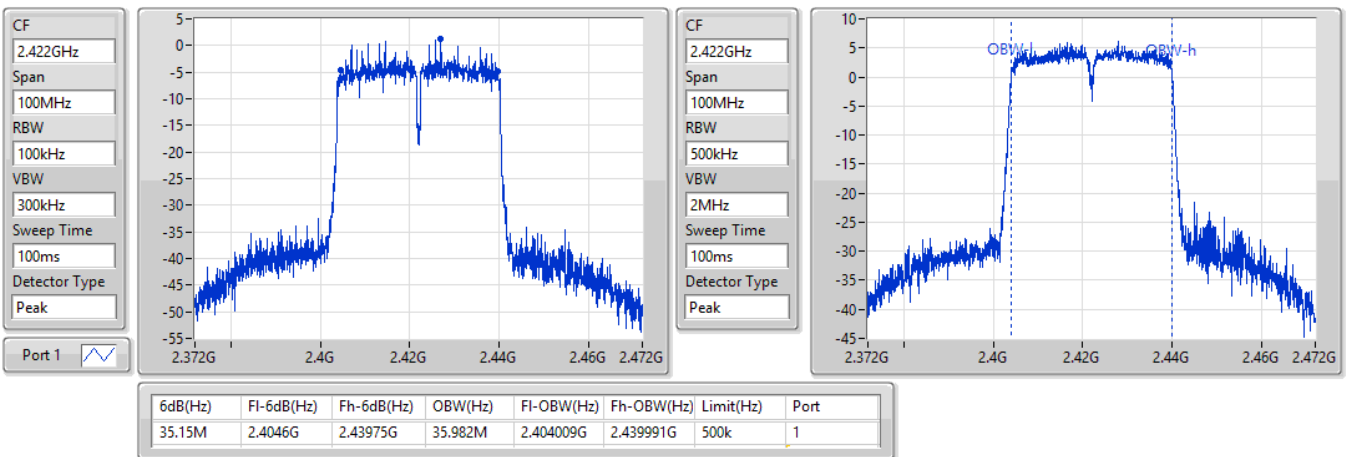


802.11n HT40_Nss1,(MCS0)_1TX

EBW

2437MHz

29/03/2021

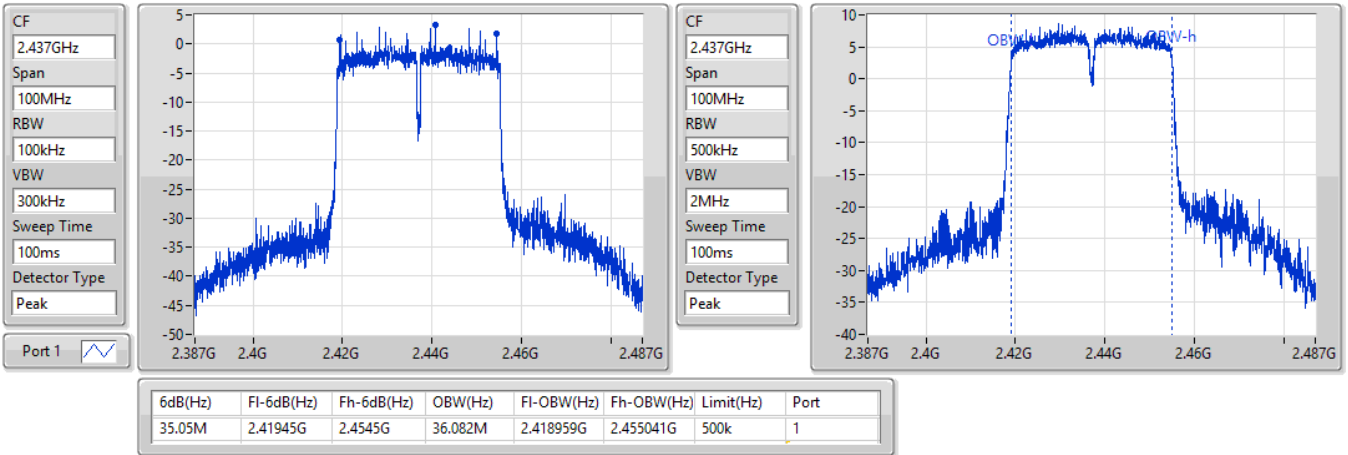


802.11n HT40_Nss1,(MCS0)_1TX

EBW

2452MHz

29/03/2021

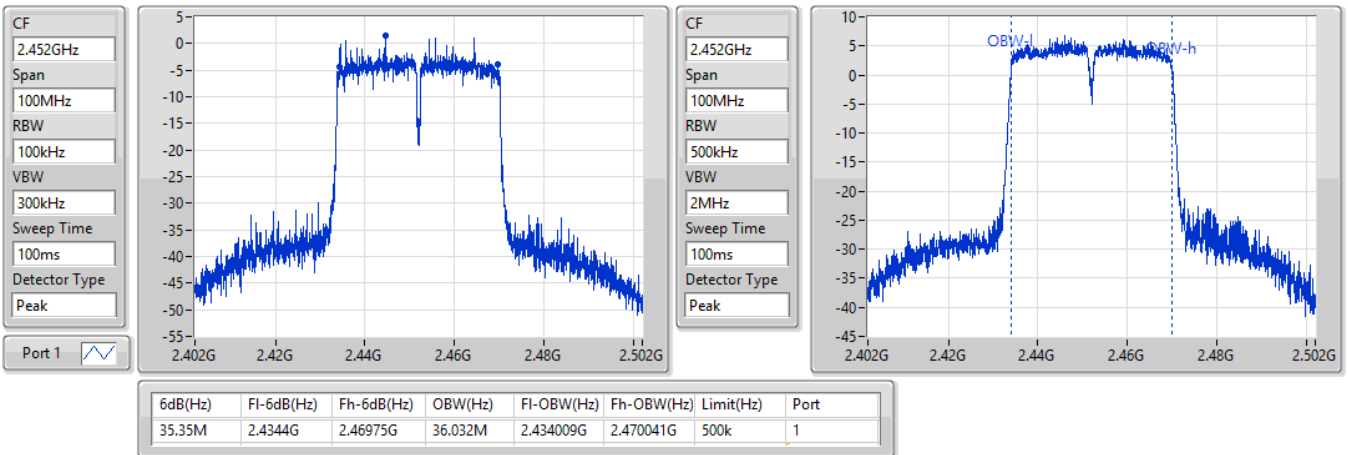



Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_1TX	16.64	0.04613
802.11g_Nss1,(6Mbps)_1TX	21.68	0.14723
802.11n HT20_Nss1,(MCS0)_1TX	21.78	0.15066
802.11n HT40_Nss1,(MCS0)_1TX	16.82	0.04808



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	2.98	15.93	15.93	30.00
2437MHz	Pass	2.98	16.64	16.64	30.00
2462MHz	Pass	2.98	15.70	15.70	30.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	2.98	16.84	16.84	30.00
2417MHz	Pass	2.98	18.44	18.44	30.00
2437MHz	Pass	2.98	21.68	21.68	30.00
2457MHz	Pass	2.98	17.45	17.45	30.00
2462MHz	Pass	2.98	15.99	15.99	30.00
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	2.98	16.18	16.18	30.00
2417MHz	Pass	2.98	17.89	17.89	30.00
2437MHz	Pass	2.98	21.78	21.78	30.00
2457MHz	Pass	2.98	17.50	17.50	30.00
2462MHz	Pass	2.98	16.22	16.22	30.00
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	2.98	14.54	14.54	30.00
2427MHz	Pass	2.98	14.54	14.54	30.00
2437MHz	Pass	2.98	16.82	16.82	30.00
2447MHz	Pass	2.98	15.06	15.06	30.00
2452MHz	Pass	2.98	14.83	14.83	30.00

DG = Directional Gain; **Port X** = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX	-6.03
802.11g_Nss1,(6Mbps)_1TX	-4.02
802.11n HT20_Nss1,(MCS0)_1TX	-4.34
802.11n HT40_Nss1,(MCS0)_1TX	-12.35




RBW = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;




Result




Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	2.98	-6.37	-6.37	8.00
2437MHz	Pass	2.98	-6.54	-6.54	8.00
2462MHz	Pass	2.98	-6.03	-6.03	8.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	2.98	-9.40	-9.40	8.00
2437MHz	Pass	2.98	-4.02	-4.02	8.00
2462MHz	Pass	2.98	-7.44	-7.44	8.00
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	2.98	-8.62	-8.62	8.00
2437MHz	Pass	2.98	-4.34	-4.34	8.00
2462MHz	Pass	2.98	-9.03	-9.03	8.00
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	2.98	-14.54	-14.54	8.00
2437MHz	Pass	2.98	-12.35	-12.35	8.00
2452MHz	Pass	2.98	-12.68	-12.68	8.00




DG = Directional Gain; **RBW** = 500 kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

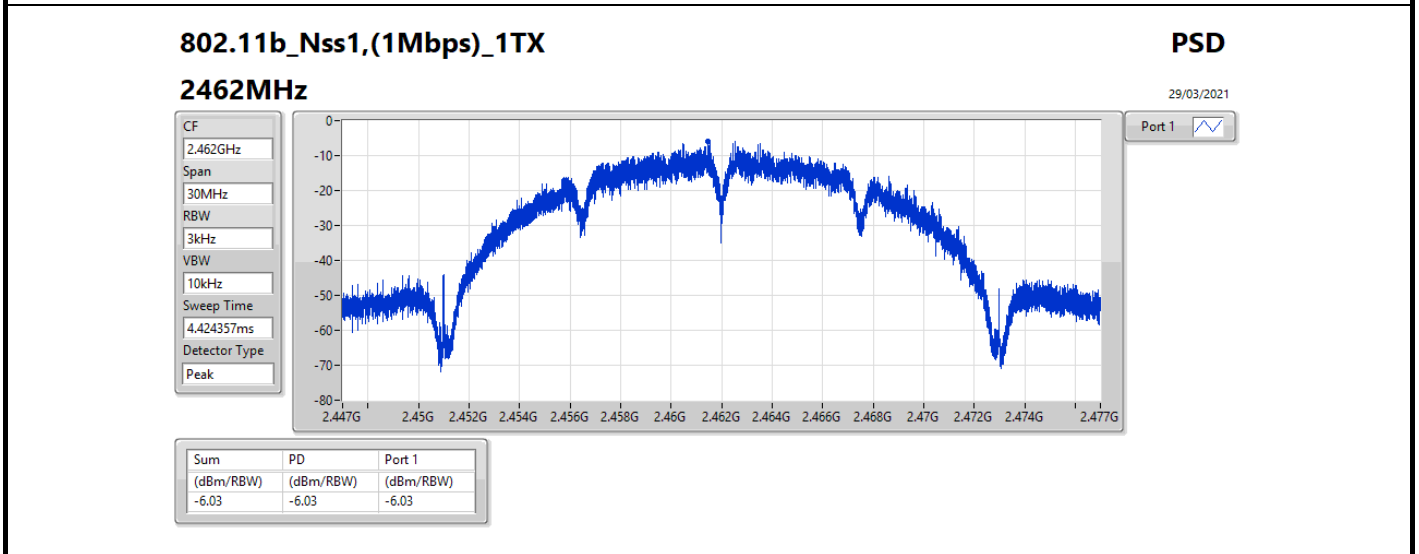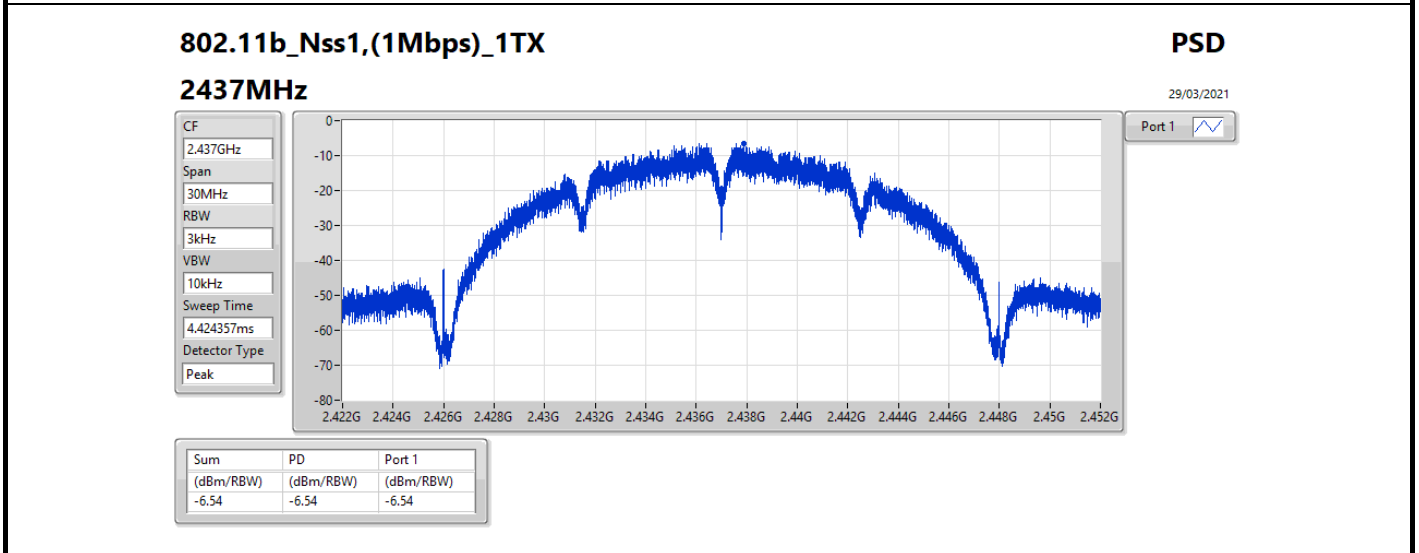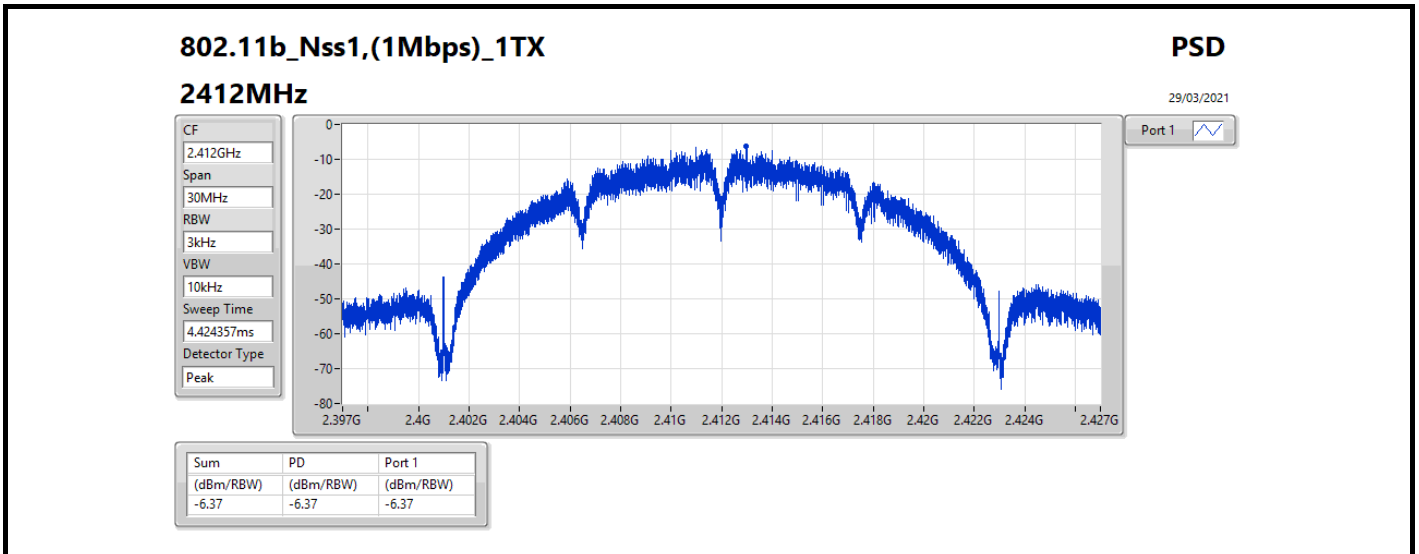

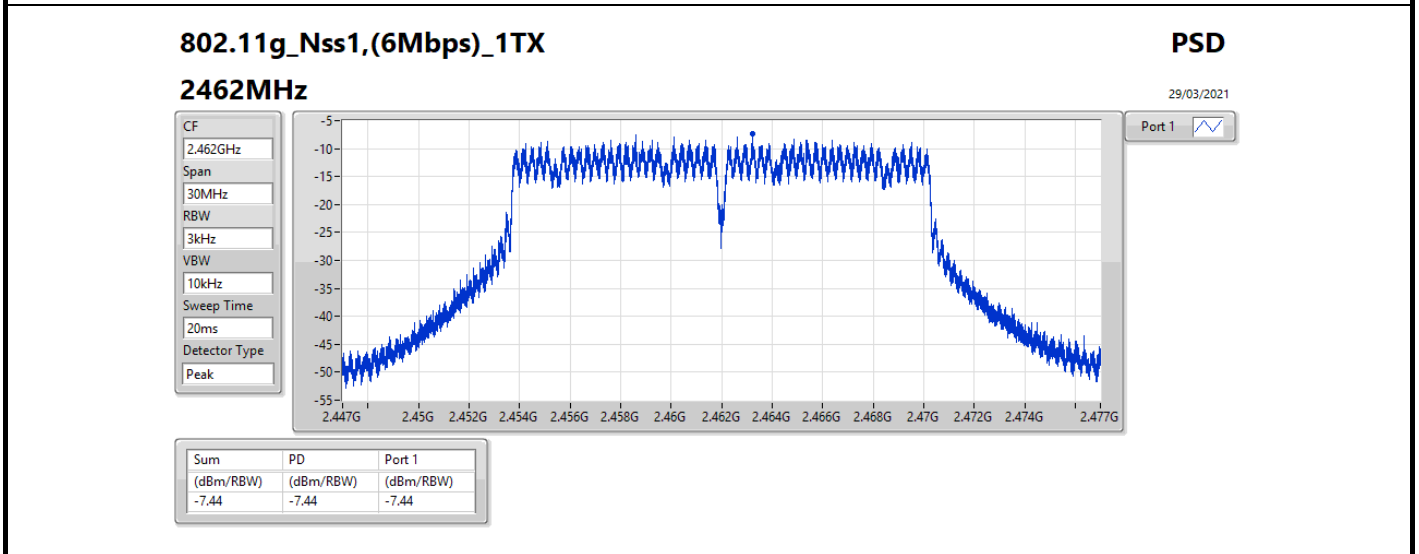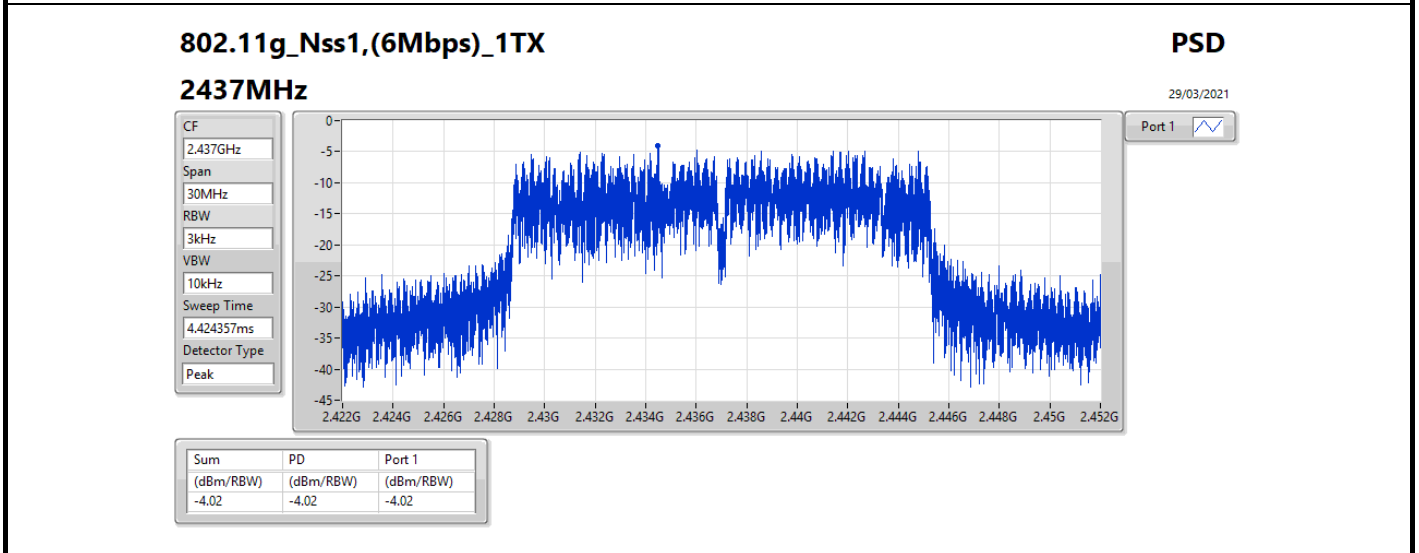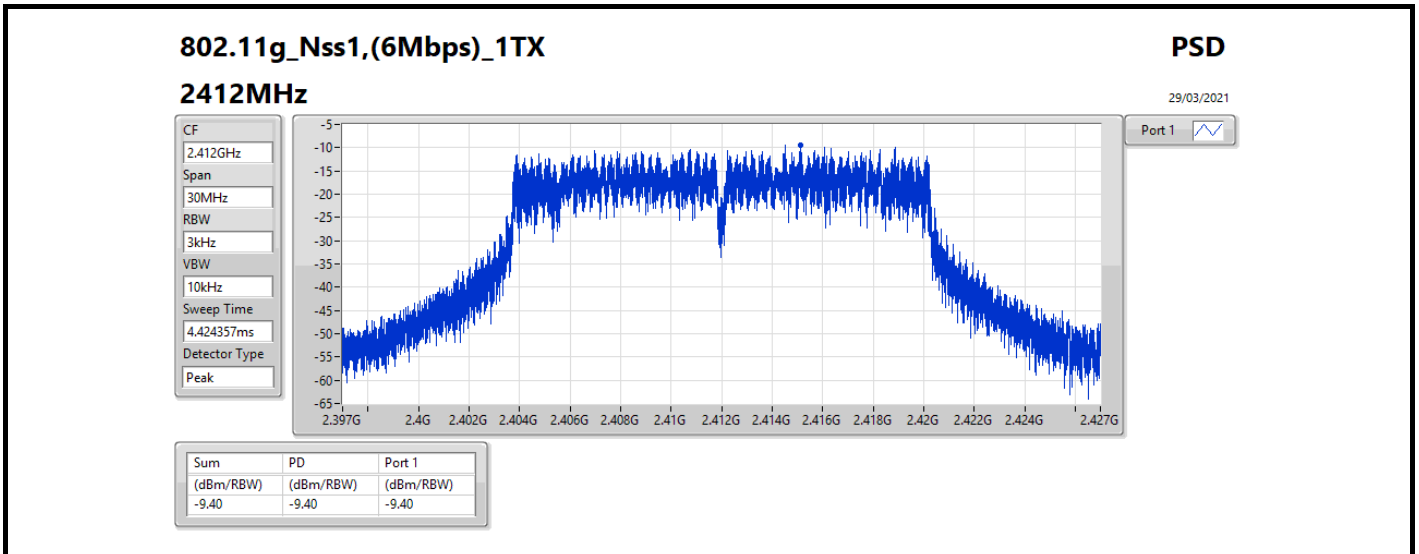

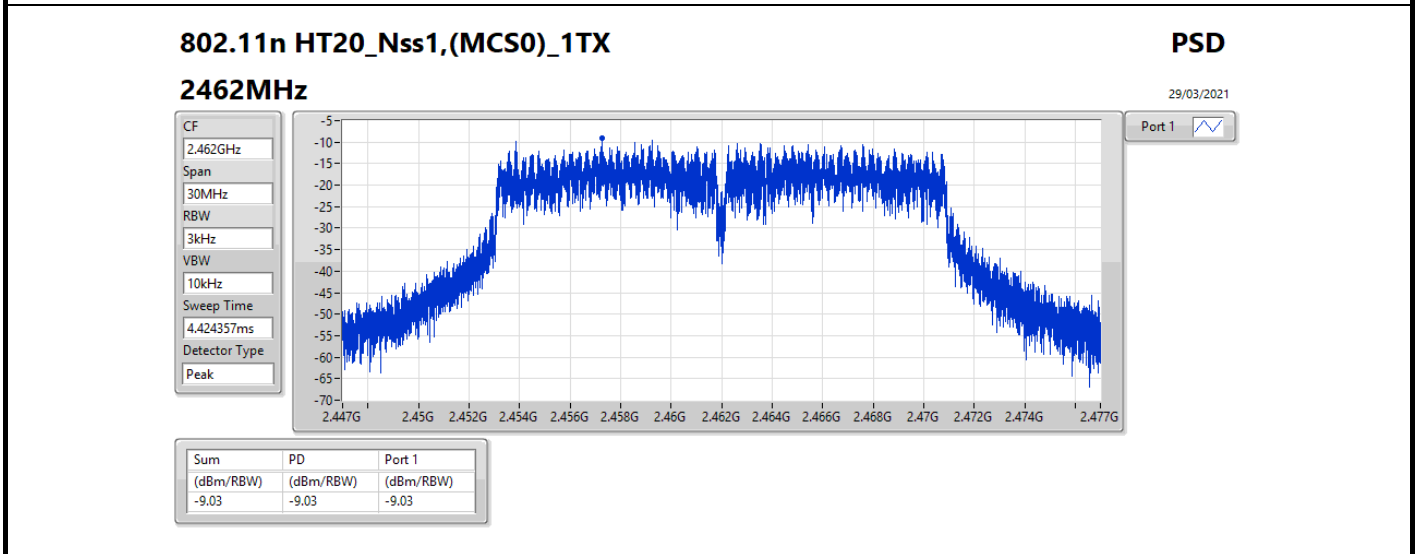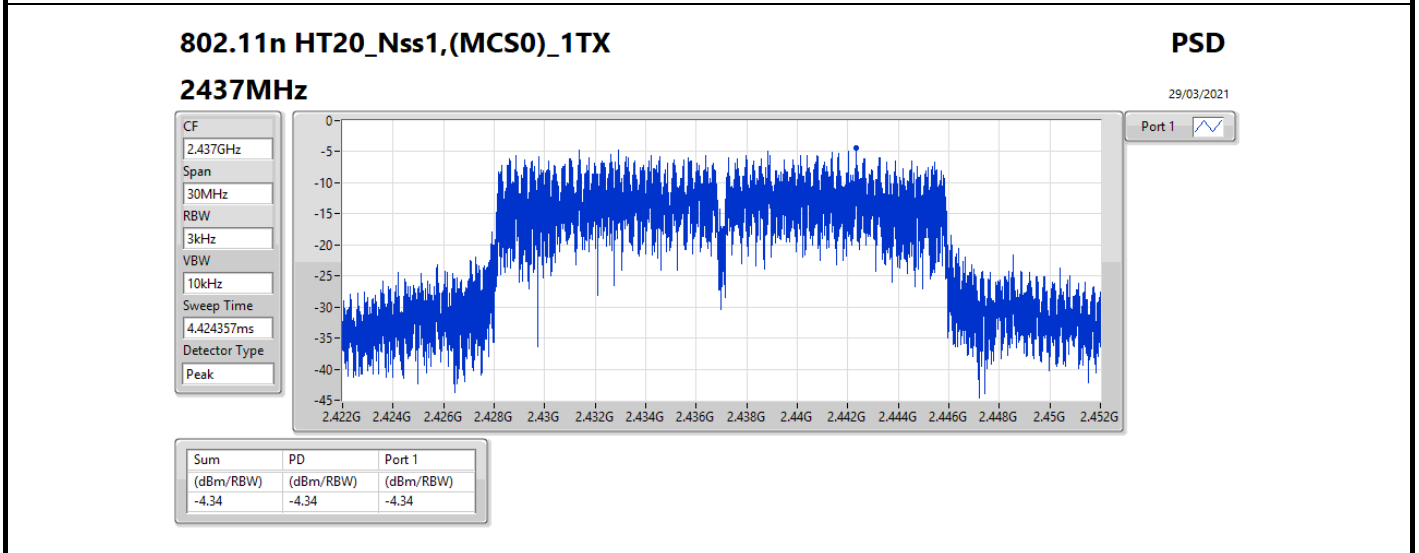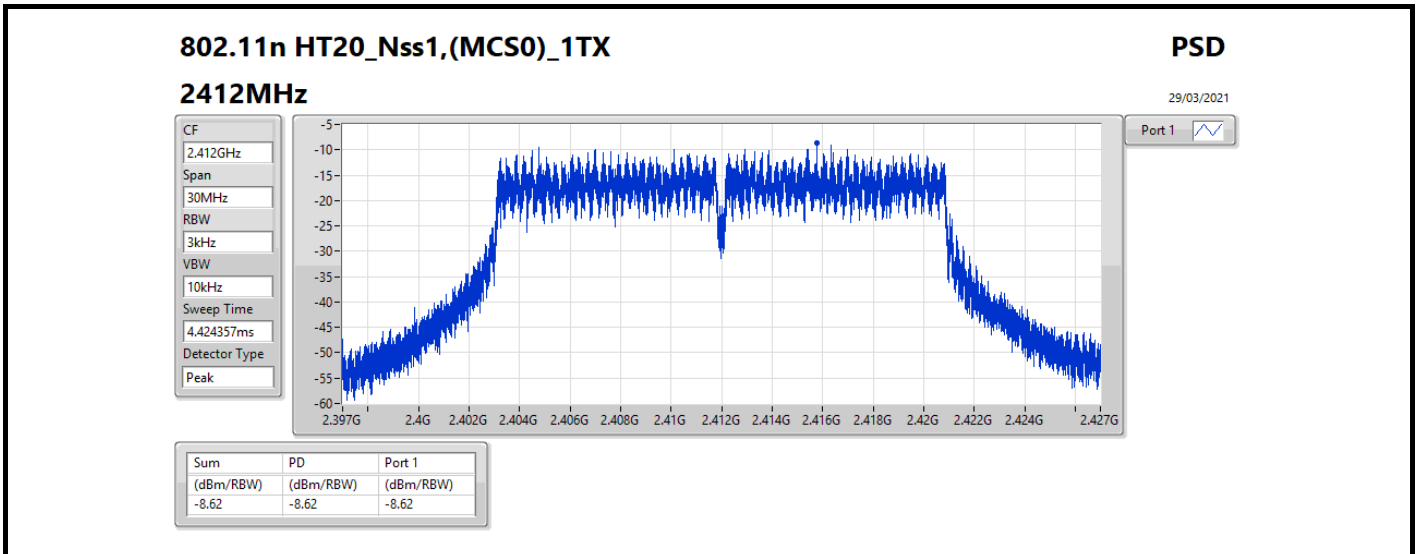

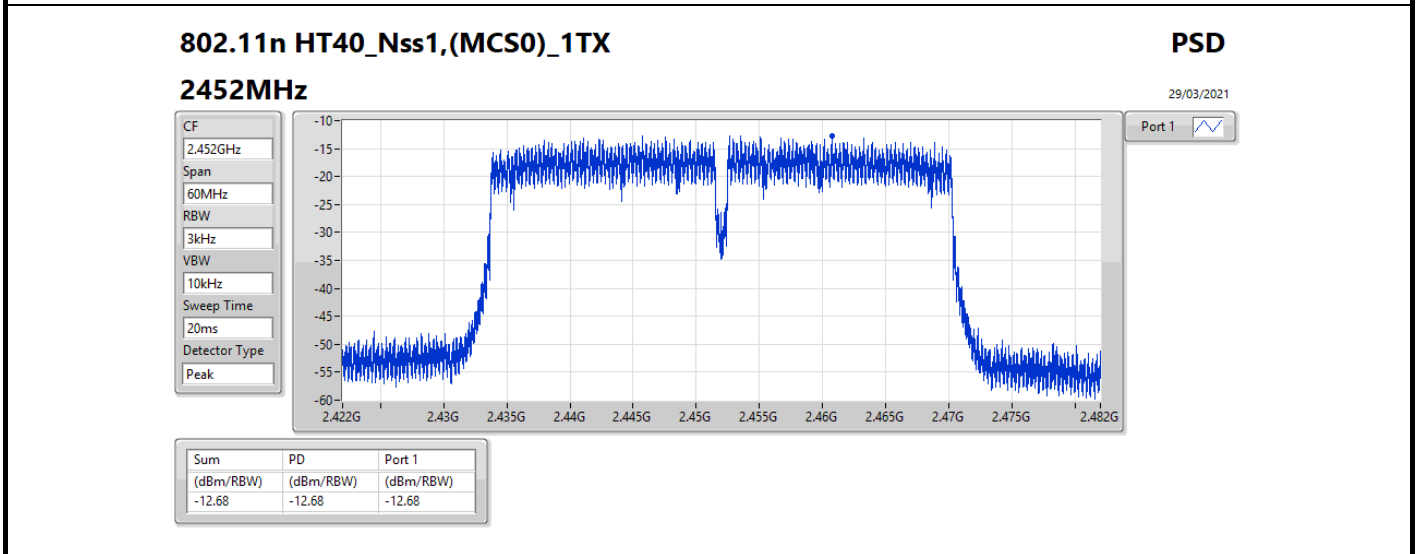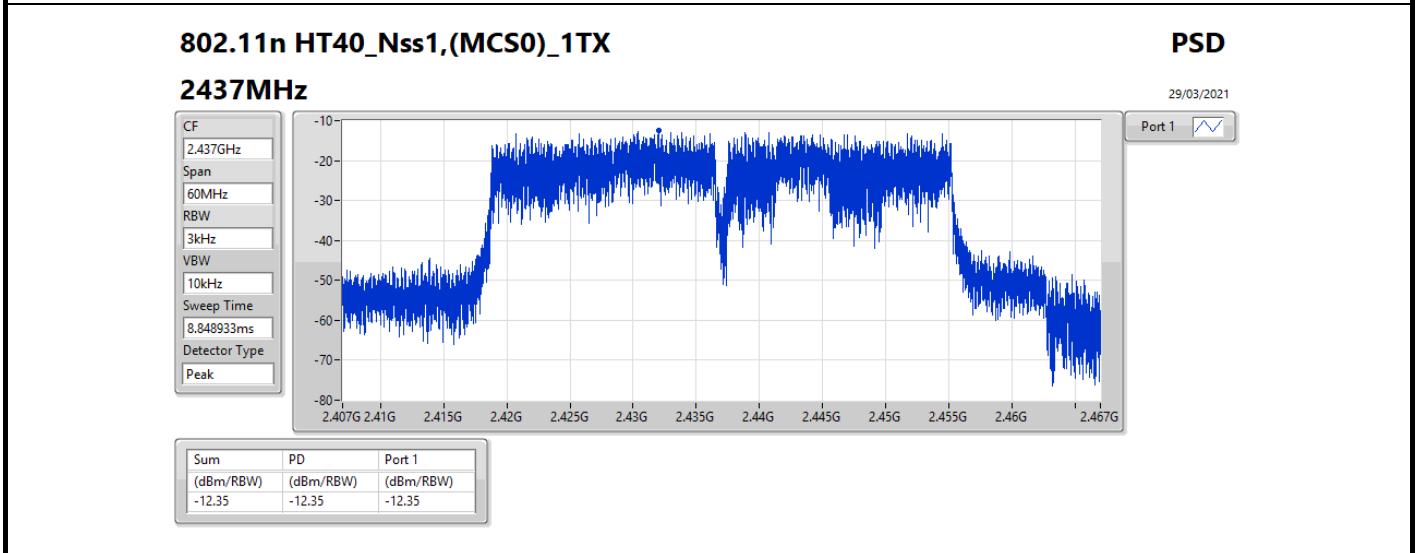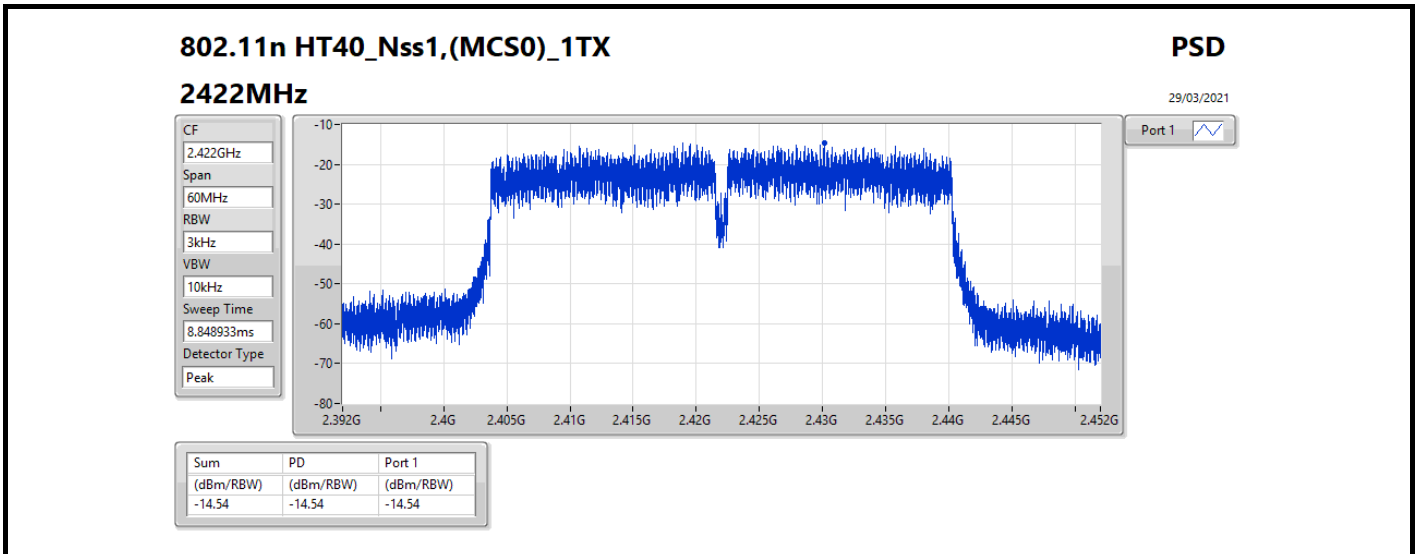







Summary



Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	Pass	2.43749G	8.35	-21.65	47.77M	-47.80	2.4G	-31.00	2.4G	-33.82	2.51796G	-50.97	24.51956G	-46.76	1
802.11g_Nss1,(6Mbps)_1TX	Pass	2.43198G	12.34	-17.66	47.77M	-47.61	2.4G	-27.38	2.4G	-27.46	2.51924G	-50.31	15.14686G	-46.42	1
802.11n HT20_Nss1,(MCS0)_1TX	Pass	2.442G	12.12	-17.88	47.77M	-48.18	2.39982G	-25.46	2.4G	-27.04	2.4906G	-50.52	16.42241G	-45.71	1
802.11n HT40_Nss1,(MCS0)_1TX	Pass	2.43449G	3.71	-26.29	47.75M	-47.44	2.39952G	-30.70	2.4G	-36.83	2.48362G	-35.26	21.87291G	-46.57	1



Result



Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43749G	8.35	-21.65	47.77M	-47.80	2.4G	-31.00	2.4G	-33.82	2.51796G	-50.97	24.51956G	-46.76	1
2437MHz	Pass	2.43749G	8.35	-21.65	47.77M	-50.00	2.39872G	-49.60	2.4G	-52.78	2.49348G	-50.41	6.60579G	-46.21	1
2462MHz	Pass	2.43749G	8.35	-21.65	47.77M	-47.56	2.3984G	-51.44	2.4835G	-53.32	2.4987G	-50.37	15.13001G	-46.50	1
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43198G	12.34	-17.66	47.77M	-47.61	2.4G	-27.38	2.4G	-27.46	2.51924G	-50.31	15.14686G	-46.42	1
2437MHz	Pass	2.43198G	12.34	-17.66	47.77M	-46.87	2.398G	-32.87	2.4G	-36.24	2.4838G	-37.38	24.49147G	-45.64	1
2462MHz	Pass	2.43198G	12.34	-17.66	47.77M	-46.26	2.39814G	-50.09	2.4835G	-37.65	2.48354G	-37.13	16.4196G	-44.88	1
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.442G	12.12	-17.88	47.77M	-48.18	2.39982G	-25.46	2.4G	-27.04	2.4906G	-50.52	16.42241G	-45.71	1
2437MHz	Pass	2.442G	12.12	-17.88	47.77M	-46.29	2.3995G	-30.84	2.4G	-35.84	2.48548G	-36.25	6.83056G	-45.93	1
2462MHz	Pass	2.442G	12.12	-17.88	47.77M	-47.75	2.39576G	-50.16	2.4835G	-39.44	2.48444G	-35.26	23.13445G	-45.72	1
802.11n HT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.43449G	3.71	-26.29	47.75M	-47.20	2.39956G	-32.60	2.4G	-38.71	2.48734G	-48.27	16.77702G	-46.14	1
2437MHz	Pass	2.43449G	3.71	-26.29	47.75M	-47.44	2.39952G	-30.70	2.4G	-36.83	2.48362G	-35.26	21.87291G	-46.57	1
2452MHz	Pass	2.43449G	3.71	-26.29	47.75M	-47.85	2.39848G	-42.78	2.4835G	-36.67	2.4847G	-33.35	16.60875G	-45.73	1

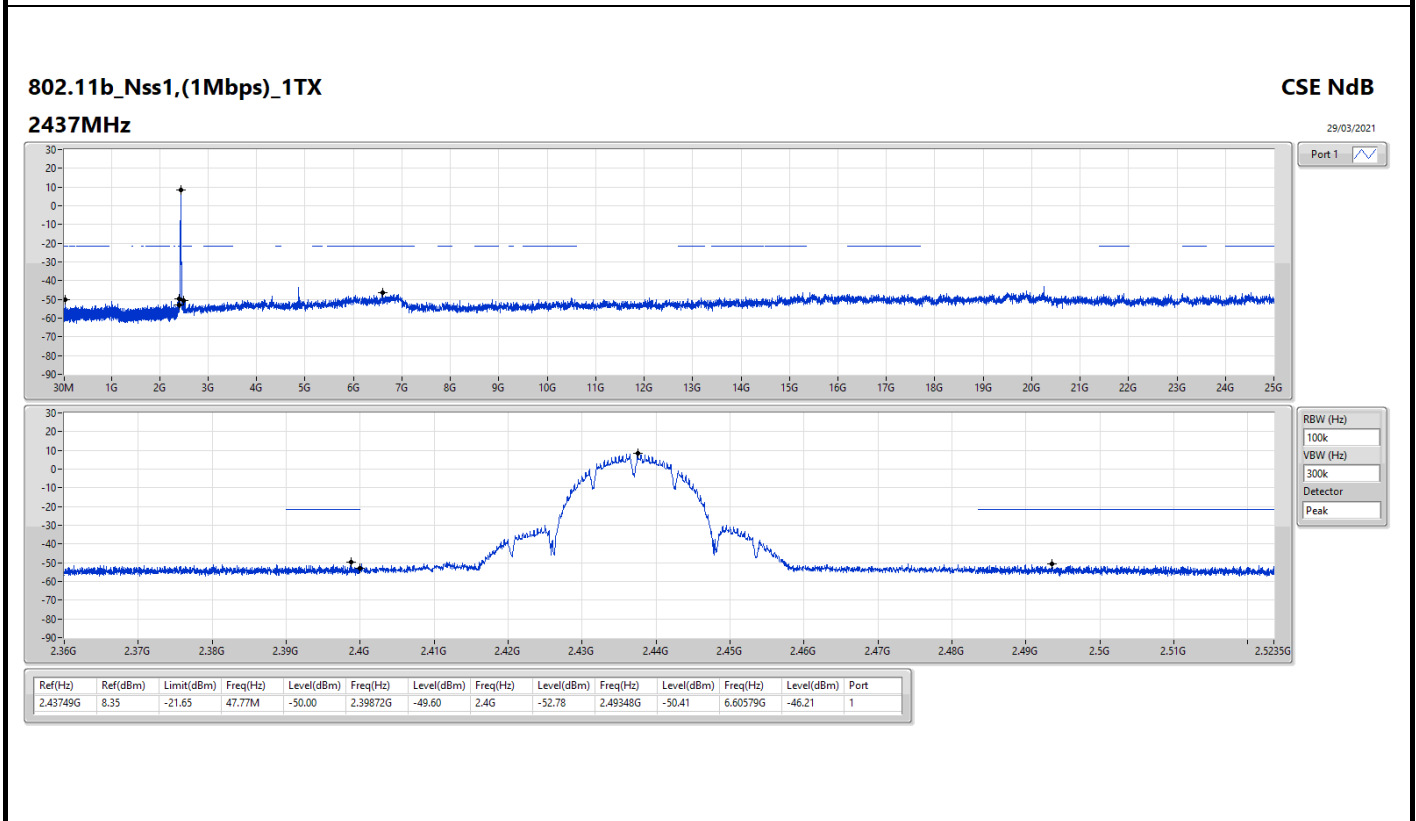
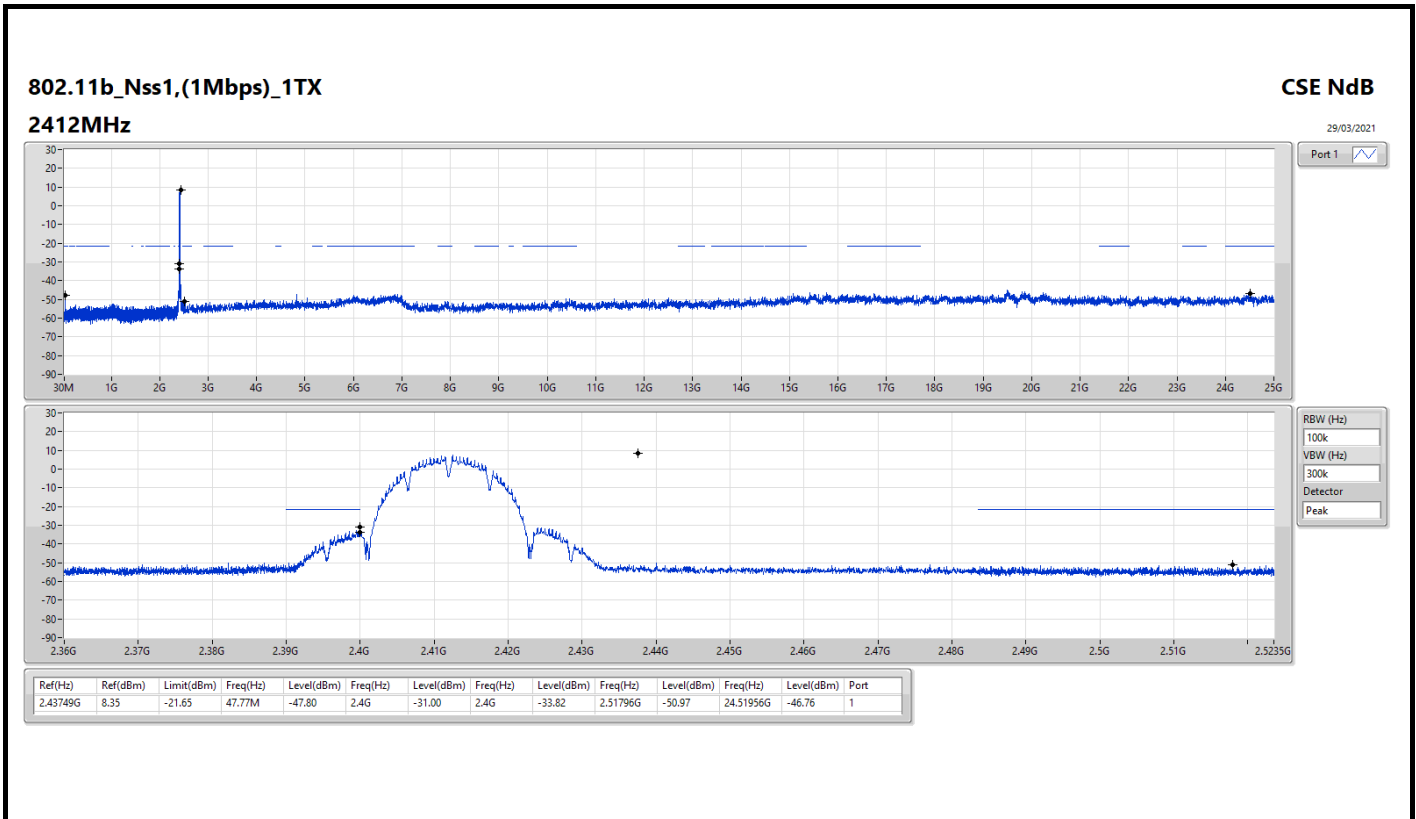


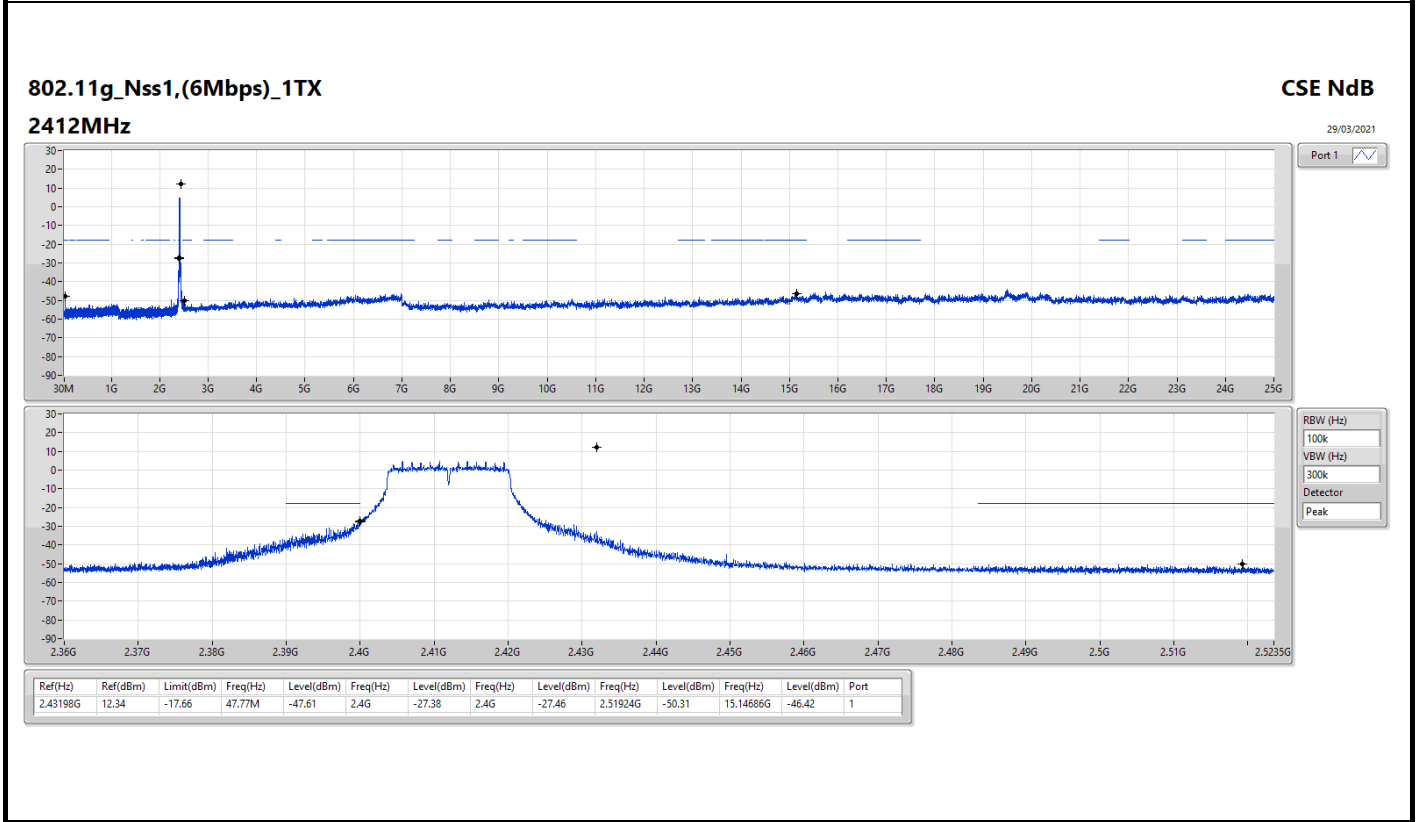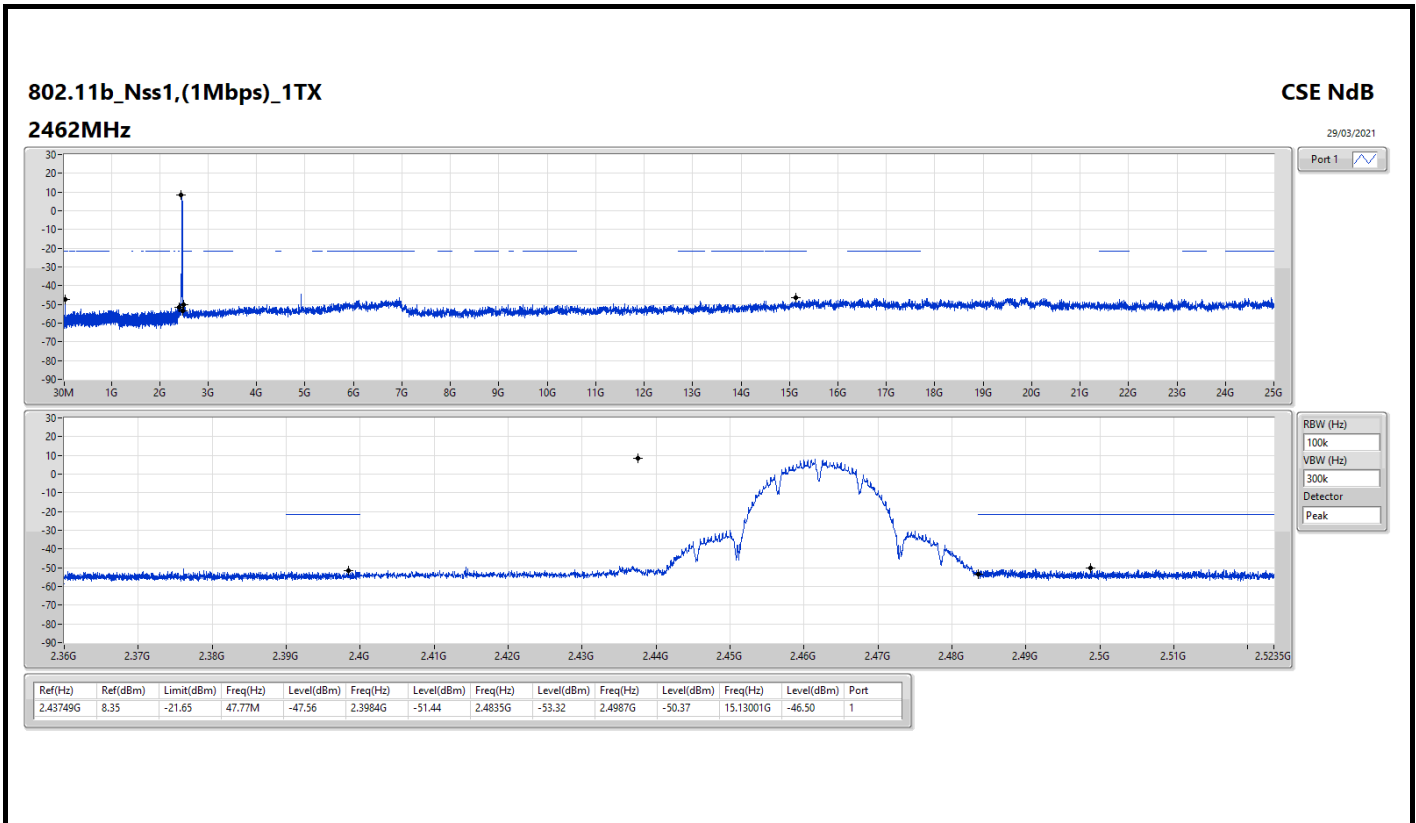

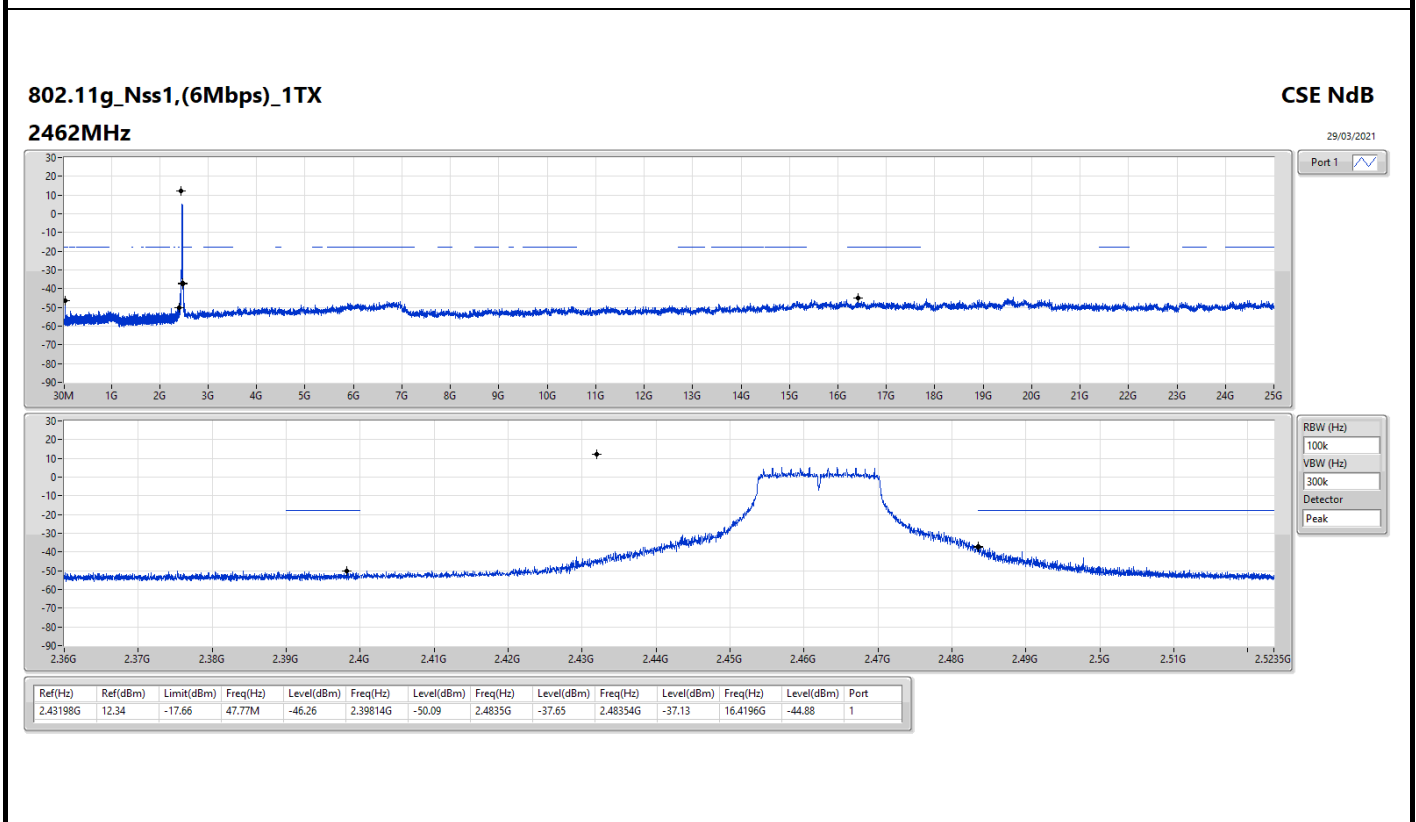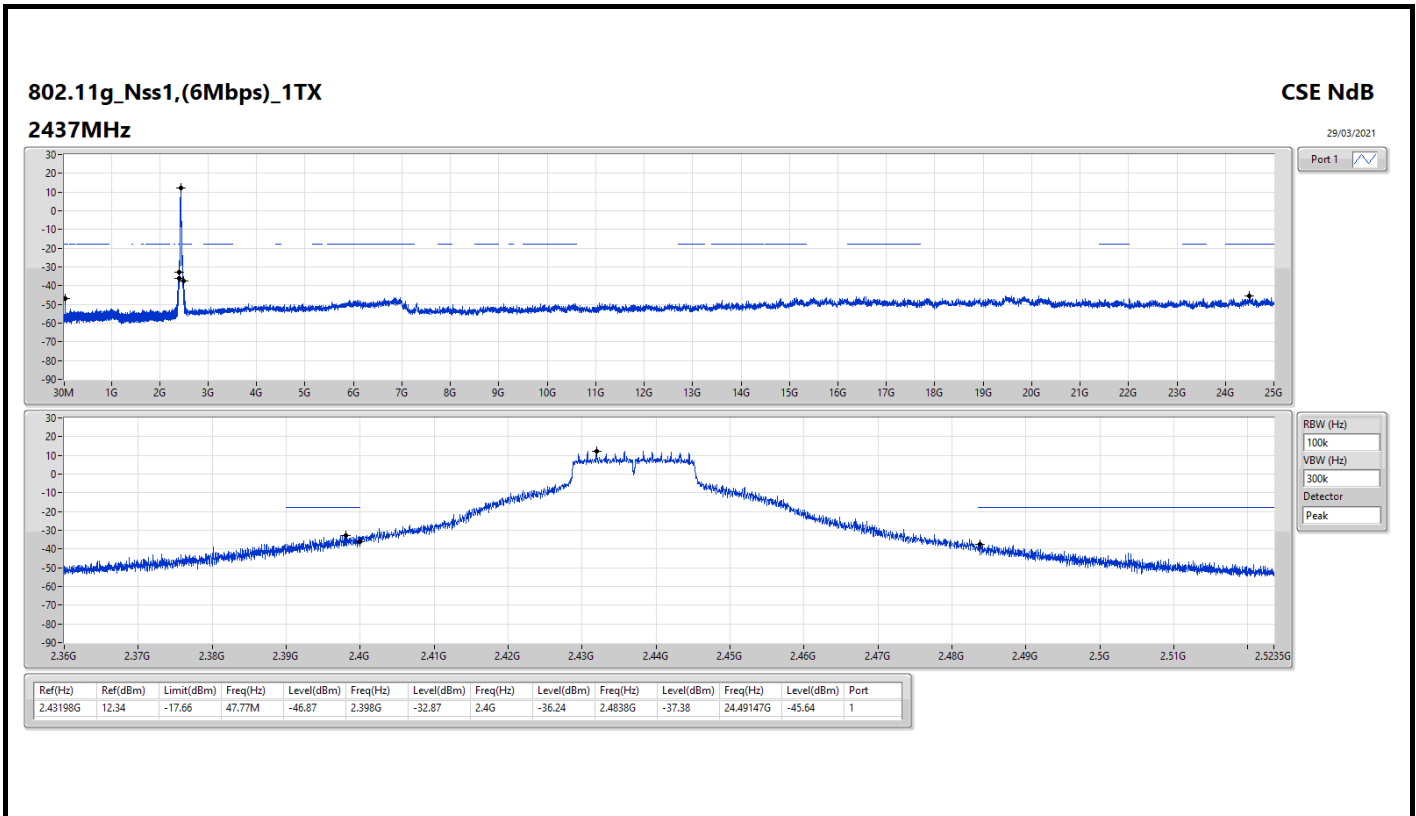

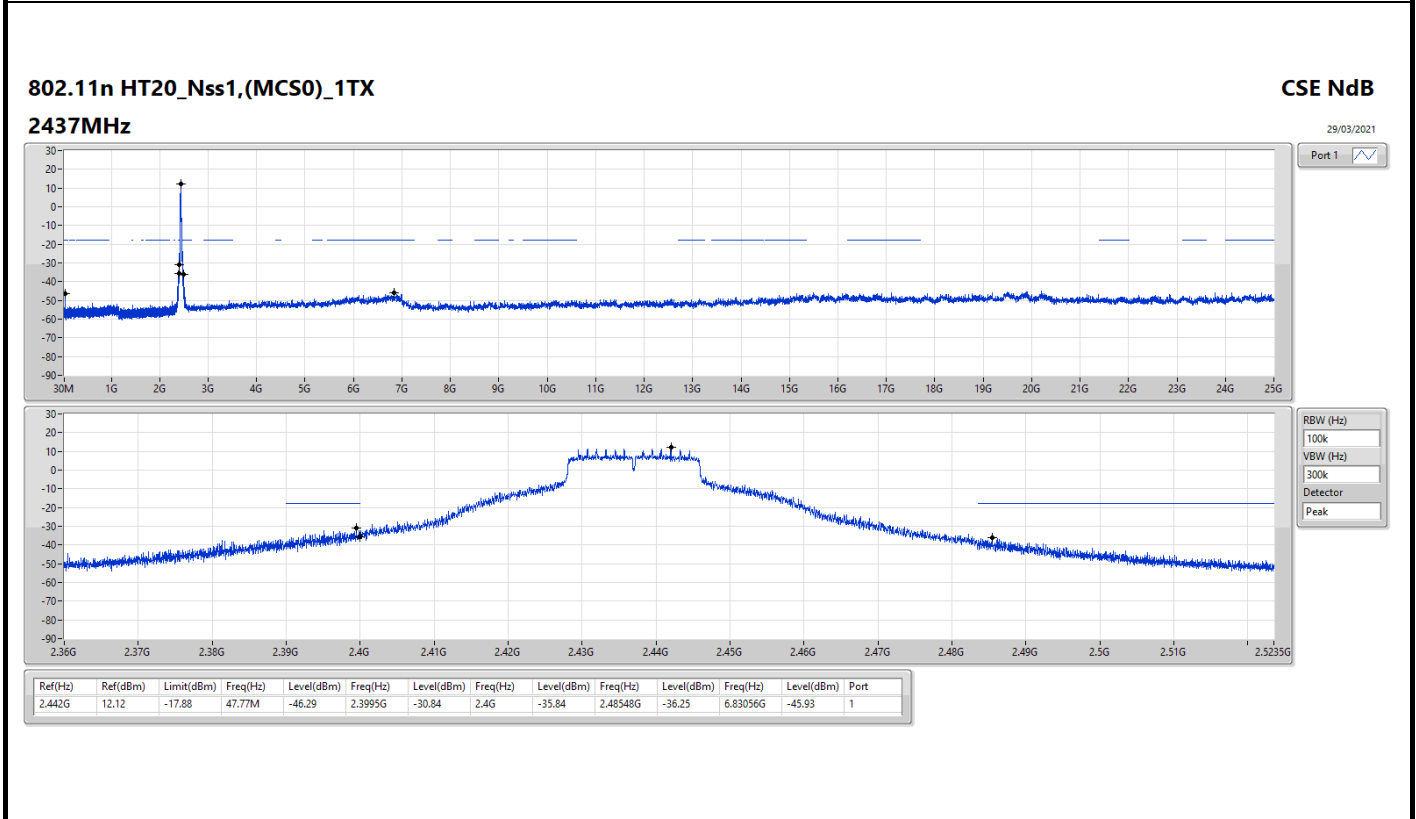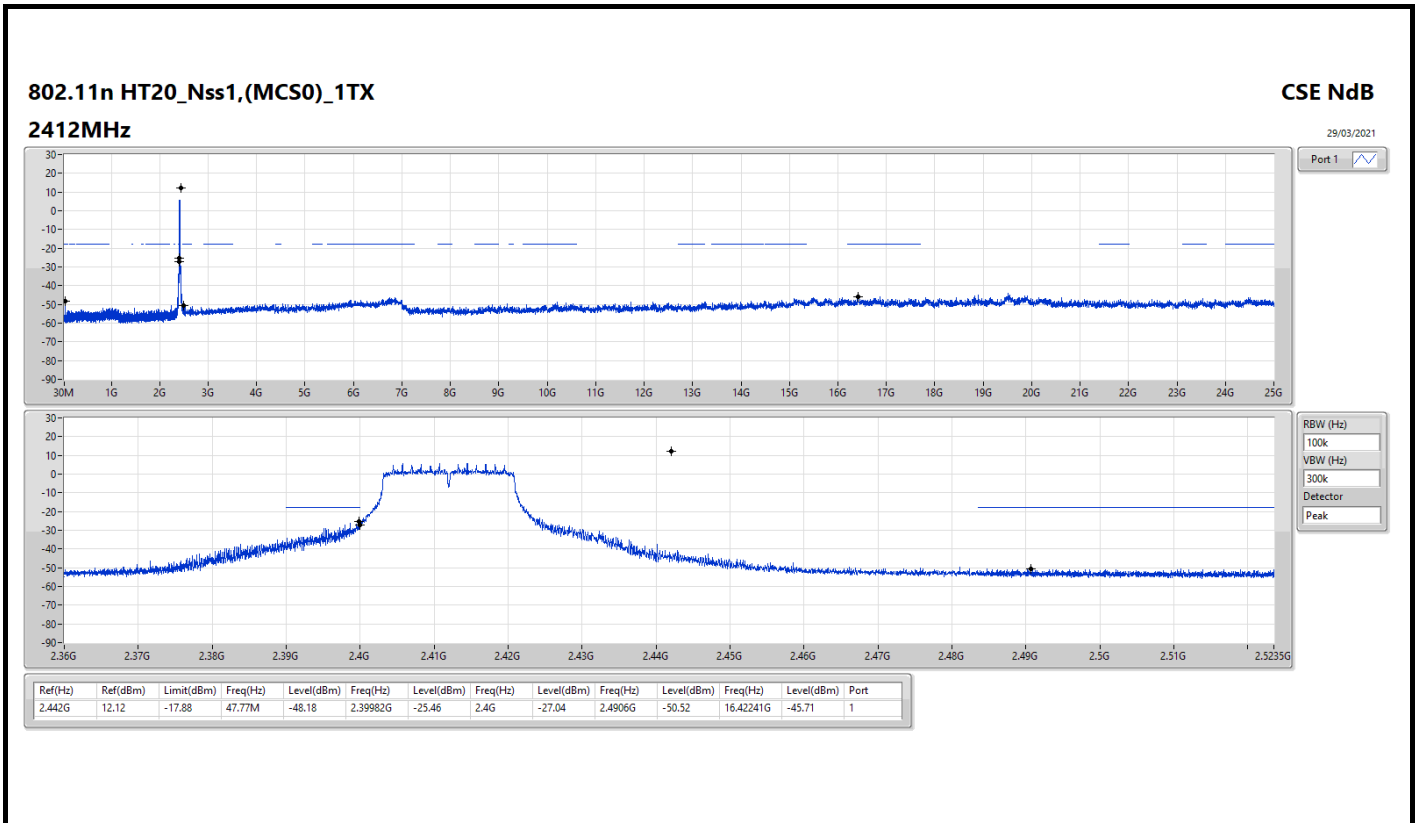

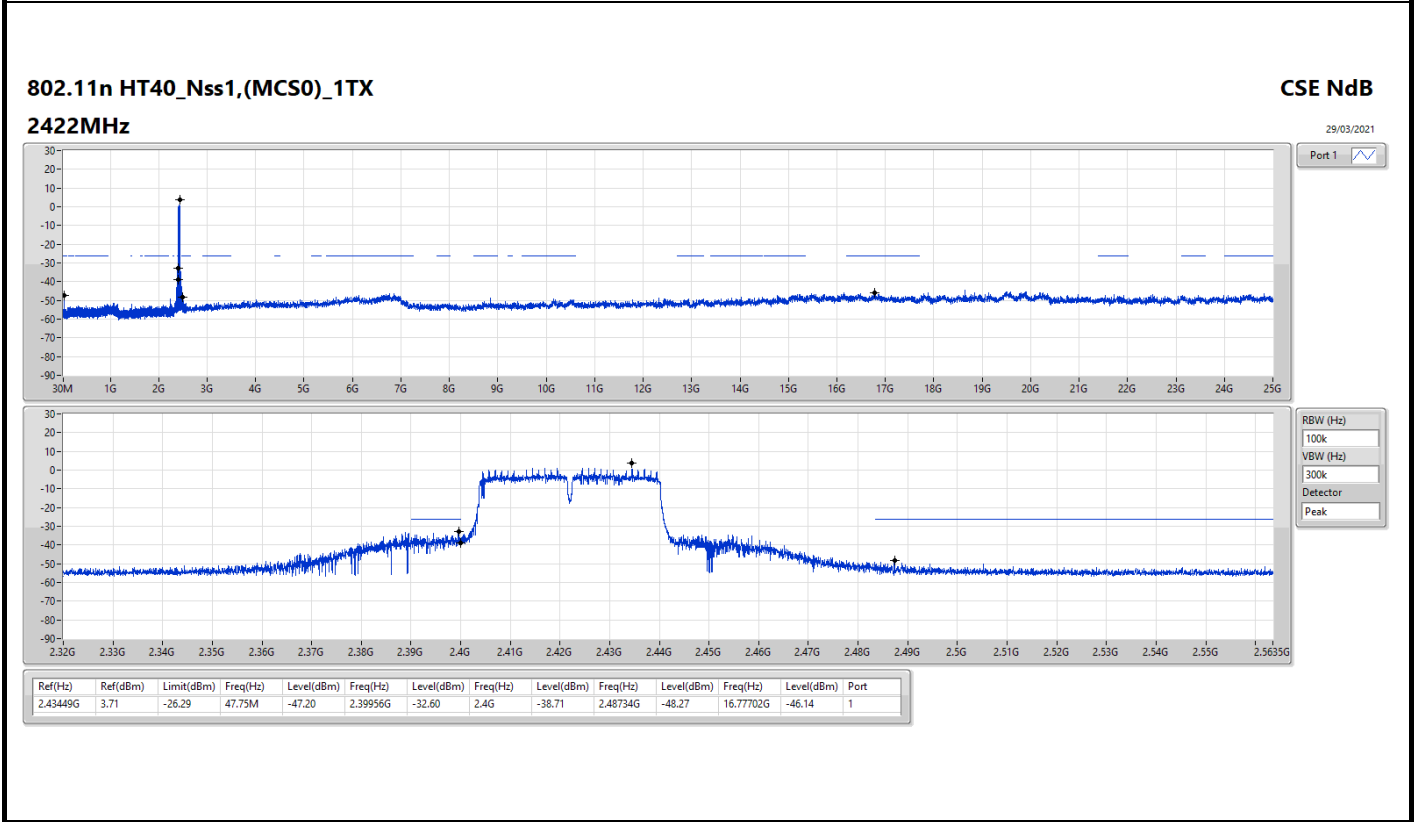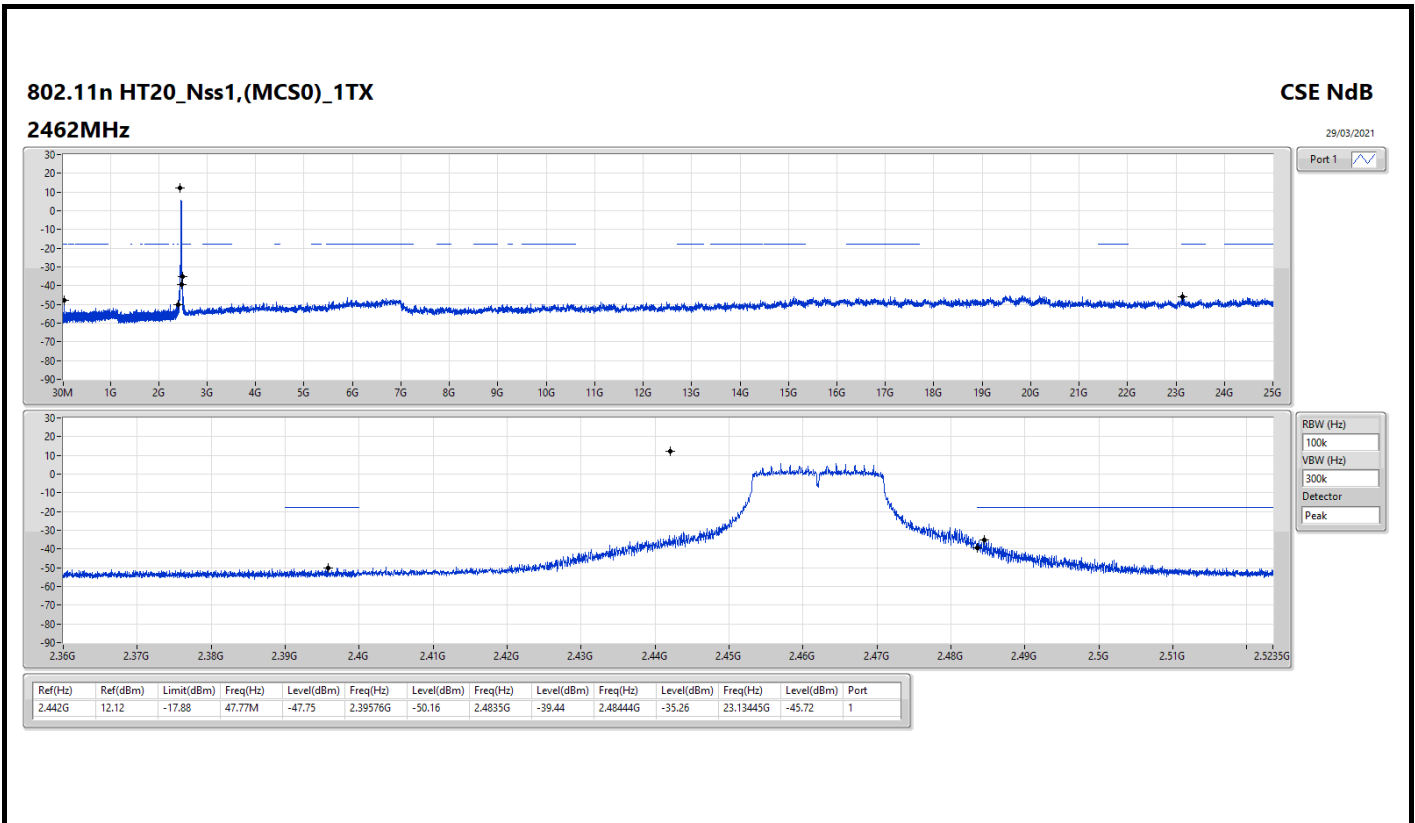

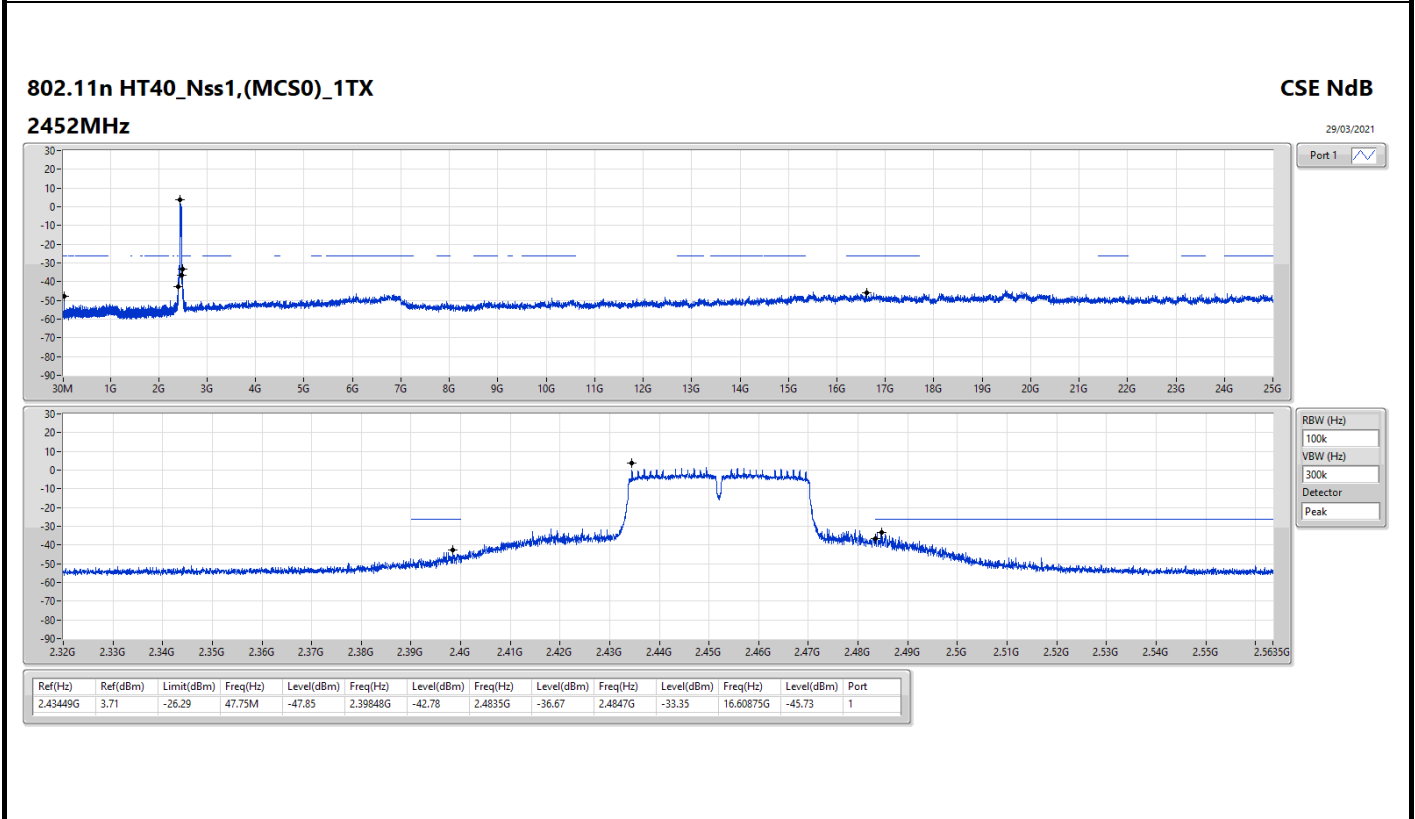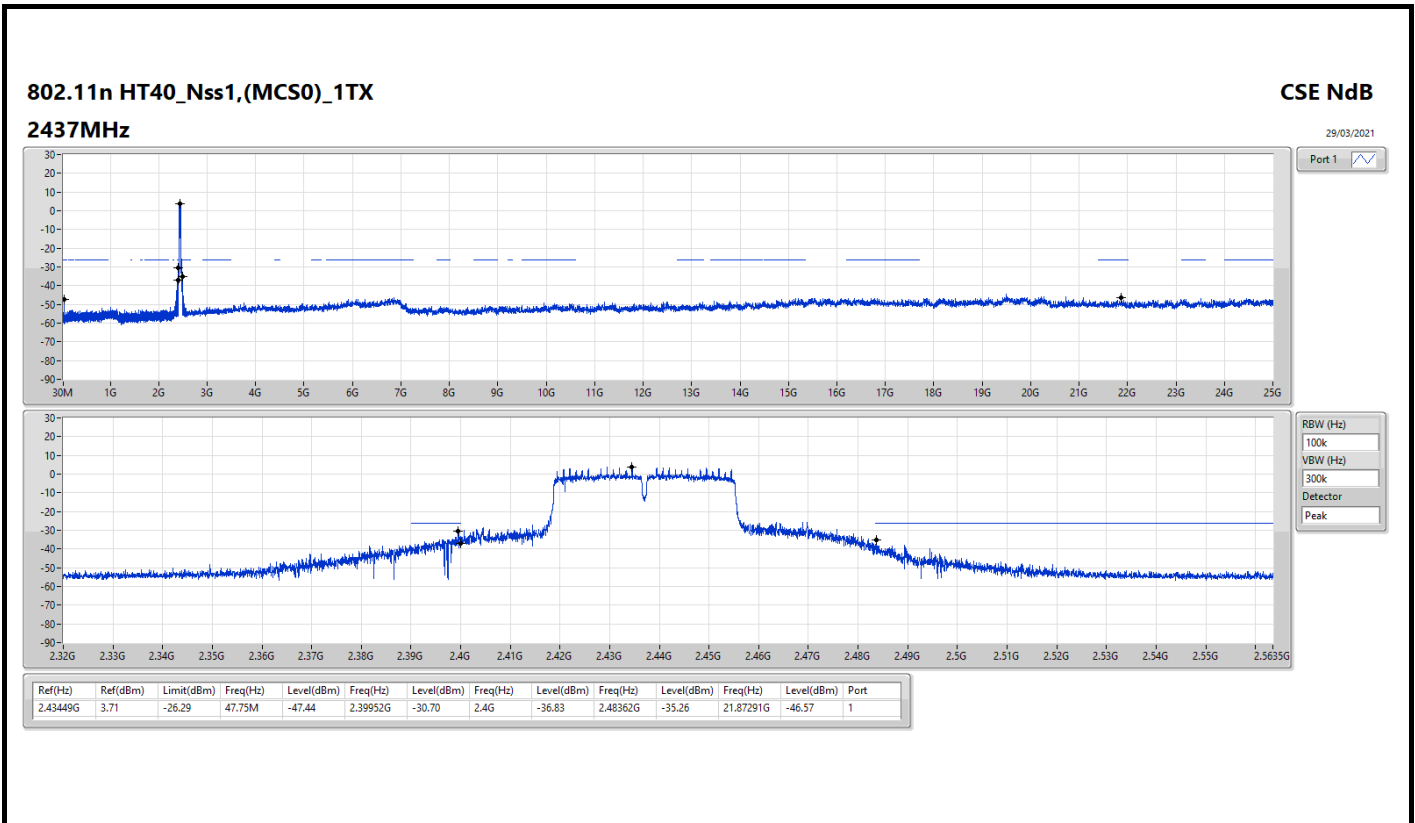




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 3	Pass	PK	30.17M	30.24	40.00	-9.76	Vertical

03/08/2021


Mode 3

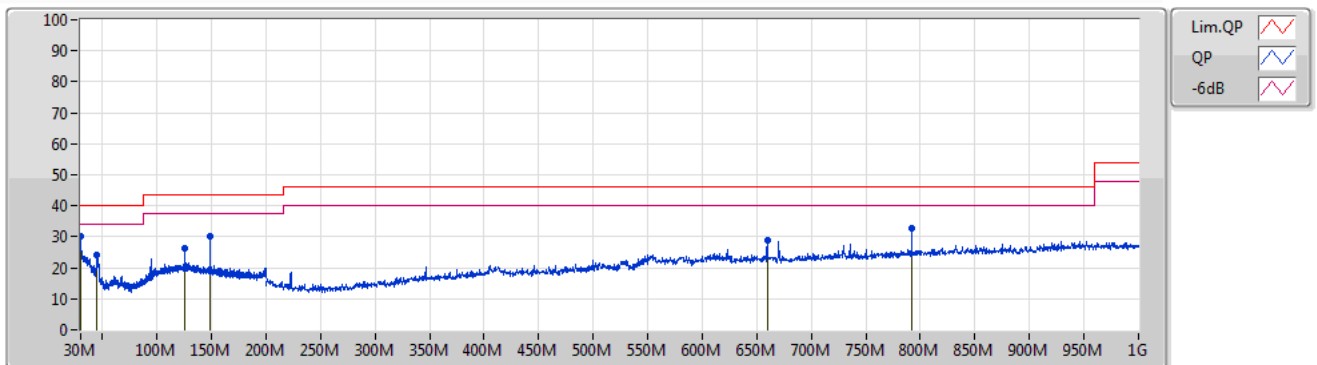

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	30.17M	30.24	40.00	-9.76	-3.13	3	Vertical	20	4.00	"Worst"	33.37	23.74	1.01	27.88
PK	45.22M	24.26	40.00	-15.74	-10.75	3	Vertical	326	1.00	-	35.01	15.78	1.40	27.93
PK	125.03M	26.28	43.50	-17.22	-6.71	3	Vertical	70	1.00	-	32.99	18.12	2.78	27.61
PK	148.83M	30.31	43.50	-13.19	-7.88	3	Vertical	257	2.00	-	38.19	16.56	3.09	27.53
PK	659.6M	28.93	46.00	-17.07	-2.88	3	Vertical	11	1.00	-	31.81	19.20	5.64	27.72
PK	792M	32.84	46.00	-13.16	-0.39	3	Vertical	254	1.00	-	33.23	20.56	6.25	27.20

03/08/2021

Mode 3

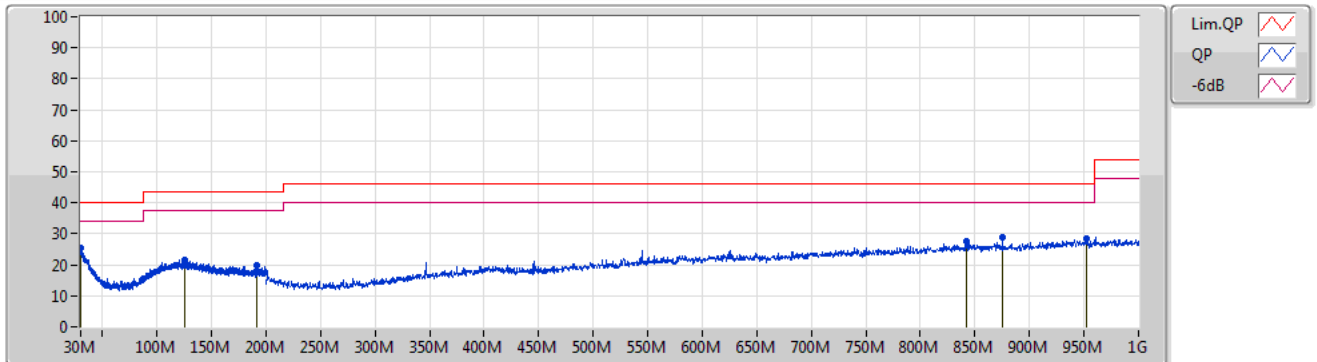

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	30.17M	25.59	40.00	-14.41	-3.13	3	Horizontal	6	4.00	"Worst"	28.72	23.74	1.01	27.88
PK	125.03M	21.63	43.50	-21.87	-6.71	3	Horizontal	303	2.00	-	28.34	18.12	2.78	27.61
PK	191.42M	19.72	43.50	-23.78	-8.69	3	Horizontal	166	2.00	-	28.41	15.01	3.61	27.31
PK	841.6M	27.79	46.00	-18.21	1.01	3	Horizontal	355	1.00	-	26.78	21.45	6.47	26.91
PK	875.2M	28.86	46.00	-17.14	1.40	3	Horizontal	227	1.00	-	27.46	21.60	6.55	26.75
PK	952.4M	28.51	46.00	-17.49	2.78	3	Horizontal	11	1.00	-	25.73	22.12	7.00	26.34




Test Mode: Mode 1
Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.11g_Nss1,(6Mbps)_1TX	Pass	AV	2.39G	52.86	54.00	-1.14	3	Horizontal	313	2.50	-

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2412MHz_TX

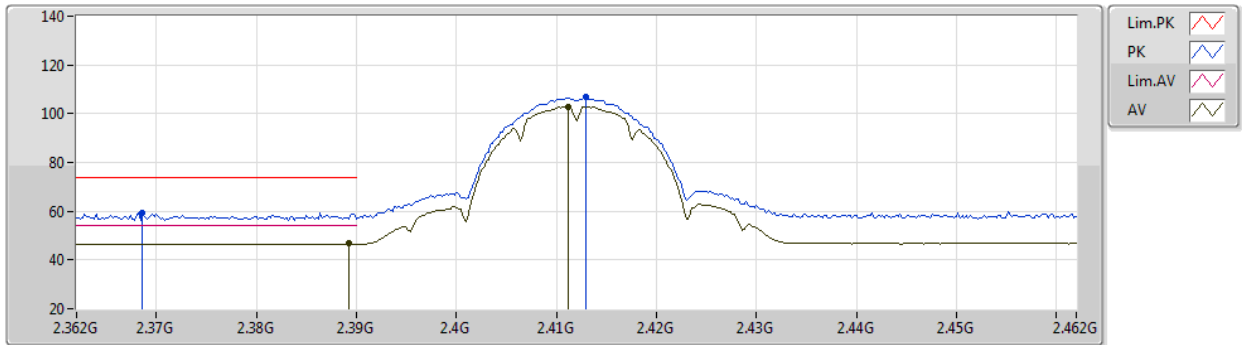


EUT Y_1TX
Setting 31
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3686G	59.37	74.00	-14.63	28.65	3	Vertical	9	2.31	-	28.30	2.42	-
AV	2.3892G	46.69	54.00	-7.31	15.98	3	Vertical	9	2.31	-	28.30	2.41	-
PK	2.413G	106.67	Inf	-Inf	75.93	3	Vertical	9	2.31	-	28.33	2.41	-
AV	2.4112G	102.89	Inf	-Inf	72.16	3	Vertical	9	2.31	-	28.32	2.41	-

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2412MHz_TX

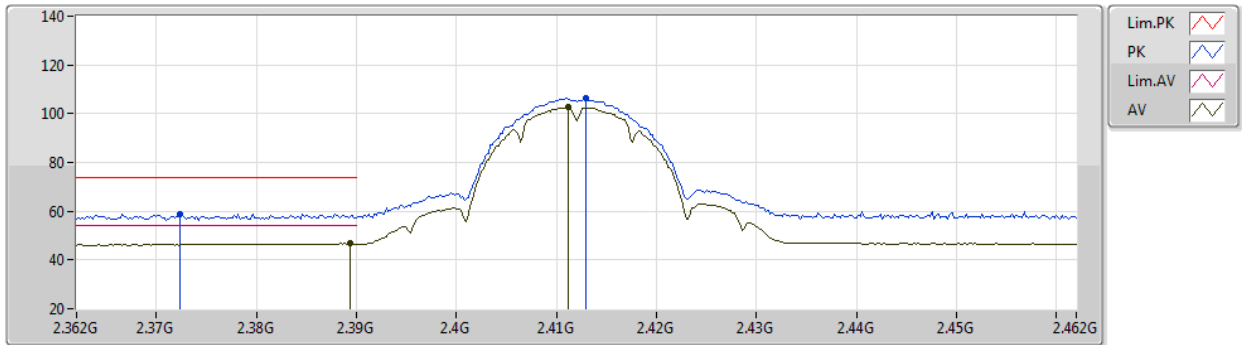

EUT Y_1TX
Setting 31
02-B-E-2


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3724G	59.00	74.00	-15.00	28.29	3	Horizontal	312	2.49	-	28.30	2.41	-
AV	2.3894G	46.73	54.00	-7.27	16.02	3	Horizontal	312	2.49	-	28.30	2.41	-
PK	2.413G	106.21	Inf	-Inf	75.47	3	Horizontal	312	2.49	-	28.33	2.41	-
AV	2.4112G	102.51	Inf	-Inf	71.78	3	Horizontal	312	2.49	-	28.32	2.41	-



802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2412MHz_TX

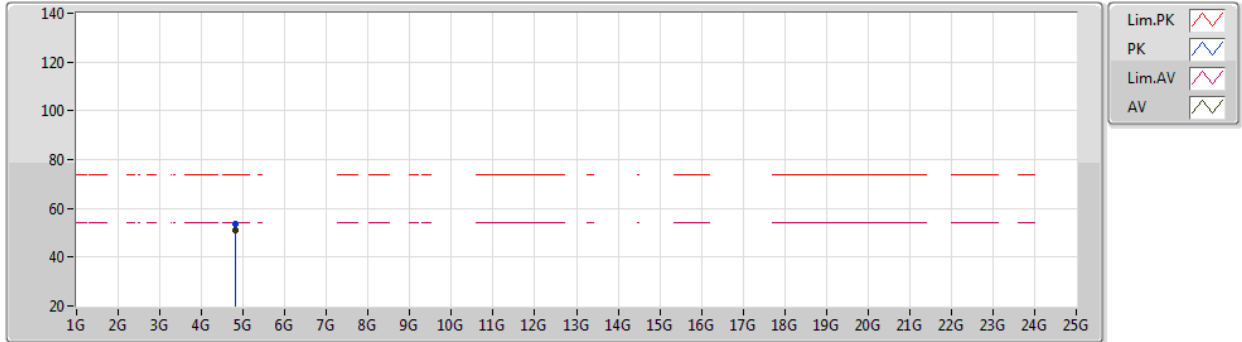


EUT Y_1TX
Setting 31
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82397G	53.85	74.00	-20.15	48.03	3	Vertical	314	1.58	-	32.90	4.70	31.78
AV	4.82397G	50.90	54.00	-3.10	45.08	3	Vertical	314	1.58	-	32.90	4.70	31.78

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2412MHz_TX

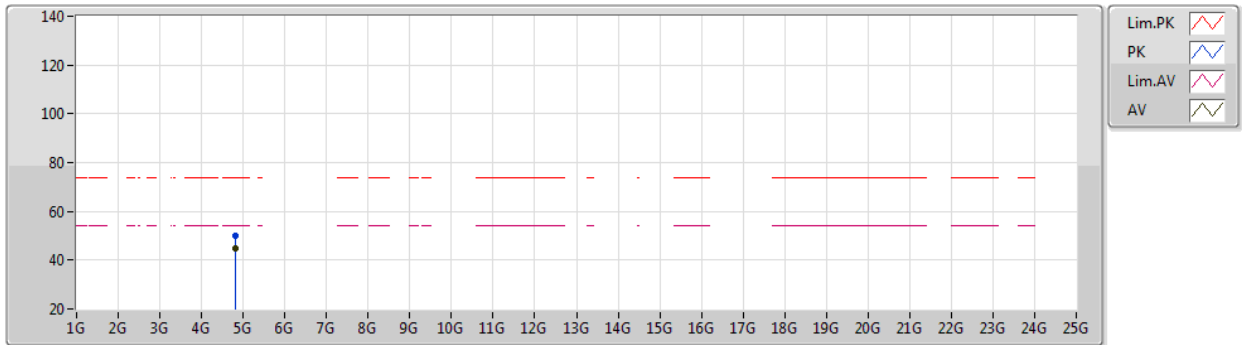


EUT Y_1TX
Setting 31
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82391G	50.25	74.00	-23.75	44.43	3	Horizontal	257	2.09	-	32.90	4.70	31.78
AV	4.824G	44.94	54.00	-9.06	39.12	3	Horizontal	257	2.09	-	32.90	4.70	31.78

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2437MHz_TX

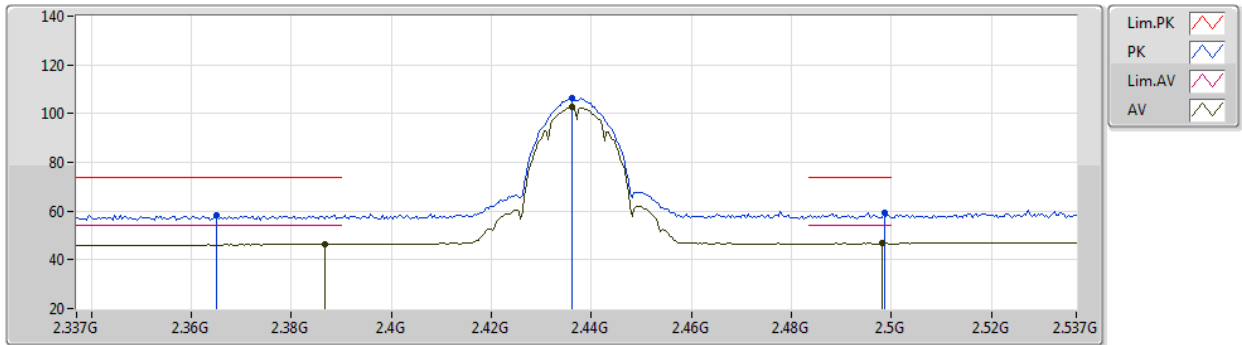


EUT Y_1TX
Setting 30
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.365G	58.50	74.00	-15.50	27.78	3	Vertical	4	2.04	-	28.30	2.42	-
AV	2.3866G	46.35	54.00	-7.65	15.64	3	Vertical	4	2.04	-	28.30	2.41	-
PK	2.4362G	106.35	Inf	-Inf	75.56	3	Vertical	4	2.04	-	28.37	2.42	-
AV	2.4362G	102.68	Inf	-Inf	71.89	3	Vertical	4	2.04	-	28.37	2.42	-
PK	2.4986G	59.35	74.00	-14.65	28.31	3	Vertical	4	2.04	-	28.59	2.45	-
AV	2.4982G	46.75	54.00	-7.25	15.71	3	Vertical	4	2.04	-	28.59	2.45	-

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2437MHz_TX

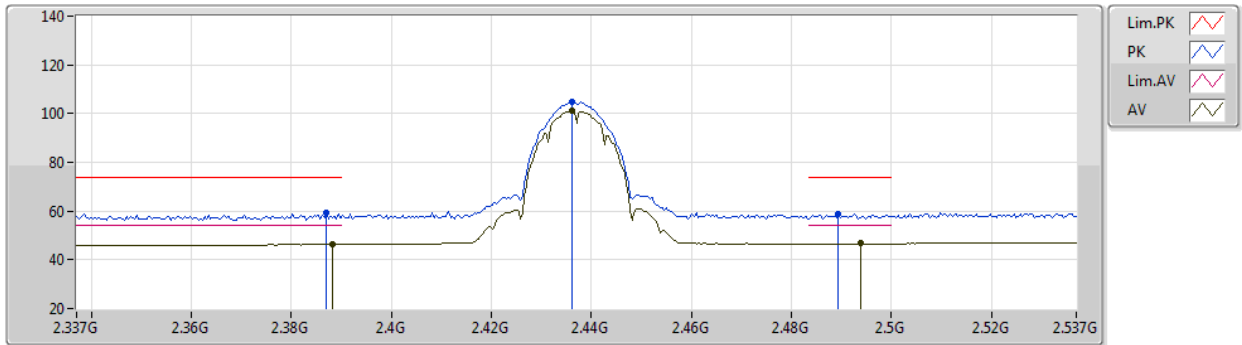


EUT Y_1TX
Setting 30
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.387G	59.44	74.00	-14.56	28.73	3	Horizontal	307	2.22	-	28.30	2.41	-
AV	2.3882G	46.29	54.00	-7.71	15.58	3	Horizontal	307	2.22	-	28.30	2.41	-
PK	2.4362G	104.89	Inf	-Inf	74.10	3	Horizontal	307	2.22	-	28.37	2.42	-
AV	2.4362G	101.19	Inf	-Inf	70.40	3	Horizontal	307	2.22	-	28.37	2.42	-
PK	2.4894G	58.81	74.00	-15.19	27.81	3	Horizontal	307	2.22	-	28.56	2.44	-
AV	2.4938G	46.65	54.00	-7.35	15.62	3	Horizontal	307	2.22	-	28.58	2.45	-

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2437MHz_TX

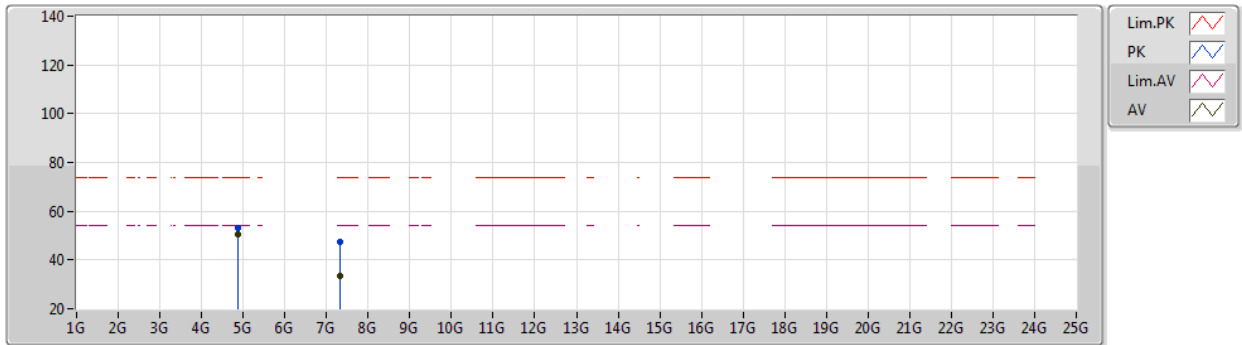


EUT Y_1TX
Setting 30
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87398G	53.33	74.00	-20.67	47.32	3	Vertical	312	1.48	-	33.10	4.70	31.79
AV	4.87398G	50.55	54.00	-3.45	44.54	3	Vertical	312	1.48	-	33.10	4.70	31.79
PK	7.31063G	47.55	74.00	-26.45	37.79	3	Vertical	90	2.83	-	36.42	5.76	32.42
AV	7.31172G	33.35	54.00	-20.65	23.59	3	Vertical	90	2.83	-	36.42	5.76	32.42

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2437MHz_TX

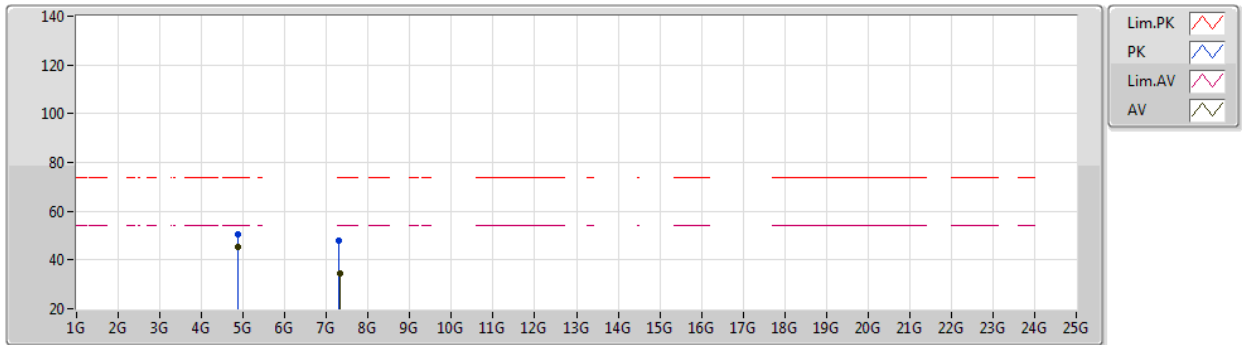


EUT Y_1TX
Setting 30
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87392G	50.43	74.00	-23.57	44.42	3	Horizontal	255	2.14	-	33.10	4.70	31.79
AV	4.87399G	45.28	54.00	-8.72	39.27	3	Horizontal	255	2.14	-	33.10	4.70	31.79
PK	7.3098G	48.07	74.00	-25.93	38.32	3	Horizontal	41	1.80	-	36.42	5.75	32.42
AV	7.31174G	34.29	54.00	-19.71	24.53	3	Horizontal	41	1.80	-	36.42	5.76	32.42

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2462MHz_TX

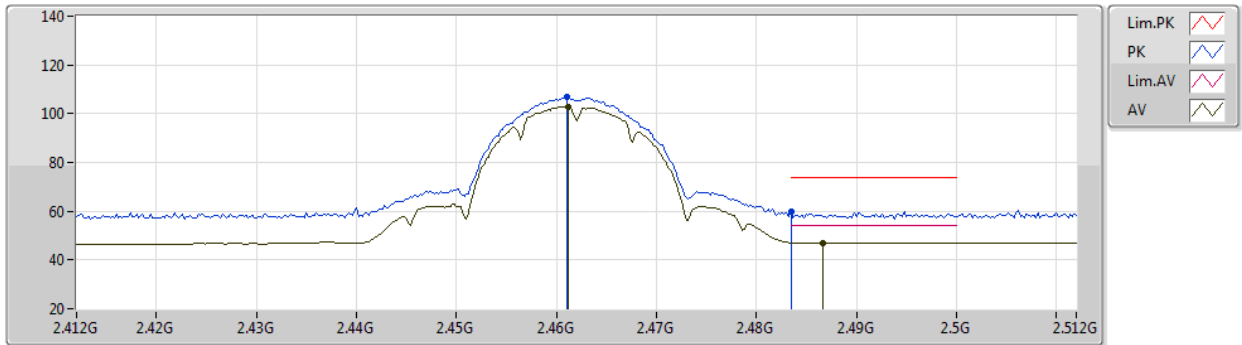


EUT Y_1TX
Setting 33
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.461G	106.64	Inf	-Inf	75.77	3	Vertical	272	1.13	-	28.44	2.43	-
AV	2.4612G	102.92	Inf	-Inf	72.05	3	Vertical	272	1.13	-	28.44	2.43	-
PK	2.4835G	59.67	74.00	-14.33	28.70	3	Vertical	272	1.13	-	28.53	2.44	-
AV	2.4866G	46.88	54.00	-7.12	15.89	3	Vertical	272	1.13	-	28.55	2.44	-

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2462MHz_TX

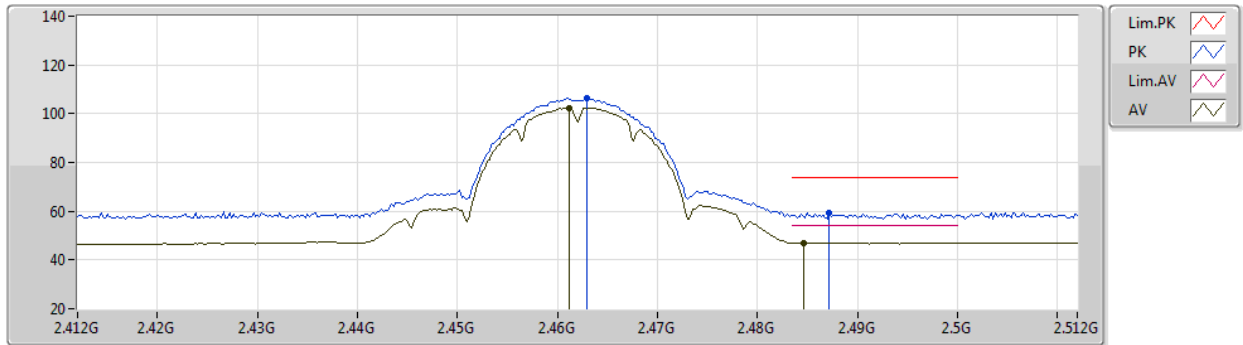


EUT Y_1TX
Setting 33
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.463G	106.21	Inf	-Inf	75.33	3	Horizontal	311	2.86	-	28.45	2.43	-
AV	2.4612G	102.46	Inf	-Inf	71.59	3	Horizontal	311	2.86	-	28.44	2.43	-
PK	2.4872G	59.30	74.00	-14.70	28.31	3	Horizontal	311	2.86	-	28.55	2.44	-
AV	2.4846G	46.88	54.00	-7.12	15.90	3	Horizontal	311	2.86	-	28.54	2.44	-

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2462MHz_TX

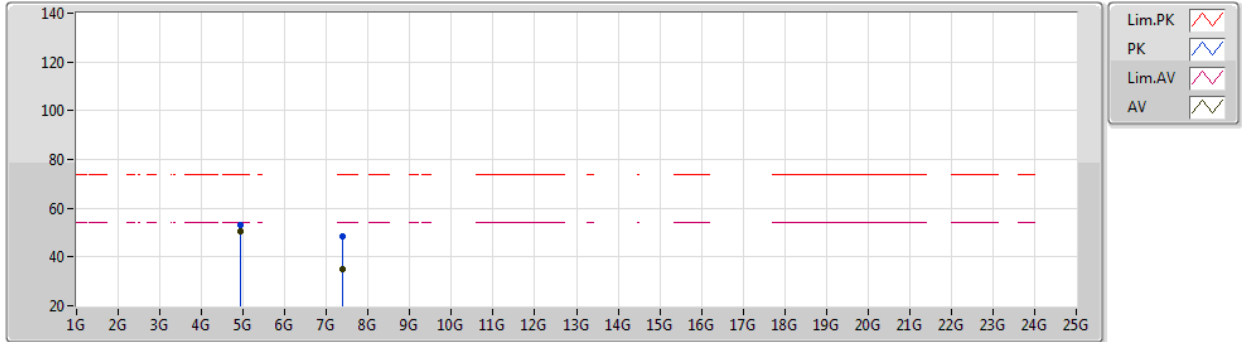


EUT Y_1TX
Setting 33
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92399G	52.96	74.00	-21.04	46.87	3	Vertical	314	1.33	-	33.20	4.70	31.81
AV	4.92398G	50.55	54.00	-3.45	44.46	3	Vertical	314	1.33	-	33.20	4.70	31.81
PK	7.38492G	48.53	74.00	-25.47	38.76	3	Vertical	105	1.71	-	36.43	5.79	32.45
AV	7.38521G	34.97	54.00	-19.03	25.20	3	Vertical	105	1.71	-	36.43	5.79	32.45

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2462MHz_TX

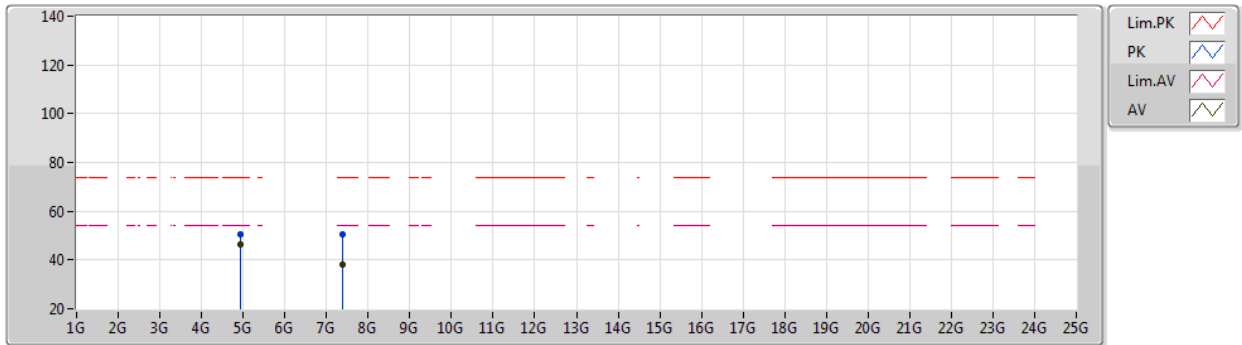


EUT Y_1TX
Setting 33
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92406G	50.47	74.00	-23.53	44.38	3	Horizontal	254	2.12	-	33.20	4.70	31.81
AV	4.92398G	46.35	54.00	-7.65	40.26	3	Horizontal	254	2.12	-	33.20	4.70	31.81
PK	7.3851G	50.51	74.00	-23.49	40.74	3	Horizontal	42	1.70	-	36.43	5.79	32.45
AV	7.38523G	38.24	54.00	-15.76	28.47	3	Horizontal	42	1.70	-	36.43	5.79	32.45

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2412MHz_TX

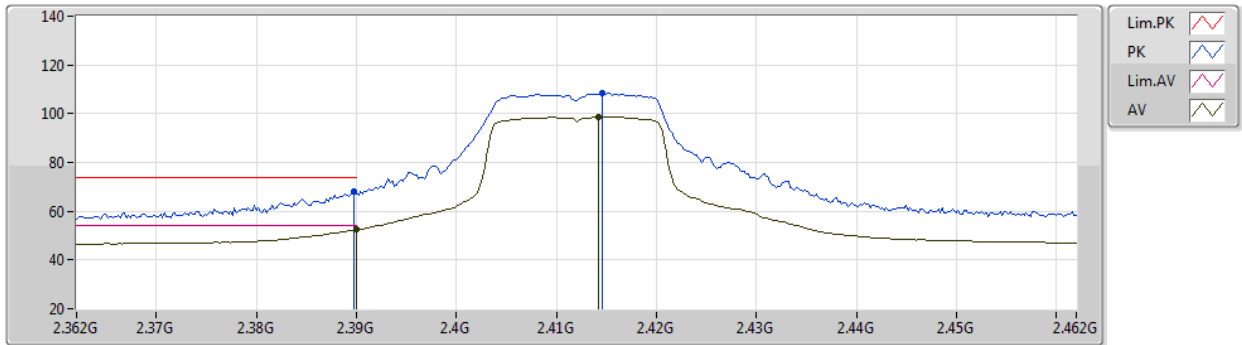


EUT Y_1TX
Setting 40
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3898G	68.10	74.00	-5.90	37.39	3	Vertical	360	2.33	-	28.30	2.41	-
AV	2.39G	52.41	54.00	-1.59	21.70	3	Vertical	360	2.33	-	28.30	2.41	-
PK	2.4146G	108.29	Inf	-Inf	77.55	3	Vertical	360	2.33	-	28.33	2.41	-
AV	2.4142G	98.65	Inf	-Inf	67.91	3	Vertical	360	2.33	-	28.33	2.41	-

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2412MHz_TX

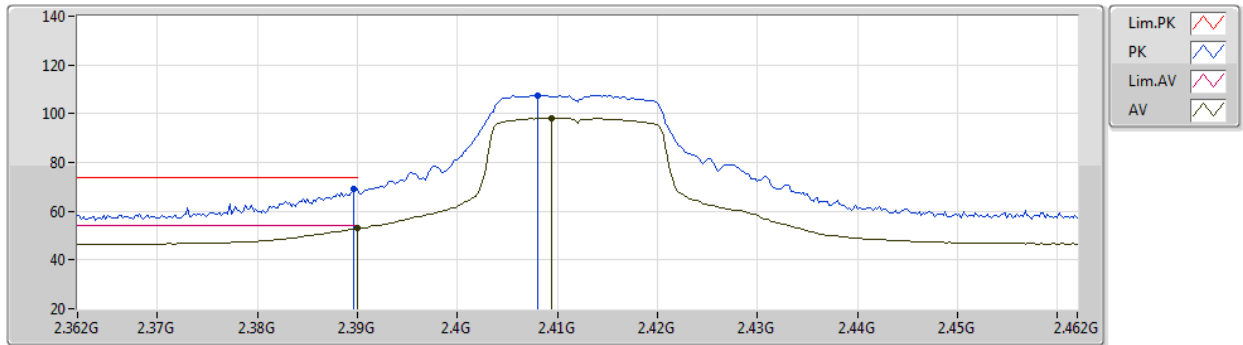


EUT Y_1TX
Setting 40
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3896G	69.06	74.00	-4.94	38.35	3	Horizontal	313	2.50	-	28.30	2.41	-
AV	2.39G	52.86	54.00	-1.14	22.15	3	Horizontal	313	2.50	-	28.30	2.41	-
PK	2.408G	107.65	Inf	-Inf	76.93	3	Horizontal	313	2.50	-	28.32	2.40	-
AV	2.4094G	98.20	Inf	-Inf	67.48	3	Horizontal	313	2.50	-	28.32	2.40	-

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2412MHz_TX

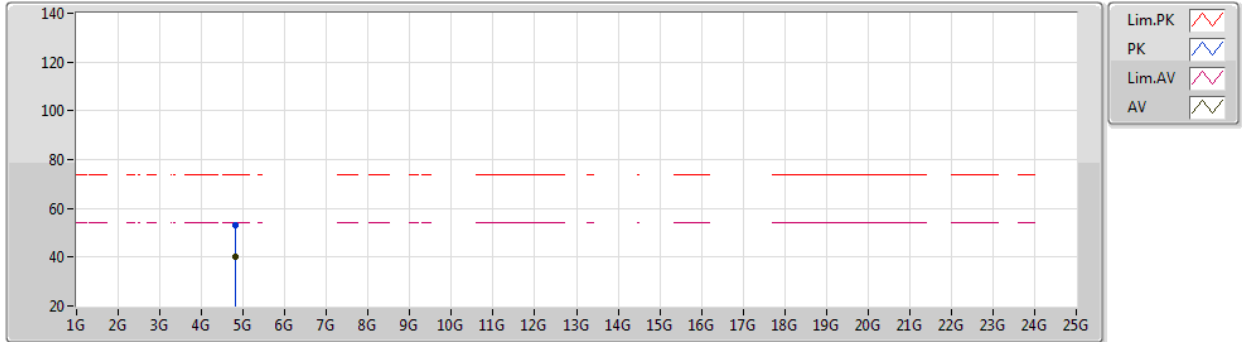

EUT Y_1TX
Setting 40
02-B-E-2


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82454G	53.14	74.00	-20.86	47.32	3	Vertical	311	1.58	-	32.90	4.70	31.78
AV	4.82403G	39.92	54.00	-14.08	34.10	3	Vertical	311	1.58	-	32.90	4.70	31.78



802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2412MHz_TX

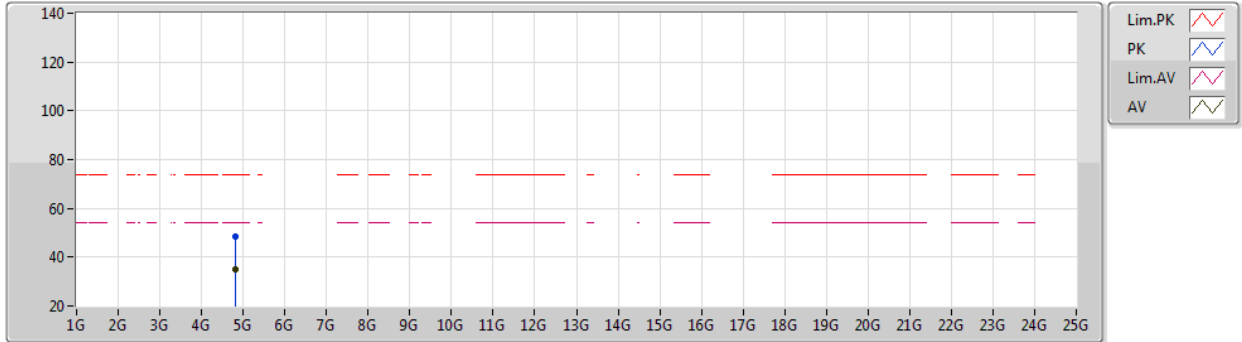


EUT Y_1TX
Setting 40
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82381G	48.34	74.00	-25.66	42.52	3	Horizontal	257	1.93	-	32.90	4.70	31.78
AV	4.82397G	34.94	54.00	-19.06	29.12	3	Horizontal	257	1.93	-	32.90	4.70	31.78

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2417MHz_TX

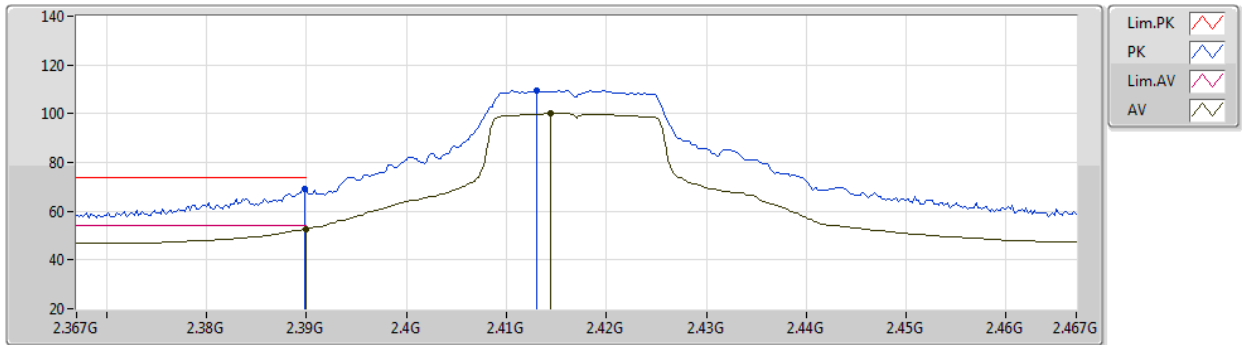


EUT Y_1TX
Setting 45
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3898G	69.39	74.00	-4.61	38.68	3	Vertical	353	2.32	-	28.30	2.41	-
AV	2.39G	52.59	54.00	-1.41	21.88	3	Vertical	353	2.32	-	28.30	2.41	-
PK	2.413G	109.61	Inf	-Inf	78.87	3	Vertical	353	2.32	-	28.33	2.41	-
AV	2.414G	100.15	Inf	-Inf	69.41	3	Vertical	353	2.32	-	28.33	2.41	-

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2417MHz_TX

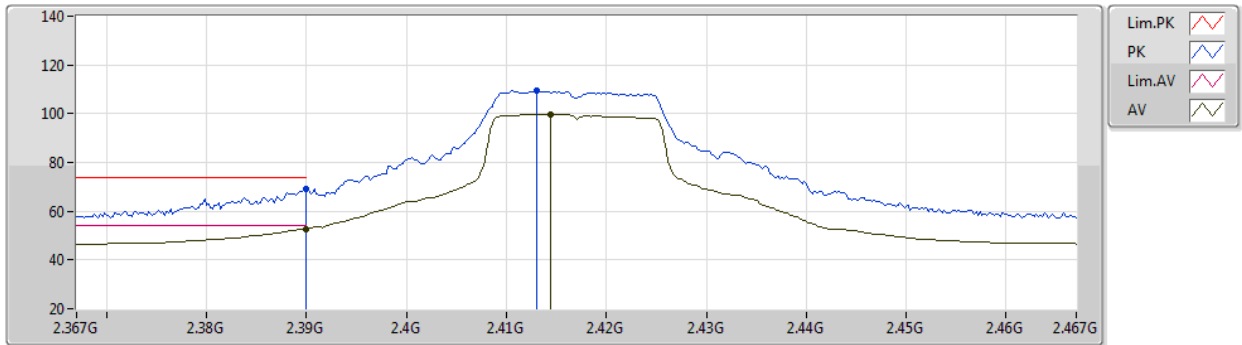


EUT Y_1TX
Setting 45
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	69.02	74.00	-4.98	38.31	3	Horizontal	311	2.50	-	28.30	2.41	-
AV	2.39G	52.65	54.00	-1.35	21.94	3	Horizontal	311	2.50	-	28.30	2.41	-
PK	2.413G	109.49	Inf	-Inf	78.75	3	Horizontal	311	2.50	-	28.33	2.41	-
AV	2.414G	99.88	Inf	-Inf	69.14	3	Horizontal	311	2.50	-	28.33	2.41	-

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2437MHz_TX

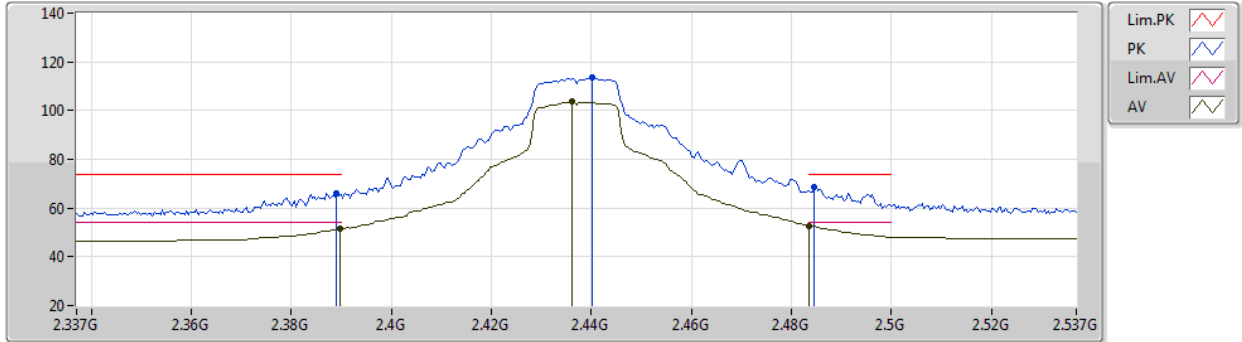


EUT Y_1TX
Setting 55
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.389G	65.90	74.00	-8.10	35.19	3	Vertical	276	1.23	-	28.30	2.41	-
AV	2.3898G	51.39	54.00	-2.61	20.68	3	Vertical	276	1.23	-	28.30	2.41	-
PK	2.4402G	113.51	Inf	-Inf	82.71	3	Vertical	276	1.23	-	28.38	2.42	-
AV	2.4362G	103.54	Inf	-Inf	72.75	3	Vertical	276	1.23	-	28.37	2.42	-
PK	2.4846G	68.71	74.00	-5.29	37.73	3	Vertical	276	1.23	-	28.54	2.44	-
AV	2.4835G	52.83	54.00	-1.17	21.86	3	Vertical	276	1.23	-	28.53	2.44	-

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2437MHz_TX

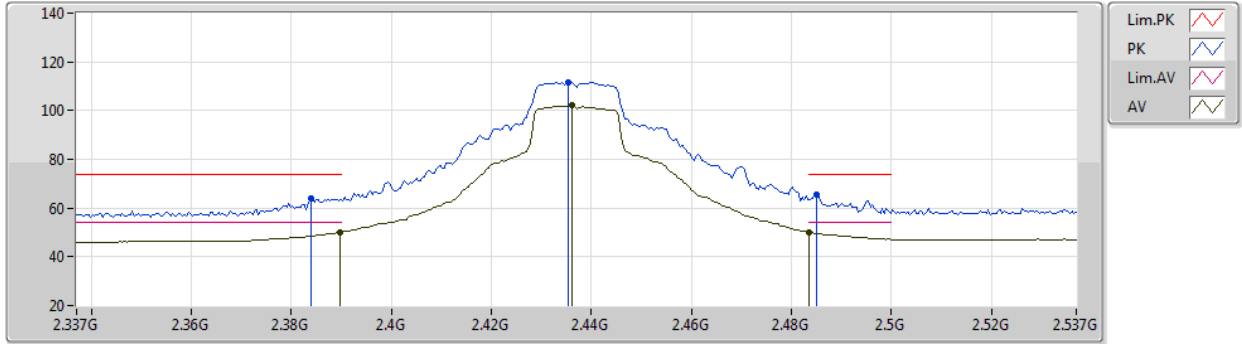


EUT Y_1TX
Setting 55
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3838G	64.14	74.00	-9.86	33.43	3	Horizontal	307	2.22	-	28.30	2.41	-
AV	2.3898G	50.12	54.00	-3.88	19.41	3	Horizontal	307	2.22	-	28.30	2.41	-
PK	2.4354G	111.62	Inf	-Inf	80.83	3	Horizontal	307	2.22	-	28.37	2.42	-
AV	2.4362G	102.00	Inf	-Inf	71.21	3	Horizontal	307	2.22	-	28.37	2.42	-
PK	2.485G	65.71	74.00	-8.29	34.73	3	Horizontal	307	2.22	-	28.54	2.44	-
AV	2.4835G	50.01	54.00	-3.99	19.04	3	Horizontal	307	2.22	-	28.53	2.44	-

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2437MHz_TX

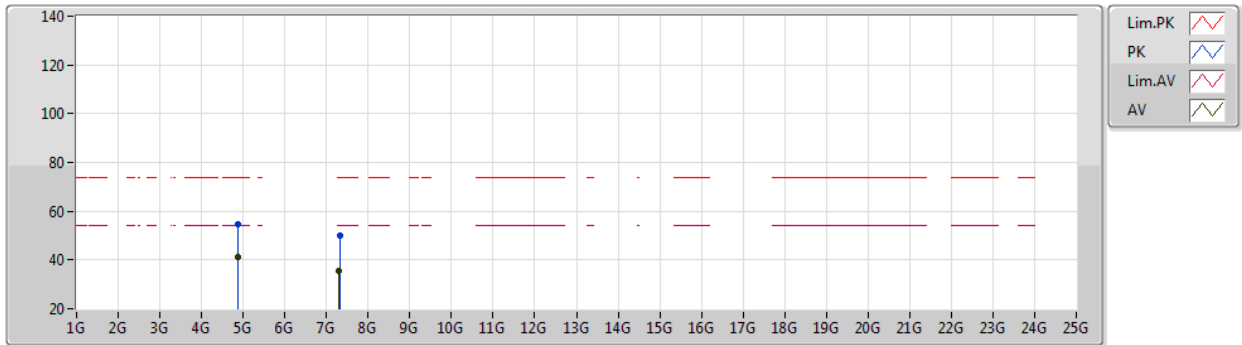


EUT Y_1TX
Setting 55
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87398G	54.65	74.00	-19.35	48.64	3	Vertical	314	1.41	-	33.10	4.70	31.79
AV	4.87394G	41.20	54.00	-12.80	35.19	3	Vertical	314	1.41	-	33.10	4.70	31.79
PK	7.31067G	49.78	74.00	-24.22	40.02	3	Vertical	111	2.20	-	36.42	5.76	32.42
AV	7.30946G	35.54	54.00	-18.46	25.79	3	Vertical	111	2.20	-	36.42	5.75	32.42

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2437MHz_TX

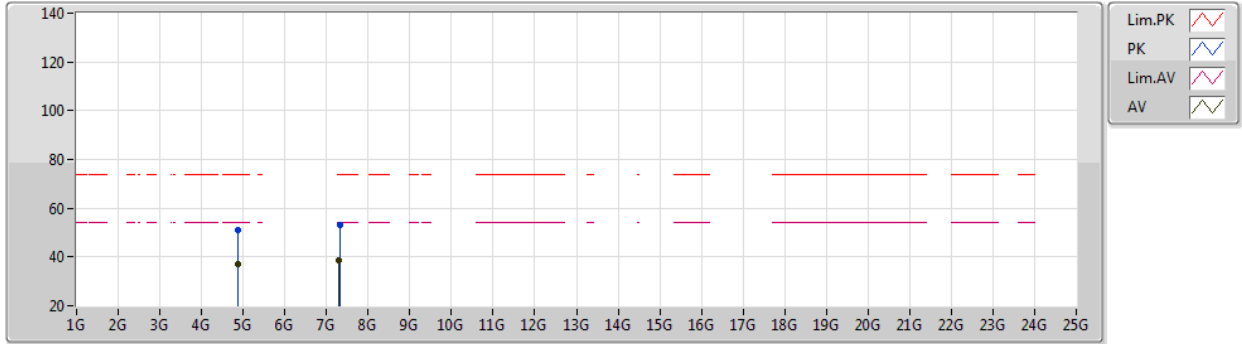


EUT Y_1TX
Setting 55
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87392G	51.02	74.00	-22.98	45.01	3	Horizontal	256	2.15	-	33.10	4.70	31.79
AV	4.87397G	36.85	54.00	-17.15	30.84	3	Horizontal	256	2.15	-	33.10	4.70	31.79
PK	7.31305G	53.34	74.00	-20.66	43.58	3	Horizontal	44	1.68	-	36.43	5.76	32.43
AV	7.30956G	38.71	54.00	-15.29	28.96	3	Horizontal	44	1.68	-	36.42	5.75	32.42

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2457MHz_TX

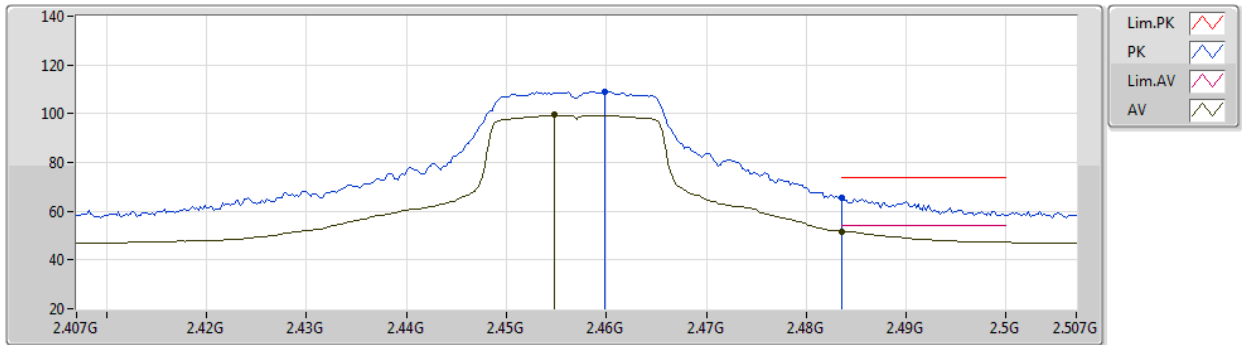


EUT Y_1TX
Setting 43
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4598G	109.00	Inf	-Inf	78.13	3	Vertical	354	2.29	-	28.44	2.43	-
AV	2.4548G	99.40	Inf	-Inf	68.55	3	Vertical	354	2.29	-	28.42	2.43	-
PK	2.4835G	65.37	74.00	-8.63	34.40	3	Vertical	354	2.29	-	28.53	2.44	-
AV	2.4835G	51.76	54.00	-2.24	20.79	3	Vertical	354	2.29	-	28.53	2.44	-

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2457MHz_TX

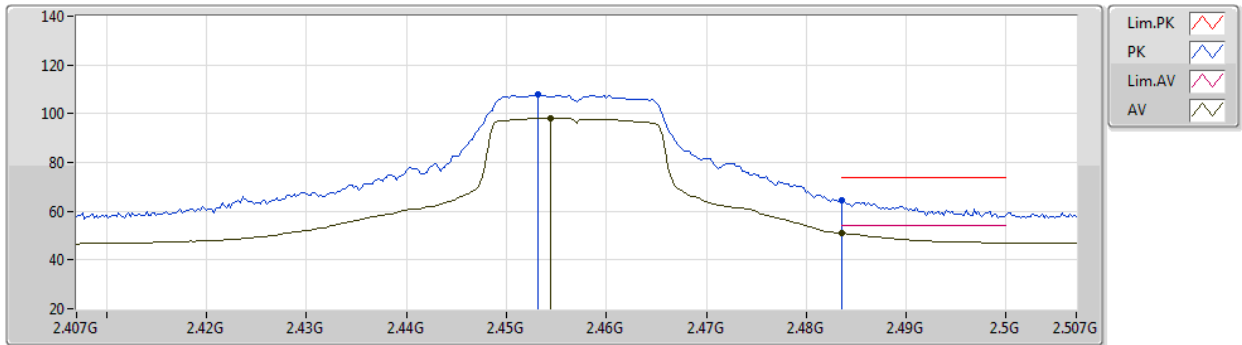


EUT Y_1TX
Setting 43
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4532G	107.82	Inf	-Inf	76.98	3	Horizontal	306	2.66	-	28.41	2.43	-
AV	2.4544G	98.27	Inf	-Inf	67.42	3	Horizontal	306	2.66	-	28.42	2.43	-
PK	2.4836G	64.74	74.00	-9.26	33.77	3	Horizontal	306	2.66	-	28.53	2.44	-
AV	2.4835G	50.99	54.00	-3.01	20.02	3	Horizontal	306	2.66	-	28.53	2.44	-

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2462MHz_TX

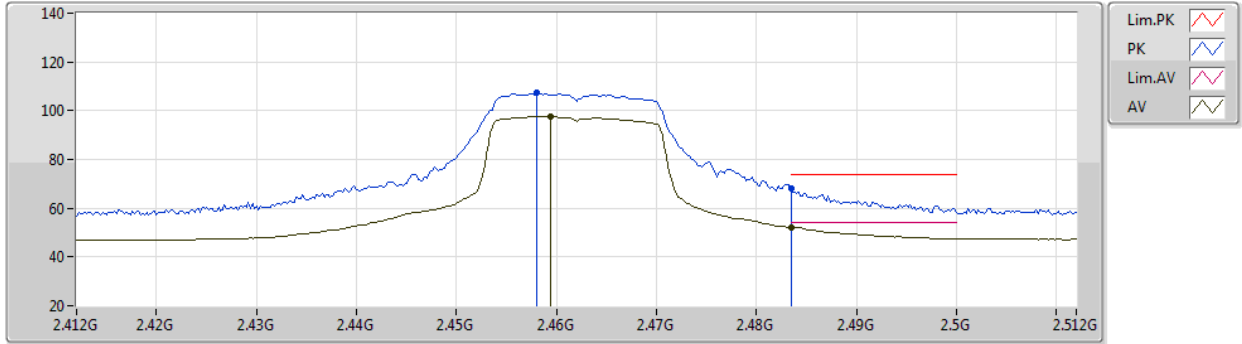


EUT Y_1TX
Setting 40
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.458G	107.23	Inf	-Inf	76.37	3	Vertical	271	1.14	-	28.43	2.43	-
AV	2.4594G	97.59	Inf	-Inf	66.72	3	Vertical	271	1.14	-	28.44	2.43	-
PK	2.4835G	67.86	74.00	-6.14	36.89	3	Vertical	271	1.14	-	28.53	2.44	-
AV	2.4835G	52.14	54.00	-1.86	21.17	3	Vertical	271	1.14	-	28.53	2.44	-

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2462MHz_TX

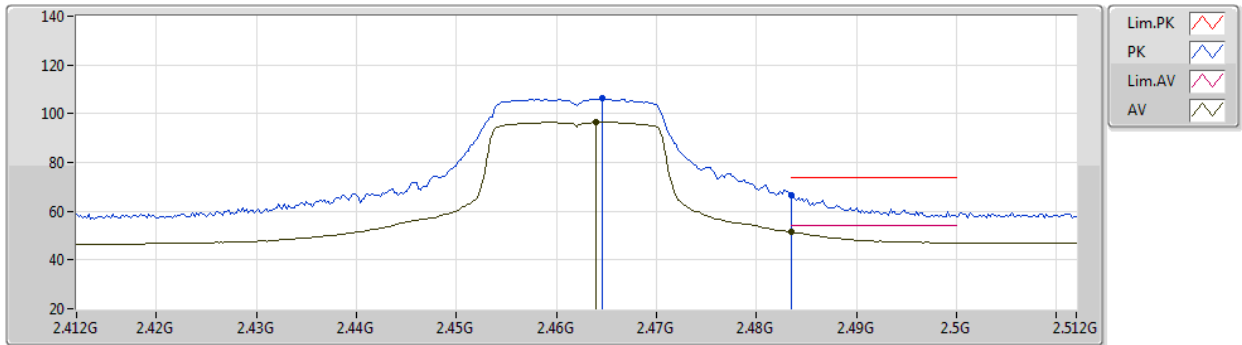

EUT Y_1TX
Setting 40
02-B-E-2


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.464G	106.13	Inf	-Inf	75.24	3	Horizontal	311	2.86	-	28.46	2.43	-
AV	2.464G	96.53	Inf	-Inf	65.64	3	Horizontal	311	2.86	-	28.46	2.43	-
PK	2.4835G	66.65	74.00	-7.35	35.68	3	Horizontal	311	2.86	-	28.53	2.44	-
AV	2.4835G	51.53	54.00	-2.47	20.56	3	Horizontal	311	2.86	-	28.53	2.44	-



802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2462MHz_TX

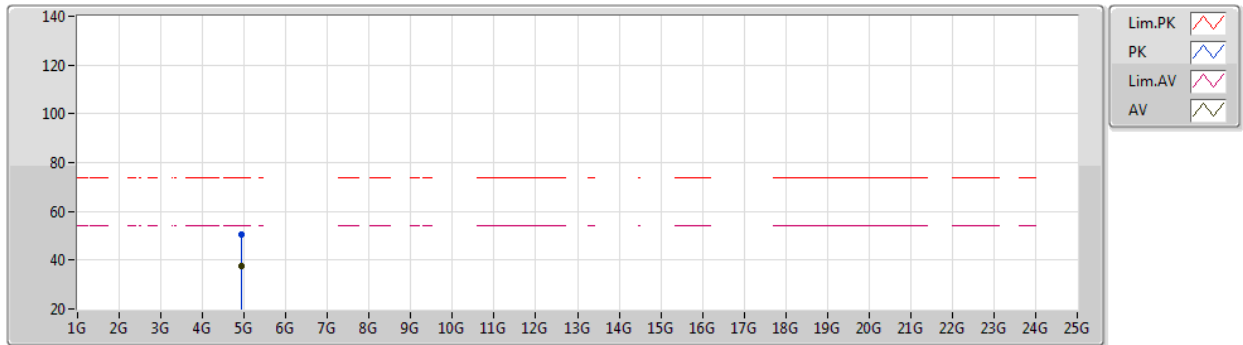


EUT Y_1TX
Setting 40
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92442G	50.41	74.00	-23.59	44.32	3	Vertical	314	1.53	-	33.20	4.70	31.81
AV	4.92398G	37.77	54.00	-16.23	31.68	3	Vertical	314	1.53	-	33.20	4.70	31.81

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2462MHz_TX

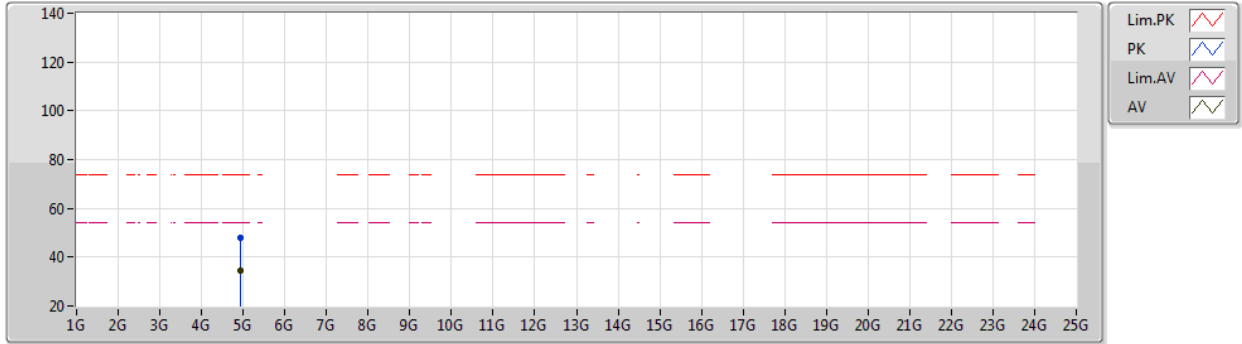


EUT Y_1TX
Setting 40
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92483G	48.11	74.00	-25.89	42.02	3	Horizontal	253	2.22	-	33.20	4.70	31.81
AV	4.92402G	34.61	54.00	-19.39	28.52	3	Horizontal	253	2.22	-	33.20	4.70	31.81

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2412MHz_TX

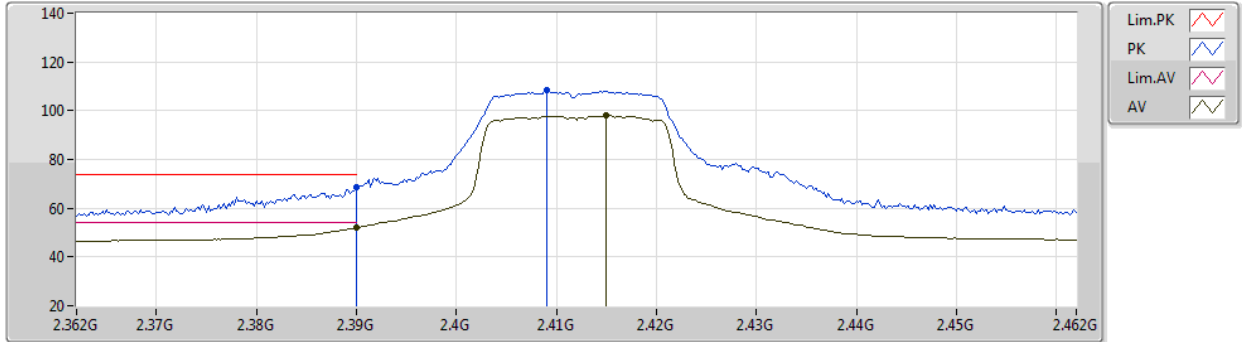


EUT Y_1TX
Setting 41
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	68.87	74.00	-5.13	38.16	3	Vertical	5	2.32	-	28.30	2.41	-
AV	2.39G	52.20	54.00	-1.80	21.49	3	Vertical	5	2.32	-	28.30	2.41	-
PK	2.409G	108.23	Inf	-Inf	77.51	3	Vertical	5	2.32	-	28.32	2.40	-
AV	2.415G	98.06	Inf	-Inf	67.32	3	Vertical	5	2.32	-	28.33	2.41	-

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2412MHz_TX

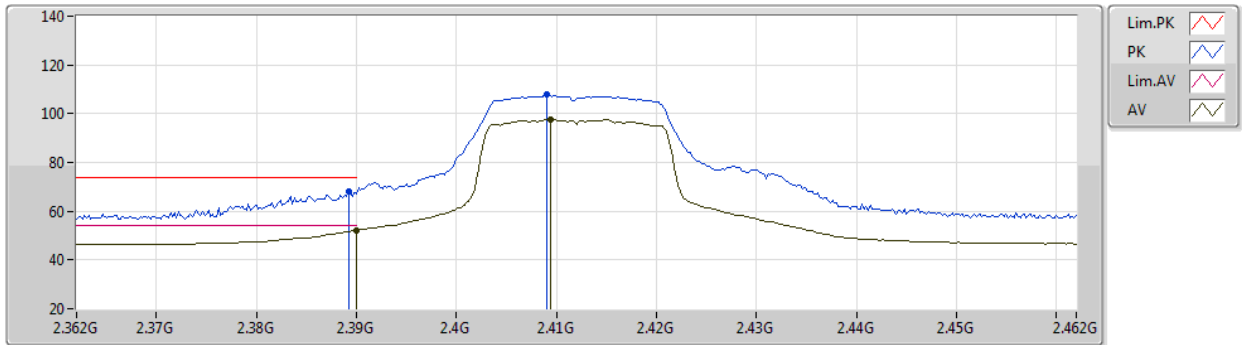


EUT Y_1TX
Setting 41
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3892G	67.99	74.00	-6.01	37.28	3	Horizontal	309	2.49	-	28.30	2.41	-
AV	2.39G	52.24	54.00	-1.76	21.53	3	Horizontal	309	2.49	-	28.30	2.41	-
PK	2.409G	107.96	Inf	-Inf	77.24	3	Horizontal	309	2.49	-	28.32	2.40	-
AV	2.4094G	97.41	Inf	-Inf	66.69	3	Horizontal	309	2.49	-	28.32	2.40	-

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2412MHz_TX

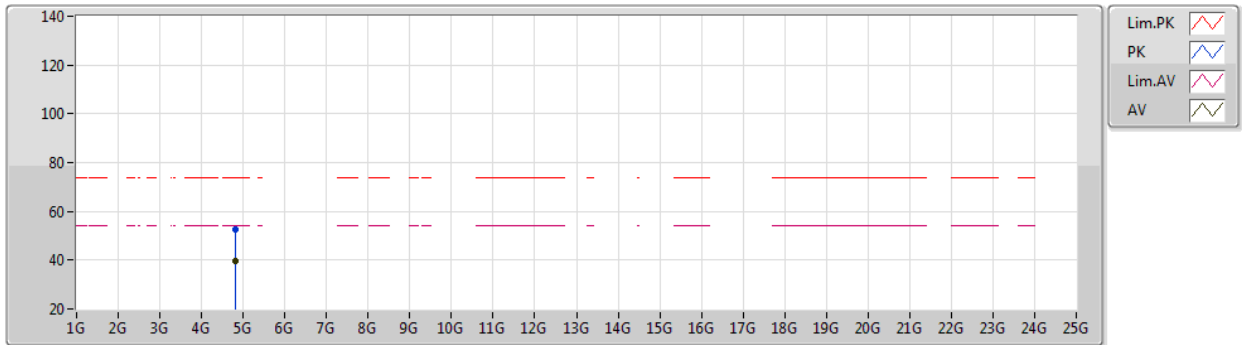


EUT Y_1TX
Setting 41
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82473G	52.77	74.00	-21.23	46.95	3	Vertical	312	1.58	-	32.90	4.70	31.78
AV	4.824G	39.53	54.00	-14.47	33.71	3	Vertical	312	1.58	-	32.90	4.70	31.78

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2412MHz_TX

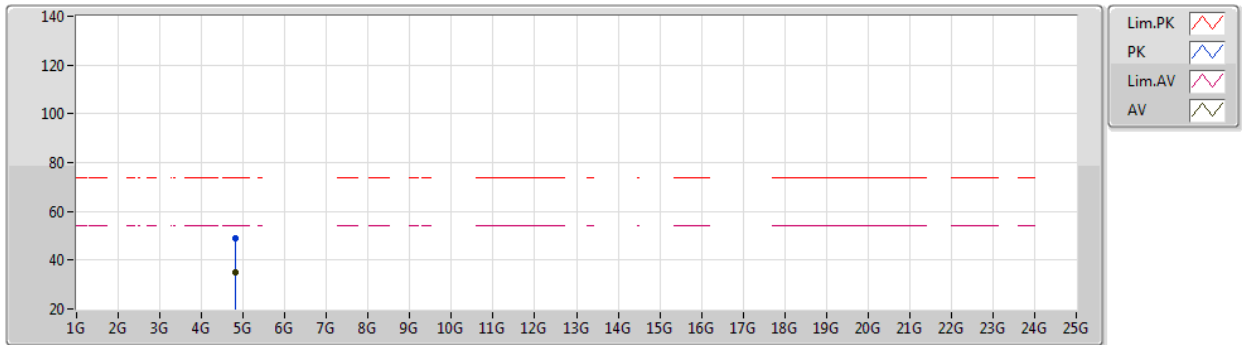


EUT Y_1TX
Setting 41
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82478G	48.73	74.00	-25.27	42.91	3	Horizontal	258	2.09	-	32.90	4.70	31.78
AV	4.82405G	34.91	54.00	-19.09	29.09	3	Horizontal	258	2.09	-	32.90	4.70	31.78

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2417MHz_TX

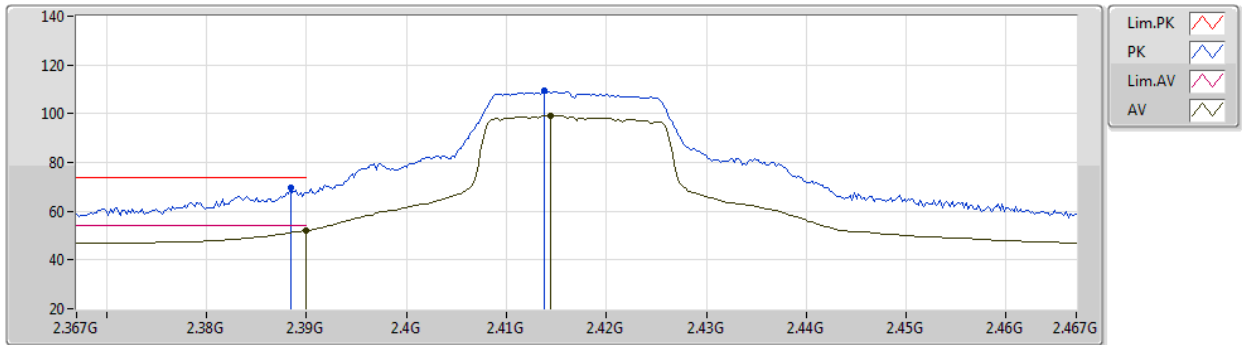


EUT Y_1TX
Setting 44
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3884G	69.46	74.00	-4.54	38.75	3	Vertical	9	2.31	-	28.30	2.41	-
AV	2.39G	52.08	54.00	-1.92	21.37	3	Vertical	9	2.31	-	28.30	2.41	-
PK	2.4138G	109.33	Inf	-Inf	78.59	3	Vertical	9	2.31	-	28.33	2.41	-
AV	2.4144G	99.06	Inf	-Inf	68.32	3	Vertical	9	2.31	-	28.33	2.41	-

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2417MHz_TX

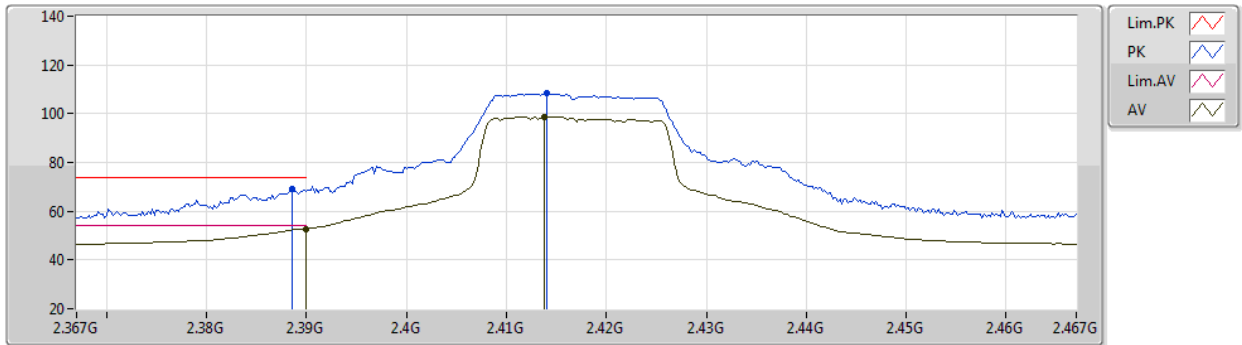


EUT Y_1TX
Setting 44
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3886G	69.31	74.00	-4.69	38.60	3	Horizontal	308	2.51	-	28.30	2.41	-
AV	2.39G	52.79	54.00	-1.21	22.08	3	Horizontal	308	2.51	-	28.30	2.41	-
PK	2.414G	108.62	Inf	-Inf	77.88	3	Horizontal	308	2.51	-	28.33	2.41	-
AV	2.4138G	98.78	Inf	-Inf	68.04	3	Horizontal	308	2.51	-	28.33	2.41	-

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2437MHz_TX

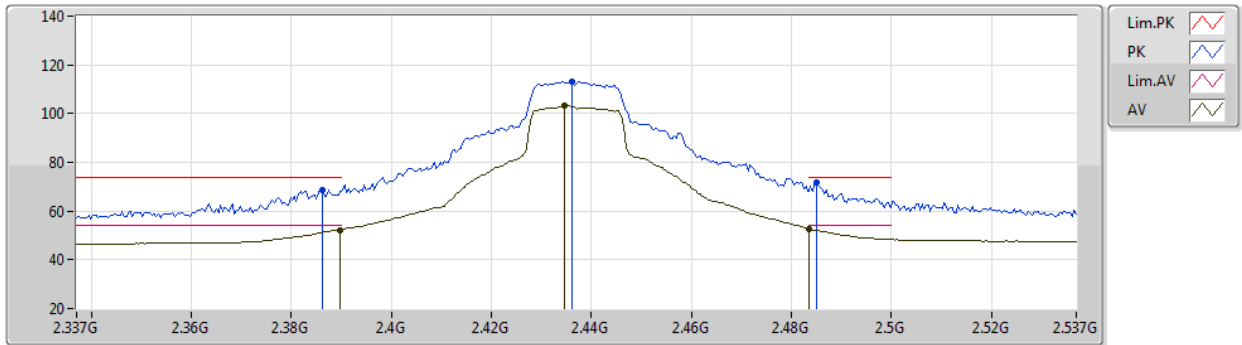


EUT Y_1TX
Setting 55
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3862G	68.85	74.00	-5.15	38.14	3	Vertical	6	2.06	-	28.30	2.41	-
AV	2.3898G	52.29	54.00	-1.71	21.58	3	Vertical	6	2.06	-	28.30	2.41	-
PK	2.4362G	113.22	Inf	-Inf	82.43	3	Vertical	6	2.06	-	28.37	2.42	-
AV	2.4346G	103.10	Inf	-Inf	72.31	3	Vertical	6	2.06	-	28.37	2.42	-
PK	2.485G	71.53	74.00	-2.47	40.55	3	Vertical	6	2.06	-	28.54	2.44	-
AV	2.4835G	52.72	54.00	-1.28	21.75	3	Vertical	6	2.06	-	28.53	2.44	-

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2437MHz_TX

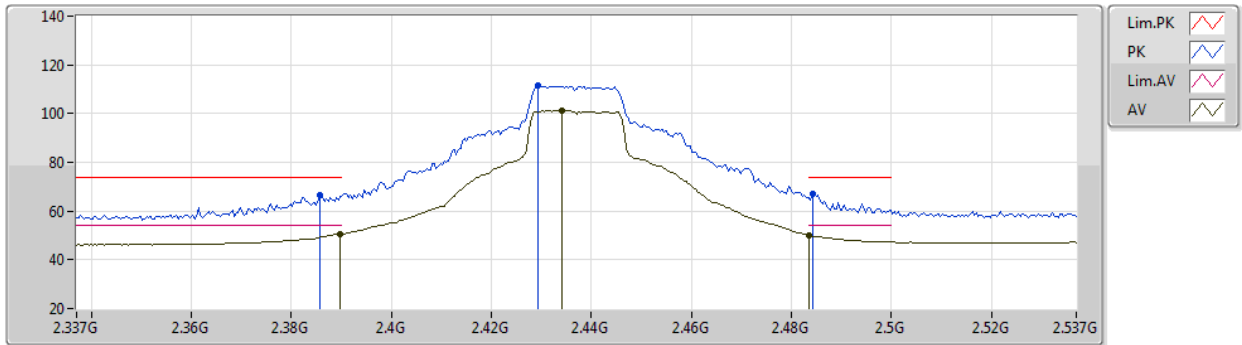


EUT Y_1TX
Setting 55
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3858G	66.80	74.00	-7.20	36.09	3	Horizontal	313	2.45	-	28.30	2.41	-
AV	2.3898G	50.42	54.00	-3.58	19.71	3	Horizontal	313	2.45	-	28.30	2.41	-
PK	2.4294G	111.51	Inf	-Inf	80.74	3	Horizontal	313	2.45	-	28.36	2.41	-
AV	2.4342G	101.39	Inf	-Inf	70.60	3	Horizontal	313	2.45	-	28.37	2.42	-
PK	2.4842G	67.27	74.00	-6.73	36.29	3	Horizontal	313	2.45	-	28.54	2.44	-
AV	2.4835G	50.00	54.00	-4.00	19.03	3	Horizontal	313	2.45	-	28.53	2.44	-

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2437MHz_TX

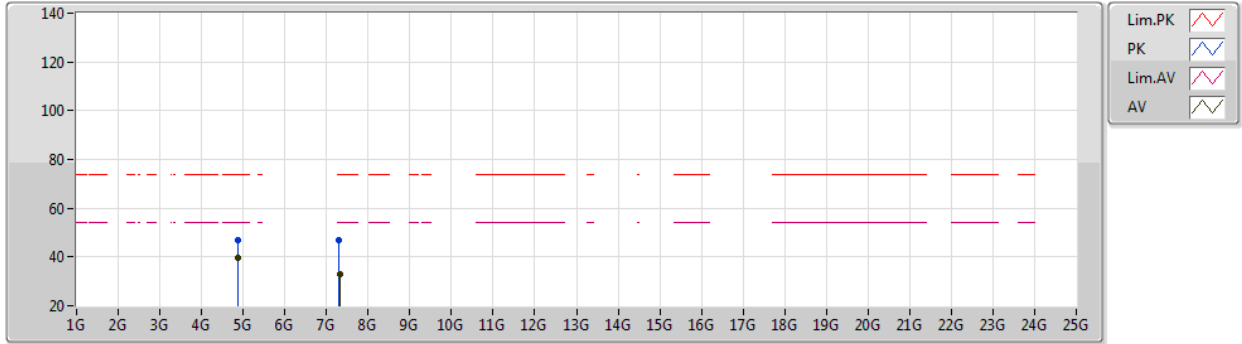


EUT Y_1TX
Setting 55
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87392G	47.07	74.00	-26.93	41.06	3	Vertical	312	1.80	-	33.10	4.70	31.79
AV	4.87398G	39.41	54.00	-14.59	33.40	3	Vertical	312	1.80	-	33.10	4.70	31.79
PK	7.30978G	46.73	74.00	-27.27	36.98	3	Vertical	209	1.82	-	36.42	5.75	32.42
AV	7.31344G	33.12	54.00	-20.88	23.36	3	Vertical	209	1.82	-	36.43	5.76	32.43

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2437MHz_TX

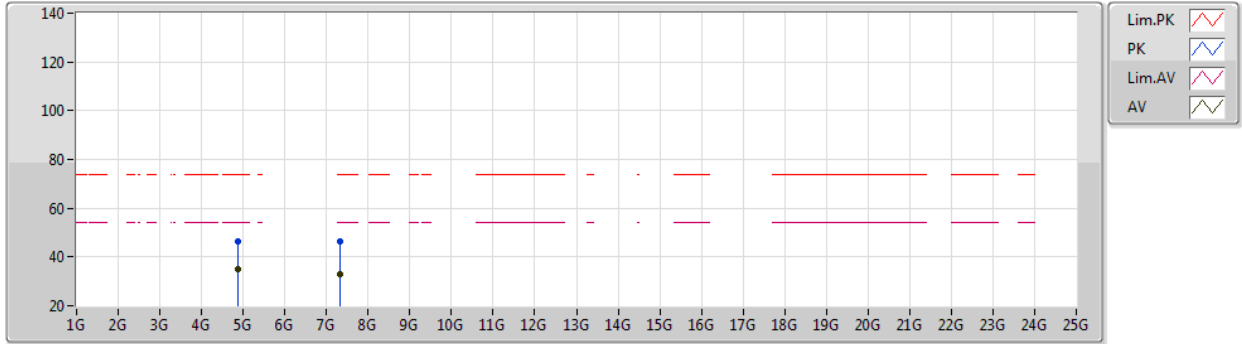


EUT Y_1TX
Setting 55
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87402G	46.56	74.00	-27.44	40.55	3	Horizontal	259	2.13	-	33.10	4.70	31.79
AV	4.874G	35.13	54.00	-18.87	29.12	3	Horizontal	259	2.13	-	33.10	4.70	31.79
PK	7.31349G	46.50	74.00	-27.50	36.74	3	Horizontal	132	2.34	-	36.43	5.76	32.43
AV	7.31313G	33.12	54.00	-20.88	23.36	3	Horizontal	132	2.34	-	36.43	5.76	32.43

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2457MHz_TX

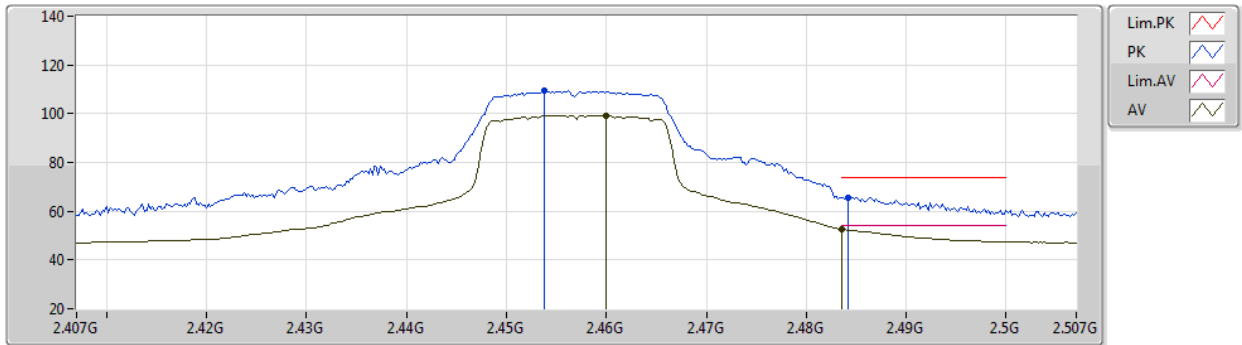

EUT Y_1TX
Setting 43
02-B-R-5


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4538G	109.57	Inf	-Inf	78.72	3	Vertical	357	2.29	-	28.42	2.43	-
AV	2.46G	99.29	Inf	-Inf	68.42	3	Vertical	357	2.29	-	28.44	2.43	-
PK	2.4842G	65.73	74.00	-8.27	34.75	3	Vertical	357	2.29	-	28.54	2.44	-
AV	2.4835G	52.56	54.00	-1.44	21.59	3	Vertical	357	2.29	-	28.53	2.44	-



802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2457MHz_TX

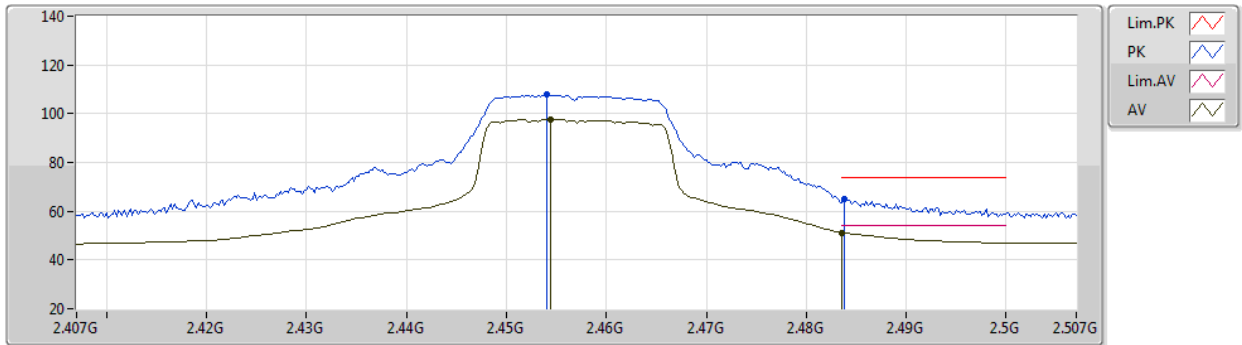


EUT Y_1TX
Setting 43
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.454G	108.18	Inf	-Inf	77.33	3	Horizontal	305	2.66	-	28.42	2.43	-
AV	2.4544G	97.75	Inf	-Inf	66.90	3	Horizontal	305	2.66	-	28.42	2.43	-
PK	2.4838G	64.75	74.00	-9.25	33.77	3	Horizontal	305	2.66	-	28.54	2.44	-
AV	2.4835G	51.25	54.00	-2.75	20.28	3	Horizontal	305	2.66	-	28.53	2.44	-

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2462MHz_TX

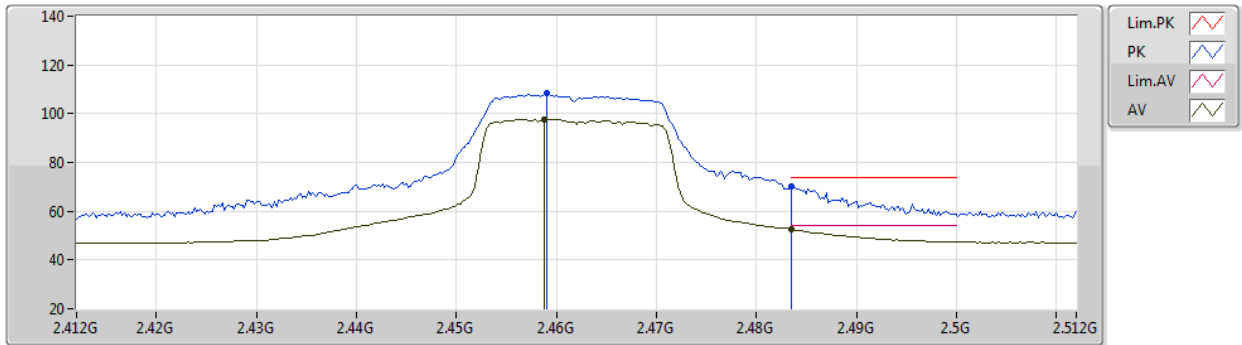


EUT Y_1TX
Setting 40
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.459G	108.28	Inf	-Inf	77.41	3	Vertical	360	2.28	-	28.44	2.43	-
AV	2.4588G	97.67	Inf	-Inf	66.80	3	Vertical	360	2.28	-	28.44	2.43	-
PK	2.4835G	70.02	74.00	-3.98	39.05	3	Vertical	360	2.28	-	28.53	2.44	-
AV	2.4835G	52.52	54.00	-1.48	21.55	3	Vertical	360	2.28	-	28.53	2.44	-

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2462MHz_TX

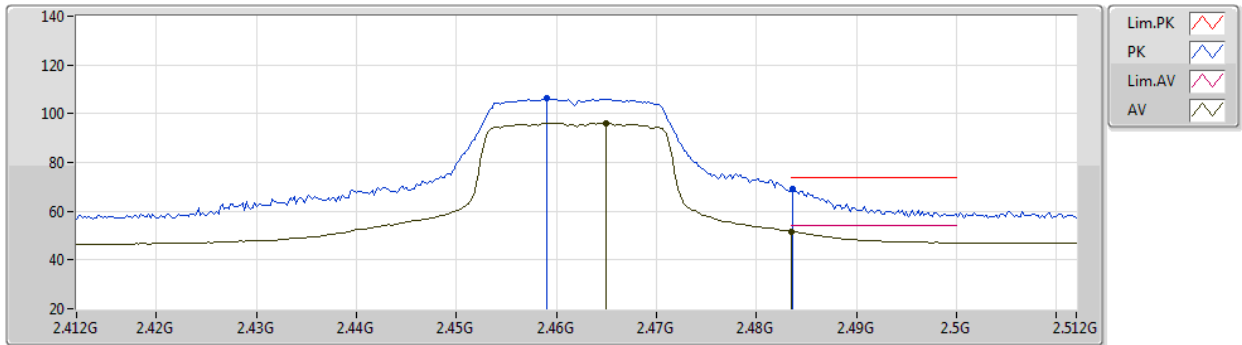


EUT Y_1TX
Setting 40
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.459G	106.62	Inf	-Inf	75.75	3	Horizontal	312	2.86	-	28.44	2.43	-
AV	2.465G	96.12	Inf	-Inf	65.23	3	Horizontal	312	2.86	-	28.46	2.43	-
PK	2.4836G	68.98	74.00	-5.02	38.01	3	Horizontal	312	2.86	-	28.53	2.44	-
AV	2.4835G	51.80	54.00	-2.20	20.83	3	Horizontal	312	2.86	-	28.53	2.44	-

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2462MHz_TX

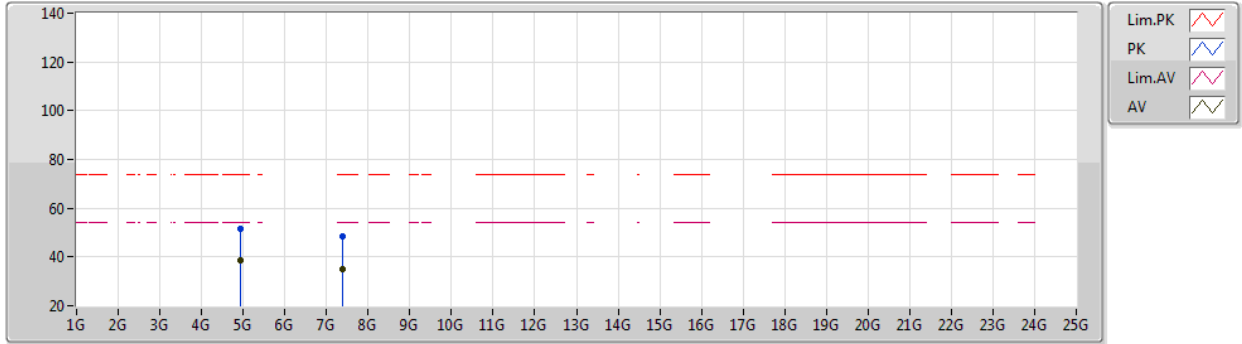


EUT Y_1TX
Setting 40
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92296G	51.49	74.00	-22.51	45.40	3	Vertical	344	1.97	-	33.20	4.70	31.81
AV	4.92396G	38.49	54.00	-15.51	32.40	3	Vertical	344	1.97	-	33.20	4.70	31.81
PK	7.38138G	48.58	74.00	-25.42	38.80	3	Vertical	96	1.80	-	36.44	5.79	32.45
AV	7.3818G	34.99	54.00	-19.01	25.21	3	Vertical	96	1.80	-	36.44	5.79	32.45

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2462MHz_TX

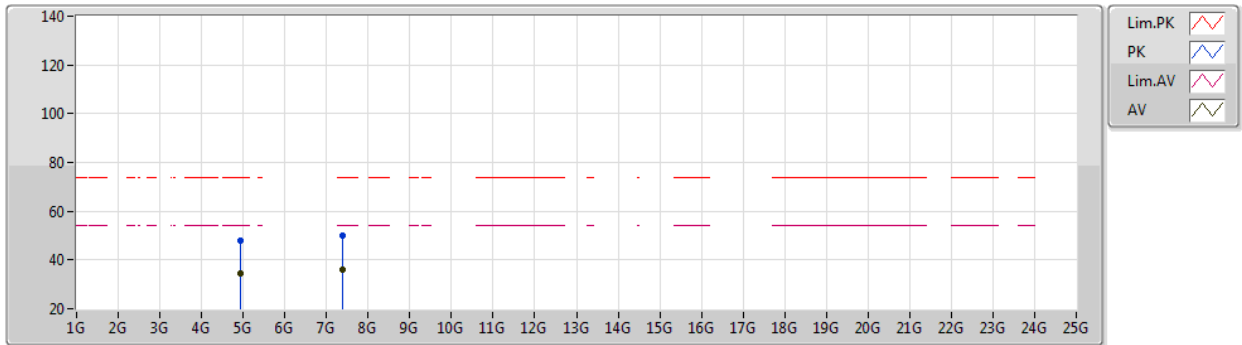


EUT Y_1TX
Setting 40
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92328G	47.70	74.00	-26.30	41.61	3	Horizontal	262	1.83	-	33.20	4.70	31.81
AV	4.924G	34.73	54.00	-19.27	28.64	3	Horizontal	262	1.83	-	33.20	4.70	31.81
PK	7.38198G	50.09	74.00	-23.91	40.31	3	Horizontal	36	1.80	-	36.44	5.79	32.45
AV	7.38168G	36.02	54.00	-17.98	26.24	3	Horizontal	36	1.80	-	36.44	5.79	32.45

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2422MHz_TX

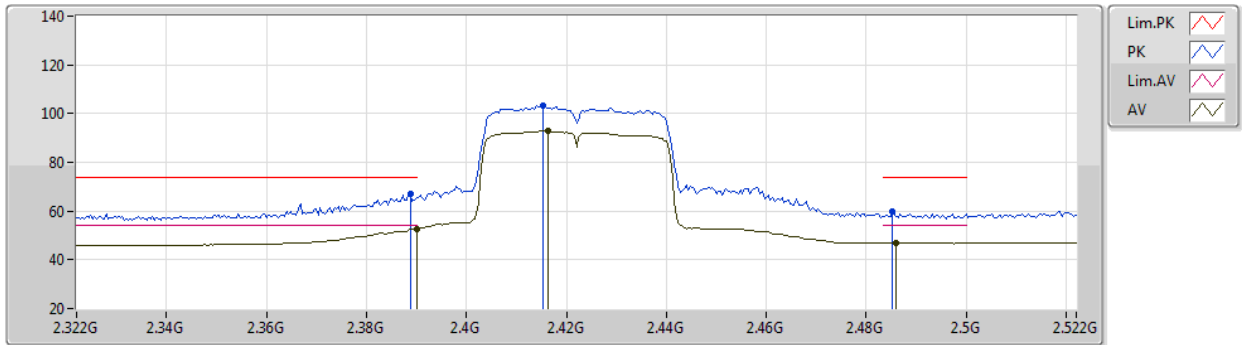


EUT Y_1TX
Setting 36
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3888G	66.91	74.00	-7.09	36.20	3	Vertical	360	2.31	-	28.30	2.41	-
AV	2.39G	52.66	54.00	-1.34	21.95	3	Vertical	360	2.31	-	28.30	2.41	-
PK	2.4152G	103.24	Inf	-Inf	72.50	3	Vertical	360	2.31	-	28.33	2.41	-
AV	2.4164G	92.87	Inf	-Inf	62.13	3	Vertical	360	2.31	-	28.33	2.41	-
PK	2.4852G	59.65	74.00	-14.35	28.67	3	Vertical	360	2.31	-	28.54	2.44	-
AV	2.486G	46.91	54.00	-7.09	15.93	3	Vertical	360	2.31	-	28.54	2.44	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2422MHz_TX

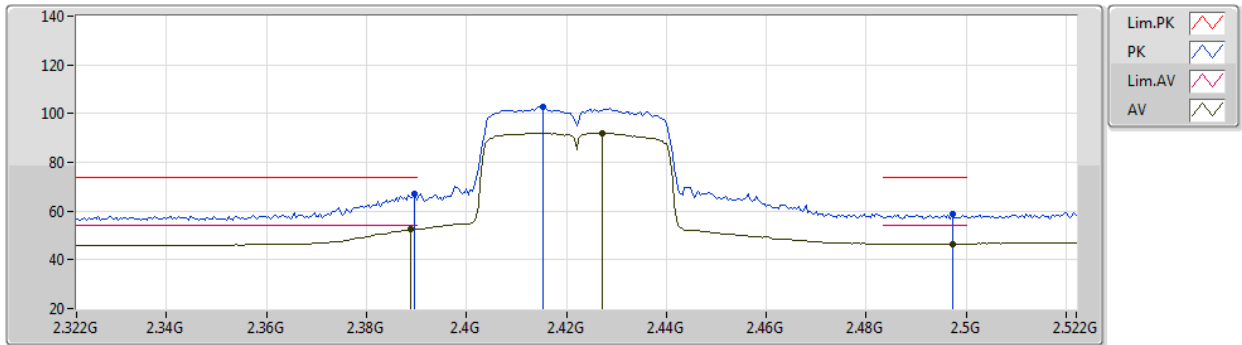


EUT Y_1TX
Setting 36
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3896G	66.85	74.00	-7.15	36.14	3	Horizontal	307	2.48	-	28.30	2.41	-
AV	2.3888G	52.54	54.00	-1.46	21.83	3	Horizontal	307	2.48	-	28.30	2.41	-
PK	2.4152G	102.90	Inf	-Inf	72.16	3	Horizontal	307	2.48	-	28.33	2.41	-
AV	2.4272G	92.01	Inf	-Inf	61.25	3	Horizontal	307	2.48	-	28.35	2.41	-
PK	2.4972G	58.73	74.00	-15.27	27.69	3	Horizontal	307	2.48	-	28.59	2.45	-
AV	2.4972G	46.63	54.00	-7.37	15.59	3	Horizontal	307	2.48	-	28.59	2.45	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2422MHz_TX

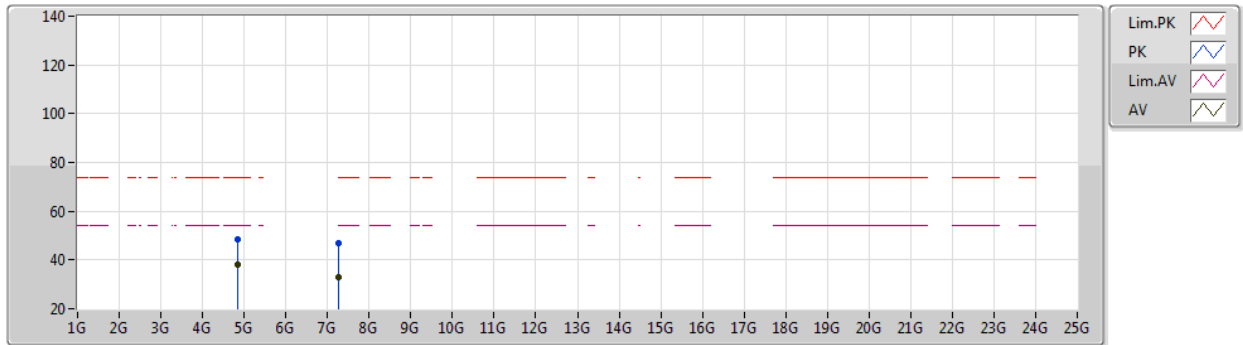


EUT Y_1TX
Setting 36
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.84406G	48.34	74.00	-25.66	42.44	3	Vertical	344	1.92	-	32.98	4.70	31.78
AV	4.84394G	38.02	54.00	-15.98	32.12	3	Vertical	344	1.92	-	32.98	4.70	31.78
PK	7.26684G	47.12	74.00	-26.88	37.53	3	Vertical	265	2.48	-	36.27	5.73	32.41
AV	7.25718G	32.97	54.00	-21.03	23.41	3	Vertical	265	2.48	-	36.23	5.73	32.40

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2422MHz_TX

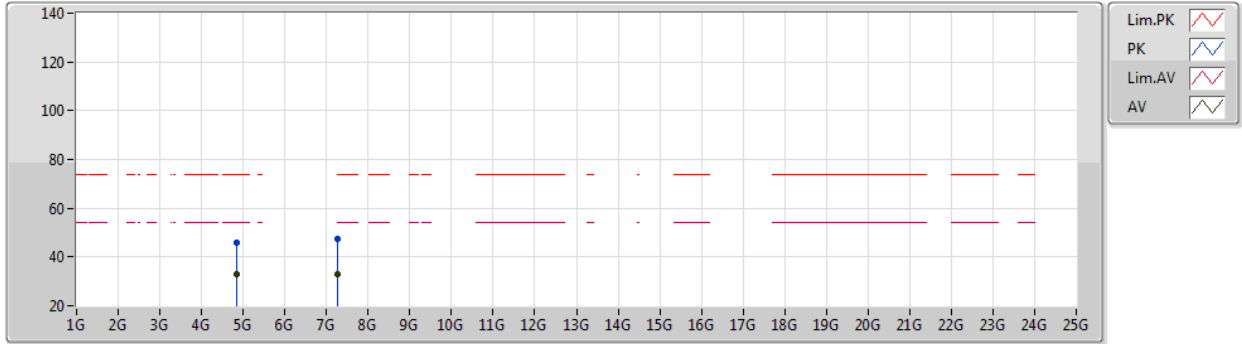


EUT Y_1TX
Setting 36
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.84382G	45.78	74.00	-28.22	39.88	3	Horizontal	262	2.07	-	32.98	4.70	31.78
AV	4.844G	33.15	54.00	-20.85	27.25	3	Horizontal	262	2.07	-	32.98	4.70	31.78
PK	7.2528G	47.36	74.00	-26.64	37.82	3	Horizontal	89	2.40	-	36.21	5.73	32.40
AV	7.25694G	33.11	54.00	-20.89	23.55	3	Horizontal	89	2.40	-	36.23	5.73	32.40

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2427MHz_TX

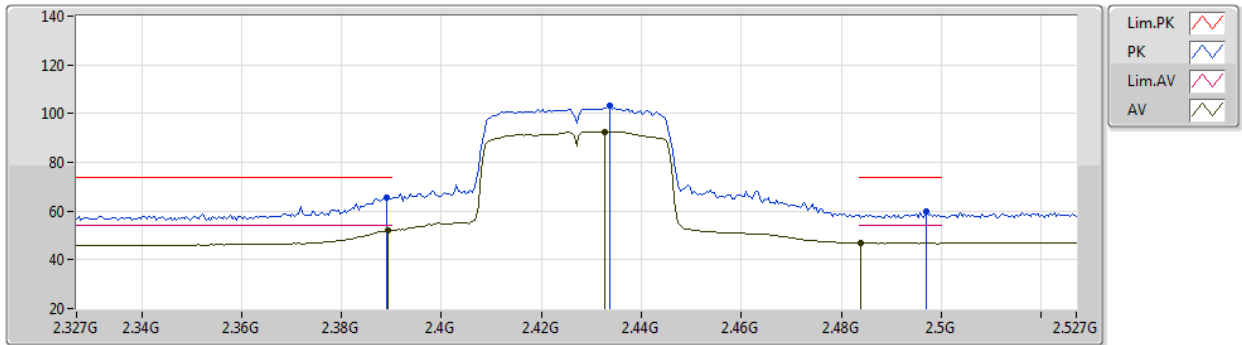


EUT Y_1TX
Setting 36
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.389G	65.66	74.00	-8.34	34.95	3	Vertical	340	1.77	-	28.30	2.41	-
AV	2.3894G	51.99	54.00	-2.01	21.28	3	Vertical	340	1.77	-	28.30	2.41	-
PK	2.4338G	103.32	Inf	-Inf	72.53	3	Vertical	340	1.77	-	28.37	2.42	-
AV	2.4326G	92.66	Inf	-Inf	61.87	3	Vertical	340	1.77	-	28.37	2.42	-
PK	2.497G	59.63	74.00	-14.37	28.59	3	Vertical	340	1.77	-	28.59	2.45	-
AV	2.4838G	46.81	54.00	-7.19	15.83	3	Vertical	340	1.77	-	28.54	2.44	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2427MHz_TX

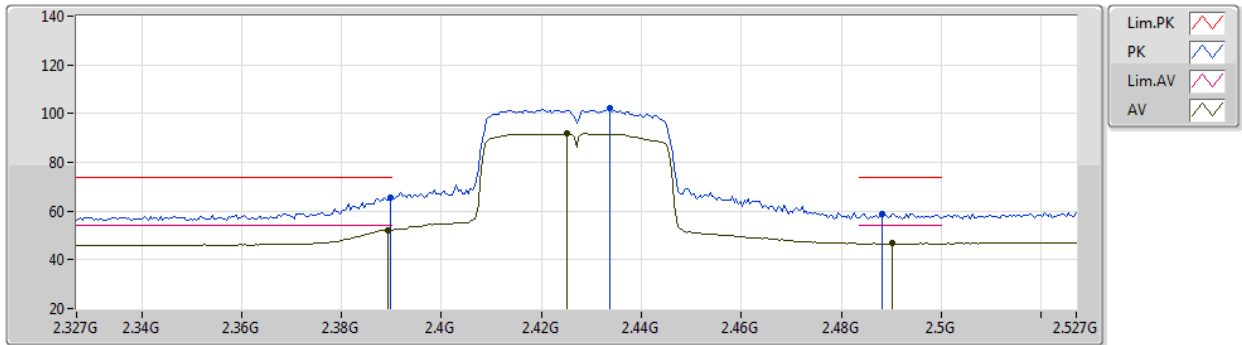


EUT Y_1TX
Setting 36
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3898G	65.54	74.00	-8.46	34.83	3	Horizontal	305	2.25	-	28.30	2.41	-
AV	2.3894G	52.27	54.00	-1.73	21.56	3	Horizontal	305	2.25	-	28.30	2.41	-
PK	2.4338G	102.15	Inf	-Inf	71.36	3	Horizontal	305	2.25	-	28.37	2.42	-
AV	2.425G	91.80	Inf	-Inf	61.04	3	Horizontal	305	2.25	-	28.35	2.41	-
PK	2.4882G	58.81	74.00	-15.19	27.82	3	Horizontal	305	2.25	-	28.55	2.44	-
AV	2.4902G	46.65	54.00	-7.35	15.64	3	Horizontal	305	2.25	-	28.56	2.45	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2437MHz_TX

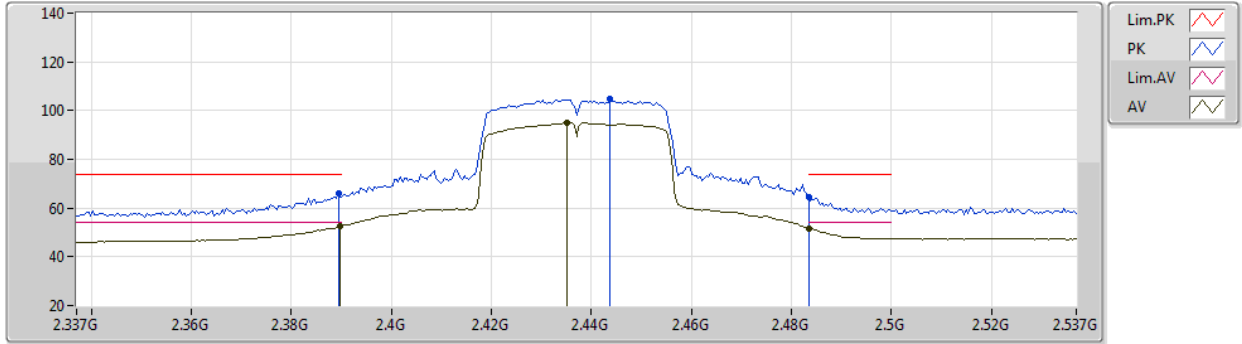


EUT Y_1TX
Setting 41
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3894G	65.84	74.00	-8.16	35.13	3	Vertical	360	2.03	-	28.30	2.41	-
AV	2.3898G	52.52	54.00	-1.48	21.81	3	Vertical	360	2.03	-	28.30	2.41	-
PK	2.4438G	104.73	Inf	-Inf	73.92	3	Vertical	360	2.03	-	28.39	2.42	-
AV	2.435G	95.09	Inf	-Inf	64.30	3	Vertical	360	2.03	-	28.37	2.42	-
PK	2.4835G	64.70	74.00	-9.30	33.73	3	Vertical	360	2.03	-	28.53	2.44	-
AV	2.4835G	51.81	54.00	-2.19	20.84	3	Vertical	360	2.03	-	28.53	2.44	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2437MHz_TX

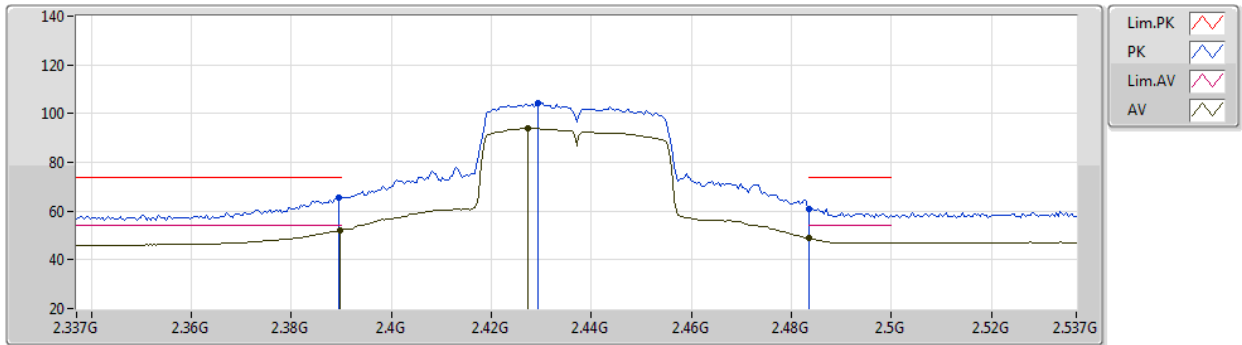


EUT Y_1TX
Setting 41
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3894G	65.45	74.00	-8.55	34.74	3	Horizontal	309	2.49	-	28.30	2.41	-
AV	2.3898G	52.12	54.00	-1.88	21.41	3	Horizontal	309	2.49	-	28.30	2.41	-
PK	2.4294G	104.32	Inf	-Inf	73.55	3	Horizontal	309	2.49	-	28.36	2.41	-
AV	2.4274G	93.91	Inf	-Inf	63.15	3	Horizontal	309	2.49	-	28.35	2.41	-
PK	2.4835G	61.00	74.00	-13.00	30.03	3	Horizontal	309	2.49	-	28.53	2.44	-
AV	2.4835G	48.78	54.00	-5.22	17.81	3	Horizontal	309	2.49	-	28.53	2.44	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2437MHz_TX

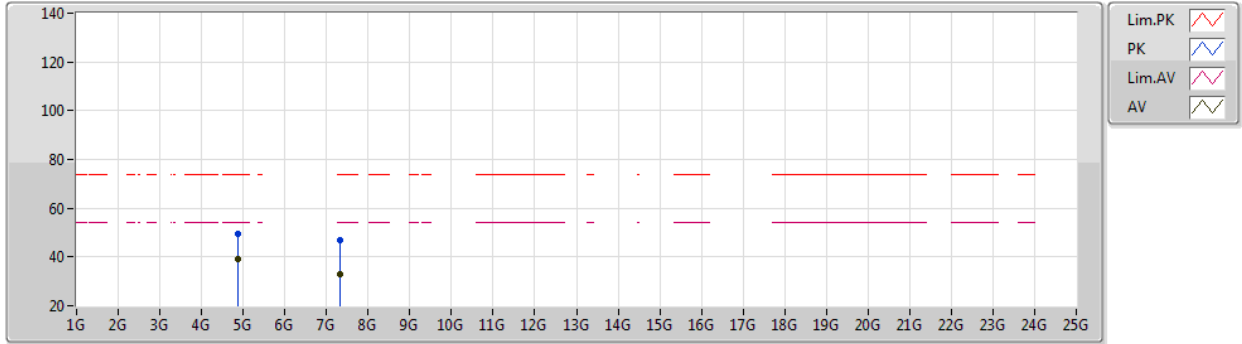


EUT Y_1TX
Setting 41
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87388G	49.59	74.00	-24.41	43.58	3	Vertical	345	1.80	-	33.10	4.70	31.79
AV	4.874G	38.98	54.00	-15.02	32.97	3	Vertical	345	1.80	-	33.10	4.70	31.79
PK	7.31364G	46.82	74.00	-27.18	37.06	3	Vertical	154	1.80	-	36.43	5.76	32.43
AV	7.32324G	33.09	54.00	-20.91	23.31	3	Vertical	154	1.80	-	36.45	5.76	32.43

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2437MHz_TX

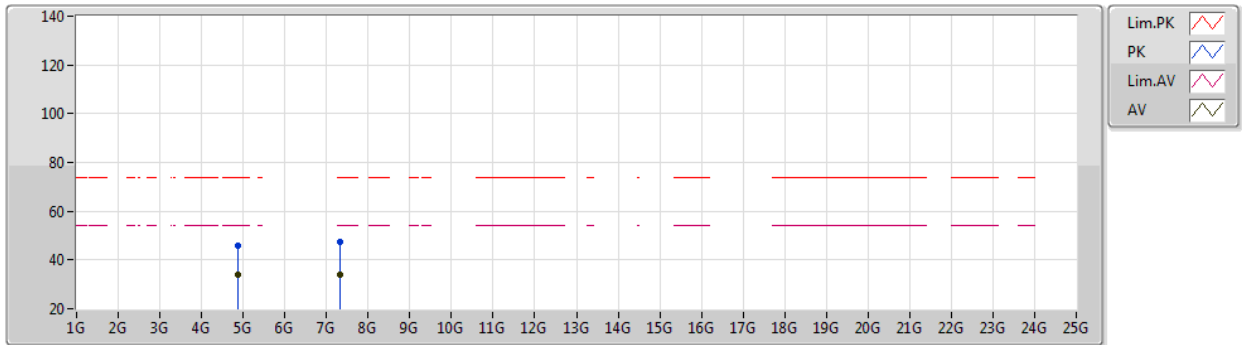


EUT Y_1TX
Setting 41
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87364G	45.96	74.00	-28.04	39.96	3	Horizontal	263	2.14	-	33.09	4.70	31.79
AV	4.87394G	34.16	54.00	-19.84	28.15	3	Horizontal	263	2.14	-	33.10	4.70	31.79
PK	7.31688G	47.40	74.00	-26.60	37.64	3	Horizontal	38	1.75	-	36.43	5.76	32.43
AV	7.32558G	33.73	54.00	-20.27	23.95	3	Horizontal	38	1.75	-	36.45	5.76	32.43

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2447MHz_TX

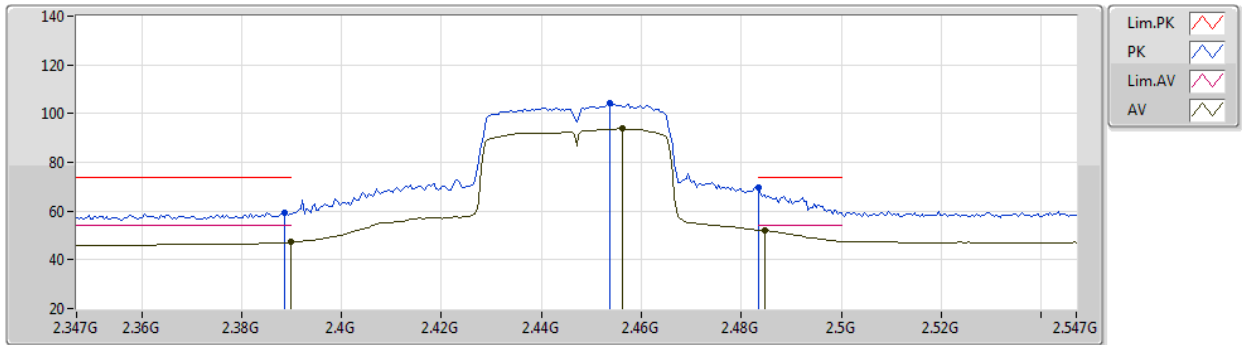


EUT Y_1TX
Setting 38
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3886G	59.32	74.00	-14.68	28.61	3	Vertical	360	2.29	-	28.30	2.41	-
AV	2.3898G	47.21	54.00	-6.79	16.50	3	Vertical	360	2.29	-	28.30	2.41	-
PK	2.4538G	104.53	Inf	-Inf	73.68	3	Vertical	360	2.29	-	28.42	2.43	-
AV	2.4562G	93.84	Inf	-Inf	62.99	3	Vertical	360	2.29	-	28.42	2.43	-
PK	2.4835G	69.59	74.00	-4.41	38.62	3	Vertical	360	2.29	-	28.53	2.44	-
AV	2.4846G	52.21	54.00	-1.79	21.23	3	Vertical	360	2.29	-	28.54	2.44	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2447MHz_TX

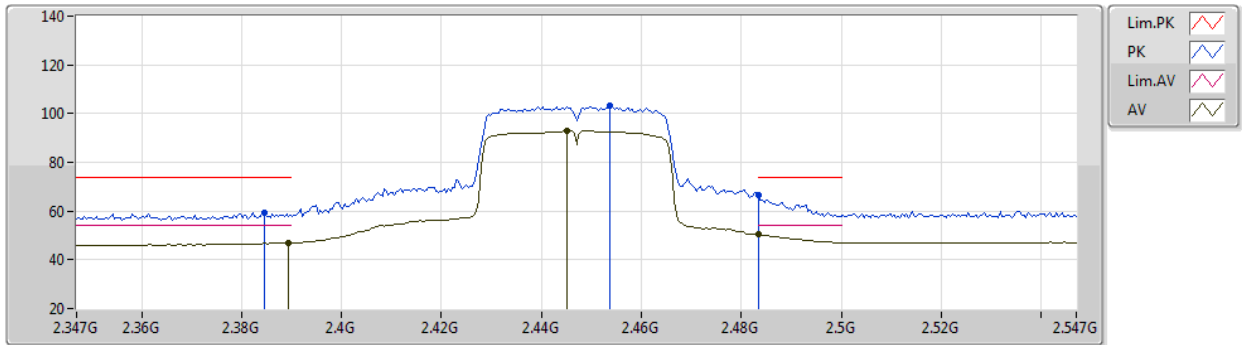


EUT Y_1TX
Setting 38
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3846G	59.36	74.00	-14.64	28.65	3	Horizontal	309	2.45	-	28.30	2.41	-
AV	2.3894G	46.93	54.00	-7.07	16.22	3	Horizontal	309	2.45	-	28.30	2.41	-
PK	2.4538G	103.39	Inf	-Inf	72.54	3	Horizontal	309	2.45	-	28.42	2.43	-
AV	2.445G	92.96	Inf	-Inf	62.15	3	Horizontal	309	2.45	-	28.39	2.42	-
PK	2.4835G	66.77	74.00	-7.23	35.80	3	Horizontal	309	2.45	-	28.53	2.44	-
AV	2.4835G	50.26	54.00	-3.74	19.29	3	Horizontal	309	2.45	-	28.53	2.44	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2452MHz_TX

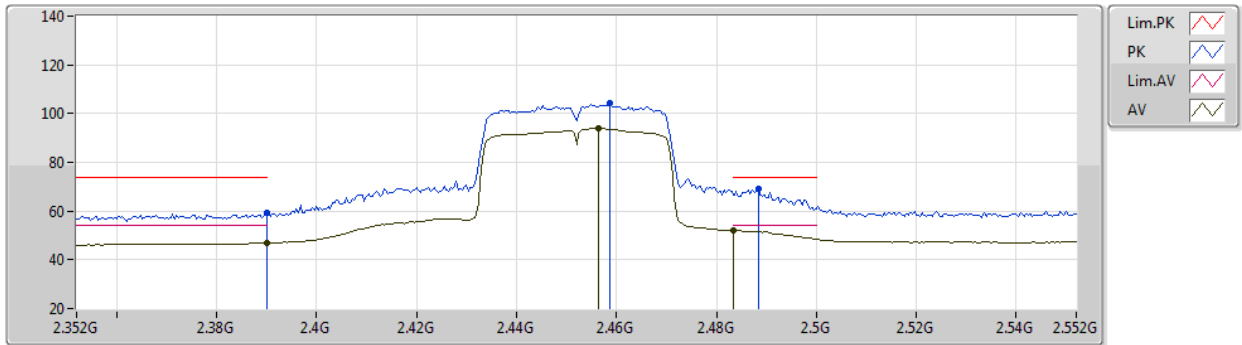


EUT Y_1TX
Setting 37
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	59.35	74.00	-14.65	28.64	3	Vertical	360	2.27	-	28.30	2.41	-
AV	2.39G	46.86	54.00	-7.14	16.15	3	Vertical	360	2.27	-	28.30	2.41	-
PK	2.4588G	104.42	Inf	-Inf	73.55	3	Vertical	360	2.27	-	28.44	2.43	-
AV	2.4564G	93.79	Inf	-Inf	62.93	3	Vertical	360	2.27	-	28.43	2.43	-
PK	2.4884G	68.89	74.00	-5.11	37.90	3	Vertical	360	2.27	-	28.55	2.44	-
AV	2.4835G	51.94	54.00	-2.06	20.97	3	Vertical	360	2.27	-	28.53	2.44	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2452MHz_TX

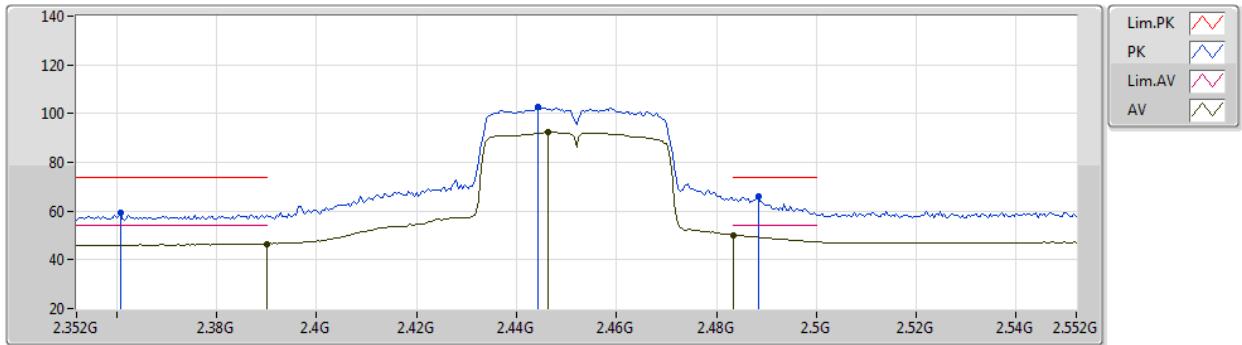


EUT Y_1TX
Setting 37
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3608G	59.18	74.00	-14.82	28.46	3	Horizontal	311	2.44	-	28.30	2.42	-
AV	2.39G	46.63	54.00	-7.37	15.92	3	Horizontal	311	2.44	-	28.30	2.41	-
PK	2.4444G	102.67	Inf	-Inf	71.86	3	Horizontal	311	2.44	-	28.39	2.42	-
AV	2.4464G	92.37	Inf	-Inf	61.56	3	Horizontal	311	2.44	-	28.39	2.42	-
PK	2.4884G	65.95	74.00	-8.05	34.96	3	Horizontal	311	2.44	-	28.55	2.44	-
AV	2.4835G	50.17	54.00	-3.83	19.20	3	Horizontal	311	2.44	-	28.53	2.44	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2452MHz_TX

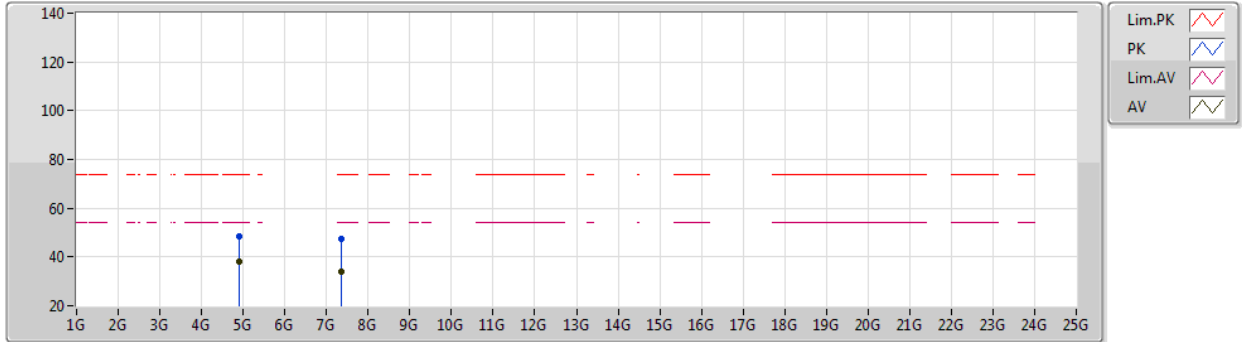


EUT Y_1TX
Setting 37
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.90382G	48.59	74.00	-25.41	42.50	3	Vertical	346	1.80	-	33.20	4.70	31.81
AV	4.90394G	38.15	54.00	-15.85	32.06	3	Vertical	346	1.80	-	33.20	4.70	31.81
PK	7.35636G	47.41	74.00	-26.59	37.58	3	Vertical	94	1.80	-	36.49	5.78	32.44
AV	7.3695G	33.71	54.00	-20.29	23.92	3	Vertical	94	1.80	-	36.46	5.78	32.45

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2452MHz_TX

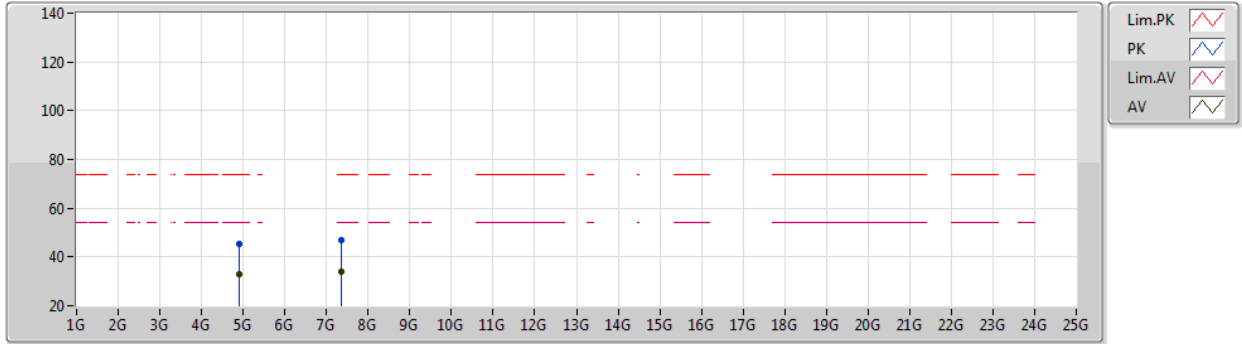

EUT Y_1TX
Setting 37
02-B-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.90442G	45.46	74.00	-28.54	39.37	3	Horizontal	261	2.14	-	33.20	4.70	31.81
AV	4.90394G	33.12	54.00	-20.88	27.03	3	Horizontal	261	2.14	-	33.20	4.70	31.81
PK	7.36248G	47.15	74.00	-26.85	37.33	3	Horizontal	40	1.72	-	36.48	5.78	32.44
AV	7.3602G	34.05	54.00	-19.95	24.23	3	Horizontal	40	1.72	-	36.48	5.78	32.44



Test Mode: Mode 2

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.11n HT40_Nss1,(MCS0)_1TX	Pass	AV	2.4835G	52.98	54.00	-1.02	3	Vertical	149	2.52	-



802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2412MHz_TX

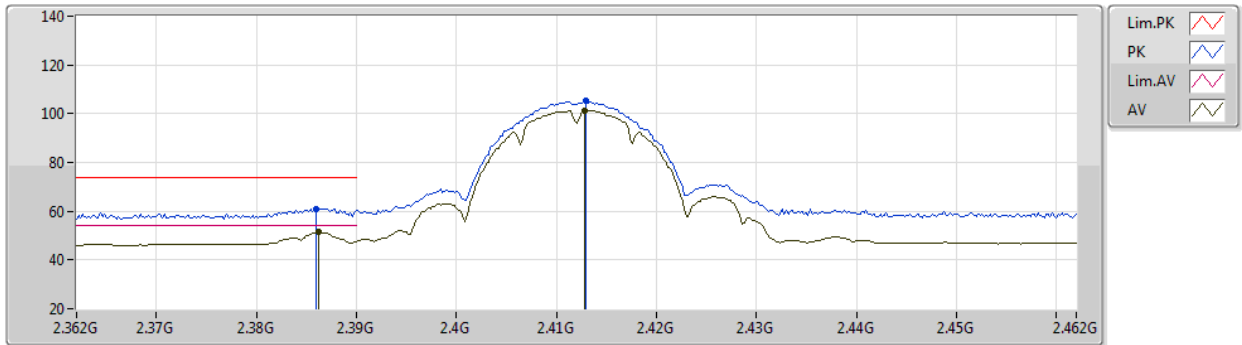


EUT Y_1TX
Setting 38
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.386G	61.07	74.00	-12.93	30.36	3	Vertical	156	2.43	-	28.30	2.41	-
AV	2.3862G	51.77	54.00	-2.23	21.06	3	Vertical	156	2.43	-	28.30	2.41	-
PK	2.413G	105.20	Inf	-Inf	74.46	3	Vertical	156	2.43	-	28.33	2.41	-
AV	2.4128G	101.28	Inf	-Inf	70.54	3	Vertical	156	2.43	-	28.33	2.41	-

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2412MHz_TX

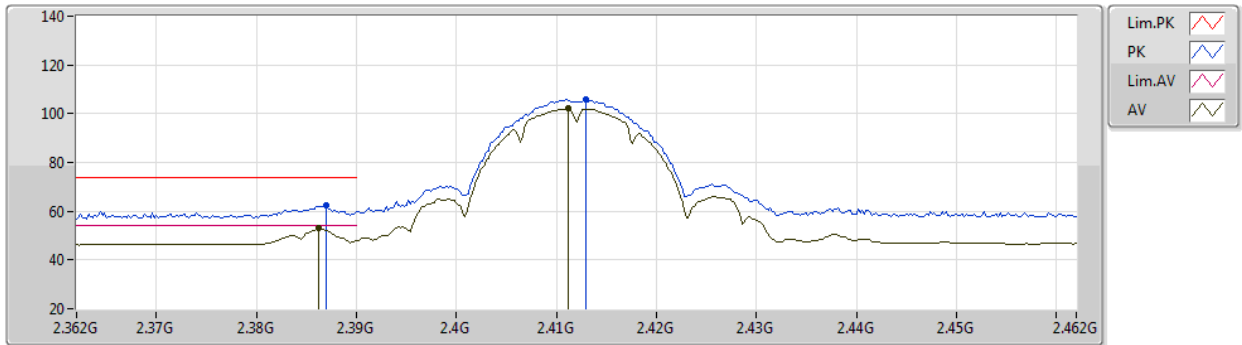

EUT Y_1TX
Setting 38
02-B-S-5


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.387G	62.18	74.00	-11.82	31.47	3	Horizontal	6	1.09	-	28.30	2.41	-
AV	2.3862G	52.88	54.00	-1.12	22.17	3	Horizontal	6	1.09	-	28.30	2.41	-
PK	2.413G	105.83	Inf	-Inf	75.09	3	Horizontal	6	1.09	-	28.33	2.41	-
AV	2.4112G	102.08	Inf	-Inf	71.35	3	Horizontal	6	1.09	-	28.32	2.41	-



802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2412MHz_TX

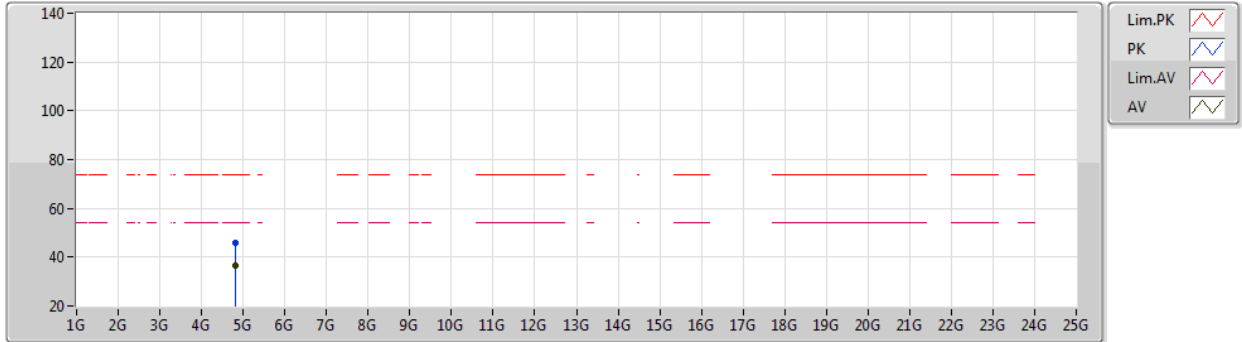

EUT Y_1TX
Setting 38
02-B-E-2


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82376G	46.09	74.00	-27.91	40.27	3	Vertical	149	2.70	-	32.90	4.70	31.78
AV	4.82399G	36.43	54.00	-17.57	30.61	3	Vertical	149	2.70	-	32.90	4.70	31.78



802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2412MHz_TX

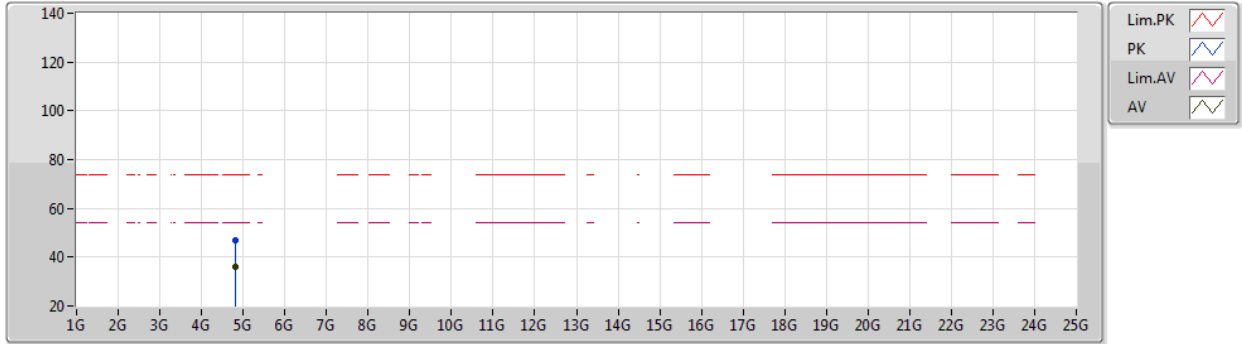


EUT Y_1TX
Setting 38
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82398G	46.96	74.00	-27.04	41.14	3	Horizontal	116	1.11	-	32.90	4.70	31.78
AV	4.82397G	36.11	54.00	-17.89	30.29	3	Horizontal	116	1.11	-	32.90	4.70	31.78

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2417MHz_TX

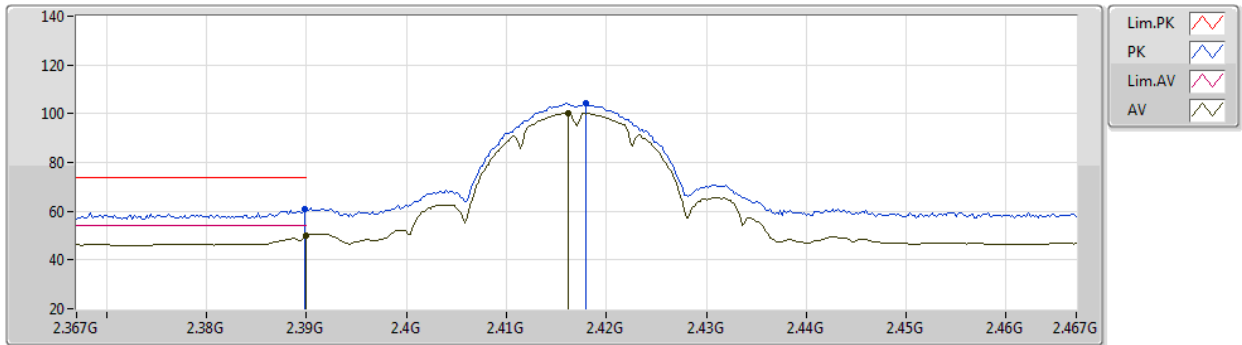


EUT Y_1TX
Setting 40
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3898G	60.68	74.00	-13.32	29.97	3	Vertical	166	2.02	-	28.30	2.41	-
AV	2.39G	50.21	54.00	-3.79	19.50	3	Vertical	166	2.02	-	28.30	2.41	-
PK	2.418G	104.11	Inf	-Inf	73.36	3	Vertical	166	2.02	-	28.34	2.41	-
AV	2.4162G	100.37	Inf	-Inf	69.63	3	Vertical	166	2.02	-	28.33	2.41	-

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2417MHz_TX

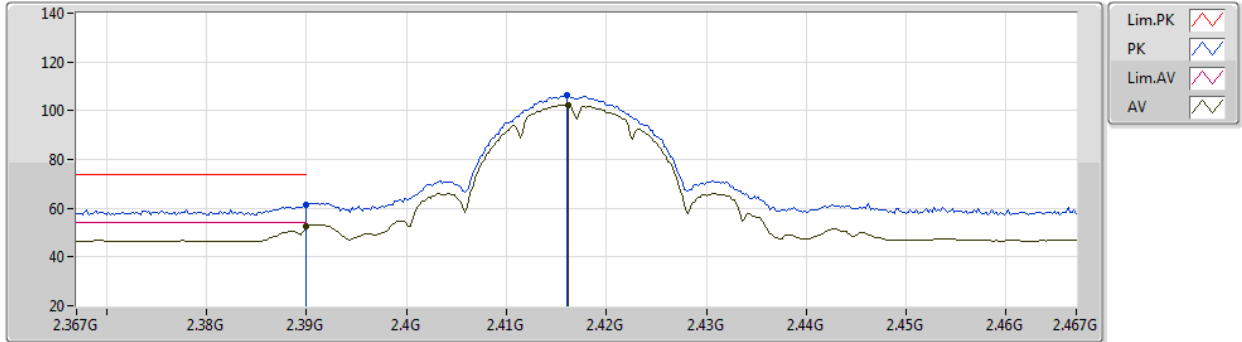


EUT Y_1TX
Setting 40
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	61.15	74.00	-12.85	30.44	3	Horizontal	6	1.11	-	28.30	2.41	-
AV	2.39G	52.57	54.00	-1.43	21.86	3	Horizontal	6	1.11	-	28.30	2.41	-
PK	2.416G	106.20	Inf	-Inf	75.46	3	Horizontal	6	1.11	-	28.33	2.41	-
AV	2.4162G	102.48	Inf	-Inf	71.74	3	Horizontal	6	1.11	-	28.33	2.41	-

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2437MHz_TX

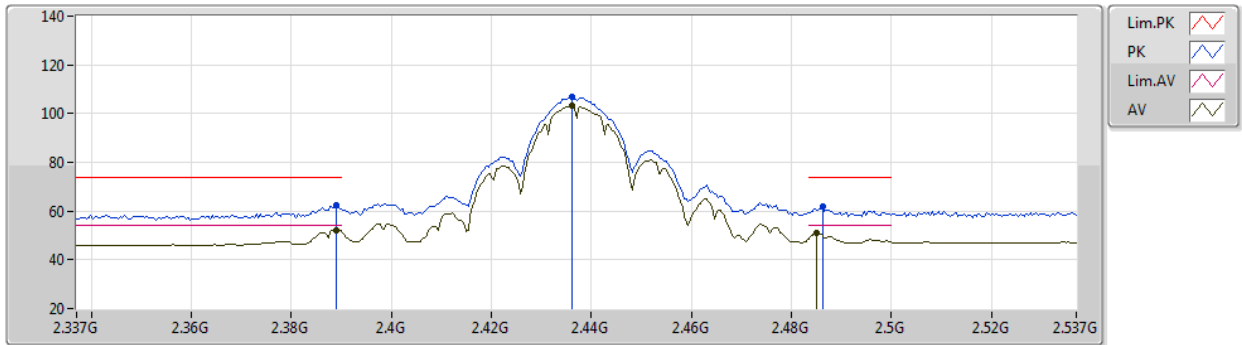


EUT Y_1TX
Setting 51
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.389G	62.39	74.00	-11.61	31.68	3	Vertical	164	2.16	-	28.30	2.41	-
AV	2.389G	52.20	54.00	-1.80	21.49	3	Vertical	164	2.16	-	28.30	2.41	-
PK	2.4362G	106.76	Inf	-Inf	75.97	3	Vertical	164	2.16	-	28.37	2.42	-
AV	2.4362G	103.03	Inf	-Inf	72.24	3	Vertical	164	2.16	-	28.37	2.42	-
PK	2.4862G	61.79	74.00	-12.21	30.81	3	Vertical	164	2.16	-	28.54	2.44	-
AV	2.485G	50.80	54.00	-3.20	19.82	3	Vertical	164	2.16	-	28.54	2.44	-

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2437MHz_TX

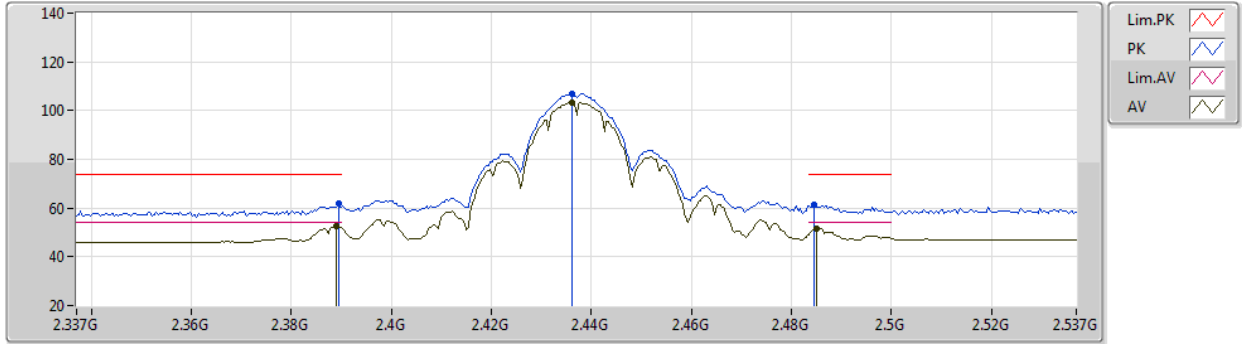


EUT Y_1TX
Setting 51
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3894G	62.08	74.00	-11.92	31.37	3	Horizontal	40	1.43	-	28.30	2.41	-
AV	2.389G	52.42	54.00	-1.58	21.71	3	Horizontal	40	1.43	-	28.30	2.41	-
PK	2.4362G	106.94	Inf	-Inf	76.15	3	Horizontal	40	1.43	-	28.37	2.42	-
AV	2.4362G	103.30	Inf	-Inf	72.51	3	Horizontal	40	1.43	-	28.37	2.42	-
PK	2.4846G	61.19	74.00	-12.81	30.21	3	Horizontal	40	1.43	-	28.54	2.44	-
AV	2.485G	51.70	54.00	-2.30	20.72	3	Horizontal	40	1.43	-	28.54	2.44	-

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2437MHz_TX

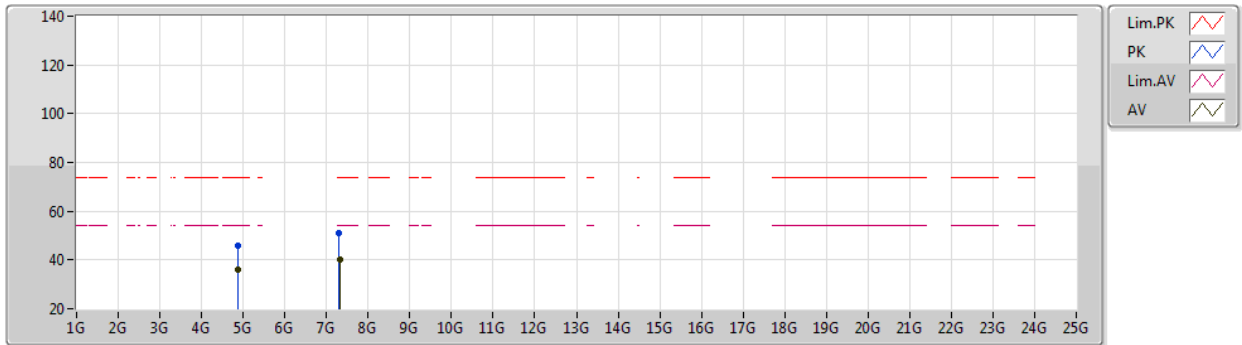


EUT Y_1TX
Setting 51
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87402G	46.12	74.00	-27.88	40.11	3	Vertical	152	2.65	-	33.10	4.70	31.79
AV	4.87398G	35.94	54.00	-18.06	29.93	3	Vertical	152	2.65	-	33.10	4.70	31.79
PK	7.31009G	51.12	74.00	-22.88	41.36	3	Vertical	226	1.76	-	36.42	5.76	32.42
AV	7.31171G	39.95	54.00	-14.05	30.19	3	Vertical	226	1.76	-	36.42	5.76	32.42

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2437MHz_TX

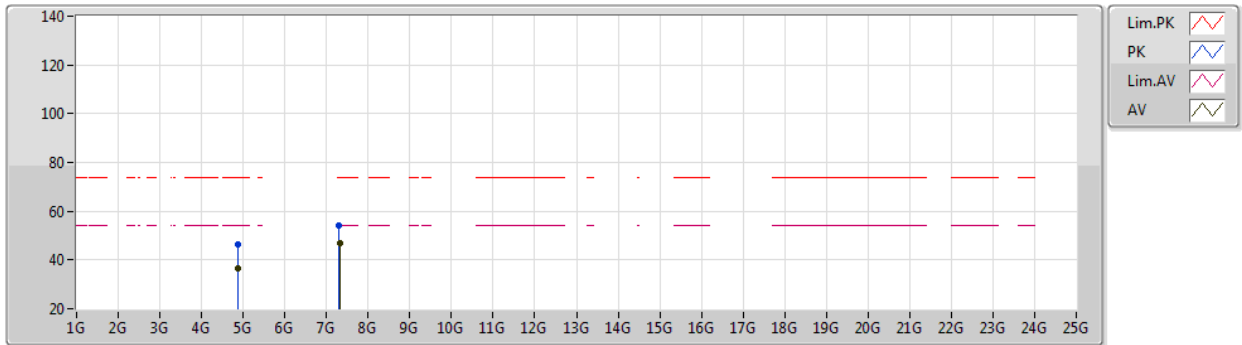


EUT Y_1TX
Setting 51
02-B-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87396G	46.61	74.00	-27.39	40.60	3	Horizontal	121	1.18	-	33.10	4.70	31.79
AV	4.87396G	36.78	54.00	-17.22	30.77	3	Horizontal	121	1.18	-	33.10	4.70	31.79
PK	7.31003G	54.00	74.00	-20.00	44.24	3	Horizontal	144	2.10	-	36.42	5.76	32.42
AV	7.31169G	46.70	54.00	-7.30	36.94	3	Horizontal	144	2.10	-	36.42	5.76	32.42

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2457MHz_TX

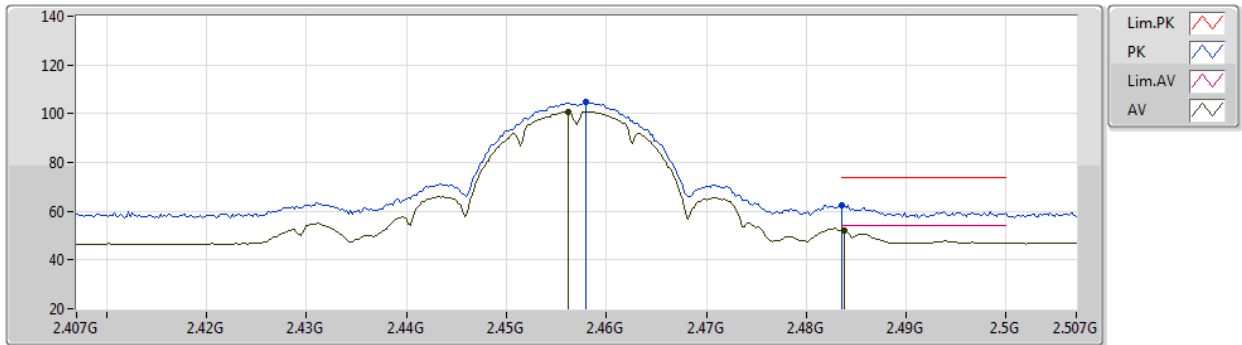


EUT Y_1TX
Setting 40
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.458G	104.71	Inf	-Inf	73.85	3	Vertical	164	2.75	-	28.43	2.43	-
AV	2.4562G	100.91	Inf	-Inf	70.06	3	Vertical	164	2.75	-	28.42	2.43	-
PK	2.4835G	62.36	74.00	-11.64	31.39	3	Vertical	164	2.75	-	28.53	2.44	-
AV	2.4838G	52.21	54.00	-1.79	21.23	3	Vertical	164	2.75	-	28.54	2.44	-

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2457MHz_TX

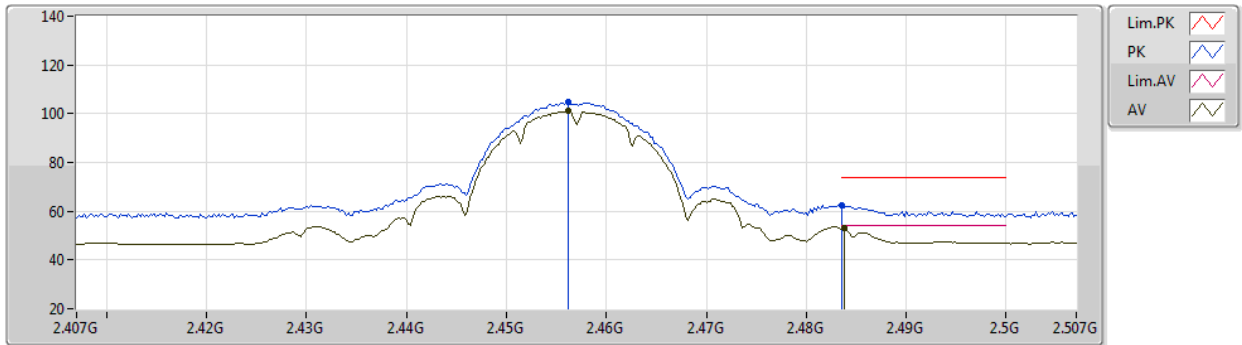

EUT Y_1TX
Setting 40
02-B-S-5


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4562G	104.85	Inf	-Inf	74.00	3	Horizontal	34	1.31	-	28.42	2.43	-
AV	2.4562G	101.16	Inf	-Inf	70.31	3	Horizontal	34	1.31	-	28.42	2.43	-
PK	2.4836G	62.20	74.00	-11.80	31.23	3	Horizontal	34	1.31	-	28.53	2.44	-
AV	2.4838G	52.92	54.00	-1.08	21.94	3	Horizontal	34	1.31	-	28.54	2.44	-



802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2462MHz_TX

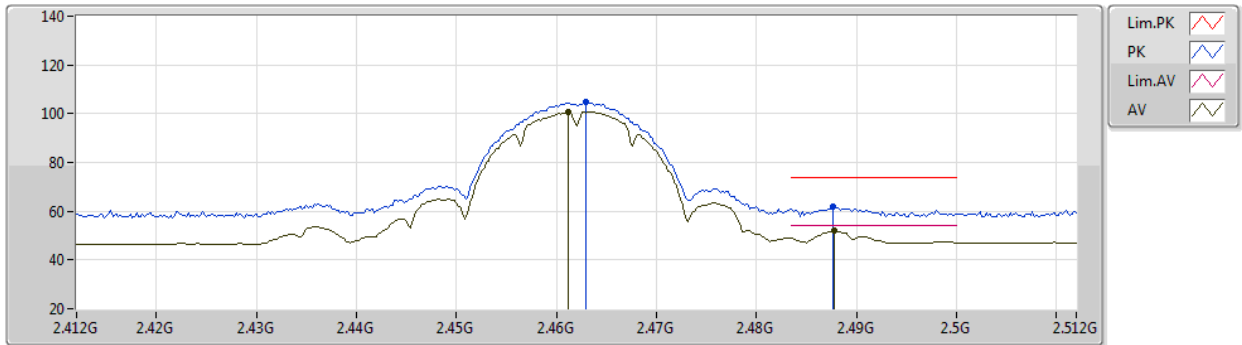


EUT Y_1TX
Setting 37
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.463G	104.68	Inf	-Inf	73.80	3	Vertical	162	1.82	-	28.45	2.43	-
AV	2.4612G	100.74	Inf	-Inf	69.87	3	Vertical	162	1.82	-	28.44	2.43	-
PK	2.4876G	61.92	74.00	-12.08	30.93	3	Vertical	162	1.82	-	28.55	2.44	-
AV	2.4878G	51.94	54.00	-2.06	20.95	3	Vertical	162	1.82	-	28.55	2.44	-

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2462MHz_TX

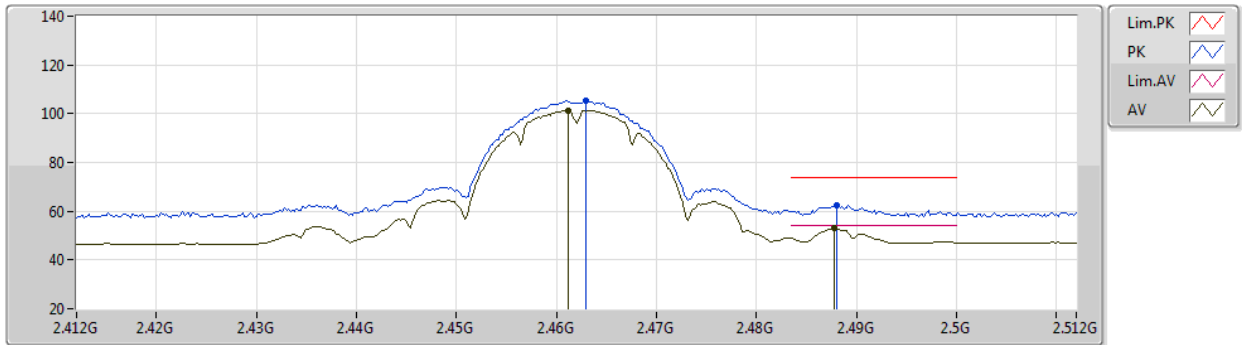


EUT Y_1TX
Setting 37
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.463G	105.25	Inf	-Inf	74.37	3	Horizontal	36	1.16	-	28.45	2.43	-
AV	2.4612G	101.46	Inf	-Inf	70.59	3	Horizontal	36	1.16	-	28.44	2.43	-
PK	2.488G	62.45	74.00	-11.55	31.46	3	Horizontal	36	1.16	-	28.55	2.44	-
AV	2.4878G	52.89	54.00	-1.11	21.90	3	Horizontal	36	1.16	-	28.55	2.44	-

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2462MHz_TX

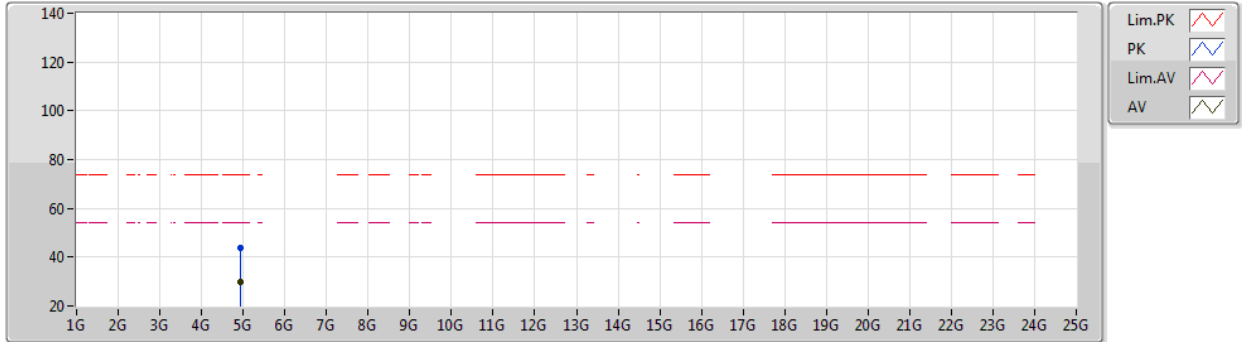


EUT Y_1TX
Setting 37
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92984G	43.92	74.00	-30.08	37.83	3	Vertical	211	2.56	-	33.20	4.70	31.81
AV	4.92528G	30.06	54.00	-23.94	23.97	3	Vertical	211	2.56	-	33.20	4.70	31.81

802.11b_Nss1,(1Mbps)_1TX

25/03/2021

2462MHz_TX

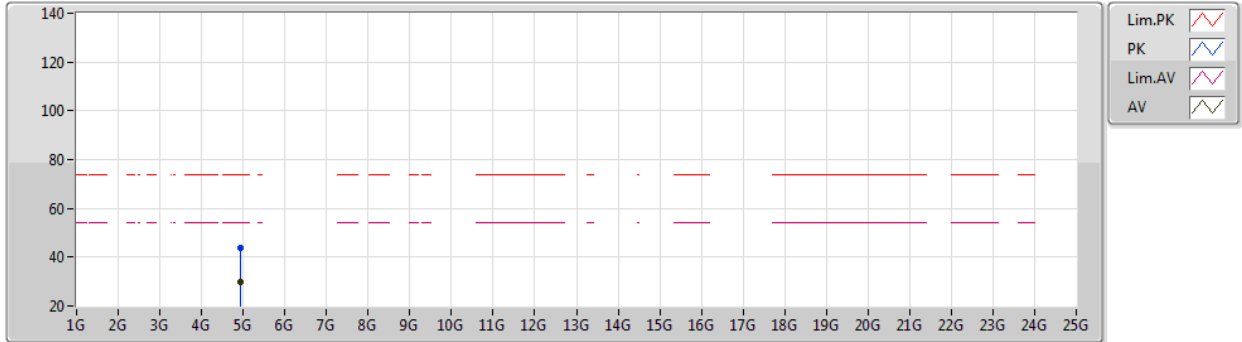


EUT Y_1TX
Setting 37
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.925888G	43.58	74.00	-30.42	37.49	3	Horizontal	265	2.25	-	33.20	4.70	31.81
AV	4.92888G	30.00	54.00	-24.00	23.91	3	Horizontal	265	2.25	-	33.20	4.70	31.81

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2412MHz_TX

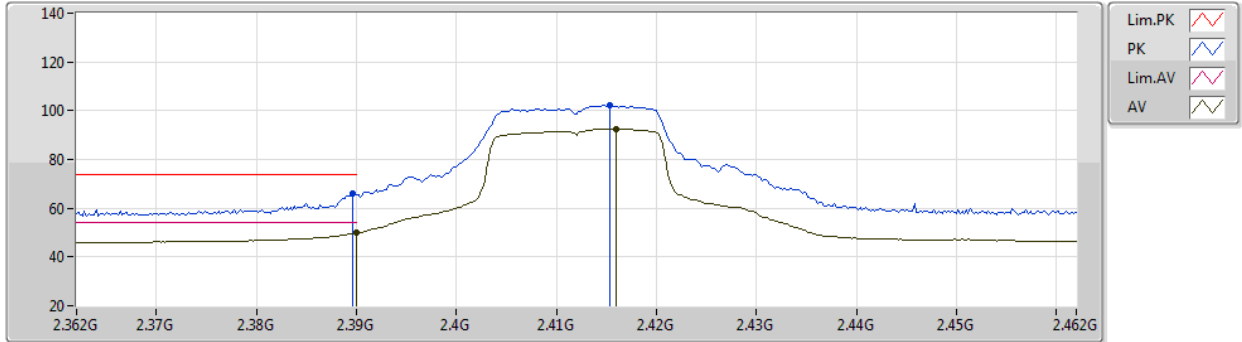


EUT Y_1TX
Setting 43
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3896G	66.28	74.00	-7.72	35.57	3	Vertical	167	2.01	-	28.30	2.41	-
AV	2.39G	49.96	54.00	-4.04	19.25	3	Vertical	167	2.01	-	28.30	2.41	-
PK	2.4154G	102.20	Inf	-Inf	71.46	3	Vertical	167	2.01	-	28.33	2.41	-
AV	2.416G	92.41	Inf	-Inf	61.67	3	Vertical	167	2.01	-	28.33	2.41	-

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2412MHz_TX

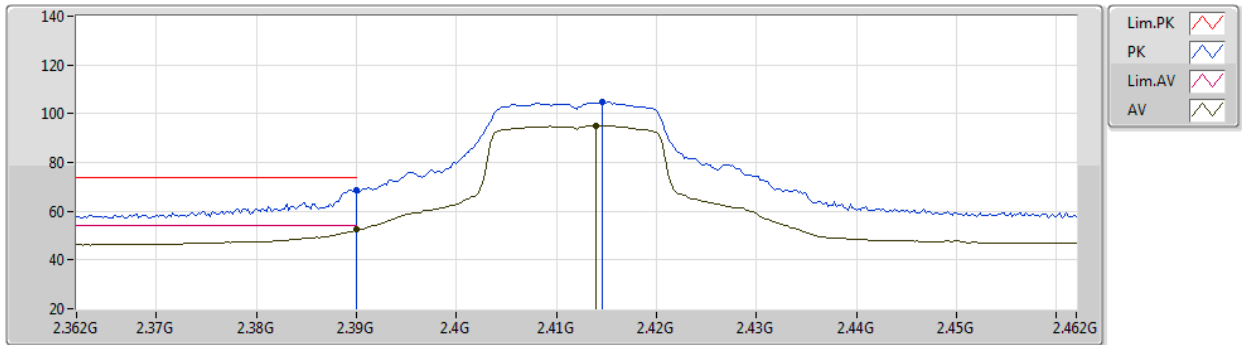

EUT Y_1TX
Setting 43
02-B-S-5


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	68.64	74.00	-5.36	37.93	3	Horizontal	7	1.09	-	28.30	2.41	-
AV	2.39G	52.33	54.00	-1.67	21.62	3	Horizontal	7	1.09	-	28.30	2.41	-
PK	2.4146G	104.74	Inf	-Inf	74.00	3	Horizontal	7	1.09	-	28.33	2.41	-
AV	2.414G	95.10	Inf	-Inf	64.36	3	Horizontal	7	1.09	-	28.33	2.41	-



802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2412MHz_TX

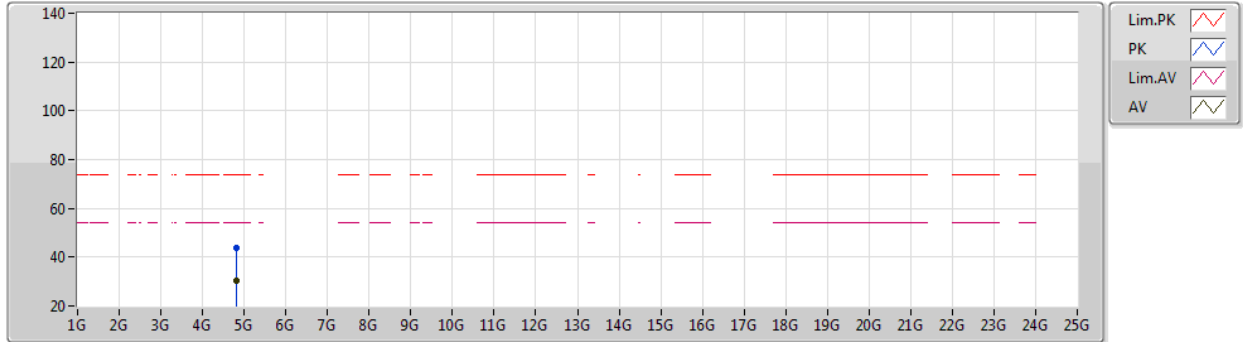


EUT Y_1TX
Setting 43
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82408G	44.03	74.00	-29.97	38.21	3	Vertical	338	2.73	-	32.90	4.70	31.78
AV	4.82444G	30.14	54.00	-23.86	24.32	3	Vertical	338	2.73	-	32.90	4.70	31.78

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2412MHz_TX

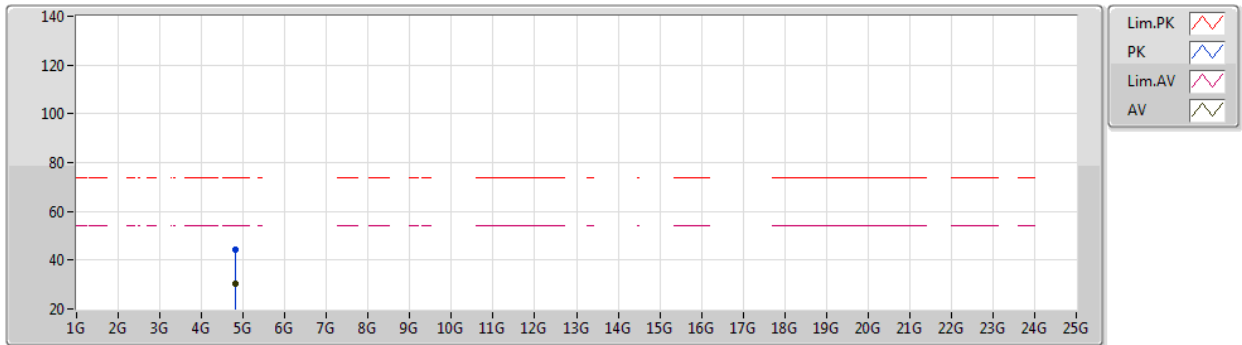

EUT Y_1TX
Setting 43
02-B-S-5


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82704G	44.32	74.00	-29.68	38.49	3	Horizontal	146	2.23	-	32.91	4.70	31.78
AV	4.82256G	30.16	54.00	-23.84	24.35	3	Horizontal	146	2.23	-	32.89	4.70	31.78



802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2417MHz_TX

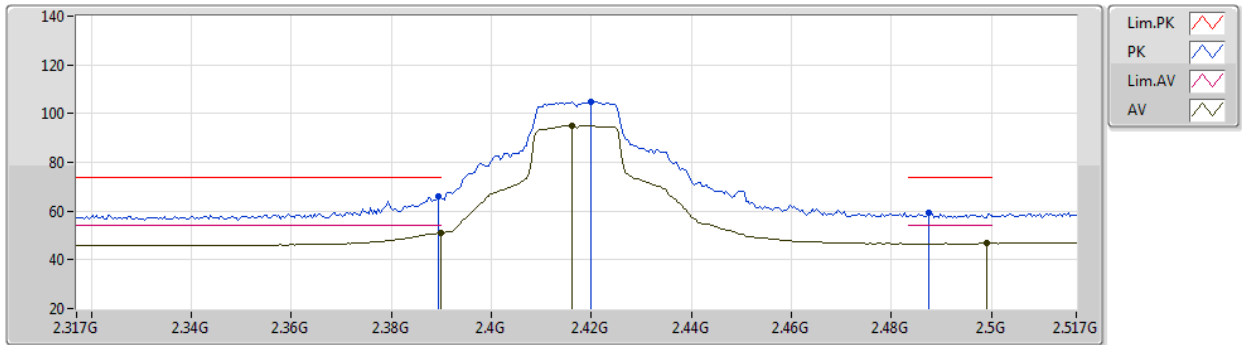


EUT Y_1TX
Setting 50
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3894G	66.17	74.00	-7.83	35.46	3	Vertical	165	2.02	-	28.30	2.41	-
AV	2.3898G	50.87	54.00	-3.13	20.16	3	Vertical	165	2.02	-	28.30	2.41	-
PK	2.4198G	104.82	Inf	-Inf	74.07	3	Vertical	165	2.02	-	28.34	2.41	-
AV	2.4162G	95.07	Inf	-Inf	64.33	3	Vertical	165	2.02	-	28.33	2.41	-
PK	2.4874G	59.24	74.00	-14.76	28.25	3	Vertical	165	2.02	-	28.55	2.44	-
AV	2.499G	46.74	54.00	-7.26	15.69	3	Vertical	165	2.02	-	28.60	2.45	-

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2417MHz_TX

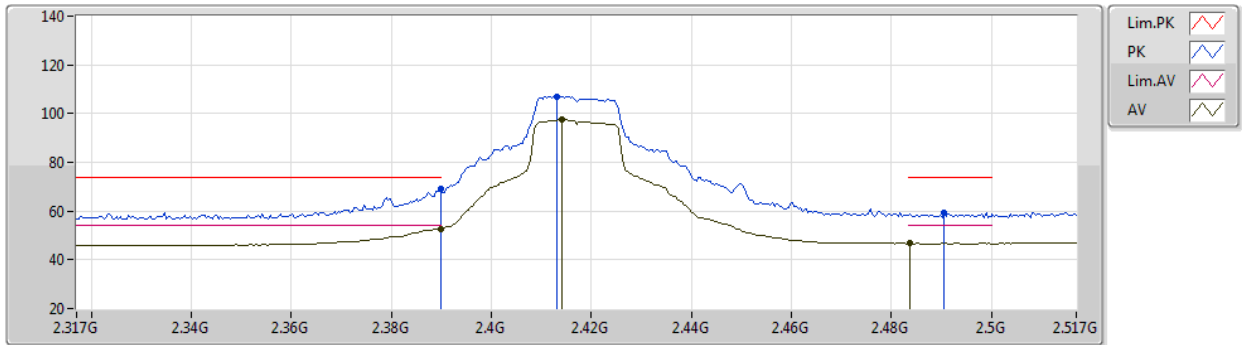


EUT Y_1TX
Setting 50
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3898G	68.88	74.00	-5.12	38.17	3	Horizontal	7	1.09	-	28.30	2.41	-
AV	2.3898G	52.81	54.00	-1.19	22.10	3	Horizontal	7	1.09	-	28.30	2.41	-
PK	2.413G	107.15	Inf	-Inf	76.41	3	Horizontal	7	1.09	-	28.33	2.41	-
AV	2.4142G	97.52	Inf	-Inf	66.78	3	Horizontal	7	1.09	-	28.33	2.41	-
PK	2.4906G	59.28	74.00	-14.72	28.27	3	Horizontal	7	1.09	-	28.56	2.45	-
AV	2.4838G	46.71	54.00	-7.29	15.73	3	Horizontal	7	1.09	-	28.54	2.44	-

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2437MHz_TX

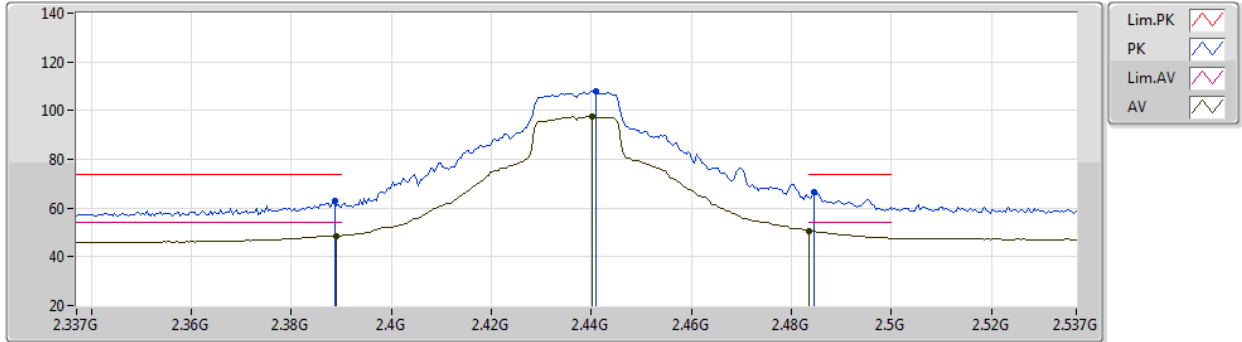


EUT Y_1TX
Setting 58
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3886G	63.11	74.00	-10.89	32.40	3	Vertical	156	2.37	-	28.30	2.41	-
AV	2.389G	48.70	54.00	-5.30	17.99	3	Vertical	156	2.37	-	28.30	2.41	-
PK	2.441G	107.94	Inf	-Inf	77.14	3	Vertical	156	2.37	-	28.38	2.42	-
AV	2.4402G	97.46	Inf	-Inf	66.66	3	Vertical	156	2.37	-	28.38	2.42	-
PK	2.4846G	66.79	74.00	-7.21	35.81	3	Vertical	156	2.37	-	28.54	2.44	-
AV	2.4835G	50.72	54.00	-3.28	19.75	3	Vertical	156	2.37	-	28.53	2.44	-

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2437MHz_TX

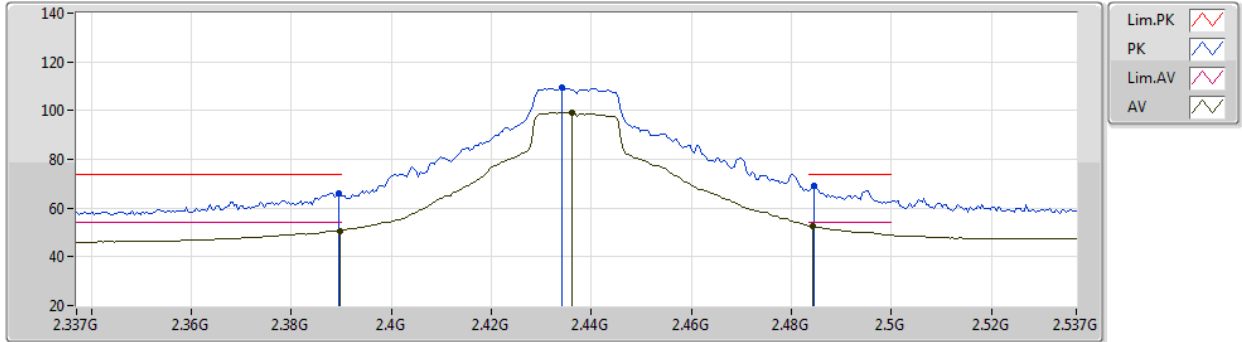

EUT Y_1TX
Setting 58
02-B-S-5


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3894G	66.29	74.00	-7.71	35.58	3	Horizontal	4	1.02	-	28.30	2.41	-
AV	2.3898G	50.69	54.00	-3.31	19.98	3	Horizontal	4	1.02	-	28.30	2.41	-
PK	2.4342G	109.26	Inf	-Inf	78.47	3	Horizontal	4	1.02	-	28.37	2.42	-
AV	2.4362G	99.18	Inf	-Inf	68.39	3	Horizontal	4	1.02	-	28.37	2.42	-
PK	2.4846G	69.32	74.00	-4.68	38.34	3	Horizontal	4	1.02	-	28.54	2.44	-
AV	2.4842G	52.84	54.00	-1.16	21.86	3	Horizontal	4	1.02	-	28.54	2.44	-



802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2437MHz_TX

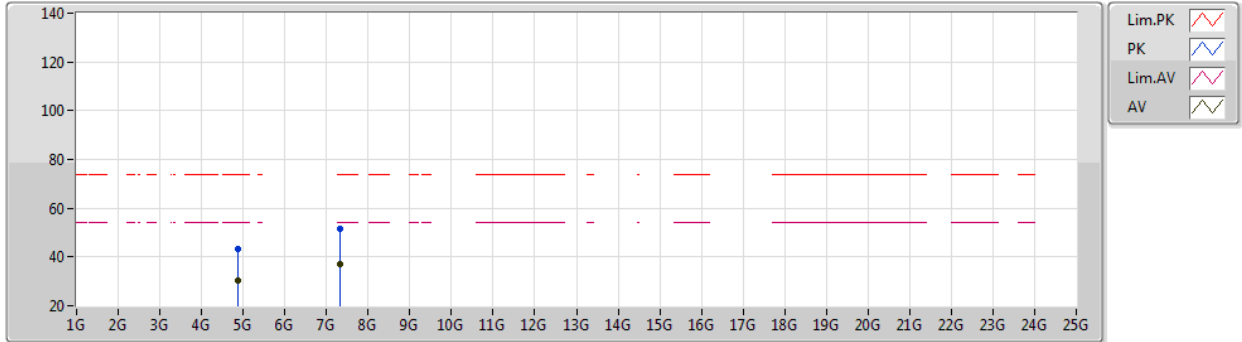


EUT Y_1TX
Setting 58
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.8766G	43.40	74.00	-30.60	37.39	3	Vertical	57	1.50	-	33.11	4.70	31.80
AV	4.86412G	30.22	54.00	-23.78	24.25	3	Vertical	57	1.50	-	33.06	4.70	31.79
PK	7.3132G	51.58	74.00	-22.42	41.82	3	Vertical	163	1.83	-	36.43	5.76	32.43
AV	7.31512G	36.86	54.00	-17.14	27.10	3	Vertical	163	1.83	-	36.43	5.76	32.43

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2437MHz_TX

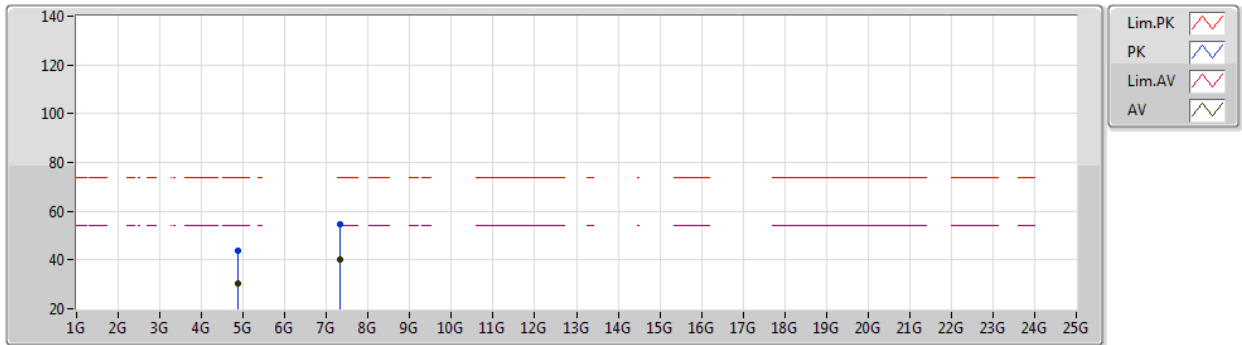


EUT Y_1TX
Setting 58
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.86596G	43.69	74.00	-30.31	37.72	3	Horizontal	356	1.26	-	33.06	4.70	31.79
AV	4.87404G	30.17	54.00	-23.83	24.16	3	Horizontal	356	1.26	-	33.10	4.70	31.79
PK	7.31316G	54.44	74.00	-19.56	44.68	3	Horizontal	142	1.76	-	36.43	5.76	32.43
AV	7.31512G	39.97	54.00	-14.03	30.21	3	Horizontal	142	1.76	-	36.43	5.76	32.43

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2457MHz_TX

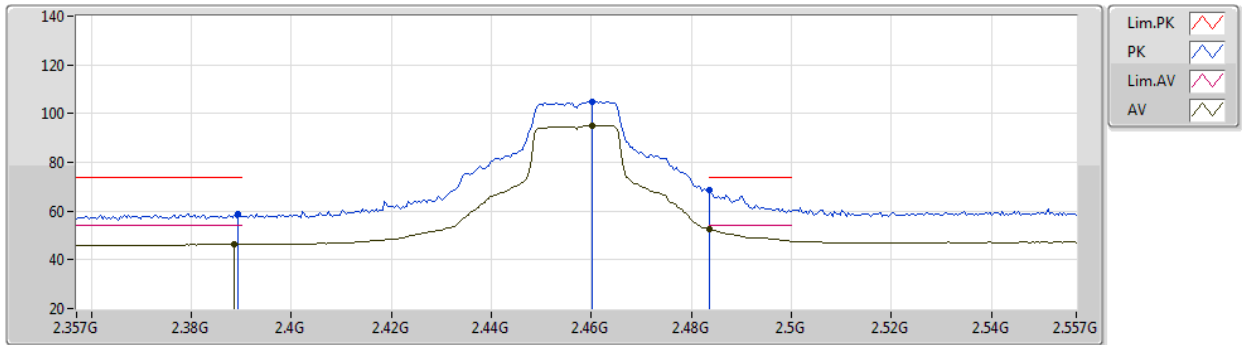


EUT Y_1TX
Setting 48
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3894G	58.72	74.00	-15.28	28.01	3	Vertical	163	1.83	-	28.30	2.41	-
AV	2.3886G	46.29	54.00	-7.71	15.58	3	Vertical	163	1.83	-	28.30	2.41	-
PK	2.4602G	105.02	Inf	-Inf	74.15	3	Vertical	163	1.83	-	28.44	2.43	-
AV	2.4602G	95.09	Inf	-Inf	64.22	3	Vertical	163	1.83	-	28.44	2.43	-
PK	2.4835G	68.45	74.00	-5.55	37.48	3	Vertical	163	1.83	-	28.53	2.44	-
AV	2.4835G	52.79	54.00	-1.21	21.82	3	Vertical	163	1.83	-	28.53	2.44	-

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2457MHz_TX

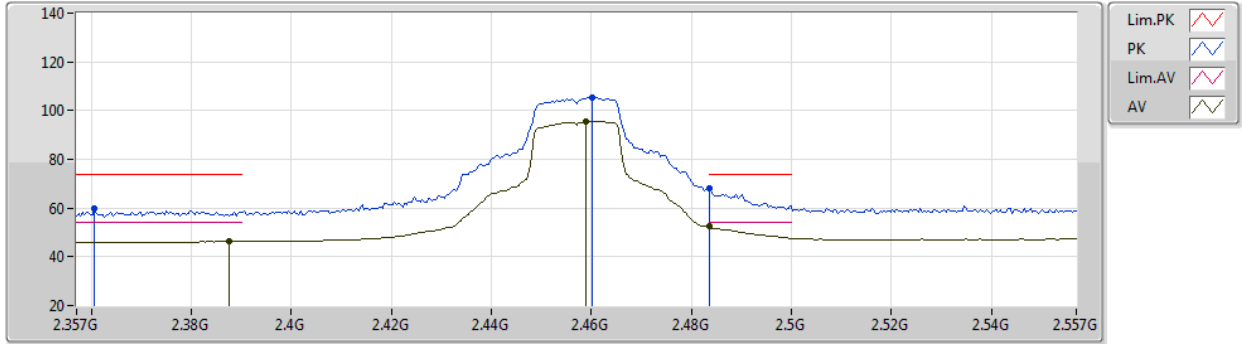


EUT Y_1TX
Setting 48
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3606G	59.90	74.00	-14.10	29.18	3	Horizontal	36	1.16	-	28.30	2.42	-
AV	2.3874G	46.29	54.00	-7.71	15.58	3	Horizontal	36	1.16	-	28.30	2.41	-
PK	2.4602G	105.47	Inf	-Inf	74.60	3	Horizontal	36	1.16	-	28.44	2.43	-
AV	2.459G	95.52	Inf	-Inf	64.65	3	Horizontal	36	1.16	-	28.44	2.43	-
PK	2.4835G	68.21	74.00	-5.79	37.24	3	Horizontal	36	1.16	-	28.53	2.44	-
AV	2.4835G	52.55	54.00	-1.45	21.58	3	Horizontal	36	1.16	-	28.53	2.44	-

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2462MHz_TX

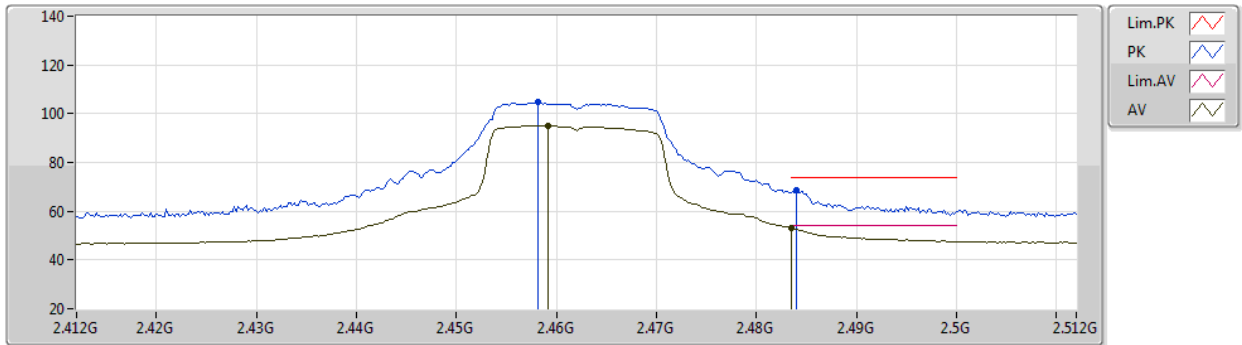


EUT Y_1TX
Setting 42
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.4582G	104.74	Inf	-Inf	73.88	3	Vertical	106	2.73	-	28.43	2.43	-
AV	2.4592G	95.06	Inf	-Inf	64.19	3	Vertical	106	2.73	-	28.44	2.43	-
PK	2.484G	68.79	74.00	-5.21	37.81	3	Vertical	106	2.73	-	28.54	2.44	-
AV	2.4835G	52.97	54.00	-1.03	22.00	3	Vertical	106	2.73	-	28.53	2.44	-

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2462MHz_TX

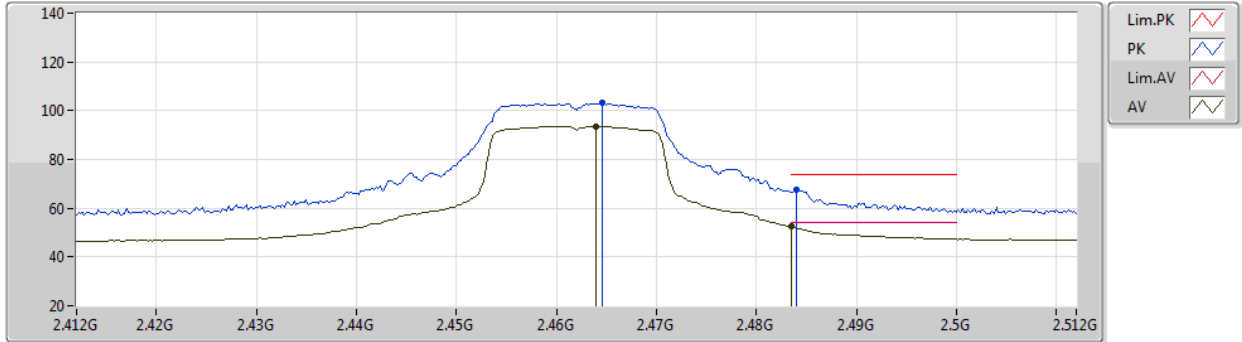


EUT Y_1TX
Setting 42
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.464G	103.11	Inf	-Inf	72.22	3	Horizontal	35	1.16	-	28.46	2.43	-
AV	2.464G	93.50	Inf	-Inf	62.61	3	Horizontal	35	1.16	-	28.46	2.43	-
PK	2.484G	67.82	74.00	-6.18	36.84	3	Horizontal	35	1.16	-	28.54	2.44	-
AV	2.4835G	52.62	54.00	-1.38	21.65	3	Horizontal	35	1.16	-	28.53	2.44	-

802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2462MHz_TX

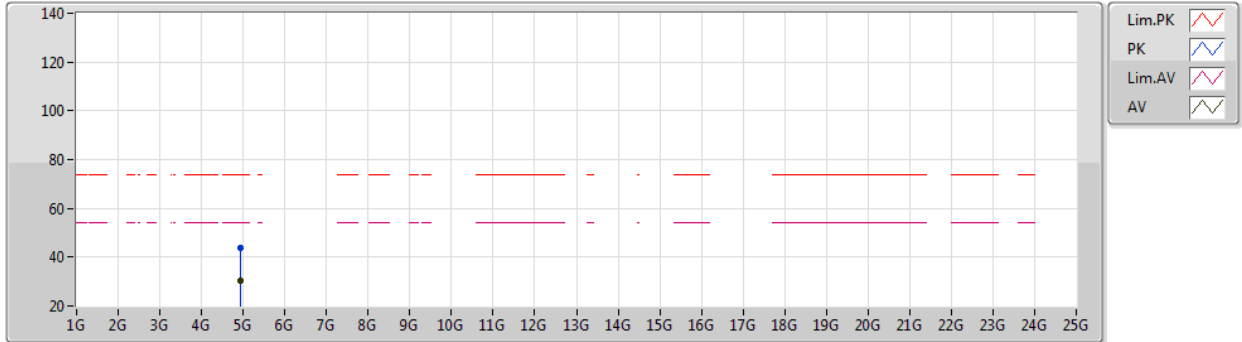

EUT Y_1TX
Setting 42
02-B-S-5


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92724G	43.80	74.00	-30.20	37.71	3	Vertical	90	2.00	-	33.20	4.70	31.81
AV	4.92544G	30.35	54.00	-23.65	24.26	3	Vertical	90	2.00	-	33.20	4.70	31.81



802.11g_Nss1,(6Mbps)_1TX

25/03/2021

2462MHz_TX

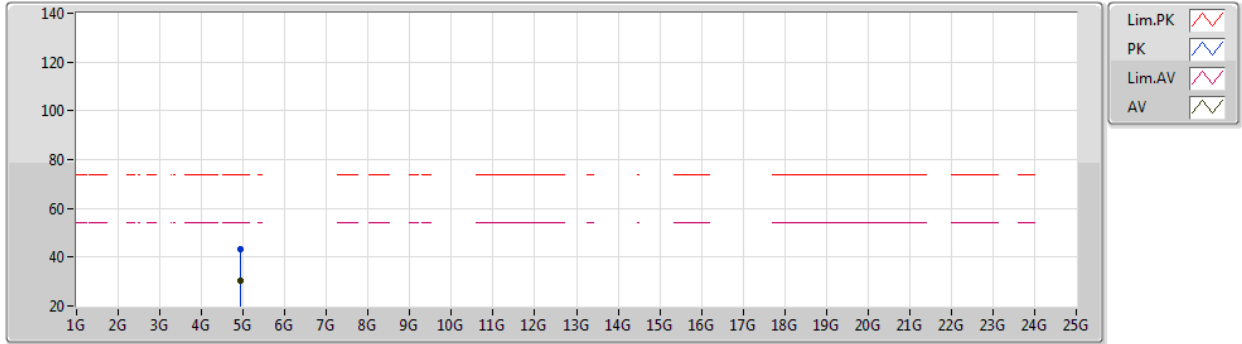


EUT Y_1TX
Setting 42
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92372G	43.50	74.00	-30.50	37.41	3	Horizontal	50	1.00	-	33.20	4.70	31.81
AV	4.929G	30.25	54.00	-23.75	24.16	3	Horizontal	50	1.00	-	33.20	4.70	31.81

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2412MHz_TX

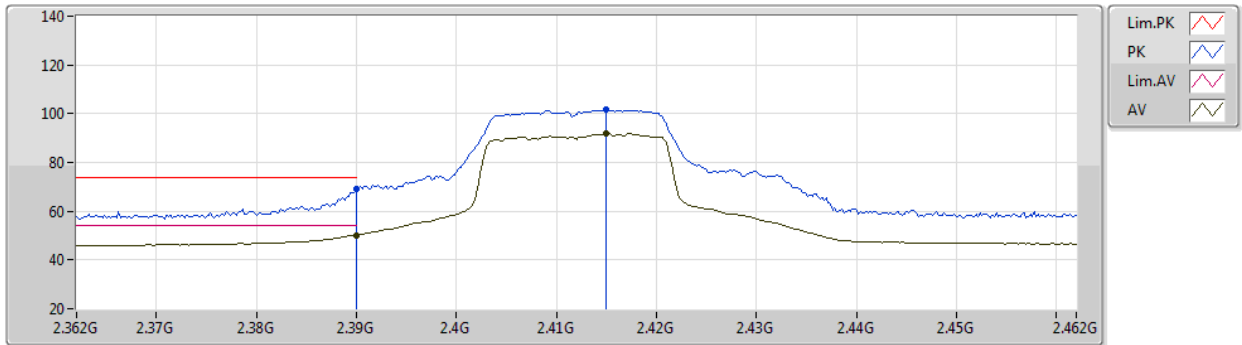


EUT Y_1TX
Setting 42
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	69.04	74.00	-4.96	38.33	3	Vertical	165	2.01	-	28.30	2.41	-
AV	2.39G	50.20	54.00	-3.80	19.49	3	Vertical	165	2.01	-	28.30	2.41	-
PK	2.415G	101.51	Inf	-Inf	70.77	3	Vertical	165	2.01	-	28.33	2.41	-
AV	2.415G	91.78	Inf	-Inf	61.04	3	Vertical	165	2.01	-	28.33	2.41	-

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2412MHz_TX

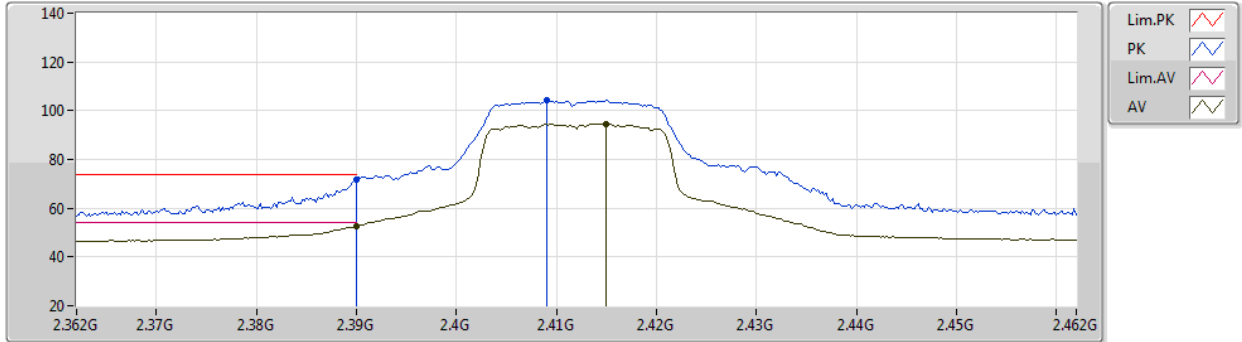


EUT Y_1TX
Setting 42
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	71.78	74.00	-2.22	41.07	3	Horizontal	7	1.09	-	28.30	2.41	-
AV	2.39G	52.76	54.00	-1.24	22.05	3	Horizontal	7	1.09	-	28.30	2.41	-
PK	2.409G	104.27	Inf	-Inf	73.55	3	Horizontal	7	1.09	-	28.32	2.40	-
AV	2.415G	94.71	Inf	-Inf	63.97	3	Horizontal	7	1.09	-	28.33	2.41	-

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2412MHz_TX

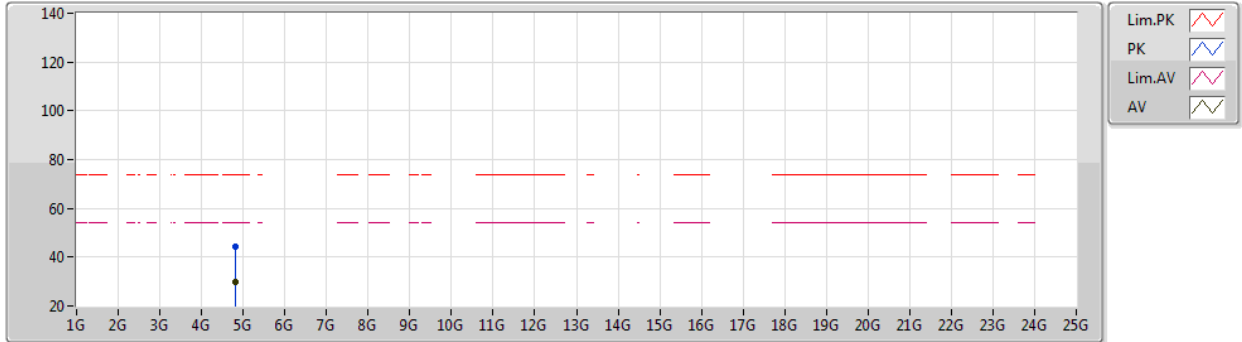


EUT Y_1TX
Setting 42
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.81816G	44.11	74.00	-29.89	38.31	3	Vertical	190	2.36	-	32.87	4.70	31.77
AV	4.8148G	30.08	54.00	-23.92	24.29	3	Vertical	190	2.36	-	32.86	4.70	31.77

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2412MHz_TX

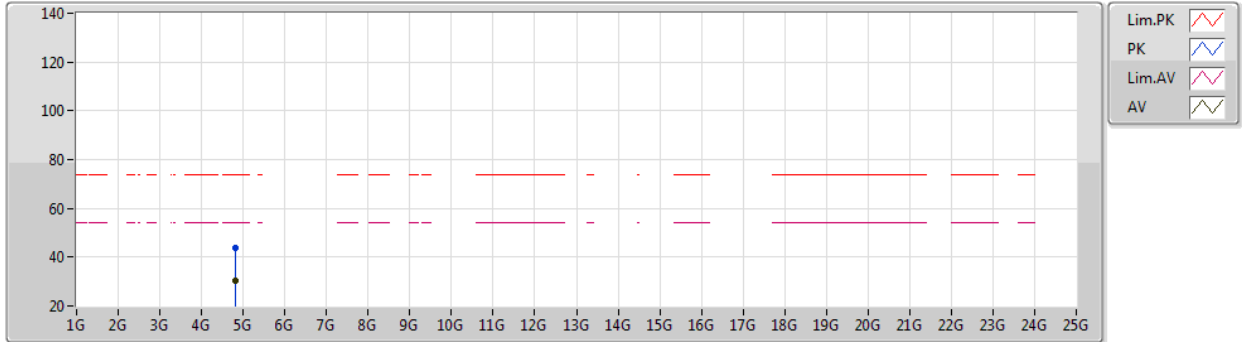


EUT Y_1TX
Setting 42
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.82416G	43.55	74.00	-30.45	37.73	3	Horizontal	276	1.85	-	32.90	4.70	31.78
AV	4.82488G	30.13	54.00	-23.87	24.31	3	Horizontal	276	1.85	-	32.90	4.70	31.78

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2417MHz_TX

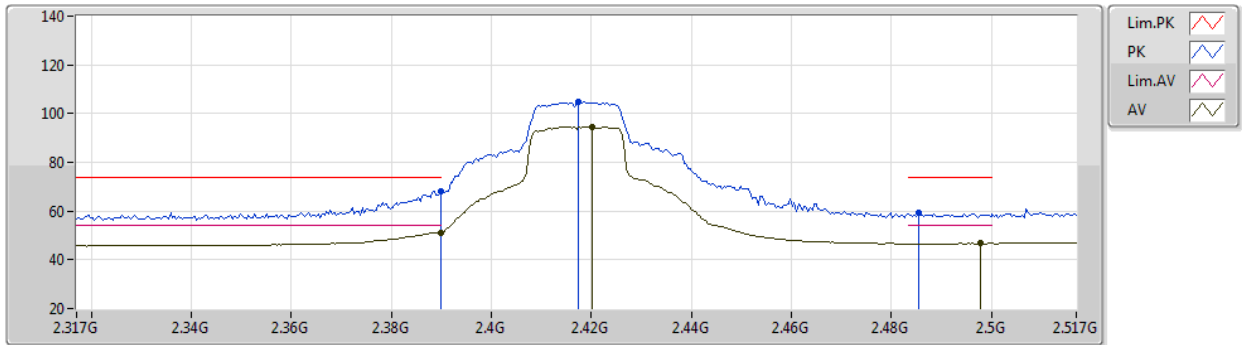

EUT Y_1TX
Setting 50
02-B-S-5


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3898G	68.13	74.00	-5.87	37.42	3	Vertical	164	2.01	-	28.30	2.41	-
AV	2.3898G	51.19	54.00	-2.81	20.48	3	Vertical	164	2.01	-	28.30	2.41	-
PK	2.4174G	104.61	Inf	-Inf	73.87	3	Vertical	164	2.01	-	28.33	2.41	-
AV	2.4202G	94.74	Inf	-Inf	63.99	3	Vertical	164	2.01	-	28.34	2.41	-
PK	2.4854G	59.56	74.00	-14.44	28.58	3	Vertical	164	2.01	-	28.54	2.44	-
AV	2.4978G	46.66	54.00	-7.34	15.62	3	Vertical	164	2.01	-	28.59	2.45	-



802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2417MHz_TX

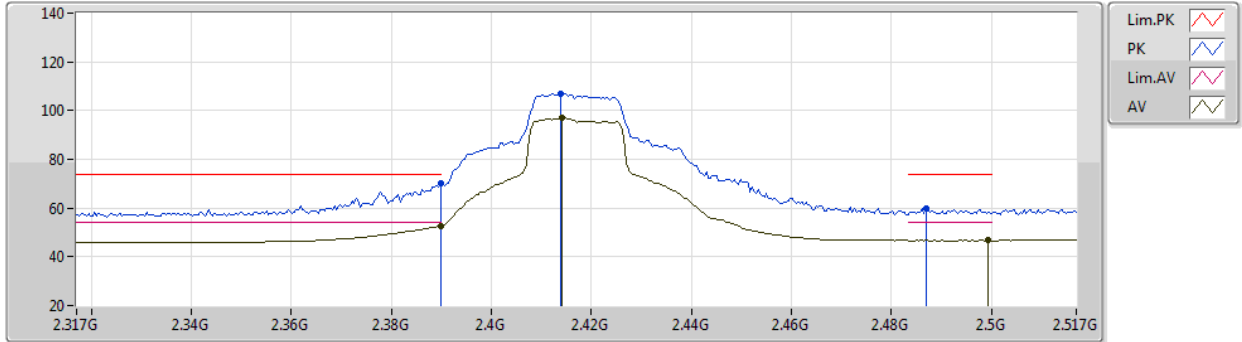


EUT Y_1TX
Setting 50
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3898G	70.06	74.00	-3.94	39.35	3	Horizontal	7	1.08	-	28.30	2.41	-
AV	2.3898G	52.59	54.00	-1.41	21.88	3	Horizontal	7	1.08	-	28.30	2.41	-
PK	2.4138G	106.89	Inf	-Inf	76.15	3	Horizontal	7	1.08	-	28.33	2.41	-
AV	2.4142G	96.94	Inf	-Inf	66.20	3	Horizontal	7	1.08	-	28.33	2.41	-
PK	2.487G	59.99	74.00	-14.01	29.00	3	Horizontal	7	1.08	-	28.55	2.44	-
AV	2.4994G	46.73	54.00	-7.27	15.68	3	Horizontal	7	1.08	-	28.60	2.45	-

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2437MHz_TX

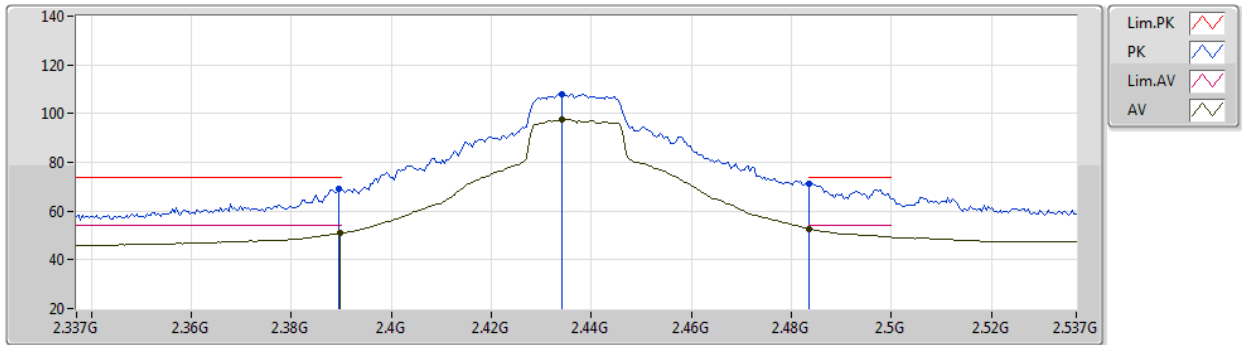


EUT Y_1TX
Setting 58
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3894G	69.19	74.00	-4.81	38.48	3	Vertical	156	2.14	-	28.30	2.41	-
AV	2.3898G	50.88	54.00	-3.12	20.17	3	Vertical	156	2.14	-	28.30	2.41	-
PK	2.4342G	108.07	Inf	-Inf	77.28	3	Vertical	156	2.14	-	28.37	2.42	-
AV	2.4342G	97.62	Inf	-Inf	66.83	3	Vertical	156	2.14	-	28.37	2.42	-
PK	2.4835G	71.32	74.00	-2.68	40.35	3	Vertical	156	2.14	-	28.53	2.44	-
AV	2.4835G	52.77	54.00	-1.23	21.80	3	Vertical	156	2.14	-	28.53	2.44	-

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2437MHz_TX

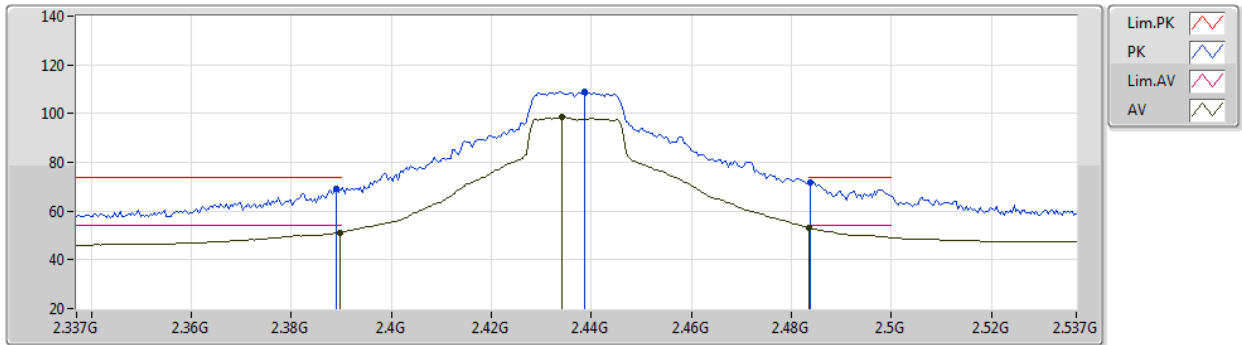


EUT Y_1TX
Setting 58
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.389G	69.08	74.00	-4.92	38.37	3	Horizontal	8	1.02	-	28.30	2.41	-
AV	2.3898G	51.26	54.00	-2.74	20.55	3	Horizontal	8	1.02	-	28.30	2.41	-
PK	2.4386G	108.89	Inf	-Inf	78.09	3	Horizontal	8	1.02	-	28.38	2.42	-
AV	2.4342G	98.50	Inf	-Inf	67.71	3	Horizontal	8	1.02	-	28.37	2.42	-
PK	2.4838G	71.95	74.00	-2.05	40.97	3	Horizontal	8	1.02	-	28.54	2.44	-
AV	2.4835G	52.90	54.00	-1.10	21.93	3	Horizontal	8	1.02	-	28.53	2.44	-

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2437MHz_TX

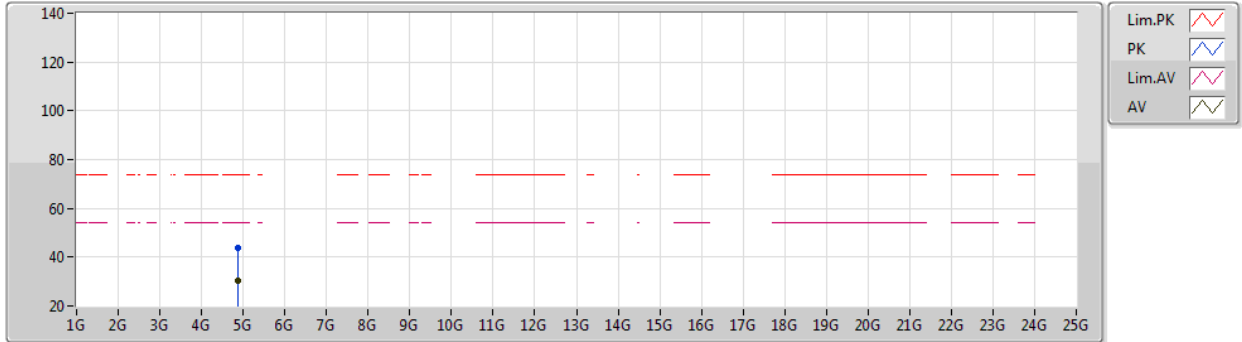


EUT Y_1TX
Setting 58
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87916G	43.87	74.00	-30.13	37.85	3	Vertical	95	1.70	-	33.12	4.70	31.80
AV	4.87404G	30.18	54.00	-23.82	24.17	3	Vertical	95	1.70	-	33.10	4.70	31.79

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2437MHz_TX

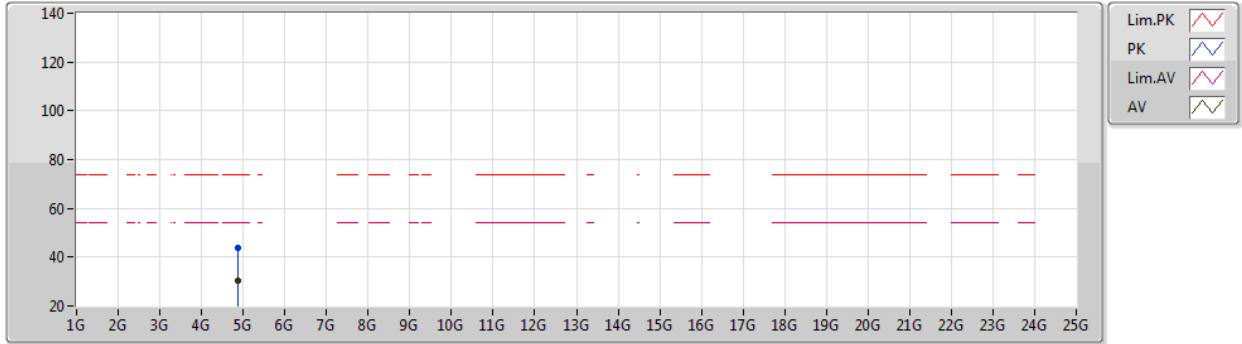


EUT Y_1TX
Setting 58
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.86444G	43.95	74.00	-30.05	37.98	3	Horizontal	211	2.24	-	33.06	4.70	31.79
AV	4.87388G	30.17	54.00	-23.83	24.16	3	Horizontal	211	2.24	-	33.10	4.70	31.79

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2457MHz_TX

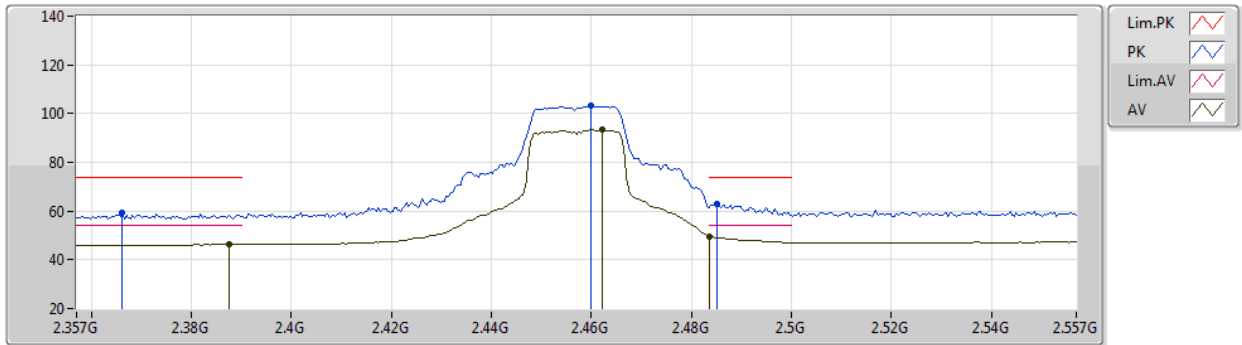


EUT Y_1TX
Setting 48
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3662G	59.07	74.00	-14.93	28.35	3	Vertical	164	1.84	-	28.30	2.42	-
AV	2.3874G	46.27	54.00	-7.73	15.56	3	Vertical	164	1.84	-	28.30	2.41	-
PK	2.4598G	103.05	Inf	-Inf	72.18	3	Vertical	164	1.84	-	28.44	2.43	-
AV	2.4622G	93.29	Inf	-Inf	62.41	3	Vertical	164	1.84	-	28.45	2.43	-
PK	2.485G	63.03	74.00	-10.97	32.05	3	Vertical	164	1.84	-	28.54	2.44	-
AV	2.4835G	49.67	54.00	-4.33	18.70	3	Vertical	164	1.84	-	28.53	2.44	-

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2457MHz_TX

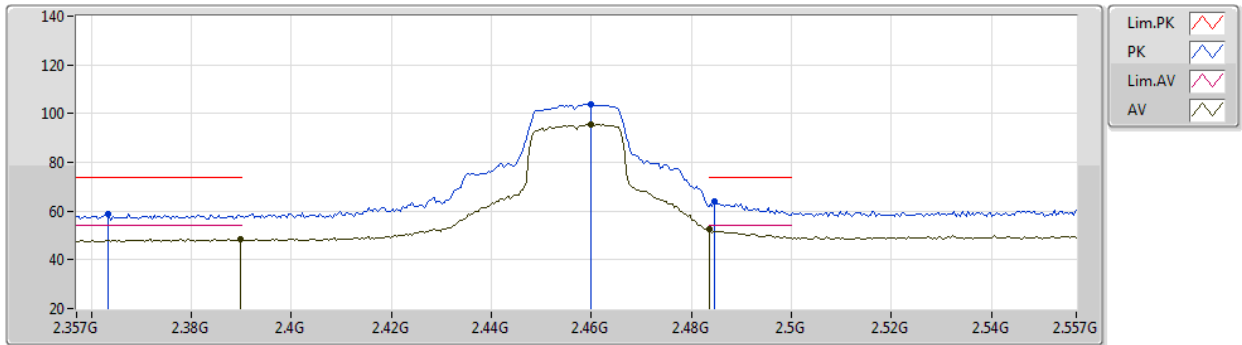


EUT Y_1TX
Setting 48
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3634G	58.83	74.00	-15.17	28.11	3	Horizontal	37	1.15	-	28.30	2.42	-
AV	2.3898G	48.37	54.00	-5.63	17.66	3	Horizontal	37	1.15	-	28.30	2.41	-
PK	2.4598G	103.69	Inf	-Inf	72.82	3	Horizontal	37	1.15	-	28.44	2.43	-
AV	2.4598G	95.42	Inf	-Inf	64.55	3	Horizontal	37	1.15	-	28.44	2.43	-
PK	2.4846G	63.71	74.00	-10.29	32.73	3	Horizontal	37	1.15	-	28.54	2.44	-
AV	2.4835G	52.67	54.00	-1.33	21.70	3	Horizontal	37	1.15	-	28.53	2.44	-

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2462MHz_TX

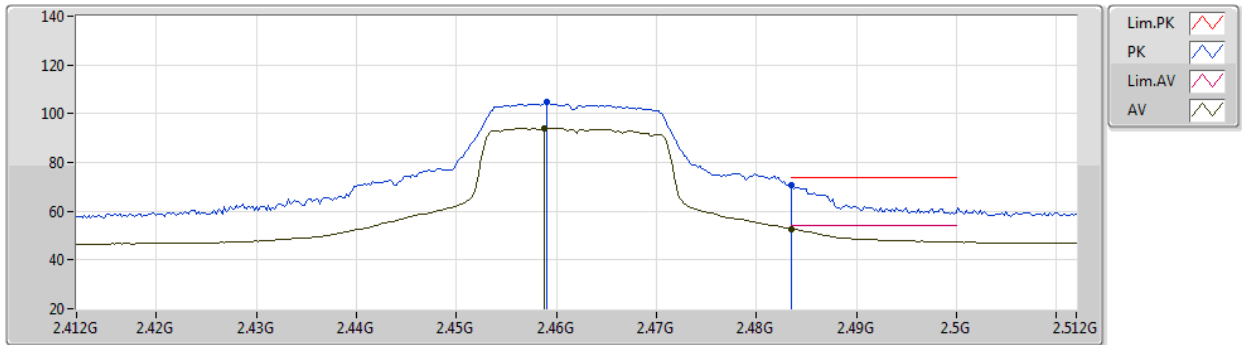


EUT Y_1TX
Setting 41
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.459G	104.59	Inf	-Inf	73.72	3	Vertical	106	2.74	-	28.44	2.43	-
AV	2.4588G	94.12	Inf	-Inf	63.25	3	Vertical	106	2.74	-	28.44	2.43	-
PK	2.4835G	70.54	74.00	-3.46	39.57	3	Vertical	106	2.74	-	28.53	2.44	-
AV	2.4835G	52.84	54.00	-1.16	21.87	3	Vertical	106	2.74	-	28.53	2.44	-

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2462MHz_TX

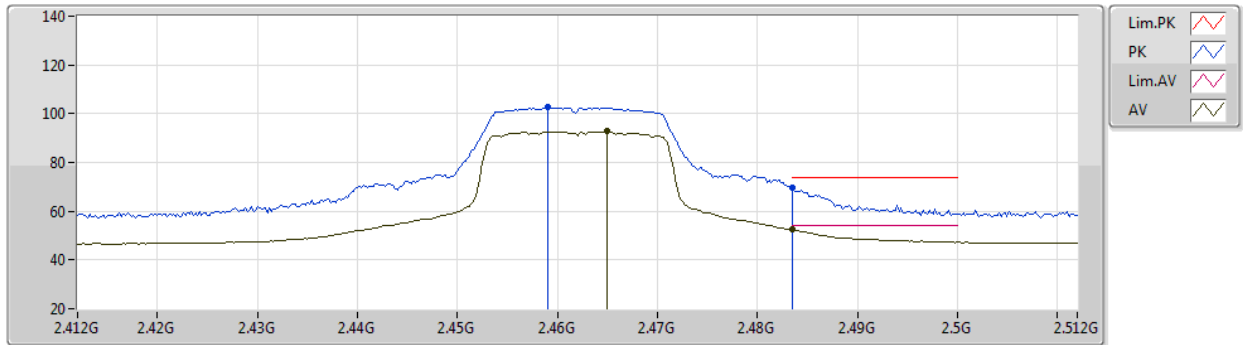


EUT Y_1TX
Setting 41
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.459G	102.93	Inf	-Inf	72.06	3	Horizontal	36	1.15	-	28.44	2.43	-
AV	2.465G	92.70	Inf	-Inf	61.81	3	Horizontal	36	1.15	-	28.46	2.43	-
PK	2.4835G	69.80	74.00	-4.20	38.83	3	Horizontal	36	1.15	-	28.53	2.44	-
AV	2.4835G	52.62	54.00	-1.38	21.65	3	Horizontal	36	1.15	-	28.53	2.44	-

802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2462MHz_TX

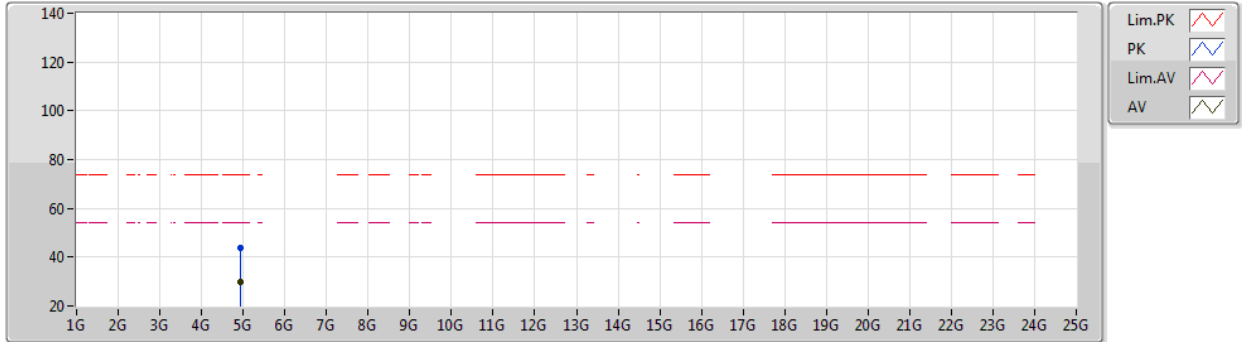

EUT Y_1TX
Setting 41
02-B-S-5


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92656G	43.64	74.00	-30.36	37.55	3	Vertical	9	1.38	-	33.20	4.70	31.81
AV	4.92728G	30.05	54.00	-23.95	23.96	3	Vertical	9	1.38	-	33.20	4.70	31.81



802.11n HT20_Nss1,(MCS0)_1TX

25/03/2021

2462MHz_TX

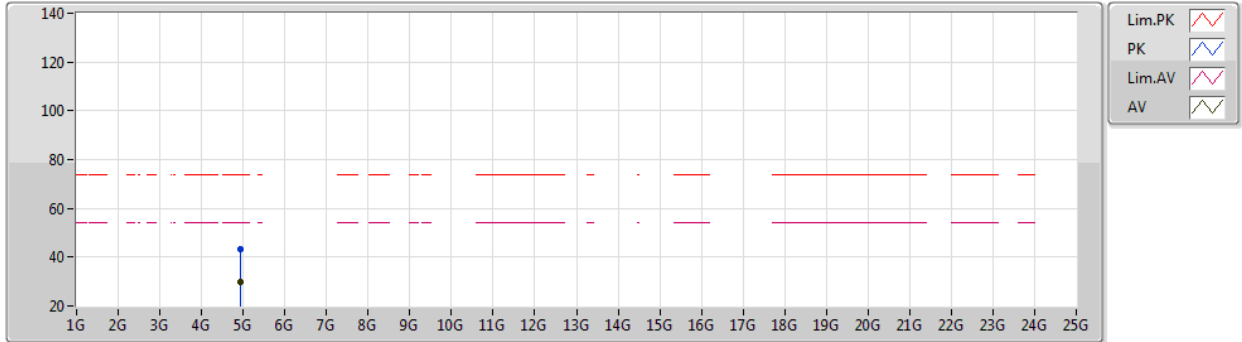


EUT Y_1TX
Setting 41
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.92232G	43.29	74.00	-30.71	37.20	3	Horizontal	64	2.47	-	33.20	4.70	31.81
AV	4.9254G	30.02	54.00	-23.98	23.93	3	Horizontal	64	2.47	-	33.20	4.70	31.81

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2422MHz_TX

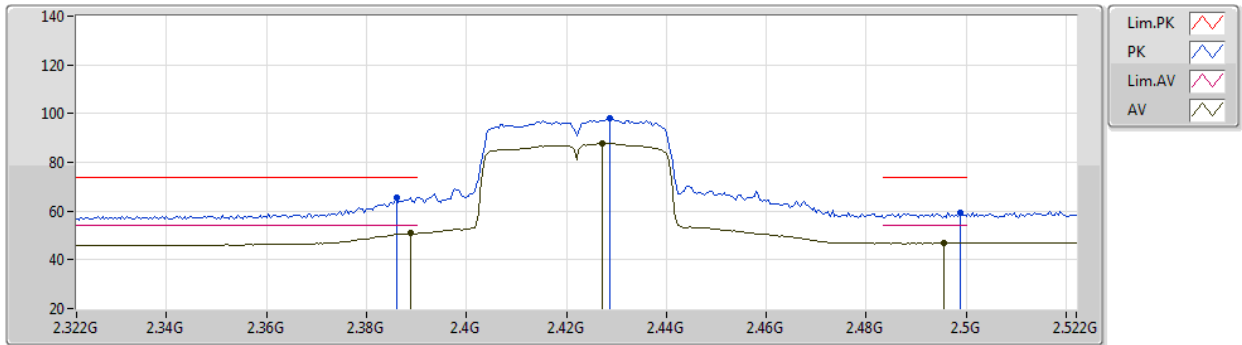


EUT Y_1TX
Setting 37
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.386G	65.50	74.00	-8.50	34.79	3	Vertical	161	2.00	-	28.30	2.41	-
AV	2.3888G	50.90	54.00	-3.10	20.19	3	Vertical	161	2.00	-	28.30	2.41	-
PK	2.4288G	98.33	Inf	-Inf	67.56	3	Vertical	161	2.00	-	28.36	2.41	-
AV	2.4272G	87.74	Inf	-Inf	56.98	3	Vertical	161	2.00	-	28.35	2.41	-
PK	2.4988G	59.54	74.00	-14.46	28.49	3	Vertical	161	2.00	-	28.60	2.45	-
AV	2.4956G	46.91	54.00	-7.09	15.88	3	Vertical	161	2.00	-	28.58	2.45	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2422MHz_TX

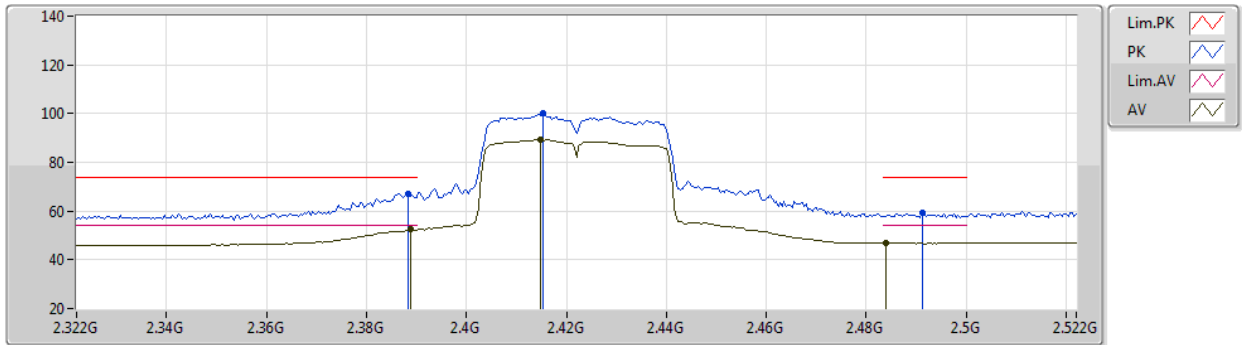


EUT Y_1TX
Setting 37
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3884G	67.28	74.00	-6.72	36.57	3	Horizontal	7	1.09	-	28.30	2.41	-
AV	2.3888G	52.55	54.00	-1.45	21.84	3	Horizontal	7	1.09	-	28.30	2.41	-
PK	2.4152G	100.07	Inf	-Inf	69.33	3	Horizontal	7	1.09	-	28.33	2.41	-
AV	2.4148G	89.22	Inf	-Inf	58.48	3	Horizontal	7	1.09	-	28.33	2.41	-
PK	2.4912G	59.06	74.00	-14.94	28.05	3	Horizontal	7	1.09	-	28.56	2.45	-
AV	2.484G	46.95	54.00	-7.05	15.97	3	Horizontal	7	1.09	-	28.54	2.44	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2422MHz_TX

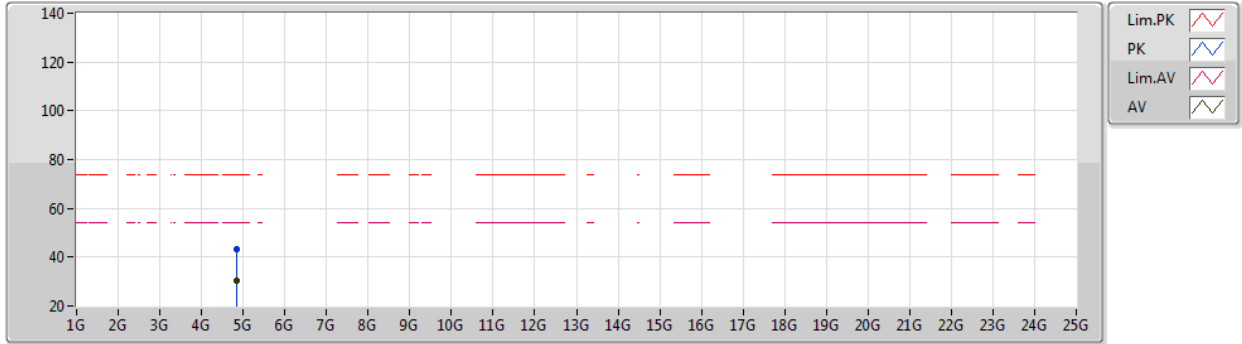


EUT Y_1TX
Setting 37
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.8522G	43.38	74.00	-30.62	37.46	3	Vertical	314	2.70	-	33.01	4.70	31.79
AV	4.84348G	30.23	54.00	-23.77	24.34	3	Vertical	314	2.70	-	32.97	4.70	31.78

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2422MHz_TX

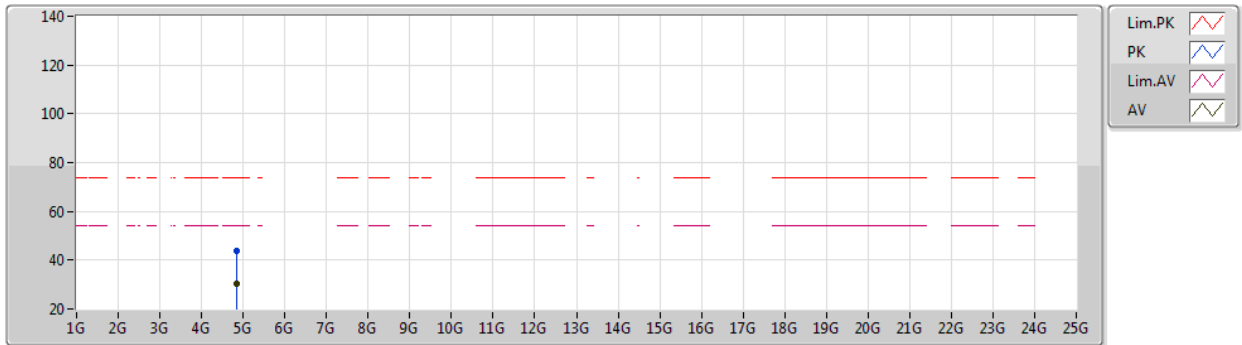


EUT Y_1TX
Setting 37
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.84748G	43.78	74.00	-30.22	37.88	3	Horizontal	335	1.47	-	32.99	4.70	31.79
AV	4.84528G	30.23	54.00	-23.77	24.33	3	Horizontal	335	1.47	-	32.98	4.70	31.78

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2427MHz_TX

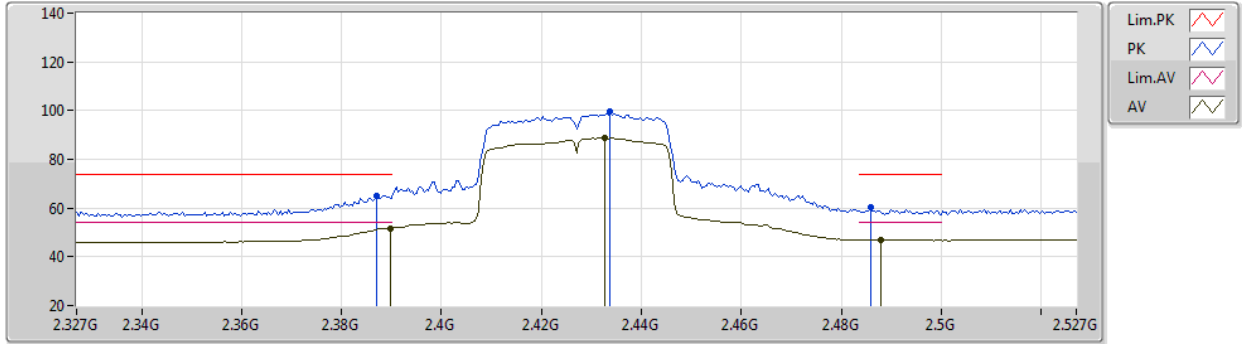


EUT Y_1TX
Setting 39
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.387G	65.07	74.00	-8.93	34.36	3	Vertical	161	1.93	-	28.30	2.41	-
AV	2.3898G	51.78	54.00	-2.22	21.07	3	Vertical	161	1.93	-	28.30	2.41	-
PK	2.4338G	99.43	Inf	-Inf	68.64	3	Vertical	161	1.93	-	28.37	2.42	-
AV	2.4326G	88.68	Inf	-Inf	57.89	3	Vertical	161	1.93	-	28.37	2.42	-
PK	2.4858G	60.50	74.00	-13.50	29.52	3	Vertical	161	1.93	-	28.54	2.44	-
AV	2.4878G	46.85	54.00	-7.15	15.86	3	Vertical	161	1.93	-	28.55	2.44	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2427MHz_TX

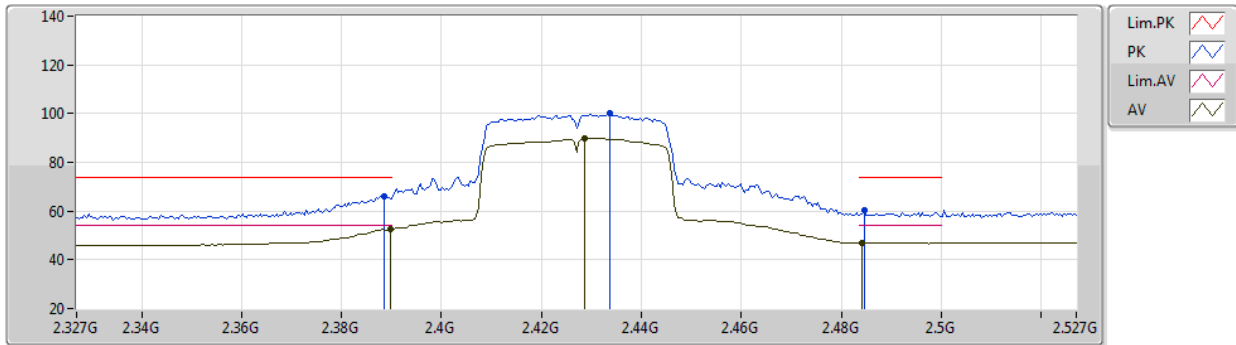


EUT Y_1TX
Setting 39
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3886G	66.03	74.00	-7.97	35.32	3	Horizontal	7	1.20	-	28.30	2.41	-
AV	2.3898G	52.55	54.00	-1.45	21.84	3	Horizontal	7	1.20	-	28.30	2.41	-
PK	2.4338G	100.29	Inf	-Inf	69.50	3	Horizontal	7	1.20	-	28.37	2.42	-
AV	2.4286G	89.93	Inf	-Inf	59.16	3	Horizontal	7	1.20	-	28.36	2.41	-
PK	2.4846G	60.13	74.00	-13.87	29.15	3	Horizontal	7	1.20	-	28.54	2.44	-
AV	2.4842G	46.88	54.00	-7.12	15.90	3	Horizontal	7	1.20	-	28.54	2.44	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2437MHz_TX

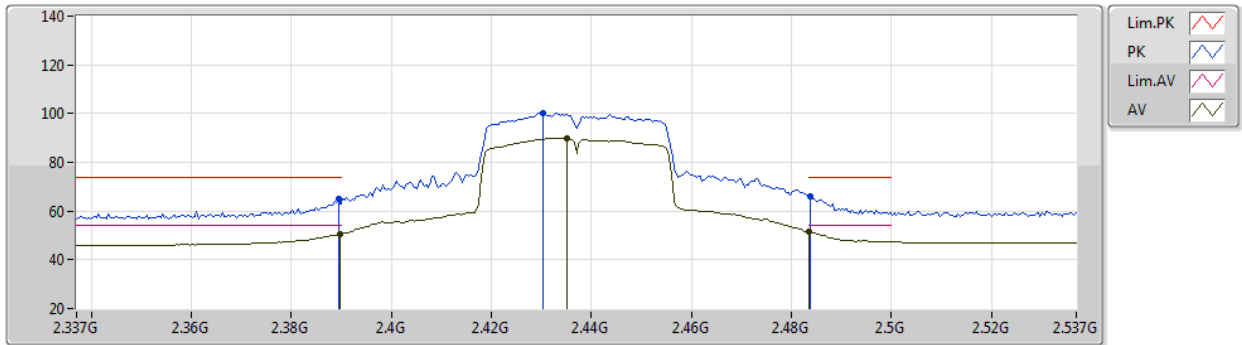

EUT Y_1TX
Setting 42
02-B-S-5


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3894G	64.99	74.00	-9.01	34.28	3	Vertical	157	2.81	-	28.30	2.41	-
AV	2.3898G	50.73	54.00	-3.27	20.02	3	Vertical	157	2.81	-	28.30	2.41	-
PK	2.4302G	100.40	Inf	-Inf	69.62	3	Vertical	157	2.81	-	28.36	2.42	-
AV	2.435G	89.86	Inf	-Inf	59.07	3	Vertical	157	2.81	-	28.37	2.42	-
PK	2.4838G	66.28	74.00	-7.72	35.30	3	Vertical	157	2.81	-	28.54	2.44	-
AV	2.4835G	51.57	54.00	-2.43	20.60	3	Vertical	157	2.81	-	28.53	2.44	-



802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2437MHz_TX

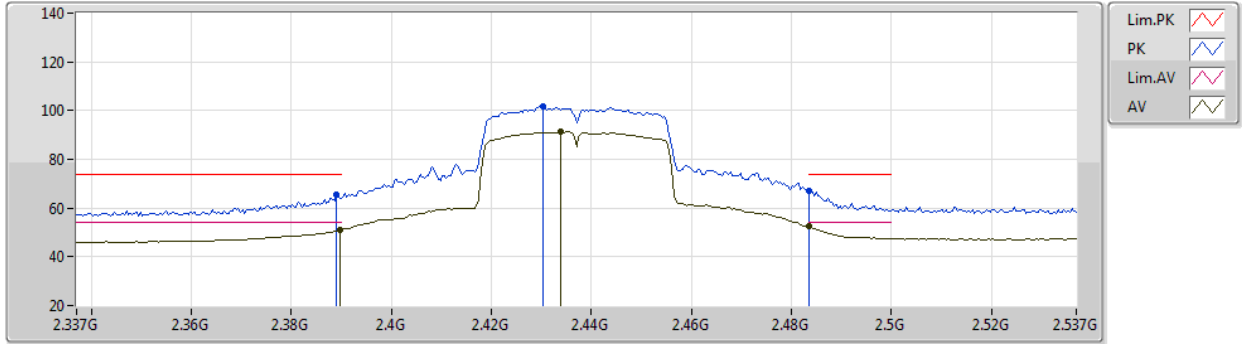


EUT Y_1TX
Setting 42
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.389G	65.52	74.00	-8.48	34.81	3	Horizontal	4	1.04	-	28.30	2.41	-
AV	2.3898G	51.16	54.00	-2.84	20.45	3	Horizontal	4	1.04	-	28.30	2.41	-
PK	2.4302G	101.59	Inf	-Inf	70.81	3	Horizontal	4	1.04	-	28.36	2.42	-
AV	2.4338G	91.21	Inf	-Inf	60.42	3	Horizontal	4	1.04	-	28.37	2.42	-
PK	2.4835G	67.12	74.00	-6.88	36.15	3	Horizontal	4	1.04	-	28.53	2.44	-
AV	2.4835G	52.59	54.00	-1.41	21.62	3	Horizontal	4	1.04	-	28.53	2.44	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2437MHz_TX

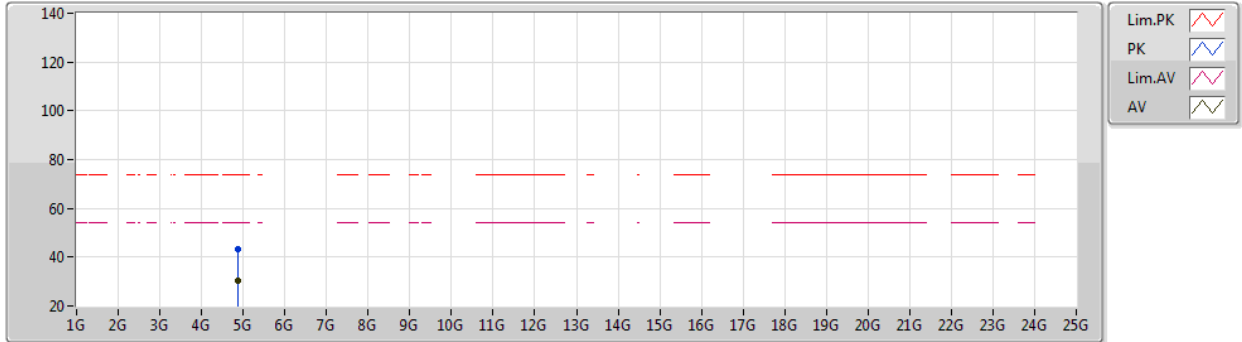


EUT Y_1TX
Setting 42
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.86756G	43.52	74.00	-30.48	37.54	3	Vertical	80	1.32	-	33.07	4.70	31.79
AV	4.87208G	30.20	54.00	-23.80	24.20	3	Vertical	80	1.32	-	33.09	4.70	31.79

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2437MHz_TX

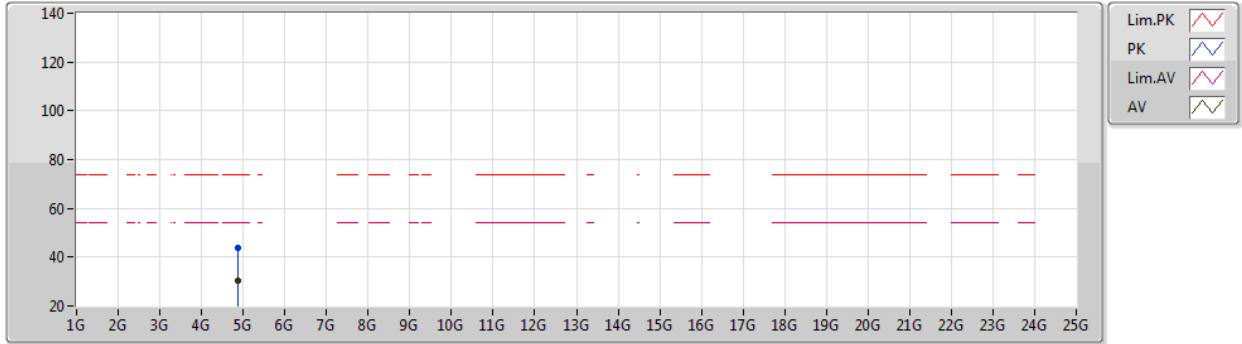


EUT Y_1TX
Setting 42
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.878G	43.78	74.00	-30.22	37.77	3	Horizontal	134	2.53	-	33.11	4.70	31.80
AV	4.87388G	30.20	54.00	-23.80	24.19	3	Horizontal	134	2.53	-	33.10	4.70	31.79

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2447MHz_TX

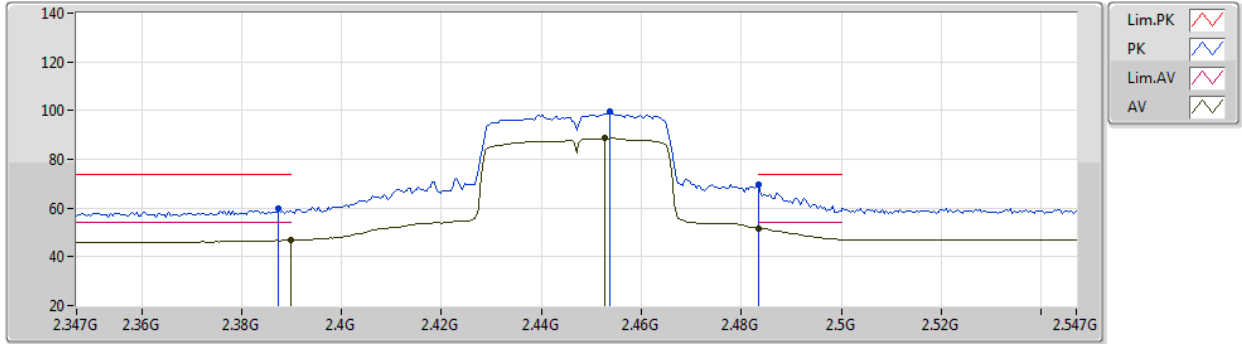


EUT Y_1TX
Setting 38
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3874G	59.79	74.00	-14.21	29.08	3	Vertical	150	2.50	-	28.30	2.41	-
AV	2.3898G	46.80	54.00	-7.20	16.09	3	Vertical	150	2.50	-	28.30	2.41	-
PK	2.4538G	99.46	Inf	-Inf	68.61	3	Vertical	150	2.50	-	28.42	2.43	-
AV	2.4526G	88.62	Inf	-Inf	57.78	3	Vertical	150	2.50	-	28.41	2.43	-
PK	2.4835G	69.45	74.00	-4.55	38.48	3	Vertical	150	2.50	-	28.53	2.44	-
AV	2.4835G	51.66	54.00	-2.34	20.69	3	Vertical	150	2.50	-	28.53	2.44	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2447MHz_TX

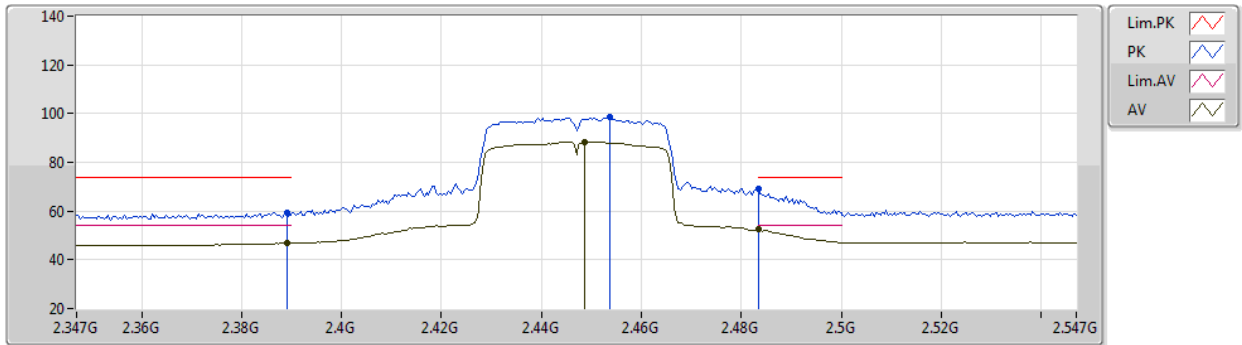


EUT Y_1TX
Setting 38
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.389G	59.34	74.00	-14.66	28.63	3	Horizontal	40	1.55	-	28.30	2.41	-
AV	2.389G	46.75	54.00	-7.25	16.04	3	Horizontal	40	1.55	-	28.30	2.41	-
PK	2.4538G	98.72	Inf	-Inf	67.87	3	Horizontal	40	1.55	-	28.42	2.43	-
AV	2.4486G	88.51	Inf	-Inf	57.69	3	Horizontal	40	1.55	-	28.40	2.42	-
PK	2.4835G	69.32	74.00	-4.68	38.35	3	Horizontal	40	1.55	-	28.53	2.44	-
AV	2.4835G	52.52	54.00	-1.48	21.55	3	Horizontal	40	1.55	-	28.53	2.44	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2452MHz_TX

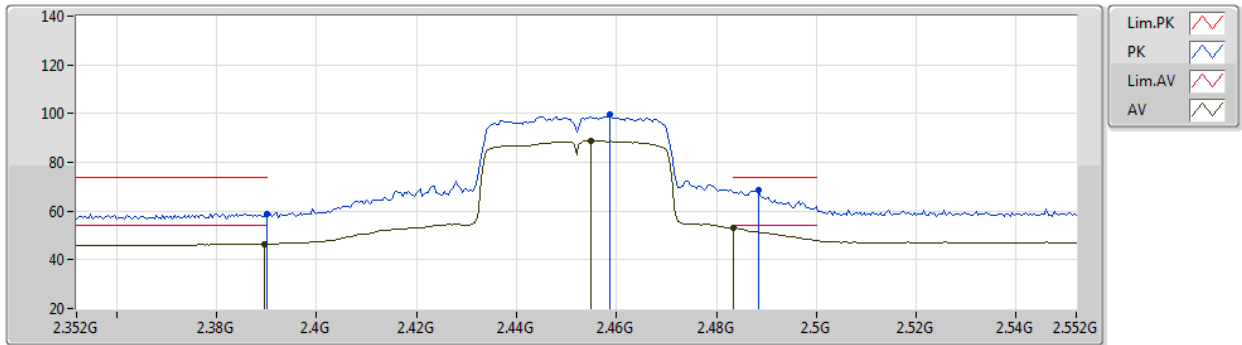


EUT Y_1TX
Setting 37
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	59.00	74.00	-15.00	28.29	3	Vertical	149	2.52	-	28.30	2.41	-
AV	2.3896G	46.62	54.00	-7.38	15.91	3	Vertical	149	2.52	-	28.30	2.41	-
PK	2.4588G	99.46	Inf	-Inf	68.59	3	Vertical	149	2.52	-	28.44	2.43	-
AV	2.4548G	88.73	Inf	-Inf	57.88	3	Vertical	149	2.52	-	28.42	2.43	-
PK	2.4884G	68.40	74.00	-5.60	37.41	3	Vertical	149	2.52	-	28.55	2.44	-
AV	2.4835G	52.98	54.00	-1.02	22.01	3	Vertical	149	2.52	-	28.53	2.44	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2452MHz_TX

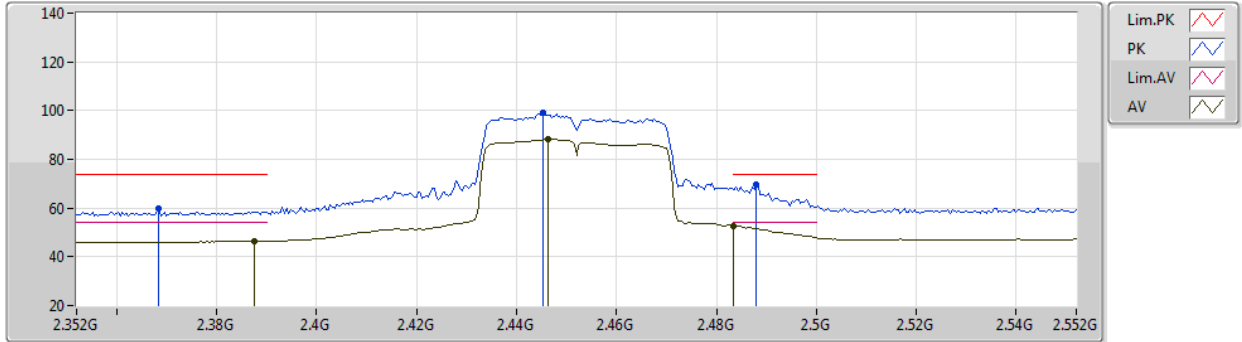


EUT Y_1TX
Setting 37
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3684G	59.73	74.00	-14.27	29.01	3	Horizontal	42	1.74	-	28.30	2.42	-
AV	2.3876G	46.41	54.00	-7.59	15.70	3	Horizontal	42	1.74	-	28.30	2.41	-
PK	2.4452G	99.06	Inf	-Inf	68.25	3	Horizontal	42	1.74	-	28.39	2.42	-
AV	2.4464G	88.29	Inf	-Inf	57.48	3	Horizontal	42	1.74	-	28.39	2.42	-
PK	2.488G	69.57	74.00	-4.43	38.58	3	Horizontal	42	1.74	-	28.55	2.44	-
AV	2.4835G	52.66	54.00	-1.34	21.69	3	Horizontal	42	1.74	-	28.53	2.44	-

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2452MHz_TX

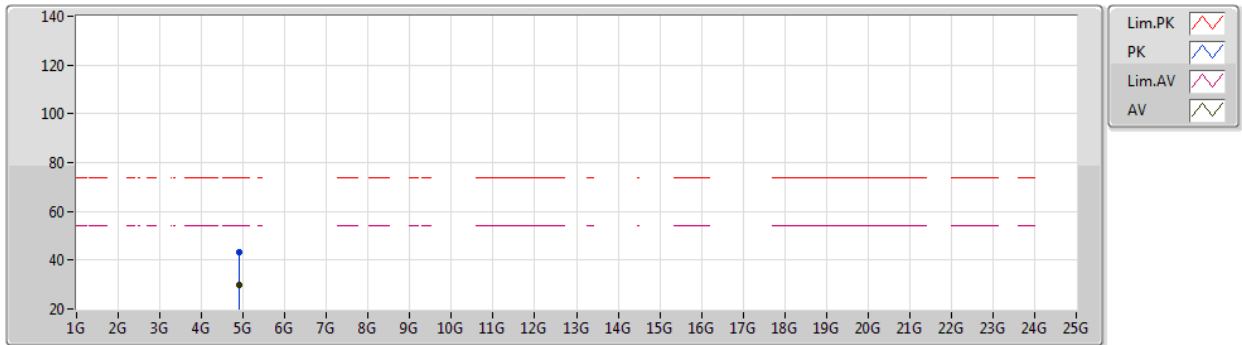


EUT Y_1TX
Setting 37
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.89984G	43.16	74.00	-30.84	37.06	3	Vertical	131	2.84	-	33.20	4.70	31.80
AV	4.89648G	29.64	54.00	-24.36	23.55	3	Vertical	131	2.84	-	33.19	4.70	31.80

802.11n HT40_Nss1,(MCS0)_1TX

25/03/2021

2452MHz_TX

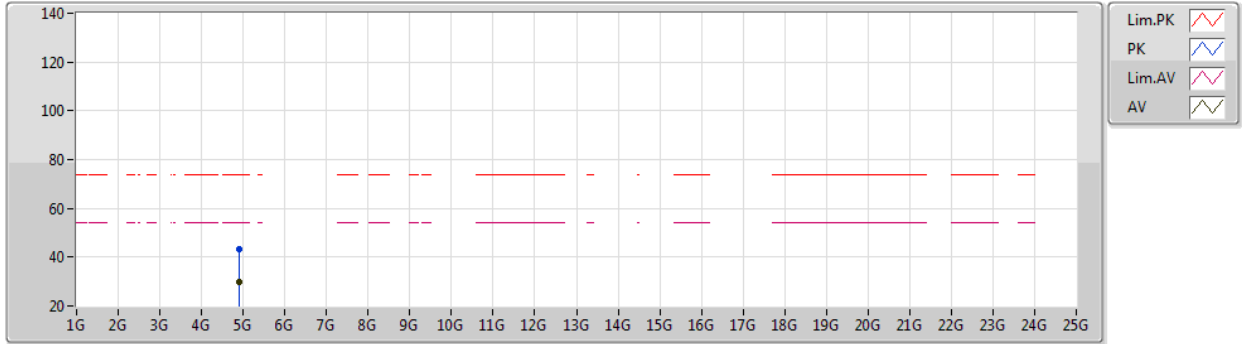

EUT Y_1TX
Setting 37
02-B-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.90468G	43.12	74.00	-30.88	37.03	3	Horizontal	324	1.72	-	33.20	4.70	31.81
AV	4.8946G	29.69	54.00	-24.31	23.61	3	Horizontal	324	1.72	-	33.18	4.70	31.80