

Electromagnetic Emission

F C C M E A S U R E M E N T R E P O R T

CERTIFICATION OF COMPLIANCE

FCC Part 15 Certification Measurement

PRODUCT : Self-Guard
MODEL/TYPE NO : SG-2000 / NA
FCC ID : TN9SG-2000
APPLICANT : STARNEX Co., Ltd.
C&C Bldg, 4th, 228-2, Gui-Dong,
Kwangjin-Ku, Seoul, Korea
Attn. :Hyun-Ja Park / General Manager
Manufacturer : Same as applicant
FCC CLASSIFICATION : Class B personal computers and peripherals
FCC RULE PART(S) : FCC Part 15 Subpart B
FCC PROCEDURE : Certification
TRADE NAME : Self-Guard
TEST REPORT No. : E05.0923.FCC.588N
DATES OF TEST : July 07~September 23, 2005
DATES OF ISSUE : September 23, 2005
TEST LABORATORY : ETL Inc. (FCC Registration Number : 95422)
#584 Sangwhal-ri, Kanam-myon, Yoju-kun, Kyounggi-do,
469-885, Korea
Tel : (031) 885-0072 Fax : (031) 885-0074

This Self-Guard, Model SG-2000 has been tested in accordance with the measurement procedures specified in ANSI C63.4-2001 at the ETL/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B:

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Hyung Seok, Lee / Chief Engineer

ETL Inc.

**#584 Sangwhal-ri, Kanam-myon, Yoju-kun,
Kyounggi-do, 469-885, Korea**



Table of Contents

FCC Measurement Report

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
 - 5.1 Summary of Test Results**
 - 5.2 Conducted Emissions Measurement**
 - 5.3 Radiated Emissions Measurement**
- 6. Sample Calculation**
- 7. List of test Equipment used for Measurement**

Appendix A. FCC ID Label and Location

Appendix B. Test Setup Photographs

Appendix C. External Photographs

Appendix D. Internal Photographs

Appendix E. Block Diagram

Appendix F. User Manual

Scope – *Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)*

General Information

Applicant Name: STARNEX Co., LTD.

Address : C&C Bldg, 4th, 228-2, Gui-Dong,
Kwangjin-gu, Seoul, Korea

Attention : Hyun-Ja Park / General Manager

- **EUT Type :** Self-Guard
- **Model Number :** SG-2000
- **FCC ID :** TN9SG-2000
- **S/N :** N/A
- **FCC Rule Part(s) :** FCC Part 15 Subpart B
- **Test Procedure :** ANSI C63.4-2001
- **FCC Classification :** Class B personal computers and peripherals
- **Dates of Tests :** July 07~September 23, 2005
ETL Inc.
EMC Testing Lab. (FCC Registration Number : 95422)
- **Place of Tests :** 584, Sangwhal-Ri, Kanam-Myun, Yoju-Kun,
Kyounggi-Do, Korea
Tel : (031) 885-0072 Fax : (031) 885-0074
- **Test Report No. :** E05.0923.FCC.588N

1. INTRODUCTION

The measurement test for radiated and conducted emission test were conducted at the open area test site of E-RAE Testing Laboratory Inc. facility located at 584, Sangwhal-ri, Ganam-myun, Youju-kun, Kyoungki-do, Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-2001 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 and 10 meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2001 and registered to the Federal Communications Commission(Registration Number : 95422).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-2001) was used in determining radiated and conducted emissions from the STARNEX CO., LTD. Model : SG-2000

2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test(EUT) is the STARNEX CO., LTD. Self-Guard, SG-2000.

2.2 General Specification

| SECTION | | DESCRIPTION | REMARKS |
|--|----------|---|--|
| Internal Storage Device | | Built-In Flash memory: 128 MB (up to 1 GB) | |
| Memory Expansion | | Flash Memory Card: 128MB – 1GB | RS-MMC |
| Extensive Storage Device & Data Backup | | USB Memory Stick, USB HDD | |
| Camera | Built-In | 1 CCD Color (up to 2EA) | 307,200 pixels |
| | External | NTSC/PAL (4EA) | |
| Recording Resolution | NTSC/PAL | up to 640 x 480 | pixels |
| Display Speed | NTSC/PAL | 25 fps | |
| Recording Speed | NTSC/PAL | 12 fps | @240 x 240 pixels |
| Light Sensitivity (Built-In Color Camera) | | 1 Lux <u>under@f1.2</u> | CCD |
| Audio Input/Output | | 2 Built-In Microphones and 1 Speaker, 1 Audio Input | Audio Detection |
| TV(A/V) Output | | Built-In Color LCD, Monitor(NTSC/PAL) | 1.8 Inch 128x160 pixels |
| Search(Playback) | | Date/Time, Motion, Sensor | |
| Compression Method | | Optimized Algorithm for Security | |
| Storage Capacity | | High Quality (1-2 days) Medium Quality (2-5 days) Low Quality (5-10 days) | 128MB, @1fps, 240x240pixels (Indoor Use) |
| Display | | Date/Time/Frame | |
| Lens (Built-In Color Camera) | | Angle(56 Degrees), Unlimited Focus | Pin-Hole Lens |
| Motion Detection | | Digital Image Processing, External Signal Input(PIR Sensor Etc.) | |
| Remote Access | | LAN | |
| Wireless Communication | | Bluetooth | |
| Source of Power | | Rechargeable Li- Polymer Battery (3.7VDC, 1400mAh), Adaptor (5V DC, 2A) | |
| Recording Time (Battery) | | Normal Mode (4.5 hours) Power Saving Mode (up to 24 hours) Ultra Power Saving Mode (up to 3 days) | |
| Dimensions: 85(W) x 55(H) x22(D) mm 3.34(W) x 2.16(H) x 0.86(D) inch Operating Temperature: -10 °C to + 50 °C (14°F to 122 °F) | | Weight(Including Battery) : 116g(4.09oz) Humidity: Under 80% | |

3. DESCRIPTION OF TESTS

3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with § 12.2 in ANSI C63.4-2001 "Measurement of Information Technology Equipment". The measurement was performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω/50 uH LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

- Procedure of Test

The line-conducted facility is located inside a shielded room 1 m X 1.5 m wooden table 80 cm high is placed 40 cm away from the vertical wall and 1.5 m away from the side wall of the shielded room. Ground of two EMCO 3825/2 LISNs are bonded to the reference horizontal ground. The EUT is powered from the EMCO LISN and the support equipment is powered from the other EMCO LISN. Power to the LISNs is filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the EMCO LISN. Non-inductive bundling to a 1m length shortened all interconnecting cables more than 1m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the ESHS30 EMI Test Receiver to determine the frequency producing the max. emission from the EUT. The frequency producing the max. level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

3. DESCRIPTION OF TESTS

3.2 Radiated Emission Measurement

Radiated emission measurements were in accordance with § 12.2 in ANSI C63.4-2001 "Measurement of Information Technology Equipment". The measurements were performed over the frequency range of 30 MHz to 1 GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Quasi-peak" within a bandwidth of 120 kHz.

- Procedure of Test

Preliminary measurements were made at 3 meter using broadband antennas, and spectrum analyzer to determined the frequency producing the max. emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000 MHz using SchwarzBeck Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 10-meters. The test equipment was placed on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

4. TEST CONDITION

4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

4.2 EUT operation

| Operating Mode | The worst operating condition |
|-----------------------------|-------------------------------|
| Stand-by Mode | X |
| Camera Image Recording Mode | O |

O : Worst case investigated during the Test

4.3 Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

EUT – Self-Guard

FCC ID : TN9SG-2000
Model Name : SG-2000
Serial No. : N/A
Manufacturer : STARNEX CO., LTD.
Power Supply Type : Rechargeable Li- Polymer Battery, AC/DC Adaptor
Power Cord : Non-Shielded, Detachable, 1.5 m
Data Cable : Video In, TV Out Cable, Sensor Cable, Lan Cable, USB Cable

Support Unit 1 – Personal computer

FCC ID : N/A
Model Name : DHM
Serial No. : G9MB71S
Manufacturer : Dell Asia Pacific Sdn.
Power Supply Type : Switching(EUT)
Power Cord : Non-Shielded: 1.5 m
Data Port : RGB IN:1, Parallel:1, RS-232:1, PS/2: 2, USB: 2,
: Audio in:1, Audio out:1, MIC IN:1

Support Unit 2 – Keyboard (Chicony Electronics)

FCC ID : N/A (DoC)
Model Name : KB-9963
Serial No. : B26960GBUKO13F
Manufacturer : Chicony Electronics
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Shielded, 1.5m

Support Unit 3 – Mouse (LOGITECH)

| | |
|-------------------|-----------------------|
| FCC ID | : DZL211029 |
| Model Name | : M-S34 |
| Serial No. | : LNA10212779 |
| Manufacturer | : LOGITECH |
| Power Supply Type | : N/A |
| Power Cord | : N/A |
| Data Cable | : None-Shielded, 1.2m |

Support Unit 4 – Serial Mouse (N/A)

| | |
|-------------------|------------------|
| FCC ID | : JKGMUS5S01 |
| Model Name | : MUS5S |
| Serial No. | : N/A |
| Manufacturer | : N/A |
| Power Supply Type | : N/A |
| Power Cord | : N/A |
| Data Cable | : Shielded, 1.2m |

Support Unit 5 – USB Mouse (N/A)

| | |
|-------------------|-----------------------|
| FCC ID | : N/A |
| Model Name | : HL898W |
| Serial No. | : HL08011839 |
| Manufacturer | : N/A |
| Power Supply Type | : N/A |
| Power Cord | : N/A |
| Data Cable | : None-Shielded, 1.2m |

Support Unit 6 – LCD Monitor (E-RAE)

| | |
|-------------------|--|
| FCC ID | : N/A |
| Model Name | : ELM-150B |
| Serial No. | : N/A |
| Manufacturer | : E-RAE Electronics Industry Co., Ltd. |
| Power Supply Type | : AC 110V~220V |
| Power Cord | : Non-Shield, 1.5m |
| Data Cable | : Shielded, 1.5m |

Support Unit 7 – EAR MIC (JETECH)

| | |
|-------------------|------------------|
| FCC ID | : N/A |
| Model Name | : JE101 |
| Serial No. | : N/A |
| Manufacturer | : JETECH |
| Power Supply Type | : N/A |
| Power Cord | : N/A |
| Data Cable | : Shielded, 1.5m |

Support Unit 8 – Camera 1 (COMOS)

| | |
|-------------------|--------------------|
| FCC ID | : N/A |
| Model Name | : VK250 |
| Serial No. | : N/A |
| Manufacturer | : COMOS |
| Power Supply Type | : DC 12V |
| Power Cord | : Non-Shield, 1.5m |
| Data Cable | : Shielded, 1.5m |

Support Unit 9 – Camera 2

| | |
|-------------------|--------------------|
| FCC ID | : N/A |
| Model Name | : N/A |
| Serial No. | : N/A |
| Manufacturer | : N/A |
| Power Supply Type | : DC 12V |
| Power Cord | : Non-Shield, 1.5m |
| Data Cable | : Shielded, 1.5m |

Support Unit 10 – Camera 3

| | |
|-------------------|--------------------|
| FCC ID | : N/A |
| Model Name | : N/A |
| Serial No. | : N/A |
| Manufacturer | : N/A |
| Power Supply Type | : DC 12V |
| Power Cord | : Non-Shield, 1.5m |
| Data Cable | : Shielded, 1.5m |

Support Unit 11 – Camera 4

| | |
|-------------------|--------------------|
| FCC ID | : N/A |
| Model Name | : N/A |
| Serial No. | : N/A |
| Manufacturer | : N/A |
| Power Supply Type | : DC 12V |
| Power Cord | : Non-Shield, 1.5m |
| Data Cable | : Shielded, 1.5m |

5. TEST RESULTS

5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

| Test Rule Parts | Measurement Required | Result |
|-----------------|---------------------------------|-------------------|
| 15.107 | Conducted Emissions Measurement | Passed by 13.4 dB |
| 15.109 | Radiated Emissions Measurement | Passed by 3.54 dB |

The data collected shows that the **STARNEX CO., LTD. Self-Guard, SG-2000** complies with technical requirements of above rules part 15.107 and 15.109 Class B Limits and CISPR Publication 22.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

5. TEST RESULTS

5.2 Conducted Emissions Measurement

| | |
|------------------------------|---|
| EUT | Self-Guard / SG-2000 |
| Limit apply to | FCC Part 15. 107 |
| Test Date | September 07, 2005 |
| Operating Condition | Camera Image Recording Mode |
| Environment Condition | Humidity Level : 44 %RH, Temperature : 23 |
| Result | Passed by 13.4 dB |

Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of hot and neutral line.

Detector mode: CISPR Quasi-Peak mode (6dB Bandwidth : 9 kHz)

| Frequency [MHz] | Reading [dB μ V] | | Phase [*H/**V] | Limit [dB μ V] | | Margin [dB] | |
|--------------------|-------------------------|---------|-----------------------|-----------------------|---------|----------------|---------|
| | Quasi-peak | Average | | Quasi-peak | Average | Quasi-peak | Average |
| 0.150 | 50.00 | | N | 66.00 | | 16.00 | |
| 0.163 | 48.90 | | H | 65.30 | | 16.40 | |
| 0.235 | 45.90 | | H | 62.20 | | 16.30 | |
| 0.996 | 42.60 | | H | 56.00 | | 13.40 | |
| 1.880 | 42.60 | | N | 56.00 | | 13.40 | |
| 2.502 | 41.70 | | N | 56.00 | | 14.30 | |
| 5.494 | 42.50 | | N | 60.00 | | 17.50 | |
| 6.424 | 37.80 | | N | 60.00 | | 22.20 | |
| 13.252 | 37.50 | | H | 60.00 | | 22.50 | |

NOTES :


1. * H : HOT Line , **N : Neutral Line
2. Margin value = Limit – Reading
3. Measurement were performed at the AC/DC Adapter in the frequency band of 150 kHz ~ 30 MHz according to the CISPR 22 Class B
4. If the Reading Quasi-Peak value is below the Average Limit, Do not test Average Mode.




Test Engineer: K. K. Yoon

5. TEST RESULTS

Line: HOT Line

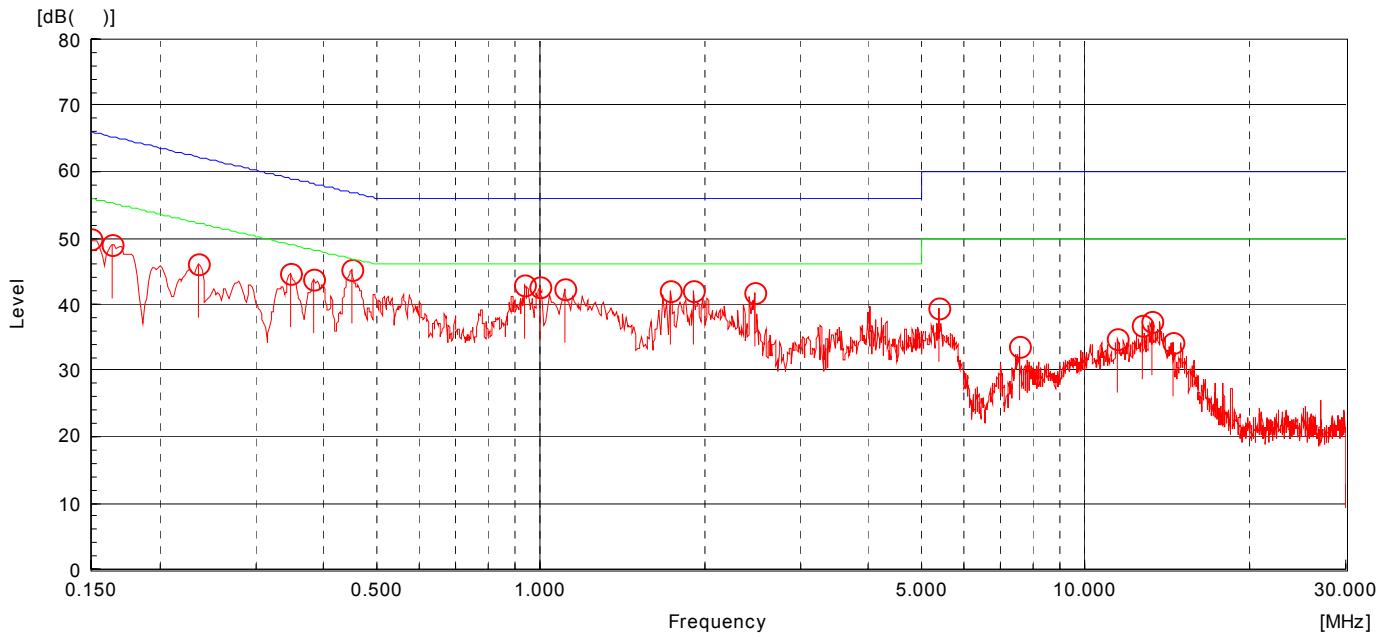

Line: Neutral Line

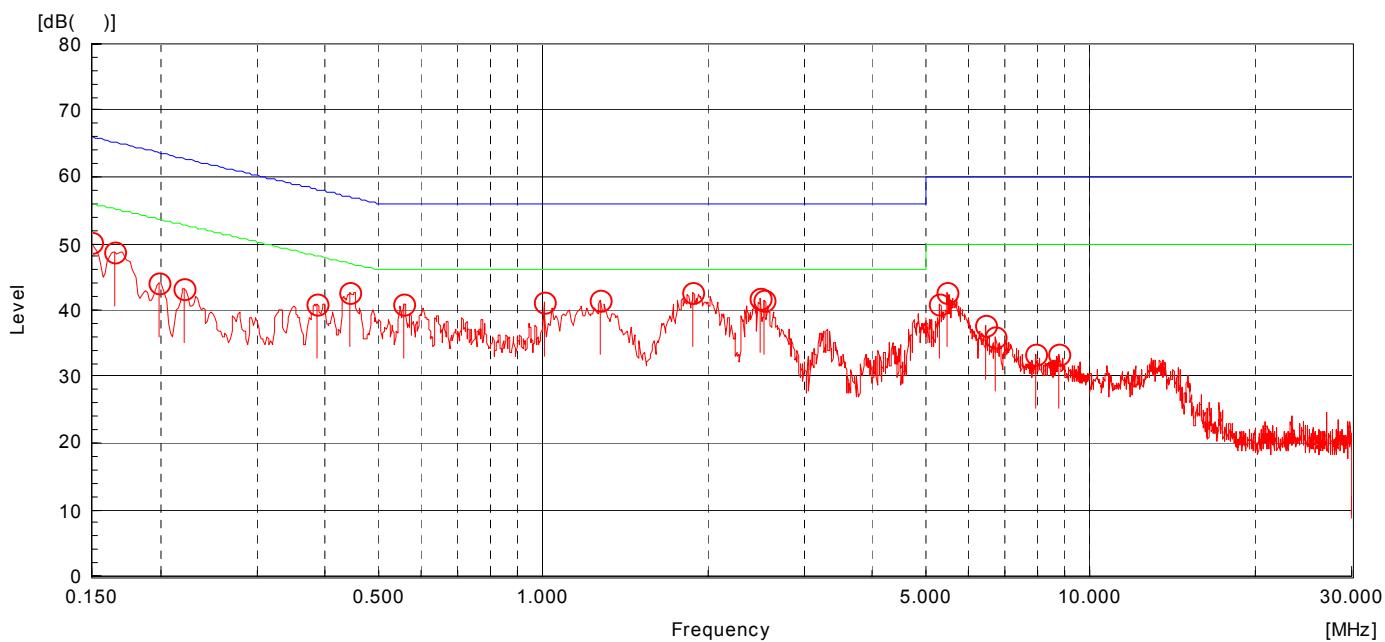

5. TEST RESULTS

5.3 Radiated Emissions Measurement

| | |
|------------------------------|---|
| EUT | Self-Guard / SG-2000 |
| Limit apply to | FCC Part 15. 109(CISPR 22) |
| Test Date | September 07, 2005 |
| Operating Condition | Camera Image Recording Mode |
| Environment Condition | Humidity Level : 44 %RH, Temperature : 23 |
| Result | Passed by 3.54 dB |

Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Detector mode: CISPR Quasi-Peak mode (6dB Bandwidth: 120 kHz)

| Frequency [MHz] | Reading [dB μ V] | Polarization [*H/**V] | Ant.Factor [dB/m] | Cable Loss [dB] | Result [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------------------|-----------------------|-------------------|-----------------|-----------------------|----------------------|-------------|
| 60.72 | 12.51 | V | 8.58 | 2.11 | 23.20 | 30.00 | 6.80 |
| 134.99 | 8.02 | V | 11.49 | 3.32 | 22.84 | 30.00 | 7.16 |
| 166.35 | 7.60 | V | 11.26 | 3.76 | 22.62 | 30.00 | 7.38 |
| 188.84 | 10.02 | V | 9.82 | 3.94 | 23.78 | 30.00 | 6.22 |
| 199.75 | 9.28 | V | 9.53 | 4.00 | 22.81 | 30.00 | 7.19 |
| 216.11 | 10.19 | V | 10.04 | 4.40 | 24.64 | 30.00 | 5.36 |
| 298.61 | 13.27 | V | 12.75 | 5.49 | 31.51 | 37.00 | 5.49 |
| 323.72 | 8.89 | H | 13.21 | 5.78 | 27.89 | 37.00 | 9.11 |
| 405.00 | 8.54 | H | 14.60 | 6.66 | 29.80 | 37.00 | 7.20 |
| 459.00 | 9.15 | H | 16.04 | 7.27 | 32.46 | 37.00 | 4.54 |
| 539.94 | 5.76 | H | 17.84 | 8.24 | 31.84 | 37.00 | 5.16 |
| 648.00 | 4.51 | H | 19.67 | 9.28 | 33.46 | 37.00 | 3.54 |

NOTES :

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. The measurement was performed for the frequency range 30 MHz ~ 1000 MHz according to the CISPR 22 Class B



Test Engineer: K.K . Yoon

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V) = 20 \log_{10} (\mu V) : \text{Equation 1}$$

$$dB\mu V = dBm + 107 : \text{Equation 2}$$

Example : @ 648.00 MHz

$$\text{Class B Limit} = 37 \text{ dB } \mu V/m$$

$$\text{Reading} = 4.51 \text{ dB } \mu V$$

$$\text{Antenna Factor + Cable Loss} = 19.67 + 9.28 = 28.95 \text{ dB } \mu V/m$$

$$\text{Total} = 33.46 \text{ dB } \mu V/m$$

$$\text{Margin} = 37 - 33.46 = 3.54 \text{ dB}$$

= 3.54 dB below Limit

7. List of test equipments used for measurements

| Test Equipment | | Model | Mfg. | Serial No. | Cal. Due Date |
|-------------------------------------|-------------------------|------------|-----------------|-------------|---------------|
| <input type="checkbox"/> | Spectrum Analyzer | E7401A | H.P | US39110107 | 06-04-07 |
| <input type="checkbox"/> | Spectrum Analyzer | R3261A | Advantest | 21720033 | 05-10-26 |
| <input checked="" type="checkbox"/> | Receiver | ESVS 10 | R & S | 835165/001 | 06-04-07 |
| <input checked="" type="checkbox"/> | EMI TEST Receiver | ESHS30 | Rohde & Schwarz | 840190/002 | 2005.10.18 |
| <input type="checkbox"/> | Preamplifier | HP 8347A | HP | 2834A00544 | 06-04-07 |
| <input checked="" type="checkbox"/> | LISN | 3825/2 | EMCO | 9006-1669 | 06-04-06 |
| <input checked="" type="checkbox"/> | LISN | 3825/2 | EMCO | 9208-1995 | 06-04-07 |
| <input type="checkbox"/> | TriLog Antenna | VULB9160 | Schwarz Beck | 3082 | 06-07-27 |
| <input checked="" type="checkbox"/> | LogBicon Antenna | VULB9165 | Schwarz Beck | 2023 | 06-07-05 |
| <input type="checkbox"/> | Dipole Antenna | VHAP | Schwarz Beck | 964 | 06-06-24 |
| <input type="checkbox"/> | Dipole Antenna | VHAP | Schwarz Beck | 965 | 06-07-05 |
| <input type="checkbox"/> | Dipole Antenna | UHAP | Schwarz Beck | 949 | 06-06-24 |
| <input type="checkbox"/> | Dipole Antenna | UHAP | Schwarz Beck | 950 | 06-07-05 |
| <input type="checkbox"/> | Broad band Horn Antenna | BBHA 9120D | Schwarz Beck | 227 | 06-04-04 |
| <input checked="" type="checkbox"/> | Turn-Table | DETT-03 | Daeil EMC | - | N/A |
| <input checked="" type="checkbox"/> | Antenna Master | DEAM-03 | Daeil EMC | - | N/A |
| <input type="checkbox"/> | Plotter | 7440A | H.P | 2725A 75722 | N/A |
| <input type="checkbox"/> | Chamber | DTEC01 | DAETONG | - | N/A |
| <input type="checkbox"/> | Thermo Hygrograph | 3-3122 | ISUZU | 3312201 | 06-04-07 |
| <input type="checkbox"/> | BaroMeter | - | Regulus | - | 06-03-15 |