



M. Flom Associates, Inc.

International Compliance Testing Laboratory

3356 N. San Marcos Place, Suite 107
Chandler, AZ 85225

toll-free: (866) 311-3268
fax: (480) 926-3598

<http://www.mflom.com>
info@mflom.com

Date: September 20, 2005

Federal Communications Commission
Via Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: FinePoint Innovations, Inc.
Equipment: Pen Device
FCC ID: TNA-MPP800
FCC Rules: 15.209

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

Michael Schafer, President

enclosure(s)
cc: Applicant
MS/del



Transmitter Certification

of

FCC ID: TNA-MPP800

Model:

to

Federal Communications Commission

Rule Part 15.209, Confidentiality

Date of report: September 20, 2005

On the Behalf of the Applicant:

FinePoint Innovations, Inc.

At the Request of:

P.O. Deposit Check #4567

FinePoint Innovations, Inc.
15220 South 50th Street, Suite 105
Phoenix, AZ 85044

Attention of:

Stephen R. Caldwell, President
602-325-2083; Fax: 602-325-2081
Email: scaldwell@fpi2.com

Supervised by:

David E. Lee, Compliance Test Manager



List Of Exhibits

(FCC Certification (Transmitters) - Revised 9/28/98)

Applicant: FinePoint Innovations, Inc.

FCC ID: TNA-MPP800

By Applicant:

1. Letter Of Authorization
2. Identification Drawings
Label
Location of Label
Compliance Statement
3. Documentation: 2.1033(B)
 - (3) User Manual
 - (4) Operational Description
 - (5) Block Diagram
 - (5) Schematic Diagram
 - (7) Photographs
Active Devices

By M.F.A. Inc.

A. TESTIMONIAL & STATEMENT OF CERTIFICATION

The Applicant has been cautioned as to the following:

15.21 Information to User.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) Special Accessories.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.



Table Of Contents

Rule	Description	Page
	Test Report	2
2.1033(c)	General Information Required	3
	Standard Test Conditions and Engineering Practices	6
2.1053(a), 15.209	Field Strength of Radiation	7

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a)

Test Report

b) Laboratory:
(FCC: 31040/SIT)
(Canada: IC 2044)

M. Flom Associates, Inc.
3356 N. San Marcos Place, Suite 107
Chandler, AZ 85225

c) Report Number:

d0590056

d) Client:

FinePoint Innovations, Inc.
15220 South 50th Street, Suite 105
Phoenix, AZ 85044

e) Identification:

FCC ID: TNA-MPP800

Description:

f) EUT Condition:

Not required unless specified in individual tests.

g) Report Date:
EUT Received:

September 20, 2005

h, j, k):

As indicated in individual tests.

i) Sampling method:

No sampling procedure used.

l) Uncertainty:

In accordance with MFA internal quality manual.

m) Supervised by:



David E. Lee, Compliance Test Manager

n) Results:

The results presented in this report relate only to the item tested.

o) Reproduction:

This report must not be reproduced, except in full, without written permission from this laboratory.



List Of General Information Required For Certification

In Accordance With FCC Rules And Regulations,
Volume II, Part 2 and to 15.209

Sub-part 2.1033

(c)(1): **Name and Address of Applicant:**

FinePoint Innovations, Inc.
15220 South 50th Street, Suite 105
Phoenix, AZ 85044

Manufacturer:

Applicant

(c)(2): **FCC ID:** TNA-MPP800

Model Number: MPP800

(c)(3): **Instruction Manual(s):**

Please See Attached Exhibits

(c)(4): **Type of Emission:** OOK

(c)(5): **Frequency Range, MHz:** 0.500

(c)(6): **Power Rating:** 23.04 uV/m @ 30m
____ Switchable ____ Variable N/A

(c)(7): **Maximum Power Rating, W:** 48 uV/m @ 30m

15.203: **Antenna Requirement:**

- The antenna is permanently attached to the EUT
- The antenna uses a unique coupling
- The EUT must be professionally installed
- The antenna requirement does not apply



Subpart 2.1033 (continued)

(c)(8): Voltages & currents in all elements in final RF stage, including final transistor or solid state device:

Collector Current, A	= 0.0001
Collector Voltage, Vdc	= 1.5
Supply Voltage, Vdc	= 1.5

(c)(9): Tune-Up Procedure:

Please See Attached Exhibits

(c)(10): Circuit Diagram/Circuit Description:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

Please See Attached Exhibits

(c)(11): Label Information:

Please See Attached Exhibits

(c)(12): Photographs:

Please See Attached Exhibits

(c)(13): Digital Modulation Description:

 ATTACHED EXHIBITS
 x N/A

(c)(14): Test and Measurement Data:

Follows

Sub-part

2.1033(b):

Test And Measurement Data

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.1031, 2.1033, 2.1035, 2.1041, 2.1043, 2.1045, and the following individual Parts:

<input checked="" type="checkbox"/>	15.209	Radiated emission limits; general requirements
<input type="checkbox"/>	15.211	Tunnel radio systems
<input type="checkbox"/>	15.213	Cable locating equipment
<input type="checkbox"/>	15.214	Cordless telephones
<input type="checkbox"/>	15.217	Operation in the band 160-190 kHz
<input type="checkbox"/>	15.219	Operation in the band 510-1705 kHz
<input type="checkbox"/>	15.221	Operation in the band 525-1705 kHz (leaky coax)
<input type="checkbox"/>	15.223	Operation in the band 1.705-10 MHz
<input type="checkbox"/>	15.225	Operation in the band 13.553-13.567 MHz
<input type="checkbox"/>	15.227	Operation in the band 26-27.28 MHz (remote control)
<input type="checkbox"/>	15.229	Operation in the band 40.66-40.70 MHz
<input type="checkbox"/>	15.231	Periodic operation in the band 40.66-40.70 MHz and above 70 MHz
<input type="checkbox"/>	15.233	Operation within the bands 43.71-44.49, 46.60-46.98 MHz 48.75-49.51 MHz and 49.66-50.0 MHz
<input type="checkbox"/>	15.235	Operation within the band 49.82-49.90 MHz
<input type="checkbox"/>	15.237	Operation within the bands 72.0-73.0 MHz, 74.6-74.8 MHz and 75.2-76.0 MHz (auditory assistance)
<input type="checkbox"/>	15.239	Operation in band 88-108 MHz
<input type="checkbox"/>	15.241	Operation in the band 174-216 MHz (biomedical)
<input type="checkbox"/>	15.243	Operation in the band 890-940 MHz (materials)
<input type="checkbox"/>	15.245	Operation within the bands 902-928 MHz, 2435-2465 MHz, 5785-5815 MHz, 10500-10550 MHz, and 24075-24175 MHz (filed disturbance sensors)
<input type="checkbox"/>	15.247	Operation within bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz (spread spectrum)
<input type="checkbox"/>	15.249	Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0- 24.25 GHz
<input type="checkbox"/>	15.251	Operation within the bands 2.9-3.26 GHz, 3.267-3.332 GHz, 3.339-3.3458 GHz, and 3.358- 3.6 GHz (vehicle identification systems)
<input type="checkbox"/>	15.321	Specific requirements for asynchronous devices operating in the 1910-1920 MHz and 2390- 2400 MHz bands (Unlicensed PCS)
<input type="checkbox"/>	15.323	Specific requirements for isochronous devices operating in the 1920-1930 MHz sub-band (Unlicensed PCS)



Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.



A2LA

"A2LA has accredited M. Flom Associates, Inc. Chandler, AZ for technical competence in the field of Electrical Testing. The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC 17025 - 1999 'General Requirements for the Competence of Testing and Calibration Laboratories' and any additional program requirements in the identified field of testing."

Certificate Number: **2152-01**

Name of Test: Field Strength of Radiation

Specification: 47 CFR 2.1053(a)
Limit 15.209


Guide: ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917

Measurement Procedure

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.


1.2.12.2 Method of Measurement

- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth 100 kHz (<1 GHZ), 1 MHZ (> 1GHz).
 - 2) Video Bandwidth = 3 times Resolution Bandwidth, or 30 kHz (22.917)
 - 3) Sweep Speed \leq 2000 Hz/second
 - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

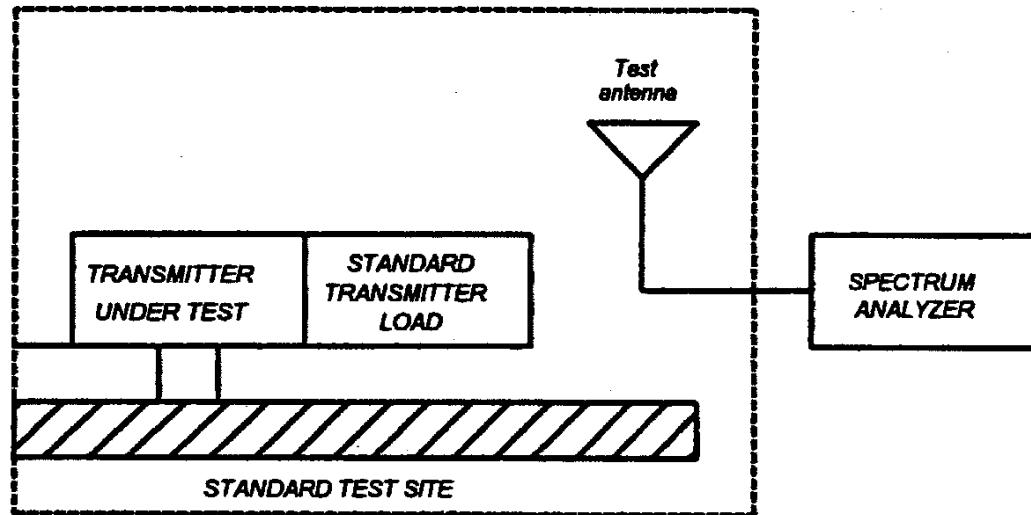

Name of Test: Field Strength of Radiation (Cont.)

- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to \pm the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

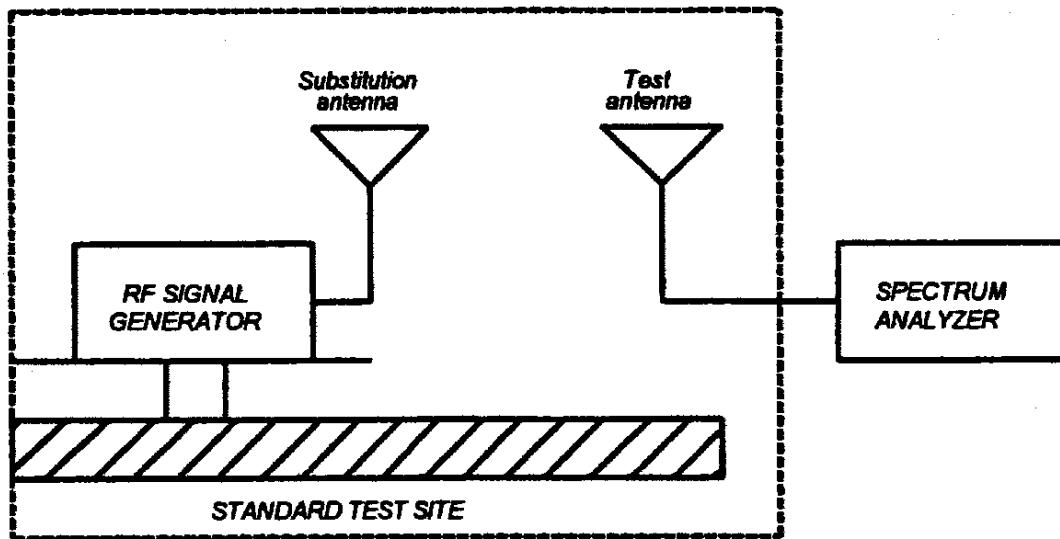

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.



Name of Test: Field Strength of Radiation (Cont.)

J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.

K) Repeat step J) with both antennas vertically polarized for each spurious frequency.

L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.

M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =

$$10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step I)}$$

Note: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment:

Asset (as applicable)	Description	s/n	Cycle Per ANSI C63.4-1992/2000 Draft, 10.1.4	Last Cal
Transducer				
X i00079	Singer 94593-1 Loop	0219	24 mo.	Jun-05
X i00088	EMCO 3109-B 25MHz-300MHz	2336	24 mo.	Sep-03
i00065	EMCO 3301-B Active Monopole	2635	24 mo.	Sep-03
X i00089	Aprel 2001 200MHz-1GHz	001500	24 mo.	Sep-03
X i00103	EMCO 3115 1GHz-18GHz	9208-3925	24 mo.	Jan-04
Amplifier				
i00028	HP 8449A	2749A00121	12 mo.	May-05
Spectrum Analyzer				
i00029	HP 8563E	3213A00104	12 mo.	May-05
i00033	HP 85462A	3625A00357	12 mo.	Oct-04
i00048	HP 8566B	2511AD1467	12 mo.	Jun-05

Test Setup:

Radiated Emissions



Name of Test: Field Strength of Radiation (Fundamental & Harmonics)

g0590075: 2005-Sep-15 Thu 15:56:00

State: 1:Low Power

Limit $15.209 = 24000/494 = 48\mu\text{V}/\text{m}$ @ 30m

Frequency Tuned, MHz	Frequency Emission, MHz	Meter, dBuV	CF, dB	$\mu\text{V}/\text{m}$ @ 30m	ERP, dBm	Margin, dB
0.500000	0.494686	12.57	P 14.68	23.04	-79.7	-6.5
0.500000	0.988621	-8.60	P 12.75	1.61	-102.8	-23.6
0.500000	1.486154	-6.77	P 12.74	1.99	-101.0	-18.2
0.500000	1.975094	-4.77	P 12.77	2.51	-98.9	-21.5
0.500000	2.471063	-1.77	P 5.84	1.60	-102.9	-25.4
0.500000	2.961200	-5.43	P 5.15	0.97	-107.2	-29.8
0.500000	3.472604	-13.10	P 4.50	0.37	-115.5	-38.1
0.500000	3.948573	-4.93	P 3.96	0.89	-107.9	-30.5
0.500000	4.451408	-12.77	P 3.66	0.35	-116.0	-38.6
0.500000	4.938611	-7.27	P 3.42	0.64	-110.8	-33.4
0.500000	5.431081	-5.77	P 3.21	0.74	-109.5	-32.1

(P: Peak reading, A: Average reading)

Digital Scan
47 CFR 15.109(a) Class B Radiated Limits

Frequency of Emission, MHz	Field Strength, $\mu\text{V}/\text{m}$ @ 3m
30 - 88	100
88 - 216	150
216 - 960	200
Above 960	500

g0590076: 2005-Sep-20 Tue 06:40:00

State: 0:General

Frequency Emission, MHz	Level, dBuV	@ m	C.F., dB	$\mu\text{V}/\text{m}$	@ m	Margin, dB
35.000000	16.16	3	11.37	23.80	3	-12.5
36.620000	8.56	3	11.69	10.29	3	-19.8
44.240000	19.87	3	12.40	41.07	3	-7.7
45.350000	9.54	3	12.39	12.49	3	-18.1
55.312500	18.15	3	10.89	28.31	3	-11.0
75.520000	14.01	3	7.29	11.61	3	-18.7
112.690000	10.43	3	10.72	11.42	3	-22.4
115.295000	11.59	3	10.90	13.32	3	-21.0
116.600000	7.09	3	10.99	8.02	3	-25.4
143.730000	13.29	3	12.07	18.54	3	-18.1
145.050000	9.17	3	12.11	11.59	3	-22.2
164.230000	14.89	3	12.13	22.44	3	-16.5
175.050000	10.83	3	12.10	14.01	3	-20.6
212.980000	18.17	3	14.66	43.80	3	-10.7
215.665000	9.48	3	14.82	16.41	3	-19.2
234.999675	8.88	3	15.87	17.28	3	-21.3
235.305000	10.08	3	15.88	19.86	3	-20.0
245.001363	11.88	3	16.40	25.94	3	-17.7
245.720000	18.25	3	16.43	54.20	3	-11.3

Frequency Emission, MHz	Level, dBuV	@ m	C.F., dB	µV/m	@ m	Margin, dB
254.999963	12.81	3	17.68	33.46	3	-15.5
274.999600	11.95	3	21.47	46.88	3	-12.6
284.998475	6.67	3	23.28	31.44	3	-16.1
285.001200	10.78	3	23.28	50.47	3	-11.9
294.999738	9.58	3	25.05	53.89	3	-11.4
295.000063	11.86	3	25.05	70.06	3	-9.1
306.530000	17.45	3	15.43	44.06	3	-13.1
323.550000	9.27	3	15.81	17.95	3	-20.9
335.830000	16.80	3	16.09	44.11	3	-13.1
337.260000	13.22	3	16.13	29.34	3	-16.7
356.350000	17.65	3	16.57	51.40	3	-11.8
370.380000	13.84	3	16.88	34.36	3	-15.3
382.930000	8.57	3	17.15	19.32	3	-20.3
395.830000	12.50	3	17.41	31.30	3	-16.1
412.000000	10.64	3	17.70	26.12	3	-17.7
425.930000	6.35	3	17.93	16.37	3	-21.7
445.280000	12.83	3	18.25	35.81	3	-14.9
458.580000	10.38	3	18.44	27.61	3	-17.2
500.380000	18.97	3	19.00	79.16	3	-8.0
540.260000	9.99	3	21.29	36.64	3	-14.7
551.930000	11.56	3	21.95	47.37	3	-12.5
612.930000	9.76	3	25.01	54.76	3	-11.2
630.780000	10.36	3	25.27	60.46	3	-10.4
688.860000	8.94	3	26.23	57.35	3	-10.8
712.730000	11.11	3	26.25	73.79	3	-8.6
743.850000	13.65	3	25.86	94.51	3	-6.5
779.450000	11.95	3	25.38	73.54	3	-8.7
818.580000	10.78	3	25.30	63.68	3	-9.9
837.550000	11.19	3	25.50	68.31	3	-9.3
903.430000	13.69	3	26.25	99.31	3	-6.1
921.250000	8.15	3	26.91	56.62	3	-10.9
950.130000	11.44	3	27.97	93.43	3	-6.6
952.380000	11.79	3	28.05	98.17	3	-6.2

All other emissions in the required measurement range were more than 20 dB below the required limits.



Performed By:

Fred Chastain, Test Technician

END OF TEST REPORT

**Radiated Measurements
For Part 15 Transmitters W/ Integral Antennas**

Radiated Measurements

Range Of Measurement	Specification	Resolution B/W	Video B/A
30 to 1000 MHz	CISPR	≥ 100 kHz	≥ 100 kHz
>1000 MHz (if averaging)	FCC, 15.37(b)	1 MHz	≥ 1 MHz
	FCC, 15.37(b)	1 MHz	10 Hz

Measuring Equipment

a. **Antennas:**

EMCO 3109	20 - 300 MHz
APREL AALP2001	200 - 1000 MHz
APREL AAB20200	20 - 200 MHz
APREL AAH118	1 - 18 GHz

b. **Instruments:**

HP8566B	Spectrum Analyzer
HP85685A	Preselector, w/ preamp below 2 GHz
HP85650A	Quasi Peak Adapter
HP8449	Preamp, above 2 GHz

All test instrumentation is calibrated as indicated in individual tests. In addition, all test instrumentation is calibrated daily, or as required by the manufacturer.

Occupied Bandwidth

Occupied Bandwidth is measured as a radiated signal without attenuators and/or filter. RBW, VBW and scan settings as shown were set to produce a meaningful result in accordance with ANSI C63.4, Section 13.1.7.

Part 15.21, Information to User

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly avoided by the party responsible for compliance could void the user's authority to operate the equipment.



§ 15.205 Restricted Bands of Operation

(a) Except as shown in paragraph (b) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.25
0.495-0.505	16.69475-16.69625	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-339.4	3600-4400	
13.36-13.41			

Testimonial
And
Statement Of Certification

This is to certify that:

1. **That** the application was prepared either by, or under the direct supervision of, the undersigned.
2. **That** the technical data supplied with the application was taken under my direction and supervision.
3. **That** the data was obtained on representative units, randomly selected.
4. **That**, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.



Certifying Engineer:

David E. Lee, Quality Assurance Manager