

FCC TEST REPORT
for
LAYON International Electronic & Telecom Co., Ltd
Bluetooth Mono Headset
Model No.: BH023RT

Prepared for : LAYON International Electronic & Telecom Co., Ltd
Address : No. 32, BaoHeRoad, NanZhou Street, GuangZhou 510288,
China

Prepared By : Shenzhen Anbotech Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road,
Nanshan District, Shenzhen, Guangdong, Chin
Tel: (86) 755-26066544
Fax: (86) 755-26014772

Report Number : 201307678F
Date of Test : Jul. 02~ 16, 2013
Date of Report : Jul. 18, 2013

TABLE OF CONTENTS

Description

Page

Test Report

1. GENERAL INFORMATION	5
1.1 Description of Device (EUT).....	5
1.2 Auxiliary Equipment Used during Test.....	6
1.3 Description of Test Facility	6
1.4 Measurement Uncertainty.....	6
2. TEST PROCEDURE	7
3. CONDUCTED LIMITS	8
3.1 Block Diagram of Test Setup	8
3.2 Power Line Conducted Emission Measurement Limits (15.207).....	8
3.3 Configuration of EUT on Measurement	8
3.4 Operating Condition of EUT	9
3.5 Test Procedure	9
3.6 Power Line Conducted Emission Measurement Results	9
4. RADIATION INTERFERENCE.....	10
4.1 Requirements (15.247, 15.209):	10
4.2 Test Procedure	10
4.3 Test Results.....	10
5. CHANNEL SEPARATION TEST	14
5.1 Measurement Procedure	14
5.2 Test SET-UP	14
5.3 Test Equipment.....	14
5.4 Test Results.....	14
6. 20DB BANDWIDTH TEST	18
6.1 Measurement Procedure	18
6.2 Test SET-UP	18
6.3 Test Equipment.....	18
6.4 Test Results.....	18
7. QUANTITY OF HOPPING CHANNEL TEST.....	22
7.1 Measurement Procedure	22
7.2 Test SET-UP	22
7.3 Test Equipment.....	22
7.4 Test Results.....	22
8. DWELL TIME TEST	24
8.1 Measurement Procedure	24
8.2 Test SET-UP	24
8.3 Test Equipment.....	24
8.4 Test Results.....	24
9. MAXIMUM PEAK OUTPUT POWER TEST	27
9.1 Measurement Procedure	27

9.2 Test SET-UP	27
9.3 Test Equipment.....	27
9.4 Test Results.....	28
10. BAND EDGE TEST.....	32
10.1 Measurement Procedure	32
10.2 Test SET-UP	32
10.3 Test Equipment.....	32
10.4 Test Results.....	32
11. ANTENNA APPLICATION.....	36
11.1 Antenna requirement	36
11.2 Result.....	36
12. PHOTOGRAPH.....	37
12.1 Photo of Radiation Emission Test	37

APPENDIX I (External Photos) (2 Pages)

APPENDIX II (Internal Photos) (2 Pages)

TEST REPORT

Applicant : LAYON International Electronic & Telecom Co., Ltd
Manufacturer : LAYON International Electronic & Telecom Co., Ltd
EUT : Bluetooth Mono Headset
Model No. : BH023RT
Serial No. : N/A
Rating : DC 3.7V, 50mAH
Trade Mark : U&I

Measurement Procedure Used:

FCC Part15 Subpart C, Paragraph 15.207, 15.247 & 15.209

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.


This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Jul. 02~ 16, 2013


Prepared by :


(Tested Engineer / Rock Zeng)

Reviewer :


(Project Manager / Sally Zhang)

Approved & Authorized Signer :

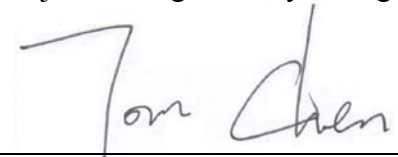
(Manager / Tom Chen)

1. GENERAL INFORMATION

1.1 Description of Device (EUT)

EUT : Bluetooth Mono Headset

Model Number : BH023RT

Test Power Supply : DC 12V

Charger : Manufacturer: LAYON
Model: TX018
Input: DC 12-24V
Output: DC 5.0V, 100mA

Frequency : 2402~2480MHz

Antenna Specification : Printed Antenna:0dBi

Modulation : GFSK, $\pi/4$ DQPSK, 8DPSK

Applicant : LAYON International Electronic & Telecom Co., Ltd
Address : No. 32, BaoHeRoad, NanZhou Street, GuangZhou 510288, China

Manufacturer : LAYON International Electronic & Telecom Co., Ltd
Address : No. 32, BaoHeRoad, NanZhou Street, GuangZhou, China

Factory : LAYON International Electronic & Telecom Co., Ltd
Address : No. 32, BaoHeRoad, NanZhou Street, GuangZhou, China

Date of receiver : Jul. 02, 2013

Date of Test : Jul. 02~ 16, 2013

1.2 Auxiliary Equipment Used during Test

N/A

1.3 Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS - LAB Code: L3503

Shenzhen Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

FCC-Registration No.: 752021

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, Jul. 10, 2013.

IC-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A-1, Feb. 22, 2013.

Test Location

All Emissions tests were performed at

Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, Chin

1.4 Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3dB

Conduction Uncertainty : Uc = 3.4dB

2. Test Procedure

GENERAL: This report shall NOT be reproduced except in full without the written approval of Shenzhen Anbotek Compliance Laboratory Limited. The EUT was transmitting a test signal during the testing.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-2009 using a spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz up to 1.0GHz and 1.0MHz with a video BW of 3.0MHz above 1.0GHz. The ambient temperature of the EUT was 74.3oF with a humidity of 69%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS
20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.4-2009 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

3. Conducted Limits


Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Two-Line V-network	Rohde & Schwarz	ENV216	10055	Apr. 23, 2013	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Apr. 23, 2013	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Apr. 23, 2013	1 Year

Conduction Uncertainty : $U_c = 3.4\text{dB}$

3.1 Block Diagram of Test Setup

3.1.1. Block diagram of connection between the EUT and simulators

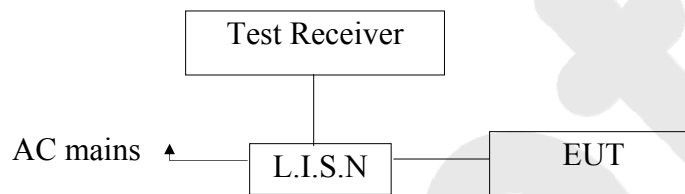

3.2 Power Line Conducted Emission Measurement Limits (15.207)

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

3.3 Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

EUT : Bluetooth Mono Headset
Model Number : BH023RT
Applicant : LAYON International Electronic & Telecom Co., Ltd

3.4 Operating Condition of EUT

- 3.4.1. Setup the EUT and simulator as shown as Section 3.1.
- 3.4.2. Turn on the power of all equipment.
- 3.4.3. Let the EUT work in test mode (Charging) and measure it.

3.5 Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2003 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test results are reported on Section 3.6.

3.6 Power Line Conducted Emission Measurement Results

The EUT is powered by battery, so the conducted emission test is not required.

4. Radiation Interference

4.1 Requirements (15.247, 15.209):

FIELD STRENGTH of Fundamental: 902-928 MHz 2.4-2.4835 GHz 94 dB μ V/m @3m	FIELD STRENGTH of Harmonics 54 dB μ V/m @3m	S15.209 30 - 88 MHz 88 - 216 MHz 216 - 960 MHz ABOVE 960 MHz	40 dBuV/m @3M 43.5 46 54dBuV/m
---	---	--	---

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation.

4.2 Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

All readings from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz. All reading are above 1GHz, peak & average values with a resolution bandwidth of 1MHz. The EUT is tested in 9*6*6 Chamber.

The test results are listed in Section 4.3.

Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year

Radiation Uncertainty : Ur = 4.3dB

4.3 Test Results

PASS.

Please refer the following pages.

Data:

Horizontal CH Low (2402MHz)								
Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
375.190	1.58	13.50	38.90	54.39	30.57	46.00	-15.43	QP
2402.000	2.17	31.21	35.30	86.77	84.85	114.0	-29.15	Peak
2402.000	2.17	31.21	35.30	84.69	82.77	94.0	-11.23	AV
4804.040	2.56	34.01	34.71	41.21	43.07	74.0	-30.93	Peak
4804.040	2.56	34.01	34.71	38.35	40.21	54.0	-13.79	AV
7207.980	2.98	36.16	35.15	38.07	42.06	74.0	-31.94	Peak
7207.980	2.98	36.16	35.15	28.15	32.14	54.0	-21.86	AV
9608.000	---	---	---	---	---	---	---	---
12010.00	---	---	---	---	---	---	---	---
14412.00	---	---	---	---	---	---	---	---
16814.00	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---

Vertical CH Low (2402MHz)								
Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
76.380	1.43	12.13	38.45	53.58	28.69	40.00	-17.31	QP
2402.000	2.17	31.21	35.30	88.15	86.23	114.0	-27.77	Peak
2402.000	2.17	31.21	35.30	81.07	79.15	94.0	-14.85	AV
4804.100	2.56	34.01	34.71	41.25	43.11	74.0	-30.89	Peak
4804.100	2.56	34.01	34.71	38.46	40.32	54.0	-13.68	AV
7207.930	2.98	36.16	35.15	37.77	41.76	74.0	-32.24	Peak
7207.930	2.98	36.16	35.15	34.08	38.07	54.0	-15.93	AV
9608.000	---	---	---	---	---	---	---	---
12010.00	---	---	---	---	---	---	---	---
14412.00	---	---	---	---	---	---	---	---
16814.00	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---

Horizontal CH Middle (2441MHz)								
Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
496.120	1.60	13.52	38.82	56.19	32.49	46.00	-13.51	QP
2441.000	2.19	31.22	34.60	91.84	90.65	114.0	-23.35	Peak
2441.000	2.19	31.22	34.60	81.02	79.83	94.0	-14.17	AV
4882.080	2.57	35.00	34.58	39.44	42.43	74.0	-31.57	Peak
4882.080	2.57	35.00	34.58	37.76	40.75	54.0	-13.25	AV
7323.050	3.00	36.17	35.14	35.54	39.57	74.0	-34.43	Peak
7323.050	3.00	36.17	35.14	34.09	38.12	54.0	-15.88	AV
9764.000	---	---	---	---	---	---	---	---
12205.00	---	---	---	---	---	---	---	---
14646.00	---	---	---	---	---	---	---	---
17087.00	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---

Vertical CH Middle (2441MHz)								
Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
154.270	1.50	13.40	38.89	53.37	29.38	43.50	-16.62	QP
2441.010	2.19	31.22	34.60	89.26	88.07	114.0	-25.93	Peak
2441.010	2.19	31.22	34.60	82.65	81.46	94.0	-12.54	AV
4882.110	2.57	35.00	34.58	43.79	46.78	74.0	-27.22	Peak
4882.110	2.57	35.00	34.58	42.42	45.41	54.0	-8.59	AV
7323.020	3.00	36.17	35.14	39.01	43.04	74.0	-30.96	Peak
7323.020	3.00	36.17	35.14	38.45	42.48	54.0	-11.52	AV
9764.000	---	---	---	---	---	---	---	---
12205.00	---	---	---	---	---	---	---	---
14646.00	---	---	---	---	---	---	---	---
17087.00	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---

Horizontal CH High (2480MHz)								
Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
377.290	1.60	13.52	38.82	54.29	30.59	46.00	-15.41	QP
2480.000	2.20	31.65	36.00	95.48	93.33	114.0	-20.67	Peak
2480.000	2.20	31.65	36.00	88.46	86.31	94.0	-7.69	AV
4960.050	2.58	35.06	34.79	43.78	46.63	74.0	-27.37	Peak
4960.050	2.58	35.06	34.79	37.44	40.29	54.0	-13.71	AV
7439.990	3.02	36.19	34.90	41.06	45.37	74.0	-28.63	Peak
7439.990	3.02	36.20	35.20	37.35	41.37	54.0	-12.63	AV
9920.00	---	---	---	---	---	---	---	---
12400.00	---	---	---	---	---	---	---	---
14880.00	---	---	---	---	---	---	---	---
17360.00	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---

Vertical CH High (2480MHz)								
Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dBμV	Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
576.050	1.62	13.54	38.45	53.08	29.79	46.00	-16.21	QP
2480.000	2.20	31.65	36.00	83.67	81.52	114.0	-32.48	Peak
2480.000	2.20	31.65	36.00	82.34	80.19	94.0	-13.81	AV
4960.100	2.58	35.06	34.79	42.76	45.61	74.0	-28.39	Peak
4960.100	2.58	35.06	34.79	39.55	42.4	54.0	-11.60	AV
7439.960	3.02	36.19	34.90	38.23	42.54	74.0	-31.46	Peak
7439.960	3.02	36.20	35.20	36.91	40.93	54.0	-13.07	AV
9920.000	---	---	---	---	---	---	---	---
12400.00	---	---	---	---	---	---	---	---
14880.00	---	---	---	---	---	---	---	---
17360.00	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---


**NOTE: “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
The results of different modulations are the same.**

5. CHANNEL SEPARATION TEST

5.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

5.2 Test SET-UP



5.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

5.4 Test Results

Product	:	Bluetooth Mono Headset	Test Mode	:	CH Low ~ CH High
Test Item	:	Frequency Separation	Temperature	:	24°C
Test Voltage	:	DC 3.7V Battery	Humidity	:	55%RH
Test Result	:	PASS			


Channel	Frequency (MHz)	Separation Read Value (kHz)	Limit (kHz)	Modulation Mode
Low	2401	1002	804	GFSK
Mid	2441	1002	786	GFSK
High	2480	1002	792	GFSK
Low	2401	1002	852	$\pi/4$ DQPSK
Mid	2441	1020	816	$\pi/4$ DQPSK
High	2480	1002	820	$\pi/4$ DQPSK
Low	2401	1002	852	8DPSK
Mid	2441	1020	816	8DPSK
High	2480	1002	820	8DPSK

Remark:

1. The limit of modulation ($\pi/4$ DQPSK, 8DPSK) is 2/3 of 20dB BW;


Modulation Mode: GFSK

CH Low

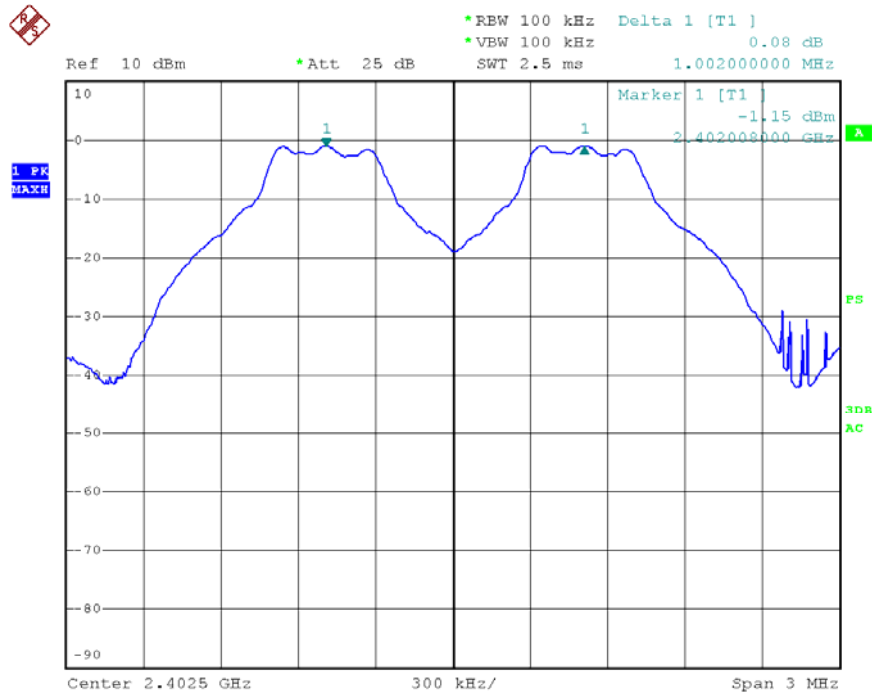


Date: 8.JUL.2013 18:11:49

CH Mid

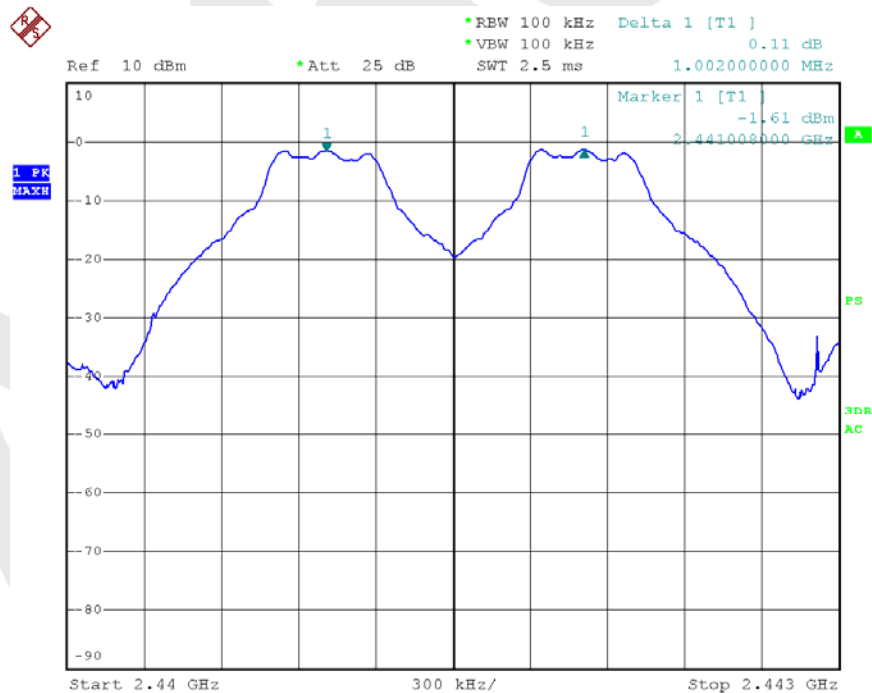


Date: 8.JUL.2013 18:12:30

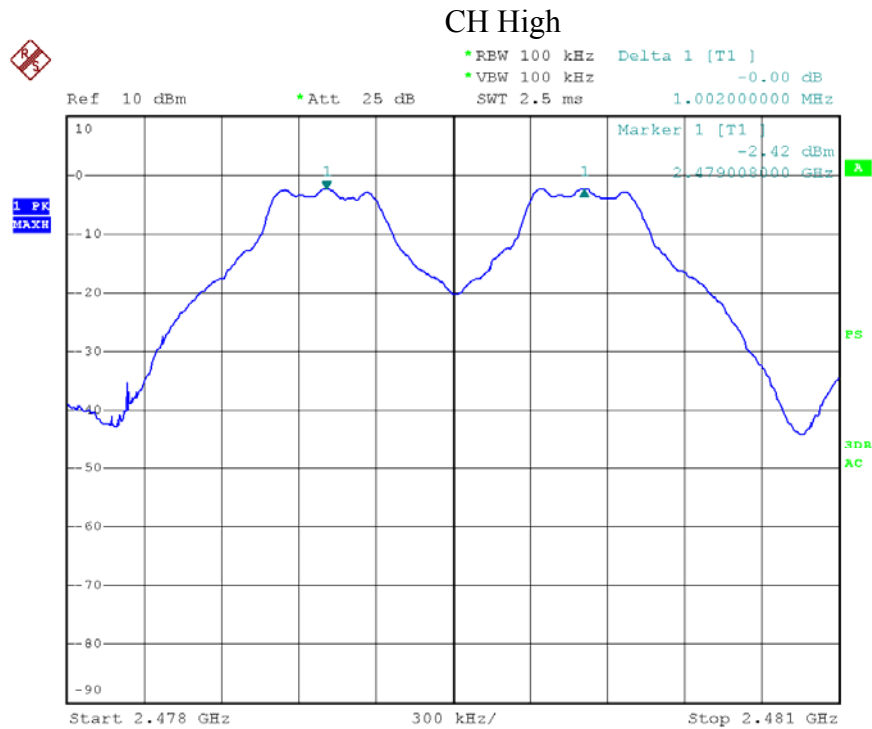


Date: 8.JUL.2013 18:13:10

Modulation Mode: $\pi/4$ DQPSK & 8DPSK

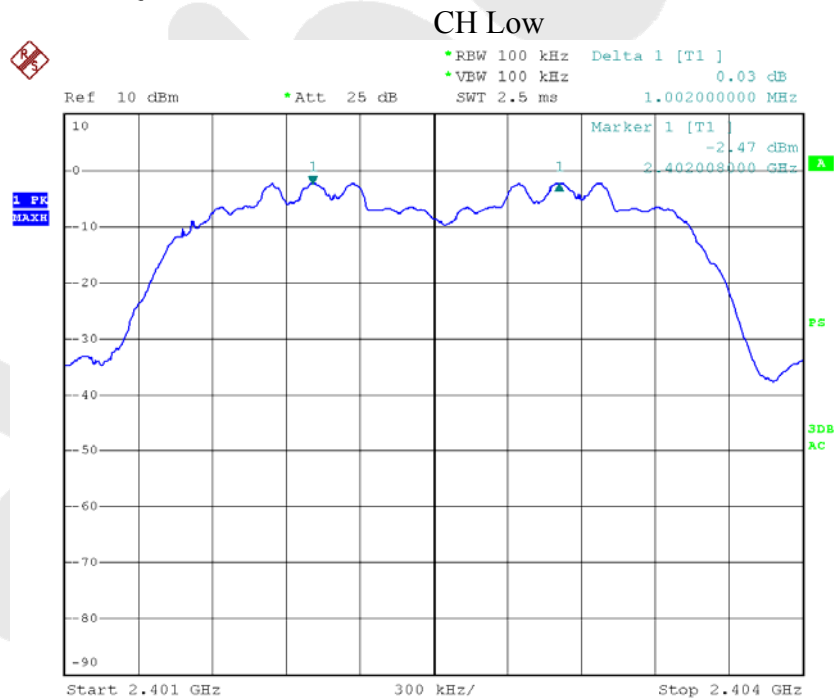


Date: 8.JUL.2013 18:06:15

CH Mid

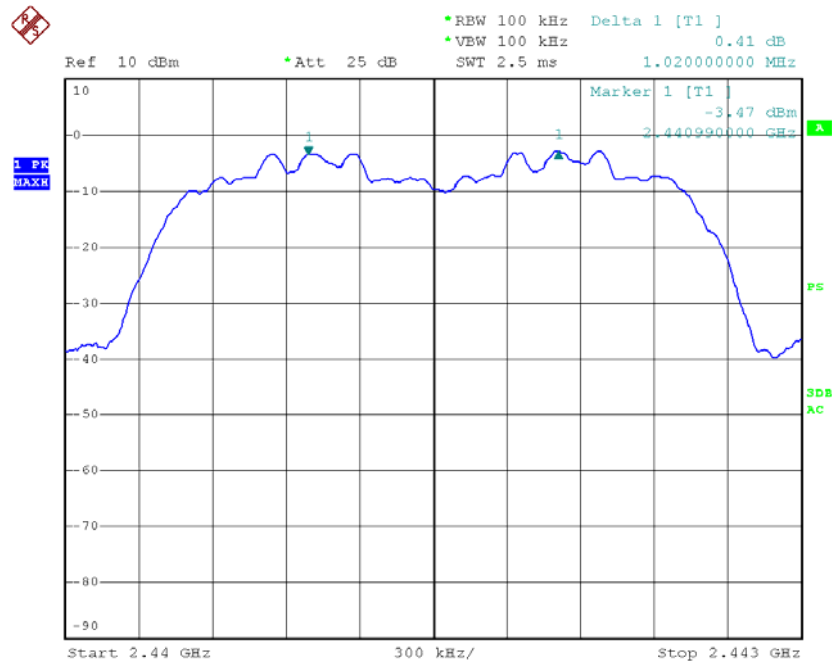

Date: 8.JUL.2013 18:08:04

CH High

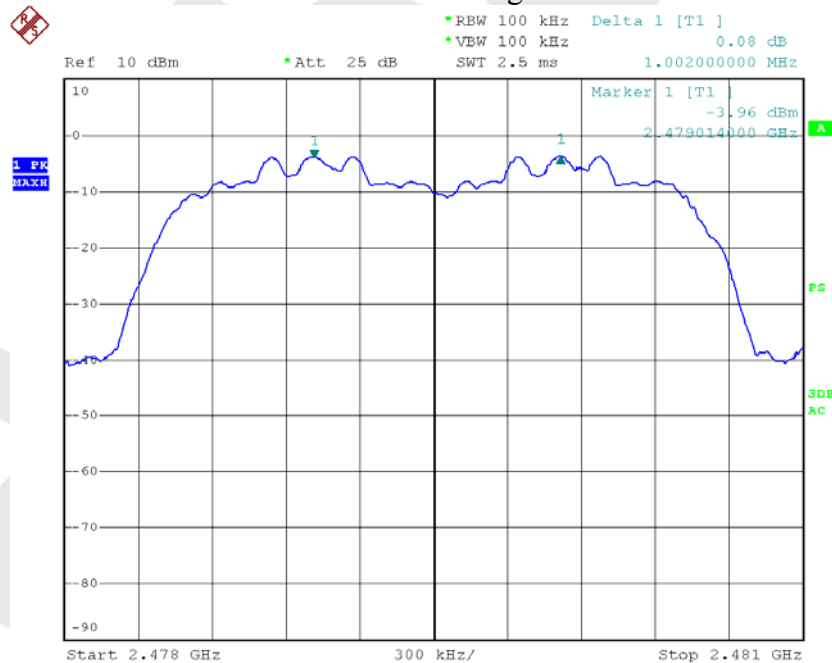


Date: 8.JUL.2013 18:09:14

6. 20DB BANDWIDTH TEST

6.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

6.2 Test SET-UP



6.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A


6.4 Test Results

Product : Bluetooth Mono Headset	Test Mode : CH Low ~ CH High
Test Item : 20dB BW	Temperature : 24°C
Test Voltage : DC 3.7V Battery	Humidity : 55%RH
Test Result : PASS	


Channel	Frequency (MHz)	20dB Down BW(kHz)	Modulation Mode
Low	2401	804	GFSK
Mid	2441	786	GFSK
High	2480	792	GFSK
Low	2401	1278	π /4DQPSK
Mid	2441	1224	π /4DQPSK
High	2480	1230	π /4DQPSK
Low	2401	1278	8DPSK
Mid	2441	1224	8DPSK
High	2480	1230	8DPSK

Remark: The results of modulations π /4DQPSK and 8DPSK are the same.


Modulation Mode: GFSK

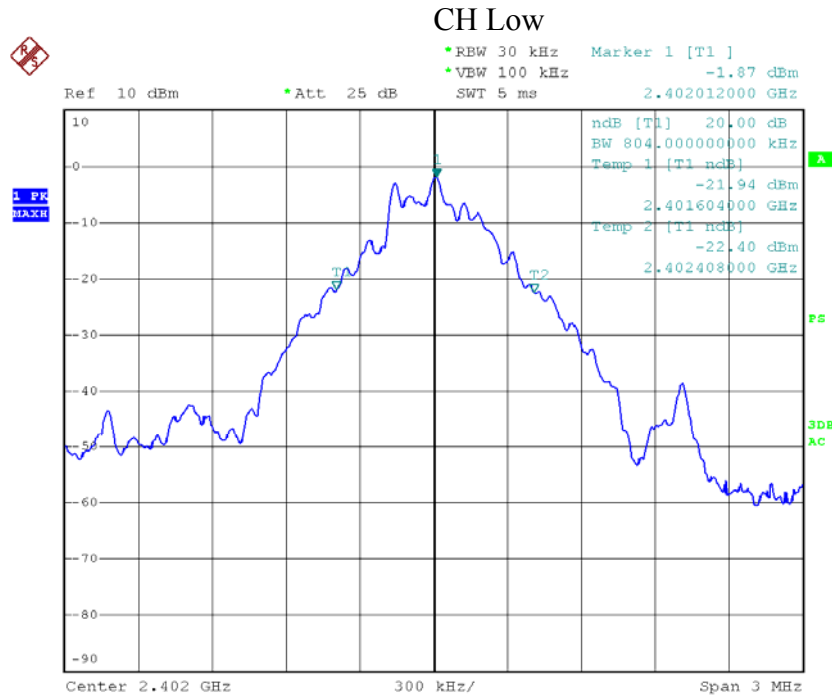

Date: 8.JUL.2013 17:58:09

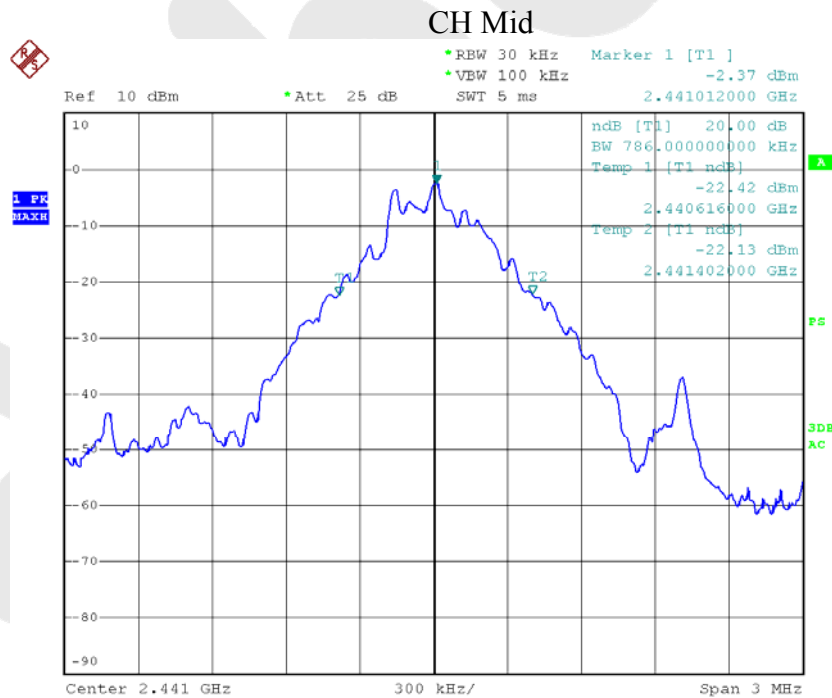


Date: 8.JUL.2013 17:58:30

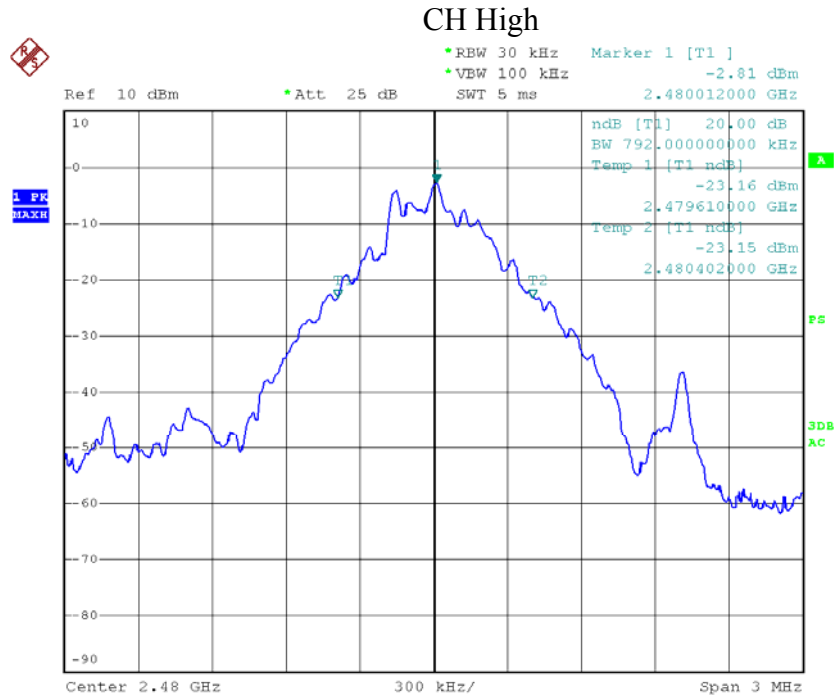


Date: 8.JUL.2013 17:58:49


Modulation Mode: $\pi/4$ DQPSK & 8DPSK

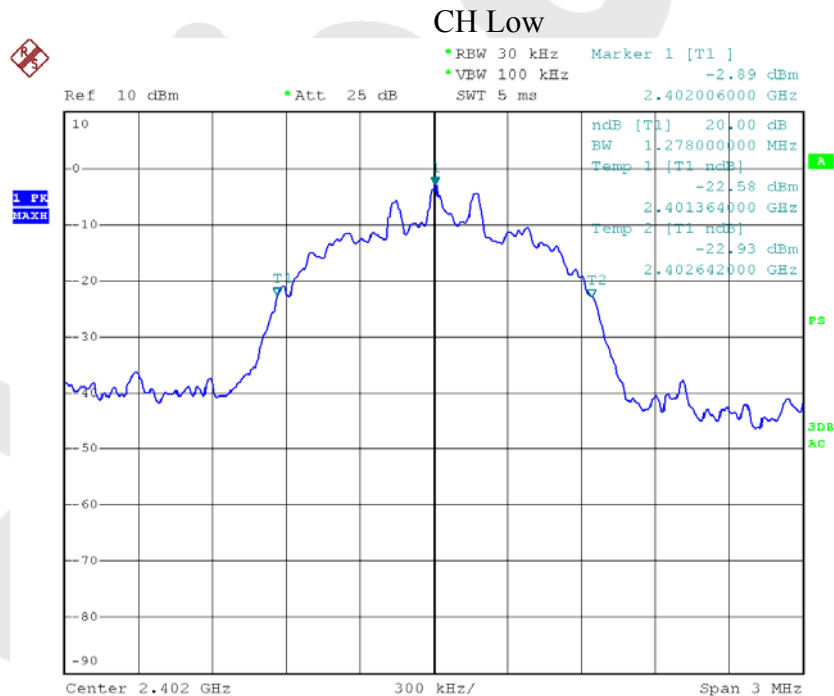

Date: 8.JUL.2013 17:56:14

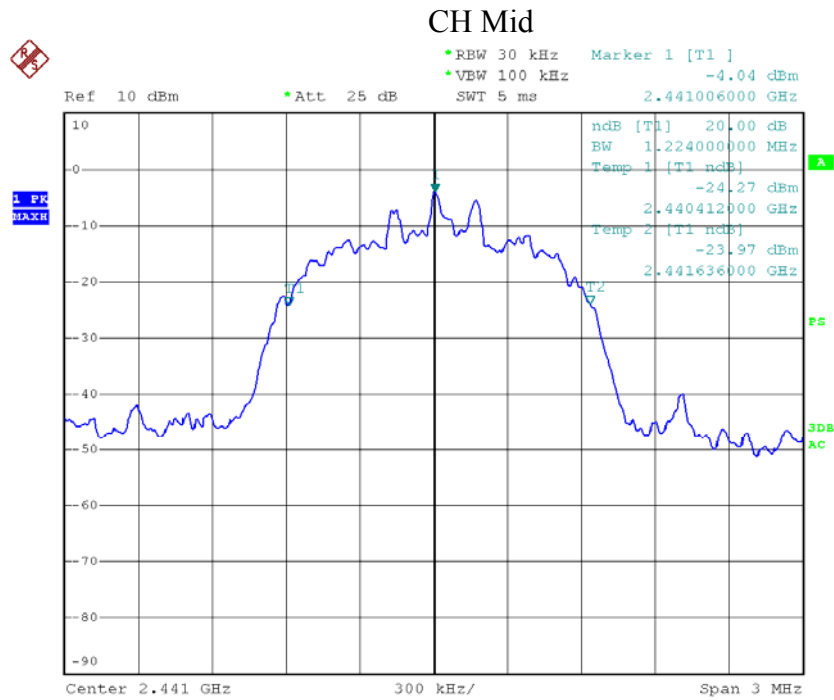

Date: 8.JUL.2013 17:55:41

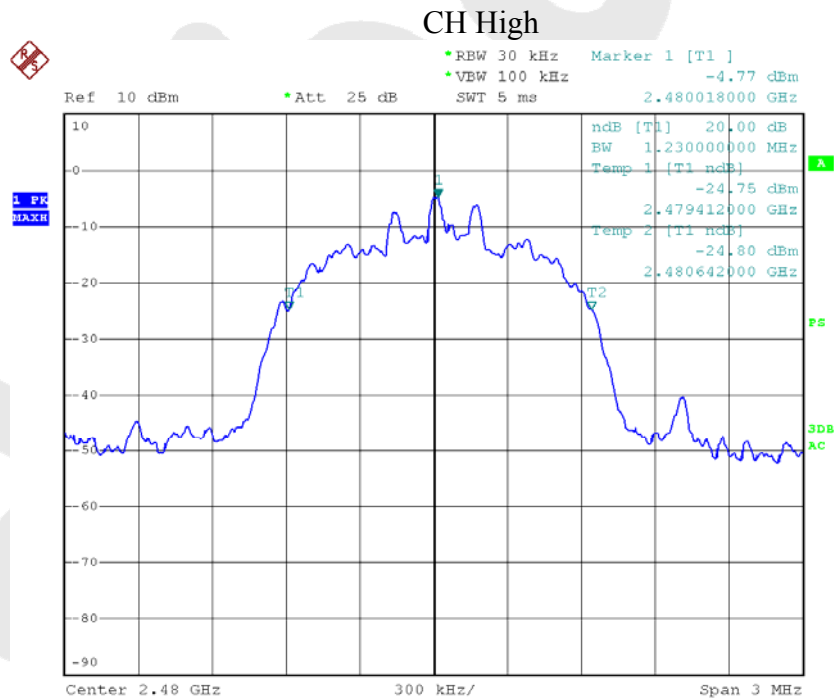


Date: 8.JUL.2013 17:55:20

7. QUANTITY OF HOPPING CHANNEL TEST

7.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

7.2 Test SET-UP




7.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A


7.4 Test Results

Product : Bluetooth Mono Headset	Test Mode : CH Low ~ CH High
Test Item : Number of Hopping Frequency	Temperature : 24℃
Test Voltage : DC 3.7V Battery	Humidity : 55%RH
Test Result : PASS	

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480	79	> 15

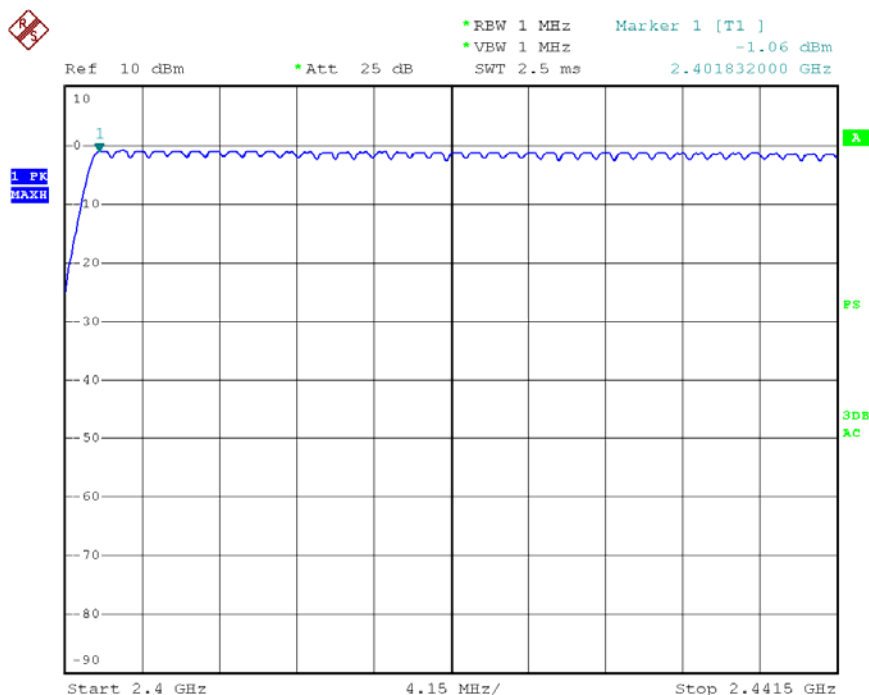

Date: 8.JUL.2013 18:14:20

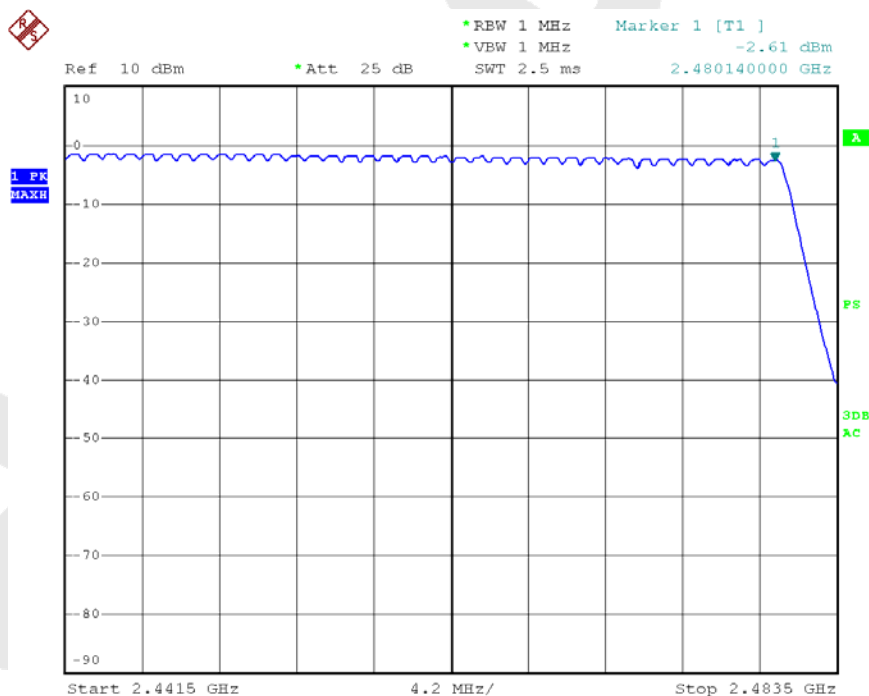


Date: 8.JUL.2013 18:15:29

8. DWELL TIME TEST

8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

8.2 Test SET-UP



8.3 Test Equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

8.4 Test Results

Product	: Bluetooth Mono Headset	Test Mode	: CH Low ~ CH High
Test Item	: Time of Occupancy	Temperature	: 24℃
Test Voltage	: DC 3.7V Battery	Humidity	: 55%RH
Test Result	: PASS		


Channel	Pulse width (ms)	Time slot length(ms)	Dwell time (ms)	Limit (ms)
Low Channel	0.530	time slot length *1600/2 /79 * 31.6	169.6	400
Mid Channel	1.800	time slot length *1600/4 /79 * 31.6	288.0	400
High Channel	3.060	time slot length *1600/6 /79 * 31.6	326.4	400

Low Channel

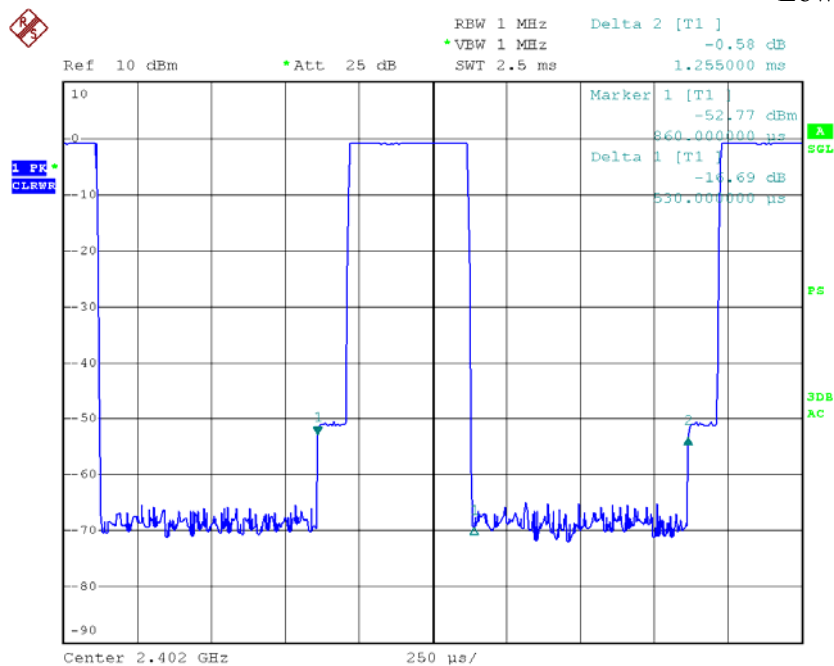


Date: 8.JUL.2013 18:17:01

Mid Channel

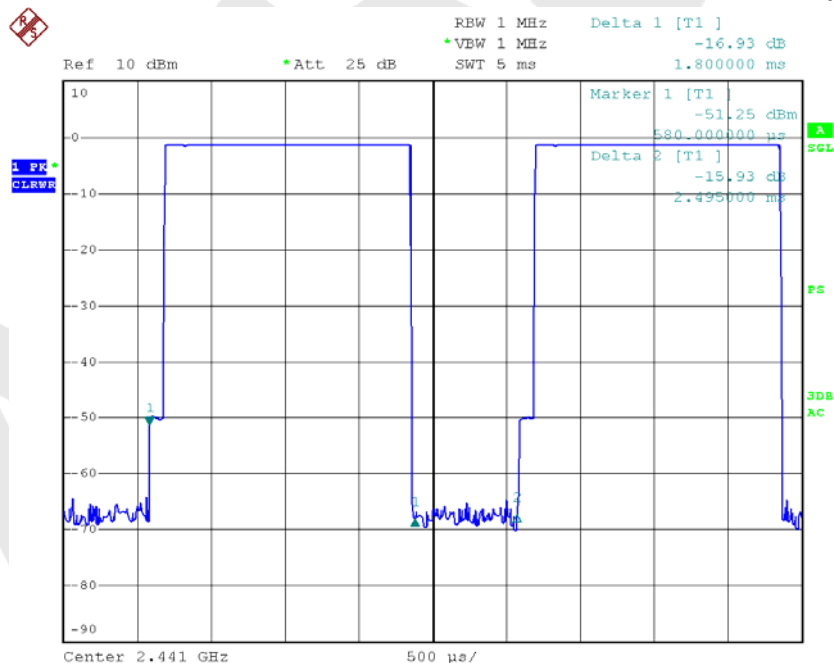

Date: 8.JUL.2013 18:20:38

High Channel

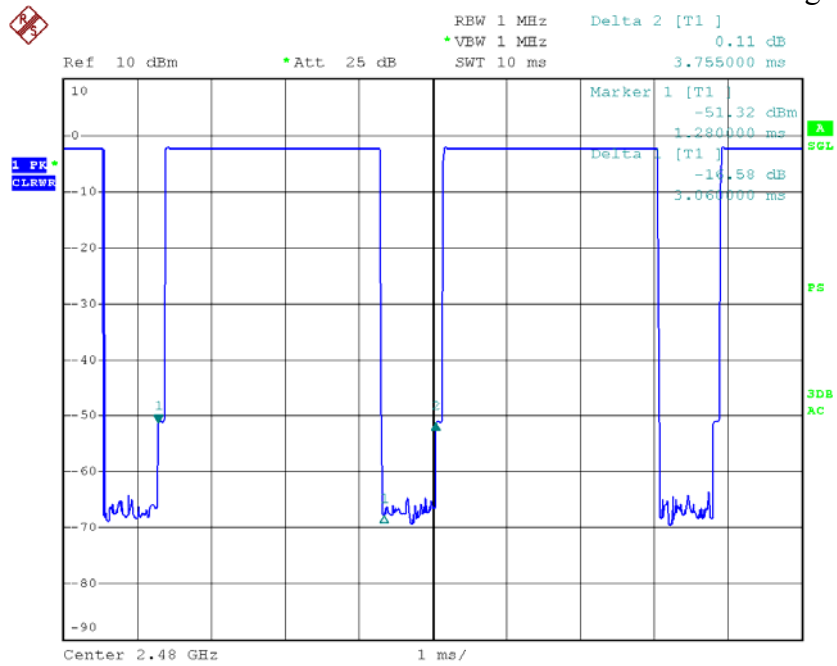


Date: 8.JUL.2013 18:21:42

9. MAXIMUM PEAK OUTPUT POWER TEST

9.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

9.2 Test SET-UP



9.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A


9.4 Test Results

Product : Bluetooth Mono Headset Test Mode : CH Low ~ CH High
Test Item : Max. peak output power Temperature : 24°C
Test Voltage : DC 3.7V Battery Humidity : 55%RH
Test Result : PASS


Channel Frequency (MHz)	Peak Power output(mW)	Peak Power output(dBm)	Peak Power Limit(mW)	Results	Modulation
2402	0.68	-1.71	125	PASS	GFSK
2441	0.61	-2.17	125	PASS	GFSK
2480	0.64	-1.94	125	PASS	GFSK
2402	0.66	-1.83	125	PASS	$\pi/4$ DQPSK
2441	0.55	-2.60	125	PASS	$\pi/4$ DQPSK
2480	0.49	-3.12	125	PASS	$\pi/4$ DQPSK
2402	0.66	-1.83	125	PASS	8DPSK
2441	0.55	-2.60	125	PASS	8DPSK
2480	0.49	-3.12	125	PASS	8DPSK

Remark: The results of modulations $\pi/4$ DQPSK and 8DPSK are the same.


Modulation Mode: GFSK

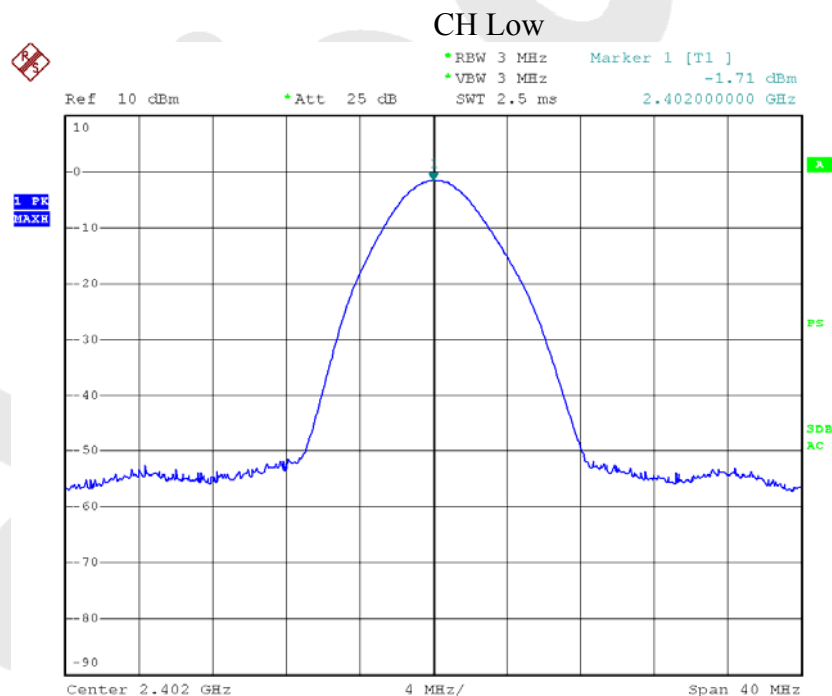

Date: 8.JUL.2013 17:51:54

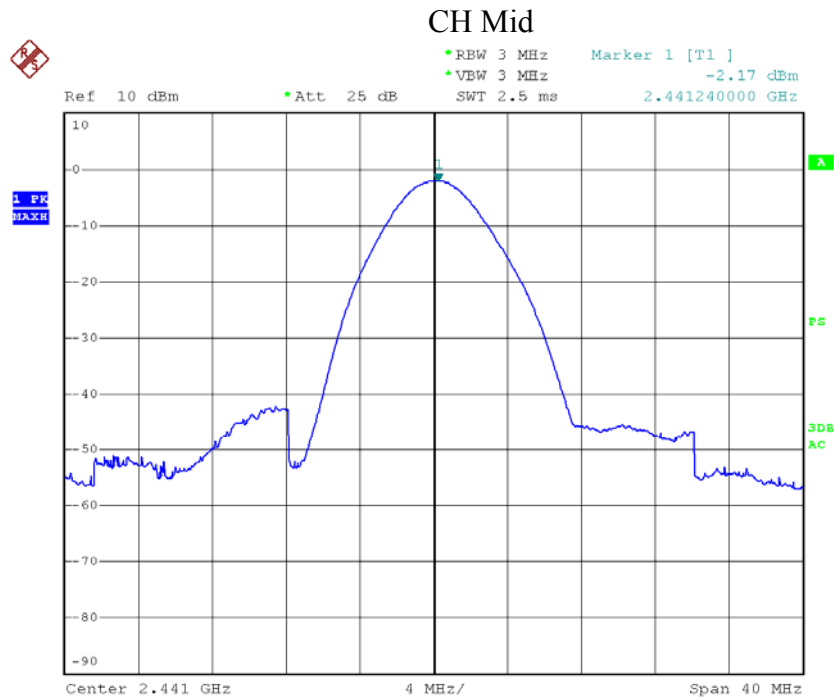


Date: 8.JUL.2013 17:52:25

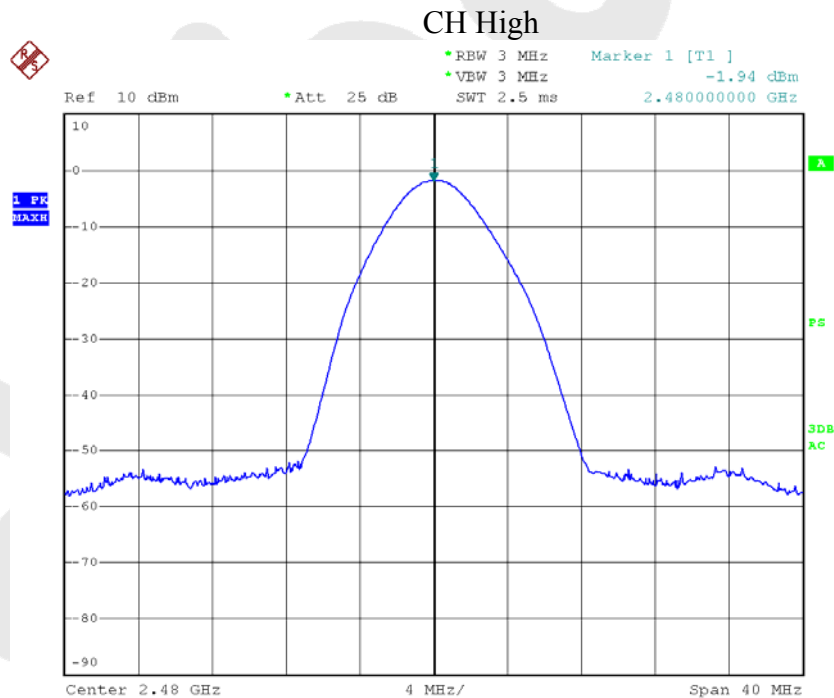


Date: 8.JUL.2013 17:52:51


Modulation Mode: $\pi/4$ DQPSK & 8DPSK

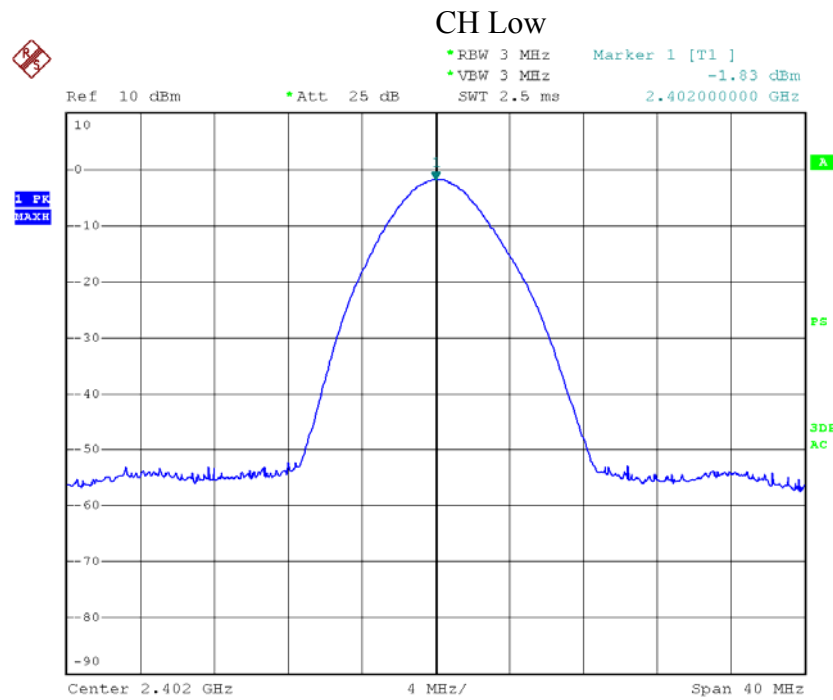

Date: 8.JUL.2013 17:53:48

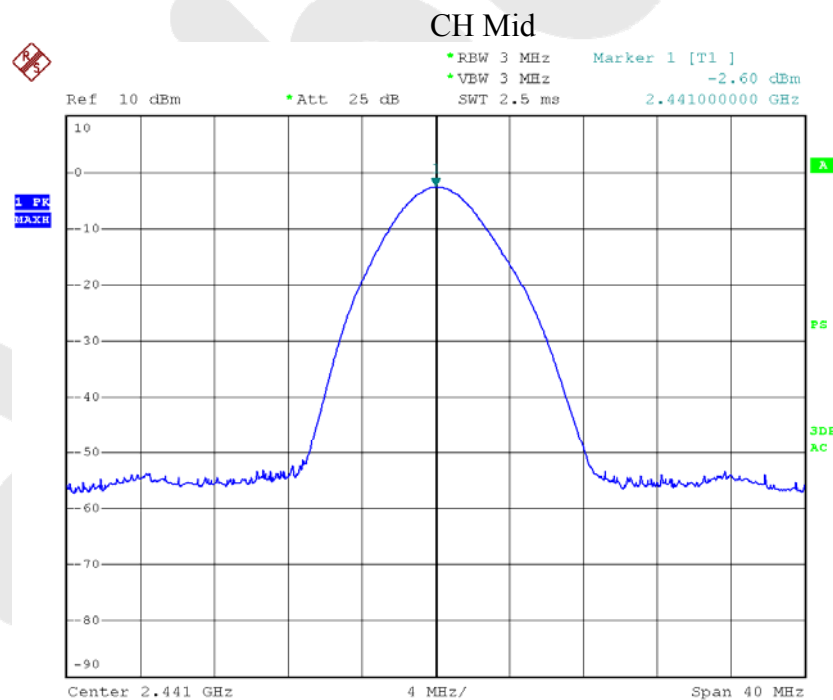

Date: 8.JUL.2013 17:54:10

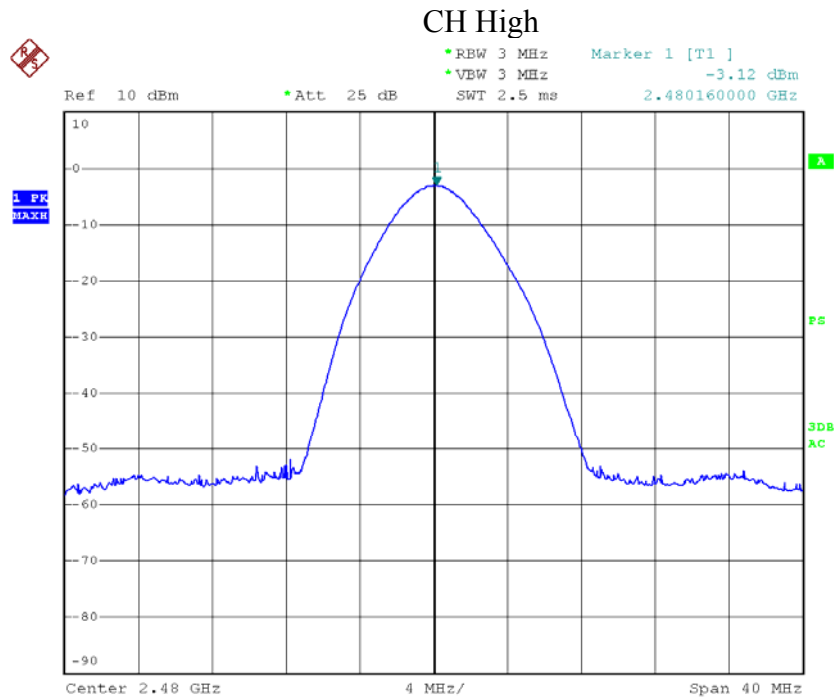

Date: 8.JUL.2013 17:54:31

10. BAND EDGE TEST

10.1 Measurement Procedure

1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

10.2 Test SET-UP

Same as the radiated emission test.

10.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

10.4 Test Results

Pass.
Please refer the following data.

Product	: Bluetooth Mono Headset	Test Mode	: CH Low ~ CH High
Test Item	: Band edge	Temperature	: 24°C
Test Voltage	: DC 3.7V Battery	Humidity	: 55%RH
Test Result	: PASS		


1. Conducted Test

Frequency (MHz)	Peak Power Output(dBm)	Emission read Value(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)	Modulation
<2400	-1.66	-42.99	41.33	>20dBc	GFSK
	-2.61	-46.18	43.57	>20dBc	$\pi/4$ DQPSK
	-2.61	-46.18	43.57	>20dBc	8DPSK
>2483.5	-2.51	-55.53	53.02	>20dBc	GFSK
	-4.43	-49.09	44.66	>20dBc	$\pi/4$ DQPSK
	-4.43	-49.09	44.66	>20dBc	8DPSK


2. Radiated emission Test

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Modulation
		PK	AV	PK	AV	
<2400	V	68.19	60.61	74.00	54.00	GFSK
	V	62.51	54.80	74.00	54.00	$\pi/4$ DQPSK
	V	62.51	54.80	74.00	54.00	8DPSK
>2483.5	V	41.38	47.65	74.00	54.00	GFSK
	V	53.80	47.79	74.00	54.00	$\pi/4$ DQPSK
	V	53.80	47.79	74.00	54.00	8DPSK

Modulation Mode: GFSK

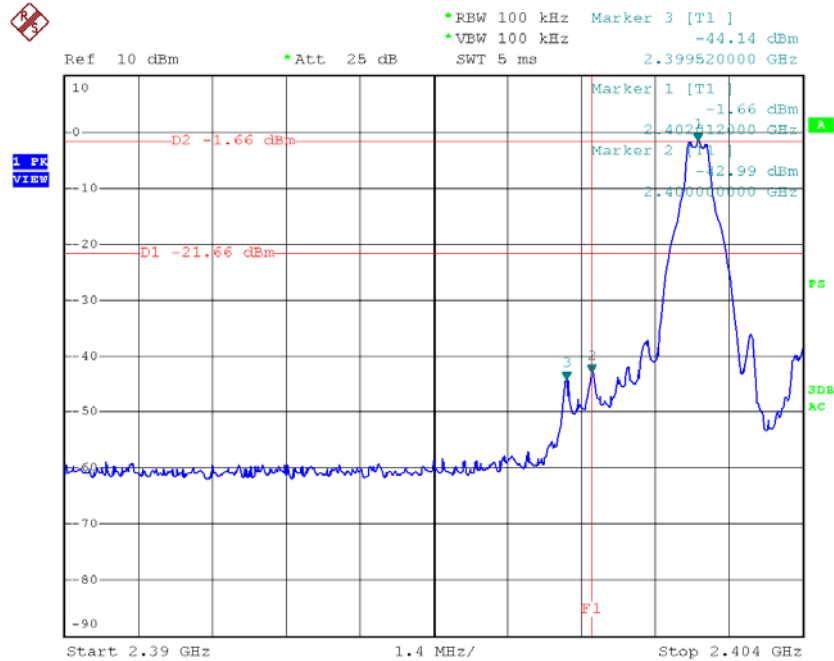


Date: 8.JUL.2013 18:00:58

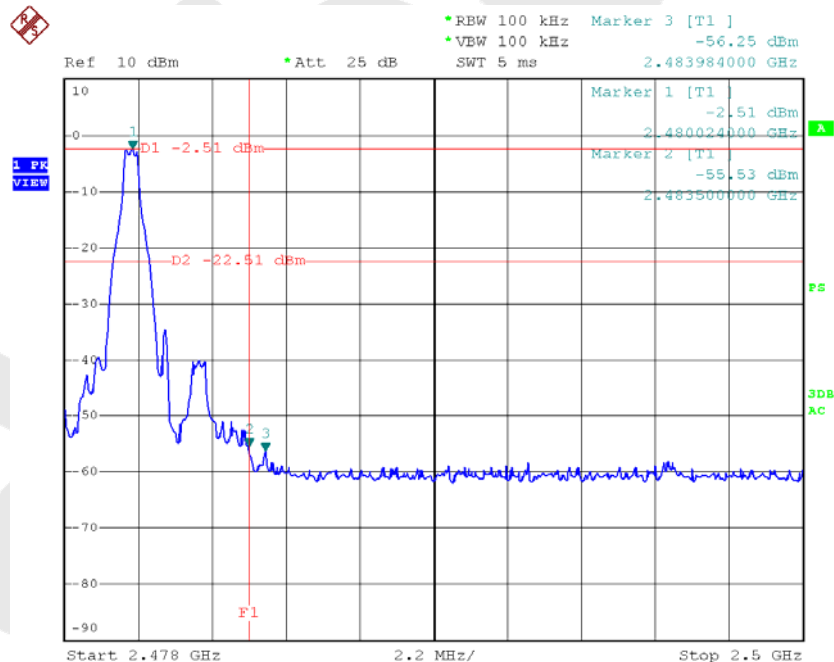


Date: 8.JUL.2013 18:02:17

Modulation Mode: $\pi/4$ DQPSK & 8DPSK

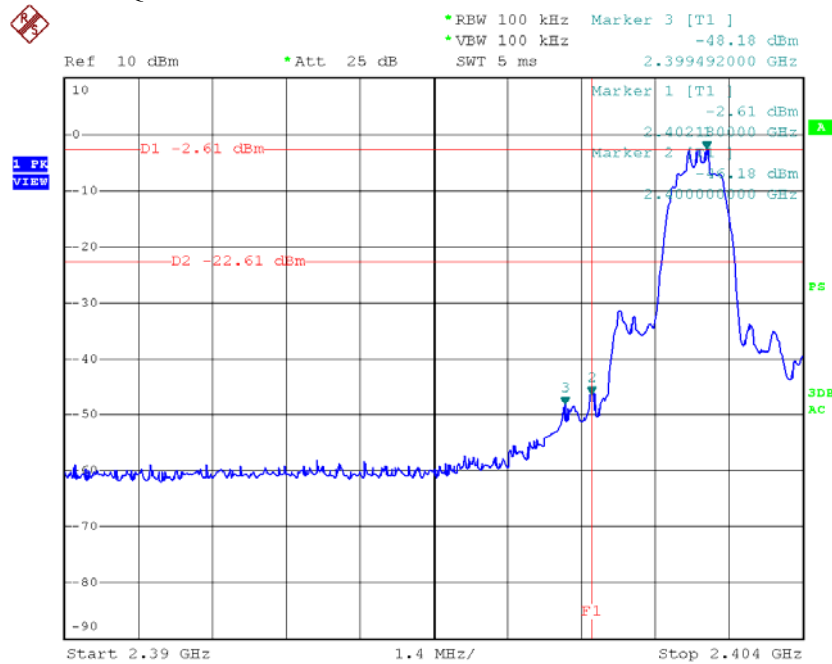

Date: 8.JUL.2013 18:04:43

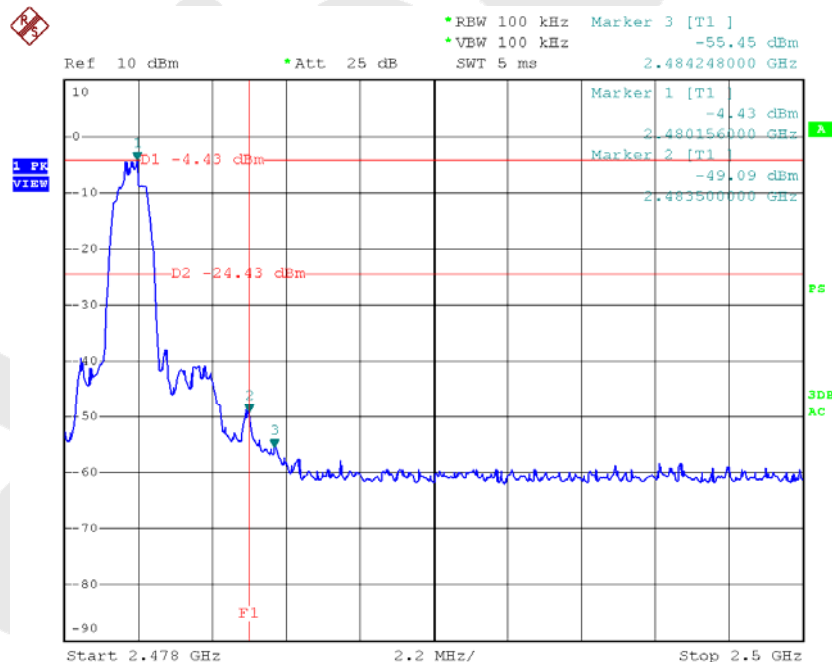

Date: 8.JUL.2013 18:03:31

11. ANTENNA APPLICATION

11.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:


Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


11.2 Result

The EUT's antenna used a chip antenna and integrated on PCB, The antenna's gain is 0dBi and meets the requirement.

12. PHOTOGRAPH

12.1 Photo of Radiation Emission Test

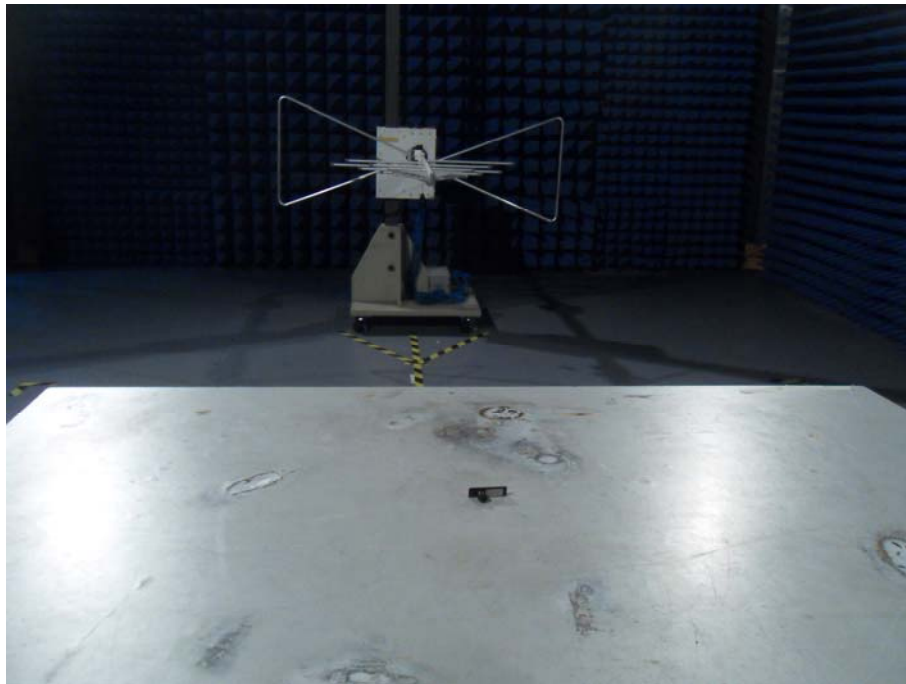

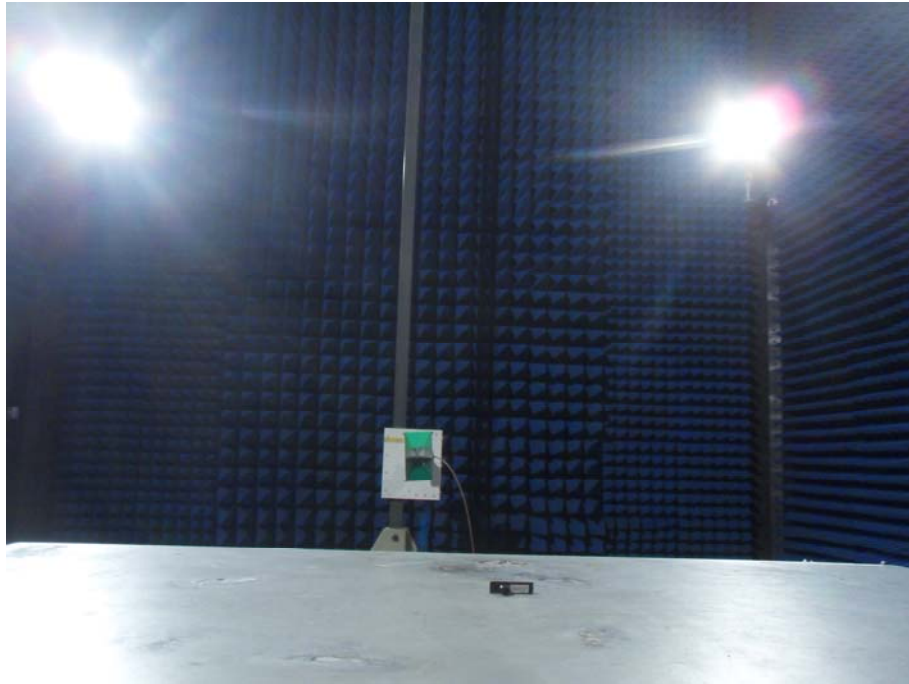

APPENDIX I (External Photos)

Figure 1

The EUT-Overall View

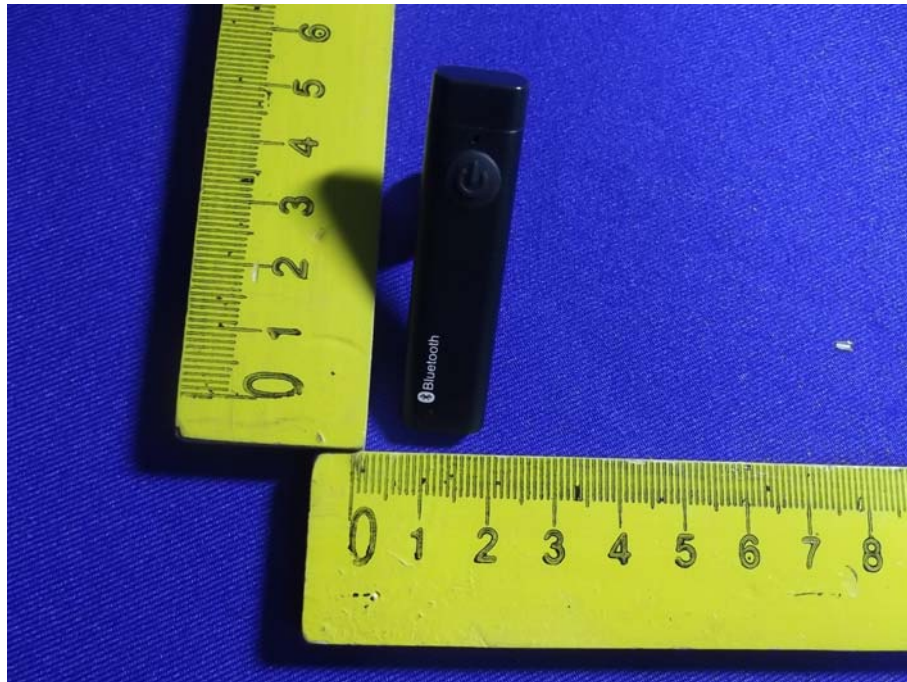


Figure 2

The EUT-Overall View



Figure 3
The EUT-Front View



APPENDIX II (Internal Photos)

Figure 4

The EUT-Inside View



Figure 5

PCB of the EUT-Front View

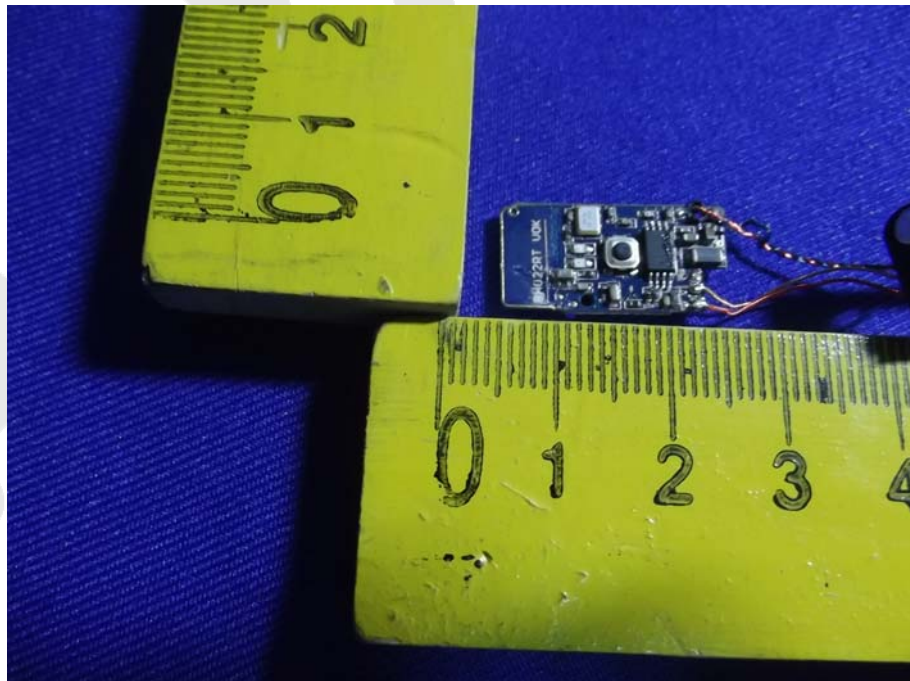


Figure 6
PCB of the EUT-Back View

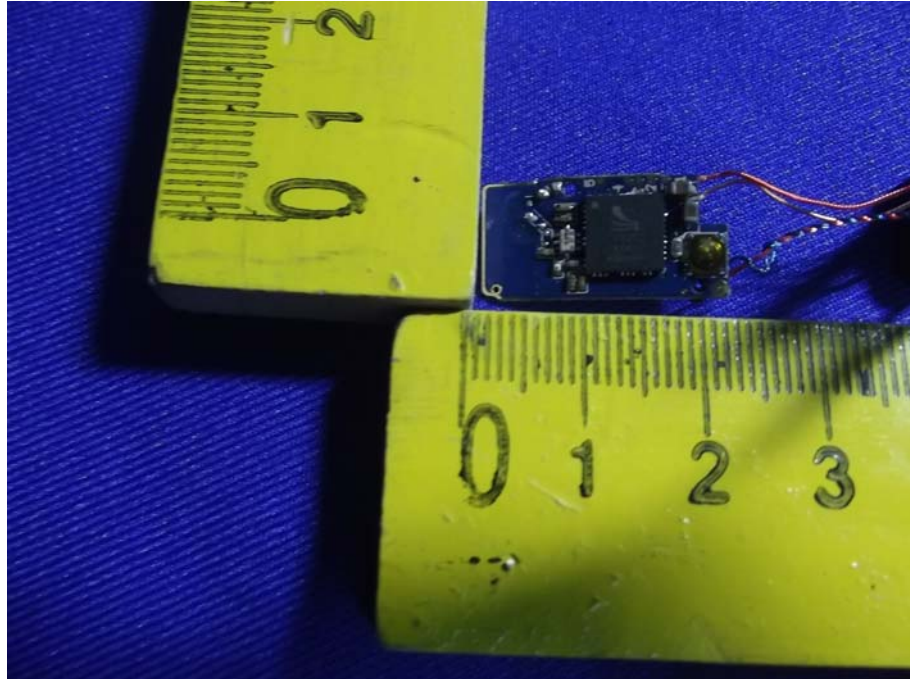


Figure 7
PCB of the EUT-Battery View

