

FCC TEST REPORT

for

LAYON International Electronic & Telecom Co., Ltd

Bluetooth Headset

Model No.: BS036RM, EM517

Prepared for : LAYON International Electronic & Telecom Co., Ltd
Address : No. 32, BaoHeRoad, NanZhou Street, GuangZhou 510288,
China

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road,
Nanshan District, Shenzhen, Guangdong, Chin
Tel: (86) 755-26066544
Fax: (86) 755-26014772

Report Number : 201307853F
Date of Test : Jul. 22~ 26, 2013
Date of Report : Jul. 26, 2013

TABLE OF CONTENTS

Description

Test Report

Page

1. GENERAL INFORMATION	5
1.1 Description of Device (EUT).....	5
1.2 Auxiliary Equipment Used during Test.....	6
1.3 Description of Test Facility	6
1.4 Measurement Uncertainty.....	6
2. TEST PROCEDURE	7
3. CONDUCTED LIMITS	8
3.1 Block Diagram of Test Setup	8
3.2 Power Line Conducted Emission Measurement Limits (15.207).....	8
3.3 Configuration of EUT on Measurement	8
3.4 Operating Condition of EUT	9
3.5 Test Procedure	9
3.6 Power Line Conducted Emission Measurement Results	9
4. RADIATION INTERFERENCE.....	12
4.1 Requirements (15.247, 15.209):	12
4.2 Test Procedure	12
4.3 Test Results.....	12
5. CHANNEL SEPARATION TEST	21
5.1 Measurement Procedure	21
5.2 Test SET-UP	21
5.3 Test Equipment.....	21
5.4 Test Results.....	21
6. 20DB BANDWIDTH TEST	25
6.1 Measurement Procedure	25
6.2 Test SET-UP	25
6.3 Test Equipment.....	25
6.4 Test Results.....	25
7. QUANTITY OF HOPPING CHANNEL TEST.....	29
7.1 Measurement Procedure	29
7.2 Test SET-UP	29
7.3 Test Equipment.....	29
7.4 Test Results.....	29
8. DWELL TIME TEST	31
8.1 Measurement Procedure	31
8.2 Test SET-UP	31
8.3 Test Equipment.....	31
8.4 Test Results.....	31

9. MAX IMUM PEAK OUTPUT POWER TEST	34
9.1 Measurement Procedure	34
9.2 Test SET-UP	34
9.3 Test Equipment.....	34
9.4 Test Results.....	35
10. BAND EDGE TEST.....	39
10.1 Measurement Procedure	39
10.2 Test SET-UP	39
10.3 Test Equipment.....	39
10.4 Test Results.....	39
11. ANTENNA APPLICATION.....	43
11.1 Antenna requirement	43
11.2 Result	43
12. PHOTOGRAPH.....	44
12.1 Photo of Conducted Emission Test.....	44
12.2 Photo of Radiation Emission Test	44

APPENDIX I (External Photos) (1 Pages)

APPENDIX II (Internal Photos) (2 Pages)

TEST REPORT

Applicant : LAYON International Electronic & Telecom Co., Ltd
Manufacturer : LAYON International Electronic & Telecom Co., Ltd
EUT : Bluetooth Headset
Model No. : BS036RM, EM517
Serial No. : N/A
Rating : DC 3.7V, 70mAH
Trade Mark : U&I

Measurement Procedure Used:


FCC Part15 Subpart C, Paragraph 15.207, 15.247 & 15.209

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.


This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Jul. 22~ 26, 2013


Prepared by :


(Tested Engineer / Rock Zeng)

Reviewer :


(Project Manager / Sally Zhang)

Approved & Authorized Signer :

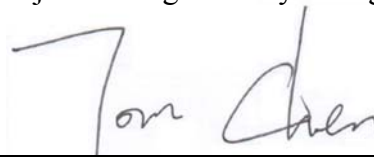
(Manager / Tom Chen)

1. GENERAL INFORMATION

1.1 Description of Device (EUT)

EUT : Bluetooth Headset

Model Number : BS036RM, EM517

(Note: The above samples are same except the model number & appearance, so we prepare “BS036RM” for EMC test only.)

Test Power Supply : AC 120V/60Hz for Adapter
Or DC 3.7V

Frequency : 2402~2480MHz

Antenna Specification : Printed Antenna:0dBi

Modulation : GFSK, $\pi/4$ DQPSK, 8DPSK

Applicant : LAYON International Electronic & Telecom Co., Ltd
Address : No. 32, BaoHeRoad, NanZhou Street, GuangZhou 510288, China

Manufacturer : LAYON International Electronic & Telecom Co., Ltd
Address : No. 32, BaoHeRoad, NanZhou Street, GuangZhou, China

Factory : LAYON International Electronic & Telecom Co., Ltd
Address : No. 32, BaoHeRoad, NanZhou Street, GuangZhou, China

Date of receiver : Jul. 22, 2013

Date of Test : Jul. 22~ 26, 2013

1.2 Auxiliary Equipment Used during Test

Adapter : Model: CW0502000
Input: 100-240V~, 50-60Hz, 0.4A Max
Output: DC 5V

1.3 Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS - LAB Code: L3503

Shenzhen Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

FCC-Registration No.: 752021

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, Jul. 10, 2013.

IC-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A-1, Feb. 22, 2013.

Test Location

All Emissions tests were performed at
Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, Chin

1.4 Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3dB
Conduction Uncertainty : Uc = 3.4dB

2. Test Procedure

GENERAL: This report shall NOT be reproduced except in full without the written approval of Shenzhen Anbotek Compliance Laboratory Limited. The EUT was transmitting a test signal during the testing.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-2009 using a spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz up to 1.0GHz and 1.0MHz with a video BW of 3.0MHz above 1.0GHz. The ambient temperature of the EUT was 74.3oF with a humidity of 69%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS
20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.4-2009 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

3. Conducted Limits


Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Two-Line V-network	Rohde & Schwarz	ENV216	10055	Apr. 23, 2013	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Apr. 23, 2013	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Apr. 23, 2013	1 Year

Conduction Uncertainty : $U_c = 3.4\text{dB}$

3.1 Block Diagram of Test Setup

3.1.1. Block diagram of connection between the EUT and simulators

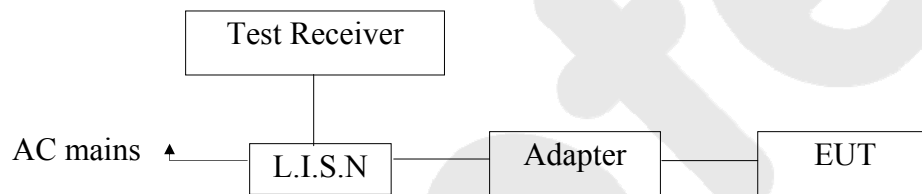

(EUT: Bluetooth Headset)

3.2 Power Line Conducted Emission Measurement Limits (15.207)

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

3.3 Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

EUT : Bluetooth Headset
Model Number : BS036RM
Applicant : LAYON International Electronic & Telecom Co., Ltd

3.4 Operating Condition of EUT

- 3.4.1. Setup the EUT and simulator as shown as Section 3.1.
- 3.4.2. Turn on the power of all equipment.
- 3.4.3. Let the EUT work in test mode (Charging) and measure it.

3.5 Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2003 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test results are reported on Section 3.6.

3.6 Power Line Conducted Emission Measurement Results

Pass.

The frequency range from 150KHz to 30 MHz is investigated.


Please refer the following pages.

CONDUCTED EMISSION TEST DATA

EUT: Bluetooth Headset M/N: BS036RM
Operating Condition: Charging
Test Site: 1# Shielded Room
Operator: Finley Li
Test Specification: AC 120V/60Hz
Comment: Live Line
Tem:25°C Hum:50%

SCAN TABLE: "Voltage(150K~30M)FIN"

Short Description: 150K-30M Disturbance Voltages

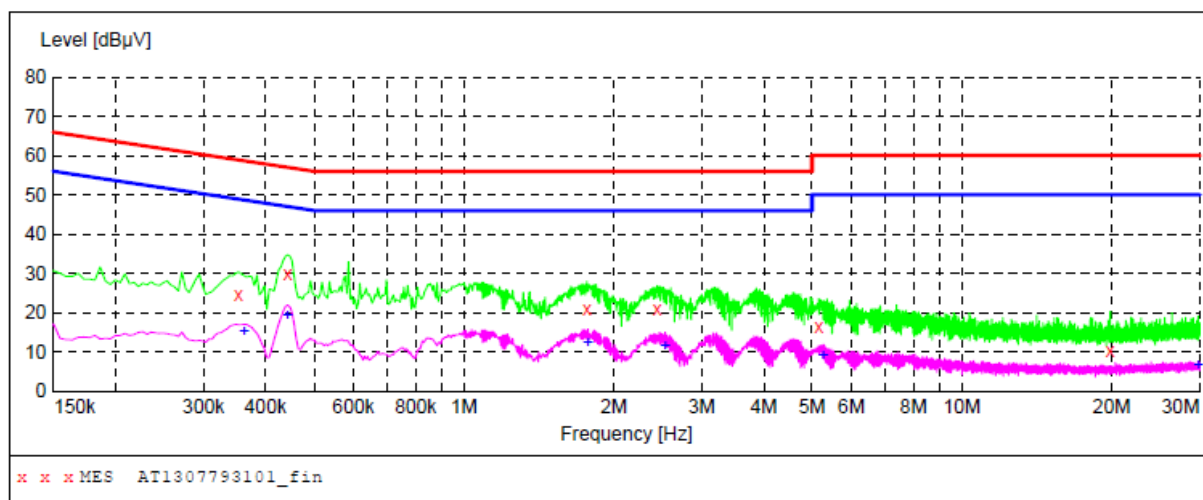

MEASUREMENT RESULT: "AT1307793101_fin"

7/23/2013 10:39AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.352500	24.70	20.1	59	34.2	QP	L1	GND
0.442500	29.80	20.1	57	27.2	QP	L1	GND
1.765000	21.00	20.3	56	35.0	QP	L1	GND
2.444500	21.10	20.3	56	34.9	QP	L1	GND
5.158000	16.60	20.5	60	43.4	QP	L1	GND
19.837000	10.30	20.8	60	49.7	QP	L1	GND

MEASUREMENT RESULT: "AT1307793101_fin2"

7/23/2013 10:39AM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.361500	15.10	20.1	49	33.6	AV	L1	GND
0.442500	19.30	20.1	47	27.7	AV	L1	GND
1.774000	12.20	20.3	46	33.8	AV	L1	GND
2.534500	11.40	20.4	46	34.6	AV	L1	GND
5.266000	9.20	20.5	50	40.8	AV	L1	GND
29.822500	6.40	20.9	50	43.6	AV	L1	GND

CONDUCTED EMISSION TEST DATA

EUT: Bluetooth Headset M/N: BS036RM
Operating Condition: Charging
Test Site: 1# Shielded Room
Operator: Finley Li
Test Specification: AC 120V/60Hz
Comment: Neutral Line
Tem:25°C Hum:50%

SCAN TABLE: "Voltage(150K~30M)FIN"

Short Description: 150K-30M Disturbance Voltages

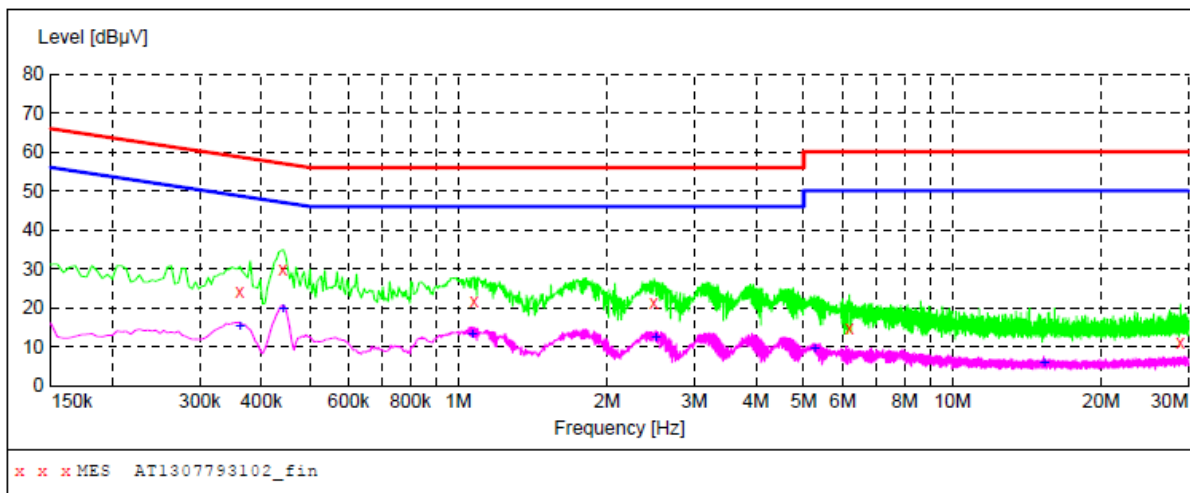

MEASUREMENT RESULT: "AT1307793102_fin"

7/23/2013 10:37AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.361500	24.20	20.1	59	34.5	QP	N	GND
0.442500	29.80	20.1	57	27.2	QP	N	GND
1.076500	21.80	20.2	56	34.2	QP	N	GND
2.489500	21.30	20.3	56	34.7	QP	N	GND
6.179500	14.60	20.5	60	45.4	QP	N	GND
28.904500	10.90	20.9	60	49.1	QP	N	GND

MEASUREMENT RESULT: "AT1307793102_fin2"

7/23/2013 10:37AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.361500	15.30	20.1	49	33.4	AV	N	GND
0.442500	19.70	20.1	47	27.3	AV	N	GND
1.067500	13.00	20.2	46	33.0	AV	N	GND
2.507500	12.20	20.3	46	33.8	AV	N	GND
5.257000	9.40	20.5	50	40.6	AV	N	GND
15.310000	5.90	20.7	50	44.1	AV	N	GND

4. Radiation Interference

4.1 Requirements (15.247, 15.209):

FIELD STRENGTH of Fundamental: 902-928 MHz 2.4-2.4835 GHz 94 dBμV/m @3m	FIELD STRENGTH of Harmonics 54 dBμV/m @3m	S15.209 30 - 88 MHz 88 - 216 MHz 216 - 960 MHz ABOVE 960 MHz	40 dBuV/m @3M 43.5 46 54dBuV/m
---	---	--	---

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation.

4.2 Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

All readings from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz. All reading are above 1GHz, peak & average values with a resolution bandwidth of 1MHz. The EUT is tested in 9*6*6 Chamber.

The test results are listed in Section 4.3.

Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year

Radiation Uncertainty : Ur = 4.3dB


4.3 Test Results

PASS.

Please refer the following pages.

Job No.: AT1307793I
Standard: (RE)FCC PART15 C _3m
Test item: Radiation Test
Temp.(C)/Hum.(%RH): 24.3(C)/55%RH
EUT: Bluetooth Headset
Model: BS036RM
Mode: On
Note: 30-1000MHz


Polarization: Horizontal
Power Source: DC 3.7V
Date: 2013/07/23
Time: 14:22:35
Test By: Rock Zeng
Distance: 3m

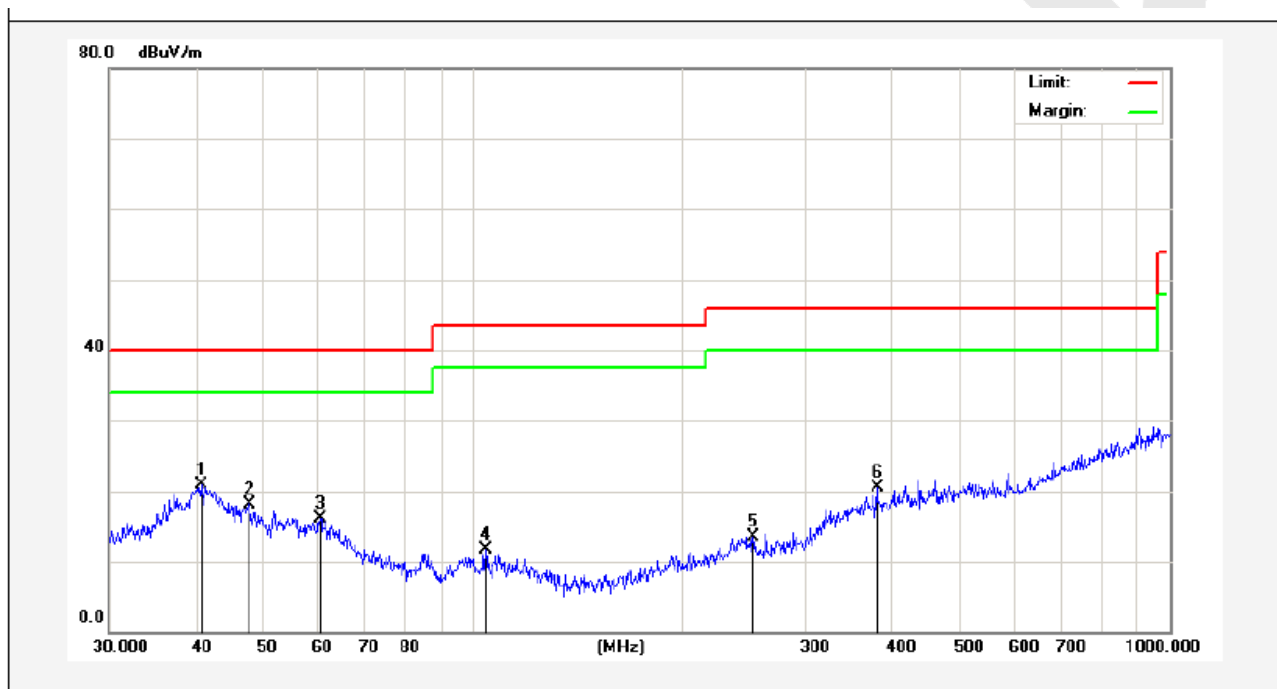

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	40.7016	31.60	-10.64	20.96	40.00	-19.04	peak			
2	47.6586	31.72	-13.52	18.20	40.00	-21.80	peak			
3	60.2801	31.71	-15.51	16.20	40.00	-23.80	peak			
4	104.1701	32.35	-20.70	11.65	43.50	-31.85	peak			
5	252.0627	32.18	-18.64	13.54	46.00	-32.46	peak			
6	379.9141	33.71	-13.27	20.44	46.00	-25.56	peak			

Job No.: AT1307793I
Standard: (RE)FCC PART15 C _3m
Test item: Radiation Test
Temp.(C)/Hum.(%RH): 24.3(C)/55%RH
EUT: Bluetooth Headset
Model: BS036RM
Mode: On
Note: 30-1000MHz

Polarization: Vertical
Power Source: DC 3.7V
Date: 2013/07/23
Time: 14:27:39
Test By: Rock Zeng
Distance: 3m

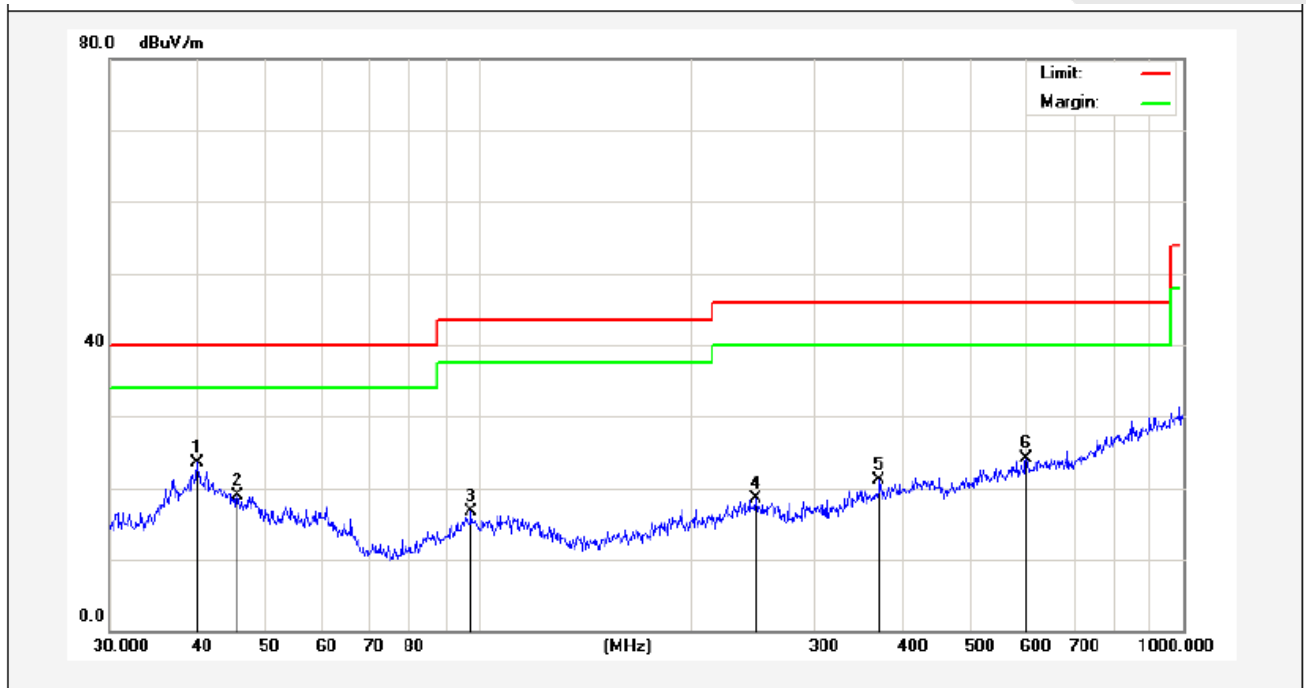

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.9942	33.87	-10.37	23.50	40.00	-16.50	peak			
2	45.5348	31.39	-12.56	18.83	40.00	-21.17	peak			
3	97.7983	32.51	-15.88	16.63	43.50	-26.87	peak			
4	247.6819	32.54	-14.06	18.48	46.00	-27.52	peak			
5	370.7023	33.46	-12.45	21.01	46.00	-24.99	peak			
6	599.3212	33.29	-9.25	24.04	46.00	-21.96	peak			

Above 1 GHz

Operation Mode: TX /CH Low


Temperature: 25°C

Humidity: 50 % RH

Test Date: Jul.24, 2013

Tested by: Rock Zeng


Polarity: Horizontal

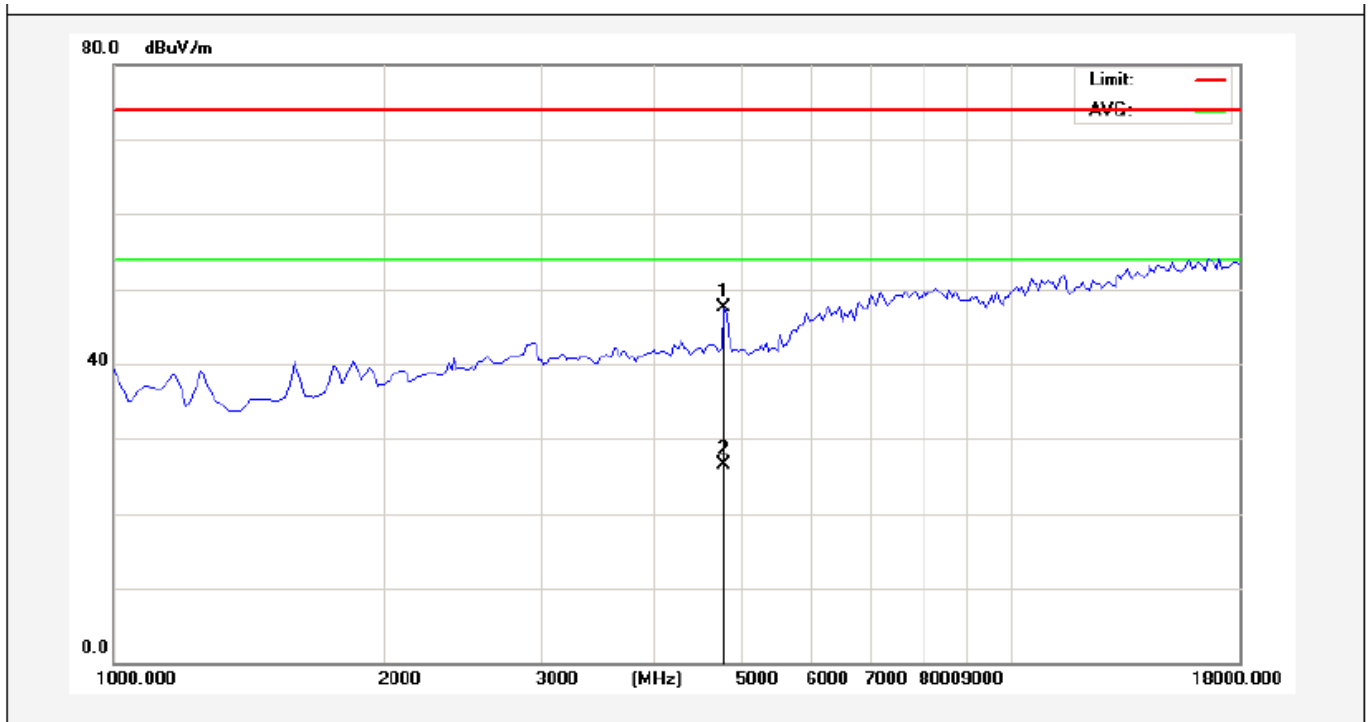

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	4825.000	44.20	3.34	47.54	74.00	-26.46	peak			
2	4825.000	23.16	3.34	26.50	54.00	-27.50	AVG			

Operation Mode: TX / CH Low
Temperature: 25°C
Humidity: 50 % RH


Test Date: Jul.24, 2013
Tested by: Rock Zeng
Polarity: Vertical

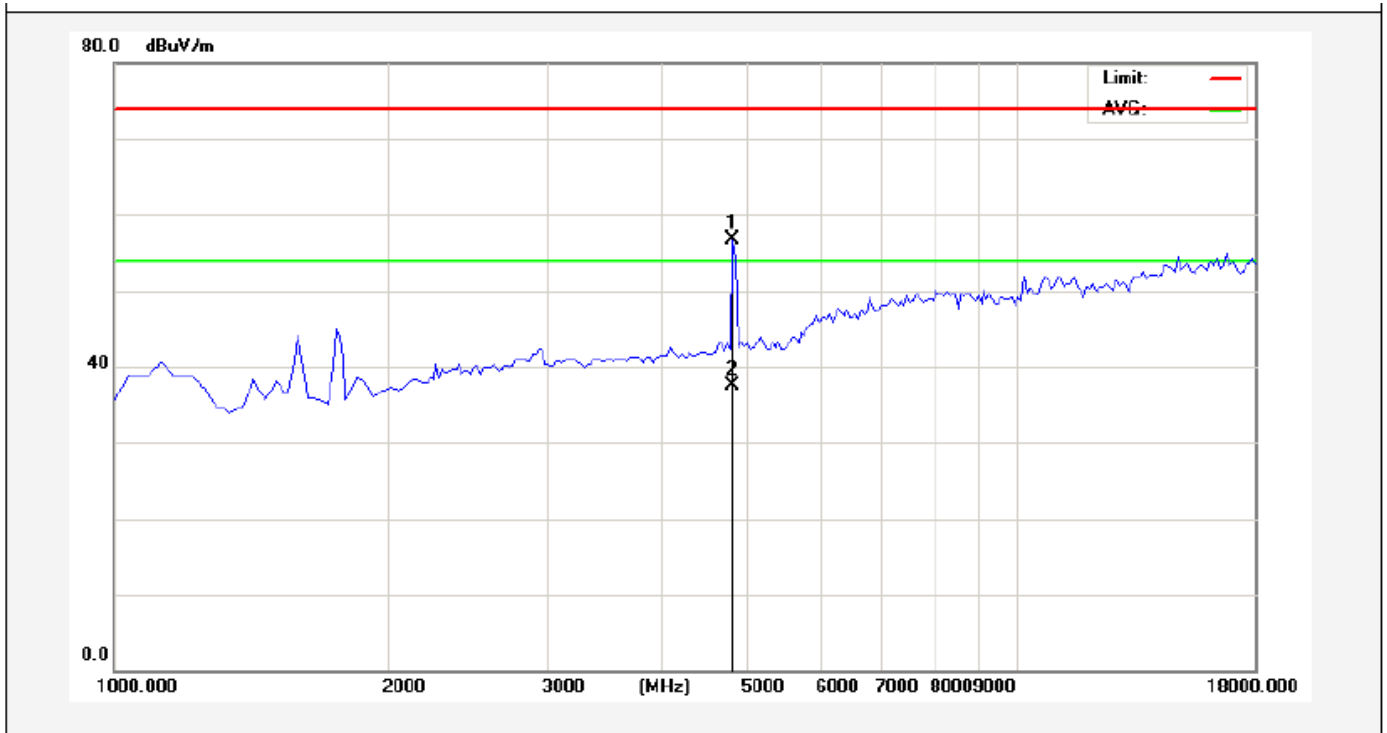

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	4825.000	53.38	3.34	56.72	74.00	-17.28	peak			
2	4825.000	34.23	3.34	37.57	54.00	-16.43	AVG			

Operation Mode: TX / CH Mid
Temperature: 25°C
Humidity: 50 % RH


Test Date: Jul.24, 2013
Tested by: Rock Zeng
Polarity: Horizontal

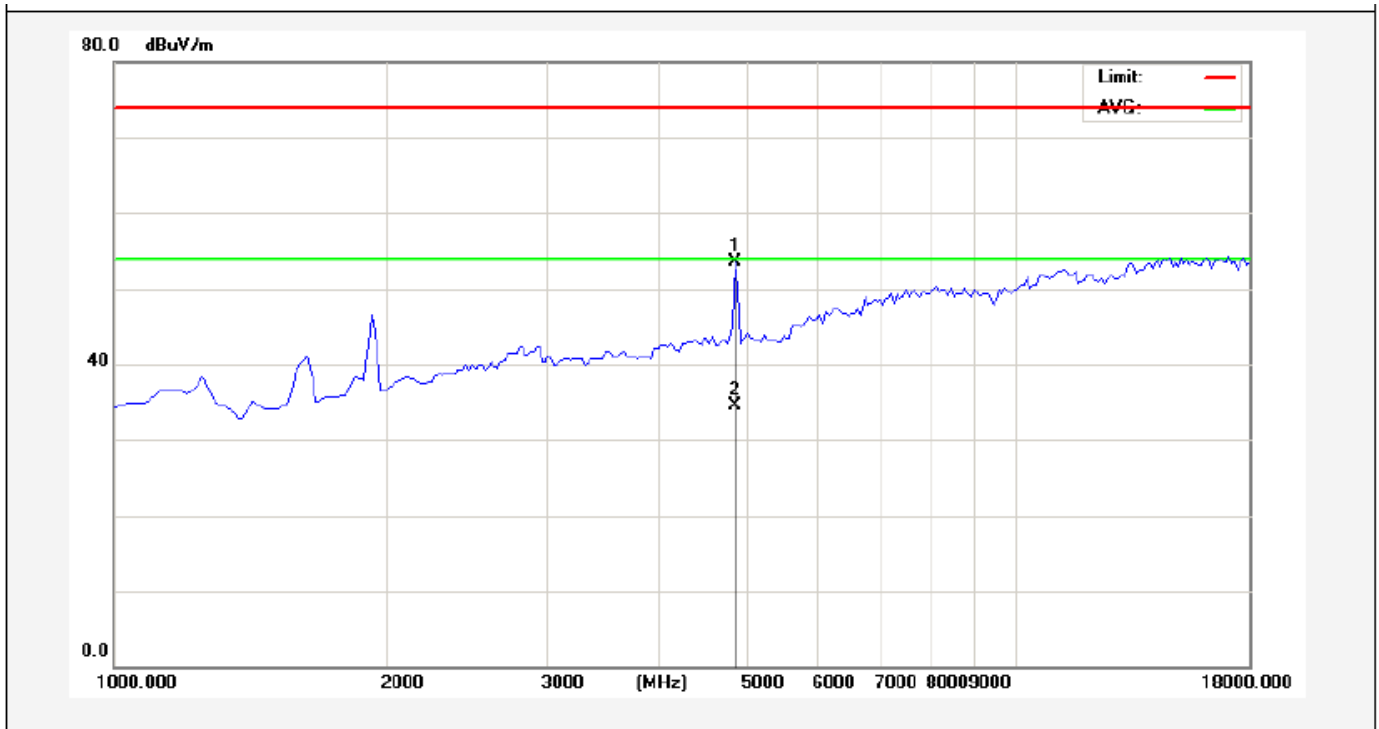

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	4867.500	50.07	3.41	53.48	74.00	-20.52	peak			
2	4867.500	31.05	3.41	34.46	54.00	-19.54	AVG			


Operation Mode: TX / CH Mid
Temperature: 25°C
Humidity: 50 % RH

Test Date: Jul.24, 2013
Tested by: Rock Zeng
Polarity: Vertical

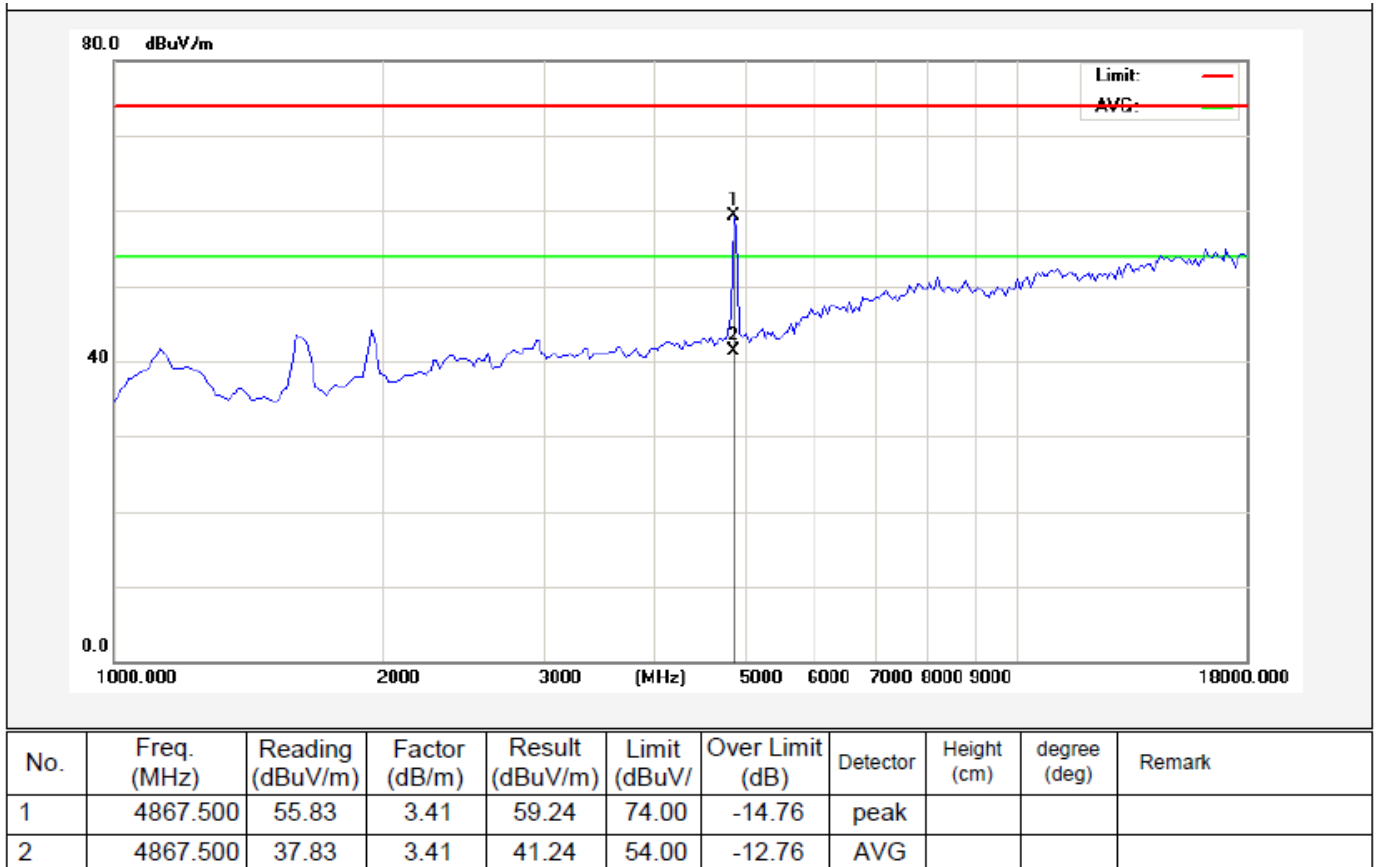


Operation Mode: TX / CH High
Temperature: 25°C
Humidity: 50 % RH

Test Date: Jul.24, 2013
Tested by: Rock Zeng
Polarity: Horizontal

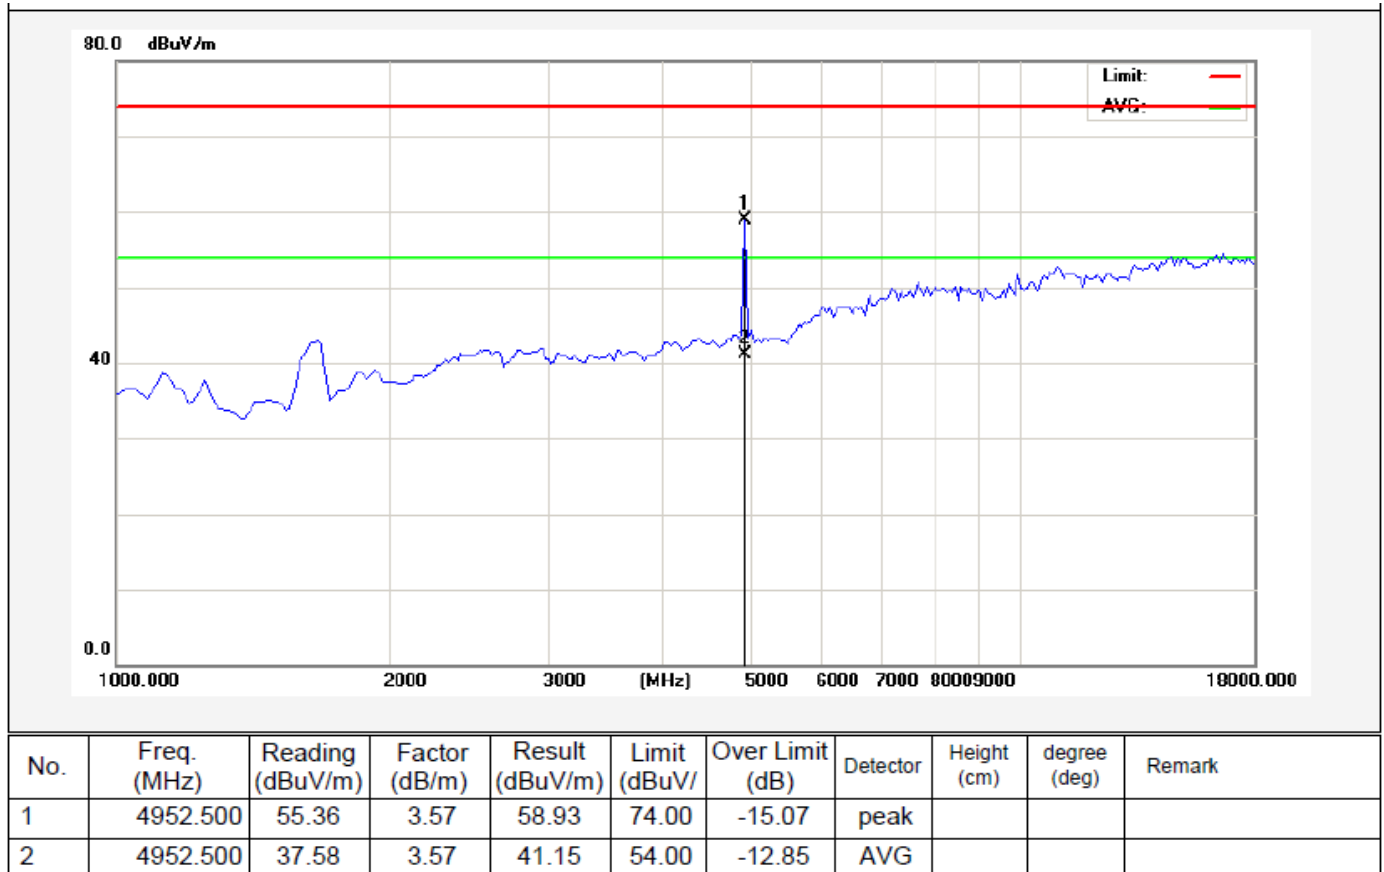

Operation Mode: TX / CH High
Temperature: 25°C
Humidity: 50 % RH

Test Date: Jul.24, 2013
Tested by: Rock Zeng
Polarity: Vertical

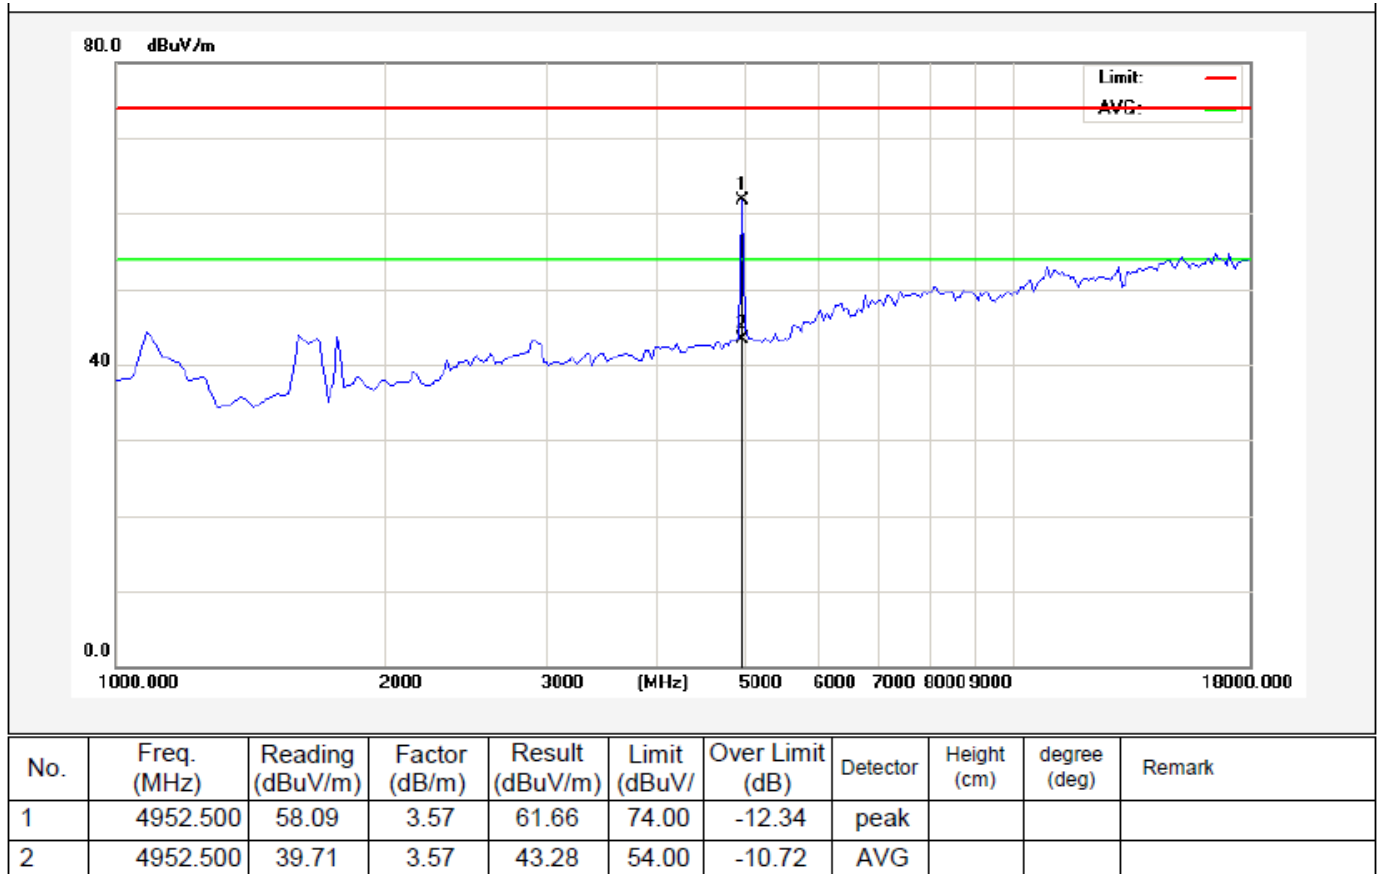


5. CHANNEL SEPARATION TEST

5.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

5.2 Test SET-UP



5.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

5.4 Test Results

Product	: Bluetooth Headset	Test Mode	: CH Low ~ CH High
Test Item	: Frequency Separation	Temperature	: 24°C
Test Voltage	: DC 3.7V Battery	Humidity	: 55%RH
Test Result	: PASS		


Channel	Frequency (MHz)	Separation Read Value (kHz)	Limit (kHz)	Modulation Mode
Low	2401	1002	798	GFSK
Mid	2441	1002	798	GFSK
High	2480	1002	846	GFSK
Low	2401	1008	828	π /4DQPSK
Mid	2441	1008	844	π /4DQPSK
High	2480	1002	844	π /4DQPSK
Low	2401	1008	828	8DPSK
Mid	2441	1008	844	8DPSK
High	2480	1002	844	8DPSK

Remark:

1. The limit of modulation (π /4DQPSK, 8DPSK) is 2/3 of 20dB BW;

Modulation Mode: GFSK

CH Low

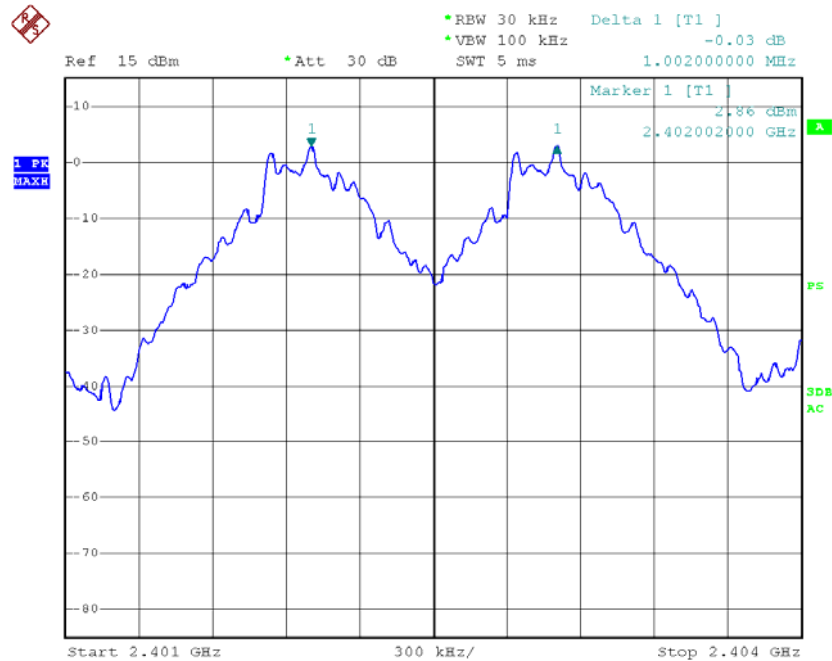


Date: 23.JUL.2013 15:44:45

CH Mid




Date: 23.JUL.2013 15:43:57

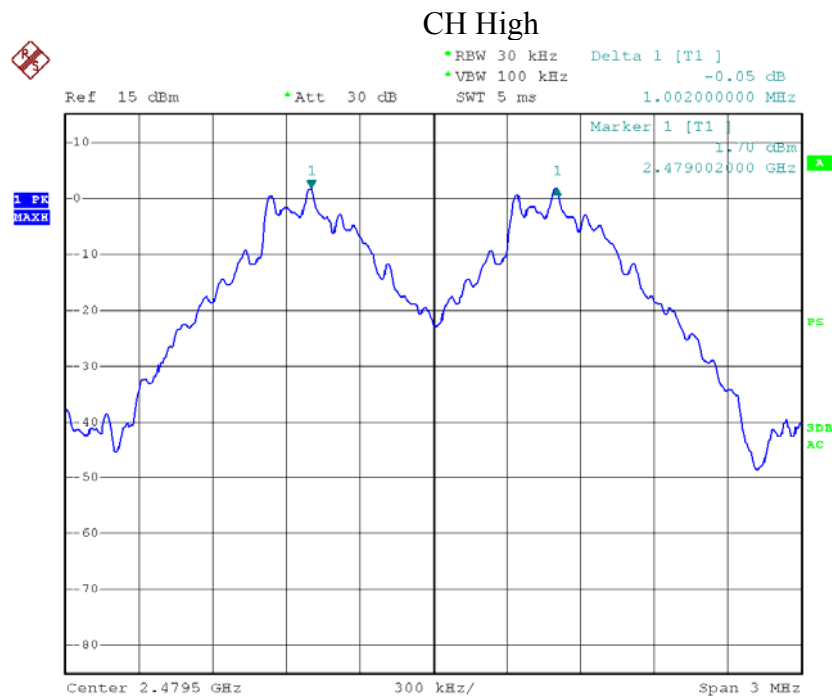


Date: 23.JUL.2013 15:42:49

Modulation Mode: $\pi/4$ DQPSK & 8DPSK

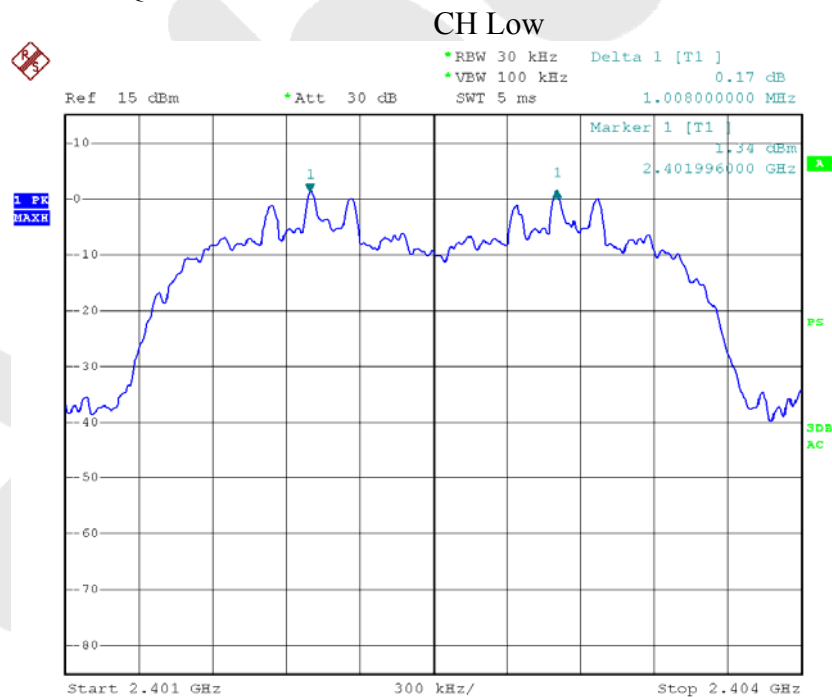


Date: 23.JUL.2013 15:39:51

CH Mid

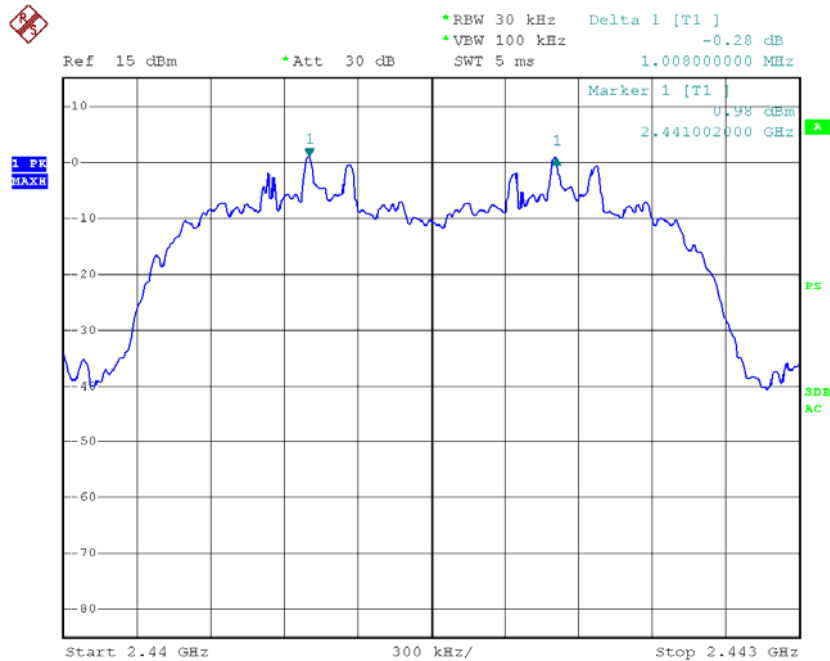

Date: 23.JUL.2013 15:40:43

CH High

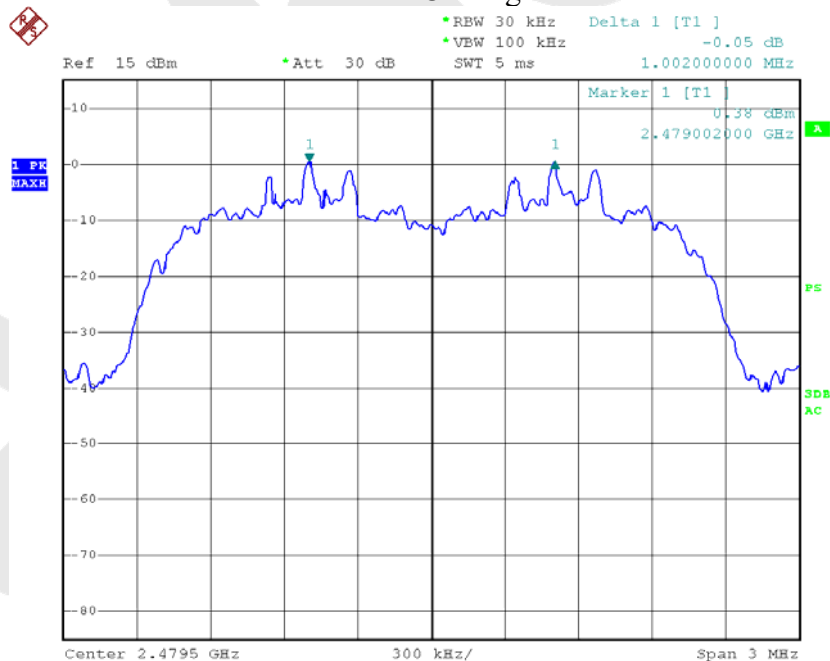


Date: 23.JUL.2013 15:41:40

6. 20DB BANDWIDTH TEST

6.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

6.2 Test SET-UP



6.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A


6.4 Test Results

Product	: Bluetooth Headset	Test Mode	: CH Low ~ CH High
Test Item	: 20dB BW	Temperature	: 24℃
Test Voltage	: DC 3.7V Battery	Humidity	: 55%RH
Test Result	: PASS		


Channel	Frequency (MHz)	20dB Down BW(kHz)	Modulation Mode
Low	2401	798	GFSK
Mid	2441	798	GFSK
High	2480	846	GFSK
Low	2401	1242	π /4DQPSK
Mid	2441	1266	π /4DQPSK
High	2480	1266	π /4DQPSK
Low	2401	1242	8DPSK
Mid	2441	1266	8DPSK
High	2480	1266	8DPSK

Remark: The results of modulations π /4DQPSK and 8DPSK are the same.


Modulation Mode: GFSK

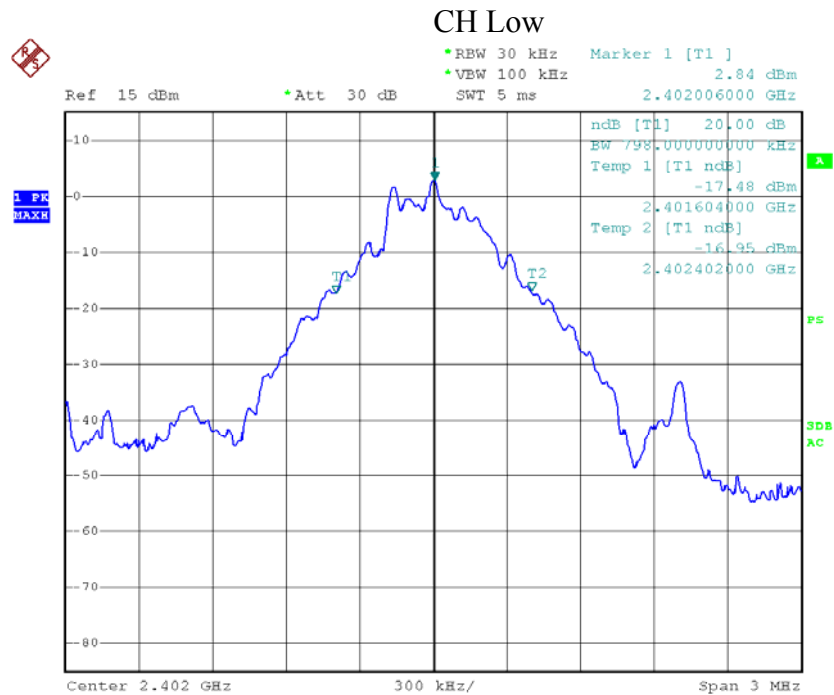

Date: 23.JUL.2013 15:19:19

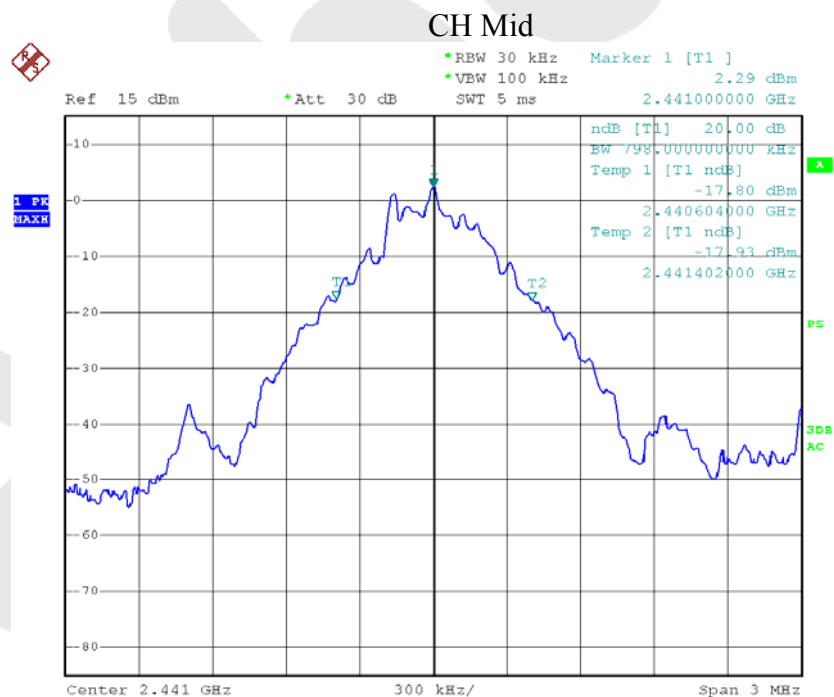


Date: 23.JUL.2013 15:19:44

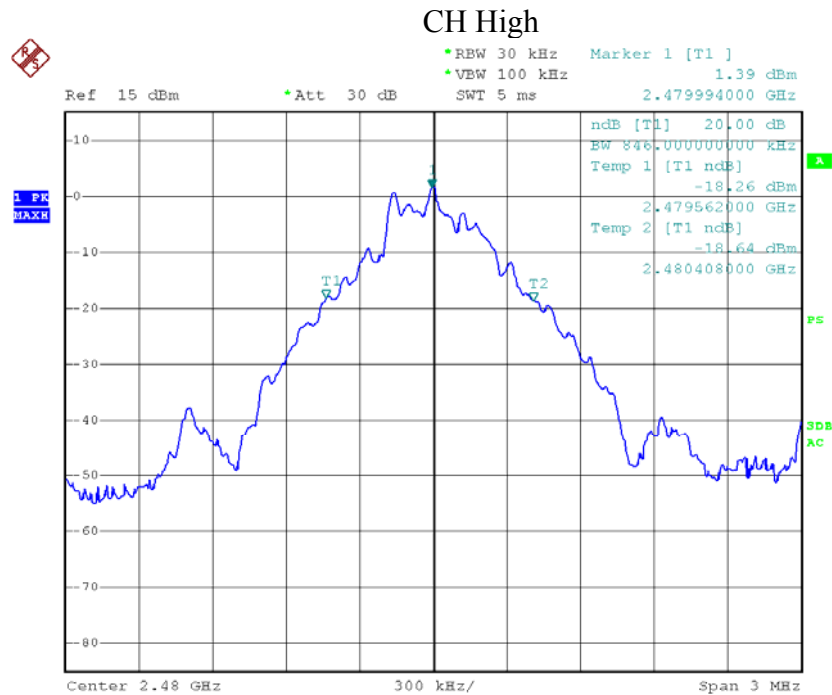


Date: 23.JUL.2013 15:20:04


Modulation Mode: π /4DQPSK & 8DPSK

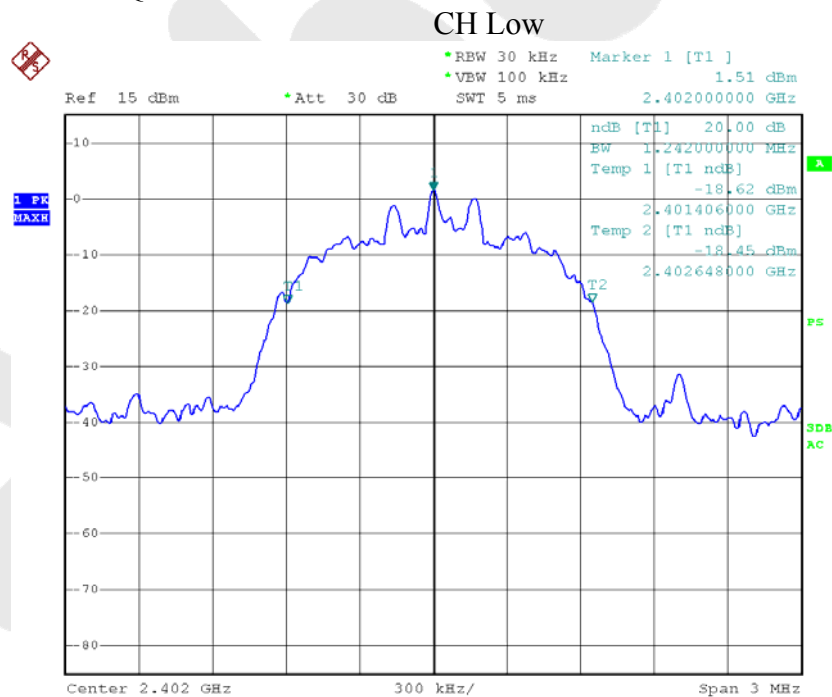

Date: 23.JUL.2013 15:16:54

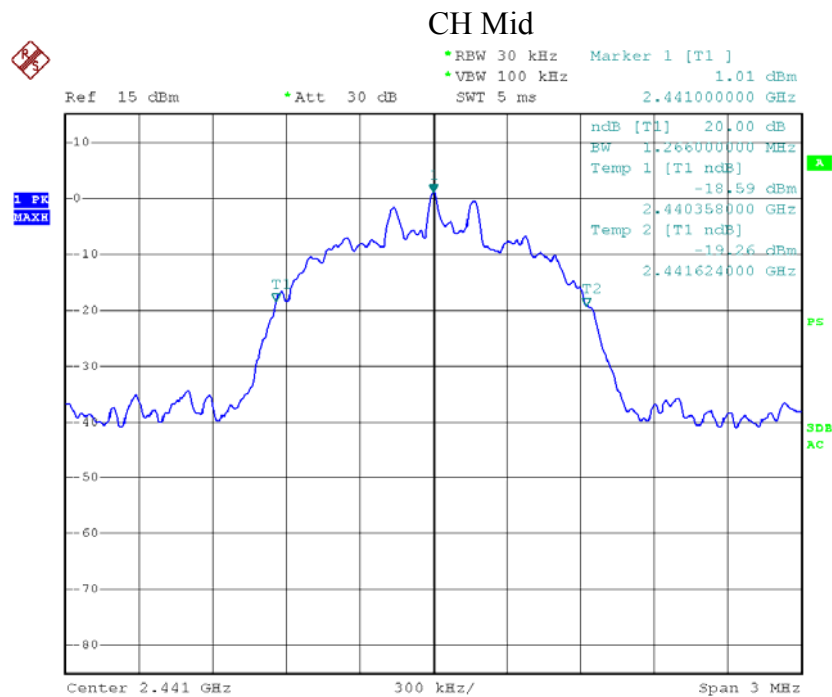

Date: 23.JUL.2013 15:17:56

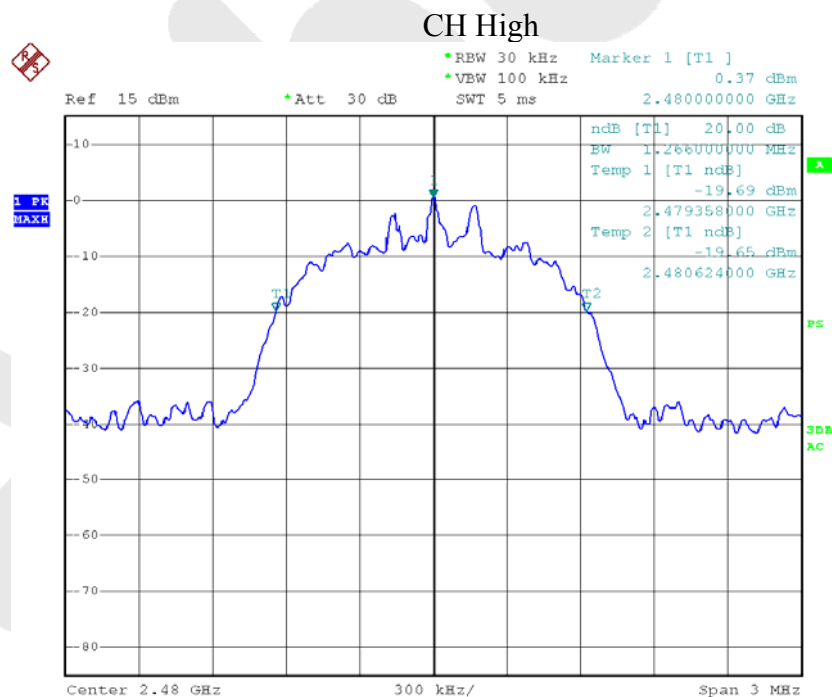


Date: 23.JUL.2013 15:18:16

7. QUANTITY OF HOPPING CHANNEL TEST

7.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

7.2 Test SET-UP




7.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A


7.4 Test Results

Product	: Bluetooth Headset	Test Mode	: CH Low ~ CH High
Test Item	: Number of Hopping Frequency	Temperature	: 24℃
Test Voltage	: DC 3.7V Battery	Humidity	: 55%RH
Test Result	: PASS		

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480	79	> 15

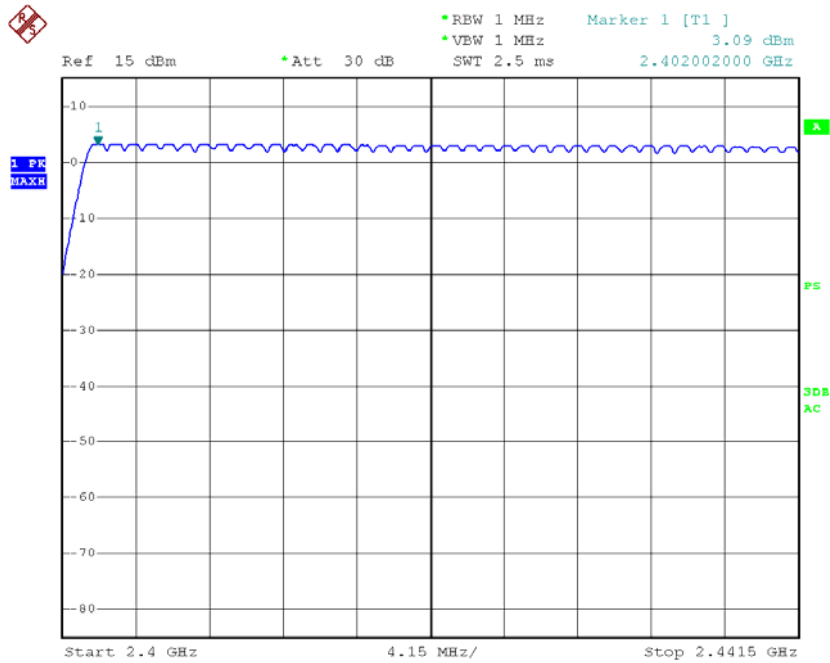

Date: 23.JUL.2013 15:45:47

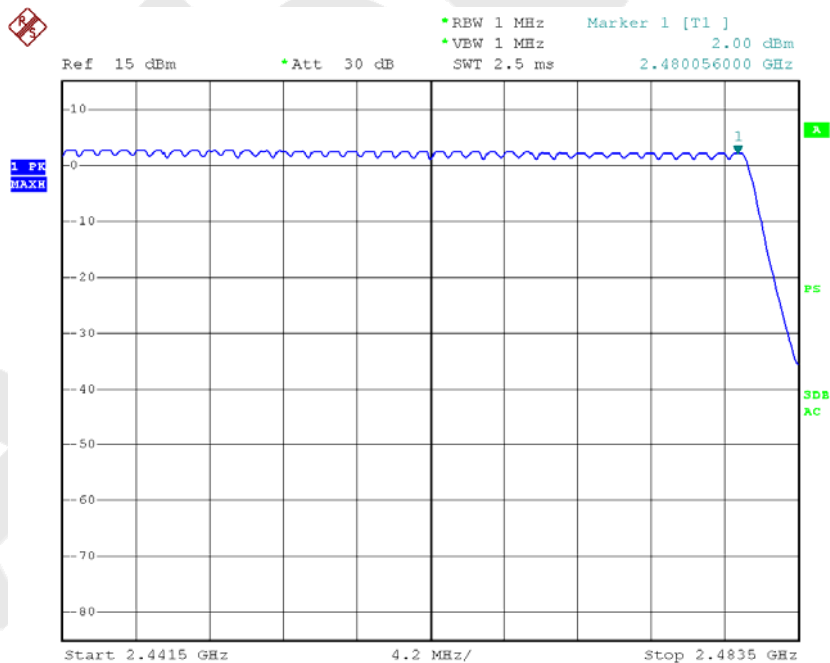


Date: 23.JUL.2013 15:46:37

8. DWELL TIME TEST

8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

8.2 Test SET-UP



8.3 Test Equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

8.4 Test Results

Product	: Bluetooth Headset	Test Mode	: CH Low ~ CH High
Test Item	: Time of Occupancy	Temperature	: 24℃
Test Voltage	: DC 3.7V Battery	Humidity	: 55%RH
Test Result	: PASS		


Channel	Pulse width (ms)	Time slot length(ms)	Dwell time (ms)	Limit (ms)
Low Channel	0.550	time slot length *1600/2 /79 * 31.6	176.00	400
Mid Channel	1.810	time slot length *1600/4 /79 * 31.6	289.60	400
High Channel	3.070	time slot length *1600/6 /79 * 31.6	327.47	400

Low Channel

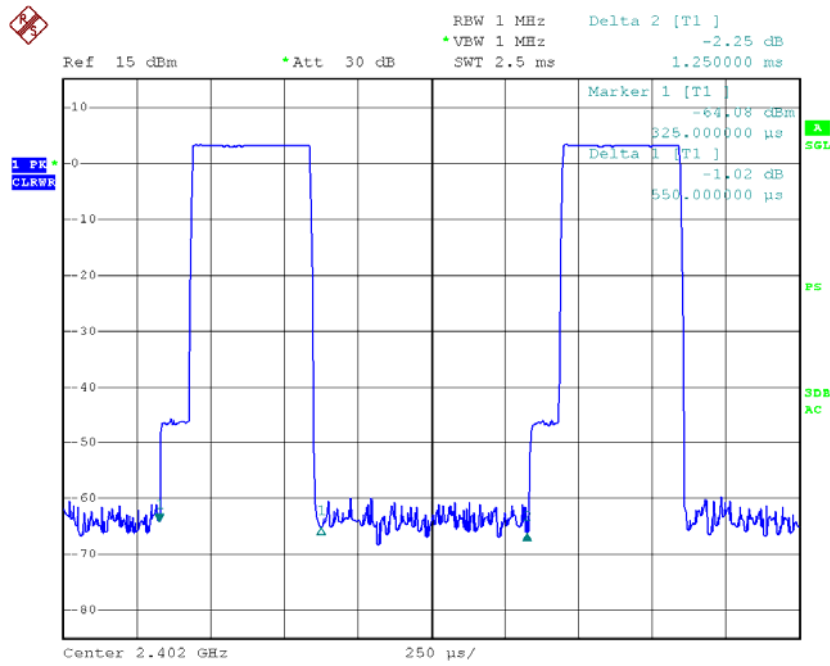


Date: 23.JUL.2013 15:48:19

Mid Channel

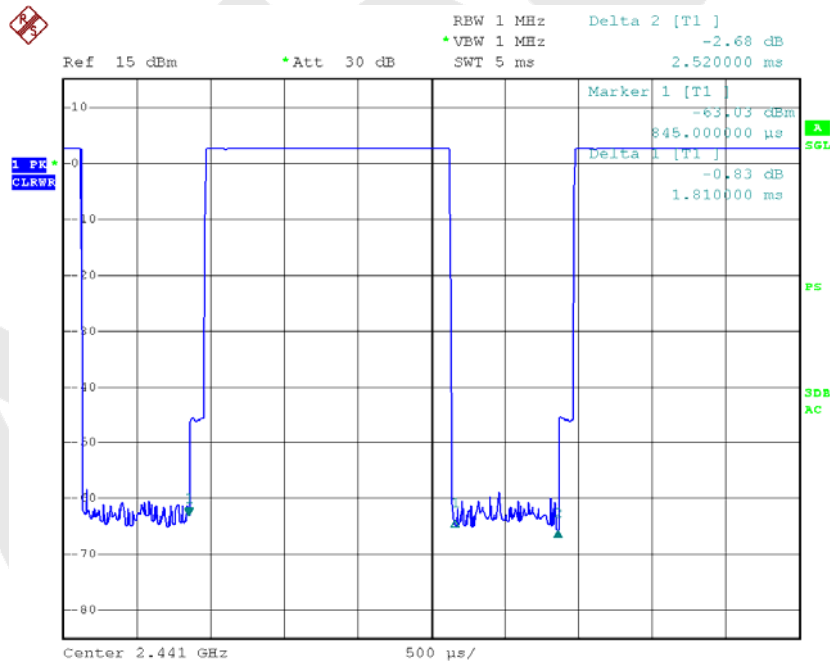

Date: 23.JUL.2013 15:49:49

High Channel

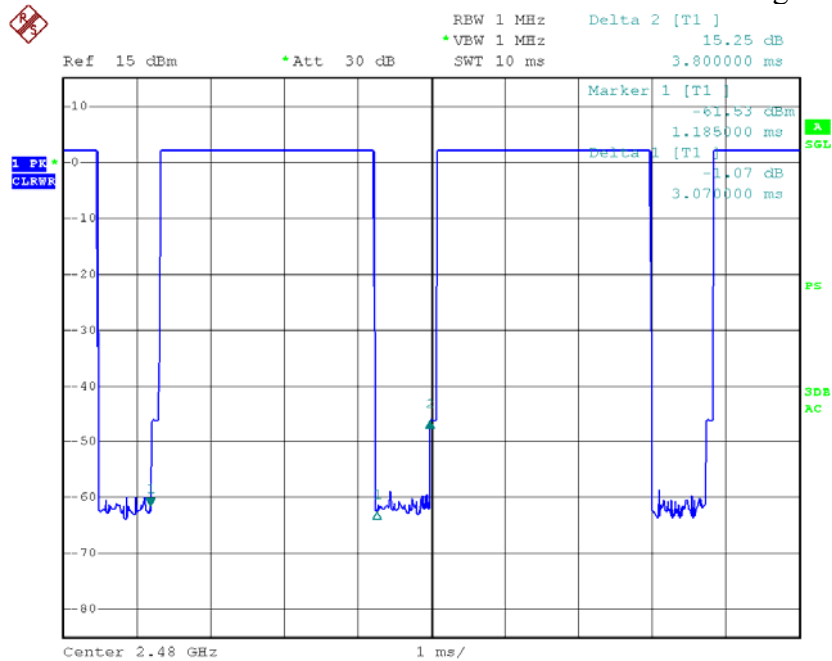


Date: 23.JUL.2013 15:51:12

9. MAXIMUM PEAK OUTPUT POWER TEST

9.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

9.2 Test SET-UP



9.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A


9.4 Test Results

Product : Bluetooth Headset Test Mode : CH Low ~ CH High
Test Item : Max. peak output power Temperature : 24°C
Test Voltage : DC 3.7V Battery Humidity : 55%RH
Test Result : PASS


Channel Frequency (MHz)	Peak Power output(mW)	Peak Power output(dBm)	Peak Power Limit(mW)	Results	Modulation
2402	2.25	3.52	125	PASS	GFSK
2441	1.95	2.90	125	PASS	GFSK
2480	1.69	2.27	125	PASS	GFSK
2402	1.91	2.80	125	PASS	$\pi/4$ DQPSK
2441	1.68	2.24	125	PASS	$\pi/4$ DQPSK
2480	1.45	1.61	125	PASS	$\pi/4$ DQPSK
2402	1.91	2.80	125	PASS	8DPSK
2441	1.68	2.24	125	PASS	8DPSK
2480	1.45	1.61	125	PASS	8DPSK

Remark: The results of modulations $\pi/4$ DQPSK and 8DPSK are the same.


Modulation Mode: GFSK

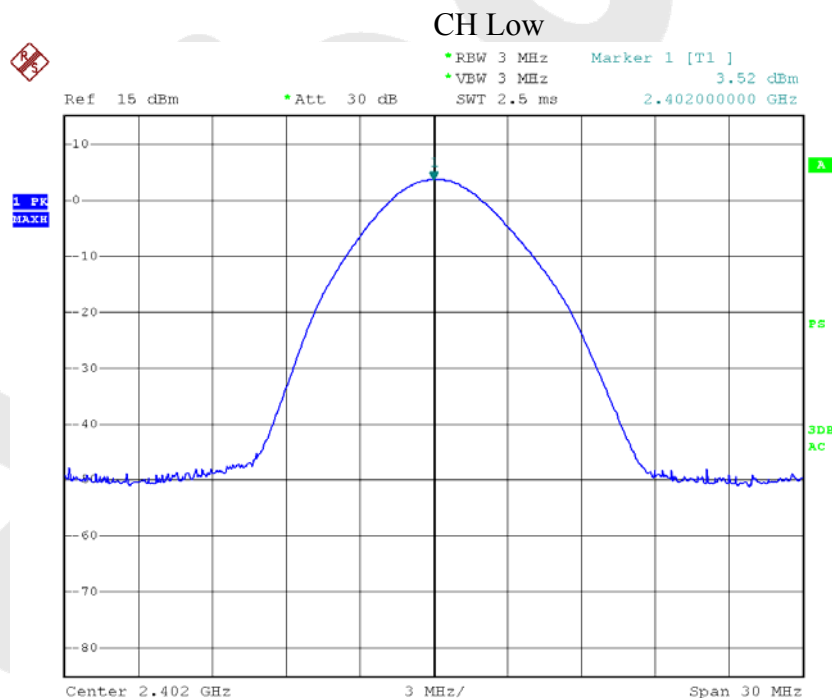

Date: 23.JUL.2013 15:11:39

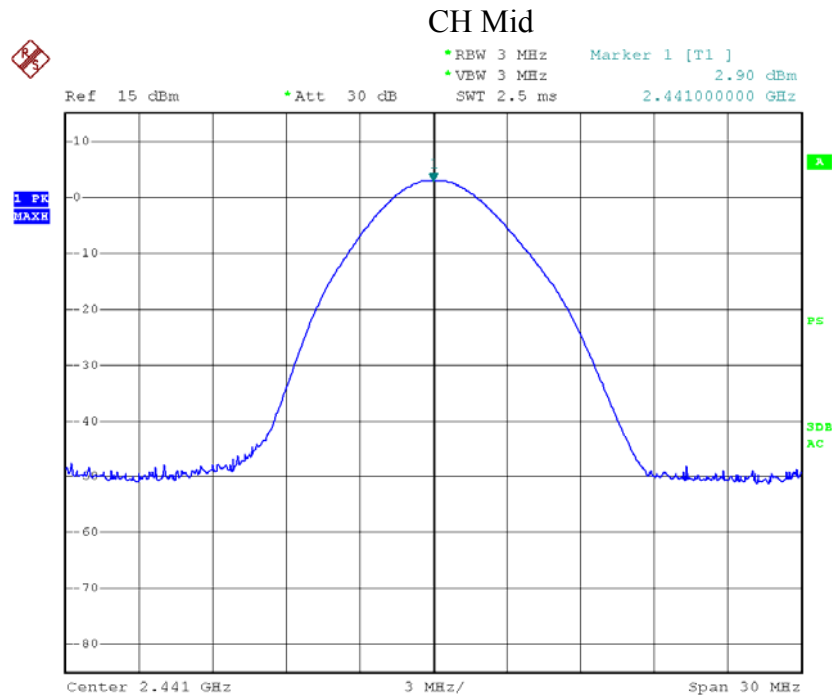


Date: 23.JUL.2013 15:12:05

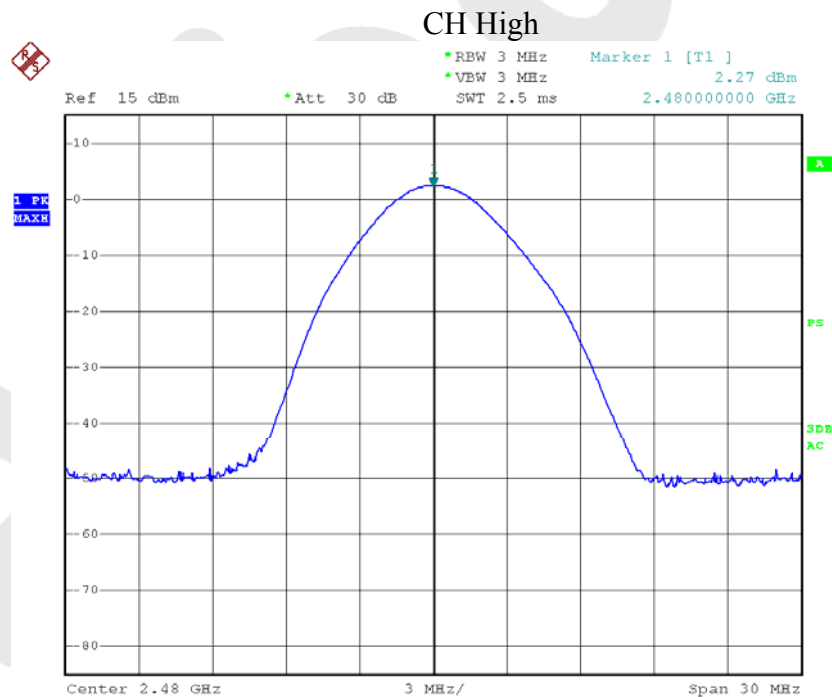


Date: 23.JUL.2013 15:12:23


Modulation Mode: $\pi/4$ DQPSK & 8DPSK

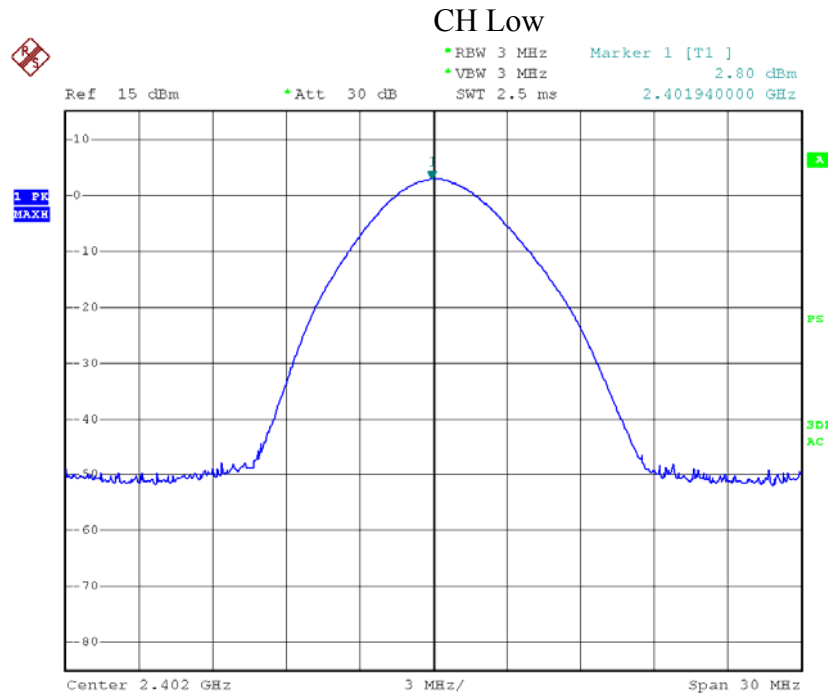

Date: 23.JUL.2013 15:13:10

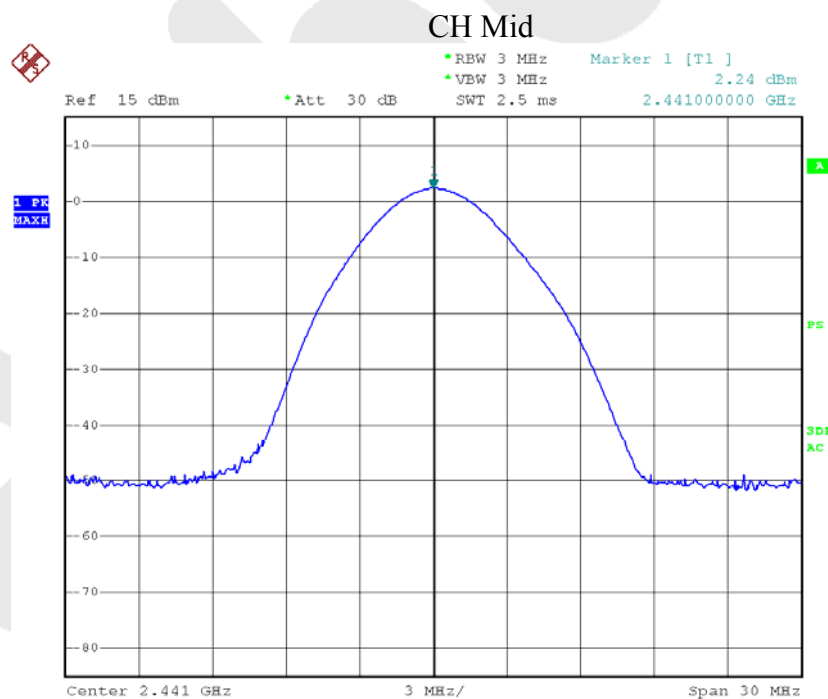

Date: 23.JUL.2013 15:13:29

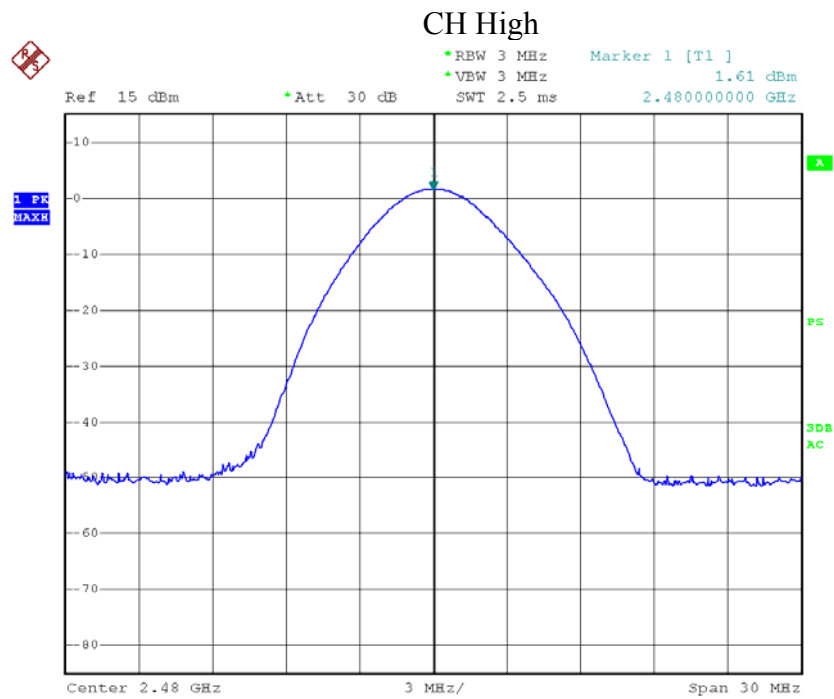

Date: 23.JUL.2013 15:13:50

10. BAND EDGE TEST

10.1 Measurement Procedure

1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

10.2 Test SET-UP

Same as the radiated emission test.

10.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

10.4 Test Results

Pass.

Please refer the following data.

Product	: Bluetooth Headset	Test Mode	: CH Low ~ CH High
Test Item	: Band edge	Temperature	: 24°C
Test Voltage	: DC 3.7V Battery	Humidity	: 55%RH
Test Result	: PASS		


1. Conducted Test

Frequency (MHz)	Peak Power Output(dBm)	Emission read Value(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)	Modulation
<2400	3.22	-34.87	38.09	>20dBc	GFSK
	1.67	-38.96	40.63	>20dBc	$\pi/4$ DQPSK
	1.67	-38.96	40.63	>20dBc	8DPSK
>2483.5	2.09	-52.53	54.62	>20dBc	GFSK
	0.50	-53.41	53.91	>20dBc	$\pi/4$ DQPSK
	0.50	-53.41	53.91	>20dBc	8DPSK


2. Radiated emission Test

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Modulation
		PK	AV	PK	AV	
<2400	H	56.96	44.44	74.00	54.00	GFSK
	V	62.17	48.24	74.00	54.00	GFSK
	H	60.04	48.14	74.00	54.00	$\pi/4$ DQPSK
	V	63.76	49.57	74.00	54.00	$\pi/4$ DQPSK
	H	60.04	48.14	74.00	54.00	8DPSK
	V	63.76	49.57	74.00	54.00	8DPSK
>2483.5	H	44.91	34.60	74.00	54.00	GFSK
	V	47.48	37.13	74.00	54.00	GFSK
	H	44.36	38.81	74.00	54.00	$\pi/4$ DQPSK
	V	49.61	40.55	74.00	54.00	$\pi/4$ DQPSK
	H	44.36	38.81	74.00	54.00	8DPSK
	V	49.61	40.55	74.00	54.00	8DPSK

Modulation Mode: GFSK

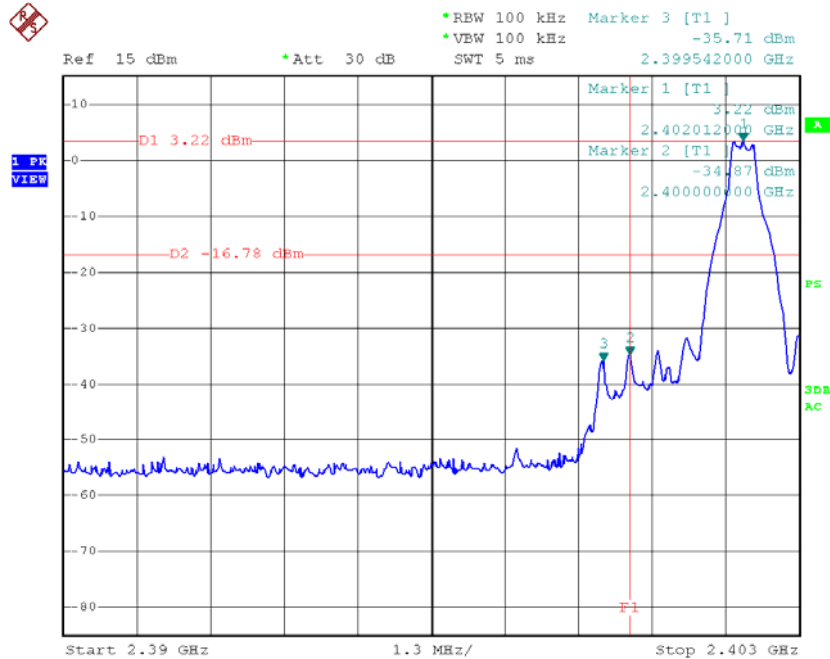


Date: 23.JUL.2013 15:23:51

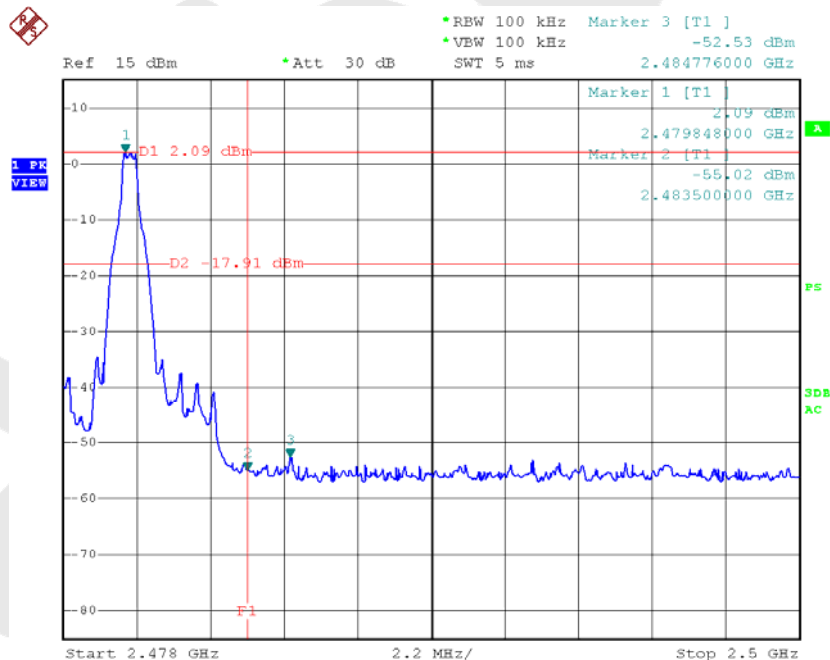


Date: 23.JUL.2013 15:25:19

Modulation Mode: $\pi/4$ DQPSK & 8DPSK

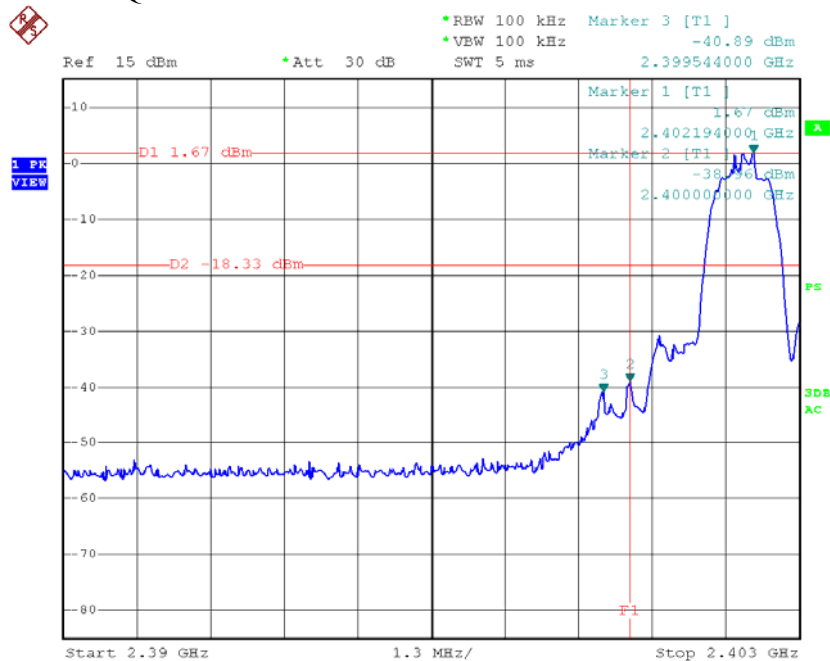

Date: 23.JUL.2013 15:35:21

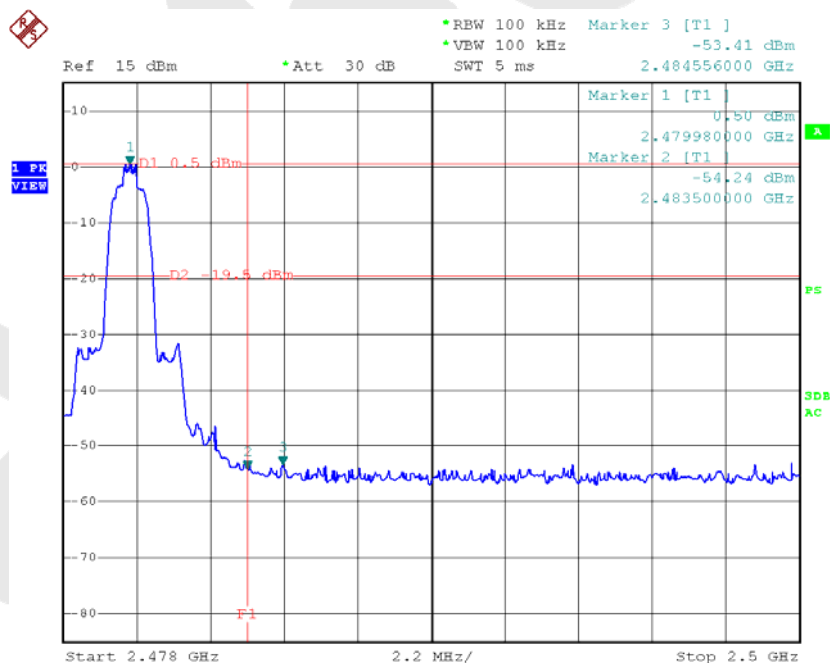

Date: 23.JUL.2013 15:26:46

11. ANTENNA APPLICATION

11.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

11.2 Result


The EUT's antenna used a chip antenna and integrated on PCB, The antenna's gain is 0dBi and meets the requirement.


12. PHOTOGRAPH

12.1 Photo of Conducted Emission Test



12.2 Photo of Radiation Emission Test

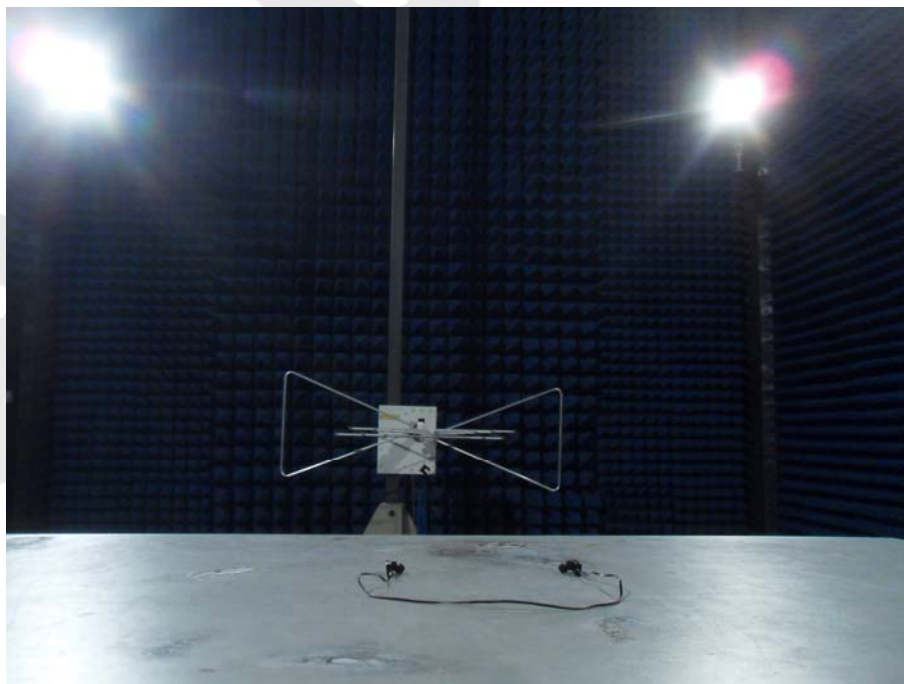

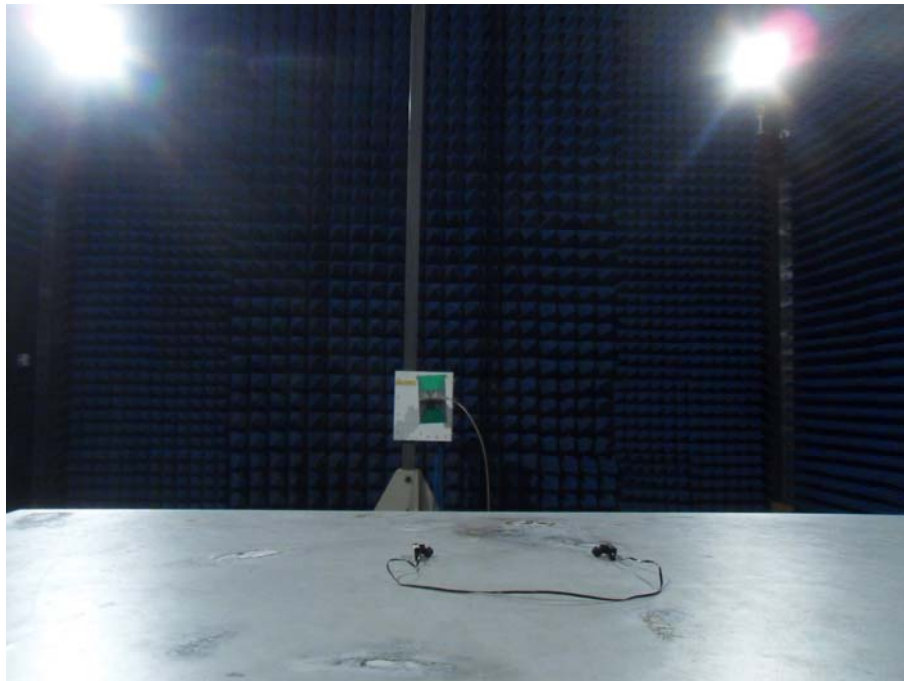

APPENDIX I (External Photos)

Figure 1

The EUT-Overall View



Figure 2

The EUT-Front View



APPENDIX II (Internal Photos)

Figure 3

The EUT-Inside View

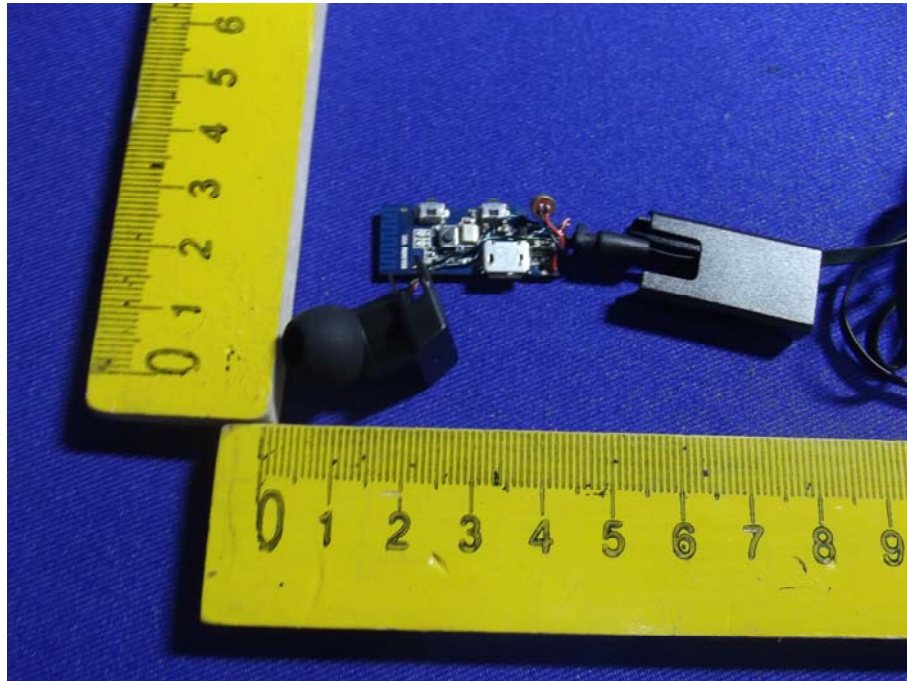


Figure 4

PCB of the EUT-Front View

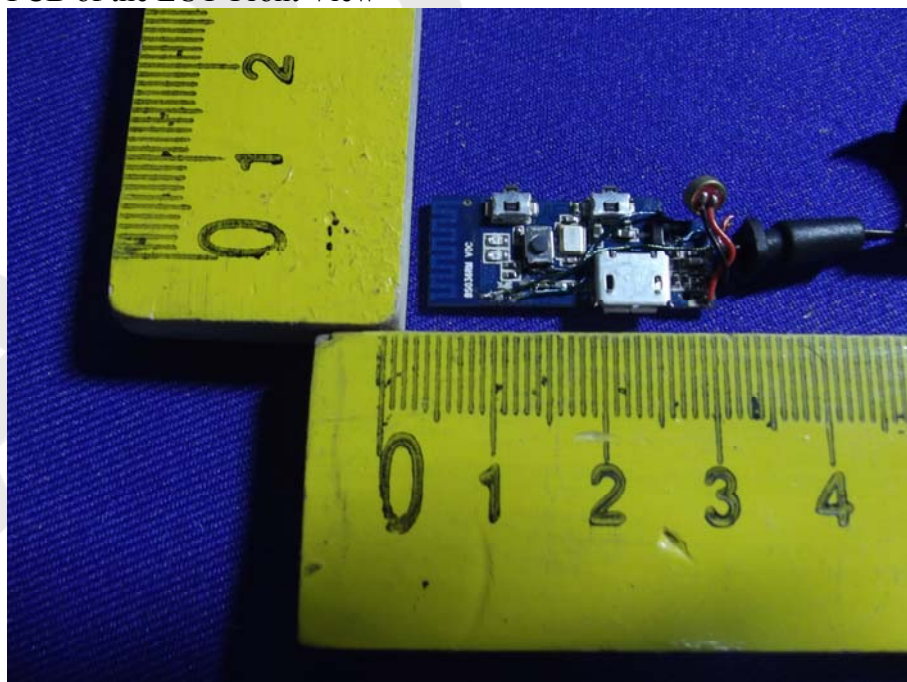


Figure 5
PCB of the EUT-Back View

