


ENGINEERING TEST REPORT



**Harmony 1000 - Remote
MODEL NO.: R-RJ13**

FCC ID: TOB-HZM2102

Applicant:

Logitech Inc. - Canada
2355 Skymark Avenue, Suite 200
Mississauga, ON
Canada L4W 4Y6

Tested in Accordance With

**FCC Part 15, Subpart C, Section 15.249
Low Power Transmitters
Operating in the Frequency Band 902 - 928 MHz**

UltraTech's File No.: LOG-050F15C249

This Test report is Issued under the Authority of
Tri M. Luu, Professional Engineer,
Vice President of Engineering
UltraTech Group of Labs

Date: October 11, 2006



Report Prepared by: Mr. Dan Huynh

Tested by: Mr. Hung Trinh, EMC/RFI Technician

Issued Date: October 11, 2006

Test Dates: September 26, 2006

- *The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- *This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4
Tel.: (905) 829-1570 Fax.: (905) 829-8050

Website: www.ultratech-labs.com, Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com



0685



31040/SIT



C-1376



46390-2049



200093-0



SL2-IN-E-1119R

TABLE OF CONTENTS

EXHIBIT 1.	INTRODUCTION.....	1
1.1.	SCOPE.....	1
1.2.	RELATED SUBMITTAL(S)/GRANT(S).....	1
1.3.	NORMATIVE REFERENCES	1
EXHIBIT 2.	PERFORMANCE ASSESSMENT	2
2.1.	CLIENT INFORMATION	2
2.2.	EQUIPMENT UNDER TEST (EUT) INFORMATION	2
2.3.	EUT'S TECHNICAL SPECIFICATIONS	3
2.4.	LIST OF EUT'S PORTS	3
2.5.	ANCILLARY EQUIPMENT	3
2.6.	GENERAL TEST SETUP	3
EXHIBIT 3.	EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS.....	5
3.1.	CLIMATE TEST CONDITIONS	5
3.2.	OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS	5
EXHIBIT 4.	SUMMARY OF TEST RESULTS.....	6
4.1.	LOCATION OF TESTS	6
4.2.	APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS	6
4.3.	MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES	6
EXHIBIT 5.	MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS	7
5.1.	TEST PROCEDURES.....	7
5.2.	MEASUREMENT UNCERTAINTIES.....	7
5.3.	MEASUREMENT EQUIPMENT USED.....	7
5.4.	ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER	7
5.5.	AC/DC POWER LINE CONDUCTED EMISSIONS [47 CFR 15.107(a) & 15.207].....	8
5.6.	20 dB BANDWIDTH	14
5.7.	FUNDAMENTAL FIELD STRENGTH AND HARMONIC EMISSIONS (RADIATED @ 3 METERS) [47 CFR 15.249(a), 15.209 & 15.205].....	16
EXHIBIT 6.	MEASUREMENT UNCERTAINTY	18
6.1.	LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY	18
6.2.	RADIATED EMISSION MEASUREMENT UNCERTAINTY	19

EXHIBIT 1. INTRODUCTION

1.1. SCOPE

Reference:	FCC Part 15, Subpart C, Section 15.249
Title:	Code of Federal Regulations (CFR), Title 47 – Telecommunication, Part 15
Purpose of Test:	To gain FCC Certification Authorization for Low Power Licensed-Exempt Transmitters operating in the Frequency Band 902 - 928 MHz.
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
Environmental Classification:	Residential

1.2. RELATED SUBMITTAL(S)/GRANT(S)

None.

1.3. NORMATIVE REFERENCES

Publication	Year	Title
FCC CFR Parts 0-19	2005	Code of Federal Regulations – Telecommunication
ANSI C63.4	2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
CISPR 22 +A1 EN 55022	2003-04-10 2004-10-14 2003	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
CISPR 16-1-1	2003	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus
CISPR 16-2-1	2003	Specification for radio disturbance and immunity measuring apparatus and methods. Part 2-1: Conducted disturbance measurement
CISPR 16-2-3	2003	Specification for radio disturbance and immunity measuring apparatus and methods. Part 2-3: Radiated disturbance measurement

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1. CLIENT INFORMATION

APPLICANT	
Name:	Logitech Inc.
Address:	2355 Skymark Avenue, suite 200 Mississauga, ON L4W 4Y6 Canada L4W 4Y6
Contact Person:	Samuel Asare Phone #: 905-273-4571 EXT: 2443 Fax #: 905-273-9789 Email Address: Samuel_asare@logitech.com

MANUFACTURER	
Name:	Wanlida Group of Companies
Address:	No. 618, Jiahe Rd. Xiamen, Fujian, China
Contact Person:	Linden Lin Phone #: 86-592-5700999 Ext. 8618 Fax #: 86-592-5701337 Email Address: Linden@malata.com

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name:	Logitech Inc. - Canada
Product Name:	Harmony 1000 - Remote
Model Name or Number:	R-RJ13
Serial Number:	Test Sample
Type of Equipment:	Low Power Transceiver
Input Power Supply Type:	N/A
Primary User Functions of EUT:	Remote control for home entertainment.

2.3. EUT’S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	Portable
Intended Operating Environment:	Residential
Power Supply Requirement:	3.7 V Li-ion Rechargeable Battery or 120 VAC 60 Hz via AC Adaptor to base station rated at 8 VDC
RF Output Power Rating:	85.52 dBµV/m Peak at 3m distance
Operating Frequency Range:	908.42 MHz
RF Output Impedance:	50 Ohms
20 dB Bandwidth:	65.3 kHz
Modulation Type:	FSK
Emission Designation:	F1D
Oscillator Frequencies:	32 MHz
Antenna Connector Type:	Integral
Antenna Description:	Manufacturer: Xiamen YongHuaLi Spring HardWare Co..LTD Type: Monopole Model: Cognac-Zwave Antenna Frequency Range: 903.42 – 913.42 MHz In/Out Impedance: 50 Ohms Gain: 3dBi

2.4. LIST OF EUT’S PORTS


Port Number	EUT’s Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	Mini USB	1	Mini USB	Shielded
2	DC Power (base station)	1	Power Jack	Non-shielded

2.5. ANCILLARY EQUIPMENT

HP Pavilion a000 PC, S/N: MXK346144B


2.6. GENERAL TEST SETUP

Transmitter Tests

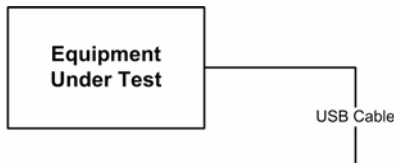

Power Line Conducted Emissions

Test Configuration 1: EUT in base station (charging mode)

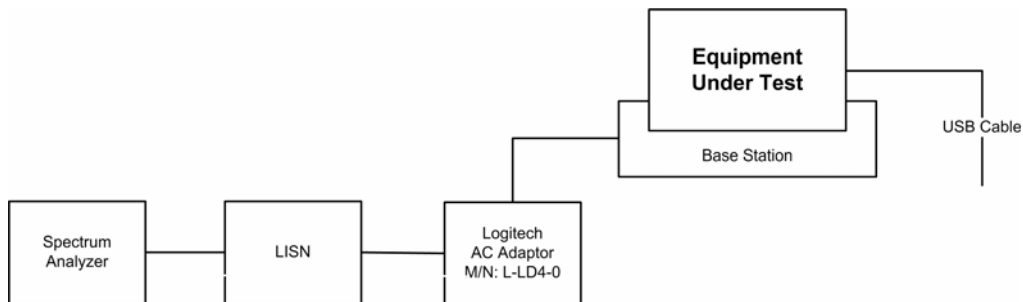

Test Configuration 2: EUT connected to PC (communication mode)

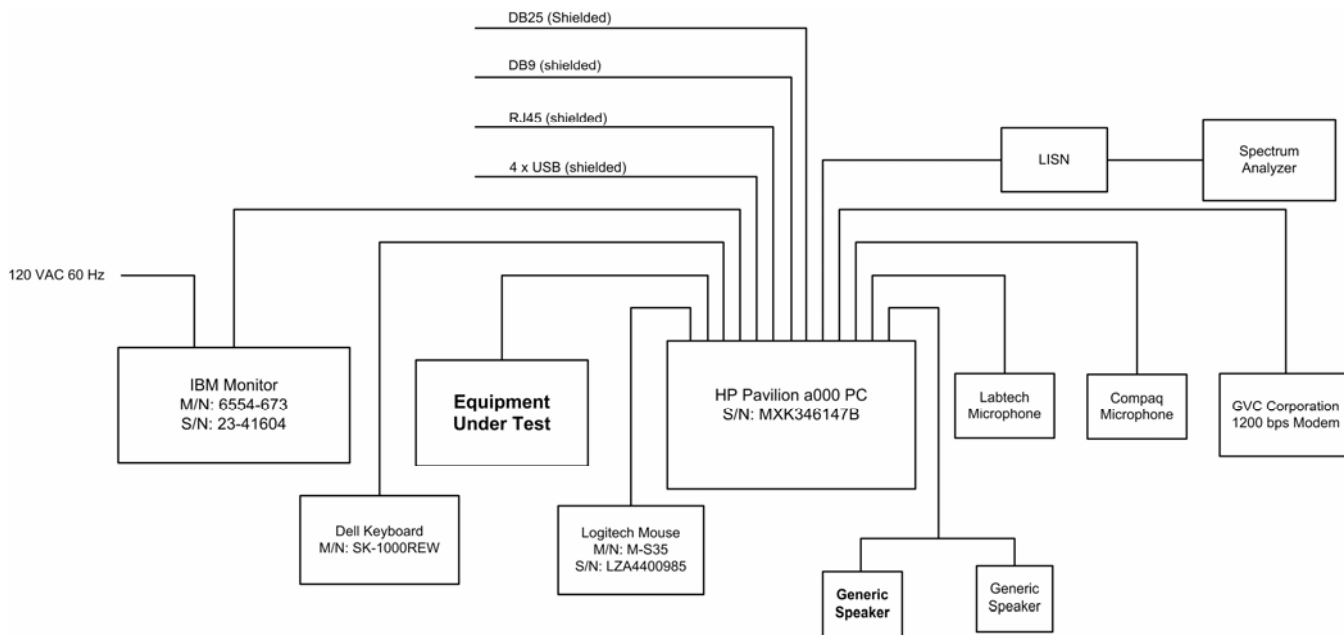


EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	102 kPa
Power input source:	3.7 V Li-ion Rechargeable Battery or 120 VAC 60 Hz via AC Adaptor to base station rated at 8 VDC

3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS

Operating Modes:	EUT was configured to transmit continuously for emissions measurements.
Special Test Software:	None
Special Hardware Used:	None
Transmitter Test Antenna:	The EUT is tested with the antenna fitted in a manner typical of normal intended use as integral antenna equipment.

Transmitter Test Signals:	
Frequency Band(s):	908.42 MHz
Test Frequency(ies):	908.42 MHz
Transmitter Wanted Output Test Signals:	
• RF Power Output (measured maximum output power):	85.52 dBµV/m Peak at 3m distance
• Normal Test Modulation:	FSK
• Modulating signal source:	Internal

EXHIBIT 4. SUMMARY OF TEST RESULTS

4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Power Line Conducted Emissions were performed in UltraTech's shielded room, 24'(L) by 16'(W) by 8'(H).
- Radiated Emissions were performed at the Ultratech's 3-10 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario. This test site has been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville Open Field Test Site has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049). Last Date of Site Calibration: Jan. 10, 2006.

4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC Section(s)	Test Requirements	Compliance (Yes/No)
15.107(a) & 15.207	Power Line Conducted Emissions	Yes
--	20 dB Bandwidth	Yes
15.249(a), 15.209, 15.205	Transmitter Radiated Emissions, Harmonic Emissions	Yes

4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None.

EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

5.1. TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in ANSI C63.4 and ULTR-P001-2004.

5.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document LAB 34 with a confidence level of 95%. Please refer to Exhibit 6 for Measurement Uncertainties.

5.3. MEASUREMENT EQUIPMENT USED

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1.

5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER

Remote control for home entertainment.

5.5. POWER LINE CONDUCTED EMISSIONS [47 CFR 15.107(a) & 15.207]

5.5.1. Limits

The equipment shall meet the limits of the following table:

Test Frequency Range (MHz)	Class B Limits		Measuring Bandwidth
	Quasi-Peak (dB μ V)	Average (dB μ V)	
0.15 to 0.5	66 to 56*	56 to 46*	RBW = 9 kHz VBW \geq 9 kHz for QP VBW = 1 Hz for Average
0.5 to 5	56	46	RBW = 9 kHz VBW \geq 9 kHz for QP VBW = 1 Hz for Average
5 to 30	60	50	RBW = 9 kHz VBW \geq 9 kHz for QP VBW = 1 Hz for Average

* Decreasing linearly with logarithm of frequency.

5.5.2. Method of Measurements

Refer to Ultratech Test Procedures, File # ULTR P001-2004 and ANSI C63.4 for measurement methods

5.5.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz
Transient Limiter	Hewlett Packard	11947A	310701998	9 kHz – 200 MHz 10 dB attenuation
L.I.S.N.	EMCO	3825/2	89071531	9 kHz – 200 MHz 50 Ohms / 50 μ H
RF Shielded Chamber	RF Shielding	--	--	--

5.5.4. Test Data

Frequency (MHz)	RF Level (dBµV)	Receiver Detector (QP/AVG)	QP Limit (dBµV)	AVG Limit (dBµV)	Margin (dB)	Pass/Fail	Line Tested (L1/L2)
Test Configuration 1: EUT in base station (charging mode)							
18.287348	35.1	QP	60.0	50.0	-24.9	Pass	L1
18.287348	30.2	AVG	60.0	50.0	-19.8	Pass	L1
Test Configuration 2: EUT connected to PC (communication mode)							
13.857000	37.0	QP	60.0	50.0	-23.0	Pass	L2
13.857000	27.0	AVG	60.0	50.0	-23.0	Pass	L2
0.176310	49.5	QP	64.7	54.7	-15.2	Pass	L1
0.176310	45.4	AVG	64.7	54.7	-9.3	Pass	L1
15.258515	43.8	QP	60.0	50.0	-16.2	Pass	L1
15.258515	35.9	AVG	60.0	50.0	-14.1	Pass	L1
22.888420	34.2	QP	60.0	50.0	-25.8	Pass	L1
22.888420	26.7	AVG	60.0	50.0	-23.3	Pass	L1
0.176775	48.6	QP	64.6	54.6	-16.0	Pass	L2
0.176775	45.1	AVG	64.6	54.6	-9.5	Pass	L2
15.249378	42.9	QP	60.0	50.0	-17.1	Pass	L2
15.249378	35.2	AVG	60.0	50.0	-14.8	Pass	L2
22.882233	33.8	QP	60.0	50.0	-26.2	Pass	L2
22.882233	26.0	AVG	60.0	50.0	-24.0	Pass	L2

See the following plots for detailed measurements.


Plot 5.5.4.1: Power Line Conducted Emissions
 Line Tested: Line 1 (Charging mode)
 Line Voltage: 120 VAC 60 Hz



Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	AV Δ L2
1	18.287348	37.4	35.1	30.2	-19.8

START
 150 kHz

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 18.39 MHz
 26.09 dB μ V

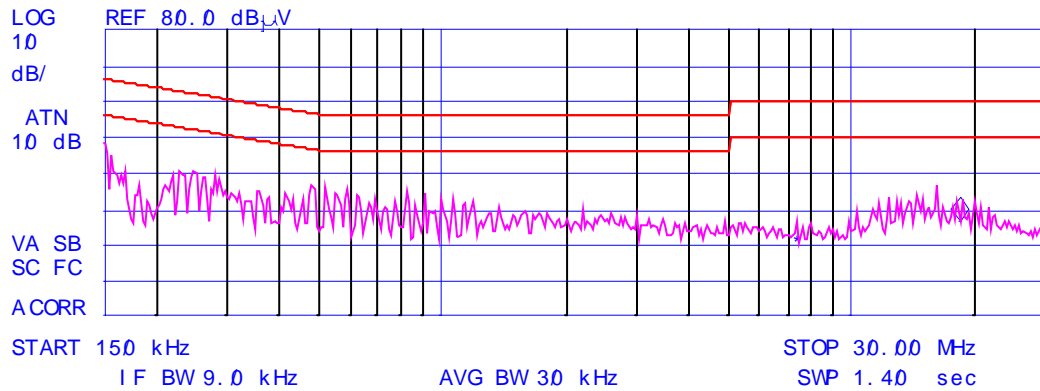


Plot 5.5.4.2: Power Line Conducted Emissions
 Line Tested: Line 2 (Charging mode)
 Line Voltage: 120 VAC 60 Hz



Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	AVΔL2
1	13.857000	43.5	37.0	27.0	-23.0

MARKER
 13.92 MHz
 31.98 dBμV

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 13.92 MHz
 31.98 dBμV

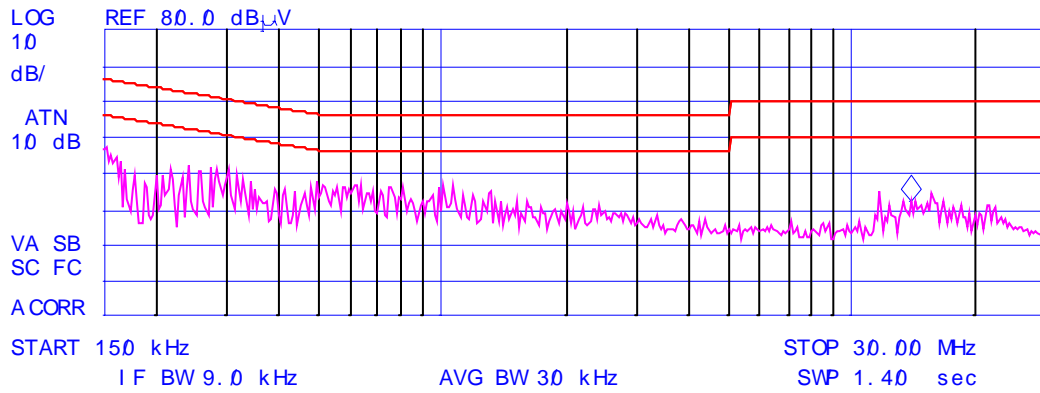


Plot 5.5.4.3: Power Line Conducted Emissions
 Line Tested: Line 1 (PC and EUT in communication mode)
 Line Voltage: 120 VAC 60 Hz

1/1

Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	AV Δ L2
1	0.176310	50.6	49.5	45.4	-9.3
2	15.258515	45.4	43.8	35.9	-14.1
3	22.888420	37.0	34.2	26.7	-23.3

SI GNAL NUMBER
 1

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 180 kHz
 47.02 dB μ V

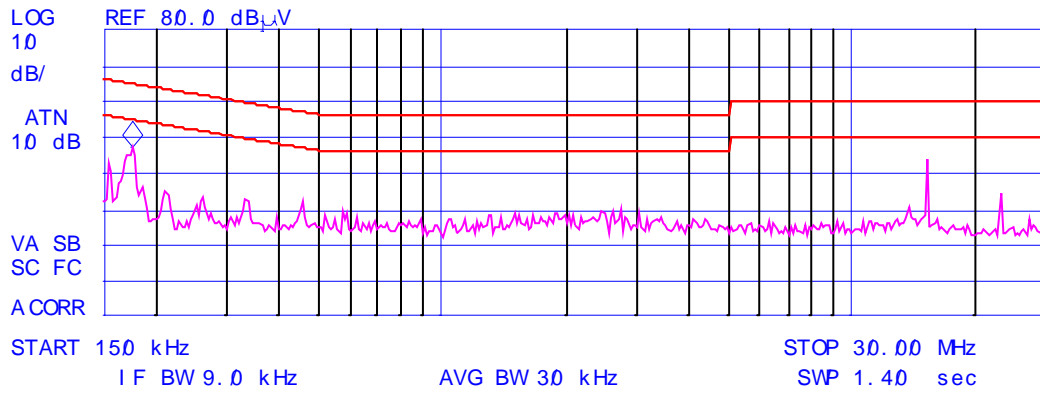


Plot 5.5.4.4: Power Line Conducted Emissions
 Line Tested: Line 2 (PC and EUT in communication mode)
 Line Voltage: 120 VAC 60 Hz

1/17

Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	AV Δ L2
1	0.176775	52.7	48.6	45.1	-9.6
2	15.249378	45.3	42.9	35.2	-14.8
3	22.882233	36.8	33.8	26.0	-24.0

SI GNAL NUMBER
 1

ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 180 kHz
 46.97 dB μ V

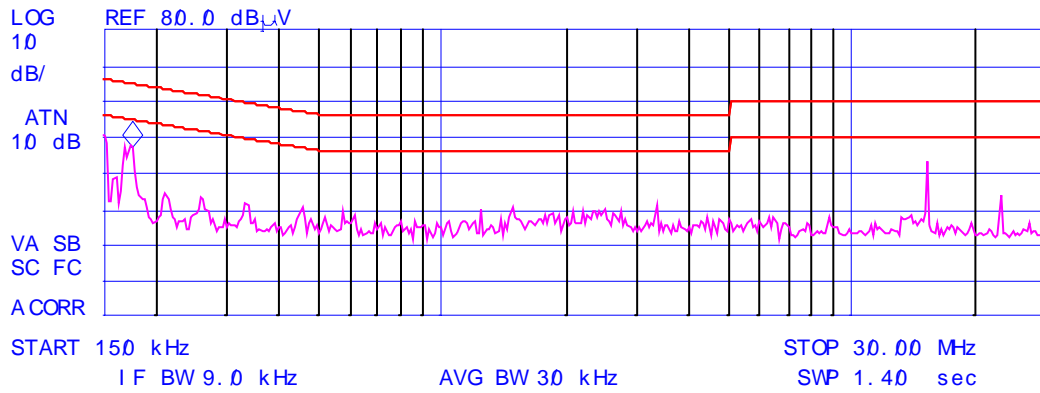

5.6. 20 dB BANDWIDTH

5.6.1. Limits

No limit. Test is performed for information only.


5.6.2. Method of Measurements

The transmitter output was loosely coupled to the spectrum analyzer through a receiving antenna and the bandwidth of the fundamental frequency was measured with the spectrum analyzer with the resolution bandwidth of the spectrum analyzer set per ANSI 63.4

5.6.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer	Rohde & Schwarz	FSEK20/B4/B21	834157/005	9 kHz- 40 GHz
Log Periodic	EMCO	3148	23845	200 MHz – 2 GHz


5.6.4. Test Arrangement

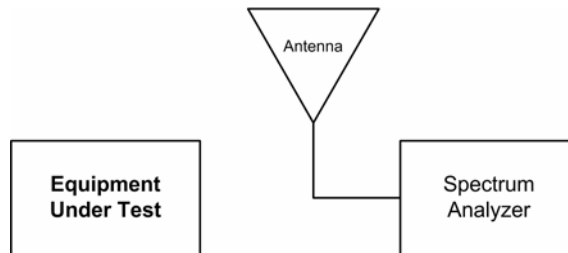

5.6.5. Test Data

Frequency (MHz)	20 dB Bandwidth (kHz)
908.42	65.3

Plot 5.6.5.1: 20 dB Bandwidth
Test Frequency: 908.42 MHz

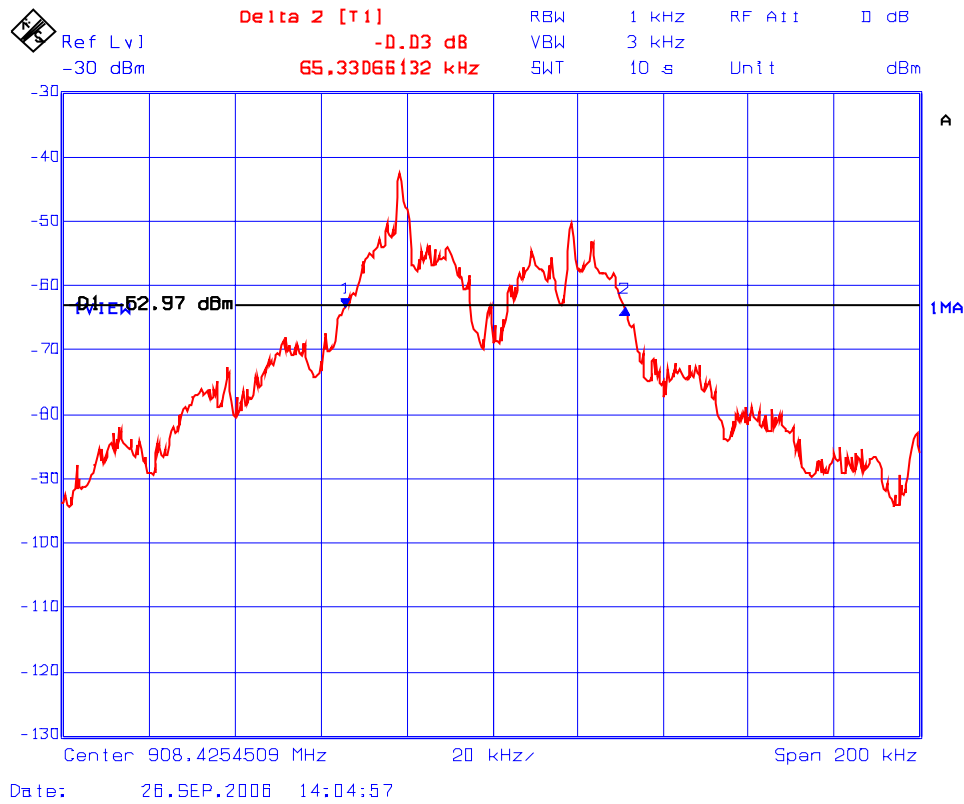

5.7. FUNDAMENTAL FIELD STRENGTH AND HARMONIC EMISSIONS (RADIATED @ 3 METERS) [47 CFR 15.249(a), 15.209 & 15.205]

5.7.1. Limits

- The Field Strength of emissions from intentional radiators operated within this frequency band shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (µV/m)
902 - 928	50	500

- The fundamental frequency shall not fall within any restricted frequency band specified in 15.205 All of other emissions that fall in the restricted bands shall not exceed the general radiated emission limits specified in @ 15.209(a).

**FCC 47 CFR 15.205(a)
 -- Restricted Frequency Bands --**

MHz	MHz	MHz	GHz
0.090 - 0.110	162.0125 - 167.17	2310 - 2390	9.3 - 9.5
0.49 - 0.51	167.72 - 173.2	2483.5 - 2500	10.6 - 12.7
2.1735 - 2.1905	240 - 285	2655 - 2900	13.25 - 13.4
8.362 - 8.366	322 - 335.4	3260 - 3267	14.47 - 14.5
13.36 - 13.41	399.9 - 410	3332 - 3339	14.35 - 16.2
25.5 - 25.67	608 - 614	3345.8 - 3358	17.7 - 21.4
37.5 - 38.25	960 - 1240	3600 - 4400	22.01 - 23.12
73 - 75.4	1300 - 1427	4500 - 5250	23.6 - 24.0
108 - 121.94	1435 - 1626.5	5350 - 5460	31.2 - 31.8
123 - 138	1660 - 1710	7250 - 7750	36.43 - 36.5
149.9 - 150.05	1718.8 - 1722.2	8025 - 8500	Above 38.6
156.7 - 156.9	2200 - 2300	9000 - 9200	

**FCC 47 CFR 15.209(a)
 -- Field Strength Limits within Restricted Frequency Bands --**

Frequency (MHz)	Field Strength Limits (µV/m)	Distance (Meters)
0.009 - 0.490	2,400 / F (KHz)	300
0.490 - 1.705	24,000 / F (KHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

5.7.2. Method of Measurements

Refer to Ultratech Test Procedures, File # ULTR P001-2004 and ANSI C63.4 for measurement methods

5.7.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Rohde & Schwarz	FSEK20/B4/B21	834157/005	9 kHz – 40 GHz with external mixer
Microwave Amplifier	Hewlett Packard	HP 83017A		1 GHz to 26.5 GHz
Biconilog Antenna	EMCO	3143	1029	20 MHz to 2 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz

5.7.4. Test Data

The emissions were scanned from 30 MHz to 10 GHz and all emissions within 20 dB below the limits were recorded.

Frequency (MHz)	Peak E-Field @3m (dBµV/m)	Average E-Field @3m (dBµV/m)	Antenna Plane (H/V)	Field Strength Limit of Fundamental/Harmonic (dBµV/m)	Field Strength Limit of § 15.209 (dBµV/m)	Margin (dB)
908.42	85.52	--	V	94.0	--	-8.5
908.42	85.29	--	H	94.0	--	-8.7
3633.68	50.48	42.72	V	54.0	54.0	-11.3
3633.68	50.73	42.99	H	54.0	54.0	-11.0

EXHIBIT 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and LAB 34

6.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Line Conducted)	PROBABILITY DISTRIBUTION	UNCERTAINTY (dB)	
		9-150 kHz	0.15-30 MHz
EMI Receiver specification	Rectangular	± 1.5	± 1.5
LISN coupling specification	Rectangular	± 1.5	± 1.5
Cable and Input Transient Limiter calibration	Normal (k=2)	± 0.3	± 0.5
Mismatch: Receiver VRC $\Gamma_1 = 0.03$ LISN VRC $\Gamma_R = 0.8(9 \text{ kHz}) 0.2 (30 \text{ MHz})$ Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	± 0.2	± 0.3
System repeatability	Std. deviation	± 0.2	± 0.05
Repeatability of EUT	--	--	--
Combined standard uncertainty	Normal	± 1.25	± 1.30
Expanded uncertainty U	Normal (k=2)	± 2.50	± 2.60

Sample Calculation for Measurement Accuracy in 450 kHz to 30 MHz Band:

$$u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)} = \pm \sqrt{(1.5^2 + 1.5^2)/3 + (0.5/2)^2 + (0.05/2)^2 + 0.35^2} = \pm 1.30 \text{ dB}$$

$$U = 2u_c(y) = \pm 2.6 \text{ dB}$$

6.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Radiated Emissions)	PROBABILITY DISTRIBUTION	UNCERTAINTY (+ dB)	
		3 m	10 m
Antenna Factor Calibration	Normal (k=2)	± 1.0	± 1.0
Cable Loss Calibration	Normal (k=2)	± 0.3	± 0.5
EMI Receiver specification	Rectangular	± 1.5	± 1.5
Antenna Directivity	Rectangular	+0.5	+0.5
Antenna factor variation with height	Rectangular	± 2.0	± 0.5
Antenna phase center variation	Rectangular	0.0	± 0.2
Antenna factor frequency interpolation	Rectangular	± 0.25	± 0.25
Measurement distance variation	Rectangular	± 0.6	± 0.4
Site imperfections	Rectangular	± 2.0	± 2.0
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67(Bi) 0.3 (Lp)$ Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	+1.1 -1.25	± 0.5
System repeatability	Std. Deviation	± 0.5	± 0.5
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+2.19 / -2.21	+1.74 / -1.72
Expanded uncertainty U	Normal (k=2)	+4.38 / -4.42	+3.48 / -3.44

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k = 2 is used:

$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB}$ And $U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$