


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	23°C	Humidity	55%
Test Engineer	DK Chang	Configurations	2.4GHz + 5GHz
Test Mode	Mode 2		

Horizontal

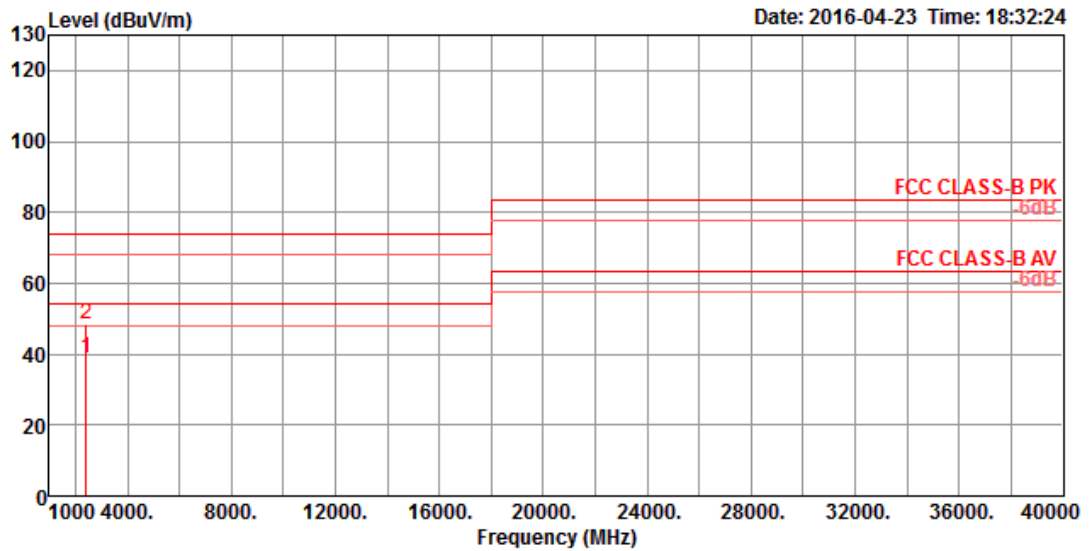

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2405.98	38.65	54.00	-15.35	39.83	5.76	27.28	34.22	100	105	Average	HORIZONTAL
2	2406.03	48.34	74.00	-25.66	49.52	5.76	27.28	34.22	100	105	Peak	HORIZONTAL

Vertical

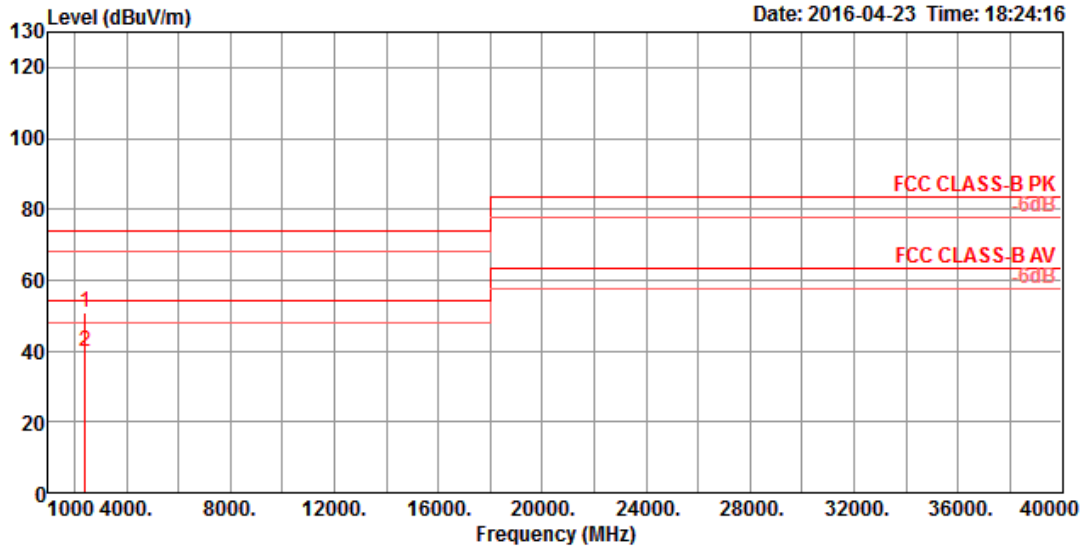

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2406.24	50.84	74.00	-23.16	52.02	5.76	27.28	34.22	100	224	Peak	VERTICAL
2	2406.26	39.66	54.00	-14.34	40.84	5.76	27.28	34.22	100	224	Average	VERTICAL