



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	AirTight Networks, Inc.
Applicant Address	339 N. Bernardo Avenue, Suite #200, Mountain View, California, USA
FCC ID	TOR-C75
Manufacturer's company	DONG GUAN G-COM COMPUTER CO., LTD
Manufacturer Address	1st Row, Yin Shan Road, Yin Hwu Industrial Area, Qingxi Town, DongGuan City, GuangDong, China

Product Name	AirTight Access Point
Brand Name	AirTight
Model No.	C-75, C-75-E
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Jan. 10, 2014
Final Test Date	Mar. 01, 2014
Submission Type	Original Equipment

Statement

Test result included is only for the IEEE 802.11n, IEEE 802.11b/g part and IEEE 802.11a/ac (5725 ~ 5850MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r01, KDB 662911 D01 v02r01, KDB644545 D01v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes	8
3.6. Table for Testing Locations.....	11
3.7. Table for Multiple List.....	11
3.8. Table for Supporting Units	12
3.9. Table for Parameters of Test Software Setting	13
3.10. EUT Operation during Test	14
3.11. Duty Cycle.....	15
3.12. Test Configurations	23
4. TEST RESULT	25
4.1. AC Power Line Conducted Emissions Measurement.....	25
4.2. Maximum Conducted Output Power Measurement.....	29
4.3. Power Spectral Density Measurement	34
4.4. 6dB Spectrum Bandwidth Measurement	60
4.5. Radiated Emissions Measurement	75
4.6. Emissions Measurement	126
4.7. Antenna Requirements	182
5. LIST OF MEASURING EQUIPMENTS	183
6. MEASUREMENT UNCERTAINTY.....	185
APPENDIX A. TEST PHOTOS	A1 ~ A9
APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT.....	B1 ~ B5

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR411023AA	Rev. 01	Initial issue of report	Mar. 13, 2014



1. CERTIFICATE OF COMPLIANCE

Product Name : AirTight Access Point
Brand Name : AirTight
Model No. : C-75, C-75-E
Applicant : AirTight Networks, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 10, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'. The signature is written in a cursive style and is positioned above a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	15.95 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	2.55 dB
4.3	15.247(e)	Power Spectral Density	Complies	6.16 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	3.08 dB
4.6	15.247(d)	Band Edge Emissions	Complies	1.00 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter or PoE
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	<u>For 2.4GHz Band:</u> 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth <u>For 5GHz Band:</u> 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth ; 1 for 80MHz bandwidth
Channel Band Width (99%)	<u>For Mode 1 (EUT 1) / 2.4GHz Band:</u> MCS0 (HT20): 18.00 MHz ; MCS0 (HT40): 36.48 MHz <u>For Mode 1 (EUT 1) / 5GHz Band:</u> 802.11ac MCS0, Nss1 (VHT20): 23.84 MHz ; 802.11ac MCS0, Nss1 (VHT40): 41.76 MHz ; 802.11ac MCS0, Nss1 (VHT80): 75.52 MHz <u>For Mode 2 (EUT 2) / 2.4GHz Band:</u> MCS0 (HT20): 17.76 MHz ; MCS0 (HT40): 36.16 MHz <u>For Mode 2 (EUT 2) / 5GHz Band:</u> 802.11ac MCS0, Nss1 (VHT20): 17.60 MHz ; 802.11ac MCS0, Nss1 (VHT40): 36.32 MHz ; 802.11ac MCS0, Nss1 (VHT80): 75.52 MHz

Maximum Conducted Output Power	<p><u>For Mode 1 (EUT 1) / 2.4GHz Band:</u> MCS0 (HT20): 24.98 dBm ; MCS0 (HT40): 20.51 dBm</p> <p><u>For Mode 1 (EUT 1) / 5GHz Band:</u> 802.11ac MCS0, Nss1 (VHT20): 26.85 dBm ; 802.11ac MCS0, Nss1 (VHT40): 26.21 dBm ; 802.11ac MCS0, Nss1 (VHT80): 23.59 dBm</p> <p><u>For Mode 2 (EUT 2) / 2.4GHz Band:</u> MCS0 (HT20): 24.30 dBm ; MCS0 (HT40): 19.62 dBm</p> <p><u>For Mode 2 (EUT 2) / 5GHz Band:</u> 802.11ac MCS0, Nss1 (VHT20): 25.48 dBm ; 802.11ac MCS0, Nss1 (VHT40): 25.50 dBm ; 802.11ac MCS0, Nss1 (VHT80): 24.11 dBm</p>
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a/b/g

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter or PoE
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11b/g: 11 ; 11a: 5
Channel Band Width (99%)	<p><u>For Mode 1 (EUT 1):</u> 11b: 10.16 MHz ; 11g: 16.64 MHz ; 11a: 23.76 MHz</p> <p><u>For Mode 2 (EUT 2):</u> 11b: 12.80 MHz ; 11g: 16.64 MHz ; 11a: 18.32 MHz</p>
Maximum Conducted Output Power	<p><u>For Mode 1 (EUT 1):</u> 11b: 20.41 dBm ; 11g: 20.11 dBm ; 11a: 22.59 dBm</p> <p><u>For Mode 2 (EUT 2):</u> 11b: 21.11 dBm ; 11g: 19.34 dBm ; 11a: 21.76 dBm</p>
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming

Antenna and Bandwidth

Antenna	Single (TX)	Three (TX)		
	20 MHz	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X	X
IEEE 802.11b	V	X	X	X
IEEE 802.11g	V	X	X	X
IEEE 802.11n	X	V	V	X
IEEE 802.11ac	X	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
802.11ac (VHT20)	3	MCS 0-9, Nss1-3
802.11ac (VHT40)	3	MCS 0-9, Nss1-3
802.11ac (VHT80)	3	MCS 0-9, Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac


3.2. Accessories

N/A

3.3. Table for Filed Antenna

For EUT 1 (Model No. C-75)

Ant.	Brand	Model No.	Type	Connector	Antenna Gain		Cable loss		True Gain (dBi)	
					2.4GHz	5GHz	2.4GHz	5GHz	2.4GHz	5GHz
1	LITEON	WP838 AP	PCB	I-PEX	3.5	6.5	0.2	-	3.3	6.5
2	LITEON	WP838 AP	PCB	I-PEX	6	5.8	-	-	6	5.8
3	LITEON	WP838 AP	PCB	I-PEX	5.4	6.6	-	-	5.4	6.6

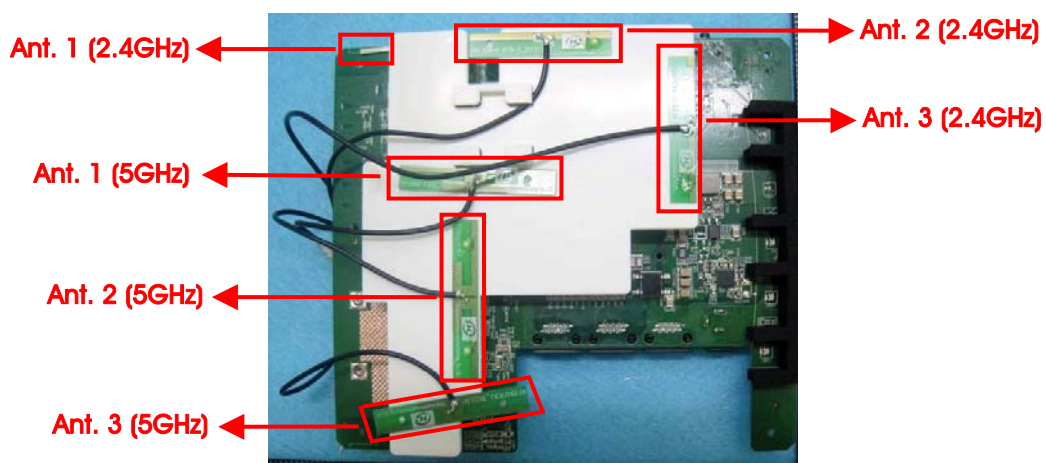

For EUT 2 (Model No. C-75-E)

Ant.	Brand	Model No.	Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	MAG.LAYERS	EDA-1713-25GR2-A7	Dipole	SMA Male RP	5	5
2	MAG.LAYERS	EDA-1713-25GR2-A7	Dipole	SMA Male RP	5	5
3	MAG.LAYERS	EDA-1713-25GR2-A7	Dipole	SMA Male RP	5	5



<For 2.4GHz Band>

For IEEE 802.11b/g mode (1TX/1RX):

Only Ant. 1 could transmit/receive simultaneously.

For IEEE 802.11n mode (3TX/3RX):

Ant. 1, Ant. 2 and Ant. 3 could transmit/receive simultaneously.

<For 5GHz Band>

For IEEE 802.11a mode (1TX/1RX):

Only Ant. 1 could transmit/receive simultaneously.

For IEEE 802.11n/ac mode (3TX/3RX):

Ant. 1, Ant. 2 and Ant. 3 could transmit/receive simultaneously.

3.4. Table for Carrier Frequencies

For 2.4GHz Band:

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

For 5GHz Band:

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

For 80MHz bandwidth systems, use Channel 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

For 2.4GHz Band:

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Power Spectral Density	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
6dB Spectrum Bandwidth	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Band Edge Emissions	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1

For 5GHz Band:

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11ac VHT20	MCS0, Nss1	149/157/165	1+2+3
	11ac VHT40	MCS0, Nss1	151/159	1+2+3
	11ac VHT80	MCS0, Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1
Power Spectral Density	11ac VHT20	MCS0, Nss1	149/157/165	1+2+3
	11ac VHT40	MCS0, Nss1	151/159	1+2+3
	11ac VHT80	MCS0, Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1
6dB Spectrum Bandwidth	11ac VHT20	MCS0, Nss1	149/157/165	1+2+3
	11ac VHT40	MCS0, Nss1	151/159	1+2+3
	11ac VHT80	MCS0, Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11ac VHT20	MCS0, Nss1	149/157/165	1+2+3
	11ac VHT40	MCS0, Nss1	151/159	1+2+3
	11ac VHT80	MCS0, Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1
Band Edge Emissions	11ac VHT20	MCS0, Nss1	149/157/165	1+2+3
	11ac VHT40	MCS0, Nss1	151/159	1+2+3
	11ac VHT80	MCS0, Nss1	155	1+2+3
	11a/BPSK	6 Mbps	149/157/165	1

Note: 1. All the specification of test configurations and test mode was base on customer's request.

2. The AC adapter, PoE are for measurement only, would not be marketed.

3. VHT20/VHT40 covers HT20 & HT40, due to same modulation.

The following test modes were performed for all tests:

For AC Power Line Conducted Emissions test:

EUT 1 generated the worst test result for Radiated Emissions Below 1GHz test, thus measurement for Mode 1 will follow this same test mode.

Mode 1. EUT 1 + Adapter

For Radiated Emissions Below 1GHz test:

Mode 1. Laying of EUT 1 + Adapter

Mode 2. Stand of EUT 1 + Adapter

Mode 1 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3 will follow this same test mode.

Mode 3. Laying of EUT 1 + PoE

Mode 1 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4 will follow this same test mode.

Mode 4. Laying of EUT 2 + Adapter

Mode 1 and Mode 4 generated the worst test result, so it was recorded in this report.

For Radiated Emissions Above 1GHz and Band Edge Emissions tests:

2.4GHz Band:

Mode 1. Laying of EUT 1

Mode 2. Stand of EUT 1

Mode 1 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3 will follow this same test mode.

Mode 3. Laying of EUT 2

Mode 1 and Mode 3 generated the worst test result, so it was recorded in this report.

5GHz Band:

Mode 1. Laying of EUT 1

Mode 2. Stand of EUT 1

Mode 2 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3 will follow this same test mode.

Mode 3. Stand of EUT 2

Mode 2 and Mode 3 generated the worst test result, so it was recorded in this report.

For Radiated Emission Co-location test:

The mode "Stand of EUT 1" and "Stand of EUT 2" has been evaluated to be the worst case for Radiated emission above 1GHz test.

Consequently, measurement for Radiated Emission Co-location test will follow this same test modes.

Mode 1. Stand of EUT 1

Mode 2. Stand of EUT 2

All the test result were recorded in the report.

For Others test:

Mode 1. EUT 1

Mode 2. EUT 2

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Sporton test report: FA411023.) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Multiple List

The EUT has two model names which are identical to each other in all aspects except for the following table:

Brand Name	Model Name	Antenna	Description
AirTight	C-75	Internal Ant.	EUT 1
	C-75-E	External Ant.	EUT 2

3.8. Table for Supporting Units

For AC Power Line Conducted Emissions test:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC
Notebook	DELL	E6430	DoC
Notebook	DELL	E6430	DoC
Notebook	DELL	E6430	DoC
Flash Disk	HP	v225w	DoC
Adapter	APD	WA-24E12	N/A

For Radiated Emissions Below 1GHz test:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	DoC
Notebook	DELL	M1330	DoC
Notebook	DELL	E6430	DoC
Notebook	DELL	D420	DoC
Flash Disk	Silicon	D33B02	DoC
Adapter	APD	WA-24E12	N/A
PoE	PowerDsine	PD-6561G300	N/A

For Others test:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	DoC
Adapter	APD	WA-24E12	N/A

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Mode: Mode 1 (EUT 1)

For 2.4GHz Band

Power Parameters of IEEE 802.11n MCS0 HT20

Test Software Version	ART2-GUI Version 2.3		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 HT20	14.5	19.5	15.5

Power Parameters of IEEE 802.11n MCS0 HT40

Test Software Version	ART2-GUI Version 2.3		
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 HT40	13	15.5	14.5

Power Parameters of IEEE 802.11b/g

Test Software Version	ART2-GUI Version 2.3		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	21	21	20.5
IEEE 802.11g	16.5	20	17

For 5GHz Band

Power Parameters of IEEE 802.11ac MCS0, Nss1 VHT20

Test Software Version	ART2-GUI Version 2.3		
Frequency	5745 MHz	5785 MHz	5825 MHz
MCS0, Nss1 VHT20	24	24	24

Power Parameters of IEEE 802.11ac MCS0, Nss1 VHT40

Test Software Version	ART2-GUI Version 2.3	
Frequency	5755 MHz	5795 MHz
MCS0, Nss1 VHT40	21.5	24

Power Parameters of IEEE 802.11ac MCS0, Nss1 VHT80

Test Software Version	ART2-GUI Version 2.3	
Frequency	5775 MHz	
MCS0, Nss1 VHT80	20	

Power Parameters of IEEE 802.11a

Test Software Version	ART2-GUI Version 2.3		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	24	24	24

Test Mode: Mode 2 (EUT 2)

For 2.4GHz Band

Power Parameters of IEEE 802.11n MCS0 HT20

Test Software Version	ART2-GUI Version 2.3		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 HT20	13	19	14.5

Power Parameters of IEEE 802.11n MCS0 HT40

Test Software Version	ART2-GUI Version 2.3		
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 HT40	11.5	14.5	12

Power Parameters of IEEE 802.11b/g

Test Software Version	ART2-GUI Version 2.3		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	20	21.5	21
IEEE 802.11g	15.5	19	17.5

For 5GHz Band

Power Parameters of IEEE 802.11ac MCS0, Nss1 VHT20

Test Software Version	ART2-GUI Version 2.3		
Frequency	5745 MHz	5785 MHz	5825 MHz
MCS0, Nss1 VHT20	21.5	22	22

Power Parameters of IEEE 802.11ac MCS0, Nss1 VHT40

Test Software Version	ART2-GUI Version 2.3	
Frequency	5755 MHz	5795 MHz
MCS0, Nss1 VHT40	22.5	22.5

Power Parameters of IEEE 802.11ac MCS0, Nss1 VHT80

Test Software Version	ART2-GUI Version 2.3
Frequency	5775 MHz
MCS0, Nss1 VHT80	21

Power Parameters of IEEE 802.11a

Test Software Version	ART2-GUI Version 2.3		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	22	22	22.5


3.10. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.11. Duty Cycle


For 2.4GHz Band:

IEEE 802.11n MCS0 HT20 / Test Mode: Mode 1 (EUT 1)

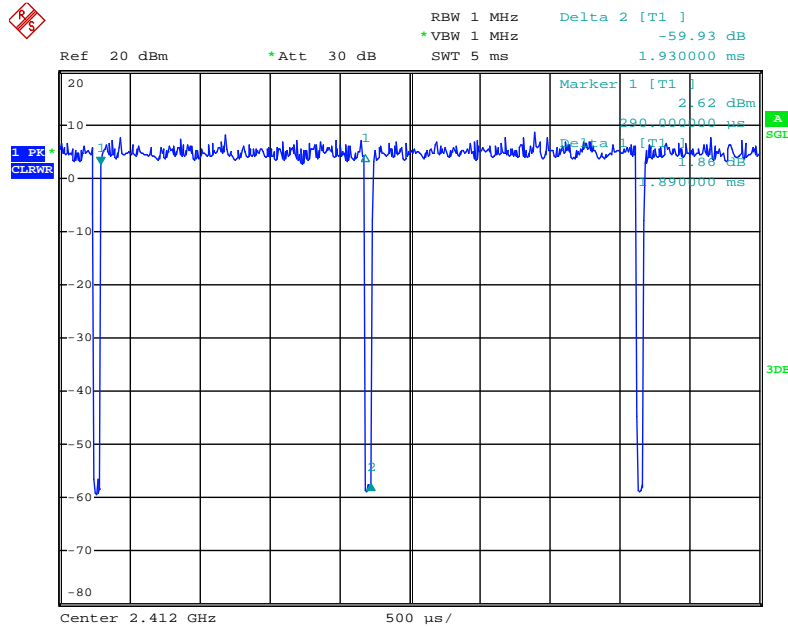


Date: 23.JAN.2014 20:19:22

IEEE 802.11n MCS0 HT40 / Test Mode: Mode 1 (EUT 1)

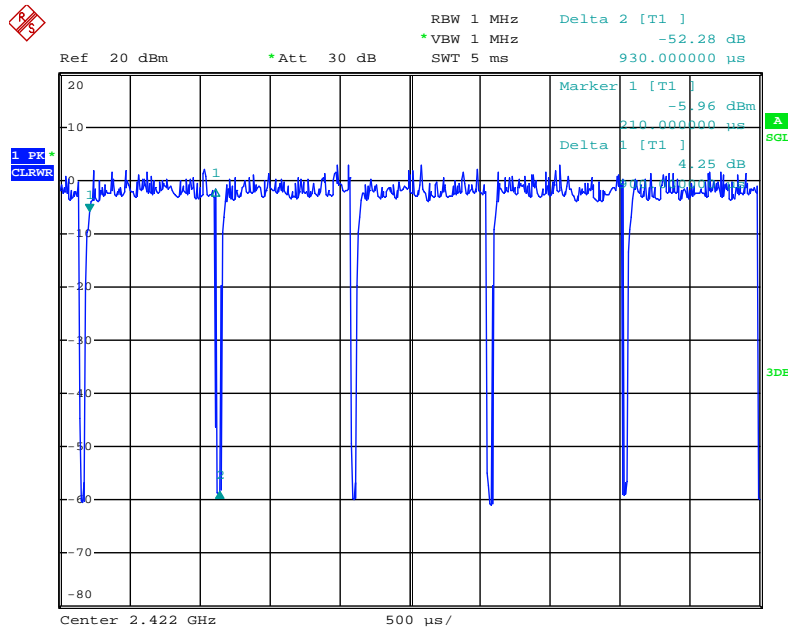


Date: 23.JAN.2014 20:22:36

IEEE 802.11b / Test Mode: Mode 1 (EUT 1)

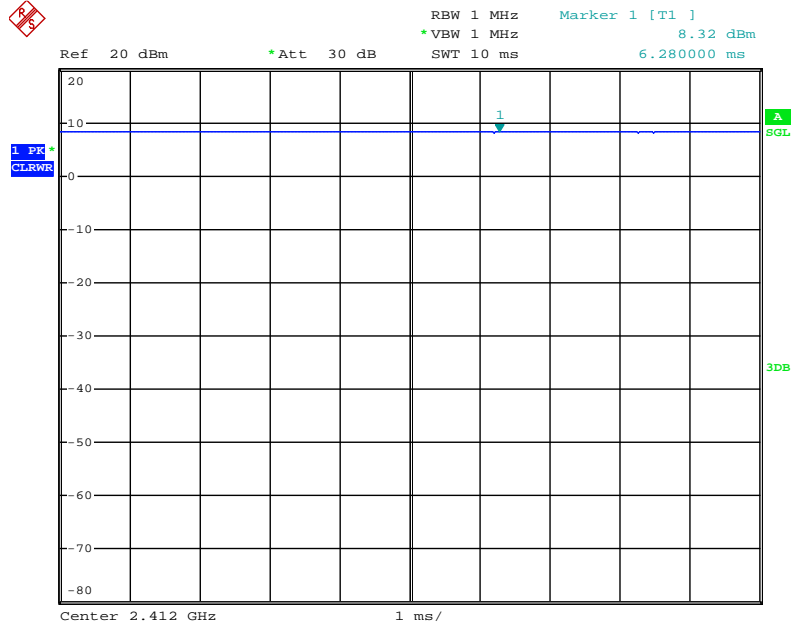

Date: 23.JAN.2014 20:21:56


IEEE 802.11g / Test Mode: Mode 1 (EUT 1)

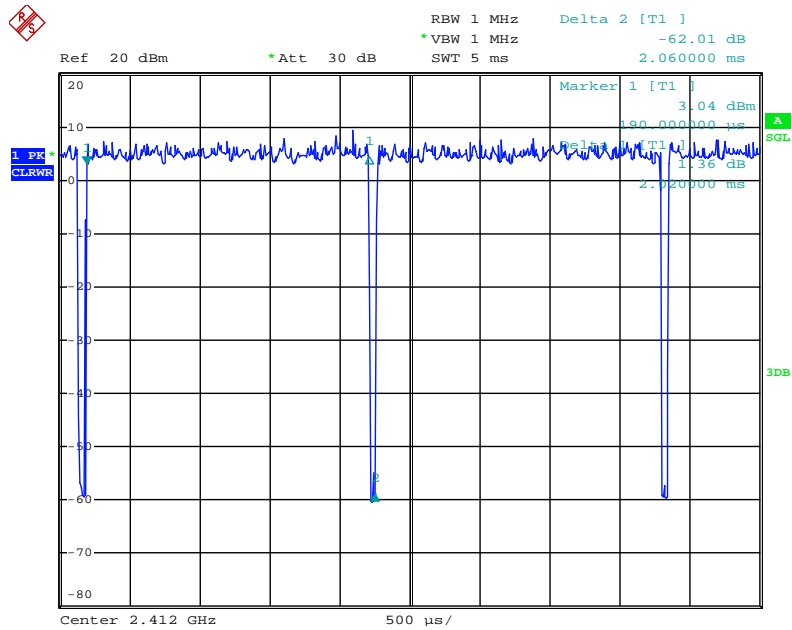

Date: 23.JAN.2014 20:20:08


For 5GHz Band:

IEEE 802.11ac MCS0, Nss1 VHT20 / Test Mode: Mode 1 (EUT 1)

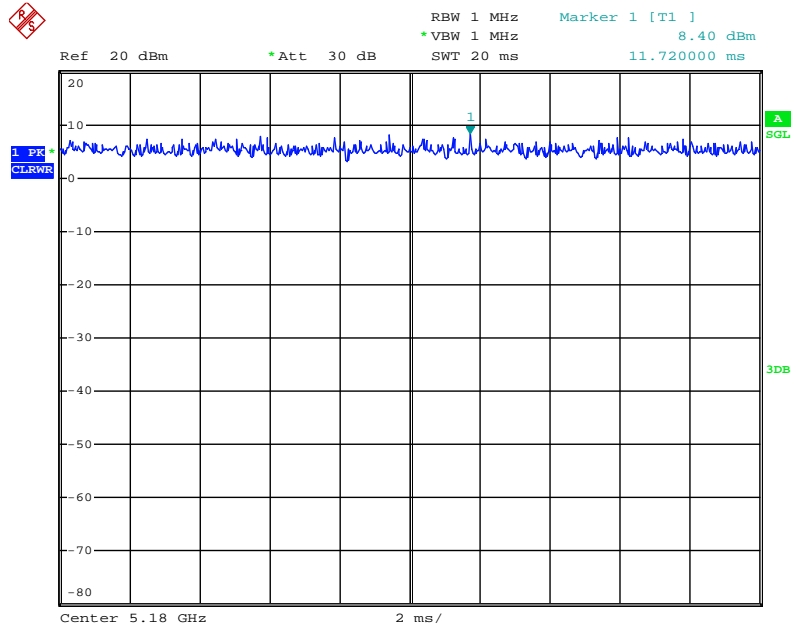


Date: 24.JAN.2014 01:26:26

IEEE 802.11ac MCS0, Nss1 VHT40 / Test Mode: Mode 1 (EUT 1)

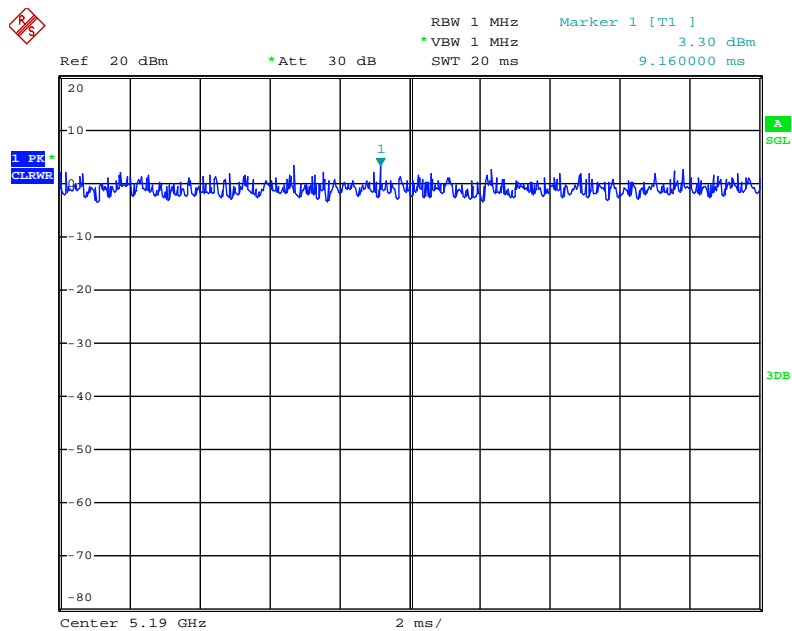


Date: 24.JAN.2014 01:32:04

IEEE 802.11ac MCS0, Nss1 VHT80 / Test Mode: Mode 1 (EUT 1)

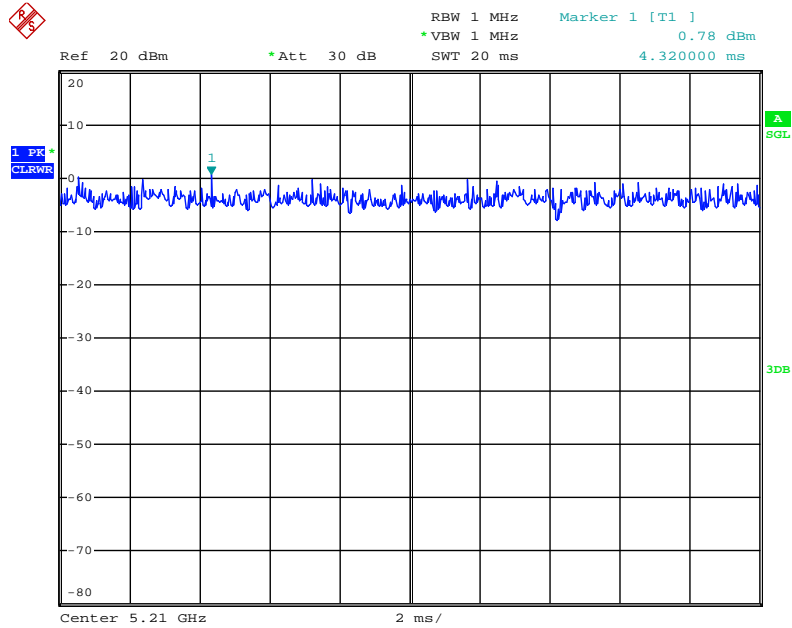

Date: 24.JAN.2014 01:34:45


IEEE 802.11a / Test Mode: Mode 1 (EUT 1)

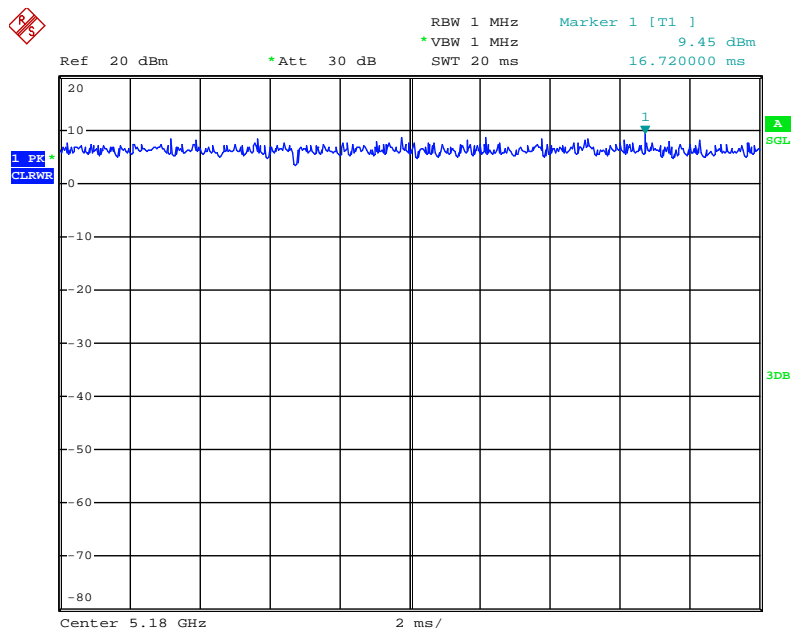

Date: 24.JAN.2014 01:21:33


For 2.4GHz Band:

IEEE 802.11n MCS0 HT20 / Test Mode: Mode 2 (EUT 2)

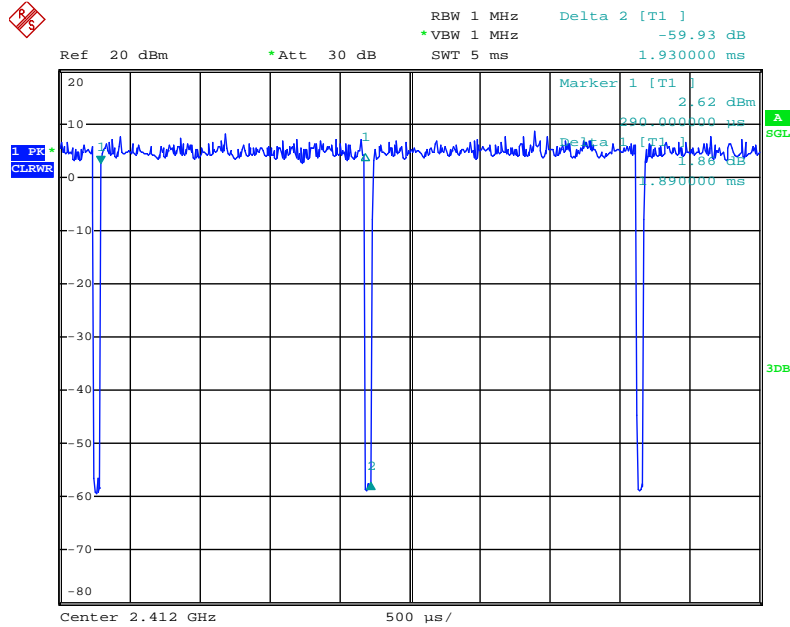


Date: 23.JAN.2014 20:19:22

IEEE 802.11n MCS0 HT40 / Test Mode: Mode 2 (EUT 2)

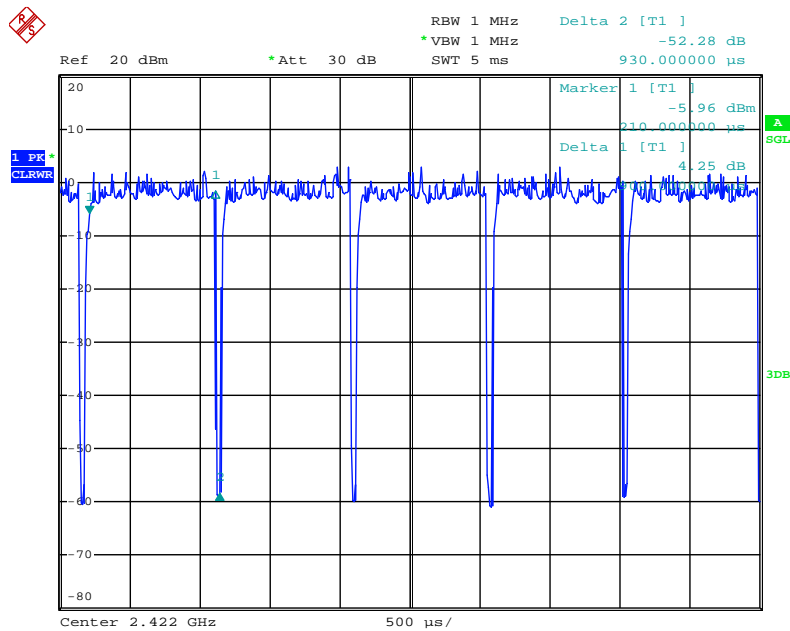


Date: 23.JAN.2014 20:22:36

IEEE 802.11b / Test Mode: Mode 2 (EUT 2)

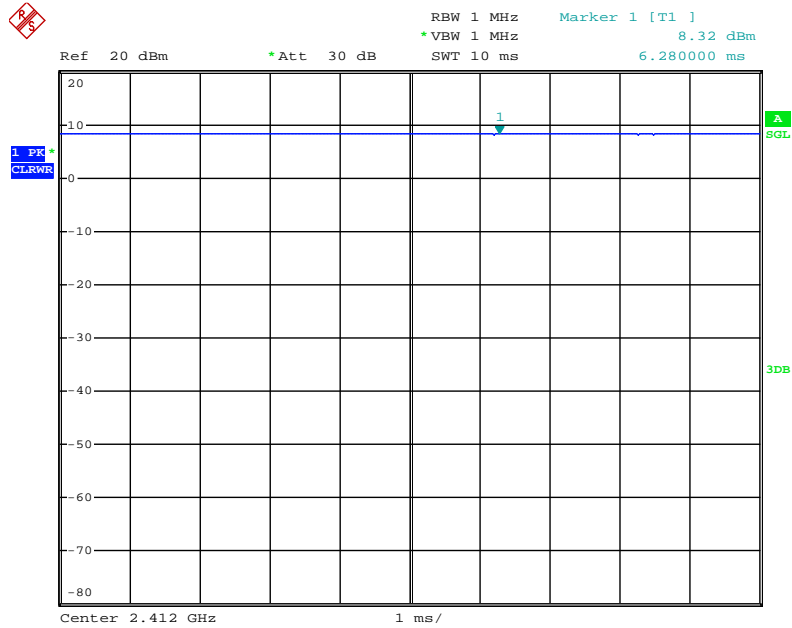

Date: 23.JAN.2014 20:21:56


IEEE 802.11g / Test Mode: Mode 2 (EUT 2)

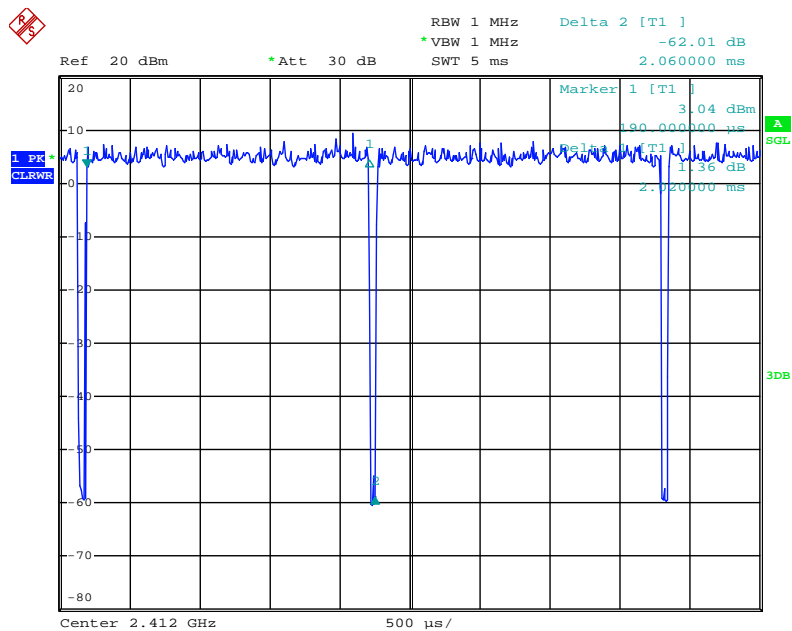

Date: 23.JAN.2014 20:20:08


For 5GHz Band:

IEEE 802.11ac MCS0, Nss1 VHT20 / Test Mode: Mode 2 (EUT 2)

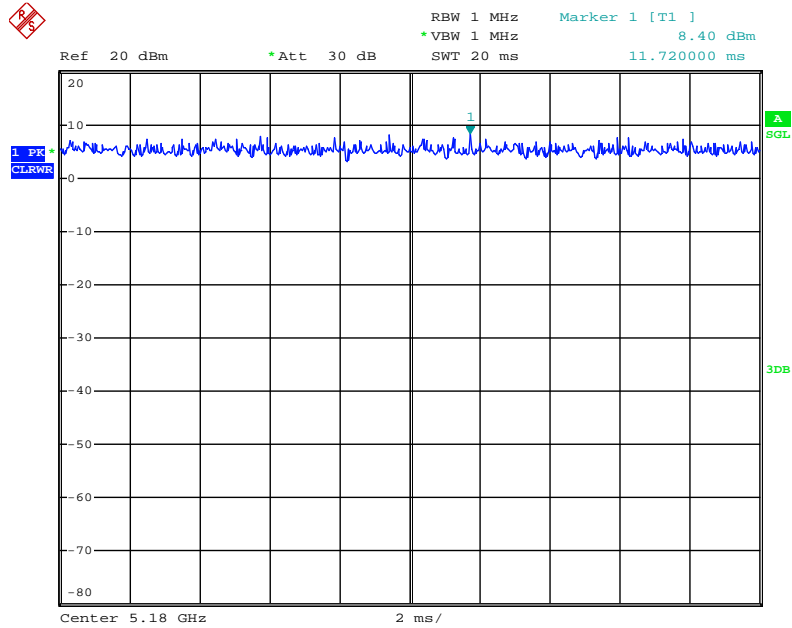


Date: 24.JAN.2014 01:26:26

IEEE 802.11ac MCS0, Nss1 VHT40 / Test Mode: Mode 2 (EUT 2)

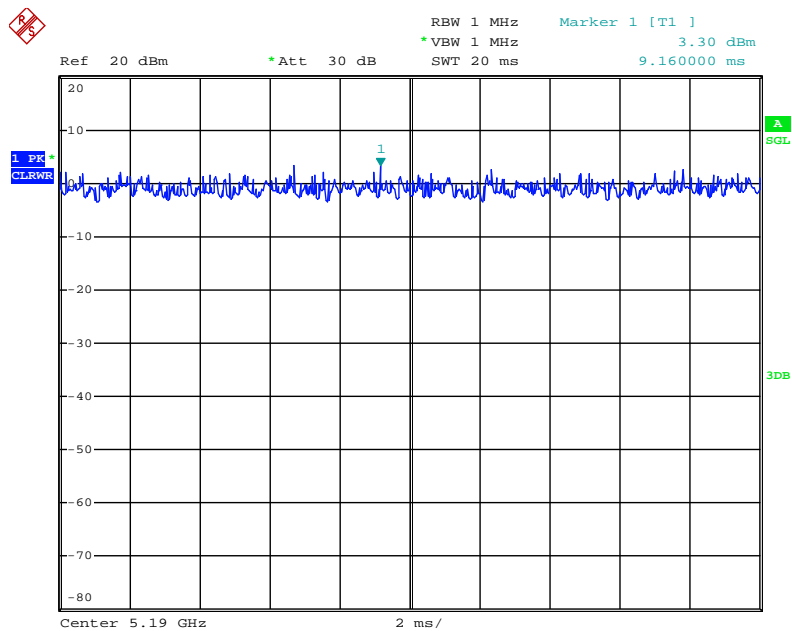


Date: 24.JAN.2014 01:32:04

IEEE 802.11ac MCS0, Nss1 VHT80 / Test Mode: Mode 2 (EUT 2)

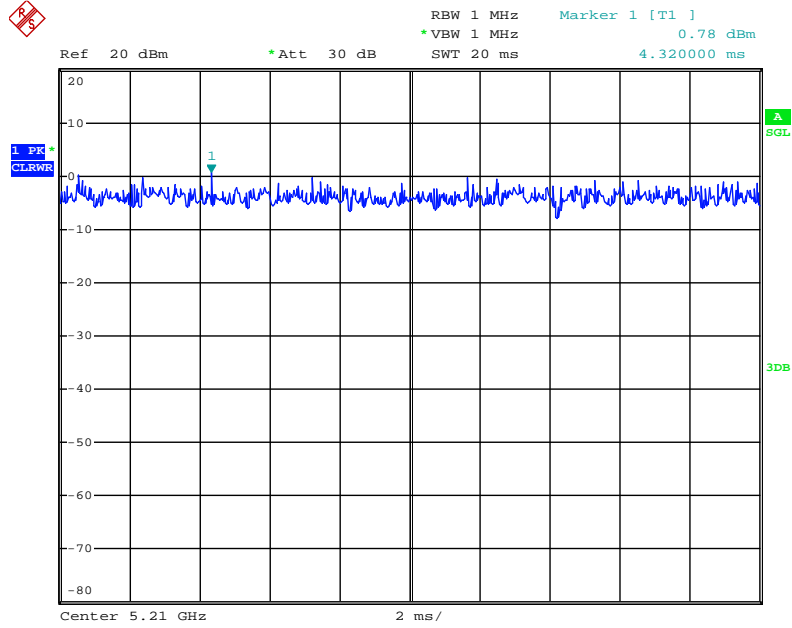

Date: 24.JAN.2014 01:34:45

IEEE 802.11a / Test Mode: Mode 2 (EUT 2)

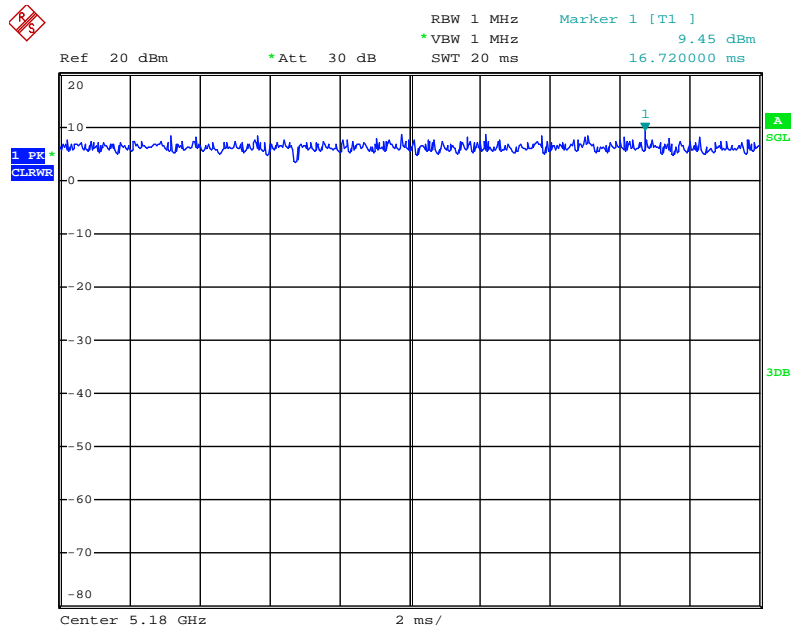


Date: 24.JAN.2014 01:21:33

3.12. Test Configurations


3.12.1. AC Power Line Conduction Emissions and Radiation Emissions Below 1GHz Test Configuration

Test Mode: EUT + Adapter

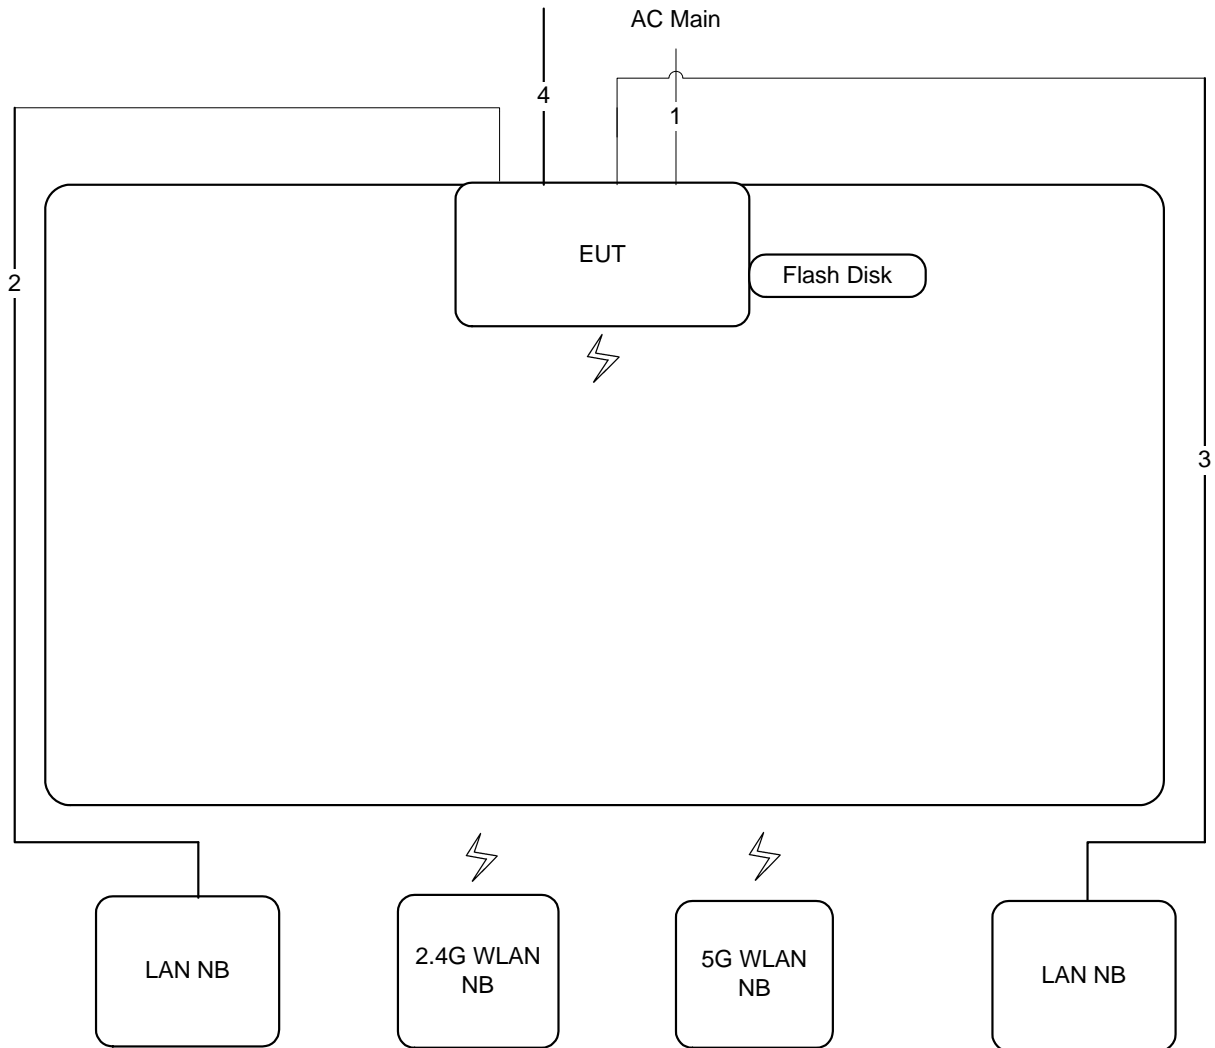

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	Console cable	No	1.5m

3.12.2. Radiation Emissions Above 1GHz Test Configuration

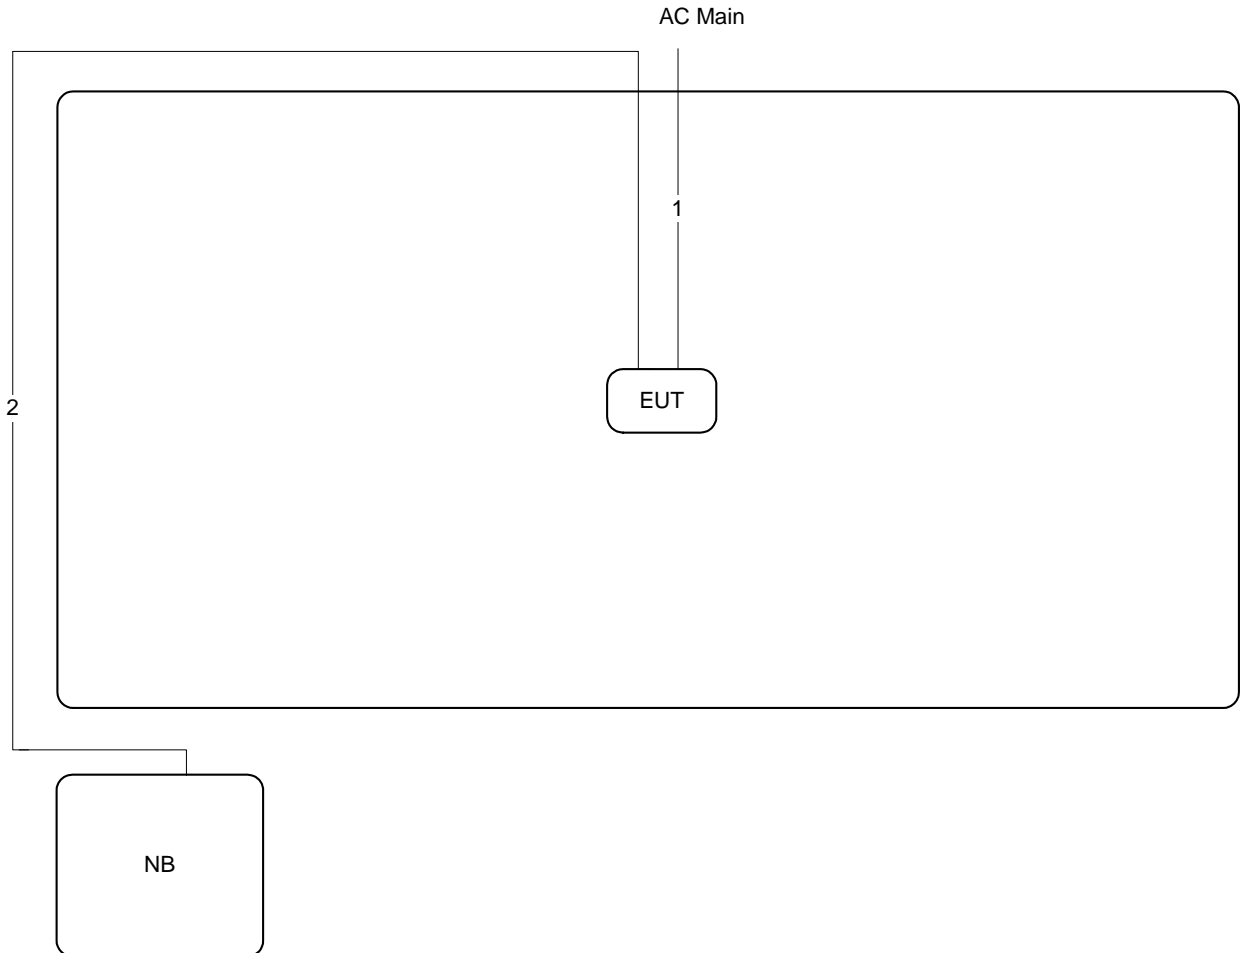

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

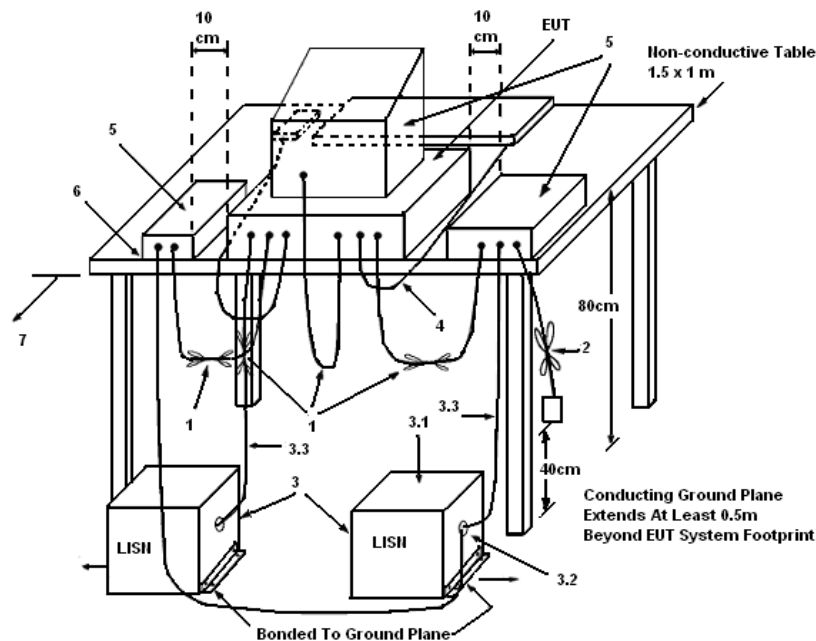

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	55%
Test Engineer	Justin Chiu	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1

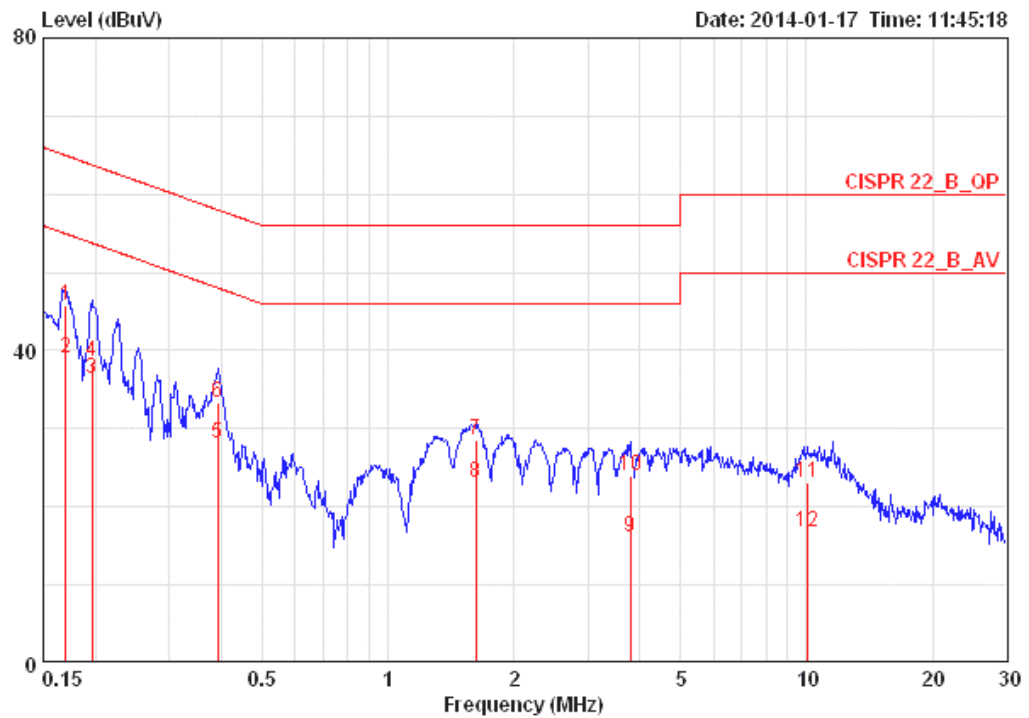

	Freq	Level	Over	Limit	LISN	Read	Cable		
	MHz	dBuV	dB	dBuV	dB	dBuV	dB	Pol/Phase	Remark
1	0.16944	45.88	-19.11	64.99	0.15	45.57	0.16	LINE	QP
2	0.16944	39.04	-15.95	54.99	0.15	38.73	0.16	LINE	AVERAGE
3	0.19654	36.41	-17.34	53.76	0.15	36.10	0.16	LINE	AVERAGE
4	0.19654	38.56	-25.19	63.76	0.15	38.25	0.16	LINE	QP
5	0.39136	28.05	-19.99	48.03	0.15	27.72	0.18	LINE	AVERAGE
6	0.39136	33.25	-24.79	58.03	0.15	32.92	0.18	LINE	QP
7	1.619	28.56	-27.44	56.00	0.18	28.15	0.23	LINE	QP
8	1.619	23.20	-22.80	46.00	0.18	22.79	0.23	LINE	AVERAGE
9	3.799	16.14	-29.86	46.00	0.27	15.57	0.30	LINE	AVERAGE
10	3.799	24.08	-31.92	56.00	0.27	23.51	0.30	LINE	QP
11	10.019	23.16	-36.84	60.00	0.37	22.41	0.38	LINE	QP
12	10.019	16.72	-33.28	50.00	0.37	15.97	0.38	LINE	AVERAGE

Temperature	25°C	Humidity	55%
Test Engineer	Justin Chiu	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 1 (EUT 1) + Adapter

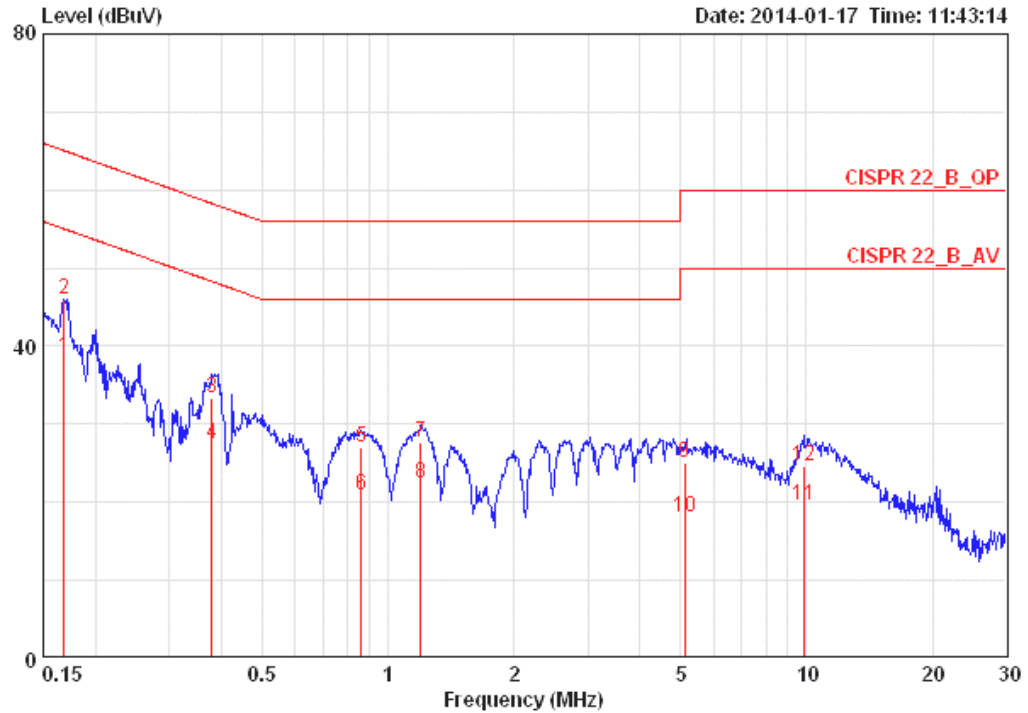

	Freq	Level	Over Limit	Limit	LISN	Read	Cable	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.16854	38.48	-16.55	55.03	0.07	38.25	0.16	NEUTRAL	AVERAGE
2	0.16854	46.04	-18.99	65.03	0.07	45.81	0.16	NEUTRAL	QP
3	0.37912	33.42	-24.88	58.30	0.07	33.17	0.18	NEUTRAL	QP
4	0.37912	27.38	-20.92	48.30	0.07	27.13	0.18	NEUTRAL	AVERAGE
5	0.86185	27.05	-28.95	56.00	0.08	26.78	0.20	NEUTRAL	QP
6	0.86185	20.88	-25.12	46.00	0.08	20.61	0.20	NEUTRAL	AVERAGE
7	1.197	27.63	-28.37	56.00	0.09	27.33	0.21	NEUTRAL	QP
8	1.197	22.56	-23.44	46.00	0.09	22.26	0.21	NEUTRAL	AVERAGE
9	5.116	25.04	-30.96	56.00	0.15	24.57	0.32	NEUTRAL	QP
10	5.116	18.04	-27.96	46.00	0.15	17.57	0.32	NEUTRAL	Average
11	9.861	19.63	-30.37	50.00	0.27	18.98	0.38	NEUTRAL	AVERAGE
12	9.861	24.68	-35.32	60.00	0.27	24.03	0.38	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter output power.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 9.2.2 Measurement using a power meter (PM).
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

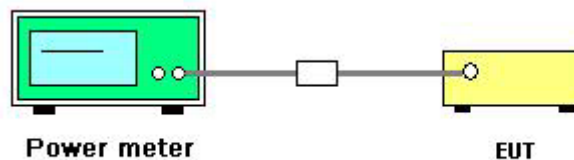

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n/ac
Test Date	Feb. 15, 2014	Test Mode	Mode 1 (EUT 1)

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 HT20

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
1	2412 MHz	14.32	14.60	15.13	19.47	30.00	Complies
6	2437 MHz	19.83	19.87	20.86	24.98	30.00	Complies
11	2462 MHz	16.01	15.89	16.28	20.83	30.00	Complies

Configuration IEEE 802.11n MCS0 HT40

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
3	2422 MHz	13.08	13.12	13.92	18.16	30.00	Complies
6	2437 MHz	15.43	15.59	16.16	20.51	30.00	Complies
9	2452 MHz	14.31	14.68	15.36	19.58	30.00	Complies

For 5GHz Band

Configuration IEEE 802.11ac MCS0, Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
149	5745 MHz	22.17	21.71	22.34	26.85	29.40	Complies
157	5785 MHz	22.14	21.17	21.91	26.53	29.40	Complies
165	5825 MHz	22.36	21.34	21.65	26.58	29.40	Complies

Note: Max. antenna true gain=6.6dBi>6dBi, so power limit=30-(6.6-6)=29.40dBm.

Configuration IEEE 802.11ac MCS0, Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
151	5755 MHz	20.32	19.26	20.63	24.88	29.40	Complies
159	5795 MHz	22.03	20.96	21.25	26.21	29.40	Complies

Note: Max. antenna true gain=6.6dBi>6dBi, so power limit=30-(6.6-6)=29.40dBm.

Configuration IEEE 802.11ac MCS0, Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
155	5775 MHz	19.18	17.77	19.33	23.59	29.40	Complies

Note: Max. antenna true gain=6.6dBi>6dBi, so power limit=30-(6.6-6)=29.40dBm.

Temperature	20°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a/b/g
Test Date	Feb. 15, 2014	Test Mode	Mode 1 (EUT 1)

Configuration IEEE 802.11b / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	20.25	30.00	Complies
6	2437 MHz	20.34	30.00	Complies
11	2462 MHz	20.41	30.00	Complies

Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.14	30.00	Complies
6	2437 MHz	20.11	30.00	Complies
11	2462 MHz	17.58	30.00	Complies

Configuration IEEE 802.11a / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	22.25	29.50	Complies
157	5785 MHz	22.45	29.50	Complies
165	5825 MHz	22.59	29.50	Complies

Note: Antenna true gain=6.5dBi>6dBi, so power limit=30-(6.5-6)=29.50dBm.

Temperature	22°C	Humidity	56%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n/ac
Test Date	Feb. 15, 2014	Test Mode	Mode 2 (EUT 2)

For 2.4GHz Band
Configuration IEEE 802.11n MCS0 HT20

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
1	2412 MHz	13.42	13.08	13.52	18.12	30.00	Complies
6	2437 MHz	19.06	19.41	20.05	24.30	30.00	Complies
11	2462 MHz	14.42	14.31	15.74	19.64	30.00	Complies

Configuration IEEE 802.11n MCS0 HT40

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
3	2422 MHz	11.61	11.46	12.43	16.63	30.00	Complies
6	2437 MHz	14.25	14.54	15.64	19.62	30.00	Complies
9	2452 MHz	11.45	11.79	12.83	16.84	30.00	Complies

For 5GHz Band
Configuration IEEE 802.11ac MCS0, Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
149	5745 MHz	20.88	20.37	20.87	25.48	30.00	Complies
157	5785 MHz	20.98	20.31	20.53	25.39	30.00	Complies
165	5825 MHz	20.99	20.46	20.66	25.48	30.00	Complies

Configuration IEEE 802.11ac MCS0, Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
151	5755 MHz	20.99	20.41	20.78	25.50	30.00	Complies
159	5795 MHz	20.82	20.22	20.45	25.27	30.00	Complies

Configuration IEEE 802.11ac MCS0, Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
155	5775 MHz	19.76	18.93	19.29	24.11	30.00	Complies

Temperature	22°C	Humidity	56%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a/b/g
Test Date	Feb. 15, 2014	Test Mode	Mode 2 (EUT 2)

Configuration IEEE 802.11b / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.67	30.00	Complies
6	2437 MHz	21.11	30.00	Complies
11	2462 MHz	20.64	30.00	Complies

Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	15.67	30.00	Complies
6	2437 MHz	19.34	30.00	Complies
11	2462 MHz	17.78	30.00	Complies

Configuration IEEE 802.11a / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	21.76	30.00	Complies
157	5785 MHz	21.56	30.00	Complies
165	5825 MHz	21.38	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

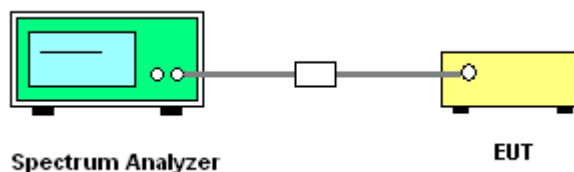

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	20°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n/ac
Test Mode	Mode 1 (EUT 1)		

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 HT20

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
1	2412 MHz	-12.41	-12.19	-11.14	-7.11	8.00	Complies
6	2437 MHz	-5.81	-5.91	-5.68	-1.03	8.00	Complies
11	2462 MHz	-10.93	-10.84	-10.65	-6.03	8.00	Complies

Configuration IEEE 802.11n MCS0 HT40

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
3	2422 MHz	-16.10	-16.91	-15.32	-11.29	8.00	Complies
6	2437 MHz	-13.86	-13.36	-12.94	-8.60	8.00	Complies
9	2452 MHz	-15.69	-15.04	-14.12	-10.13	8.00	Complies

For 5GHz Band

Configuration IEEE 802.11ac MCS0, Nss1 VHT20

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
149	5745 MHz	-3.63	-3.96	-3.35	1.13	7.40	Complies
157	5785 MHz	-3.51	-3.80	-3.49	1.17	7.40	Complies
165	5825 MHz	-3.68	-3.70	-3.23	1.24	7.40	Complies

Note: Max. antenna true gain=6.6dBi>6dBi, so power density limit=8-(6.6-6)=7.40dBm/3kHz.

Configuration IEEE 802.11ac MCS0, Nss1 VHT40

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
151	5755 MHz	-8.72	-9.55	-8.71	-4.20	7.40	Complies
159	5795 MHz	-7.23	-7.62	-7.35	-2.63	7.40	Complies

Note: Max. antenna true gain=6.6dBi>6dBi, so power density limit=8-(6.6-6)=7.40dBm/3kHz.

Configuration IEEE 802.11ac MCS0, Nss1 VHT80

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
155	5775 MHz	-12.03	-14.00	-12.77	-8.09	7.40	Complies

Note: Max. antenna true gain=6.6dBi>6dBi, so power density limit=8-(6.6-6)=7.40dBm/3kHz.

Temperature	20°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a/b/g
Test Mode	Mode 1 (EUT 1)		

Configuration IEEE 802.11b / Ant. 1

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
1	2412 MHz	-2.08	8.00	Complies
6	2437 MHz	-2.15	8.00	Complies
11	2462 MHz	-2.24	8.00	Complies

Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
1	2412 MHz	-9.40	8.00	Complies
6	2437 MHz	-6.51	8.00	Complies
11	2462 MHz	-8.16	8.00	Complies

Configuration IEEE 802.11a / Ant. 1

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
149	5745 MHz	-3.00	7.50	Complies
157	5785 MHz	-2.82	7.50	Complies
165	5825 MHz	-2.99	7.50	Complies

Note: Antenna true gain=6.5dBi>6dBi, so power density limit=8-(6.5-6)=7.50dBm/3kHz.

Temperature	22°C	Humidity	56%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n/ac
Test Mode	Mode 2 (EUT 2)		

For 2.4GHz Band
Configuration IEEE 802.11n MCS0 HT20

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
1	2412 MHz	-12.76	-12.34	-12.43	-7.74	8.00	Complies
6	2437 MHz	-7.55	-7.03	-6.13	-2.09	8.00	Complies
11	2462 MHz	-12.83	-11.78	-11.91	-7.38	8.00	Complies

Configuration IEEE 802.11n MCS0 HT40

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
3	2422 MHz	-16.19	-14.97	-16.31	-11.01	8.00	Complies
6	2437 MHz	-14.35	-13.70	-13.06	-8.90	8.00	Complies
9	2452 MHz	-15.65	-17.12	-16.95	-11.75	8.00	Complies

For 5GHz Band
Configuration IEEE 802.11ac MCS0, Nss1 VHT20

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
149	5745 MHz	-4.81	-5.93	-4.48	-0.26	8.00	Complies
157	5785 MHz	-3.86	-5.75	-5.11	-0.06	8.00	Complies
165	5825 MHz	-4.40	-5.87	-6.13	-0.63	8.00	Complies

Configuration IEEE 802.11ac MCS0, Nss1 VHT40

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
151	5755 MHz	-8.11	-8.81	-6.42	-2.89	8.00	Complies
159	5795 MHz	-8.21	-7.83	-9.05	-3.56	8.00	Complies

Configuration IEEE 802.11ac MCS0, Nss1 VHT80

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
155	5775 MHz	-10.03	-13.30	-12.46	-6.93	8.00	Complies

Temperature	22°C	Humidity	56%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a/b/g
Test Mode	Mode 2 (EUT 2)		

Configuration IEEE 802.11b / Ant. 1

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
1	2412 MHz	-1.80	8.00	Complies
6	2437 MHz	-0.49	8.00	Complies
11	2462 MHz	-0.15	8.00	Complies

Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
1	2412 MHz	-9.99	8.00	Complies
6	2437 MHz	-6.43	8.00	Complies
11	2462 MHz	-7.10	8.00	Complies


Configuration IEEE 802.11a / Ant. 1

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
149	5745 MHz	-5.92	8.00	Complies
157	5785 MHz	-6.22	8.00	Complies
165	5825 MHz	-4.78	8.00	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant. 1 /
Test Mode: Mode 1 (EUT 1)**

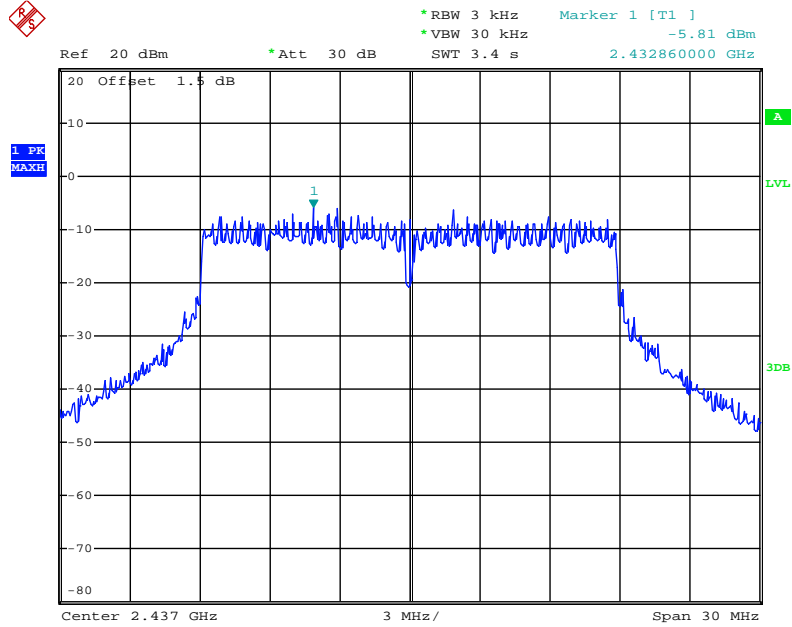


Date: 15.FEB.2014 12:15:04

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant. 2 /
Test Mode: Mode 1 (EUT 1)**

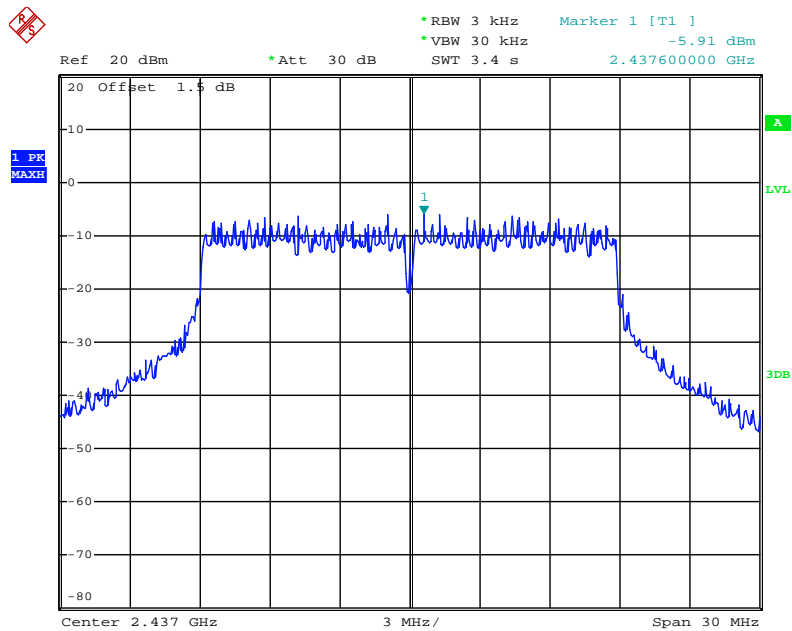


Date: 15.FEB.2014 12:15:54

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant. 3 /
Test Mode: Mode 1 (EUT 1)**

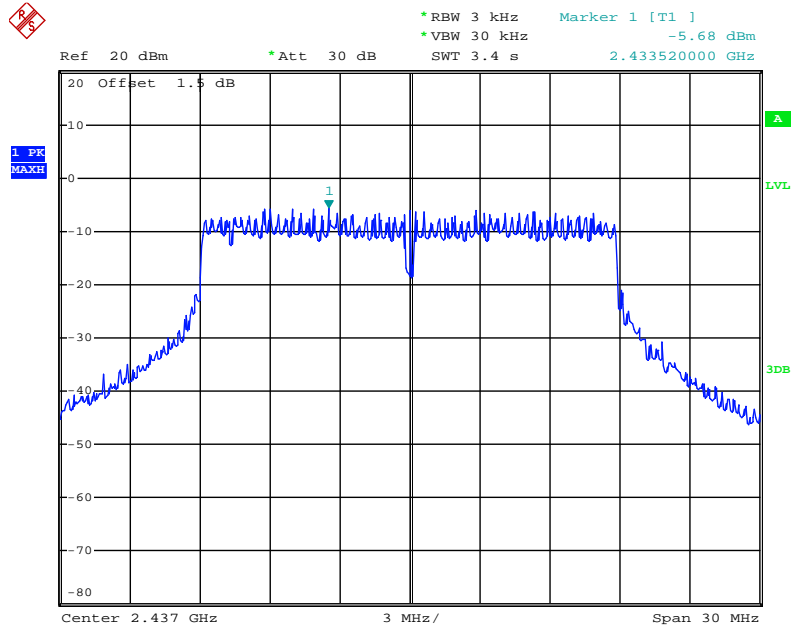


Date: 15.FEB.2014 12:17:02

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 1 /
Test Mode: Mode 1 (EUT 1)**

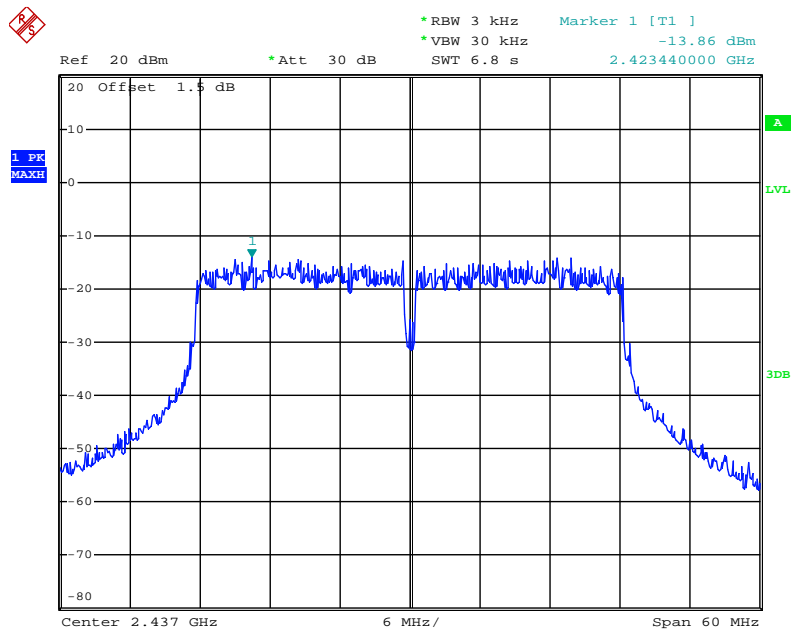


Date: 15.FEB.2014 12:24:41

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 2 /
Test Mode: Mode 1 (EUT 1)**

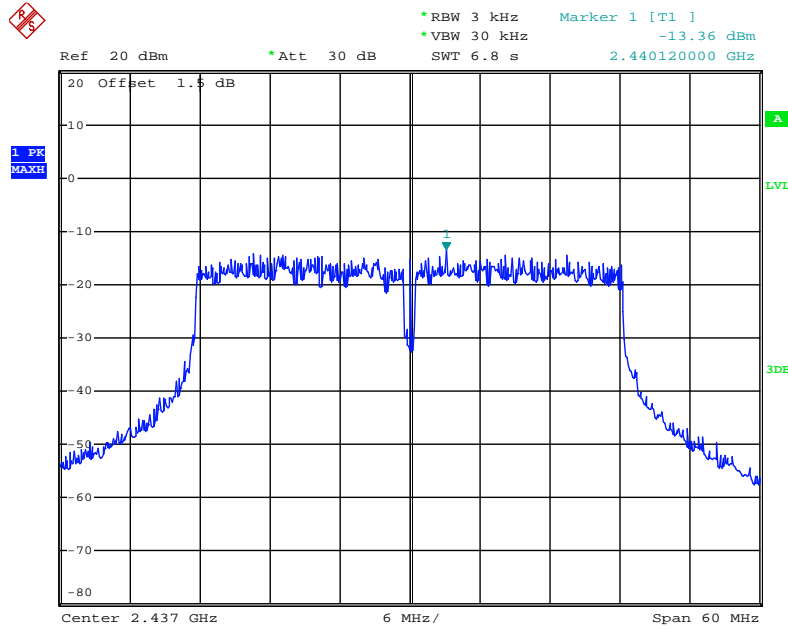


Date: 15.FEB.2014 12:24:08

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 3 /
Test Mode: Mode 1 (EUT 1)**

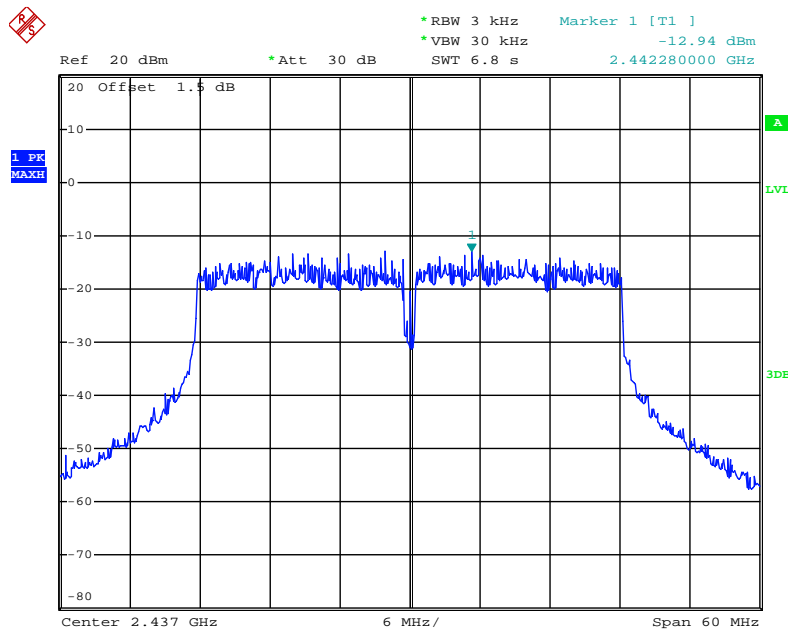


Date: 15.FEB.2014 12:22:51

**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / 5825 MHz / Ant. 1 /
Test Mode: Mode 1 (EUT 1)**

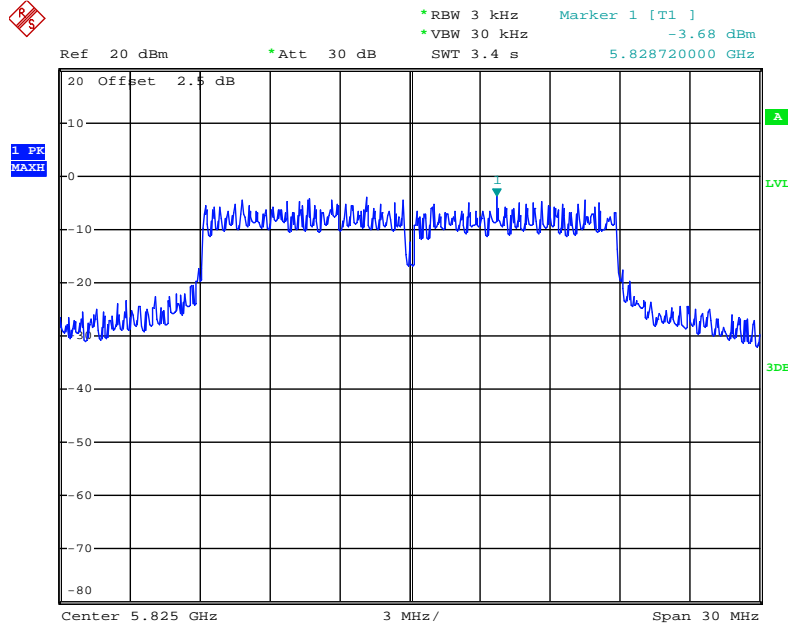


Date: 15.FEB.2014 09:09:21

**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / 5825 MHz / Ant. 2 /
Test Mode: Mode 1 (EUT 1)**

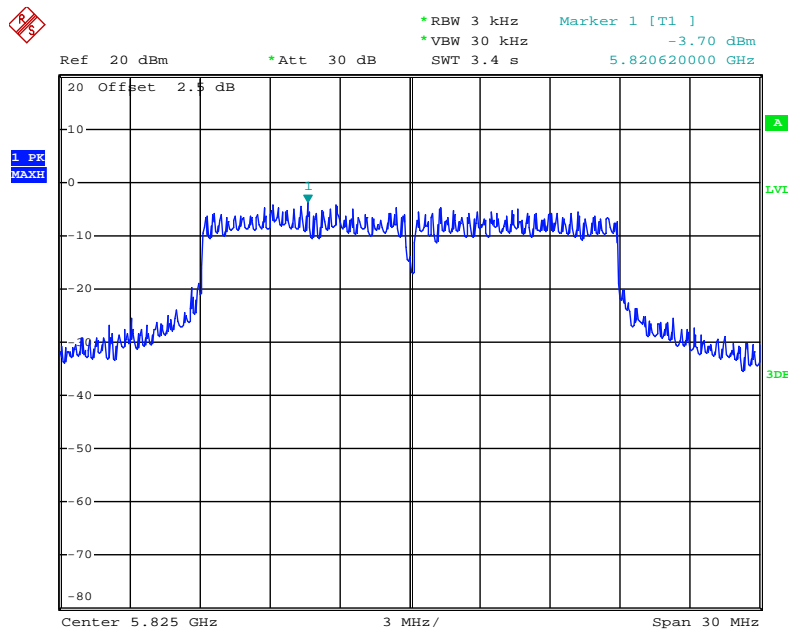


Date: 15.FEB.2014 09:10:14

**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / 5825 MHz / Ant. 3 /
Test Mode: Mode 1 (EUT 1)**

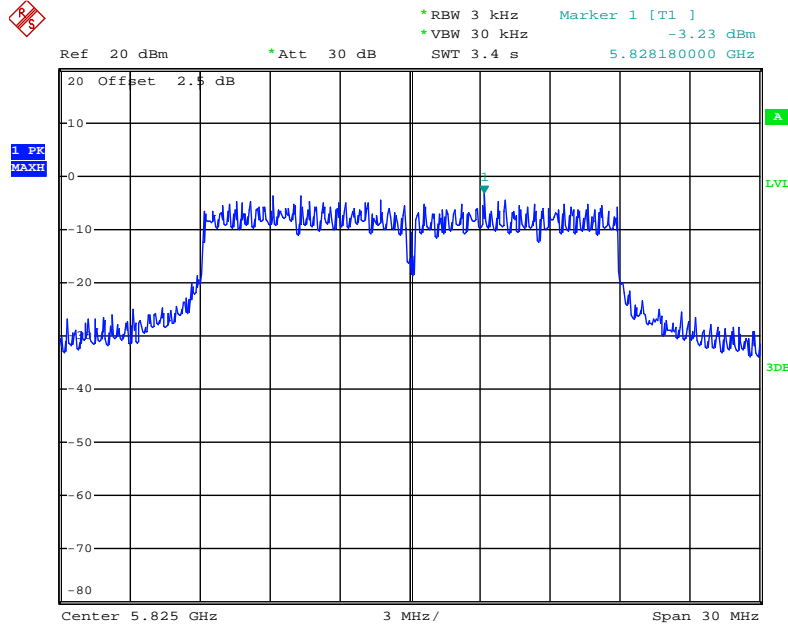


Date: 15.FEB.2014 09:11:36

**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / 5795 MHz / Ant. 1 /
Test Mode: Mode 1 (EUT 1)**

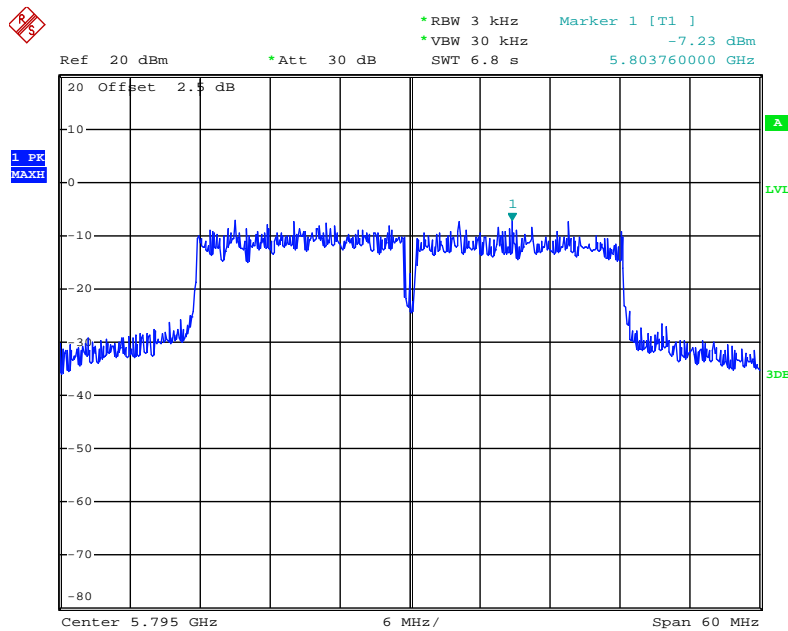


Date: 15.FEB.2014 09:14:35

**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / 5795 MHz / Ant. 2 /
Test Mode: Mode 1 (EUT 1)**

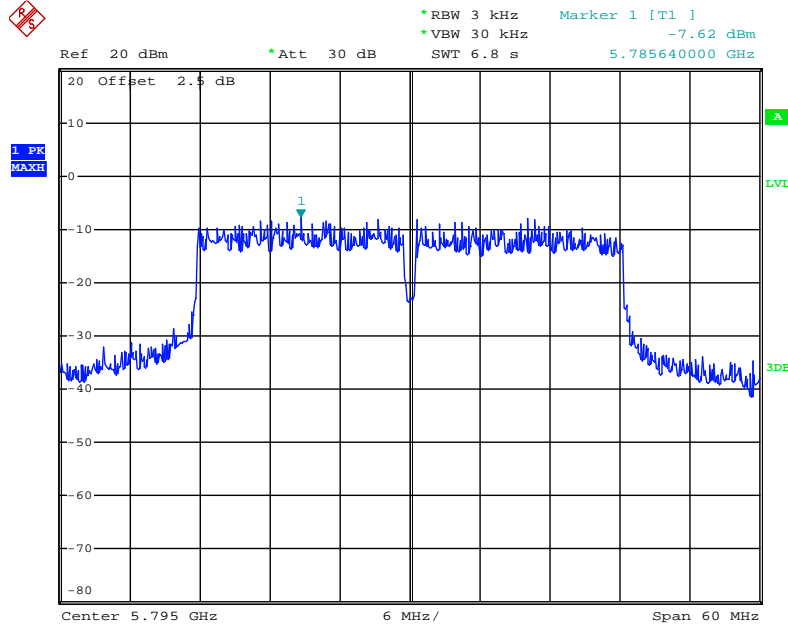


Date: 15.FEB.2014 09:15:17

**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / 5795 MHz / Ant. 3 /
Test Mode: Mode 1 (EUT 1)**

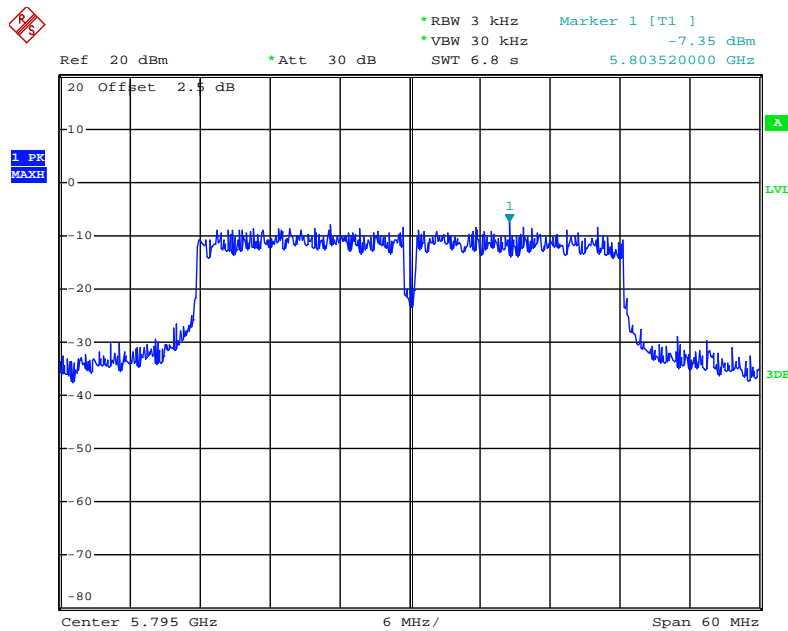


Date: 15.FEB.2014 09:15:56

**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / 5775 MHz / Ant. 1 /
Test Mode: Mode 1 (EUT 1)**

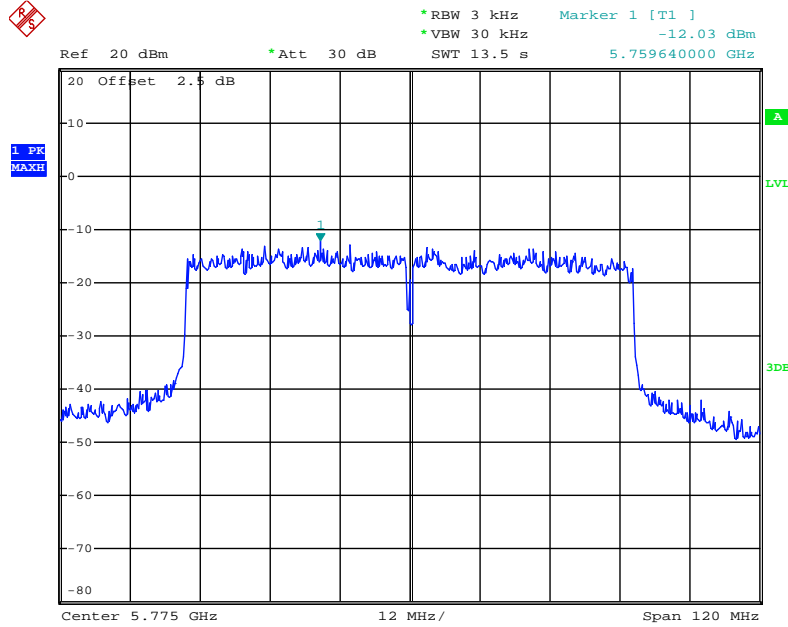


Date: 15.FEB.2014 09:19:48

**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / 5775 MHz / Ant. 2 /
Test Mode: Mode 1 (EUT 1)**

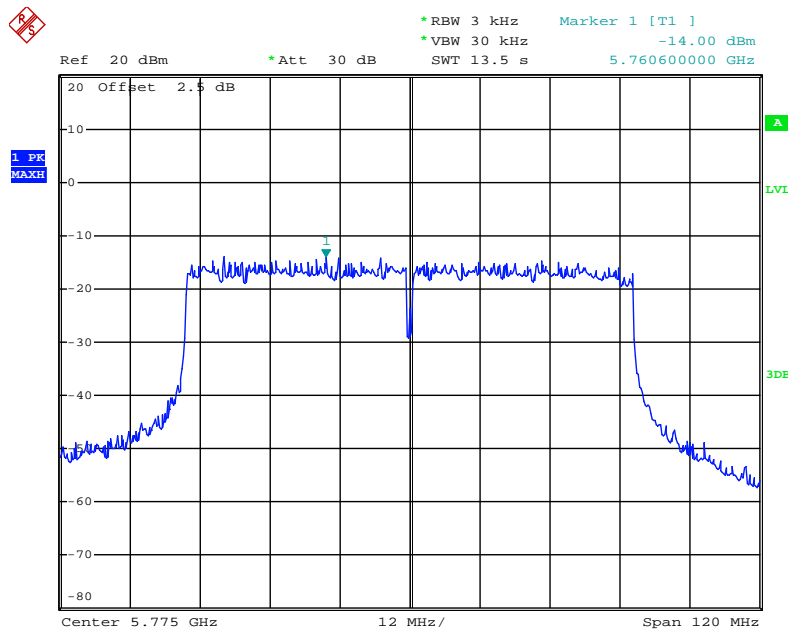


Date: 15.FEB.2014 09:17:54

**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / 5775 MHz / Ant. 3 /
Test Mode: Mode 1 (EUT 1)**

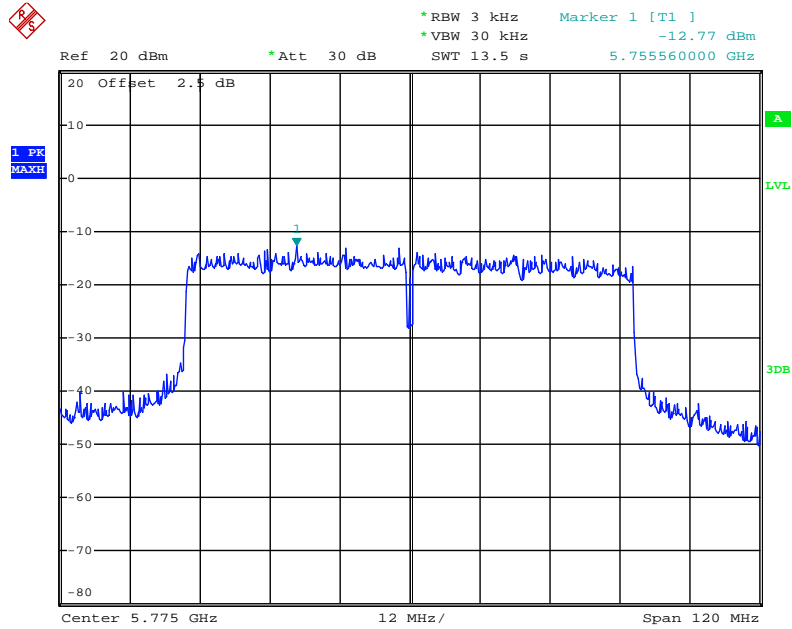


Date: 15.FEB.2014 09:16:54

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Ant. 1/ Test Mode: Mode 1 (EUT 1)

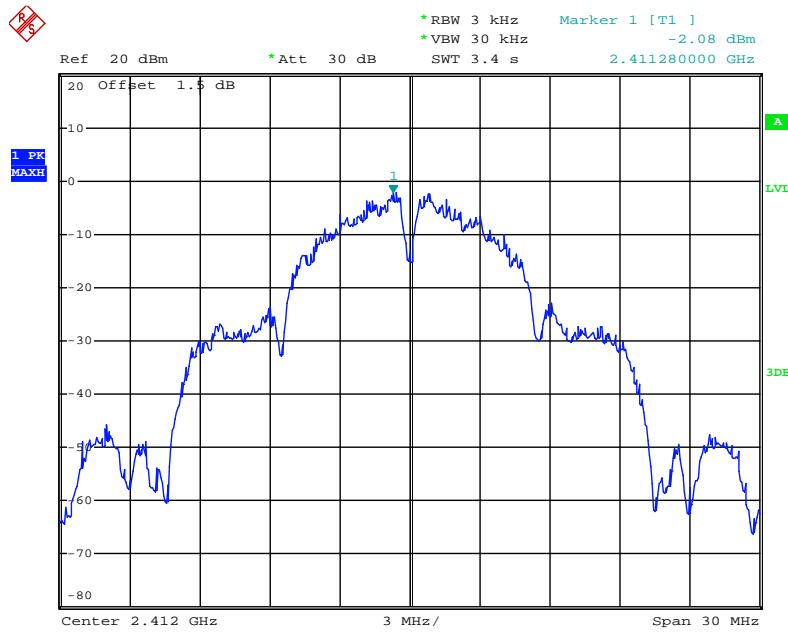


Date: 15.FEB.2014 11:58:26

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 1/ Test Mode: Mode 1 (EUT 1)

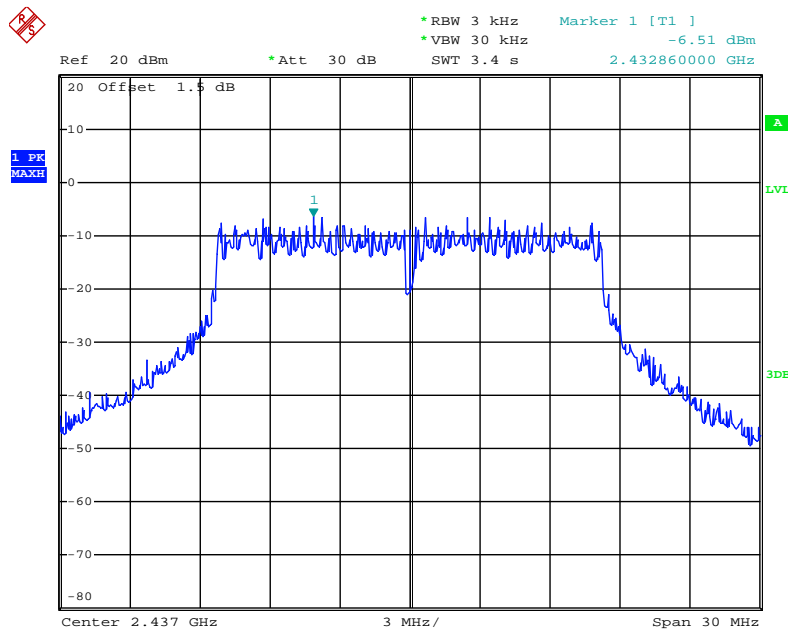


Date: 15.FEB.2014 12:01:07

Power Density Plot on Configuration IEEE 802.11a / 5785 MHz / Ant. 1/ Test Mode: Mode 1 (EUT 1)

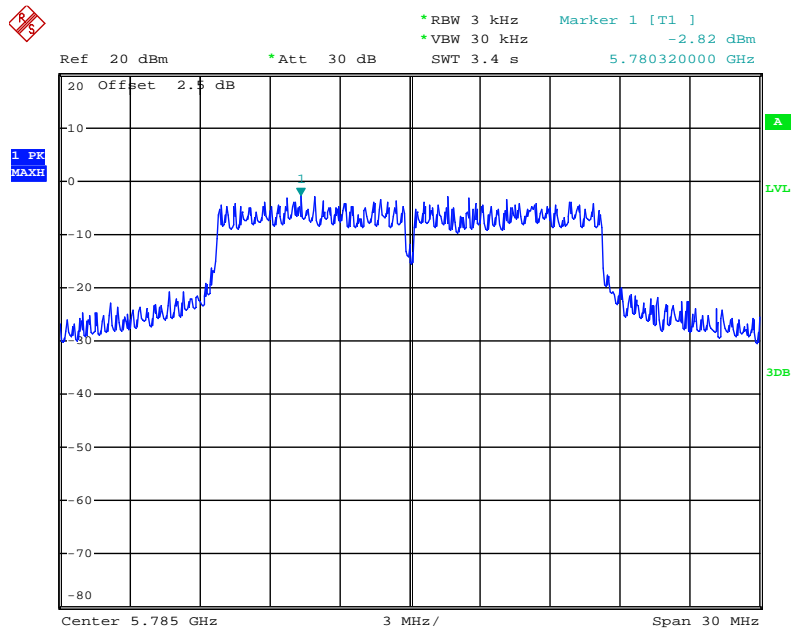


Date: 15.FEB.2014 07:30:56

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant. 1 /
Test Mode: Mode 2 (EUT 2)**

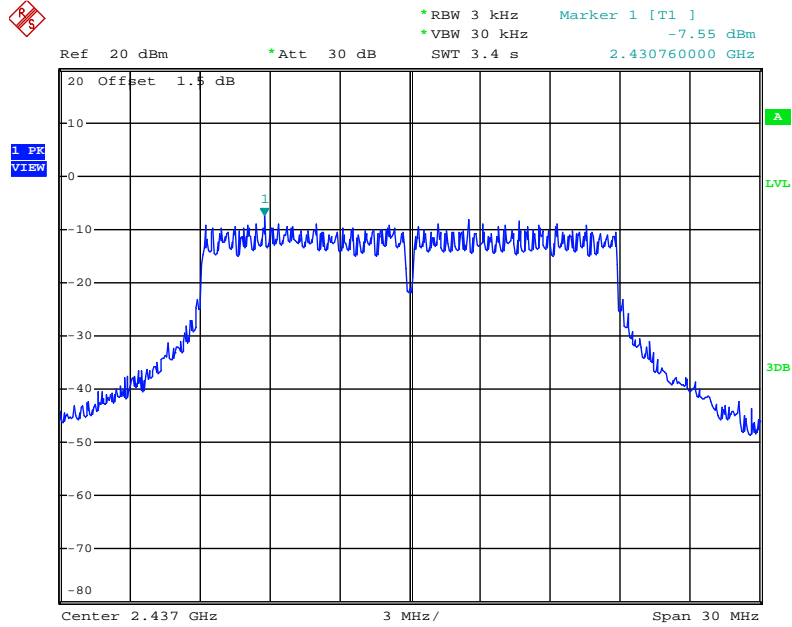


Date: 1.MAR.2014 11:07:28

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant. 2 /
Test Mode: Mode 2 (EUT 2)**

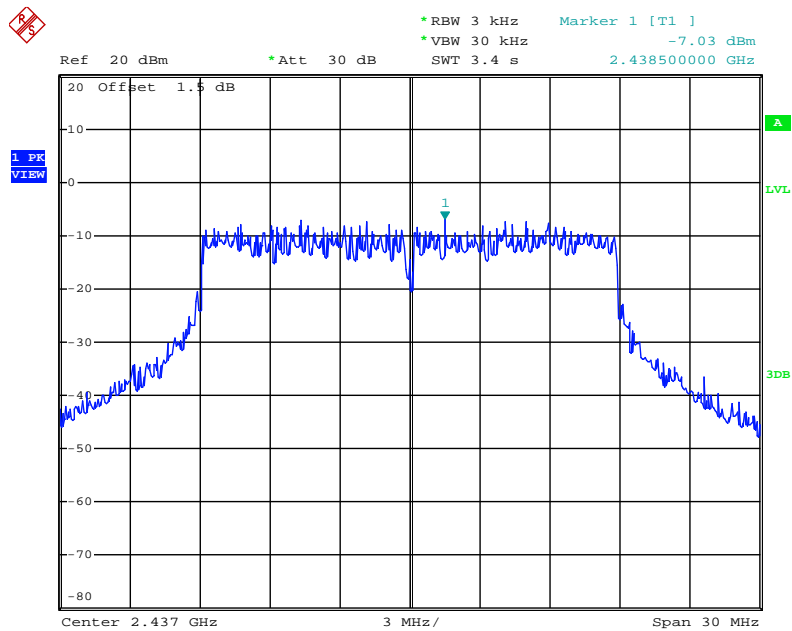


Date: 1.MAR.2014 11:05:01

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant. 3 /
Test Mode: Mode 2 (EUT 2)**

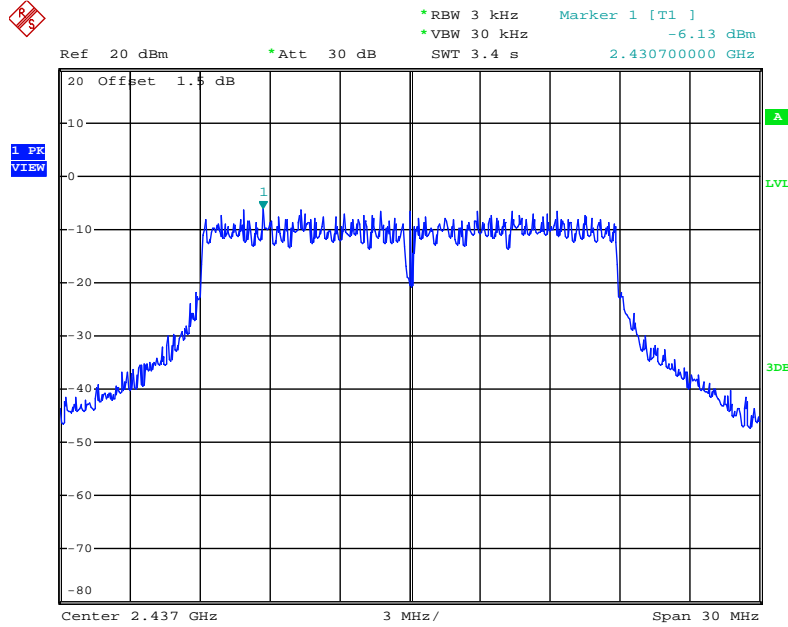


Date: 1.MAR.2014 11:04:23

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 1 /
Test Mode: Mode 2 (EUT 2)**

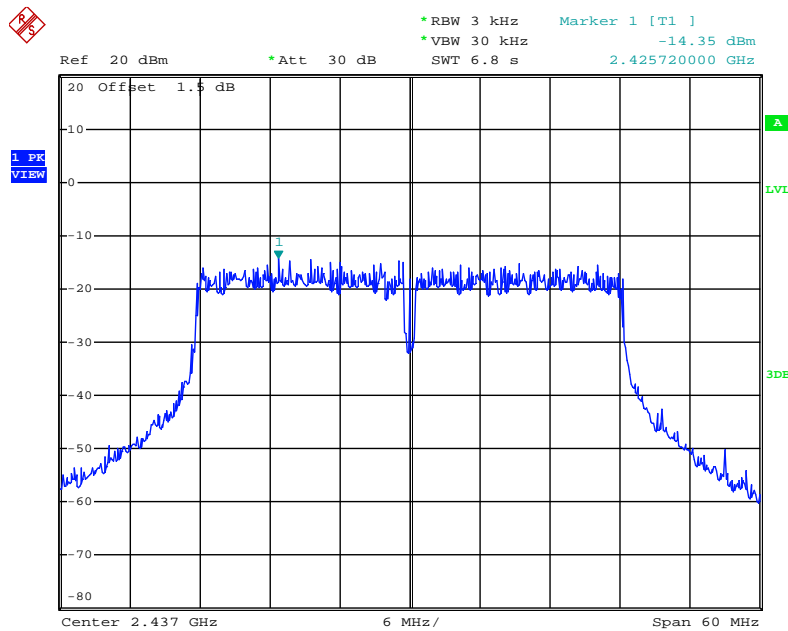


Date: 1.MAR.2014 11:28:30

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 2 /
Test Mode: Mode 2 (EUT 2)**

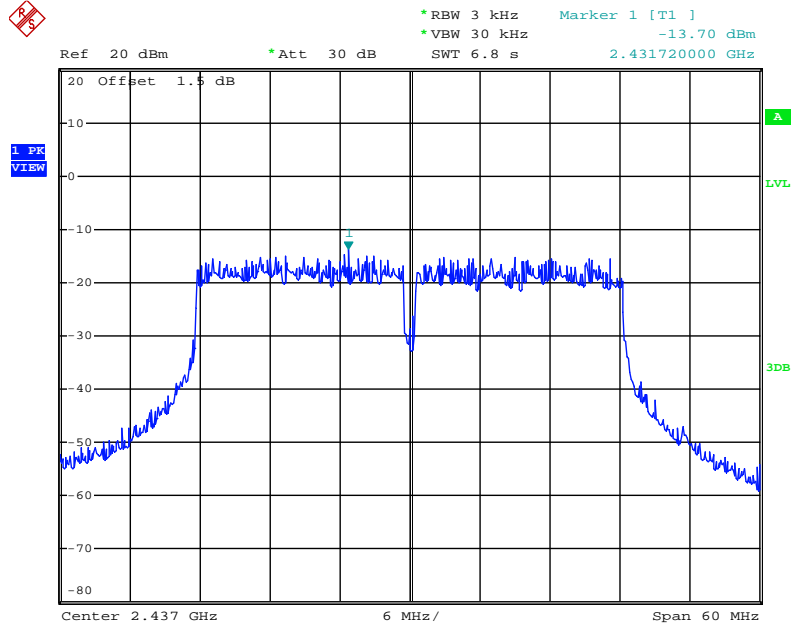


Date: 1.MAR.2014 11:30:24

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 3 /
Test Mode: Mode 2 (EUT 2)**

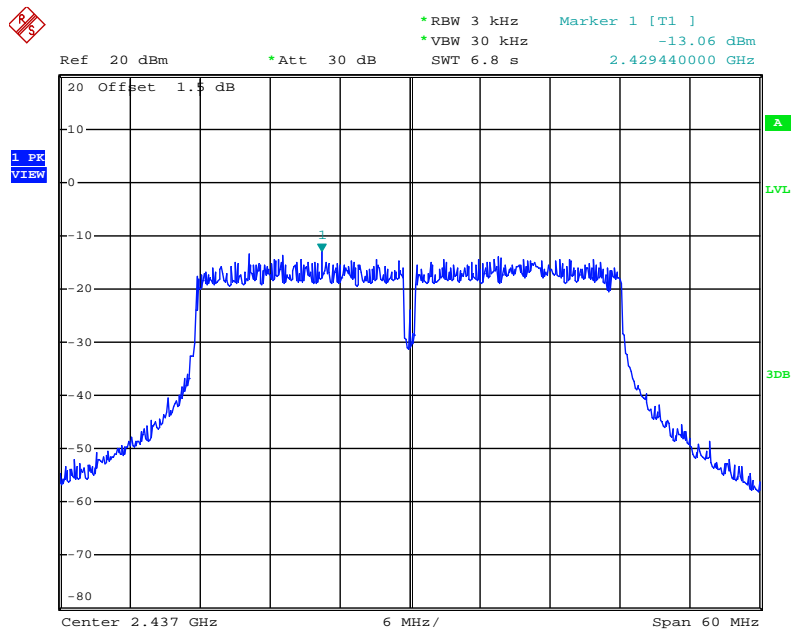


Date: 1.MAR.2014 11:31:11

**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / 5785 MHz / Ant. 1 /
Test Mode: Mode 2 (EUT 2)**

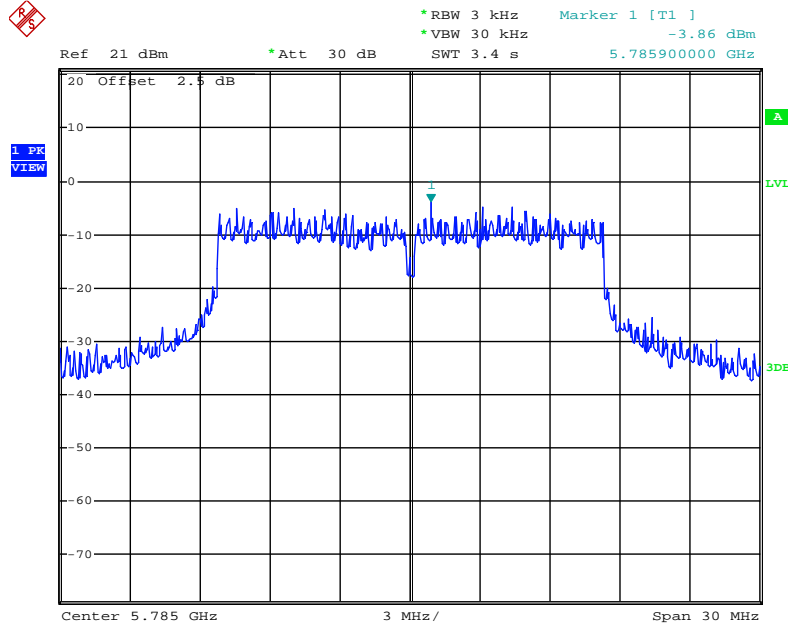


Date: 1.MAR.2014 12:07:46

**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / 5785 MHz / Ant. 2 /
Test Mode: Mode 2 (EUT 2)**

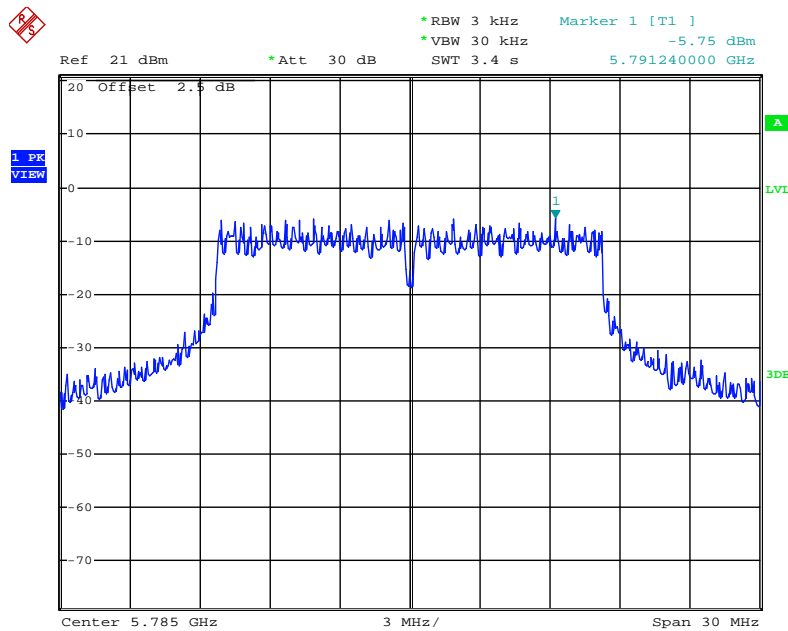


Date: 1.MAR.2014 12:06:30

**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / 5785 MHz / Ant. 3 /
Test Mode: Mode 2 (EUT 2)**

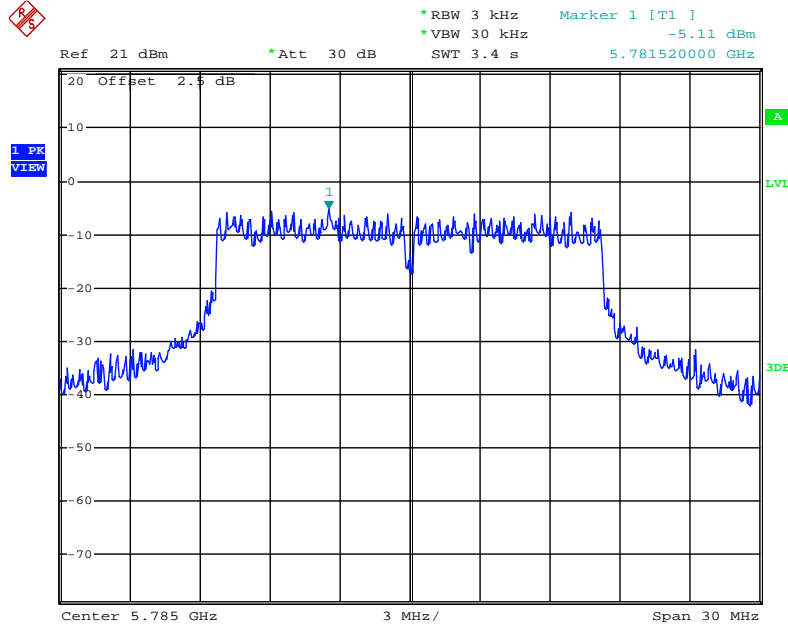


Date: 1.MAR.2014 12:05:35

**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / 5755 MHz / Ant. 1 /
Test Mode: Mode 2 (EUT 2)**

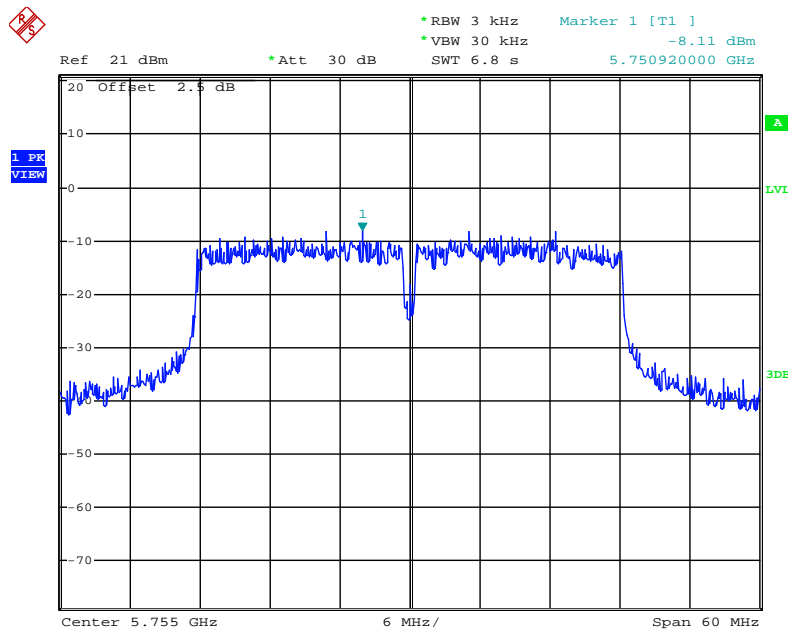


Date: 1.MAR.2014 12:28:07

**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / 5755 MHz / Ant. 2 /
Test Mode: Mode 2 (EUT 2)**

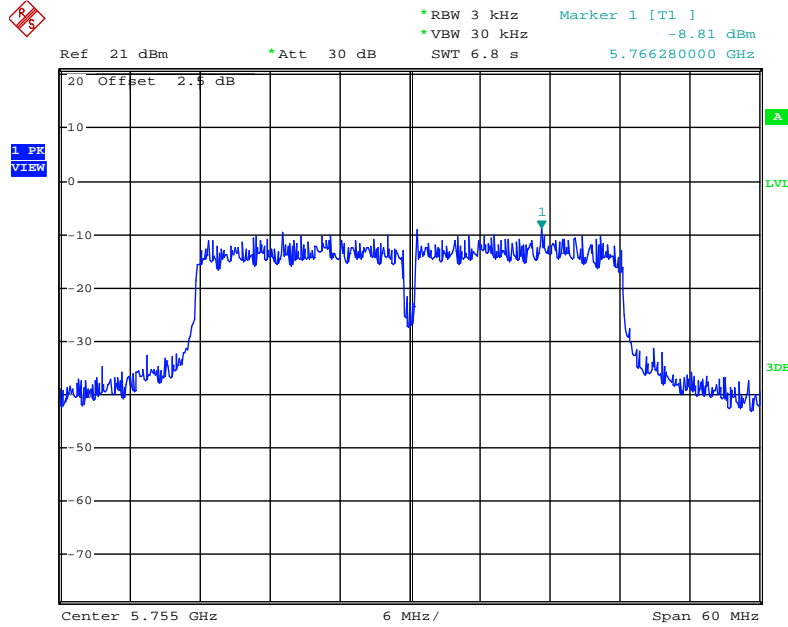


Date: 1.MAR.2014 12:27:28

**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / 5755 MHz / Ant. 3 /
Test Mode: Mode 2 (EUT 2)**

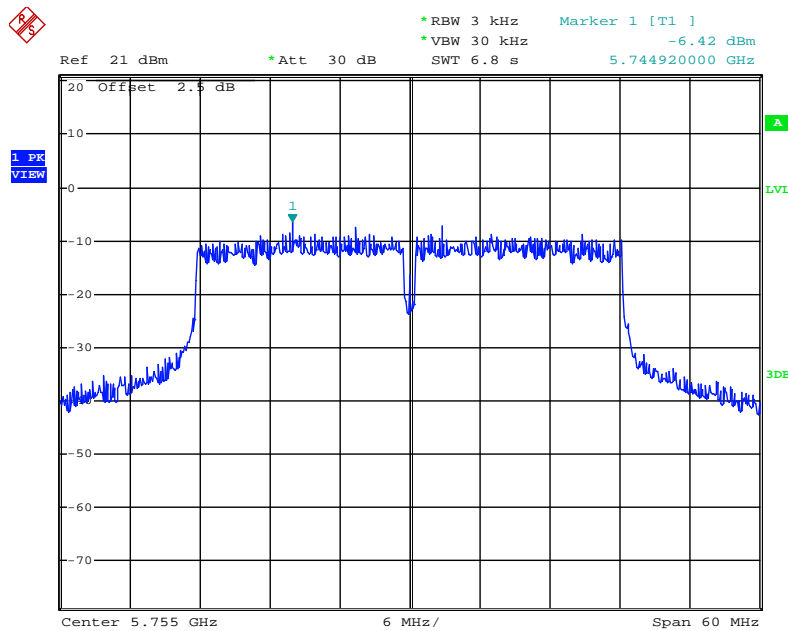


Date: 1.MAR.2014 12:26:42

**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / 5775 MHz / Ant. 1 /
Test Mode: Mode 2 (EUT 2)**

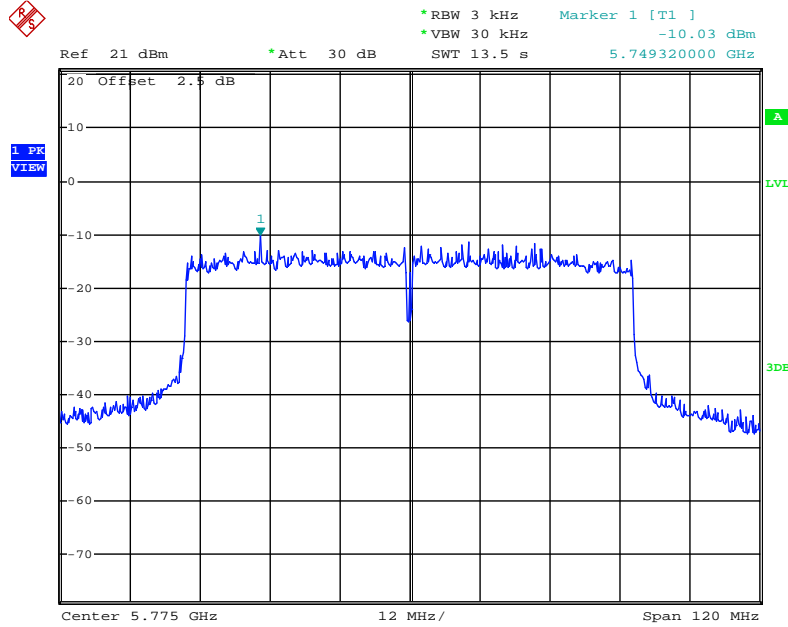


Date: 1.MAR.2014 12:35:44

**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / 5775 MHz / Ant. 2 /
Test Mode: Mode 2 (EUT 2)**

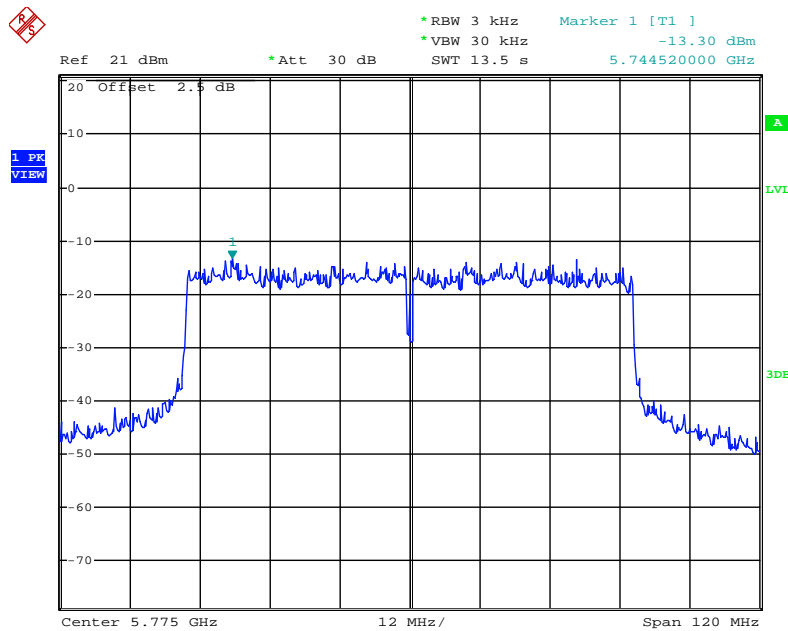


Date: 1.MAR.2014 12:37:07

**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / 5775 MHz / Ant. 3 /
Test Mode: Mode 2 (EUT 2)**

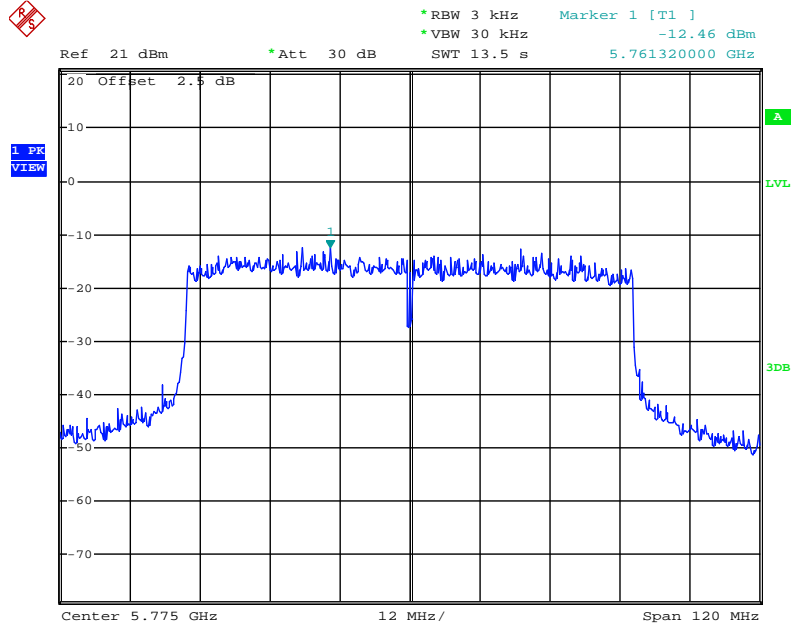


Date: 1.MAR.2014 12:38:58

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Ant. 1 / Test Mode: Mode 2 (EUT 2)

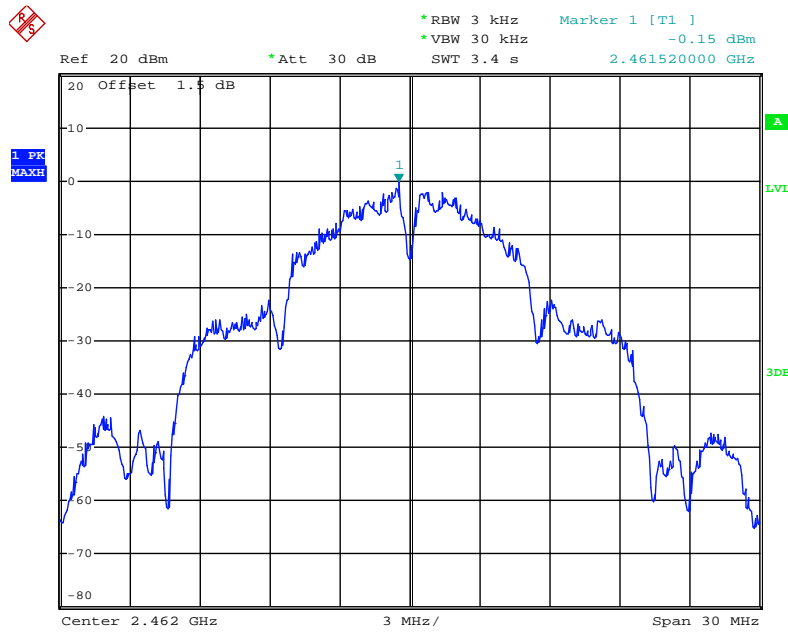


Date: 1.MAR.2014 10:46:51

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 1 / Test Mode: Mode 2 (EUT 2)

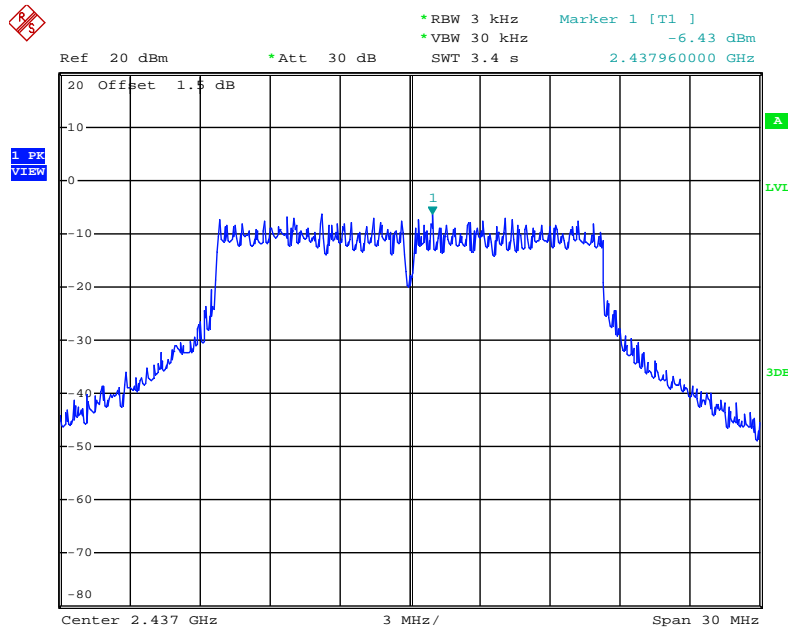

Date: 1.MAR.2014 10:53:32

Power Density Plot on Configuration IEEE 802.11a / 5825 MHz / Ant. 1 / Test Mode: Mode 2 (EUT 2)

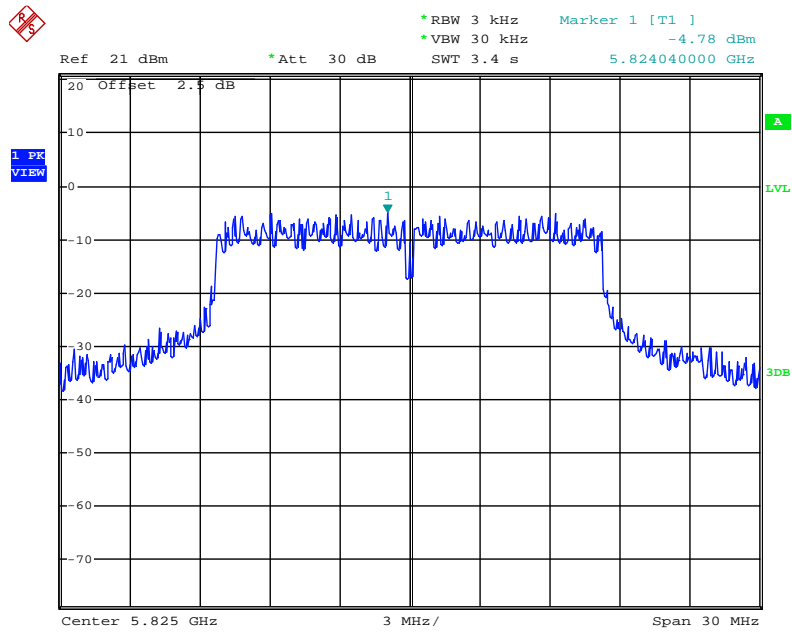

Date: 1.MAR.2014 11:59:35

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8.0 DTS 6-dB signal bandwidth option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	20°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n/ac
Test Mode	Mode 1 (EUT 1)		

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 HT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.32	17.68	500	Complies
6	2437 MHz	17.60	18.00	500	Complies
11	2462 MHz	16.32	17.68	500	Complies

Configuration IEEE 802.11n MCS0 HT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.48	36.48	500	Complies
6	2437 MHz	36.48	36.48	500	Complies
9	2452 MHz	36.48	36.48	500	Complies

For 5GHz Band

Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	17.84	23.84	500	Complies
157	5785 MHz	17.76	23.28	500	Complies
165	5825 MHz	17.76	23.20	500	Complies

Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	26.72	35.68	500	Complies
159	5795 MHz	36.48	41.76	500	Complies

Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
155	5775 MHz	73.28	75.52	500	Complies

Temperature	20°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a/b/g
Test Mode	Mode 1 (EUT 1)		

Configuration IEEE 802.11b / Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	5.60	10.16	500	Complies
6	2437 MHz	5.76	10.08	500	Complies
11	2462 MHz	6.08	10.08	500	Complies

Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.48	16.56	500	Complies
6	2437 MHz	16.48	16.64	500	Complies
11	2462 MHz	16.48	16.64	500	Complies

Configuration IEEE 802.11a / Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.56	23.76	500	Complies
157	5785 MHz	16.48	22.72	500	Complies
165	5825 MHz	16.32	22.32	500	Complies

Temperature	22°C	Humidity	56%
Test Engineer	Nick Peng	Configurations	IEEE 802.11n/ac
Test Mode	Mode 2 (EUT 2)		

For 2.4GHz Band
Configuration IEEE 802.11n MCS0 HT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.40	17.76	500	Complies
6	2437 MHz	13.84	17.76	500	Complies
11	2462 MHz	15.12	17.68	500	Complies

Configuration IEEE 802.11n MCS0 HT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	31.68	36.16	500	Complies
6	2437 MHz	33.60	36.16	500	Complies
9	2452 MHz	53.52	36.16	500	Complies

For 5GHz Band
Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	14.72	16.96	500	Complies
157	5785 MHz	14.48	17.60	500	Complies
165	5825 MHz	15.76	17.12	500	Complies

Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	34.56	36.32	500	Complies
159	5795 MHz	34.24	36.32	500	Complies

Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
155	5775 MHz	71.36	75.52	500	Complies

Temperature	22°C	Humidity	56%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a/b/g
Test Mode	Mode 2 (EUT 2)		

Configuration IEEE 802.11b / Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	8.08	12.80	500	Complies
6	2437 MHz	5.04	11.92	500	Complies
11	2462 MHz	4.48	8.40	500	Complies

Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	15.76	16.64	500	Complies
6	2437 MHz	13.52	16.32	500	Complies
11	2462 MHz	16.48	16.64	500	Complies


Configuration IEEE 802.11a / Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	13.60	16.80	500	Complies
157	5785 MHz	14.48	18.32	500	Complies
165	5825 MHz	15.92	17.04	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

**6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2412 MHz / Ant. 1 + Ant. 2 + Ant. 3 /
Test Mode: Mode 1 (EUT 1)**

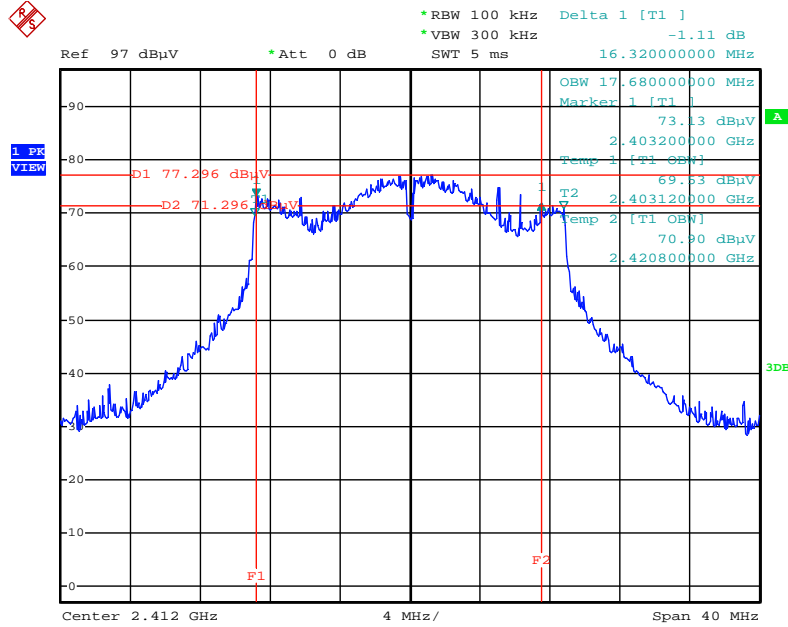


Date: 15.FEB.2014 11:42:13

**6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Ant. 1 + Ant. 2 + Ant. 3 /
Test Mode: Mode 1 (EUT 1)**

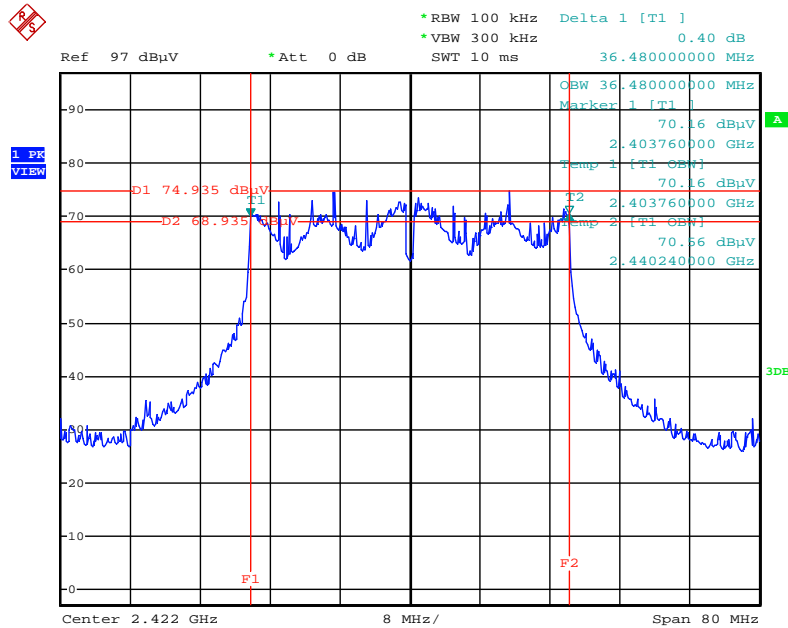


Date: 15.FEB.2014 11:45:57

**6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / 5785 MHz /
Ant. 1 + Ant. 2 + Ant. 3 / Test Mode: Mode 1 (EUT 1)**

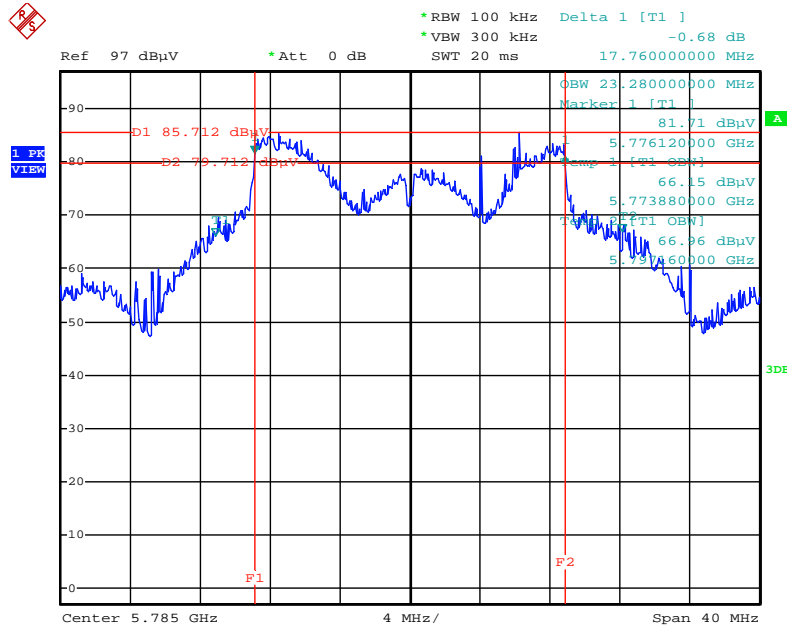


Date: 15.FEB.2014 07:21:21

**6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / 5755MHz /
Ant. 1 + Ant. 2 + Ant. 3 / Test Mode: Mode 1 (EUT 1)**

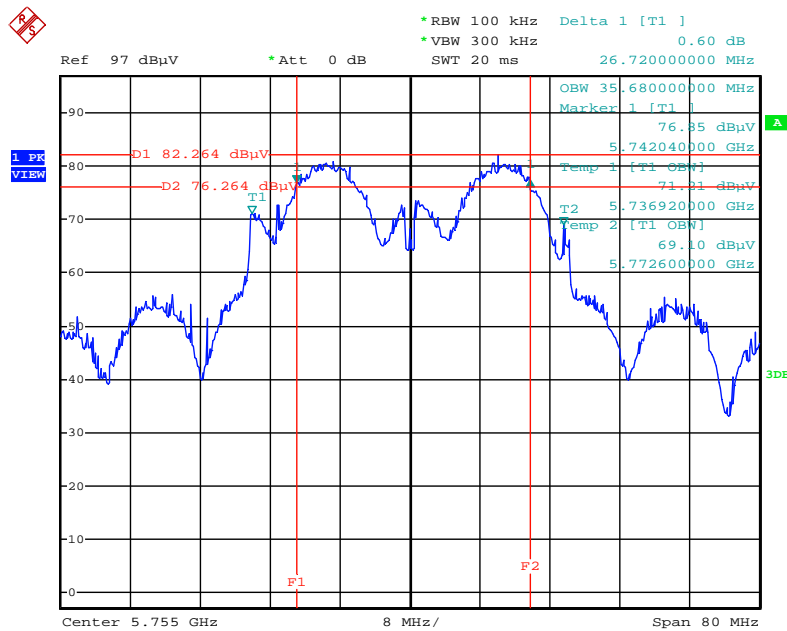


Date: 15.FEB.2014 07:19:50

**6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / 5775 MHz /
Ant. 1 + Ant. 2 + Ant. 3 / Test Mode: Mode 1 (EUT 1)**

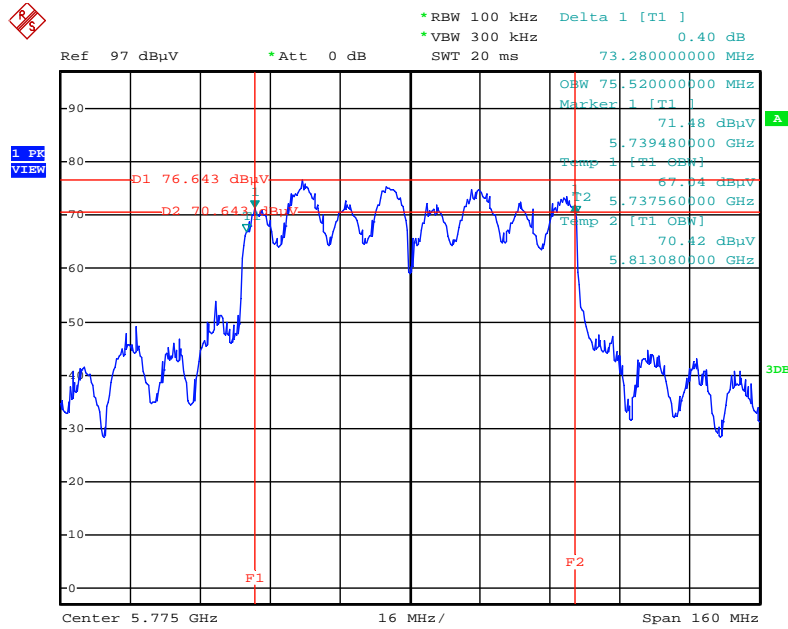


Date: 15.FEB.2014 07:17:43

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Ant. 1 / Test Mode: Mode 1 (EUT 1)

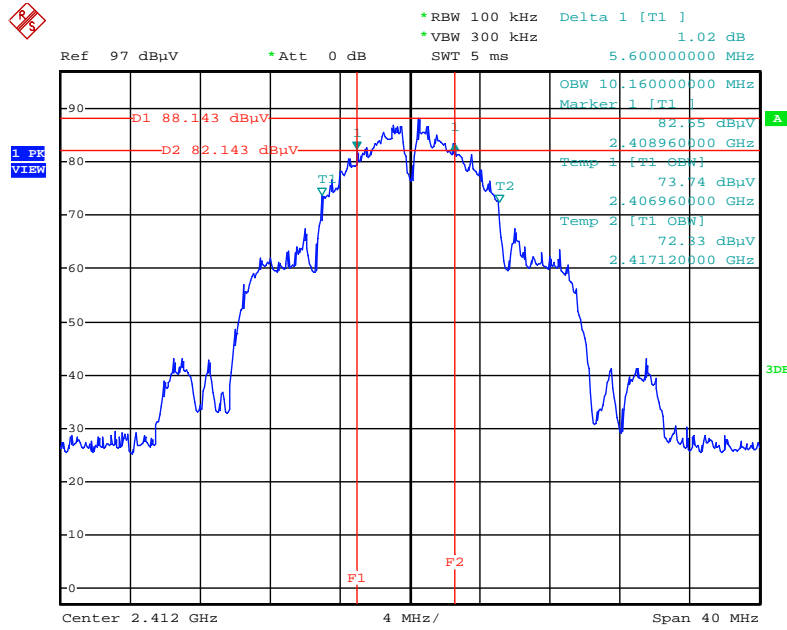


Date: 15.FEB.2014 11:38:00

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 1 / Test Mode: Mode 1 (EUT 1)

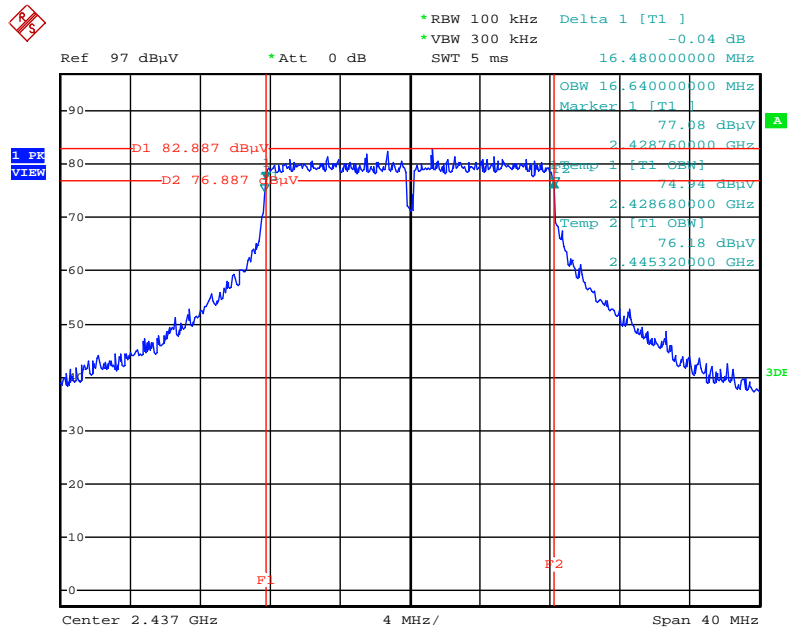


Date: 15.FEB.2014 11:40:09

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5825 MHz / Ant. 1 / Test Mode: Mode 1 (EUT 1)

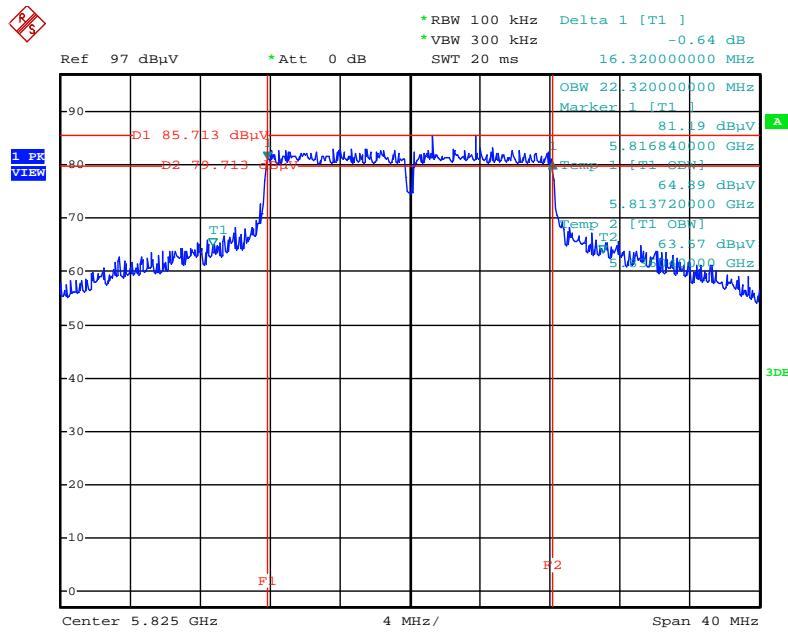


Date: 15.FEB.2014 07:23:24

**6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant. 1 + Ant. 2 + Ant. 3 /
Test Mode: Mode 2 (EUT 2)**

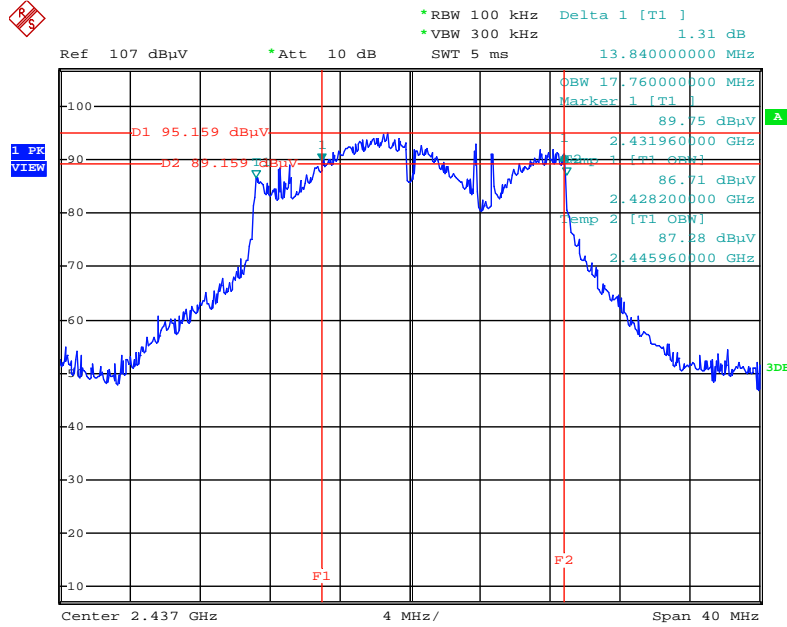


Date: 1.MAR.2014 10:05:05

**6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Ant. 1 + Ant. 2 + Ant. 3 /
Test Mode: Mode 2 (EUT 2)**

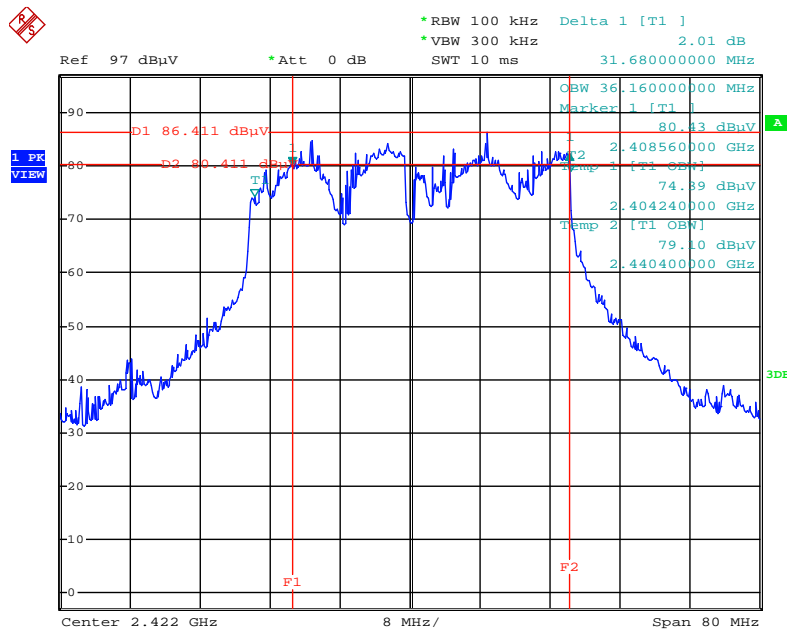


Date: 1.MAR.2014 10:13:28

**6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / 5785 MHz /
Ant. 1 + Ant. 2 + Ant. 3 / Test Mode: Mode 2 (EUT 2)**

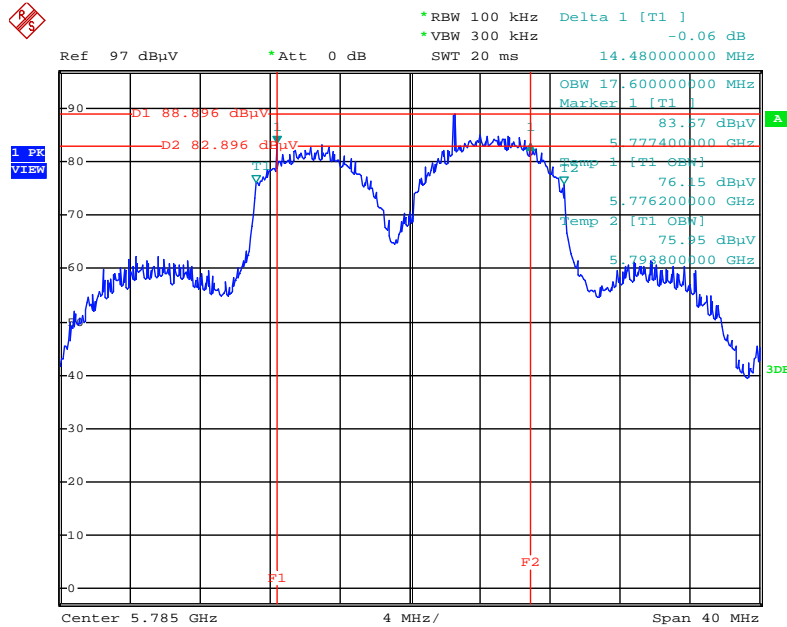


Date: 1.MAR.2014 12:50:37

**6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / 5795MHz /
Ant. 1 + Ant. 2 + Ant. 3 / Test Mode: Mode 2 (EUT 2)**

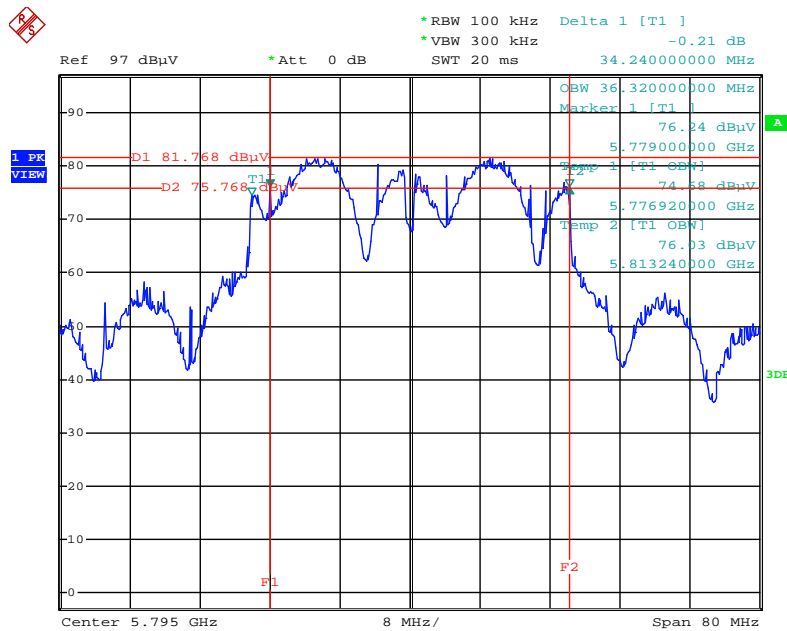


Date: 1.MAR.2014 12:56:42

**6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / 5775 MHz /
Ant. 1 + Ant. 2 + Ant. 3 / Test Mode: Mode 2 (EUT 2)**

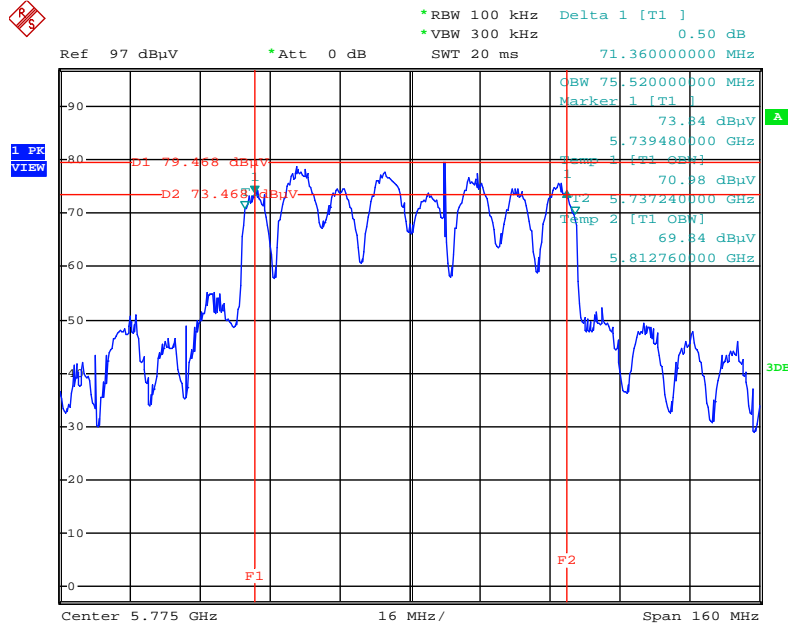


Date: 1.MAR.2014 12:58:21

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Ant. 1 / Test Mode: Mode 2 (EUT 2)

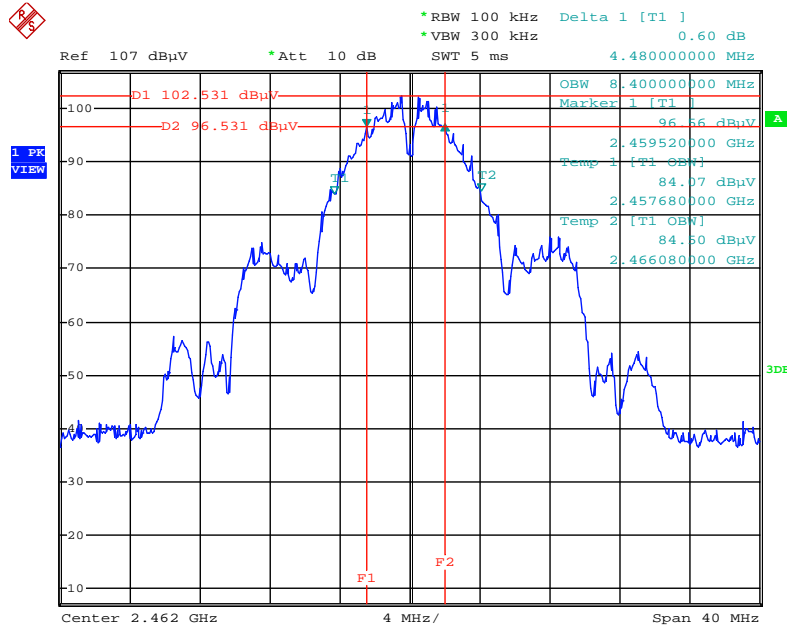


Date: 1.MAR.2014 09:03:26

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 1 / Test Mode: Mode 2 (EUT 2)

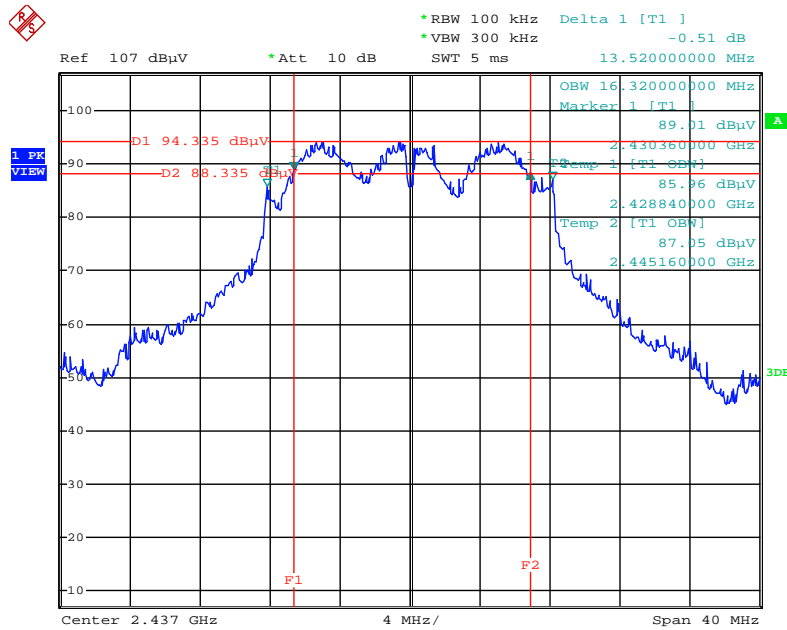

Date: 1.MAR.2014 09:10:43

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5745 MHz / Ant. 1 / Test Mode: Mode 2 (EUT 2)

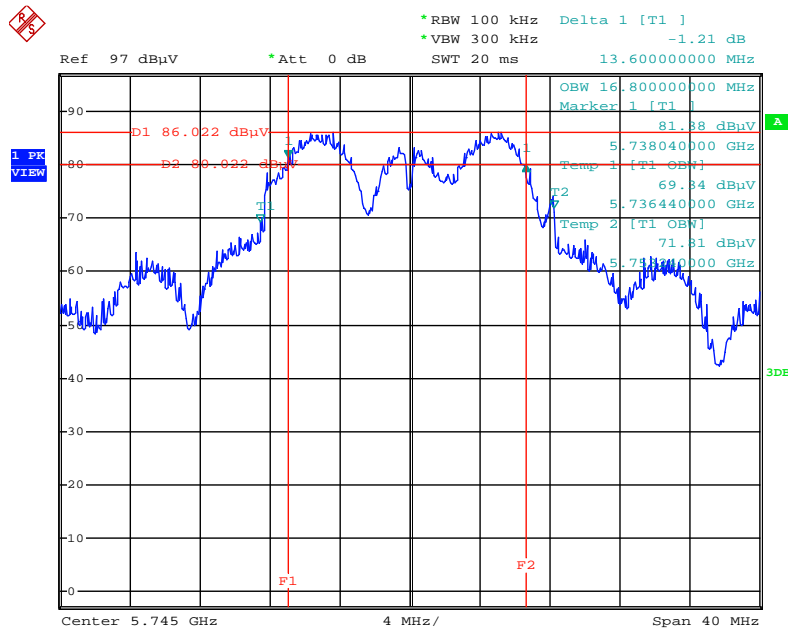

Date: 1.MAR.2014 12:43:39

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1GHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1GHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

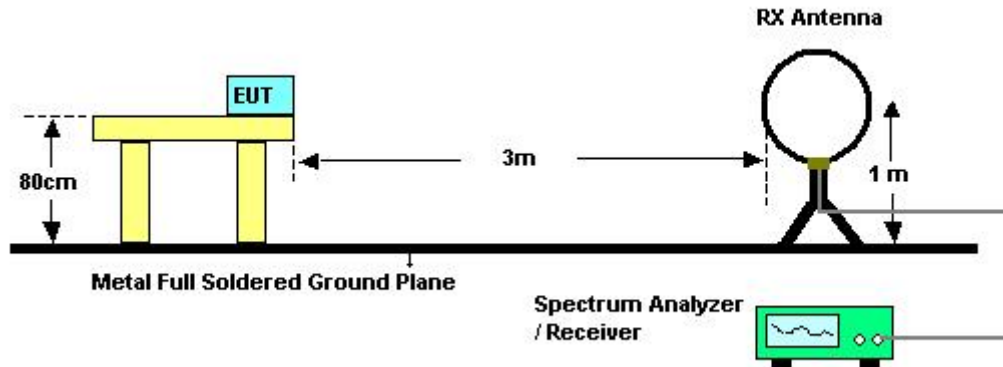

For Radiated Emissions: 30MHz~1GHz

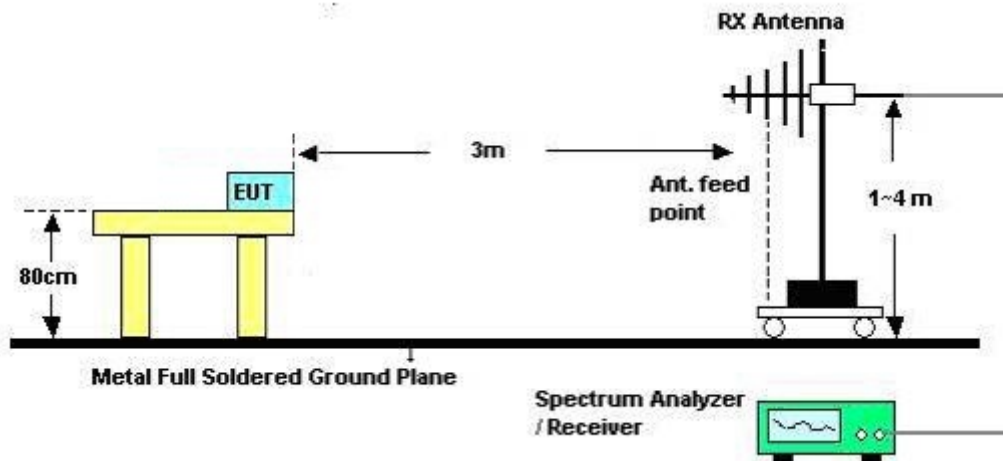

For Radiated Emissions: Above 1GHz

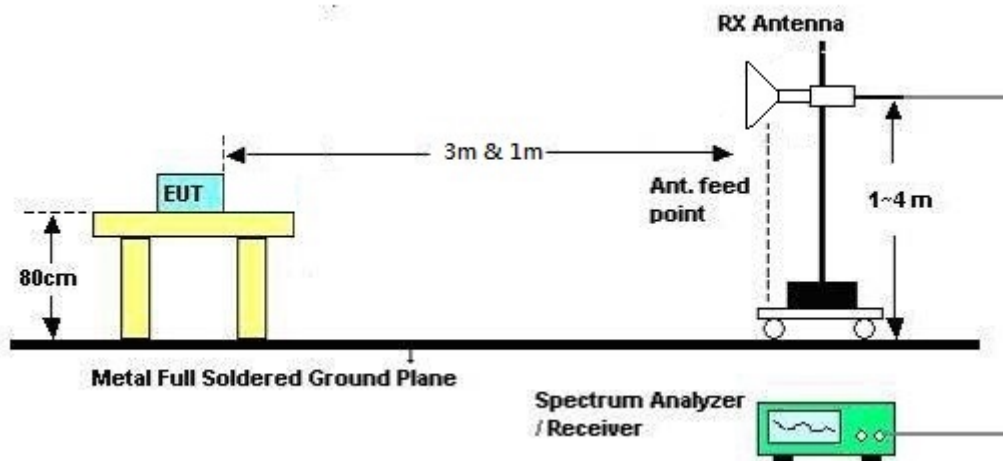

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	Normal Link
Test Date	Feb. 05, 2014		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	Normal Link
Test Mode	Mode 1		

Horizontal

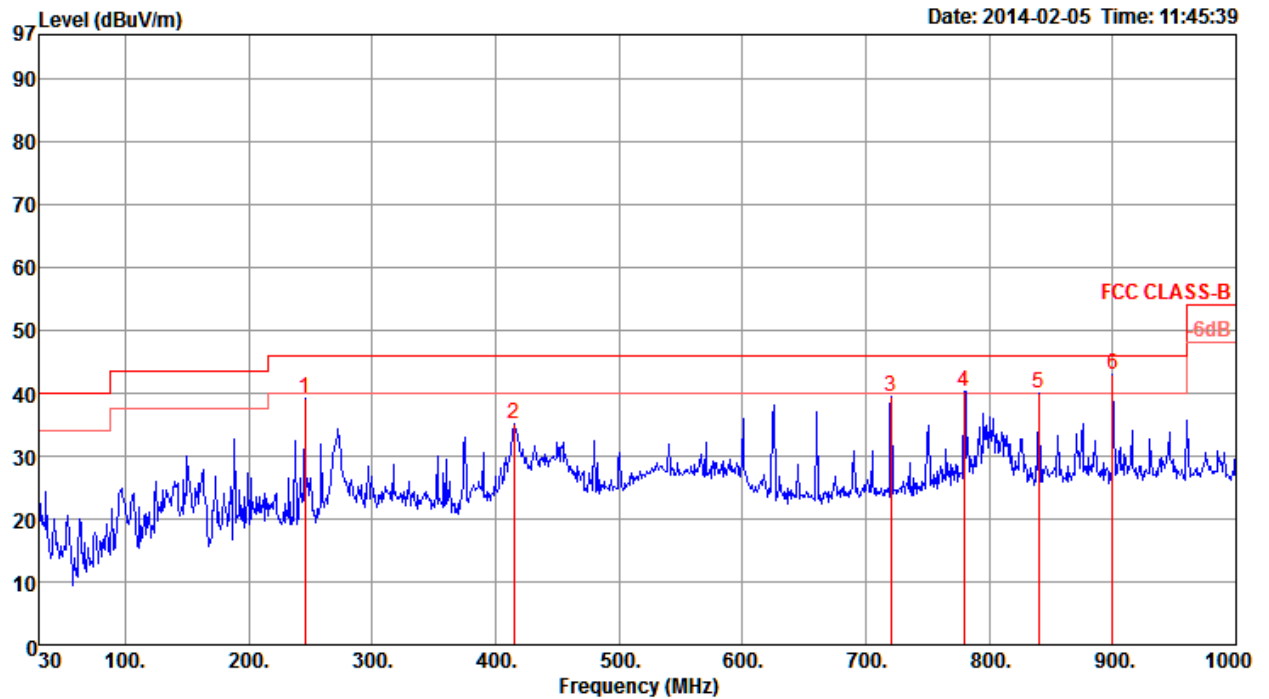

	Freq	Level	Limit	Over	Read	Cable	Preamp		Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	245.34	39.28	46.00	-6.72	51.36	2.34	26.96	-12.08	Peak	0	400	HORIZONTAL
2	415.09	35.23	46.00	-10.77	43.13	3.06	27.61	-7.90	Peak	0	400	HORIZONTAL
3	720.64	39.53	46.00	-6.47	42.37	4.18	27.10	-2.84	Peak	0	400	HORIZONTAL
4	779.81	40.25	46.00	-5.75	42.37	4.30	26.98	-2.12	Peak	0	400	HORIZONTAL
5	839.95	40.10	46.00	-5.90	41.46	4.42	26.90	-1.36	Peak	0	400	HORIZONTAL
6	900.09	42.92	46.00	-3.08	43.65	4.60	26.83	-0.73	Peak	0	400	HORIZONTAL

Vertical

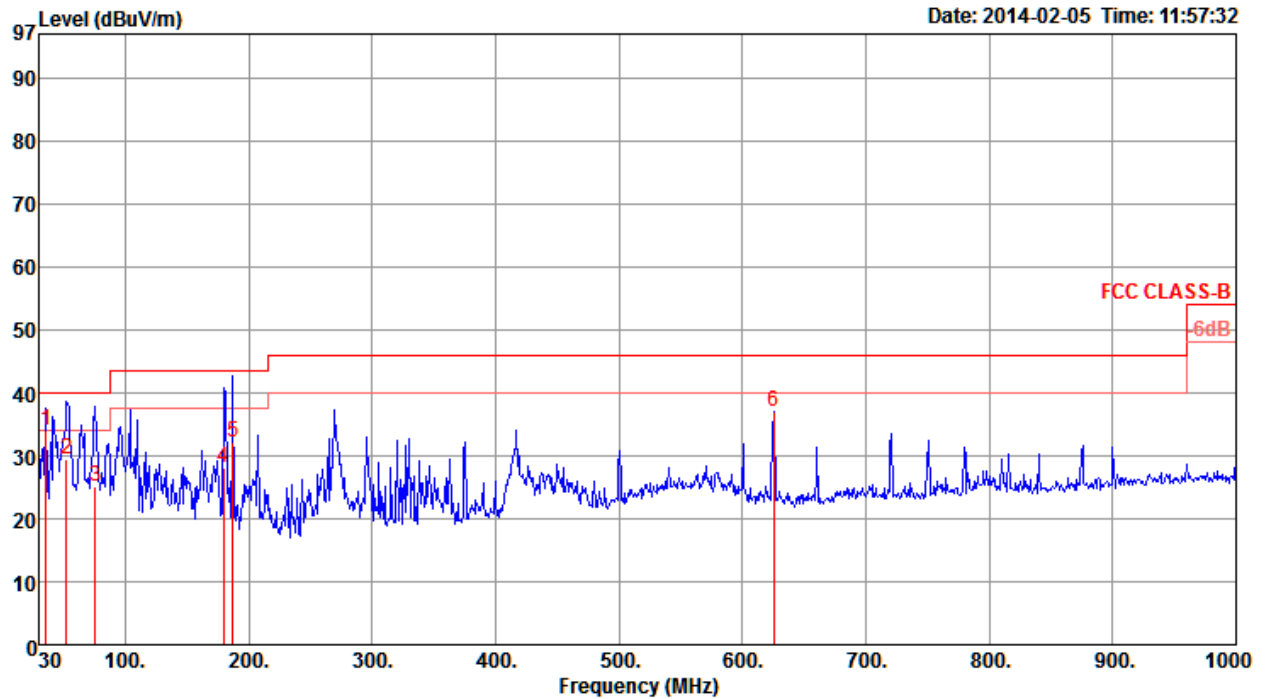

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	35.82	34.05	40.00	-5.95	44.86	0.93	28.00	-10.81	QP	307	100	VERTICAL
2	52.31	29.53	40.00	-10.47	48.01	1.09	27.91	-18.48	QP	162	100	VERTICAL
3	75.59	25.20	40.00	-14.80	44.64	1.30	27.92	-19.44	QP	69	100	VERTICAL
4	179.38	28.19	43.50	-15.31	43.64	2.00	27.39	-15.45	QP	327	100	VERTICAL
5	187.14	32.16	43.50	-11.34	47.62	2.04	27.33	-15.46	Peak	250	100	VERTICAL
6	625.58	37.13	46.00	-8.87	41.44	3.82	27.58	-4.31	Peak	0	400	VERTICAL

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	Normal Link
Test Mode	Mode 4		

Horizontal

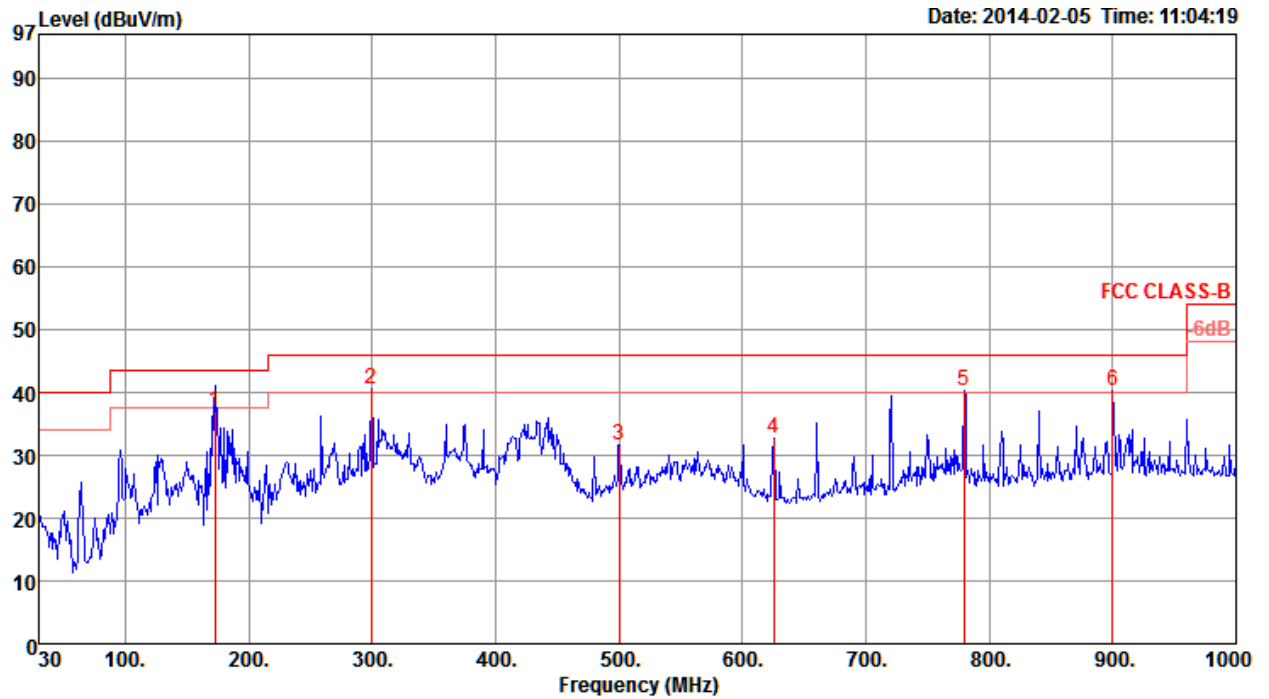

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	172.59	37.05	43.50	-6.45	52.30	1.96	27.40	-15.25	QP	192	100	HORIZONTAL
2	299.66	40.62	46.00	-5.38	51.14	2.51	26.83	-10.52	Peak	0	400	HORIZONTAL
3	500.45	31.64	46.00	-14.36	38.39	3.38	27.93	-6.75	Peak	0	400	HORIZONTAL
4	625.58	32.58	46.00	-13.42	36.89	3.82	27.58	-4.31	Peak	0	400	HORIZONTAL
5	779.81	40.36	46.00	-5.64	42.48	4.30	26.98	-2.12	Peak	0	400	HORIZONTAL
6	900.09	40.39	46.00	-5.61	41.12	4.60	26.83	-0.73	Peak	0	400	HORIZONTAL

Vertical

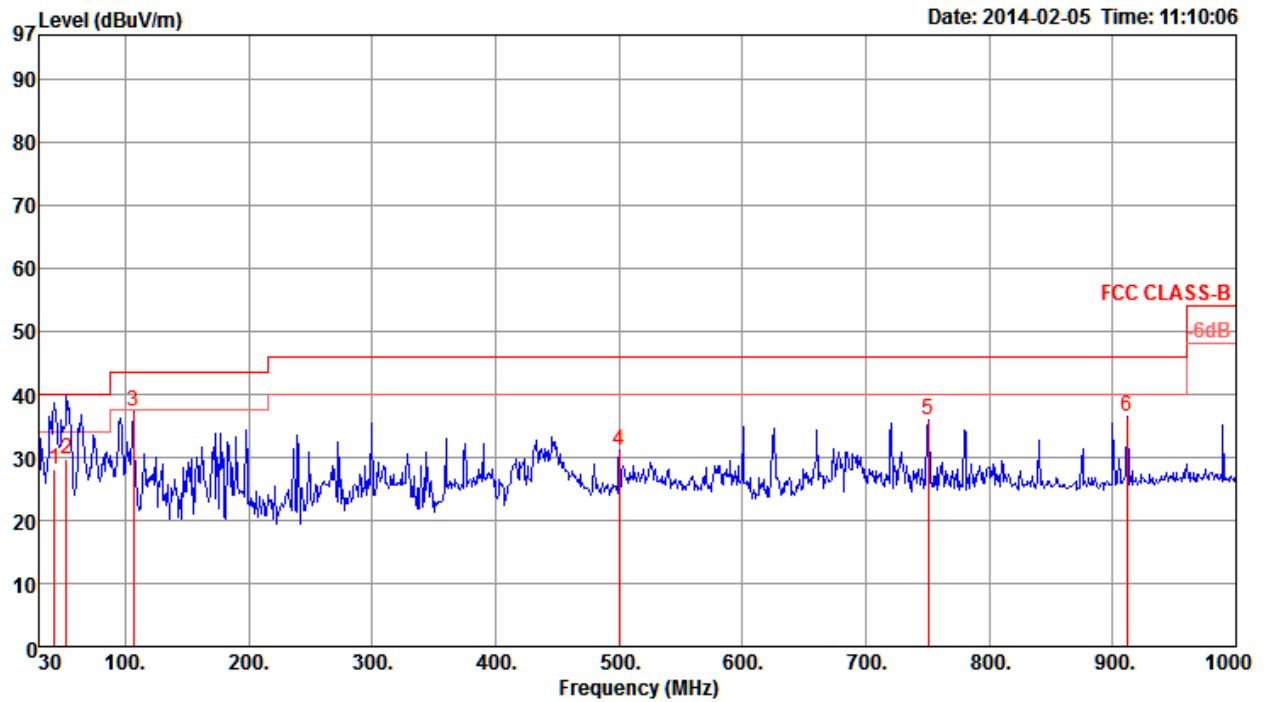

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	42.61	27.97	40.00	-12.03	42.97	1.00	27.96	-15.00	QP	253	100	VERTICAL
2	52.31	29.72	40.00	-10.28	48.20	1.09	27.91	-18.48	QP	184	100	VERTICAL
3	106.63	37.26	43.50	-6.24	51.23	1.55	27.76	-13.97	Peak	0	100	VERTICAL
4	500.45	30.99	46.00	-15.01	37.74	3.38	27.93	-6.75	Peak	0	100	VERTICAL
5	750.71	35.90	46.00	-10.10	38.60	4.21	27.12	-2.70	Peak	0	100	VERTICAL
6	911.73	36.45	46.00	-9.55	36.96	4.65	26.75	-0.51	Peak	0	100	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 24, 2014	Test Mode	Mode 1 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4820.70	31.02	54.00	-22.98	29.68	3.31	33.06	35.03	Average	100	207	VERTICAL
2	4821.28	42.98	74.00	-31.02	41.64	3.31	33.06	35.03	Peak	100	207	VERTICAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.44	41.51	74.00	-32.49	40.17	3.31	33.06	35.03	Peak	100	82	HORIZONTAL
2	4823.84	28.34	54.00	-25.66	27.00	3.31	33.06	35.03	Average	100	82	HORIZONTAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 14, 2014	Test Mode	Mode 1 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4875.10	35.98	54.00	-18.02	32.75	5.75	32.80	35.32	100	355	HORIZONTAL	Average
2	4878.26	47.22	74.00	-26.78	43.99	5.75	32.80	35.32	100	355	HORIZONTAL	Peak
3	7304.54	40.27	54.00	-13.73	31.46	7.05	37.12	35.36	100	117	HORIZONTAL	Average
4	7317.32	52.18	74.00	-21.82	43.35	7.06	37.13	35.36	100	117	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4875.88	37.60	54.00	-16.40	34.37	5.75	32.80	35.32	100	324	VERTICAL	Average
2	4877.20	49.47	74.00	-24.53	46.24	5.75	32.80	35.32	100	324	VERTICAL	Peak
3	7303.84	51.39	74.00	-22.61	42.58	7.05	37.12	35.36	100	133	VERTICAL	Peak
4	7304.76	40.62	54.00	-13.38	31.81	7.05	37.12	35.36	100	133	VERTICAL	Average

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 24, 2014	Test Mode	Mode 1 (EUT 1)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.15	42.76	74.00	-31.24	41.16	3.35	33.26	35.01	Peak	100	177	HORIZONTAL
2	4923.30	29.71	54.00	-24.29	28.11	3.35	33.26	35.01	Average	100	177	HORIZONTAL
3	7386.14	46.69	74.00	-27.31	41.94	4.06	36.09	35.40	Peak	100	281	HORIZONTAL
4	7386.94	33.87	54.00	-20.13	29.12	4.06	36.09	35.40	Average	100	281	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4923.35	42.29	74.00	-31.71	40.69	3.35	33.26	35.01	Peak	100	102	VERTICAL
2	4923.64	29.74	54.00	-24.26	28.14	3.35	33.26	35.01	Average	100	102	VERTICAL
3	7386.48	46.83	74.00	-27.17	42.08	4.06	36.09	35.40	Peak	100	214	VERTICAL
4	7386.72	33.85	54.00	-20.15	29.10	4.06	36.09	35.40	Average	100	214	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 24, 2014	Test Mode	Mode 1 (EUT 1)

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4843.87	27.97	54.00	-26.03	26.59	3.32	33.09	35.03	Average	100	251	HORIZONTAL
2	4845.37	41.45	74.00	-32.55	40.07	3.32	33.09	35.03	Peak	100	251	HORIZONTAL
3	7264.94	45.18	74.00	-28.82	40.67	4.06	35.85	35.40	Peak	100	125	HORIZONTAL
4	7265.15	32.29	54.00	-21.71	27.78	4.06	35.85	35.40	Average	100	125	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4846.35	41.44	74.00	-32.56	40.06	3.32	33.09	35.03	Peak	100	32	VERTICAL
2	4846.43	28.32	54.00	-25.68	26.94	3.32	33.09	35.03	Average	100	32	VERTICAL
3	7266.49	32.28	54.00	-21.72	27.77	4.06	35.85	35.40	Average	100	164	VERTICAL
4	7266.73	46.15	74.00	-27.85	41.64	4.06	35.85	35.40	Peak	100	164	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 14, 2014	Test Mode	Mode 1 (EUT 1)

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.11	34.16	54.00	-19.84	30.92	5.75	32.80	35.31	100	124	HORIZONTAL Average
2	4873.42	46.40	74.00	-27.60	43.16	5.75	32.80	35.31	100	124	HORIZONTAL Peak
3	7311.26	51.95	74.00	-22.05	43.13	7.06	37.12	35.36	100	180	HORIZONTAL Peak
4	7313.48	39.67	54.00	-14.33	30.85	7.06	37.12	35.36	100	180	HORIZONTAL Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4874.76	46.46	74.00	-27.54	43.22	5.75	32.80	35.31	100	282	VERTICAL Peak
2	4875.01	35.84	54.00	-18.16	32.60	5.75	32.80	35.31	100	282	VERTICAL Average
3	7312.18	51.94	74.00	-22.06	43.12	7.06	37.12	35.36	100	243	VERTICAL Peak
4	7312.72	39.67	54.00	-14.33	30.85	7.06	37.12	35.36	100	243	VERTICAL Average

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 24, 2014	Test Mode	Mode 1 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4903.91	28.74	54.00	-25.26	27.23	3.34	33.19	35.02	Average	100	281	HORIZONTAL
2	4905.20	41.45	74.00	-32.55	39.90	3.34	33.23	35.02	Peak	100	281	HORIZONTAL
3	7356.60	33.34	54.00	-20.66	28.66	4.06	36.02	35.40	Average	100	82	HORIZONTAL
4	7357.59	46.35	74.00	-27.65	41.67	4.06	36.02	35.40	Peak	100	82	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4903.83	29.01	54.00	-24.99	27.50	3.34	33.19	35.02	Average	100	206	VERTICAL
2	4905.73	42.25	74.00	-31.75	40.70	3.34	33.23	35.02	Peak	100	206	VERTICAL
3	7356.27	33.31	54.00	-20.69	28.63	4.06	36.02	35.40	Average	100	125	VERTICAL
4	7357.37	46.43	74.00	-27.57	41.75	4.06	36.02	35.40	Peak	100	125	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 149 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10 ~ 11, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11482.88	40.42	54.00	-13.58	31.81	5.11	38.78	35.28	Average	100	209	HORIZONTAL
2	11484.26	54.19	74.00	-19.81	45.58	5.11	38.78	35.28	Peak	100	209	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11483.17	52.78	74.00	-21.22	44.17	5.11	38.78	35.28	Peak	100	168	VERTICAL
2	11484.01	40.02	54.00	-13.98	31.41	5.11	38.78	35.28	Average	100	168	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 157 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 11, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11563.91	41.87	54.00	-12.13	33.22	5.13	38.82	35.30	Average	100	145	HORIZONTAL
2	11565.26	54.20	74.00	-19.80	45.55	5.13	38.82	35.30	Peak	100	145	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11566.54	54.60	74.00	-19.40	45.95	5.13	38.82	35.30	Peak	100	89	VERTICAL
2	11566.73	41.46	54.00	-12.54	32.81	5.13	38.82	35.30	Average	100	89	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 165 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 11, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11644.39	42.65	54.00	-11.35	33.93	5.16	38.86	35.30	Average	100	135	HORIZONTAL
2	11644.62	56.30	74.00	-17.70	47.58	5.16	38.86	35.30	Peak	100	135	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11646.60	42.18	54.00	-11.82	33.46	5.16	38.86	35.30	Average	100	171	VERTICAL
2	11647.21	55.10	74.00	-18.90	46.38	5.16	38.86	35.30	Peak	100	171	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 151 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 11, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11503.40	55.09	74.00	-18.91	46.46	5.12	38.79	35.28	Peak	100	139 HORIZONTAL
2	11504.17	42.74	54.00	-11.26	34.11	5.12	38.79	35.28	Average	100	139 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11504.81	40.74	54.00	-13.26	32.11	5.12	38.79	35.28	Average	100	172 VERTICAL
2	11504.94	52.83	74.00	-21.17	44.20	5.12	38.79	35.28	Peak	100	172 VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 159 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 11, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11582.88	53.44	74.00	-20.56	44.77	5.14	38.83	35.30	Peak	100	137	HORIZONTAL
2	11584.04	40.75	54.00	-13.25	32.08	5.14	38.83	35.30	Average	100	137	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11584.55	53.55	74.00	-20.45	44.88	5.14	38.83	35.30	Peak	100	173	VERTICAL
2	11586.22	40.32	54.00	-13.68	31.65	5.14	38.83	35.30	Average	100	173	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT80 CH 155 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 11, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11543.27	52.03	74.00	-21.97	43.39	5.13	38.81	35.30	Peak	100	141	HORIZONTAL
2	11544.68	39.53	54.00	-14.47	30.89	5.13	38.81	35.30	Average	100	141	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11530.96	50.37	74.00	-23.63	41.73	5.13	38.80	35.29	Peak	100	190	VERTICAL
2	11543.53	38.85	54.00	-15.15	30.21	5.13	38.81	35.30	Average	100	190	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 1 / Ant. 1
Test Date	Jan. 16, 2014	Test Mode	Mode 1 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.15	46.28	74.00	-27.72	43.14	5.68	32.76	35.30	100	76	HORIZONTAL	Peak
2	4823.95	34.34	54.00	-19.66	31.19	5.69	32.76	35.30	100	76	HORIZONTAL	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.83	47.26	74.00	-26.74	44.11	5.69	32.76	35.30	100	72	VERTICAL	Peak
2	4826.48	34.48	54.00	-19.52	31.32	5.69	32.77	35.30	100	72	VERTICAL	Average

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 6 / Ant. 1
Test Date	Jan. 16, 2014	Test Mode	Mode 1 (EUT 1)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4872.23	34.57	54.00	-19.43	31.33	5.75	32.80	35.31	100	238	HORIZONTAL	Average
2	4876.27	47.00	74.00	-27.00	43.77	5.75	32.80	35.32	100	238	HORIZONTAL	Peak
3	7311.07	53.57	74.00	-20.43	44.75	7.06	37.12	35.36	100	269	HORIZONTAL	Peak
4	7311.17	40.61	54.00	-13.39	31.79	7.06	37.12	35.36	100	269	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4874.96	48.73	74.00	-25.27	45.49	5.75	32.80	35.31	128	270	VERTICAL	Peak
2	4875.12	37.95	54.00	-16.05	34.72	5.75	32.80	35.32	128	270	VERTICAL	Average
3	7312.80	40.91	54.00	-13.09	32.09	7.06	37.12	35.36	128	210	VERTICAL	Average
4	7313.41	53.49	74.00	-20.51	44.67	7.06	37.12	35.36	128	210	VERTICAL	Peak

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 11 / Ant. 1
Test Date	Jan. 16, 2014	Test Mode	Mode 1 (EUT 1)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4922.22	36.64	54.00	-17.36	33.33	5.81	32.83	35.33	100	124	HORIZONTAL	Average
2	4922.38	48.71	74.00	-25.29	45.40	5.81	32.83	35.33	100	124	HORIZONTAL	Peak
3	7386.65	40.84	54.00	-13.16	31.91	7.09	37.16	35.32	100	314	HORIZONTAL	Average
4	7388.25	53.33	74.00	-20.67	44.39	7.09	37.16	35.31	100	314	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	3750.12	52.84	74.00	-21.16	52.53	4.80	31.30	35.79	100	81	VERTICAL	Peak
2	3750.15	44.34	54.00	-9.66	44.03	4.80	31.30	35.79	100	81	VERTICAL	Average
3	4923.72	47.92	74.00	-26.08	44.60	5.81	32.84	35.33	110	285	VERTICAL	Peak
4	4923.97	36.22	54.00	-17.78	32.90	5.81	32.84	35.33	110	285	VERTICAL	Average
5	4999.94	45.34	54.00	-8.66	41.90	5.90	32.90	35.36	165	289	VERTICAL	Average
6	5000.06	51.56	74.00	-22.44	48.12	5.90	32.90	35.36	165	289	VERTICAL	Peak
7	7384.26	41.74	54.00	-12.26	32.82	7.08	37.16	35.32	100	0	VERTICAL	Average
8	7384.75	53.16	74.00	-20.84	44.23	7.09	37.16	35.32	100	0	VERTICAL	Peak

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 1 / Ant. 1
Test Date	Jan. 24, 2014	Test Mode	Mode 1 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	3750.05	46.53	74.00	-27.47	47.62	2.82	31.29	35.20	Peak	161	8	HORIZONTAL
2	3750.21	37.87	54.00	-16.13	38.96	2.82	31.29	35.20	Average	161	8	HORIZONTAL
3	4819.54	28.53	54.00	-25.47	27.23	3.31	33.02	35.03	Average	100	110	HORIZONTAL
4	4821.10	41.20	74.00	-32.80	39.86	3.31	33.06	35.03	Peak	100	110	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	3750.09	39.46	54.00	-14.54	40.55	2.82	31.29	35.20	Average	100	321	VERTICAL
2	3750.10	47.87	74.00	-26.13	48.96	2.82	31.29	35.20	Peak	100	321	VERTICAL
3	4823.13	42.19	74.00	-31.81	40.85	3.31	33.06	35.03	Peak	100	268	VERTICAL
4	4823.71	31.36	54.00	-22.64	30.02	3.31	33.06	35.03	Average	100	268	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 6 / Ant. 1
Test Date	Jan. 14, 2014	Test Mode	Mode 1 (EUT 1)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4875.00	36.92	54.00	-17.08	33.68	5.75	32.80	35.31	100	269	HORIZONTAL	Average
2	4875.02	48.06	74.00	-25.94	44.83	5.75	32.80	35.32	100	269	HORIZONTAL	Peak
3	7312.13	52.20	74.00	-21.80	43.38	7.06	37.12	35.36	100	312	HORIZONTAL	Peak
4	7313.36	39.76	54.00	-14.24	30.94	7.06	37.12	35.36	100	312	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4874.87	35.36	54.00	-18.64	32.12	5.75	32.80	35.31	100	356	VERTICAL	Average
2	4876.39	46.18	74.00	-27.82	42.95	5.75	32.80	35.32	100	356	VERTICAL	Peak
3	7312.97	52.29	74.00	-21.71	43.47	7.06	37.12	35.36	100	274	VERTICAL	Peak
4	7313.39	39.57	54.00	-14.43	30.75	7.06	37.12	35.36	100	274	VERTICAL	Average

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 11 / Ant. 1
Test Date	Jan. 24, 2014	Test Mode	Mode 1 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4920.62	43.00	74.00	-31.00	41.43	3.35	33.23	35.01	Peak	100	148	HORIZONTAL
2	4927.78	29.53	54.00	-24.47	27.93	3.35	33.26	35.01	Average	100	148	HORIZONTAL
3	7384.78	34.07	54.00	-19.93	29.32	4.06	36.09	35.40	Average	100	209	HORIZONTAL
4	7385.04	47.03	74.00	-26.97	42.28	4.06	36.09	35.40	Peak	100	209	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4919.92	42.39	74.00	-31.61	40.82	3.35	33.23	35.01	Peak	100	307	VERTICAL
2	4922.62	29.56	54.00	-24.44	27.96	3.35	33.26	35.01	Average	100	307	VERTICAL
3	7381.24	34.02	54.00	-19.98	29.27	4.06	36.09	35.40	Average	100	214	VERTICAL
4	7383.72	46.13	74.00	-27.87	41.38	4.06	36.09	35.40	Peak	100	214	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 149 / Ant. 1
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11487.21	50.28	74.00	-23.72	41.67	5.11	38.78	35.28	Peak	100	288	HORIZONTAL
2	11490.26	38.17	54.00	-15.83	29.56	5.11	38.78	35.28	Average	100	288	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11482.88	51.21	74.00	-22.79	42.60	5.11	38.78	35.28	Peak	100	184	VERTICAL
2	11488.62	38.13	54.00	-15.87	29.52	5.11	38.78	35.28	Average	100	184	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 157 / Ant. 1
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11561.06	52.70	74.00	-21.30	44.05	5.13	38.82	35.30	Peak	100	101	HORIZONTAL
2	11570.13	38.68	54.00	-15.32	30.01	5.14	38.83	35.30	Average	100	101	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11568.11	54.95	74.00	-19.05	46.29	5.13	38.83	35.30	Peak	100	306	VERTICAL
2	11570.67	40.31	54.00	-13.69	31.64	5.14	38.83	35.30	Average	100	306	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 165 / Ant. 1
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11651.57	38.71	54.00	-15.29	29.99	5.16	38.86	35.30	Average	100	96	HORIZONTAL
2	11651.73	51.72	74.00	-22.28	43.00	5.16	38.86	35.30	Peak	100	96	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11646.25	52.38	74.00	-21.62	43.66	5.16	38.86	35.30	Peak	100	300	VERTICAL
2	11649.33	39.56	54.00	-14.44	30.84	5.16	38.86	35.30	Average	100	300	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4817.60	31.18	54.00	-22.82	29.10	4.21	34.69	2.08	Average	104	100	HORIZONTAL
2	4829.32	43.70	74.00	-30.30	41.62	4.21	34.69	2.08	Peak	104	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4817.20	44.24	74.00	-29.76	42.16	4.21	34.69	2.08	Peak	265	100	VERTICAL
2	4821.76	31.68	54.00	-22.32	29.60	4.21	34.69	2.08	Average	265	100	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4868.08	31.93	54.00	-22.07	29.72	4.22	34.67	2.21	Average	72	100	HORIZONTAL
2	4883.40	43.74	74.00	-30.26	41.53	4.22	34.67	2.21	Peak	72	100	HORIZONTAL
3	7307.08	36.14	54.00	-17.86	28.76	5.34	34.93	7.38	Average	341	100	HORIZONTAL
4	7315.52	48.97	74.00	-25.03	41.57	5.35	34.94	7.40	Peak	341	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4870.12	40.63	54.00	-13.37	38.42	4.22	34.67	2.21	Average	337	126	VERTICAL
2	4871.08	55.70	74.00	-18.30	53.49	4.22	34.67	2.21	Peak	337	126	VERTICAL
3	7305.72	51.25	74.00	-22.75	43.87	5.34	34.93	7.38	Peak	211	100	VERTICAL
4	7305.80	38.32	54.00	-15.68	30.94	5.34	34.93	7.38	Average	211	100	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4915.12	43.82	74.00	-30.18	41.52	4.22	34.65	2.30	Peak	286	100	HORIZONTAL
2	4932.04	31.15	54.00	-22.85	28.81	4.23	34.65	2.34	Average	286	100	HORIZONTAL
3	7393.28	49.09	74.00	-24.91	41.61	5.36	34.96	7.48	Peak	117	100	HORIZONTAL
4	7394.80	36.52	54.00	-17.48	29.04	5.36	34.96	7.48	Average	117	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4919.76	33.83	54.00	-20.17	31.49	4.23	34.65	2.34	Average	339	123	VERTICAL
2	4919.92	48.92	74.00	-25.08	46.58	4.23	34.65	2.34	Peak	339	123	VERTICAL
3	7386.00	49.13	74.00	-24.87	41.65	5.36	34.96	7.48	Peak	242	100	VERTICAL
4	7392.32	36.59	54.00	-17.41	29.11	5.36	34.96	7.48	Average	242	100	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4841.88	43.92	74.00	-30.08	41.80	4.21	34.68	2.12	Peak	249	100	HORIZONTAL
2	4846.28	31.25	54.00	-22.75	29.13	4.21	34.68	2.12	Average	249	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4843.00	43.93	74.00	-30.07	41.81	4.21	34.68	2.12	Peak	115	100	VERTICAL
2	4851.92	31.44	54.00	-22.56	29.29	4.21	34.68	2.15	Average	115	100	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4864.60	45.06	74.00	-28.94	42.90	4.21	34.67	2.16	Peak	177	100	HORIZONTAL
2	4883.80	31.13	54.00	-22.87	28.92	4.22	34.67	2.21	Average	177	100	HORIZONTAL
3	7302.80	36.05	54.00	-17.95	28.67	5.34	34.93	7.38	Average	69	100	HORIZONTAL
4	7315.12	48.81	74.00	-25.19	41.44	5.34	34.94	7.37	Peak	69	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4868.40	32.80	54.00	-21.20	30.59	4.22	34.67	2.21	Average	339	125	VERTICAL
2	4869.92	46.33	74.00	-27.67	44.12	4.22	34.67	2.21	Peak	339	125	VERTICAL
3	7301.04	36.08	54.00	-17.92	28.70	5.34	34.93	7.38	Average	205	124	VERTICAL
4	7316.80	48.94	74.00	-25.06	41.54	5.35	34.94	7.40	Peak	205	100	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4902.72	31.49	54.00	-22.51	29.20	4.22	34.66	2.29	Average	55	100	HORIZONTAL
2	4903.16	44.30	74.00	-29.70	42.01	4.22	34.66	2.29	Peak	55	100	HORIZONTAL
3	7356.76	36.50	54.00	-17.50	29.07	5.35	34.95	7.43	Average	293	100	HORIZONTAL
4	7357.40	49.42	74.00	-24.58	41.99	5.35	34.95	7.43	Peak	293	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4898.84	31.60	54.00	-22.40	29.35	4.22	34.66	2.25	Average	183	100	VERTICAL
2	4905.28	44.08	74.00	-29.92	41.79	4.22	34.66	2.29	Peak	183	100	VERTICAL
3	7354.04	36.33	54.00	-17.67	28.90	5.35	34.95	7.43	Average	256	100	VERTICAL
4	7358.92	48.93	74.00	-25.07	41.50	5.35	34.95	7.43	Peak	256	100	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 149 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 19, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4999.99	50.18	54.00	-3.82	48.41	3.39	33.39	35.01	Average	159	340	HORIZONTAL
2	5000.05	55.60	74.00	-18.40	53.83	3.39	33.39	35.01	Peak	159	340	HORIZONTAL
3	11482.07	57.32	74.00	-16.68	48.72	5.11	38.77	35.28	Peak	100	143	HORIZONTAL
4	11482.95	43.00	54.00	-11.00	34.39	5.11	38.78	35.28	Average	100	143	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.07	38.41	54.00	-15.59	36.63	3.39	33.40	35.01	Average	100	82	VERTICAL
2	5000.11	50.41	74.00	-23.59	48.63	3.39	33.40	35.01	Peak	100	82	VERTICAL
3	11491.36	42.69	54.00	-11.31	34.08	5.11	38.78	35.28	Average	100	169	VERTICAL
4	11494.57	56.03	74.00	-17.97	47.41	5.12	38.78	35.28	Peak	100	169	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 157 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 19, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.02	50.17	54.00	-3.83	48.40	3.39	33.39	35.01	Average	162	336	HORIZONTAL
2	5000.06	56.32	74.00	-17.68	54.55	3.39	33.39	35.01	Peak	162	336	HORIZONTAL
3	11563.51	42.38	54.00	-11.62	33.73	5.13	38.82	35.30	Average	100	137	HORIZONTAL
4	11565.35	55.97	74.00	-18.03	47.32	5.13	38.82	35.30	Peak	100	137	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4999.97	39.24	54.00	-14.76	37.46	3.39	33.40	35.01	Average	100	79	VERTICAL
2	5000.16	49.95	74.00	-24.05	48.17	3.39	33.40	35.01	Peak	100	79	VERTICAL
3	11572.08	42.28	54.00	-11.72	33.61	5.14	38.83	35.30	Average	100	169	VERTICAL
4	11572.88	54.87	74.00	-19.13	46.20	5.14	38.83	35.30	Peak	100	169	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 165 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 19, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.01	50.04	54.00	-3.96	48.27	3.39	33.39	35.01	Average	162	336	HORIZONTAL
2	5000.09	56.03	74.00	-17.97	54.26	3.39	33.39	35.01	Peak	162	336	HORIZONTAL
3	11642.95	41.32	54.00	-12.68	32.60	5.16	38.86	35.30	Average	100	137	HORIZONTAL
4	11643.27	53.85	74.00	-20.15	45.13	5.16	38.86	35.30	Peak	100	137	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4999.77	51.63	74.00	-22.37	49.85	3.39	33.40	35.01	Peak	100	80	VERTICAL
2	5000.09	40.20	54.00	-13.80	38.42	3.39	33.40	35.01	Average	100	80	VERTICAL
3	11642.79	41.52	54.00	-12.48	32.80	5.16	38.86	35.30	Average	100	189	VERTICAL
4	11644.87	54.47	74.00	-19.53	45.75	5.16	38.86	35.30	Peak	100	189	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 151 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 19, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.01	50.38	54.00	-3.62	48.61	3.39	33.39	35.01	Average	159	341	HORIZONTAL
2	5000.04	55.99	74.00	-18.01	54.22	3.39	33.39	35.01	Peak	159	341	HORIZONTAL
3	11500.77	54.19	74.00	-19.81	45.56	5.12	38.79	35.28	Peak	100	143	HORIZONTAL
4	11502.79	41.73	54.00	-12.27	33.10	5.12	38.79	35.28	Average	100	143	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.06	39.46	54.00	-14.54	37.68	3.39	33.40	35.01	Average	100	81	VERTICAL
2	5000.24	51.37	74.00	-22.63	49.59	3.39	33.40	35.01	Peak	100	81	VERTICAL
3	11502.71	53.66	74.00	-20.34	45.03	5.12	38.79	35.28	Peak	100	190	VERTICAL
4	11503.75	41.75	54.00	-12.25	33.12	5.12	38.79	35.28	Average	100	190	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 159 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 19, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.01	50.68	54.00	-3.32	48.91	3.39	33.39	35.01	Average	136	330	HORIZONTAL
2	5000.10	57.44	74.00	-16.56	55.67	3.39	33.39	35.01	Peak	136	330	HORIZONTAL
3	11582.71	41.66	54.00	-12.34	32.99	5.14	38.83	35.30	Average	100	138	HORIZONTAL
4	11583.11	54.07	74.00	-19.93	45.40	5.14	38.83	35.30	Peak	100	138	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.04	39.83	54.00	-14.17	38.05	3.39	33.40	35.01	Average	100	82	VERTICAL
2	5000.06	51.34	74.00	-22.66	49.56	3.39	33.40	35.01	Peak	100	82	VERTICAL
3	11583.19	52.61	74.00	-21.39	43.94	5.14	38.83	35.30	Peak	100	190	VERTICAL
4	11603.62	40.18	54.00	-13.82	31.49	5.15	38.84	35.30	Average	100	190	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT80 CH 155 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 19, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4999.99	57.48	74.00	-16.52	55.71	3.39	33.39	35.01	Peak	136	330	HORIZONTAL
2	5000.01	50.78	54.00	-3.22	49.01	3.39	33.39	35.01	Average	136	330	HORIZONTAL
3	11541.99	38.94	54.00	-15.06	30.30	5.13	38.81	35.30	Average	100	143	HORIZONTAL
4	11541.99	50.42	74.00	-23.58	41.78	5.13	38.81	35.30	Peak	100	143	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4999.77	50.57	74.00	-23.43	48.79	3.39	33.40	35.01	Peak	100	81	VERTICAL
2	5000.04	39.32	54.00	-14.68	37.54	3.39	33.40	35.01	Average	100	81	VERTICAL
3	11542.71	39.37	54.00	-14.63	30.73	5.13	38.81	35.30	Average	100	188	VERTICAL
4	11543.27	52.26	74.00	-21.74	43.62	5.13	38.81	35.30	Peak	100	188	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 1 / Ant. 1
Test Date	Jan. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4823.89	32.12	54.00	-21.88	30.04	4.21	34.69	2.08	Average	78	100	HORIZONTAL
2	4824.88	44.72	74.00	-29.28	42.64	4.21	34.69	2.08	Peak	78	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4823.97	41.85	54.00	-12.15	39.77	4.21	34.69	2.08	Average	275	114	VERTICAL
2	4824.11	48.04	74.00	-25.96	45.96	4.21	34.69	2.08	Peak	275	114	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 6 / Ant. 1
Test Date	Jan. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4873.86	44.91	74.00	-29.09	42.70	4.22	34.67	2.21	Peak	143	100	HORIZONTAL
2	4873.93	31.93	54.00	-22.07	29.72	4.22	34.67	2.21	Average	143	100	HORIZONTAL
3	7308.80	49.09	74.00	-24.91	41.71	5.34	34.93	7.38	Peak	309	100	HORIZONTAL
4	7312.61	36.44	54.00	-17.56	29.07	5.34	34.94	7.37	Average	309	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4873.89	46.81	54.00	-7.19	44.60	4.22	34.67	2.21	Average	89	116	VERTICAL
2	4874.02	51.58	74.00	-22.42	49.37	4.22	34.67	2.21	Peak	89	116	VERTICAL
3	7309.49	51.79	74.00	-22.21	44.41	5.34	34.93	7.38	Peak	211	100	VERTICAL
4	7311.67	38.37	54.00	-15.63	31.00	5.34	34.94	7.37	Average	211	100	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 11 / Ant. 1
Test Date	Jan. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4923.88	32.03	54.00	-21.97	29.69	4.23	34.65	2.34	Average	229	100	HORIZONTAL
2	4925.21	43.99	74.00	-30.01	41.65	4.23	34.65	2.34	Peak	229	100	HORIZONTAL
3	7384.19	49.43	74.00	-24.57	41.95	5.36	34.96	7.48	Peak	206	100	HORIZONTAL
4	7387.21	36.84	54.00	-17.16	29.36	5.36	34.96	7.48	Average	206	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4924.00	42.33	54.00	-11.67	39.99	4.23	34.65	2.34	Average	88	115	VERTICAL
2	4924.03	48.57	74.00	-25.43	46.23	4.23	34.65	2.34	Peak	88	115	VERTICAL
3	7386.67	37.56	54.00	-16.44	30.08	5.36	34.96	7.48	Average	322	100	VERTICAL
4	7387.04	50.49	74.00	-23.51	43.01	5.36	34.96	7.48	Peak	322	100	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 1 / Ant. 1
Test Date	Jan. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4819.16	31.14	54.00	-22.86	29.06	4.21	34.69	2.08	Average	287	100	HORIZONTAL
2	4823.84	43.73	74.00	-30.27	41.65	4.21	34.69	2.08	Peak	287	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4815.64	44.57	74.00	-29.43	42.54	4.20	34.69	2.03	Peak	204	100	VERTICAL
2	4820.72	31.11	54.00	-22.89	29.03	4.21	34.69	2.08	Average	204	100	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 6 / Ant. 1
Test Date	Jan. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4873.72	31.05	54.00	-22.95	28.84	4.22	34.67	2.21	Average	63	100	HORIZONTAL
2	4883.40	43.72	74.00	-30.28	41.51	4.22	34.67	2.21	Peak	63	100	HORIZONTAL
3	7302.04	36.22	54.00	-17.78	28.84	5.34	34.93	7.38	Average	148	100	HORIZONTAL
4	7312.88	49.28	74.00	-24.72	41.91	5.34	34.94	7.37	Peak	148	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4875.08	32.13	54.00	-21.87	29.92	4.22	34.67	2.21	Average	141	100	VERTICAL
2	4882.20	44.36	74.00	-29.64	42.15	4.22	34.67	2.21	Peak	141	100	VERTICAL
3	7305.68	48.62	74.00	-25.38	41.24	5.34	34.93	7.38	Peak	253	100	VERTICAL
4	7308.76	36.24	54.00	-17.76	28.86	5.34	34.93	7.38	Average	253	100	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 11 / Ant. 1
Test Date	Jan. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4924.20	43.59	74.00	-30.41	41.25	4.23	34.65	2.34	Peak	74	100	HORIZONTAL
2	4933.00	31.14	54.00	-22.86	28.80	4.23	34.65	2.34	Average	74	100	HORIZONTAL
3	7381.08	49.34	74.00	-24.66	41.88	5.36	34.96	7.46	Peak	147	100	HORIZONTAL
4	7391.44	36.46	54.00	-17.54	28.98	5.36	34.96	7.48	Average	147	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4930.04	31.31	54.00	-22.69	28.97	4.23	34.65	2.34	Average	283	100	VERTICAL
2	4933.36	44.01	74.00	-29.99	41.67	4.23	34.65	2.34	Peak	283	100	VERTICAL
3	7388.24	36.58	54.00	-17.42	29.10	5.36	34.96	7.48	Average	216	100	VERTICAL
4	7390.64	49.31	74.00	-24.69	41.83	5.36	34.96	7.48	Peak	216	100	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 149 / Ant. 1
Test Date	Feb. 19, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.00	50.36	54.00	-3.64	48.59	3.39	33.39	35.01	Average	161	39	HORIZONTAL
2	5000.05	55.61	74.00	-18.39	53.84	3.39	33.39	35.01	Peak	161	39	HORIZONTAL
3	11486.31	47.34	54.00	-6.66	38.73	5.11	38.78	35.28	Average	123	144	HORIZONTAL
4	11486.73	59.21	74.00	-14.79	50.60	5.11	38.78	35.28	Peak	123	144	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4999.94	39.12	54.00	-14.88	37.34	3.39	33.40	35.01	Average	100	111	VERTICAL
2	5000.06	51.41	74.00	-22.59	49.63	3.39	33.40	35.01	Peak	100	111	VERTICAL
3	11486.51	57.30	74.00	-16.70	48.69	5.11	38.78	35.28	Peak	100	190	VERTICAL
4	11486.54	43.65	54.00	-10.35	35.04	5.11	38.78	35.28	Average	100	190	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 157 / Ant. 1
Test Date	Feb. 19, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	4999.99	50.34	54.00	-3.66	48.57	3.39	33.39	35.01	Average	133	332	HORIZONTAL
2	5000.15	56.14	74.00	-17.86	54.37	3.39	33.39	35.01	Peak	133	332	HORIZONTAL
3	11564.52	55.37	74.00	-18.63	46.72	5.13	38.82	35.30	Peak	100	117	HORIZONTAL
4	11565.51	42.75	54.00	-11.25	34.10	5.13	38.82	35.30	Average	100	117	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	5000.08	51.35	74.00	-22.65	49.57	3.39	33.40	35.01	Peak	100	111	VERTICAL
2	5000.11	39.34	54.00	-14.66	37.56	3.39	33.40	35.01	Average	100	111	VERTICAL
3	11566.67	43.17	54.00	-10.83	34.52	5.13	38.82	35.30	Average	100	190	VERTICAL
4	11568.01	55.27	74.00	-18.73	46.61	5.13	38.83	35.30	Peak	100	190	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 165 / Ant. 1
Test Date	Feb. 19, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4999.97	50.79	54.00	-3.21	49.02	3.39	33.39	35.01	Average	133	332	HORIZONTAL
2	5000.19	56.33	74.00	-17.67	54.56	3.39	33.39	35.01	Peak	133	332	HORIZONTAL
3	11648.85	56.13	74.00	-17.87	47.41	5.16	38.86	35.30	Peak	100	113	HORIZONTAL
4	11650.45	43.44	54.00	-10.56	34.72	5.16	38.86	35.30	Average	100	113	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4999.99	39.80	54.00	-14.20	38.02	3.39	33.40	35.01	Average	100	80	VERTICAL
2	5000.45	51.37	74.00	-22.63	49.59	3.39	33.40	35.01	Peak	100	80	VERTICAL
3	11646.25	42.91	54.00	-11.09	34.19	5.16	38.86	35.30	Average	100	189	VERTICAL
4	11646.25	54.45	74.00	-19.55	45.73	5.16	38.86	35.30	Peak	100	189	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
2. The radiated emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 14, 2014 & Jan. 16, 2014	Test Mode	Mode 1 (EUT 1)

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2390.00	52.35	54.00	-1.65	20.77	3.68	27.90	0.00	100	200	HORIZONTAL	Average
2	2390.00	71.06	74.00	-2.94	39.48	3.68	27.90	0.00	100	200	HORIZONTAL	Peak
3	2407.40	99.39			67.80	3.69	27.90	0.00	100	200	HORIZONTAL	Average
4	2408.00	111.18			79.59	3.69	27.90	0.00	100	200	HORIZONTAL	Peak

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2390.00	52.60	54.00	-1.40	21.02	3.68	27.90	0.00	107	119	HORIZONTAL	Average
2	2390.00	67.69	74.00	-6.31	36.11	3.68	27.90	0.00	107	119	HORIZONTAL	Peak
3	2430.10	118.64			87.04	3.70	27.90	0.00	107	119	HORIZONTAL	Peak
4	2430.90	106.66			75.06	3.70	27.90	0.00	107	119	HORIZONTAL	Average
5	2483.50	49.44	54.00	-4.56	17.81	3.73	27.90	0.00	107	119	HORIZONTAL	Average
6	2483.50	66.53	74.00	-7.47	34.90	3.73	27.90	0.00	107	119	HORIZONTAL	Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2458.80	113.04			81.42	3.72	27.90	0.00	100	164	HORIZONTAL	Peak
2	2459.60	101.25			69.63	3.72	27.90	0.00	100	164	HORIZONTAL	Average
3	2483.50	52.20	54.00	-1.80	20.57	3.73	27.90	0.00	100	164	HORIZONTAL	Average
4	2483.70	69.72	74.00	-4.28	38.09	3.73	27.90	0.00	100	164	HORIZONTAL	Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 14, 2014 & Feb. 16, 2014	Test Mode	Mode 1 (EUT 1)

Channel 3

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.00	72.13	74.00	-1.87	40.55	3.68	27.90	0.00	104	120	HORIZONTAL Peak
2	2390.00	51.20	54.00	-2.80	19.62	3.68	27.90	0.00	104	120	HORIZONTAL Average
3	2411.20	94.91			63.32	3.69	27.90	0.00	104	120	HORIZONTAL Average
4	2412.60	107.25			75.66	3.69	27.90	0.00	104	120	HORIZONTAL Peak

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.40	69.38	74.00	-4.62	37.80	3.68	27.90	0.00	100	120	HORIZONTAL Peak
2	2390.00	53.00	54.00	-1.00	21.42	3.68	27.90	0.00	100	120	HORIZONTAL Average
3	2430.60	112.19			80.59	3.70	27.90	0.00	100	120	HORIZONTAL Peak
4	2432.00	99.70			68.10	3.70	27.90	0.00	100	120	HORIZONTAL Average
5	2483.50	47.51	54.00	-6.49	15.88	3.73	27.90	0.00	100	120	HORIZONTAL Average
6	2486.30	62.62	74.00	-11.38	30.99	3.73	27.90	0.00	100	120	HORIZONTAL Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2443.00	95.53			63.92	3.71	27.90	0.00	100	202	HORIZONTAL Average
2	2443.00	107.85			76.24	3.71	27.90	0.00	100	202	HORIZONTAL Peak
3	2483.50	68.47	74.00	-5.53	36.84	3.73	27.90	0.00	100	202	HORIZONTAL Peak
4	2483.70	52.34	54.00	-1.66	20.71	3.73	27.90	0.00	100	202	HORIZONTAL Average

Item 1, 2 are the fundamental frequency at 2452 MHz.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 1, 6, 11 / Ant. 1
Test Date	Jan. 16, 2014	Test Mode	Mode 1 (EUT 1)

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2372.50	64.63	74.00	-9.37	33.06	3.67	27.90	0.00	100	214	HORIZONTAL Peak
2	2372.70	52.79	54.00	-1.21	21.22	3.67	27.90	0.00	100	214	HORIZONTAL Average
3	2411.20	113.41			81.82	3.69	27.90	0.00	100	214	HORIZONTAL Average
4	2411.50	115.84			84.25	3.69	27.90	0.00	100	214	HORIZONTAL Peak

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.10	63.61	74.00	-10.39	32.03	3.68	27.90	0.00	100	213	HORIZONTAL Peak
2	2390.00	50.34	54.00	-3.66	18.76	3.68	27.90	0.00	100	213	HORIZONTAL Average
3	2436.20	111.95			80.34	3.71	27.90	0.00	100	213	HORIZONTAL Average
4	2436.50	114.62			83.01	3.71	27.90	0.00	100	213	HORIZONTAL Peak
5	2483.50	47.24	54.00	-6.76	15.61	3.73	27.90	0.00	100	213	HORIZONTAL Average
6	2483.50	59.00	74.00	-15.00	27.37	3.73	27.90	0.00	100	213	HORIZONTAL Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2461.20	115.85			84.23	3.72	27.90	0.00	100	213	HORIZONTAL Peak
2	2461.30	113.47			81.85	3.72	27.90	0.00	100	213	HORIZONTAL Average
3	2483.50	48.19	54.00	-5.81	16.56	3.73	27.90	0.00	100	213	HORIZONTAL Average
4	2483.50	60.83	74.00	-13.17	29.20	3.73	27.90	0.00	100	213	HORIZONTAL Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 1, 6, 11 / Ant. 1
Test Date	Jan. 14, 2014 & Jan. 16, 2014	Test Mode	Mode 1 (EUT 1)

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.50	72.27	74.00	-1.73	40.69	3.68	27.90	0.00	100	196	HORIZONTAL Peak
2	2390.00	52.75	54.00	-1.25	21.17	3.68	27.90	0.00	100	196	HORIZONTAL Average
3	2407.30	112.77			81.18	3.69	27.90	0.00	100	196	HORIZONTAL Peak
4	2417.20	101.32			69.73	3.69	27.90	0.00	100	196	HORIZONTAL Average

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	50.58	54.00	-3.42	19.00	3.68	27.90	0.00	100	216	HORIZONTAL Average
2	2390.10	63.58	74.00	-10.42	32.00	3.68	27.90	0.00	100	216	HORIZONTAL Peak
3	2431.00	103.60			72.00	3.70	27.90	0.00	100	216	HORIZONTAL Average
4	2431.90	115.67			84.07	3.70	27.90	0.00	100	216	HORIZONTAL Peak
5	2483.50	46.61	54.00	-7.39	14.98	3.73	27.90	0.00	100	216	HORIZONTAL Average
6	2483.50	60.56	74.00	-13.44	28.93	3.73	27.90	0.00	100	216	HORIZONTAL Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2460.40	101.62			70.00	3.72	27.90	0.00	100	195	HORIZONTAL Average
2	2466.10	113.70			82.08	3.72	27.90	0.00	100	195	HORIZONTAL Peak
3	2483.50	52.50	54.00	-1.50	20.87	3.73	27.90	0.00	100	195	HORIZONTAL Average
4	2483.50	69.12	74.00	-4.88	37.49	3.73	27.90	0.00	100	195	HORIZONTAL Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 25, 2014	Test Mode	Mode 3 (EUT 2)

Channel 1

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2390.00	68.43	74.00	-5.57	37.65	2.91	0.00	30.78	Peak	220	100	VERTICAL
2	2390.00	52.62	54.00	-1.38	21.84	2.91	0.00	30.78	Average	220	100	VERTICAL
3	2408.20	113.78			83.02	2.92	0.00	30.76	Peak	220	100	VERTICAL
4	2409.60	102.36			71.60	2.92	0.00	30.76	Average	220	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2390.00	64.72	74.00	-9.28	33.94	2.91	0.00	30.78	Peak	284	100	VERTICAL
2	2390.00	52.90	54.00	-1.10	22.12	2.91	0.00	30.78	Average	284	100	VERTICAL
3	2431.80	108.52			77.78	2.93	0.00	30.74	Average	284	100	VERTICAL
4	2432.60	120.06			89.32	2.93	0.00	30.74	Peak	284	100	VERTICAL
5	2483.90	50.79	54.00	-3.21	20.10	2.96	0.00	30.69	Average	284	100	VERTICAL
6	2485.10	63.21	74.00	-10.79	32.52	2.96	0.00	30.69	Peak	284	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2466.80	102.83			72.12	2.95	0.00	30.71	Average	283	100	VERTICAL
2	2467.60	115.02			84.31	2.95	0.00	30.71	Peak	283	100	VERTICAL
3	2483.50	71.93	74.00	-2.07	41.24	2.96	0.00	30.69	Peak	283	100	VERTICAL
4	2483.50	52.81	54.00	-1.19	22.12	2.96	0.00	30.69	Average	283	100	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 25, 2014	Test Mode	Mode 3 (EUT 2)

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2386.80	67.56	74.00	-6.44	36.78	2.91	0.00	30.78	Peak	36	100	VERTICAL
2	2390.00	52.05	54.00	-1.95	21.27	2.91	0.00	30.78	Average	36	100	VERTICAL
3	2432.40	96.53			65.79	2.93	0.00	30.74	Average	36	100	VERTICAL
4	2432.80	109.80			79.06	2.93	0.00	30.74	Peak	36	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2390.00	67.14	74.00	-6.86	36.36	2.91	0.00	30.78	Peak	81	100	VERTICAL
2	2390.00	51.98	54.00	-2.02	21.20	2.91	0.00	30.78	Average	81	100	VERTICAL
3	2440.60	99.81			69.09	2.94	0.00	30.72	Average	81	100	VERTICAL
4	2441.00	112.28			81.56	2.94	0.00	30.72	Peak	81	100	VERTICAL
5	2483.50	64.52	74.00	-9.48	33.83	2.96	0.00	30.69	Peak	81	100	VERTICAL
6	2483.50	49.80	54.00	-4.20	19.11	2.96	0.00	30.69	Average	81	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2461.60	97.49			66.78	2.95	0.00	30.71	Average	36	100	VERTICAL
2	2462.00	110.00			79.29	2.95	0.00	30.71	Peak	36	100	VERTICAL
3	2483.50	68.75	74.00	-5.25	38.06	2.96	0.00	30.69	Peak	36	100	VERTICAL
4	2483.50	52.22	54.00	-1.78	21.53	2.96	0.00	30.69	Average	36	100	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 1, 6, 11 / Ant. 1
Test Date	Jan. 25, 2014	Test Mode	Mode 3 (EUT 2)

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2372.40	64.80	74.00	-9.20	34.01	2.90	0.00	30.79	Peak	221	100	VERTICAL
2	2373.00	52.69	54.00	-1.31	21.90	2.90	0.00	30.79	Average	221	100	VERTICAL
3	2411.20	117.50			86.74	2.92	0.00	30.76	Peak	221	100	VERTICAL
4	2411.20	113.62			82.86	2.92	0.00	30.76	Average	221	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2357.20	71.75	74.00	-2.25	40.94	2.89	0.00	30.81	Peak	222	100	VERTICAL
2	2388.40	48.86	54.00	-5.14	18.08	2.91	0.00	30.78	Average	222	100	VERTICAL
3	2436.20	119.62			88.88	2.93	0.00	30.74	Peak	222	100	VERTICAL
4	2437.80	115.32			84.60	2.94	0.00	30.72	Average	222	100	VERTICAL
5	2483.50	60.10	74.00	-13.90	29.41	2.96	0.00	30.69	Peak	222	100	VERTICAL
6	2483.50	46.80	54.00	-7.20	16.11	2.96	0.00	30.69	Average	222	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2382.40	72.75	74.00	-1.25	41.96	2.90	0.00	30.79	Peak	222	100	VERTICAL
2	2383.60	49.24	54.00	-4.76	18.45	2.90	0.00	30.79	Average	222	100	VERTICAL
3	2461.20	114.45			83.74	2.95	0.00	30.71	Average	222	100	VERTICAL
4	2462.80	118.29			87.58	2.95	0.00	30.71	Peak	222	100	VERTICAL
5	2483.50	47.99	54.00	-6.01	17.30	2.96	0.00	30.69	Average	222	100	VERTICAL
6	2500.00	59.62	74.00	-14.38	28.95	2.97	0.00	30.67	Peak	222	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2462 MHz.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 1, 6, 11 / Ant. 1
Test Date	Jan. 25, 2014	Test Mode	Mode 3 (EUT 2)

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2389.80	66.40	74.00	-7.60	35.62	2.91	0.00	30.78	Peak	222	100	VERTICAL
2	2390.00	52.25	54.00	-1.75	21.47	2.91	0.00	30.78	Average	222	100	VERTICAL
3	2416.80	112.89			82.13	2.92	0.00	30.76	Peak	222	100	VERTICAL
4	2418.00	101.52			70.76	2.92	0.00	30.76	Average	222	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2362.00	68.88	74.00	-5.12	38.07	2.89	0.00	30.81	Peak	223	100	VERTICAL
2	2390.00	50.03	54.00	-3.97	19.25	2.91	0.00	30.78	Average	223	100	VERTICAL
3	2430.60	117.46			86.72	2.93	0.00	30.74	Peak	223	100	VERTICAL
4	2433.00	105.33			74.59	2.93	0.00	30.74	Average	223	100	VERTICAL
5	2483.50	59.28	74.00	-14.72	28.59	2.96	0.00	30.69	Peak	223	100	VERTICAL
6	2483.50	46.62	54.00	-7.38	15.93	2.96	0.00	30.69	Average	223	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2456.80	102.98			72.27	2.95	0.00	30.71	Average	223	100	VERTICAL
2	2457.20	114.65			83.94	2.95	0.00	30.71	Peak	223	100	VERTICAL
3	2483.50	52.46	54.00	-1.54	21.77	2.96	0.00	30.69	Average	223	100	VERTICAL
4	2483.70	67.65	74.00	-6.35	36.96	2.96	0.00	30.69	Peak	223	100	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level / Test Mode: Mode 1 (EUT 1)

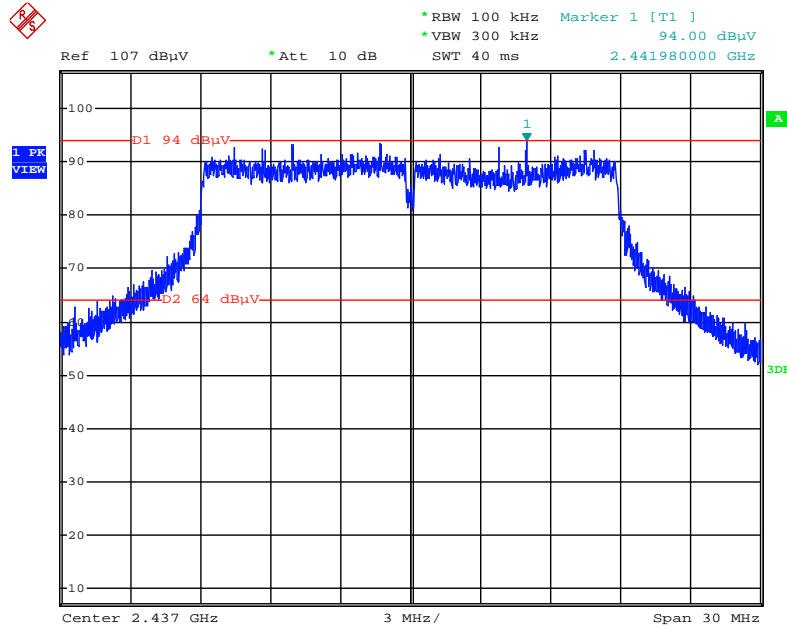


Date: 24.JAN.2014 01:07:02

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 1 (EUT 1)

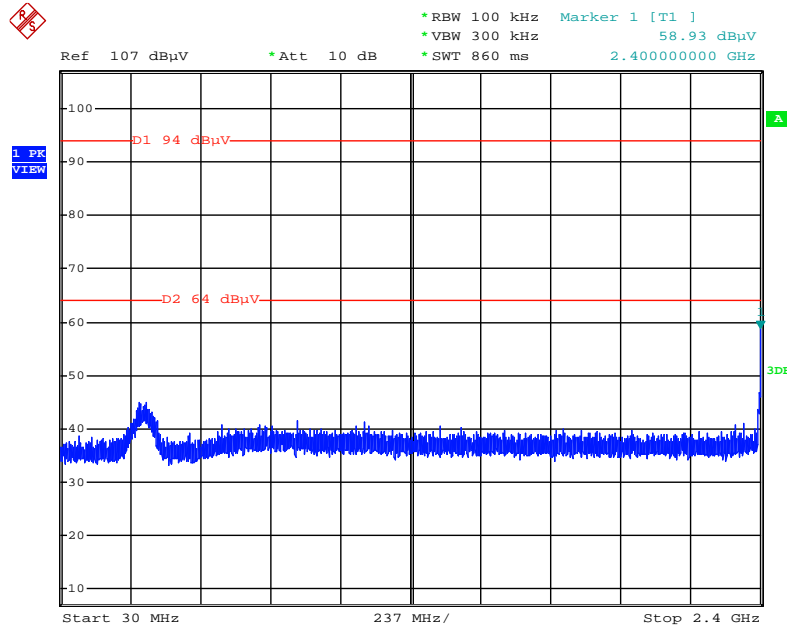


Date: 24.JAN.2014 01:07:59

**Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc) /
Test Mode: Mode 1 (EUT 1)**

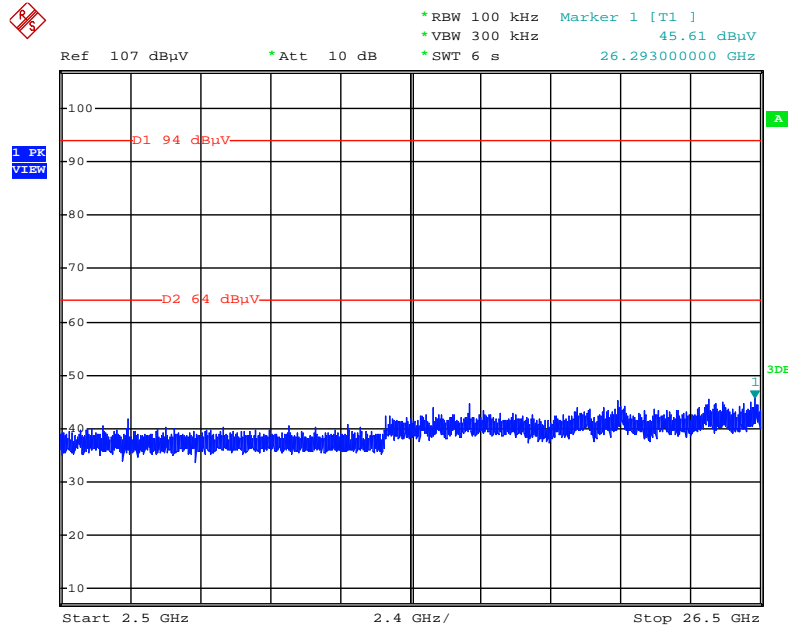


Date: 24.JAN.2014 01:08:38

**Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc) /
Test Mode: Mode 1 (EUT 1)**

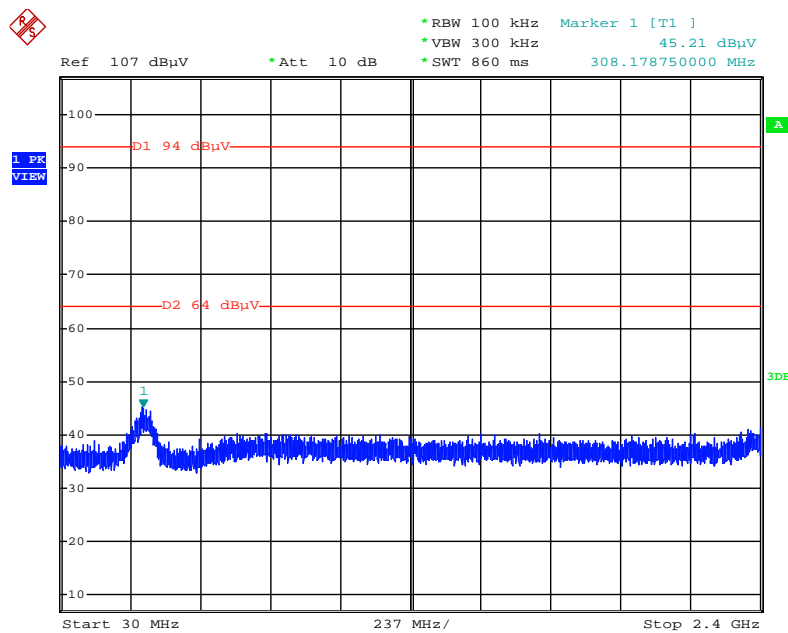


Date: 24.JAN.2014 01:09:45

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc) /
Test Mode: Mode 1 (EUT 1)

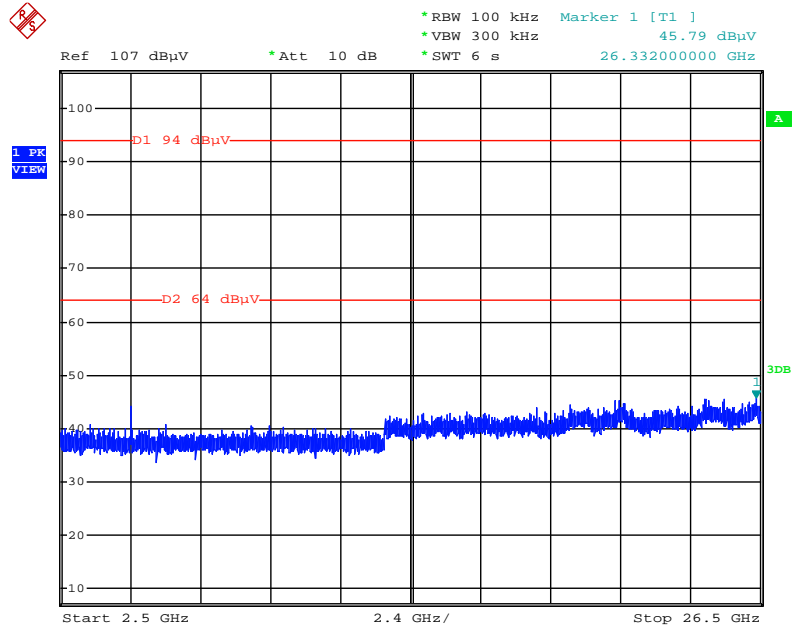


Date: 24.JAN.2014 01:09:20

Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level / Test Mode: Mode 1 (EUT 1)

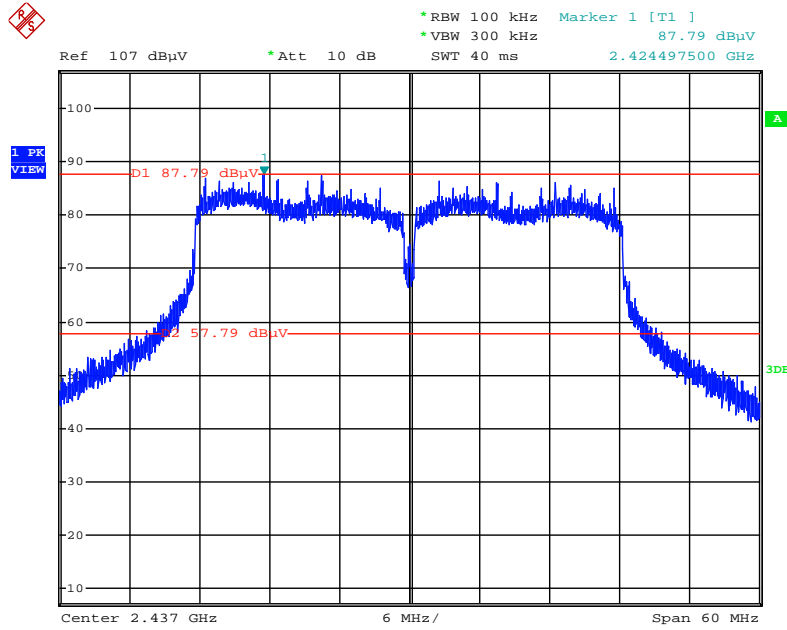


Date: 24.JAN.2014 01:11:43

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 1 (EUT 1)

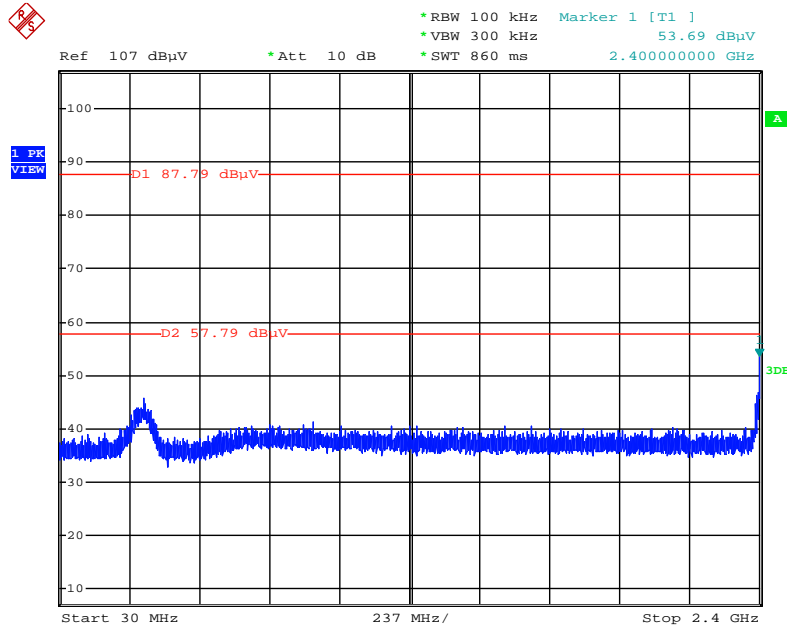


Date: 24.JAN.2014 01:24:00

**Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc) /
Test Mode: Mode 1 (EUT 1)**

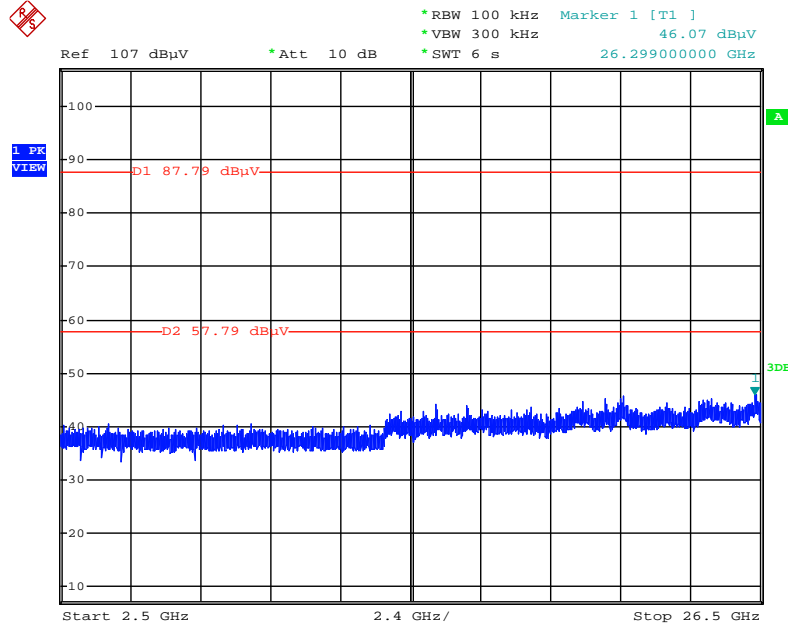


Date: 24.JAN.2014 01:24:40

**Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc) /
Test Mode: Mode 1 (EUT 1)**

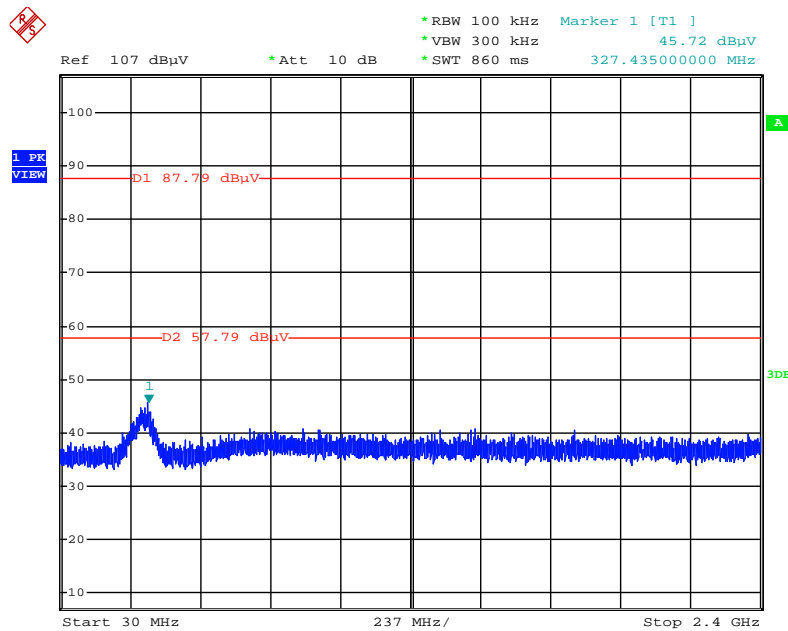


Date: 24.JAN.2014 01:26:17

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc) /
Test Mode: Mode 1 (EUT 1)

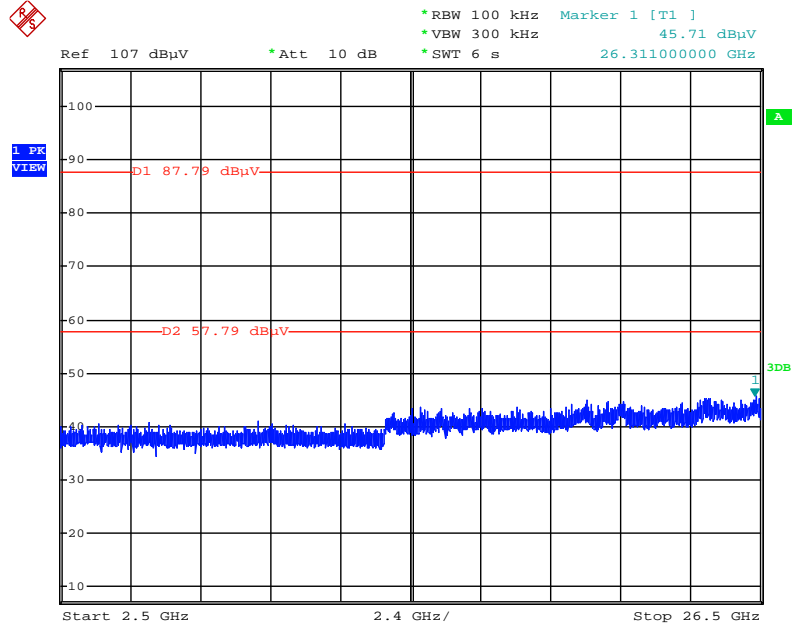


Date: 24.JAN.2014 01:25:39

Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Reference Level / Test Mode: Mode 2 (EUT 1)

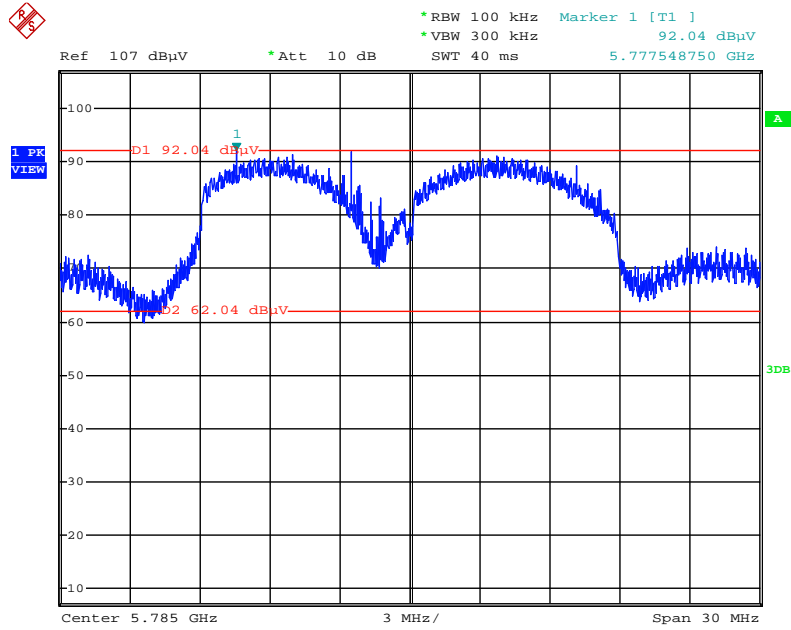


Date: 11.FEB.2014 02:04:28

Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / CH 149 / 30MHz~5725MHz (down 30dBc) / Test Mode: Mode 2 (EUT 1)

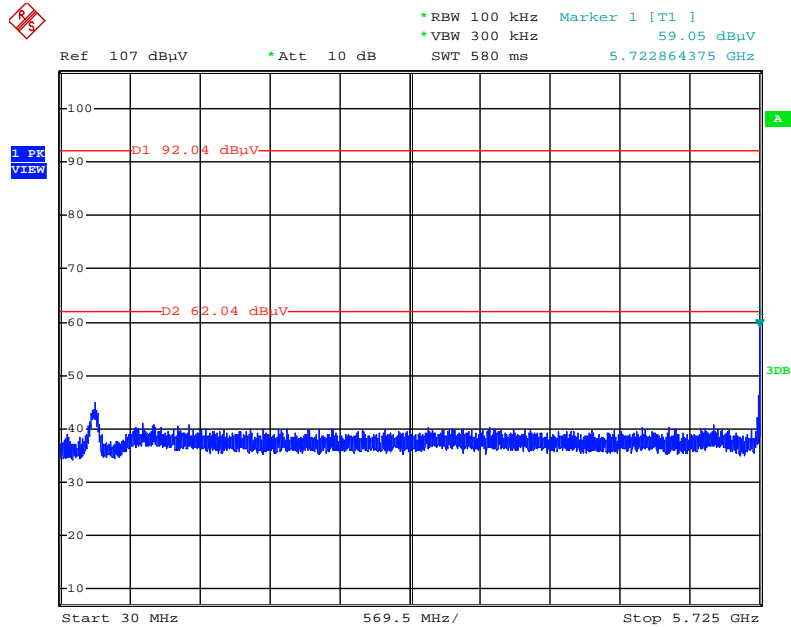


Date: 11.FEB.2014 02:07:26

**Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / CH 149 / 5850MHz~40000MHz (down 30dBc) /
Test Mode: Mode 2 (EUT 1)**

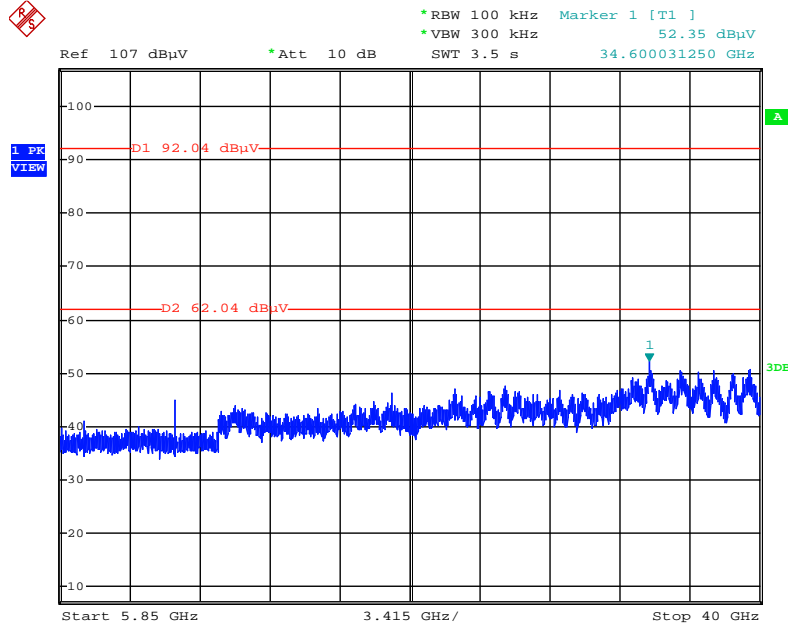


Date: 11.FEB.2014 02:08:09

**Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / CH 165 / 30MHz~5725MHz (down 30dBc) /
Test Mode: Mode 2 (EUT 1)**

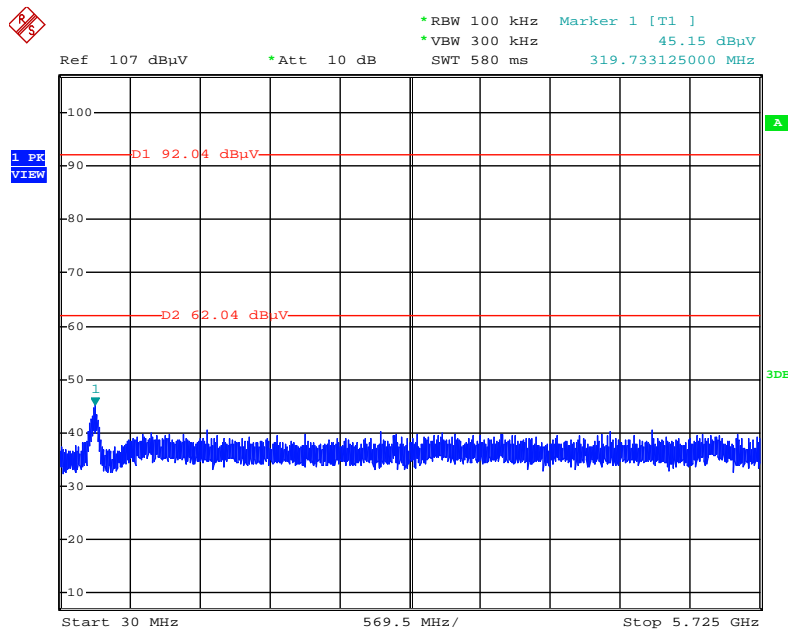


Date: 11.FEB.2014 02:09:31

Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / CH 165 / 5850MHz~40000MHz (down 30dBc) /
 Test Mode: Mode 2 (EUT 1)

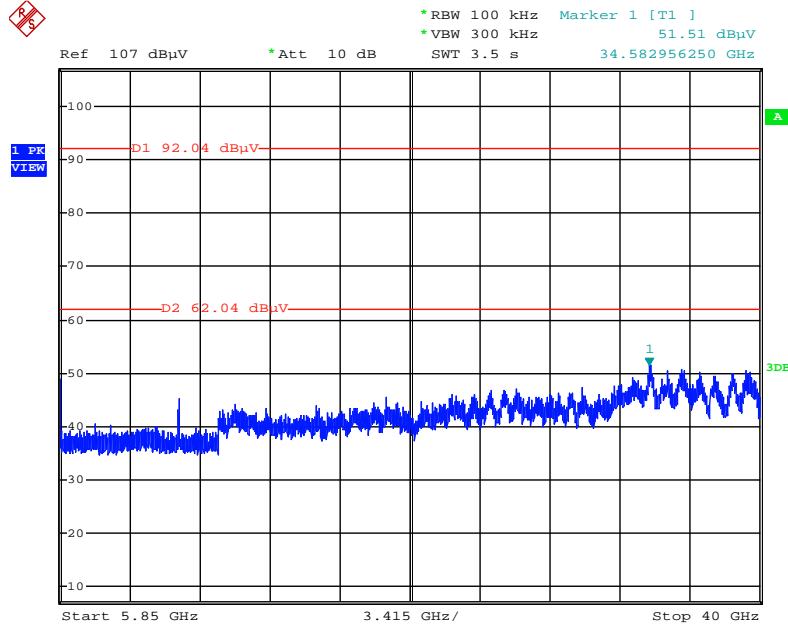


Date: 11.FEB.2014 02:08:57

Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Reference Level / Test Mode: Mode 2 (EUT 1)

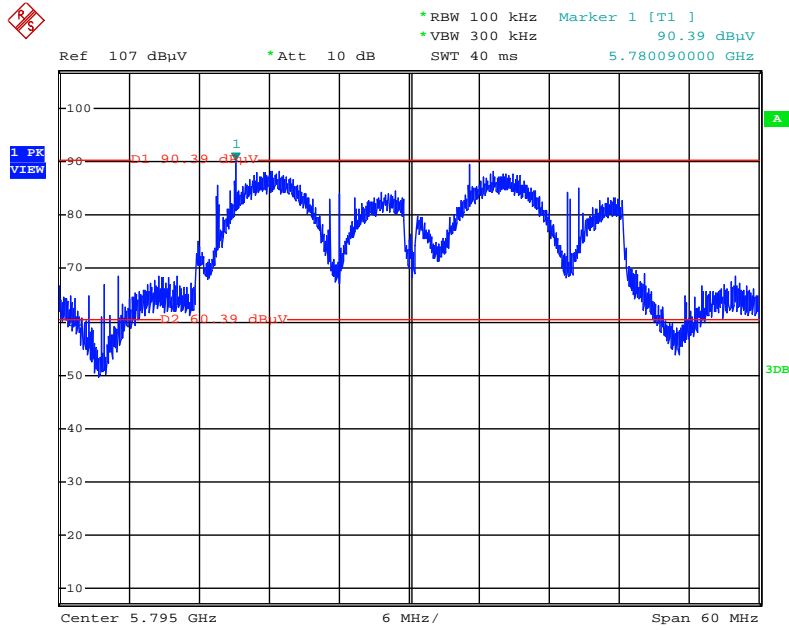


Date: 11.FEB.2014 02:13:07

Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / CH 151 / 30MHz~5725MHz (down 30dBc) / Test Mode: Mode 2 (EUT 1)

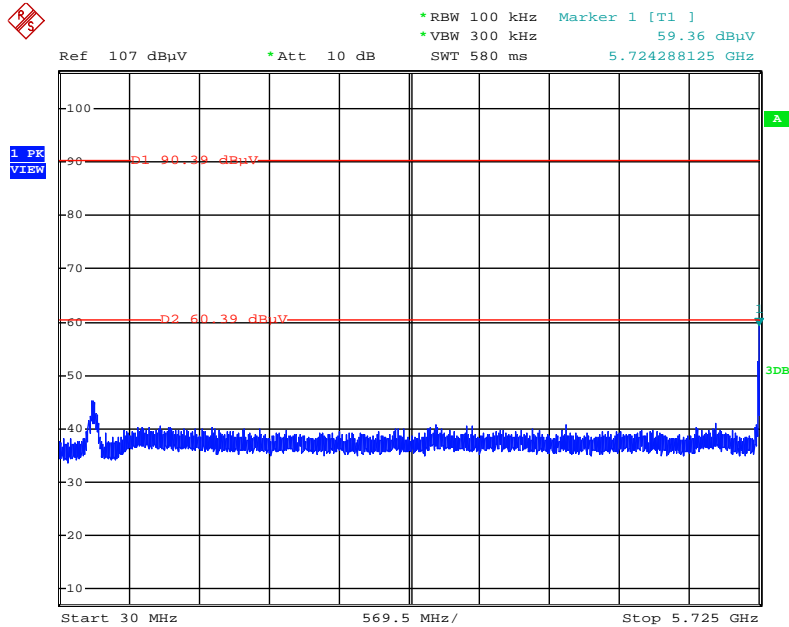


Date: 11.FEB.2014 02:18:56

**Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / CH 151 / 5850MHz~40000MHz (down 30dBc) /
Test Mode: Mode 2 (EUT 1)**

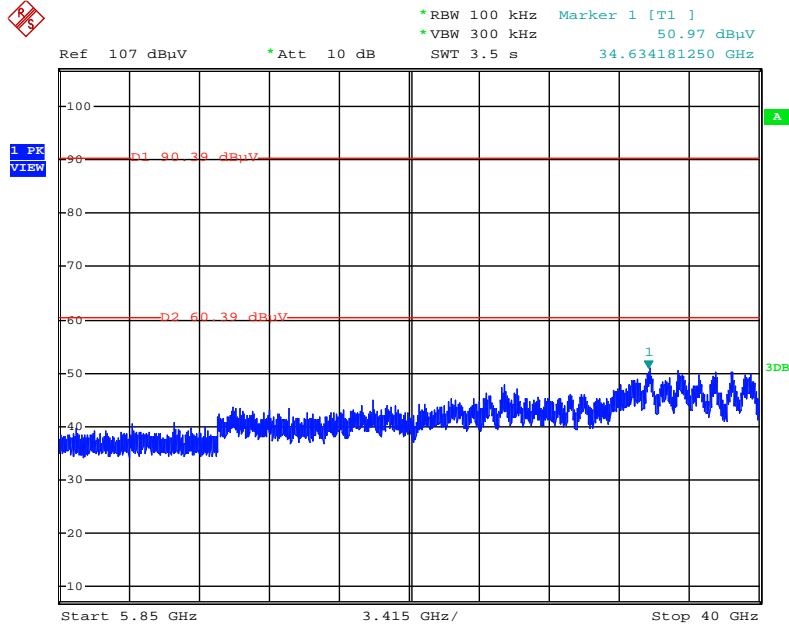


Date: 11.FEB.2014 02:19:33

**Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / CH 159 / 30MHz~5725MHz (down 30dBc) /
Test Mode: Mode 2 (EUT 1)**

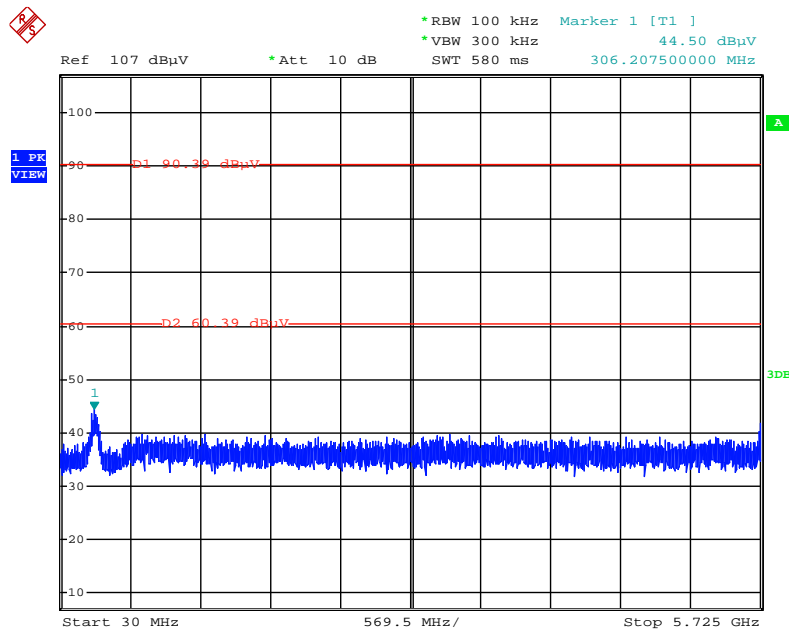


Date: 11.FEB.2014 02:13:33

Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / CH 159 / 5850MHz~40000MHz (down 30dBc) /
 Test Mode: Mode 2 (EUT 1)

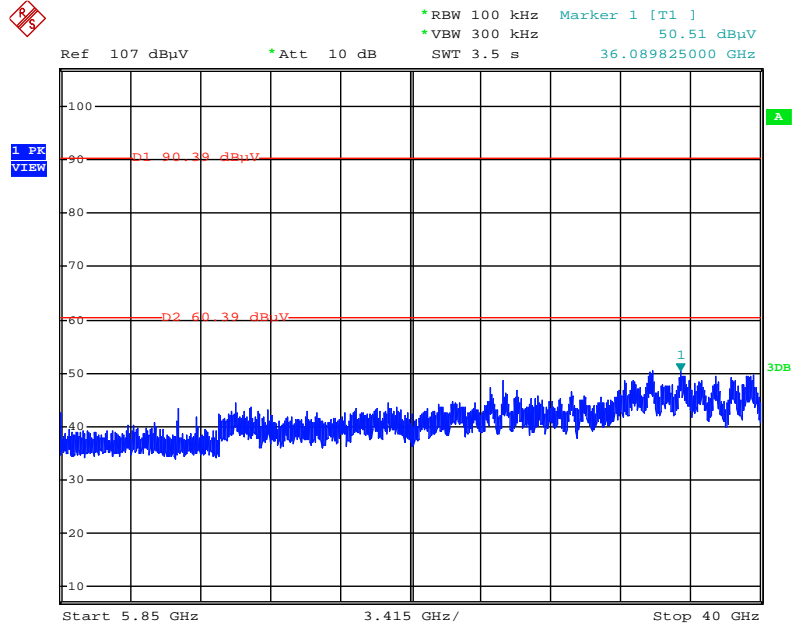


Date: 11.FEB.2014 02:14:06

Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Reference Level / Test Mode: Mode 2 (EUT 1)

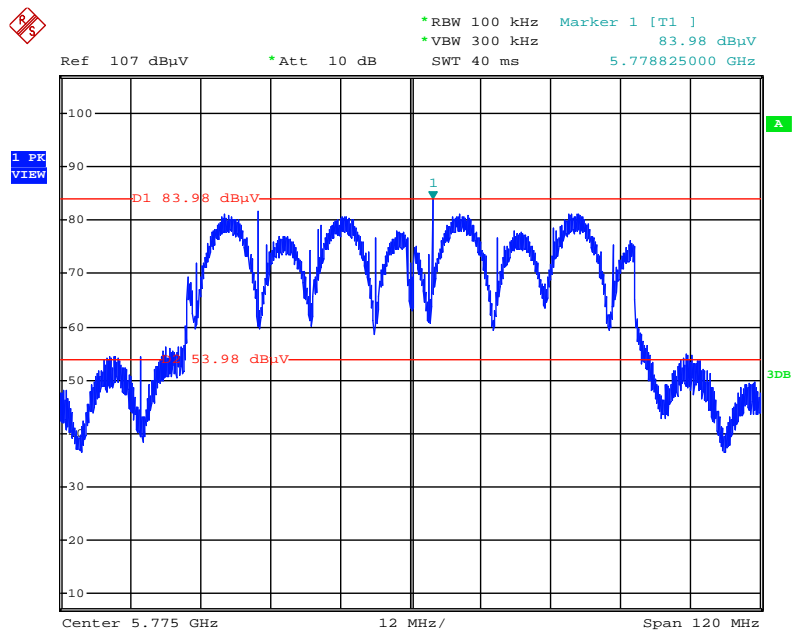


Date: 11.FEB.2014 02:26:34

Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / CH 155 / 30MHz~5725MHz (down 30dBc) / Test Mode: Mode 2 (EUT 1)

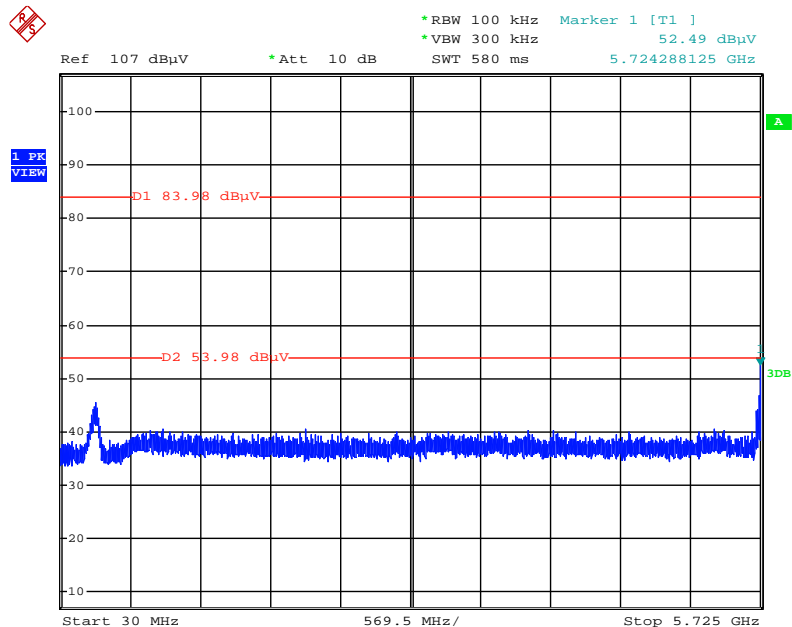


Date: 11.FEB.2014 02:27:23

Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / CH 155 / 5850MHz~40000MHz (down 30dBc) /
 Test Mode: Mode 2 (EUT 1)

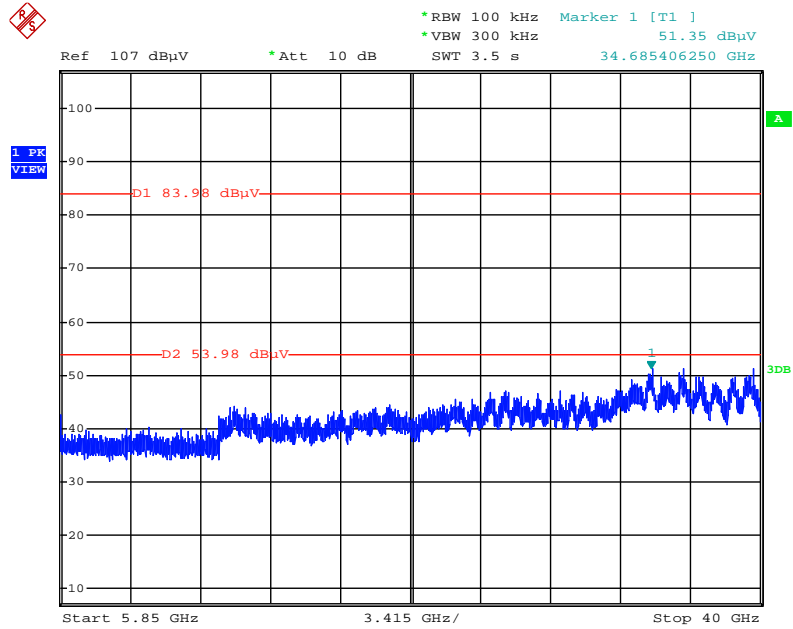


Date: 11.FEB.2014 02:28:27

Plot on Configuration IEEE 802.11b / Reference Level / Test Mode: Mode 1 (EUT 1)

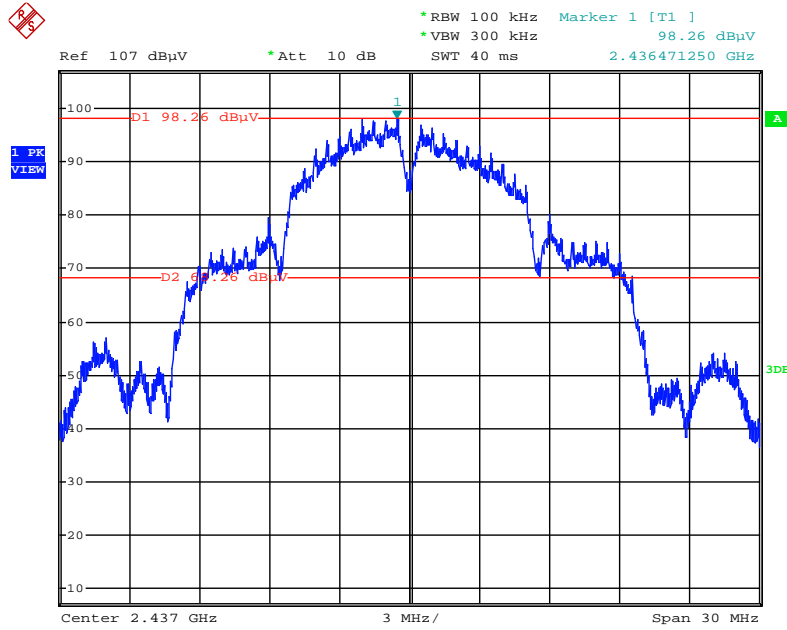


Date: 24.JAN.2014 00:52:05

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 1 (EUT 1)

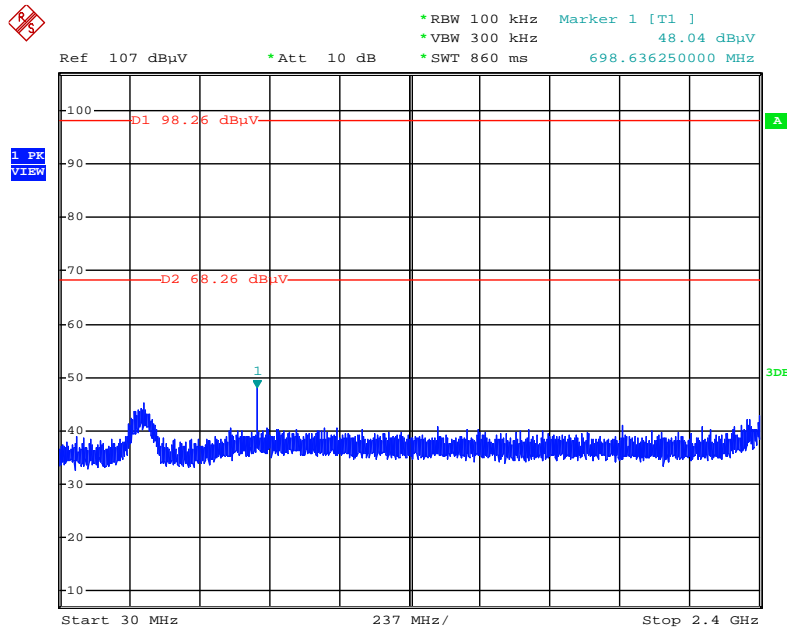


Date: 24.JAN.2014 00:53:30

**Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc) /
Test Mode: Mode 1 (EUT 1)**

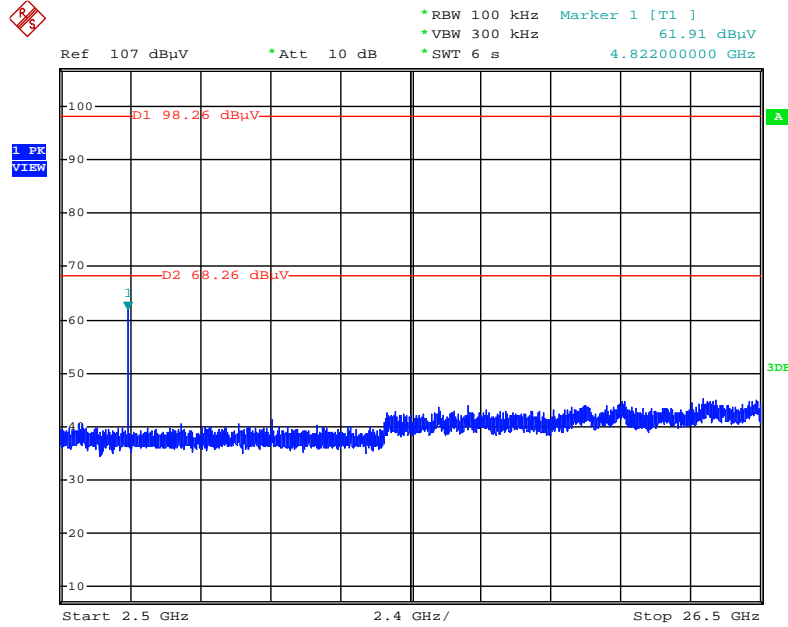


Date: 24.JAN.2014 00:55:16

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 1 (EUT 1)

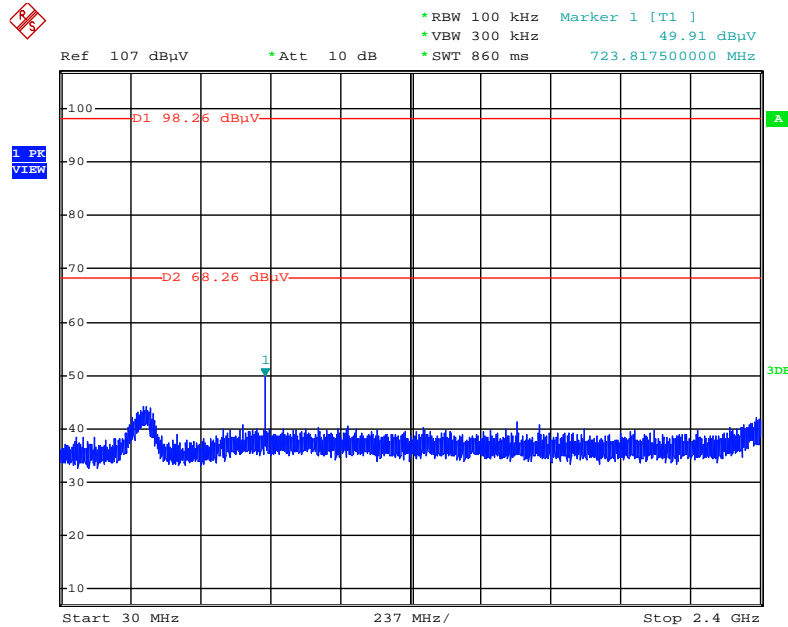


Date: 24.JAN.2014 00:56:41

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc) /
 Test Mode: Mode 1 (EUT 1)

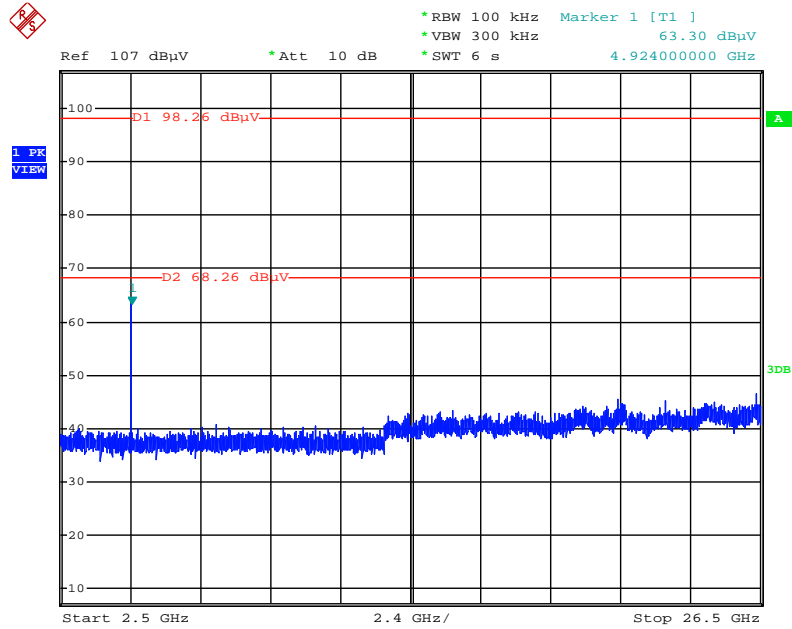


Date: 24.JAN.2014 00:56:04

Plot on Configuration IEEE 802.11g / Reference Level / Test Mode: Mode 1 (EUT 1)

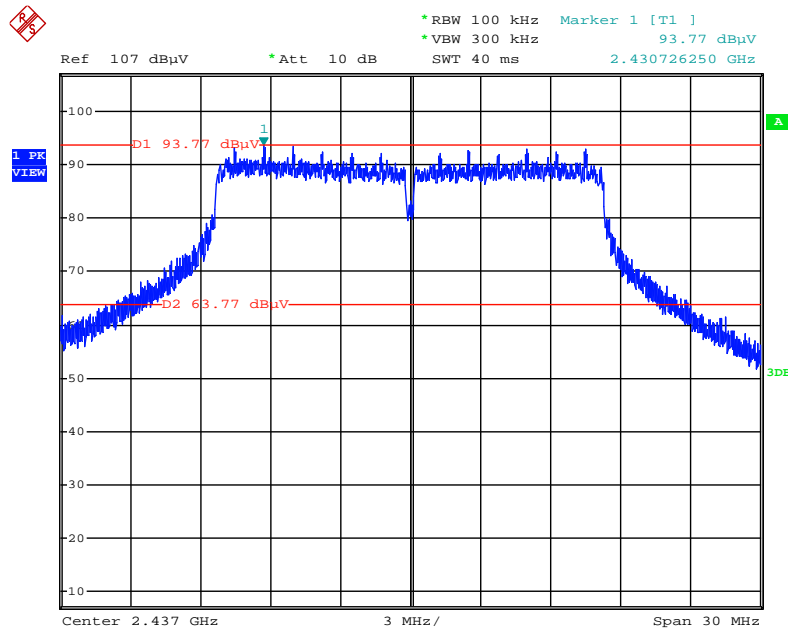


Date: 24.JAN.2014 01:00:40

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 1 (EUT 1)

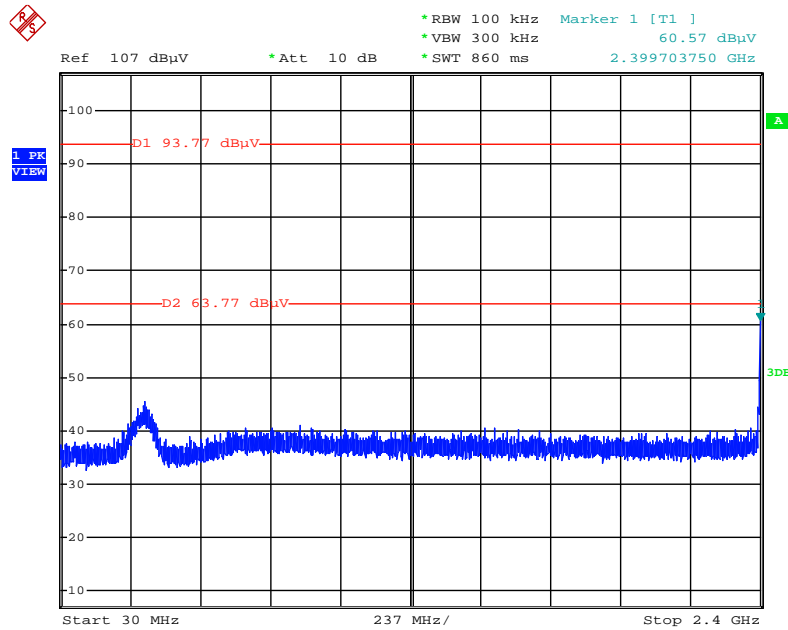


Date: 24.JAN.2014 01:02:14

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc) /
 Test Mode: Mode 1 (EUT 1)

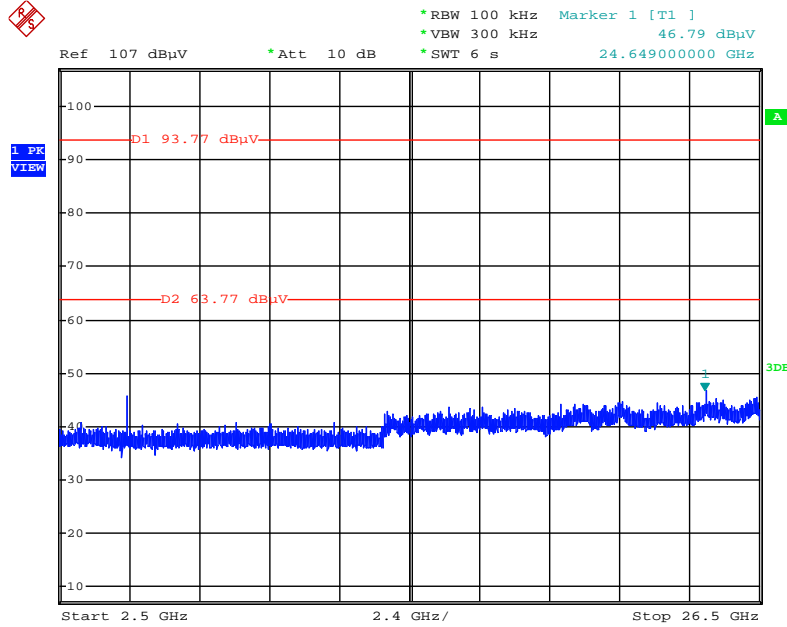


Date: 24.JAN.2014 01:03:17

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 1 (EUT 1)

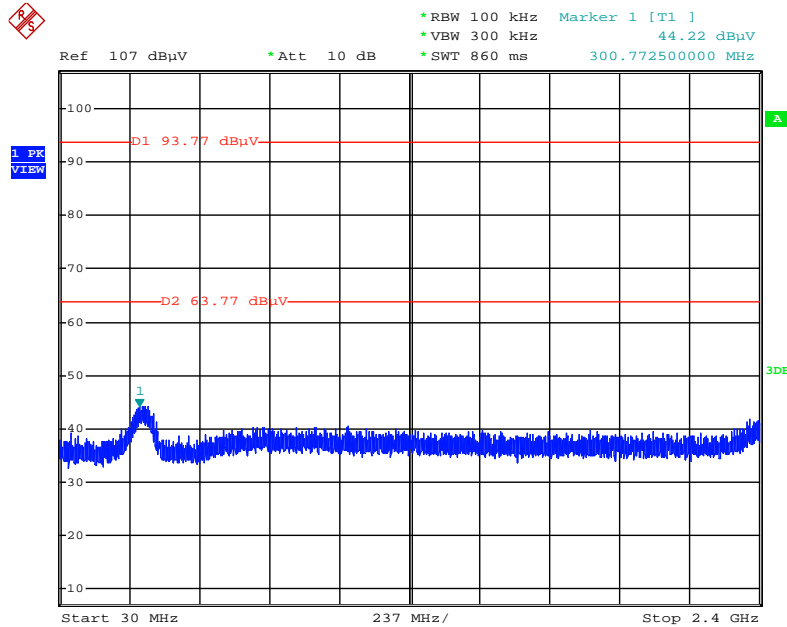


Date: 24.JAN.2014 01:05:02

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc) /
Test Mode: Mode 1 (EUT 1)

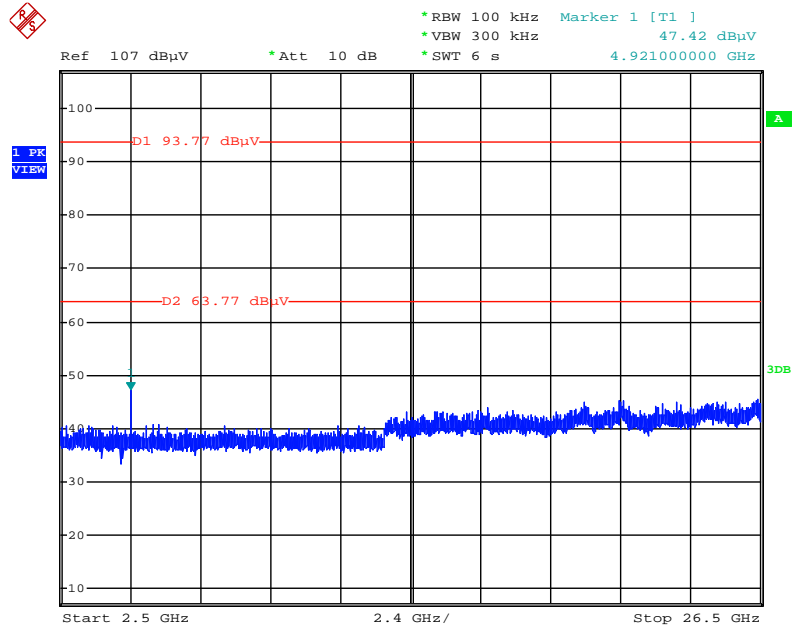


Date: 24.JAN.2014 01:04:26

Plot on Configuration IEEE 802.11a / Reference Level / Test Mode: Mode 2 (EUT 1)

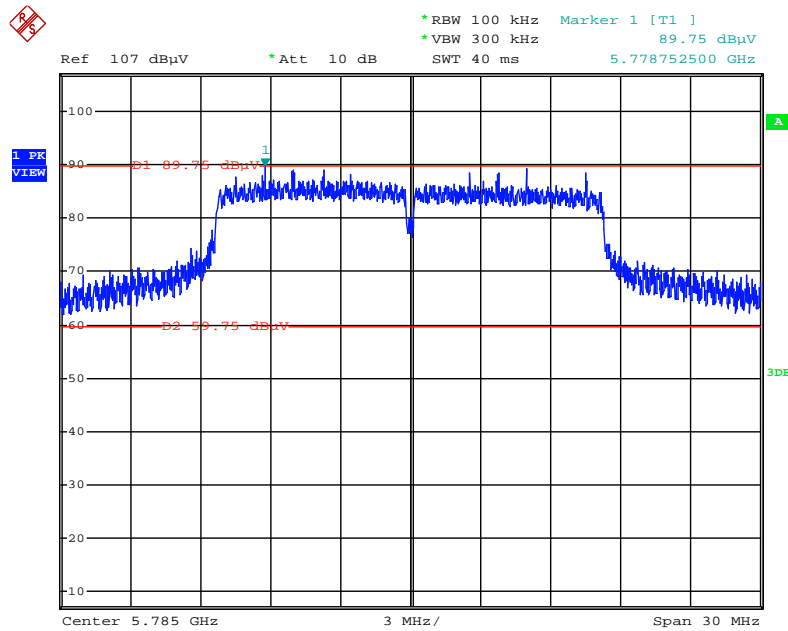


Date: 11.FEB.2014 01:57:36

Plot on Configuration IEEE 802.11a / CH 149 / 30MHz~5725MHz (down 30dBc) / Test Mode: Mode 2 (EUT 1)

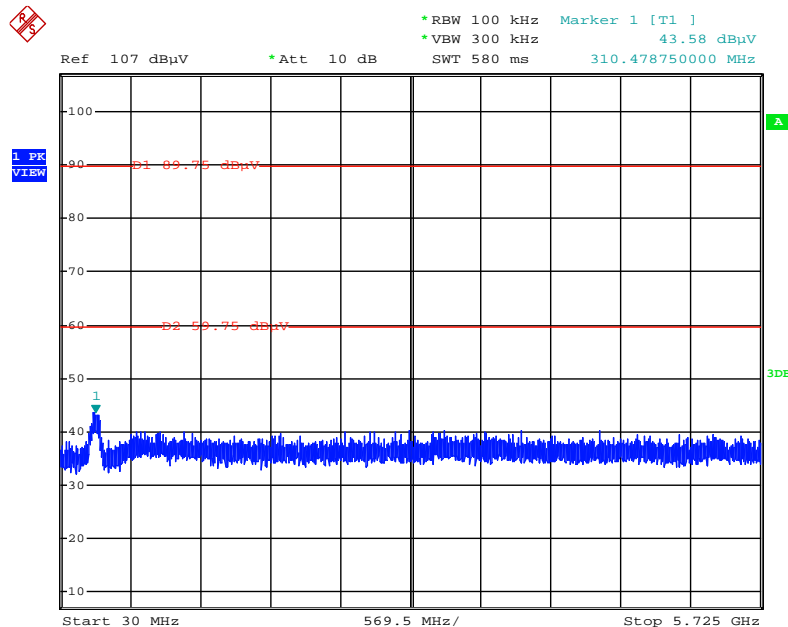


Date: 11.FEB.2014 01:59:57

**Plot on Configuration IEEE 802.11a / CH 149 / 5850MHz~40000MHz (down 30dBc) /
Test Mode: Mode 2 (EUT 1)**

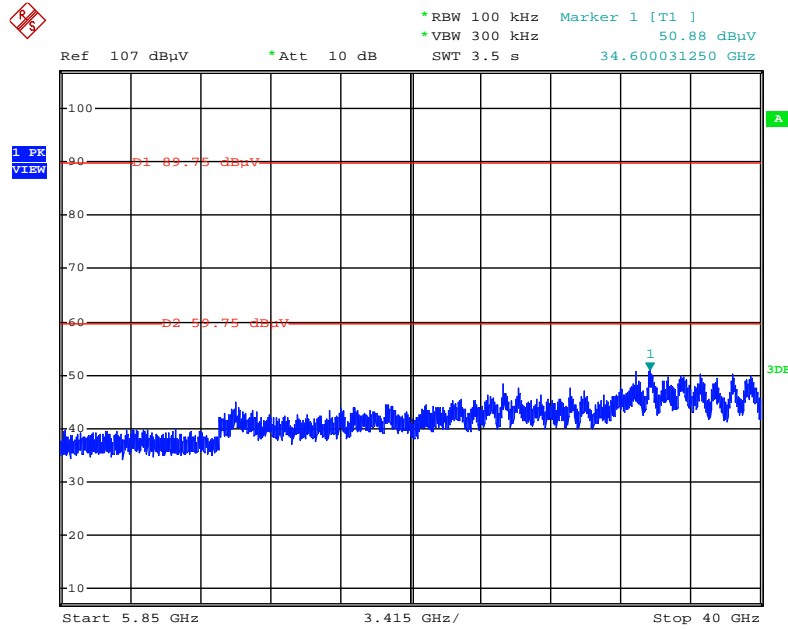


Date: 11.FEB.2014 02:00:38

**Plot on Configuration IEEE 802.11a / CH 165 / 30MHz~5725MHz (down 30dBc) /
Test Mode: Mode 2 (EUT 1)**

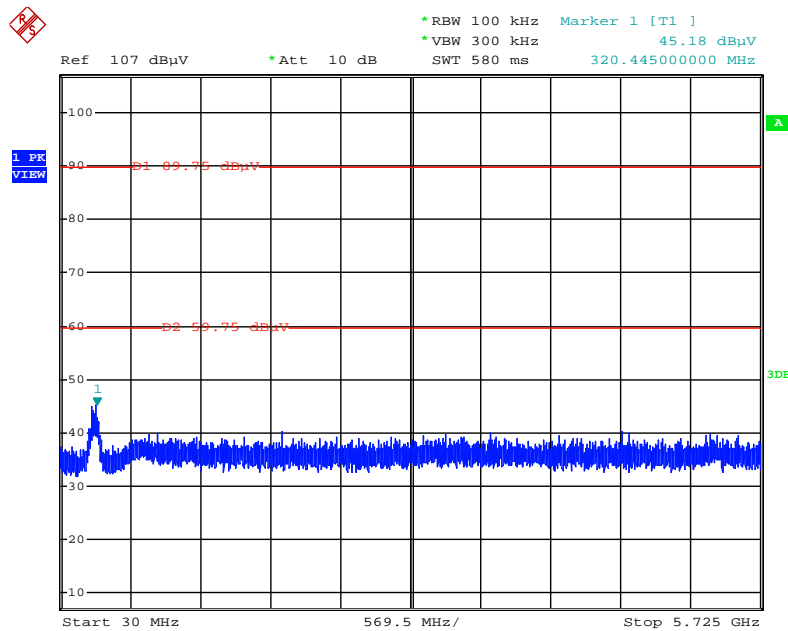


Date: 11.FEB.2014 02:01:58

Plot on Configuration IEEE 802.11a / CH 165 / 5850MHz~4000MHz (down 30dBc) /
Test Mode: Mode 2 (EUT 1)

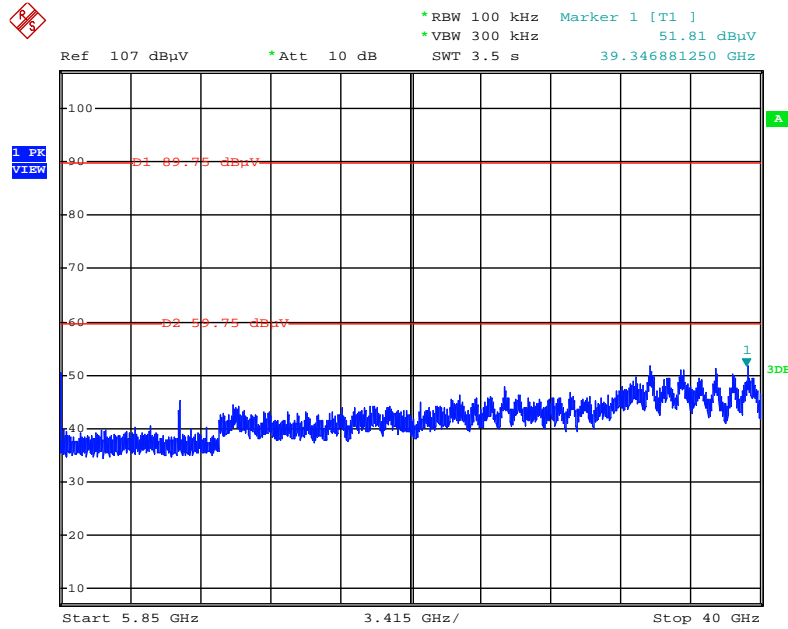


Date: 11.FEB.2014 02:01:29

Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level / Test Mode: Mode 3 (EUT 2)

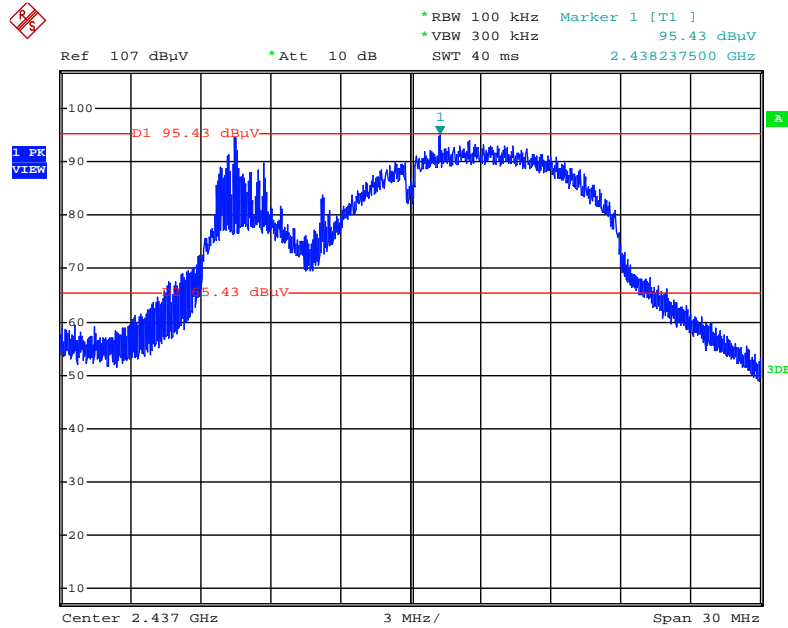


Date: 25.JAN.2014 04:02:15

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 3 (EUT 2)

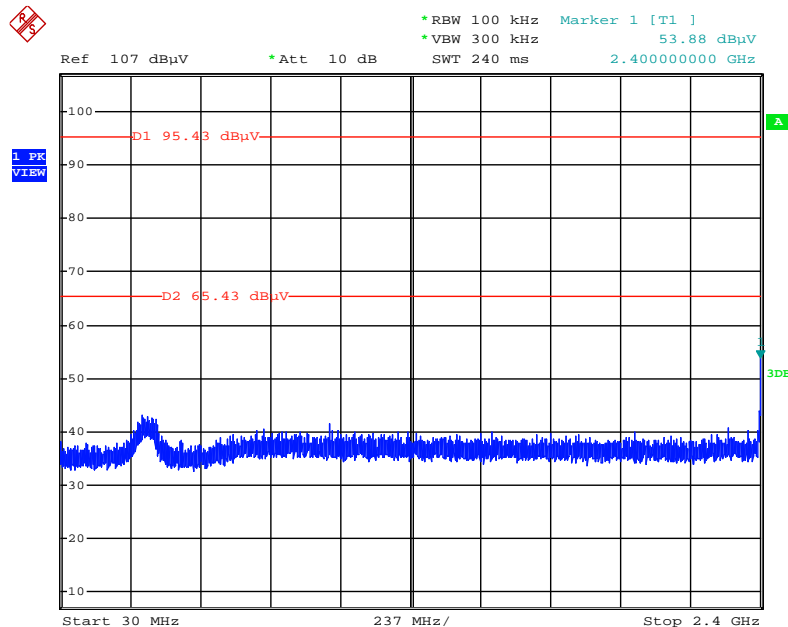


Date: 25.JAN.2014 04:03:07

**Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc) /
Test Mode: Mode 3 (EUT 2)**

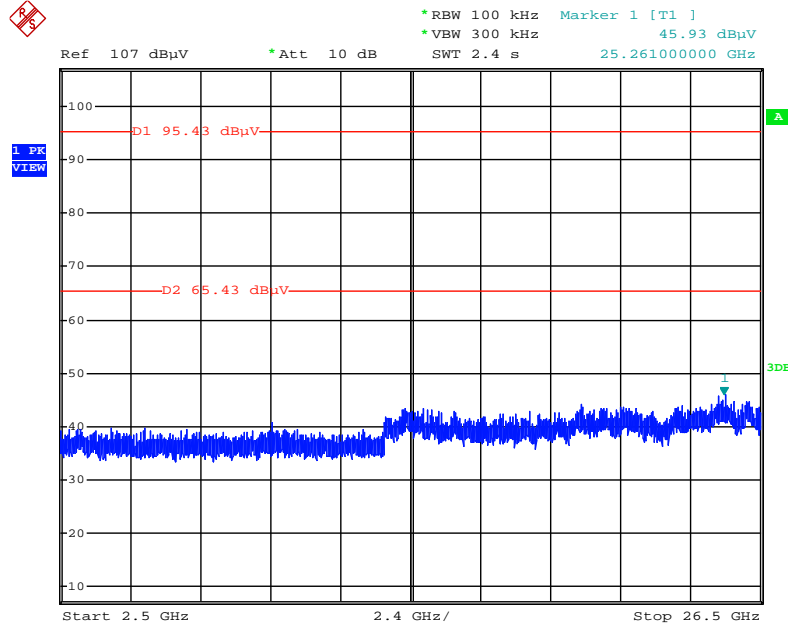


Date: 25.JAN.2014 04:03:36

**Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc) /
Test Mode: Mode 3 (EUT 2)**

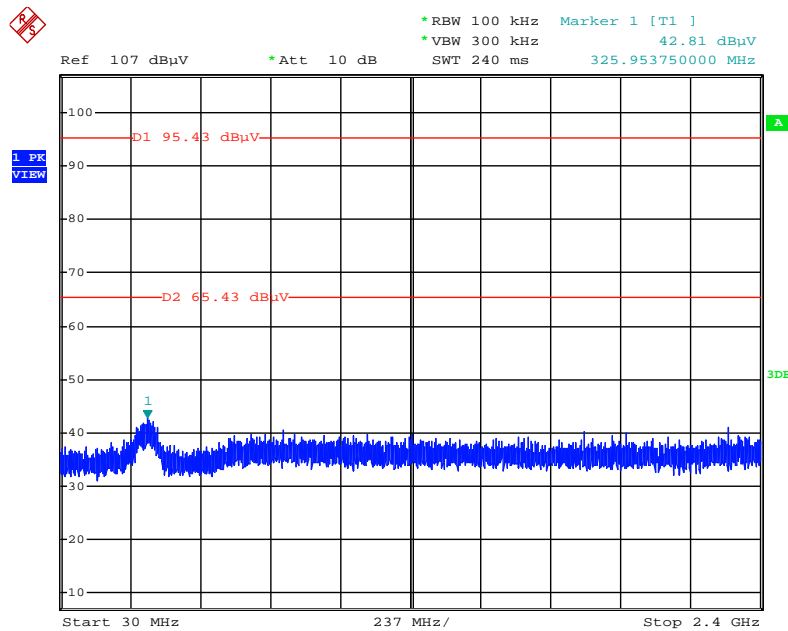


Date: 25.JAN.2014 04:04:45

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc) /
Test Mode: Mode 3 (EUT 2)

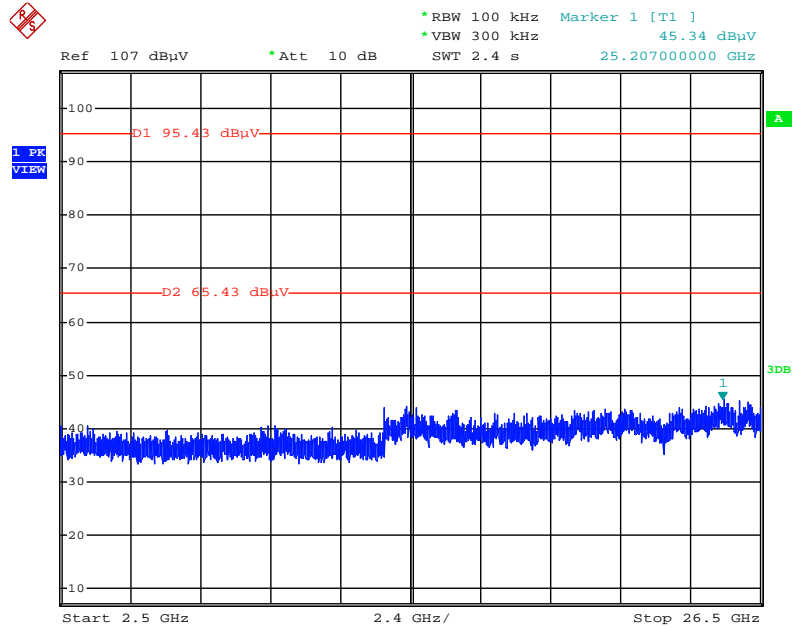


Date: 25.JAN.2014 04:04:21

Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level / Test Mode: Mode 3 (EUT 2)

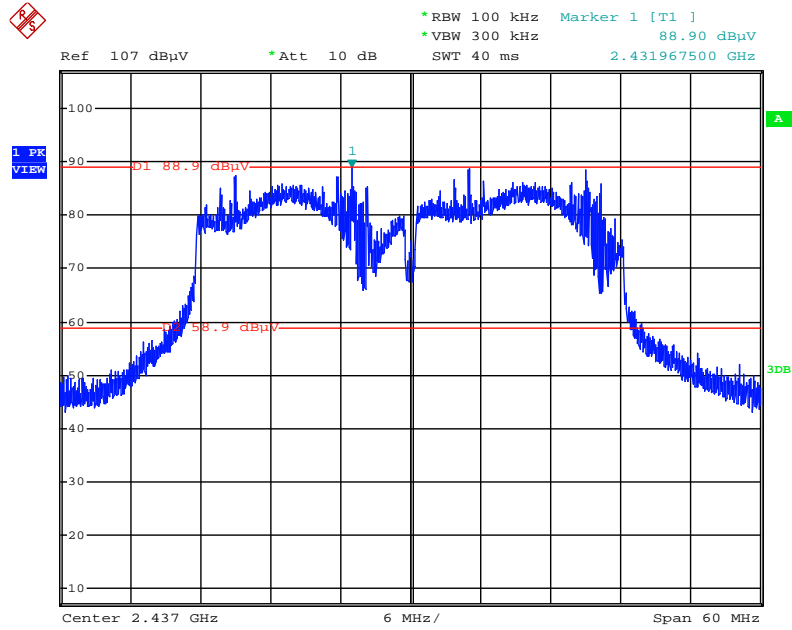


Date: 25.JAN.2014 04:11:16

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 3 (EUT 2)

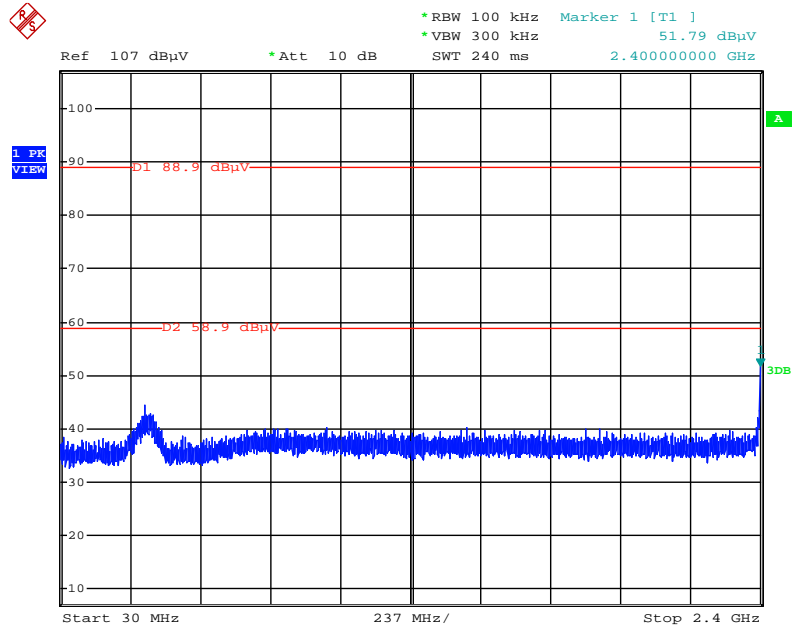


Date: 25.JAN.2014 04:12:07

**Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc) /
Test Mode: Mode 3 (EUT 2)**

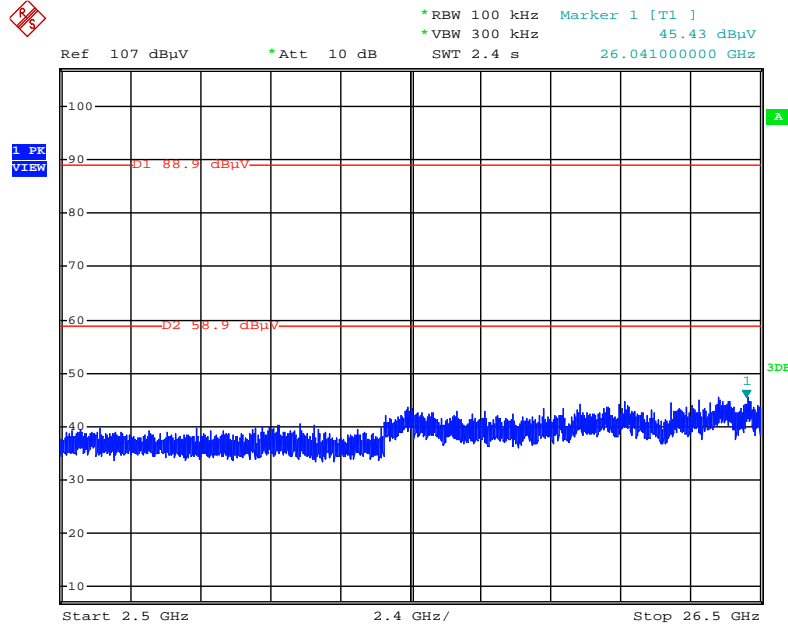


Date: 25.JAN.2014 04:12:39

**Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc) /
Test Mode: Mode 3 (EUT 2)**

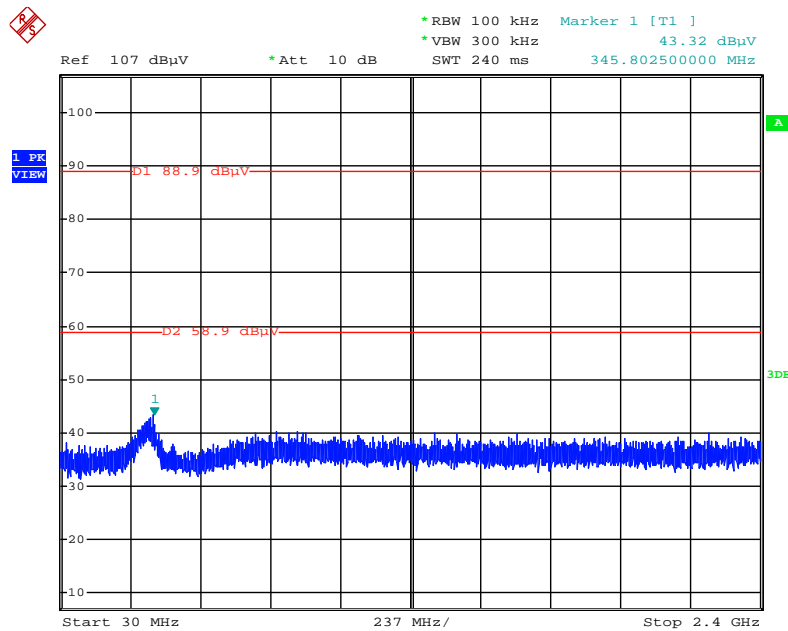


Date: 25.JAN.2014 04:13:51

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc) /
 Test Mode: Mode 3 (EUT 2)

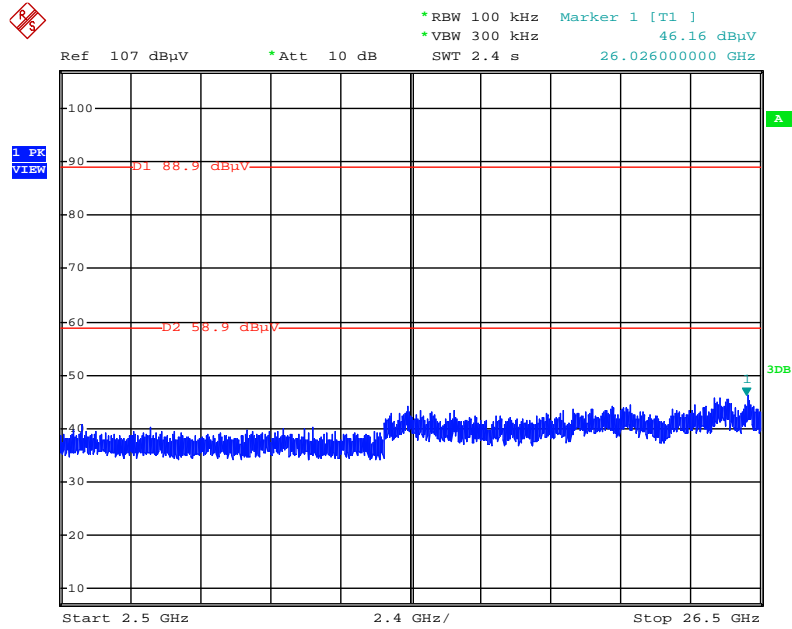


Date: 25.JAN.2014 04:13:26

Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Reference Level / Test Mode: Mode 3 (EUT 2)

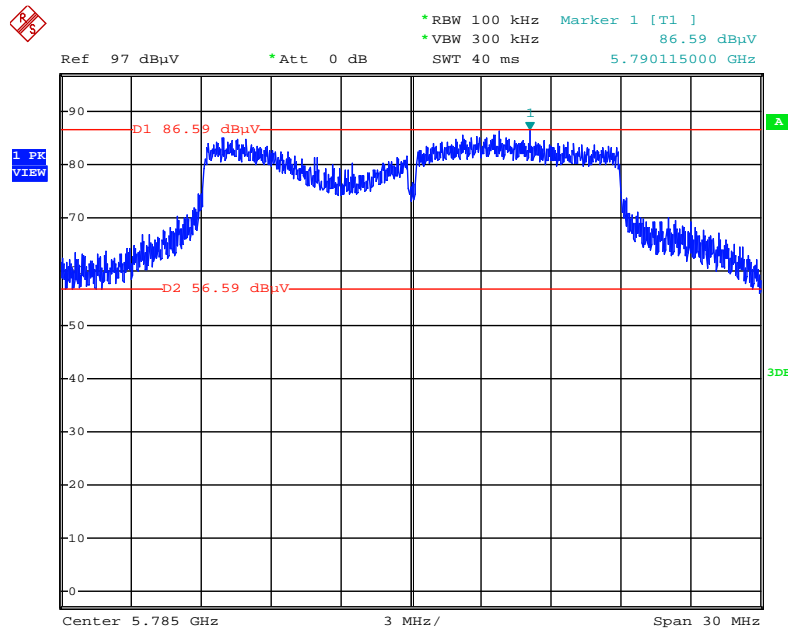


Date: 25.FEB.2014 23:44:12

Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / CH 149 / 30MHz~5725MHz (down 30dBc) / Test Mode: Mode 3 (EUT 2)

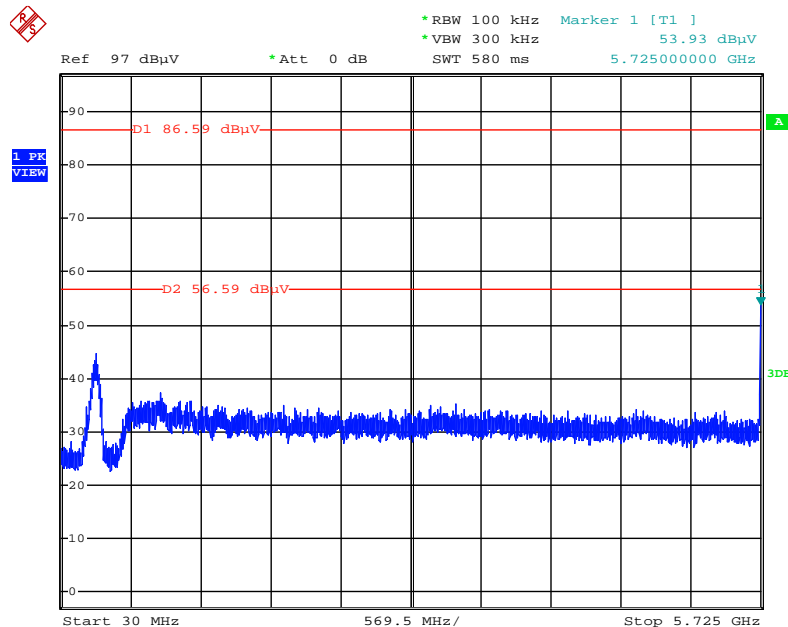


Date: 25.FEB.2014 23:45:18

**Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / CH 149 / 5850MHz~40000MHz (down 30dBc) /
Test Mode: Mode 3 (EUT 2)**

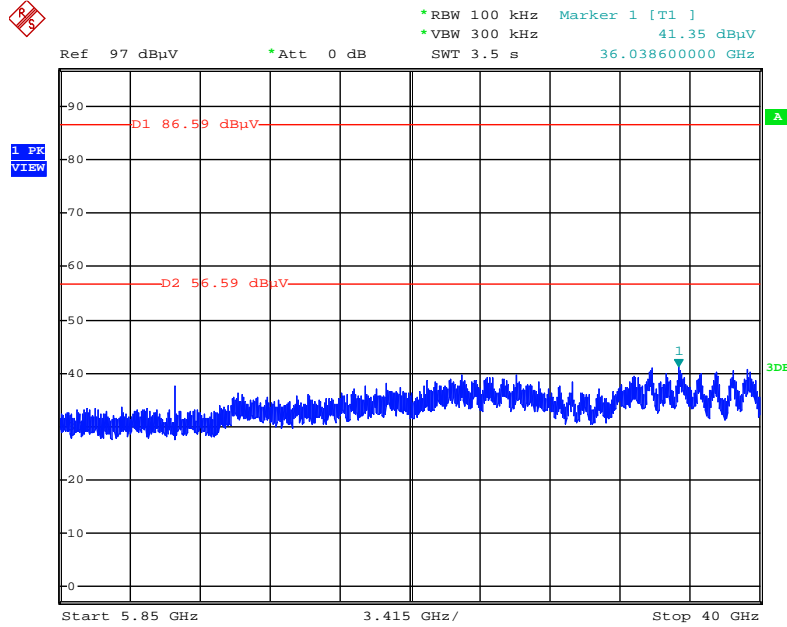


Date: 25.FEB.2014 23:46:11

**Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / CH 165 / 30MHz~5725MHz (down 30dBc) /
Test Mode: Mode 3 (EUT 2)**

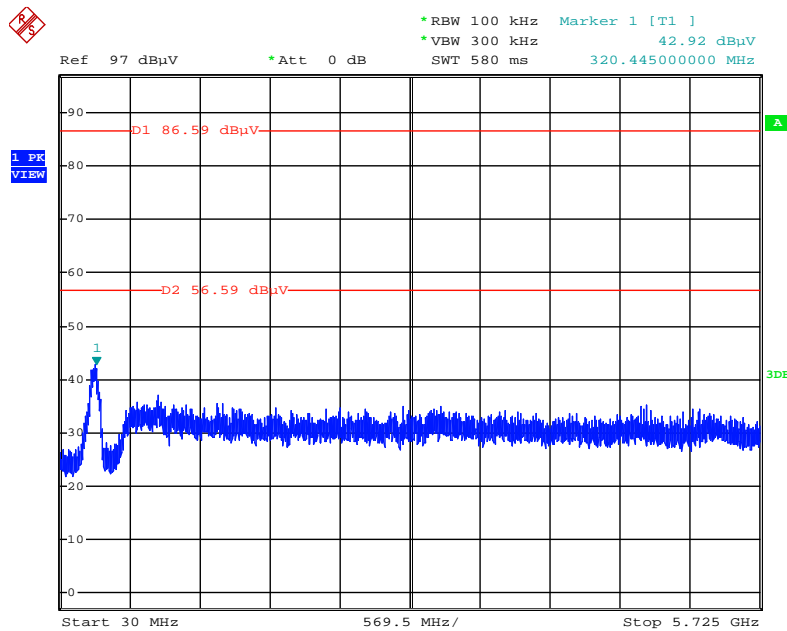


Date: 25.FEB.2014 23:47:41

Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / CH 165 / 5850MHz~40000MHz (down 30dBc) /
 Test Mode: Mode 3 (EUT 2)

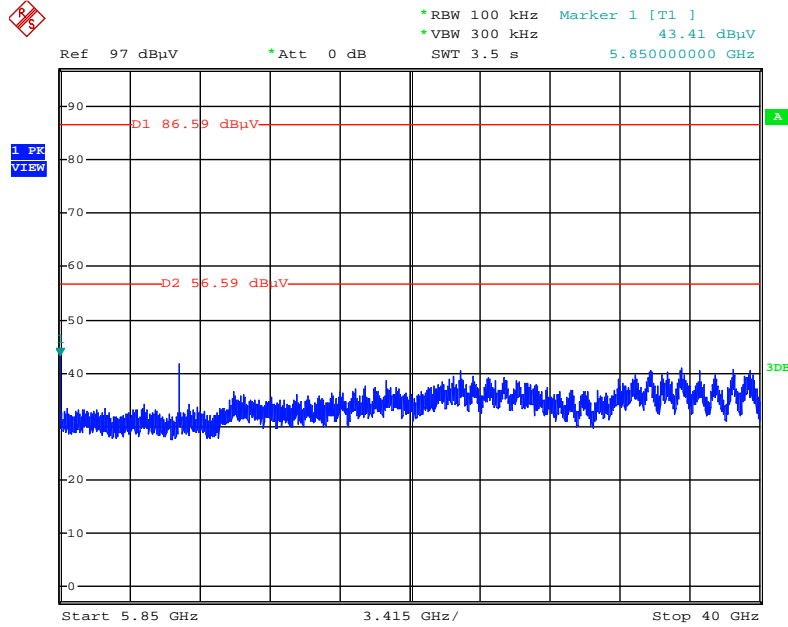


Date: 25.FEB.2014 23:47:04

Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Reference Level / Test Mode: Mode 3 (EUT 2)

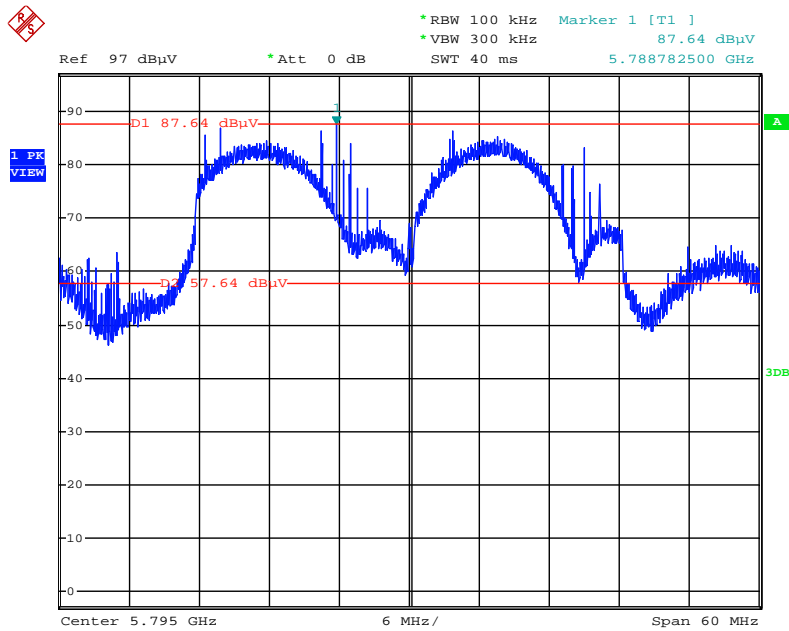


Date: 25.FEB.2014 23:37:49

Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / CH 151 / 30MHz~5725MHz (down 30dBc) / Test Mode: Mode 3 (EUT 2)

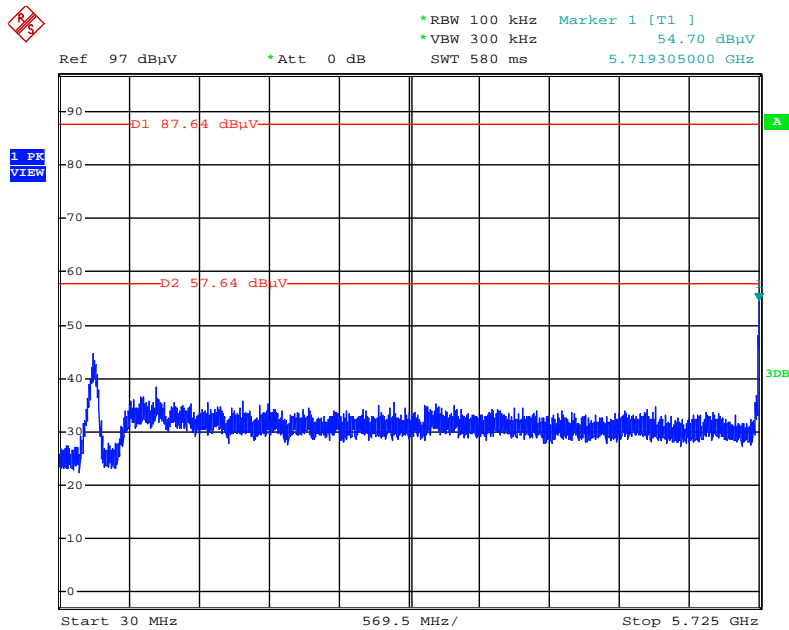


Date: 25.FEB.2014 23:40:46

**Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / CH 151 / 5850MHz~40000MHz (down 30dBc) /
Test Mode: Mode 3 (EUT 2)**

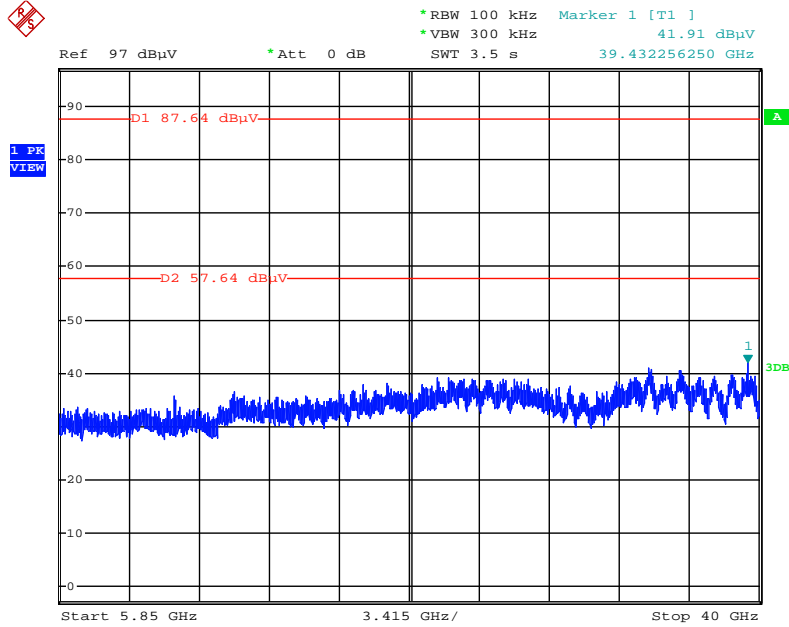


Date: 25.FEB.2014 23:41:33

**Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / CH 159 / 30MHz~5725MHz (down 30dBc) /
Test Mode: Mode 3 (EUT 2)**

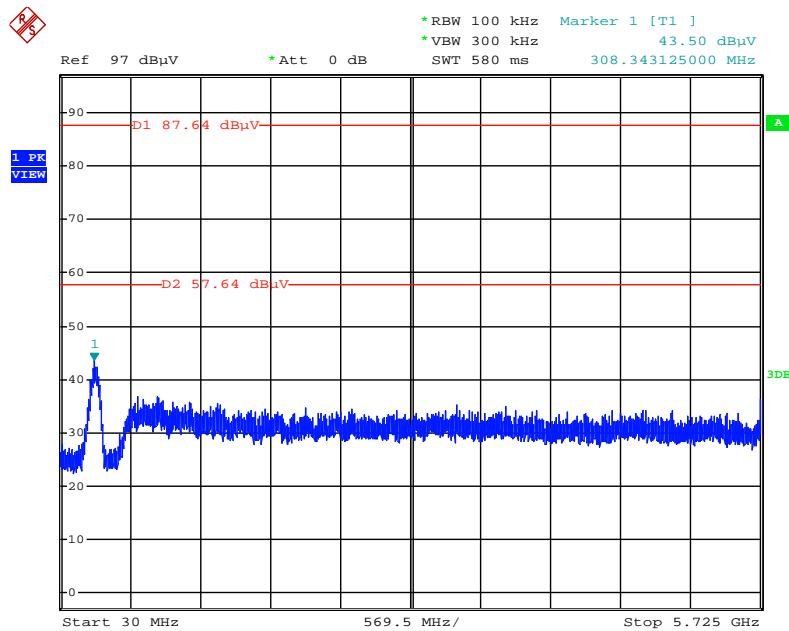


Date: 25.FEB.2014 23:38:40

Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / CH 159 / 5850MHz~40000MHz (down 30dBc) /
 Test Mode: Mode 3 (EUT 2)

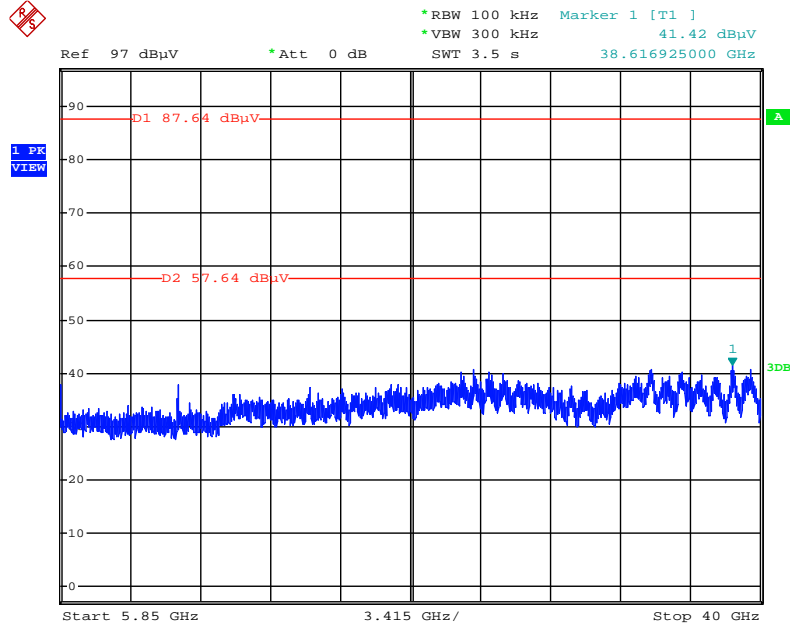


Date: 25.FEB.2014 23:39:34

Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Reference Level / Test Mode: Mode 3 (EUT 2)

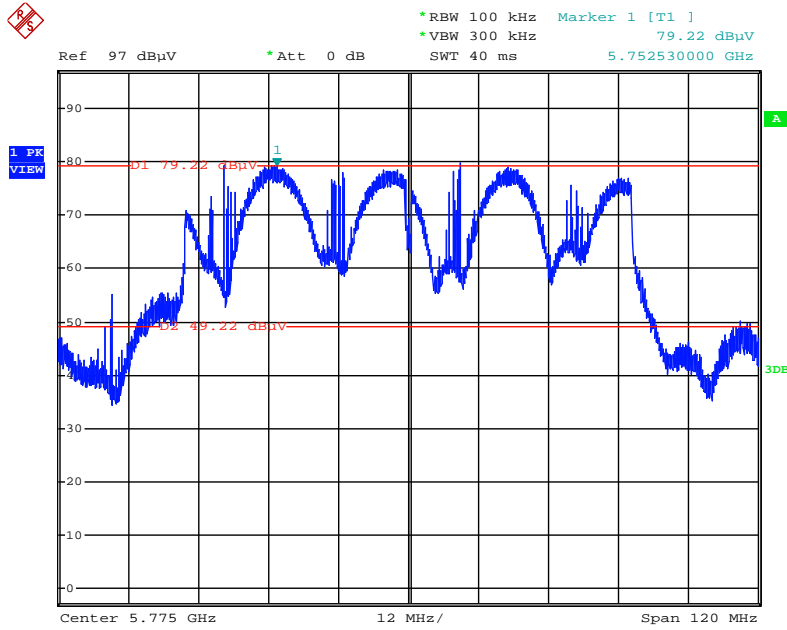


Date: 25.FEB.2014 23:31:27

Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / CH 155 / 30MHz~5725MHz (down 30dBc) / Test Mode: Mode 3 (EUT 2)

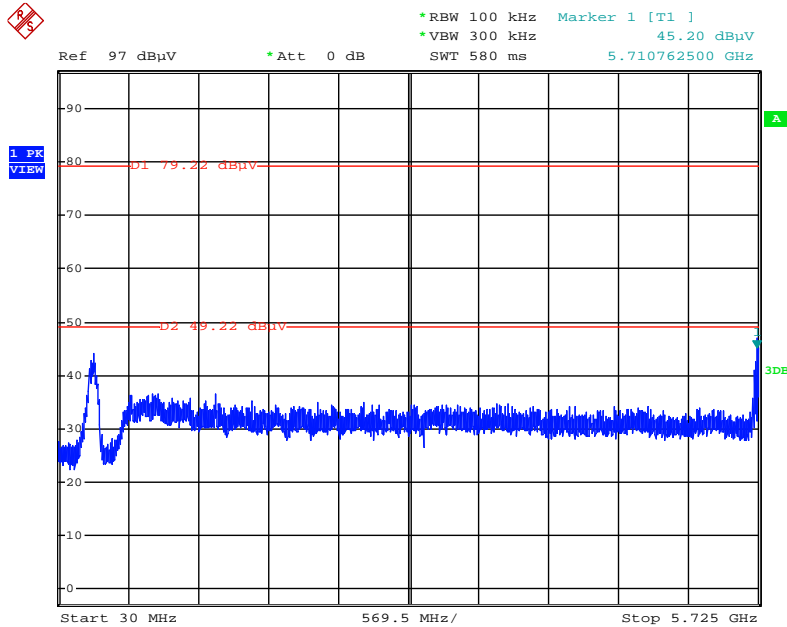


Date: 25.FEB.2014 23:32:36

Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / CH 155 / 5850MHz~40000MHz (down 30dBc) /
 Test Mode: Mode 3 (EUT 2)

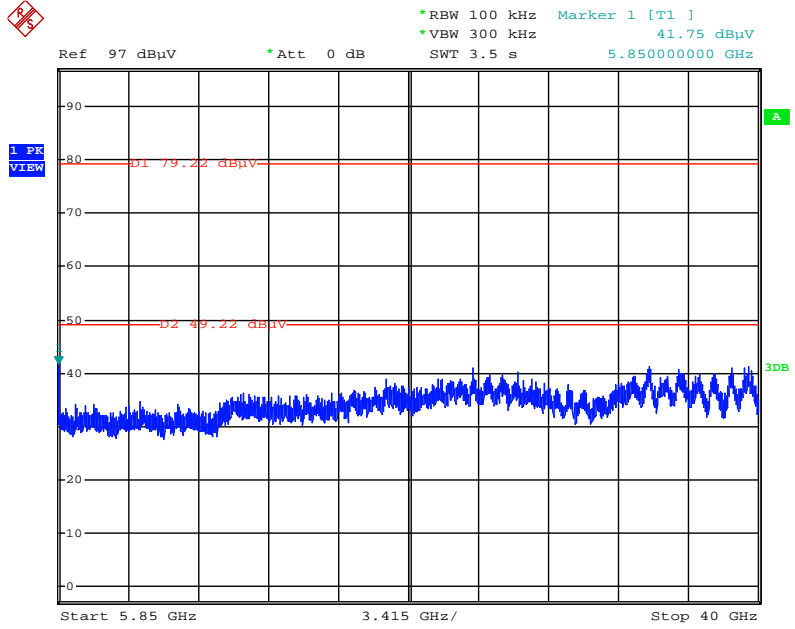


Date: 25.FEB.2014 23:33:55

Plot on Configuration IEEE 802.11b / Reference Level / Test Mode: Mode 3 (EUT 2)

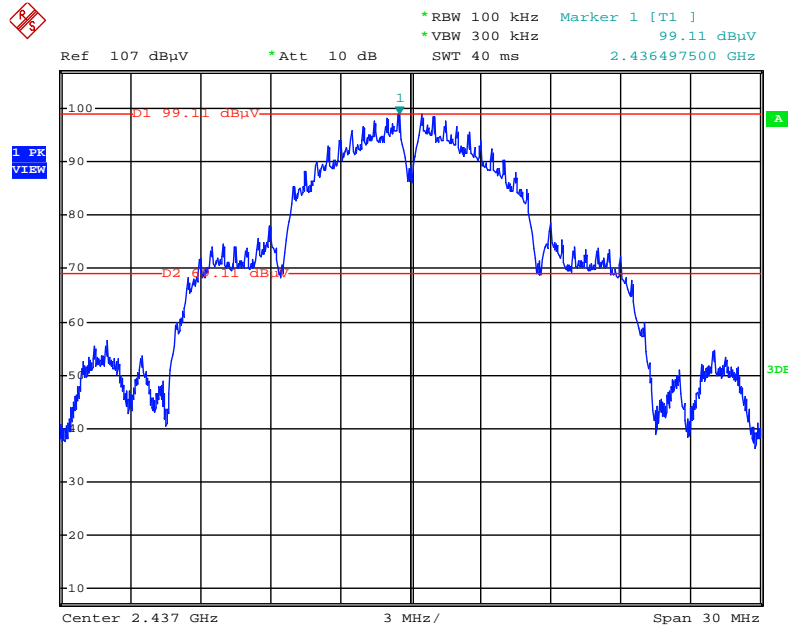


Date: 25.JAN.2014 03:46:23

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 3 (EUT 2)

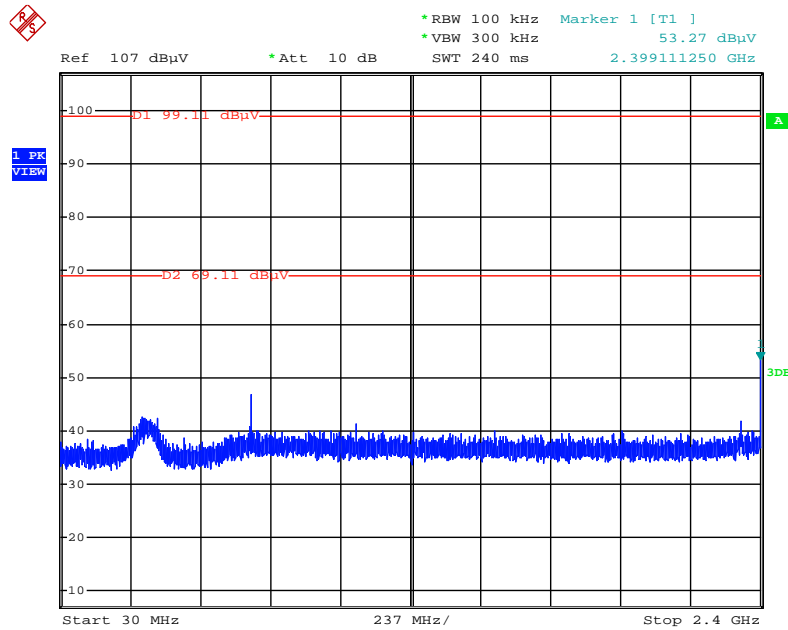


Date: 25.JAN.2014 03:47:13

**Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc) /
Test Mode: Mode 3 (EUT 2)**

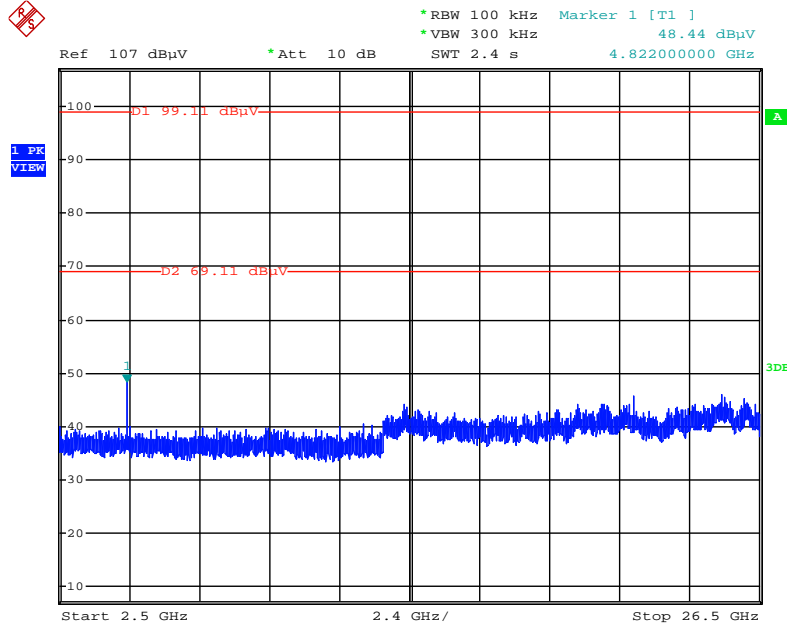


Date: 25.JAN.2014 03:47:44

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 3 (EUT 2)

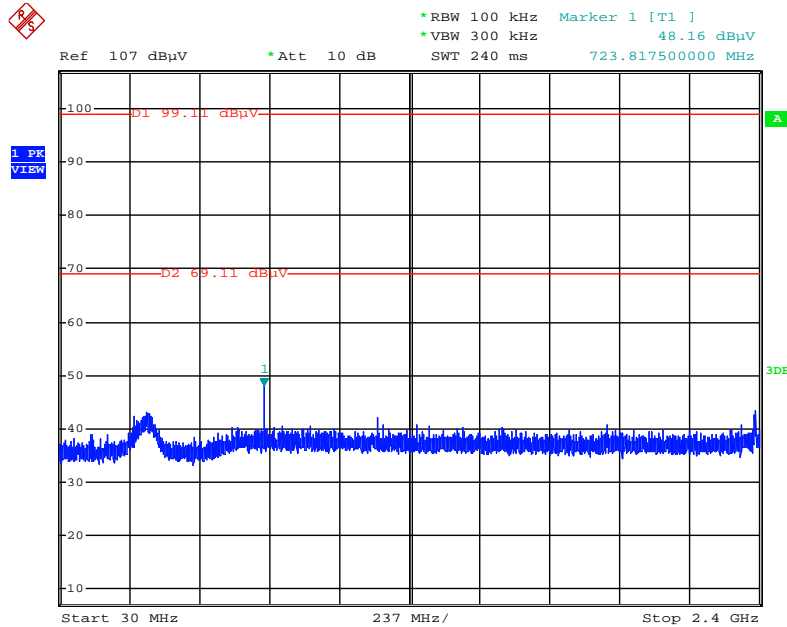


Date: 25.JAN.2014 03:49:24

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc) /
Test Mode: Mode 3 (EUT 2)

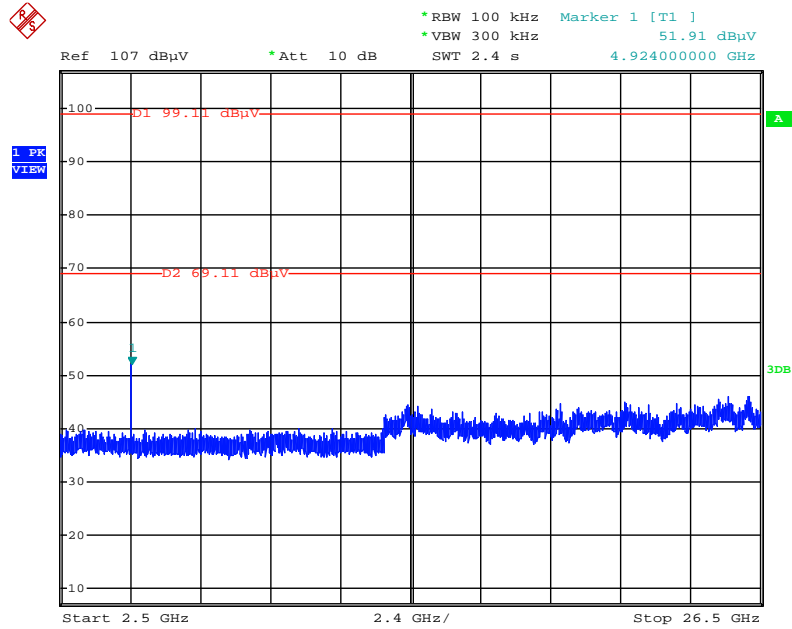


Date: 25.JAN.2014 03:48:37

Plot on Configuration IEEE 802.11g / Reference Level / Test Mode: Mode 3 (EUT 2)

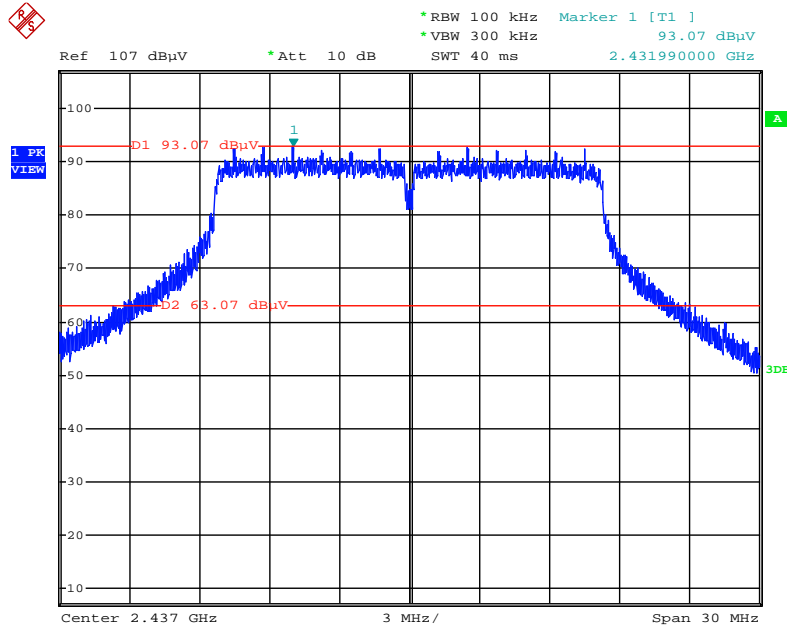


Date: 25.JAN.2014 03:54:15

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 3 (EUT 2)

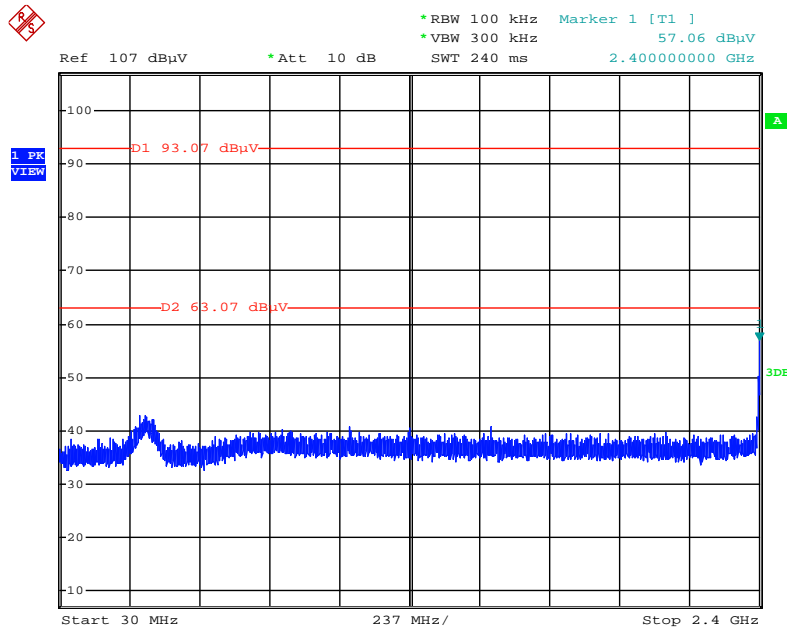


Date: 25.JAN.2014 03:56:22

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc) /
 Test Mode: Mode 3 (EUT 2)

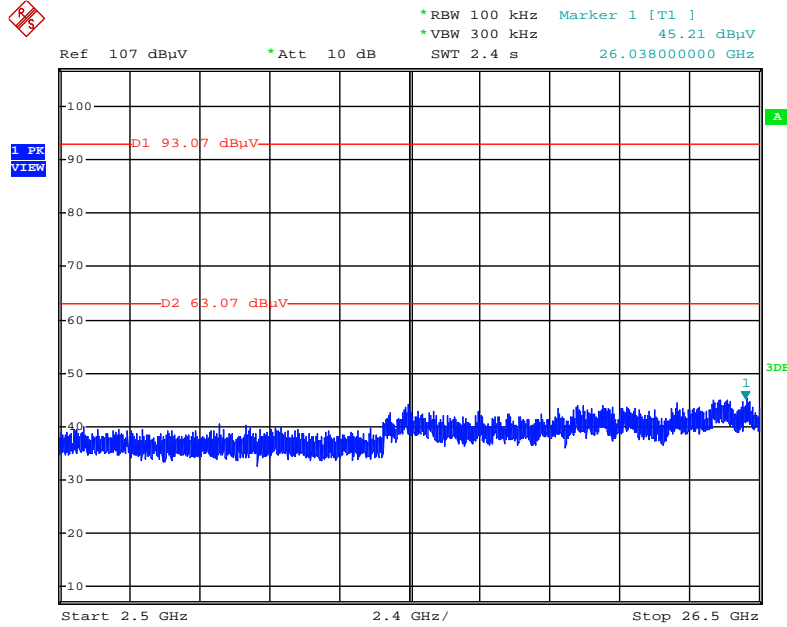


Date: 25.JAN.2014 03:56:58

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc) / Test Mode: Mode 3 (EUT 2)

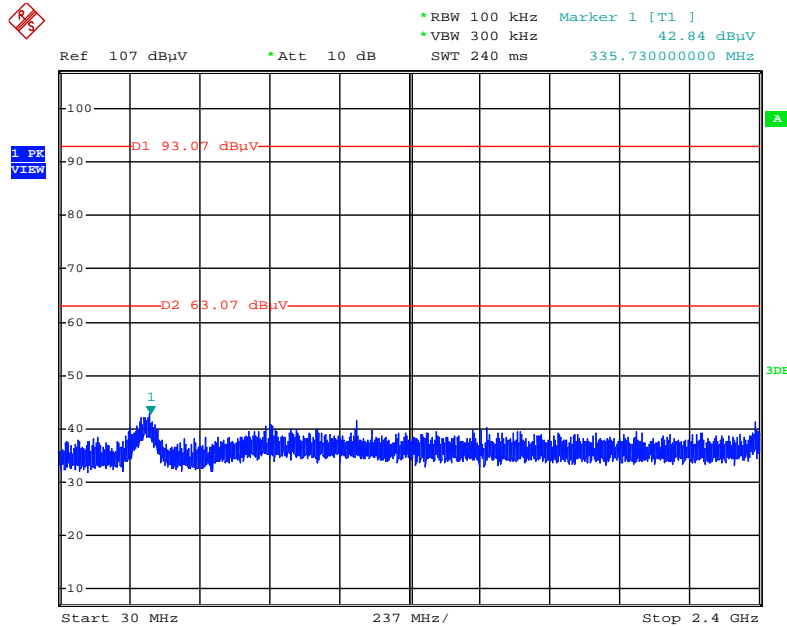


Date: 25.JAN.2014 03:58:06

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc) /
Test Mode: Mode 3 (EUT 2)

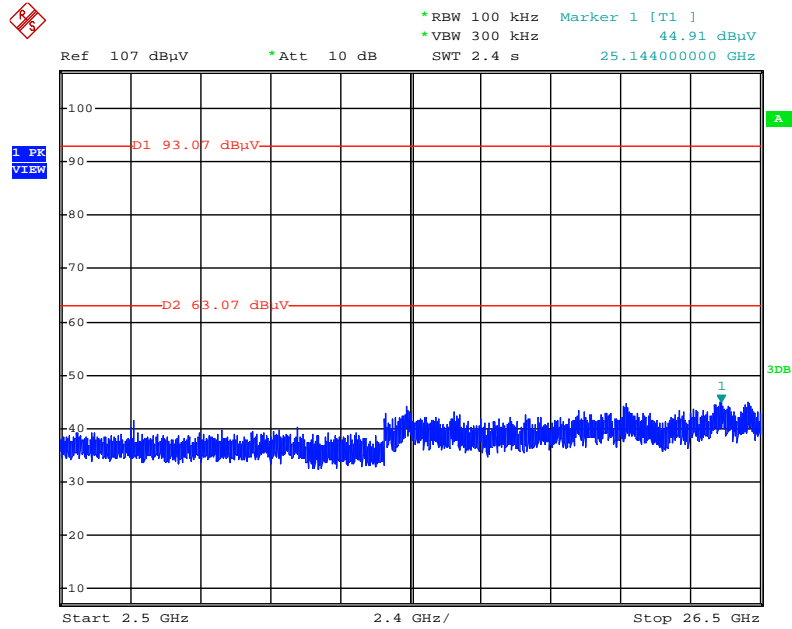


Date: 25.JAN.2014 03:57:38

Plot on Configuration IEEE 802.11a / Reference Level / Test Mode: Mode 3 (EUT 2)

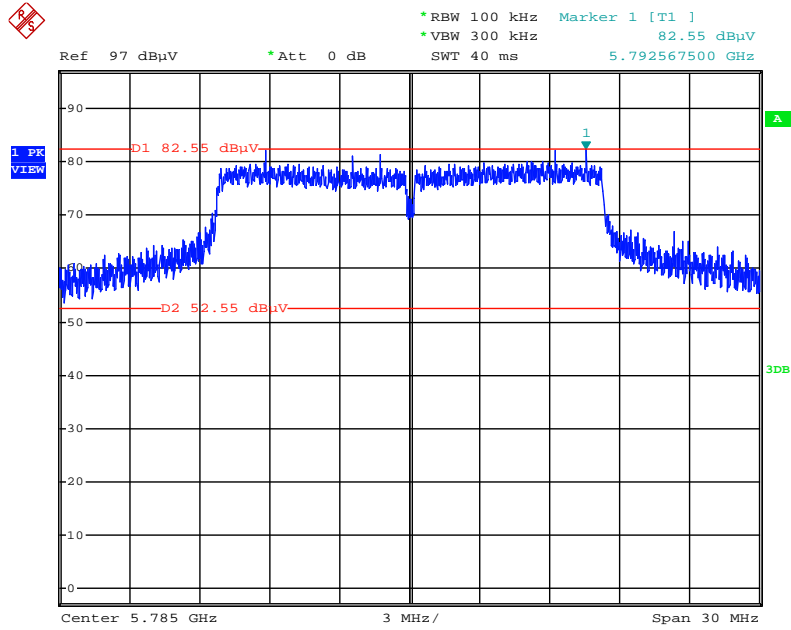


Date: 25.FEB.2014 23:49:34

Plot on Configuration IEEE 802.11a / CH 149 / 30MHz~5725MHz (down 30dBc) / Test Mode: Mode 3 (EUT 2)

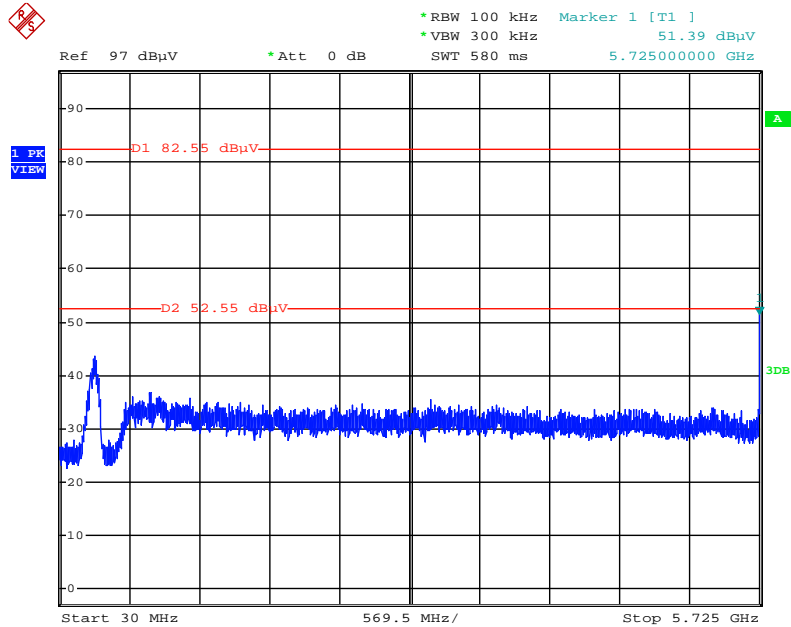


Date: 25.FEB.2014 23:50:17

**Plot on Configuration IEEE 802.11a / CH 149 / 5850MHz~40000MHz (down 30dBc) /
Test Mode: Mode 3 (EUT 2)**

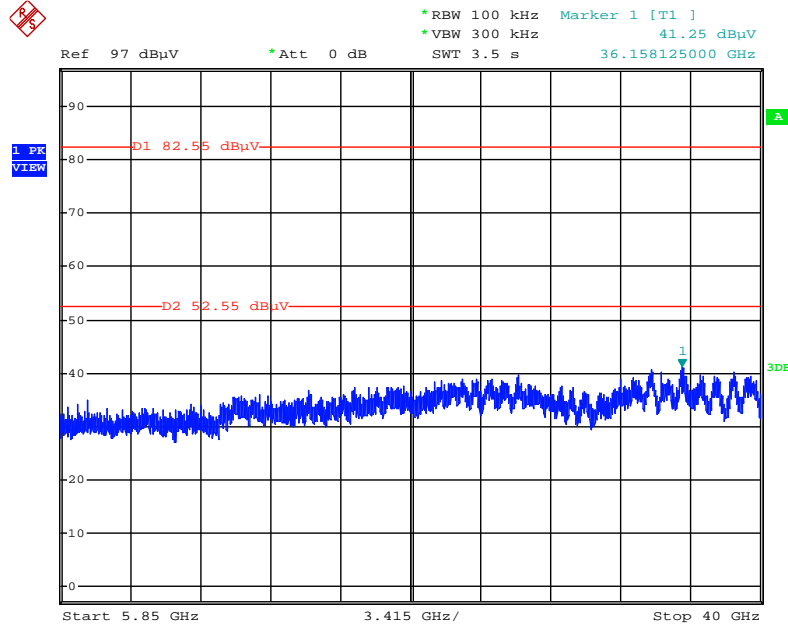


Date: 25.FEB.2014 23:51:00

**Plot on Configuration IEEE 802.11a / CH 165 / 30MHz~5725MHz (down 30dBc) /
Test Mode: Mode 3 (EUT 2)**

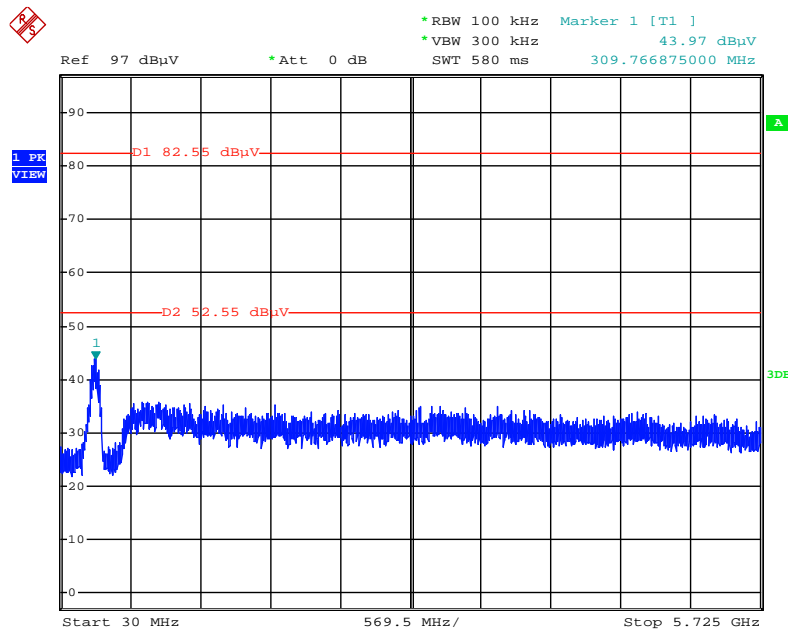

Date: 25.FEB.2014 23:52:45

Plot on Configuration IEEE 802.11a / CH 165 / 5850MHz~40000MHz (down 30dBc) /
Test Mode: Mode 3 (EUT 2)

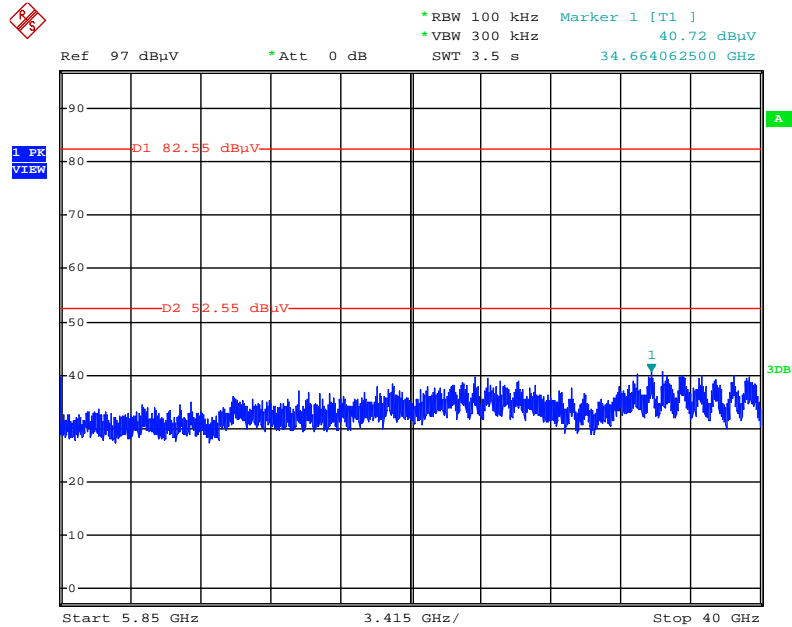

Date: 25.FEB.2014 23:52:08

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9 kHz ~ 2.75 GHz	Apr. 12, 2013	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150 kHz ~ 100 MHz	Nov. 23, 2013	Conduction (CO01-CB)
Artificial Mains Network	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150 kHz ~ 30 MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz - 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz - 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch Receiver VSWR 1= AMN/LISN VSWR 2=	-0.080	dB	U-shaped	0.060
Combined standard uncertainty $U_c(y)$				1.2
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				2.4

Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.173	dB	K=1	0.086
Cable loss	± 0.174	dB	K=2	0.087
Antenna gain	± 0.169	dB	K=2	0.084
Site imperfection	± 0.433	dB	Triangular	0.214
Pre-amplifier gain	± 0.366	dB	K=2	0.183
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.778
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.555

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.191	dB	K=1	0.095
Cable loss	±0.169	dB	K=2	0.084
Antenna gain	±0.191	dB	K=2	0.096
Site imperfection	±0.582	dB	Triangular	0.291
Pre-amplifier gain	±0.304	dB	K=2	0.152
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.839
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.678

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.186	dB	K=1	0.093
Cable loss	±0.167	dB	K=2	0.083
Antenna gain	±0.190	dB	K=2	0.095
Site imperfection	±0.488	dB	Triangular	0.244
Pre-amplifier gain	±0.269	dB	K=2	0.134
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.771
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.541

Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	±0.038	dB	K=2	0.019
Attenuator	±0.047	dB	K=2	0.024
Power Meter specification	±0.300	dB	Triangular	0.150
Power Sensor specification	±0.300	dB	Rectangular	0.150
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				0.863
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				1.726