



Appendix C. 20dB Bandwidth Report

1. Results of Conducted Emissions for 20dB Bandwidth

20dB bandwidth of the adjacent channels to 5600~5650MHz. Please refer to as below:


Temperature	20°C	Humidity	56%
Test Engineer	Benson Peng	Test Mode	Mode 1 (EUT 1)

Bandwidth	Frequency (MHz)	20dB Bandwidth Mark Frequency (MHz)	Limit (MHz)	Test Result
20MHz	5580	5589.6	FL < 5600	Complies
	5660	5650.4	FH > 5650	Complies
40MHz	5550	5569.8	FL < 5600	Complies
	5670	5650.2	FH > 5650	Complies
80MHz	5530	5570.8	FL < 5600	Complies


Temperature	22°C	Humidity	56%
Test Engineer	Nick Peng	Test Mode	Mode 2 (EUT 2)

Bandwidth	Frequency (MHz)	20dB Bandwidth Mark Frequency (MHz)	Limit (MHz)	Test Result
20MHz	5580	5590.0	FL < 5600	Complies
	5660	5650.1	FH > 5650	Complies
40MHz	5550	5569.6	FL < 5600	Complies
	5670	5650.2	FH > 5650	Complies
80MHz	5530	5570.2	FL < 5600	Complies


20dB Bandwidth Plot on Configuration IEEE 802.11ac VHT20 / 5580 MHz / Mode 1 (EUT 1)

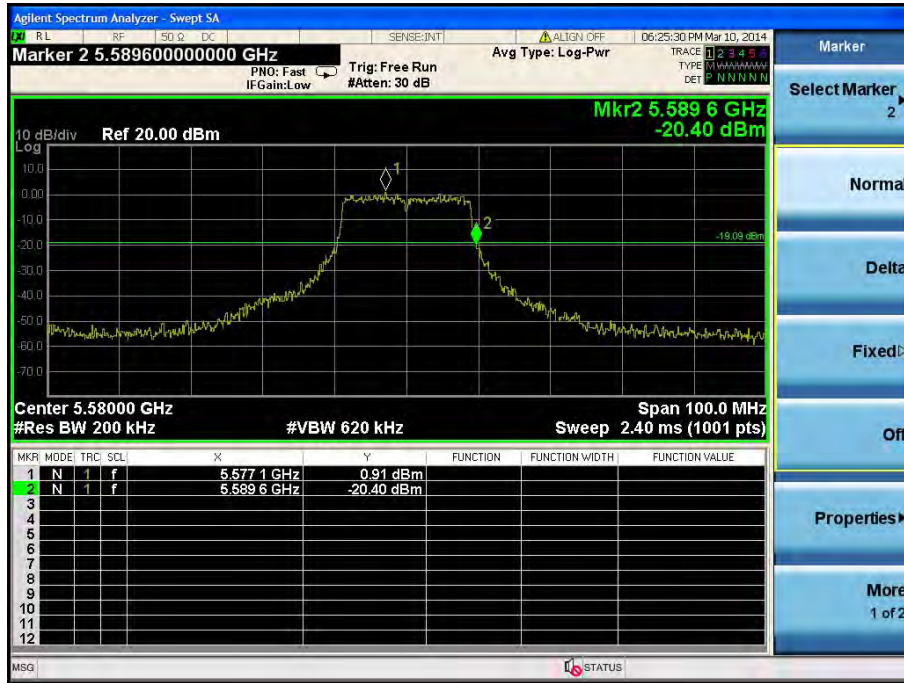


20dB Bandwidth Plot on Configuration IEEE 802.11ac VHT20 / 5660 MHz / Mode 1 (EUT 1)

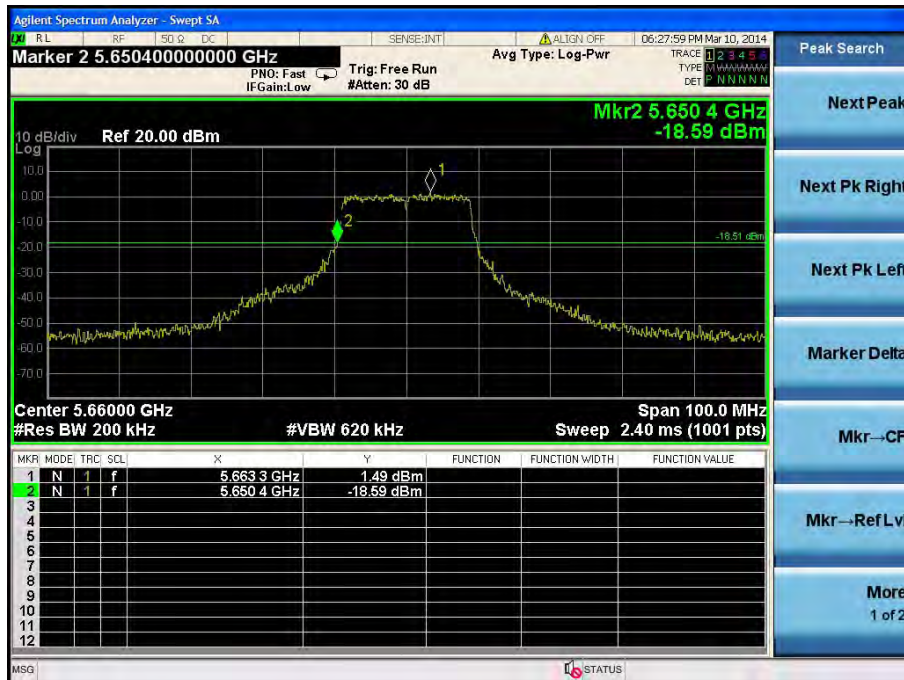


20dB Bandwidth Plot on Configuration IEEE 802.11ac VHT40 / 5550 MHz / Mode 1 (EUT 1)

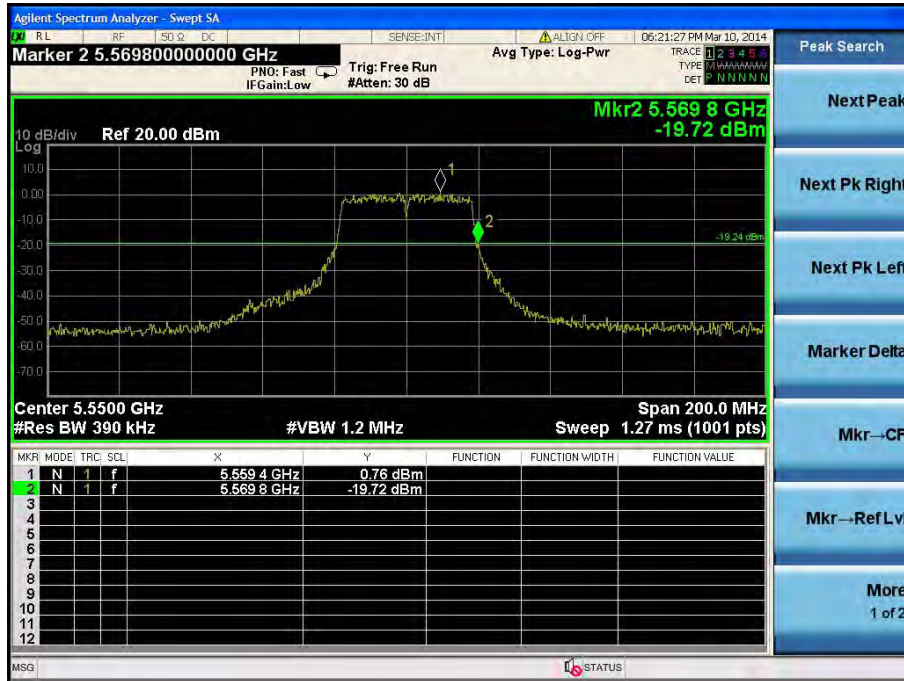

20dB Bandwidth Plot on Configuration IEEE 802.11ac VHT40 / 5670 MHz / Mode 1 (EUT 1)

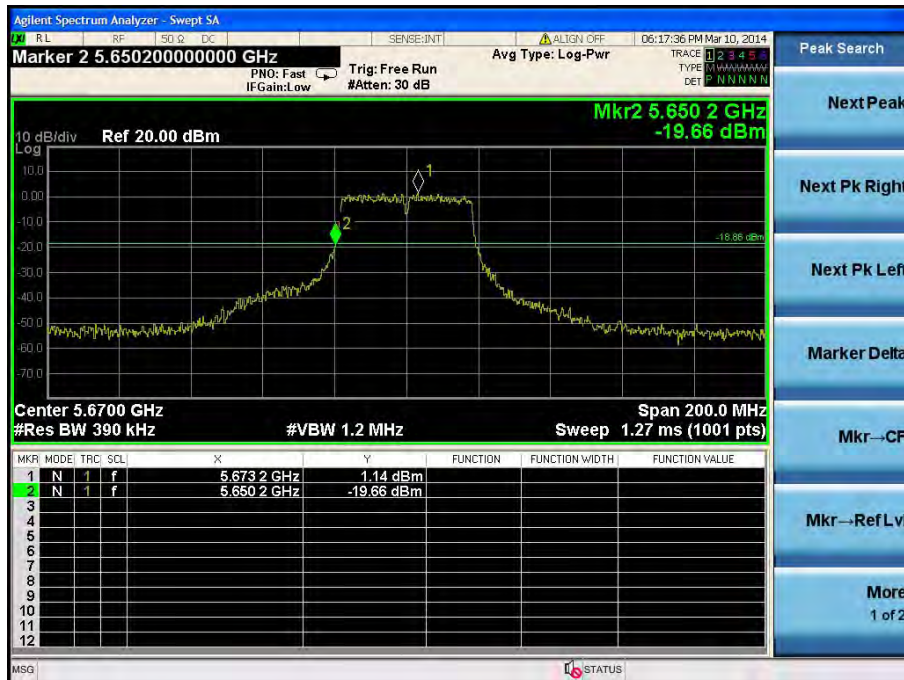


20dB Bandwidth Plot on Configuration IEEE 802.11ac VHT80 / 5530 MHz / Mode 1 (EUT 1)

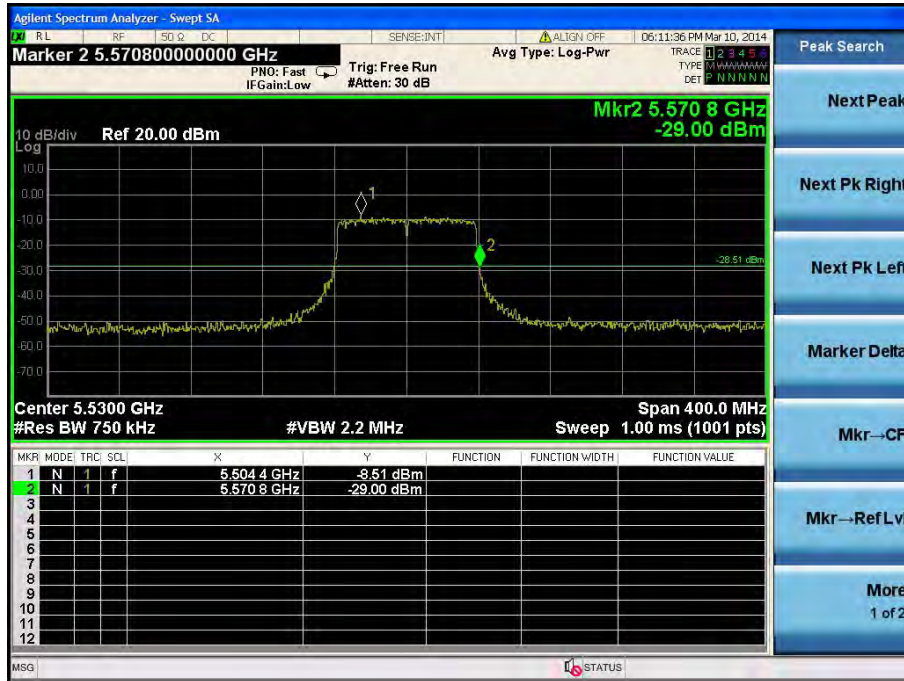


20dB Bandwidth Plot on Configuration IEEE 802.11ac VHT20 / 5580 MHz / Mode 2 (EUT 2)




20dB Bandwidth Plot on Configuration IEEE 802.11ac VHT20 / 5660 MHz / Mode 2 (EUT 2)

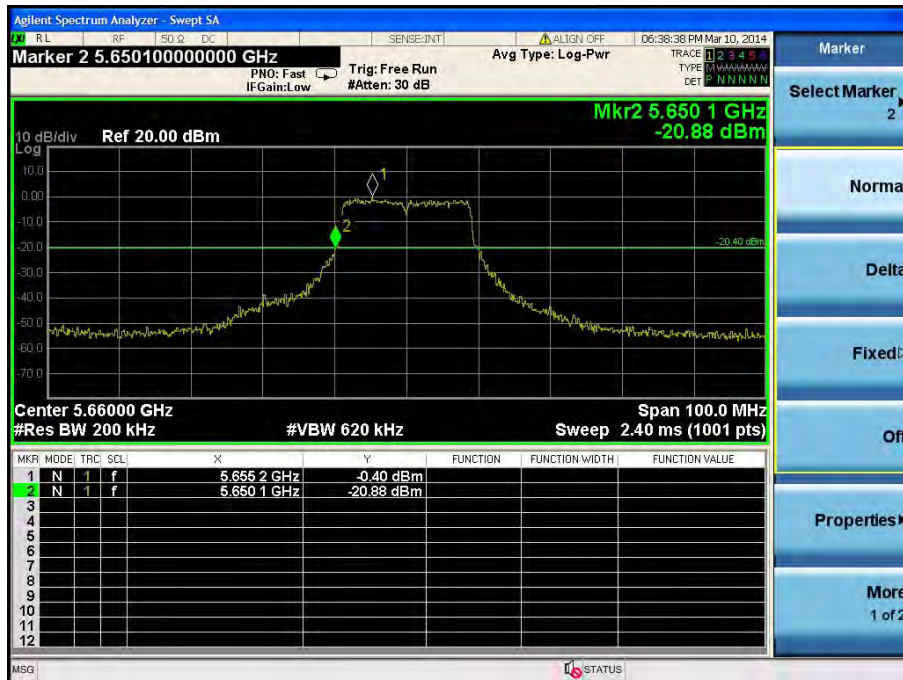

20dB Bandwidth Plot on Configuration IEEE 802.11ac VHT40 / 5550 MHz / Mode 2 (EUT 2)

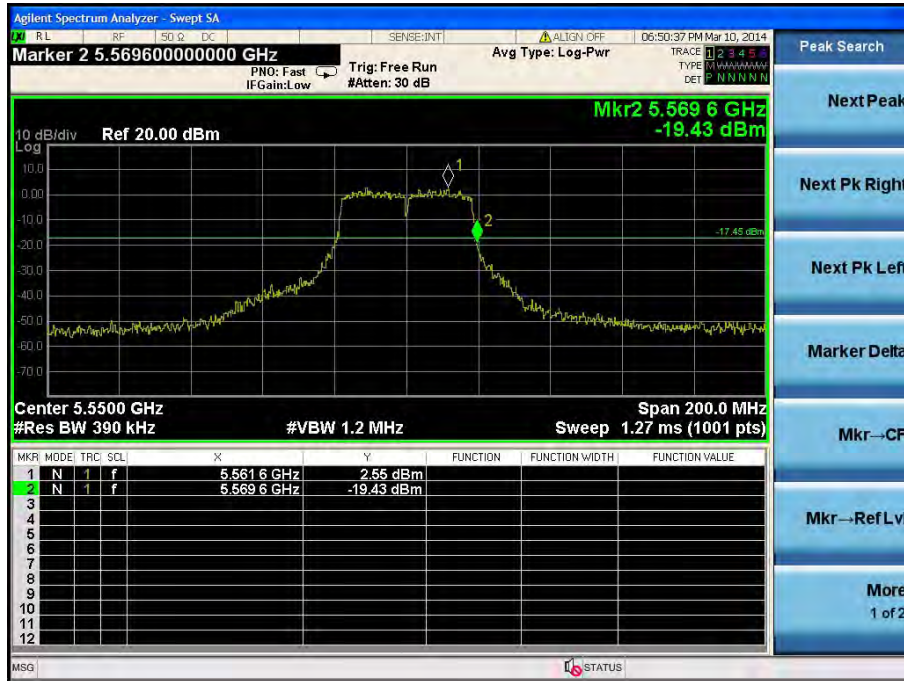

20dB Bandwidth Plot on Configuration IEEE 802.11ac VHT40 / 5670 MHz / Mode 2 (EUT 2)

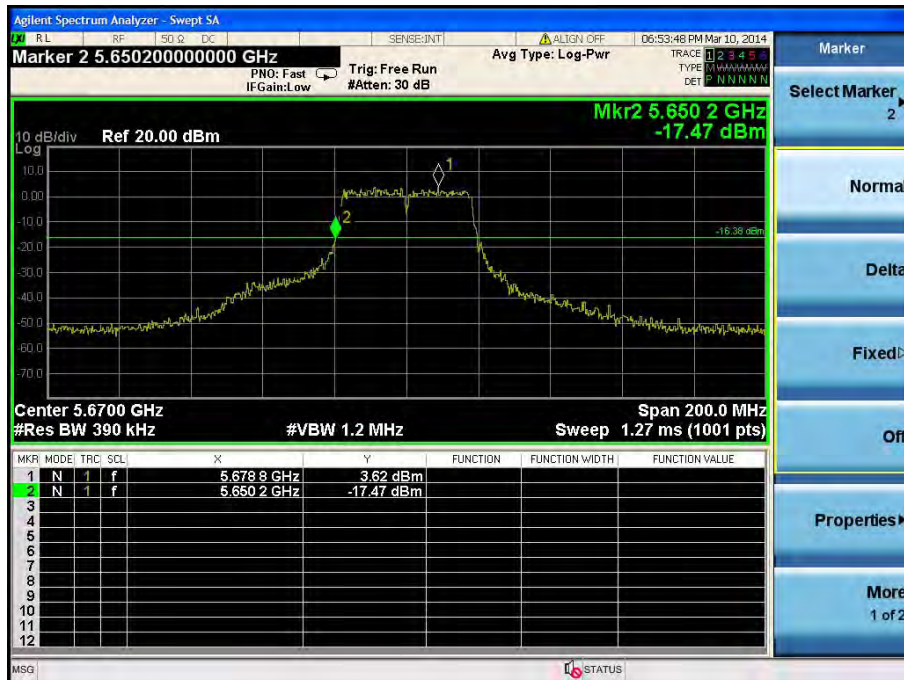

20dB Bandwidth Plot on Configuration IEEE 802.11ac VHT80 / 5530 MHz / Mode 2 (EUT 2)

