



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	AirTight Networks, Inc.
Applicant Address	339 N. Bernardo Avenue, Suite #200, Mountain View, California, USA
FCC ID	TOR-C75
Manufacturer's company	Lite-On Network Communication (Dongguan) Limited
Manufacturer Address	30#Keji Rd.,Yin Hu Industrial Area,Qingxi Town,DongGuan City,Guangdong,China

Product Name	AirTight Access Point
Brand Name	AirTight
Model No.	C-75, C-75-E
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5250 ~ 5350MHz / 5470 ~ 5725MHz
Received Date	Jan. 10, 2014
Final Test Date	Mar. 10, 2014
Submission Type	Class II Change
Operating Mode	Master

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac (5250 ~ 5350MHz / 5470 ~ 5725MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart E, KDB 789033 D01 v01r03, KDB 662911 D01 v02r01, KDB644545 D01v01r02.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	6
3.3. Table for Filed Antenna.....	7
3.4. Table for Carrier Frequencies	8
3.5. Table for Test Modes.....	9
3.6. Table for Testing Locations.....	12
3.7. Table for Multiple List.....	12
3.8. Table for Class II Change	12
3.9. Table for Supporting Units	13
3.10. Table for Parameters of Test Software Setting	14
3.11. EUT Operation during Test	15
3.12. Duty Cycle.....	16
3.13. Test Configurations	20
4. TEST RESULT	22
4.1. AC Power Line Conducted Emissions Measurement.....	22
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	26
4.3. Maximum Conducted Output Power Measurement.....	51
4.4. Power Spectral Density Measurement	56
4.5. Peak Excursion Measurement.....	70
4.6. Radiated Emissions Measurement	87
4.7. Band Edge Emissions Measurement	134
4.8. Frequency Stability Measurement	149
4.9. Antenna Requirements	152
5. LIST OF MEASURING EQUIPMENTS	153
6. MEASUREMENT UNCERTAINTY.....	155
APPENDIX A. TEST PHOTOS	A1 ~ A7
APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT.....	B1 ~ B5
APPENDIX C. 20DB BANDWIDTH REPORT	C1 ~ C9



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR411023-01	Rev. 01	Initial issue of report	May 06, 2014



1. CERTIFICATE OF COMPLIANCE

Product Name : AirTight Access Point
Brand Name : AirTight
Model No. : C-75, C-75-E
Applicant : AirTight Networks, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 10, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'. The signature is written in a cursive style and is positioned above a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	15.95 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.15 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.01 dB
4.5	15.407(a)	Peak Excursion	Complies	2.58 dB
4.6	15.407(b)	Radiated Emissions	Complies	1.37 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.04 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter or PoE
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5250 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	12 for 20MHz bandwidth ; 5 for 40MHz bandwidth 2 for 80MHz bandwidth
Channel Band Width (99%)	<u>For Mode 1 (EUT 1):</u> 802.11ac MCS0, Nss1 (VHT20): 18.72 MHz ; 802.11ac MCS0, Nss1 (VHT40): 37.12 MHz ; 802.11ac MCS0, Nss1 (VHT80): 77.44 MHz <u>For Mode 2 (EUT 2):</u> 802.11ac MCS0, Nss1 (VHT20): 18.88 MHz ; 802.11ac MCS0, Nss1 (VHT40): 36.80 MHz ; 802.11ac MCS0, Nss1 (VHT80): 75.52 MHz

<p>Maximum Conducted Output Power</p>	<p><u>For Mode 1 (EUT 1)</u></p> <p>Band 2:</p> <p>802.11ac MCS0, Nss1 (VHT20): 20.16 dBm ; 802.11ac MCS0, Nss1 (VHT40): 22.78 dBm ; 802.11ac MCS0, Nss1 (VHT80): 16.30 dBm</p> <p>Band 3:</p> <p>802.11ac MCS0, Nss1 (VHT20): 20.41 dBm ; 802.11ac MCS0, Nss1 (VHT40): 22.70 dBm ; 802.11ac MCS0, Nss1 (VHT80): 13.48 dBm</p> <p><u>For Mode 2 (EUT 2)</u></p> <p>Band 2:</p> <p>802.11ac MCS0, Nss1 (VHT20): 20.30 dBm ; 802.11ac MCS0, Nss1 (VHT40): 23.25 dBm ; 802.11ac MCS0, Nss1 (VHT80): 19.70 dBm</p> <p>Band 3:</p> <p>802.11ac MCS0, Nss1 (VHT20): 20.88 dBm ; 802.11ac MCS0, Nss1 (VHT40): 23.45 dBm ; 802.11ac MCS0, Nss1 (VHT80): 17.72 dBm</p>
<p>Carrier Frequencies</p>	<p>Please refer to section 3.4</p>
<p>Antenna</p>	<p>Please refer to section 3.3</p>

IEEE 802.11a

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter or PoE
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5250 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	12
Channel Band Width (99%)	For Mode 1 (EUT 1): 25.92 MHz For Mode 2 (EUT 2): 17.44 MHz
Maximum Conducted Output Power	For Mode 1 (EUT 1) Band 2: 23.35 dBm ; Band 3: 21.34 dBm For Mode 2 (EUT 2) Band 2: 21.68 dBm ; Band 3: 21.11 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
TPC Function	<input checked="" type="checkbox"/> With TPC	<input type="checkbox"/> Without TPC
Weather Band (5600~5650MHz)	<input type="checkbox"/> With 5600~5650MHz	<input checked="" type="checkbox"/> Without 5600~5650MHz
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming

Antenna and Bandwidth

Antenna	Single (TX)	Three (TX)		
		20 MHz	40 MHz	80 MHz
Band width Mode	20 MHz	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X	X
IEEE 802.11n	X	V	V	X
IEEE 802.11ac	X	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
802.11ac (VHT20)	3	MCS 0-9, Nss1-3
802.11ac (VHT40)	3	MCS 0-9, Nss1-3
802.11ac (VHT80)	3	MCS 0-9, Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac


3.2. Accessories

N/A

3.3. Table for Filed Antenna

For EUT 1 (Model No. C-75)

Ant.	Brand	Model No.	Type	Connector	Antenna Gain		Cable loss		True Gain (dBi)	
					2.4GHz	5GHz	2.4GHz	5GHz	2.4GHz	5GHz
1	LITEON	WP838 AP	PCB	I-PEX	3.5	6.5	0.2	-	3.3	6.5
2	LITEON	WP838 AP	PCB	I-PEX	6	5.8	-	-	6	5.8
3	LITEON	WP838 AP	PCB	I-PEX	5.4	6.6	-	-	5.4	6.6

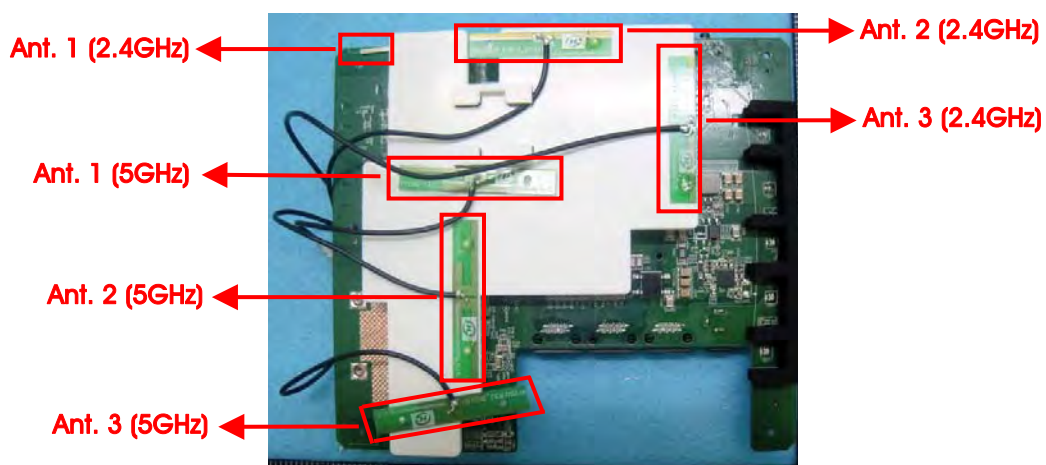

For EUT 2 (Model No. C-75-E)

Ant.	Brand	Model No.	Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	MAG.LAYERS	EDA-1713-25GR2-A7	Dipole	SMA Male RP	5	5
2	MAG.LAYERS	EDA-1713-25GR2-A7	Dipole	SMA Male RP	5	5
3	MAG.LAYERS	EDA-1713-25GR2-A7	Dipole	SMA Male RP	5	5



<For 2.4GHz Band>

For IEEE 802.11b/g mode (1TX/1RX):

Only Ant. 1 could transmit/receive simultaneously.

For IEEE 802.11n mode (3TX/3RX):

Ant. 1, Ant. 2 and Ant. 3 could transmit/receive simultaneously.

<For 5GHz Band>

For IEEE 802.11a mode (1TX/1RX):

Only Ant. 1 could transmit/receive simultaneously.

For IEEE 802.11n/ac mode (3TX/3RX):

Ant. 1, Ant. 2 and Ant. 3 could transmit/receive simultaneously.

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 52, 56, 60, 64, 100, 104, 108, 112, 116, 132, 136, 140.

For 40MHz bandwidth systems, use Channel 54, 62, 102, 110, 134.

For 80MHz bandwidth systems, use Channel 58, 106.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
	58	5290 MHz	-	-
5470~5725 MHz Band 3	100	5500 MHz	112	5560 MHz
	102	5510 MHz	116	5580 MHz
	104	5520 MHz	132	5660 MHz
	106	5530 MHz	134	5670 MHz
	108	5540 MHz	136	5680 MHz
	110	5550 MHz	140	5700 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11ac VHT20	Band 2~3	MCS0, Nss1	52/60/64/100/ 116/140	1+2+3
	11ac VHT40	Band 2~3	MCS0, Nss1	54/62/102/110/ 134	1+2+3
	11ac VHT80	Band 2~3	MCS0, Nss1	58/106	1+2+3
	11a/BPSK	Band 2~3	6Mbps	52/60/64/100/ 116/140	1
Power Spectral Density	11ac VHT20	Band 2~3	MCS0, Nss1	52/60/64/100/ 116/140	1+2+3
	11ac VHT40	Band 2~3	MCS0, Nss1	54/62/102/110/ 134	1+2+3
	11ac VHT80	Band 2~3	MCS0, Nss1	58/106	1+2+3
	11a/BPSK	Band 2~3	6Mbps	52/60/64/100/ 116/140	1
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11ac VHT20	Band 2~3	MCS0, Nss1	52/60/64/100/ 116/140	1+2+3
	11ac VHT40	Band 2~3	MCS0, Nss1	54/62/102/110/ 134	1+2+3
	11ac VHT80	Band 2~3	MCS0, Nss1	58/106	1+2+3
	11a/BPSK	Band 2~3	6Mbps	52/60/64/100/ 116/140	1

Peak Excursion	11ac VHT20	Band 2~3	MCS0, Nss1	<u>Mode 1 (EUT 1):</u> 52/140 <u>Mode 2 (EUT 2):</u> 64/140	1+2+3
	11ac VHT40	Band 2~3	MCS0, Nss1	<u>Mode 1 (EUT 1):</u> 54/62/134 <u>Mode 2 (EUT 2):</u> 54/134	1+2+3
	11ac VHT80	Band 2~3	MCS0, Nss1	<u>Mode 1 (EUT 1):</u> 58/106 <u>Mode 2 (EUT 2):</u> 58/106	1+2+3
	11a/BPSK	Band 2~3	6Mbps	<u>Mode 1 (EUT 1):</u> 52/116 <u>Mode 2 (EUT 2):</u> 60/116	1
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11ac VHT20	Band 2~3	MCS0, Nss1	52/60/64/100/ 116/140	1+2+3
	11ac VHT40	Band 2~3	MCS0, Nss1	54/62/102/110/ 134	1+2+3
	11ac VHT80	Band 2~3	MCS0, Nss1	58/106	1+2+3
	11a/BPSK	Band 2~3	6Mbps	52/60/64/100/ 116/140	1
Band Edge Emission	11ac VHT20	Band 2~3	MCS0, Nss1	52/60/64/100/ 140	1+2+3
	11ac VHT40	Band 2~3	MCS0, Nss1	54/62/102/110/ 134	1+2+3
	11ac VHT80	Band 2~3	MCS0, Nss1	58/106	1+2+3
	11a/BPSK	Band 2~3	6Mbps	52/60/64/100/ 140	1
Frequency Stability	Un-modulation		-	60/100	1

Note: 1. All the specification of test configurations and test mode was base on customer's request.

2. The AC adapter, PoE are for measurement only, would not be marketed.

3. VHT20/VHT40 covers HT20/HT40, due to same modulation.

The following test modes were performed for all tests:

For AC Power Line Conducted Emissions test:

EUT 1 generated the worst test result for Radiated Emissions Below 1GHz test, thus measurement for Mode 1 will follow this same test mode.

Mode 1. EUT 1 + Adapter

For Radiated Emissions Below 1GHz test:

Mode 1. Laying of EUT 1 + Adapter

Mode 2. Stand of EUT 1 + Adapter

Mode 1 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3 will follow this same test mode.

Mode 3. Laying of EUT 1 + PoE

Mode 1 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4 will follow this same test mode.

Mode 4. Laying of EUT 2 + Adapter

Mode 1 and Mode 4 generated the worst test result, so it was recorded in this report.

For Radiated Emissions Above 1GHz and Band Edge Emissions tests:

Mode 1. Laying of EUT 1

Mode 2. Stand of EUT 1

Mode 2 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3 will follow this same test mode.

Mode 3. Stand of EUT 2

Mode 2 and Mode 3 generated the worst test result, so it was recorded in this report.

For Radiated Emission Co-location test:

The mode "Stand of EUT 1" and "Stand of EUT 2" has been evaluated to be the worst case for Radiated emission above 1GHz test.

Consequently, measurement for Radiated Emission Co-location test will follow this same test modes.

Mode 1. Stand of EUT 1

Mode 2. Stand of EUT 2

All the test result were recorded in the report.

For Others test:

Mode 1. EUT 1

Mode 2. EUT 2

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Sporton test report: FA411023-01.) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Multiple List

The EUT has two model names which are identical to each other in all aspects except for the following table:

Brand Name	Model Name	Antenna	Description
AirTight	C-75	Internal Ant.	EUT 1
	C-75-E	External Ant.	EUT 2

3.8. Table for Class II Change

This product is an extension of original one reported under Sporton project number: FR411023

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
Add Band 2 and Band 3 (5250~5350 MHz, 5470~5725 MHz) for this device.	<ol style="list-style-type: none"> 1. AC Power Line Conducted Emissions 2. 26dB Spectrum Bandwidth and 99% Occupied Bandwidth 3. Maximum Conducted Output Power 4. Power Spectral Density 5. Peak Excursion 6. Radiated Emissions 7. Band Edge Emissions 8. Frequency Stability 9. Co-location MPE 10. Radiated Emission Co-location 11. 20dB bandwidth of the adjacent channels to 5600~5650MHz

3.9. Table for Supporting Units

For AC Power Line Conducted Emissions test:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC
Notebook	DELL	E6430	DoC
Notebook	DELL	E6430	DoC
Notebook	DELL	E6430	DoC
Flash Disk	HP	v225w	DoC
Adapter	APD	WA-24E12	N/A

For Radiated Emissions Below 1GHz test:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	DoC
Notebook	DELL	M1330	DoC
Notebook	DELL	E6430	DoC
Notebook	DELL	D420	DoC
Flash Disk	Silicon	D33B02	DoC
Adapter	APD	WA-24E12	N/A
PoE	PowerDsine	PD-6561G300	N/A

For Others test:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	DoC
Adapter	APD	WA-24E12	N/A

3.10. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Mode: Mode 1 (EUT 1)

Power Parameters of IEEE 802.11ac MCS0, Nss1 VHT20

Test Software Version	ART2-GUI Version 2.3					
Frequency	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
MCS0, Nss1 VHT20	14	13.5	13.5	14	14.5	15.5

Power Parameters of IEEE 802.11ac MCS0, Nss1 VHT40

Test Software Version	ART2-GUI Version 2.3				
Frequency	5270 MHz	5310 MHz	5510 MHz	5550 MHz	5670 MHz
MCS0, Nss1 VHT40	17.5	13.5	13.5	17.5	18.5

Power Parameters of IEEE 802.11ac MCS0, Nss1 VHT80

Test Software Version	ART2-GUI Version 2.3	
Frequency	5290 MHz	5530 MHz
MCS0, Nss1 VHT80	11	9

Power Parameters of IEEE 802.11a

Test Software Version	ART2-GUI Version 2.3					
Frequency	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
IEEE 802.11a	24	23.5	19	19	24	18.5

Test Mode: Mode 2 (EUT 2)

Power Parameters of IEEE 802.11ac MCS0, Nss1 VHT20

Test Software Version	ART2-GUI Version 2.3					
Frequency	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
MCS0, Nss1 VHT20	15	15	15	15.5	15.5	16

Power Parameters of IEEE 802.11ac MCS0, Nss1 VHT40

Test Software Version	ART2-GUI Version 2.3				
Frequency	5270 MHz	5310 MHz	5510 MHz	5550 MHz	5670 MHz
MCS0, Nss1 VHT40	19	17	16	19	19.5

Power Parameters of IEEE 802.11ac MCS0, Nss1 VHT80

Test Software Version	ART2-GUI Version 2.3	
Frequency	5290 MHz	5530 MHz
MCS0, Nss1 VHT80	15.5	13.5

Power Parameters of IEEE 802.11a


Test Software Version	ART2-GUI Version 2.3					
Frequency	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
IEEE 802.11a	21	21	19.5	20	21	18.5

3.11. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


3.12. Duty Cycle

IEEE 802.11ac MCS0, Nss1 VHT20 / Test Mode: Mode 1 (EUT 1)

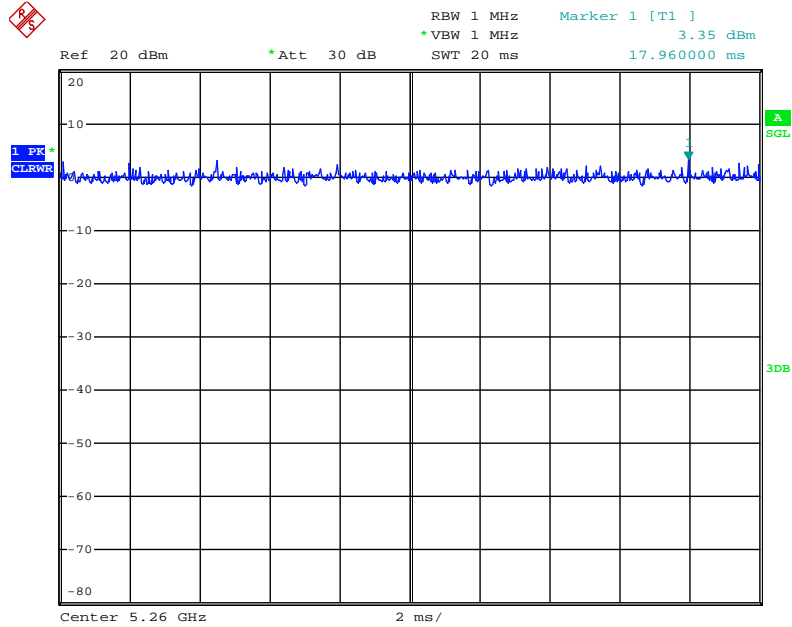


Date: 4.MAR.2014 04:52:34

IEEE 802.11ac MCS0, Nss1 VHT40 / Test Mode: Mode 1 (EUT 1)

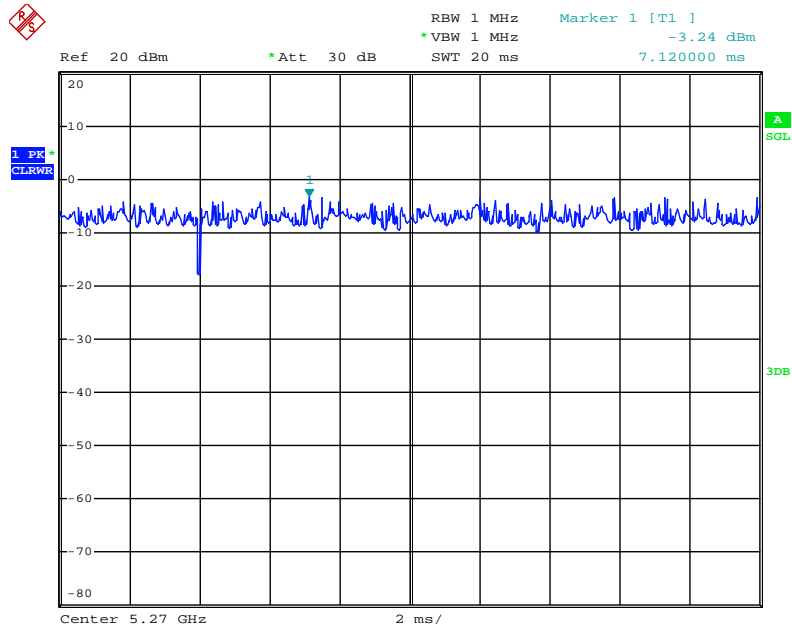


Date: 4.MAR.2014 04:53:08

IEEE 802.11ac MCS0, Nss1 VHT80 / Test Mode: Mode 1 (EUT 1)

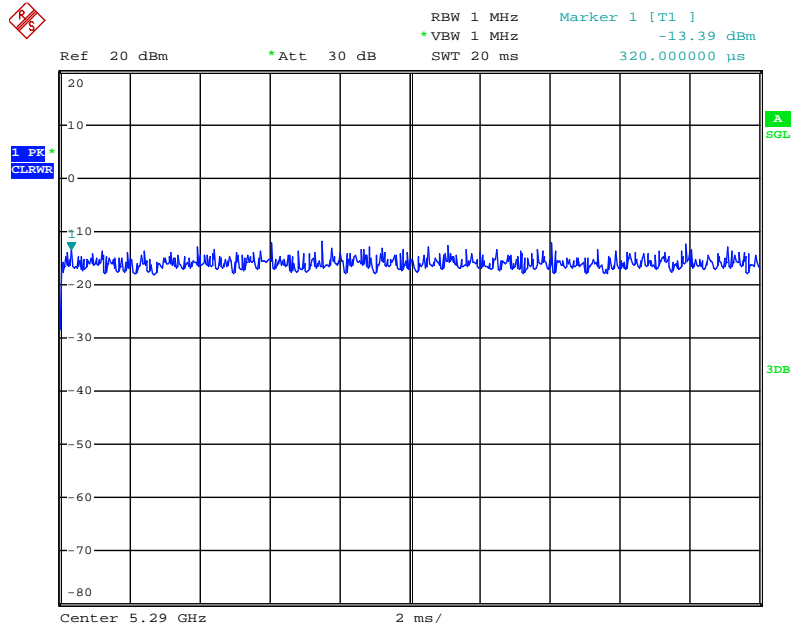


Date: 4.MAR.2014 04:51:27

IEEE 802.11a / Test Mode: Mode 1 (EUT 1)

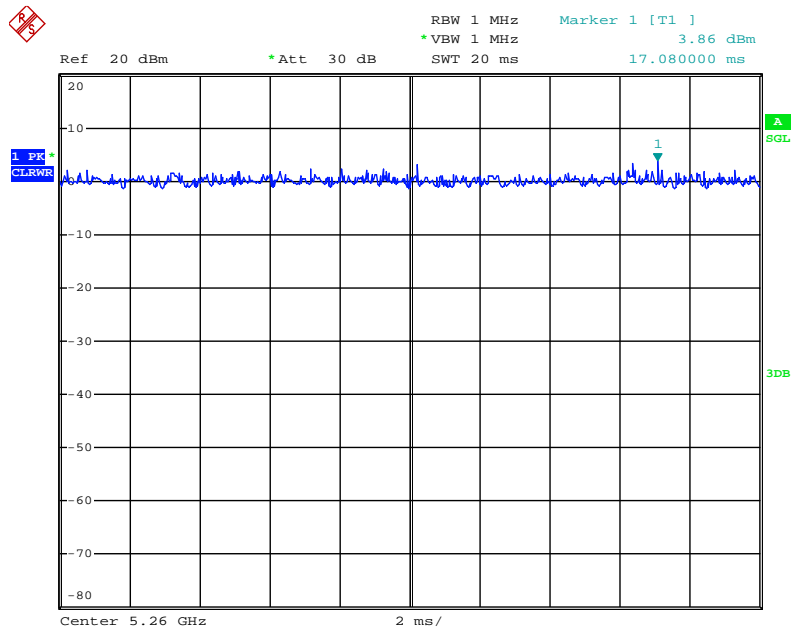


Date: 4.MAR.2014 04:52:09

IEEE 802.11ac MCS0, Nss1 VHT20 / Test Mode: Mode 2 (EUT 2)

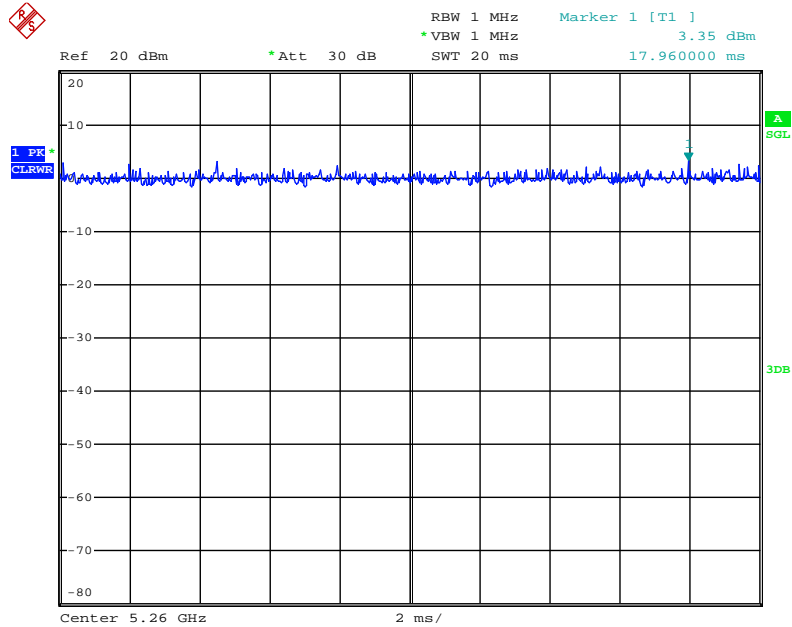


Date: 4.MAR.2014 04:52:34

IEEE 802.11ac MCS0, Nss1 VHT40 / Test Mode: Mode 2 (EUT 2)

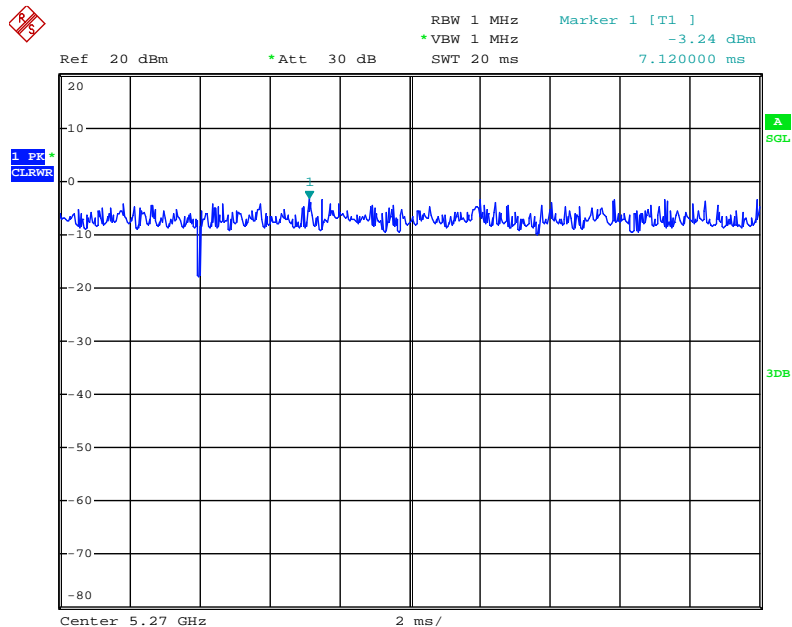


Date: 4.MAR.2014 04:53:08

IEEE 802.11ac MCS0, Nss1 VHT80 / Test Mode: Mode 2 (EUT 2)

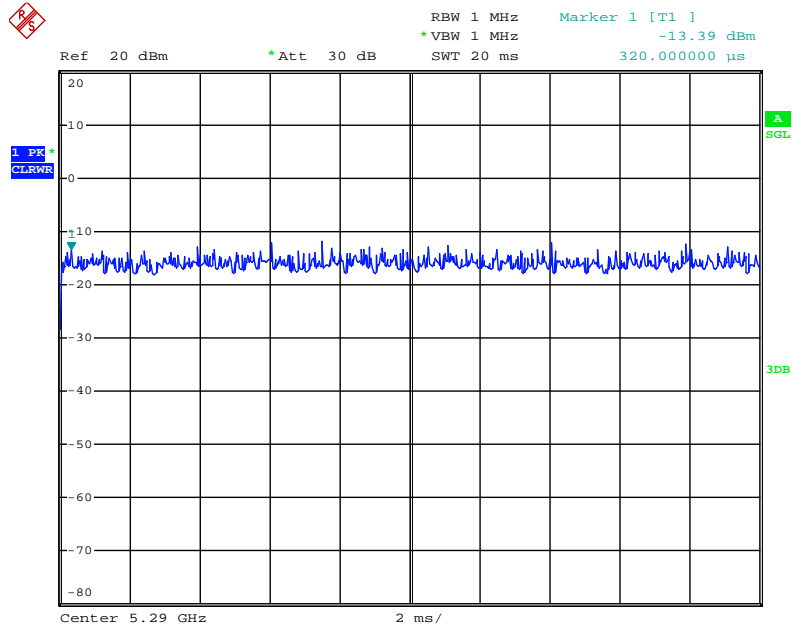

Date: 4.MAR.2014 04:51:27

IEEE 802.11a / Test Mode: Mode 2 (EUT 2)

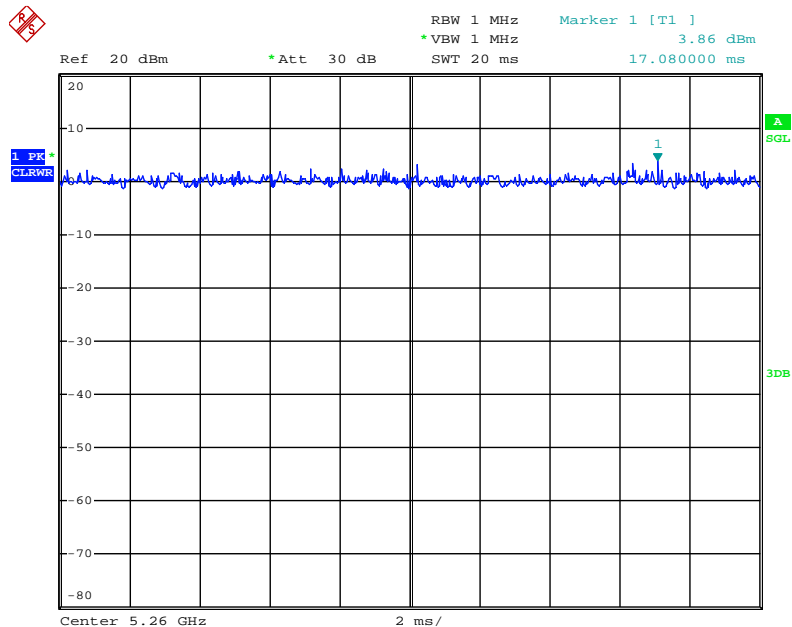


Date: 4.MAR.2014 04:52:09

3.13. Test Configurations


3.13.1. AC Power Line Conduction Emissions and Radiation Emissions Below 1GHz Test Configuration

Test Mode: EUT + Adapter

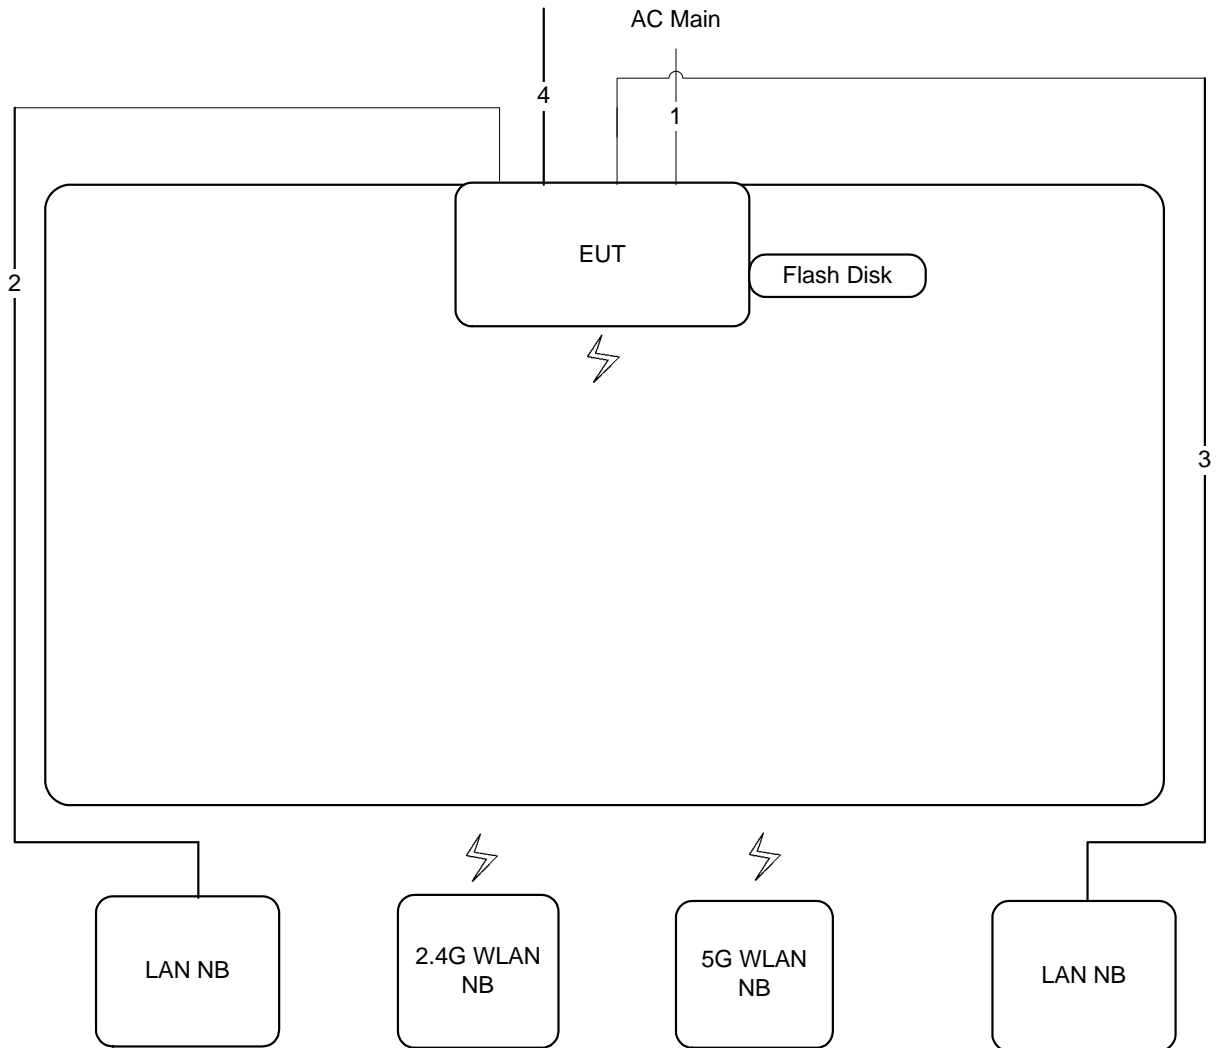

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	Console cable	No	1.5m

3.13.2. Radiation Emissions Above 1GHz Test Configuration

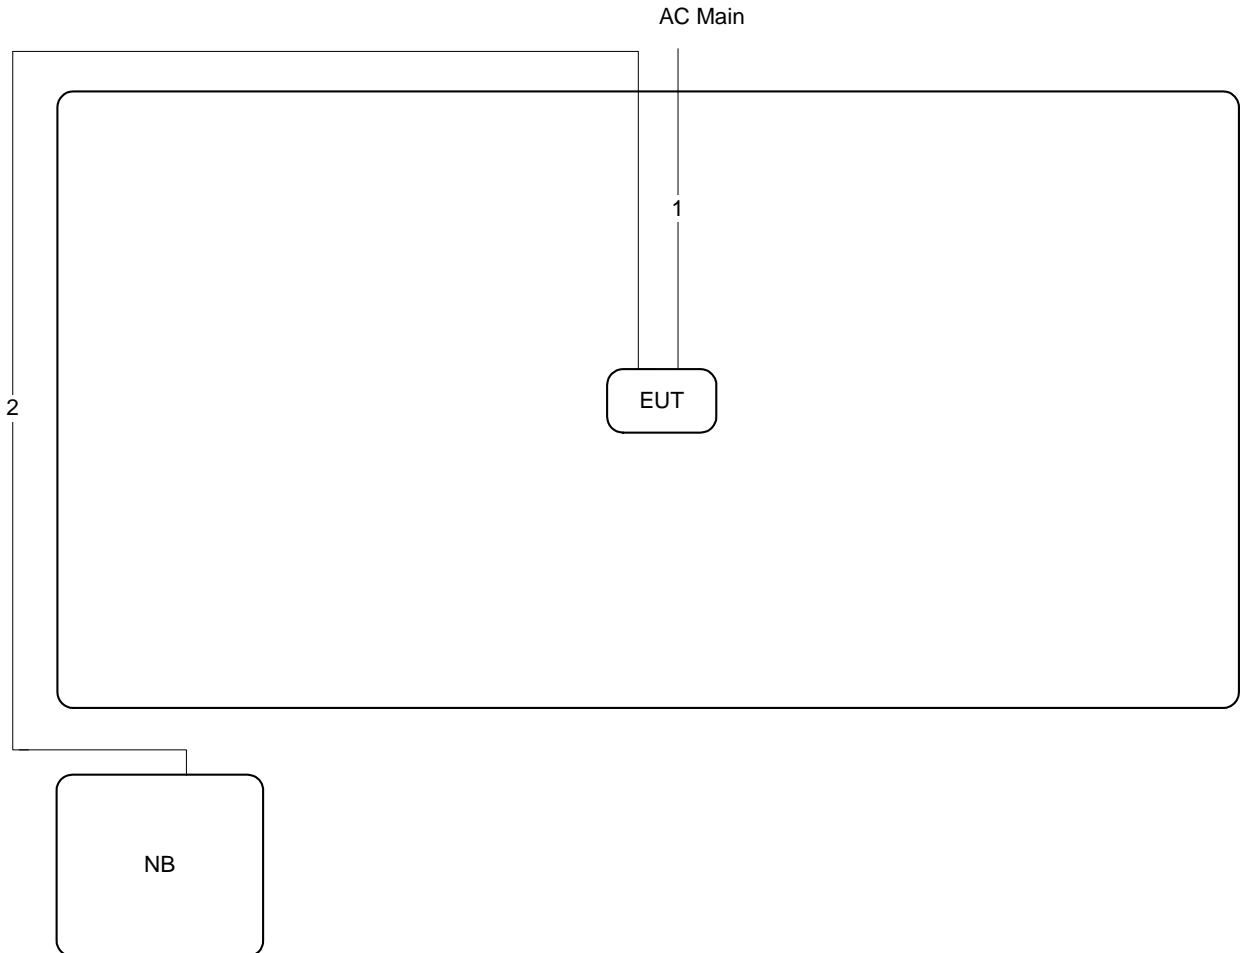

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

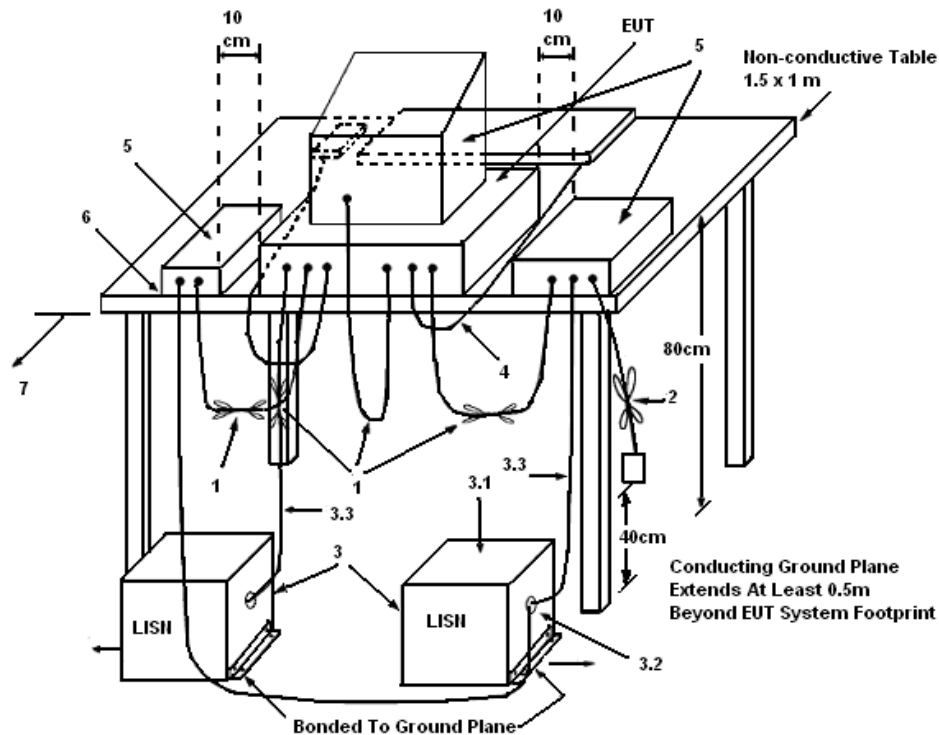

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	55%
Test Engineer	Justin Chiu	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1

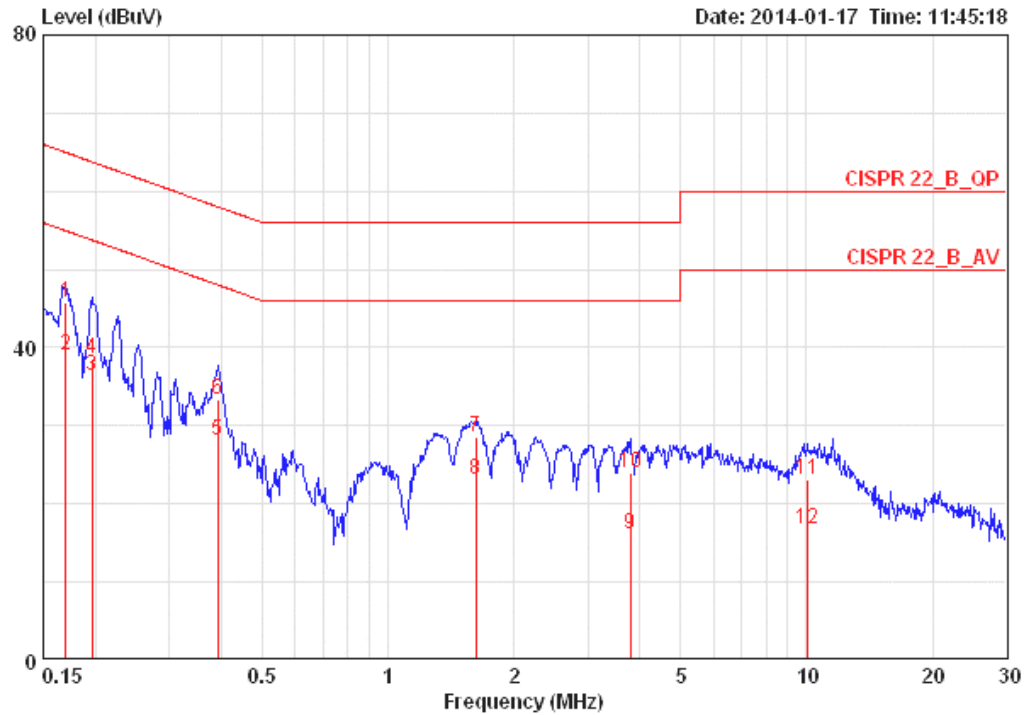

	Freq	Level	Over Limit	Limit	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.16944	45.88	-19.11	64.99	0.15	45.57	0.16	LINE	QP
2	0.16944	39.04	-15.95	54.99	0.15	38.73	0.16	LINE	AVERAGE
3	0.19654	36.41	-17.34	53.76	0.15	36.10	0.16	LINE	AVERAGE
4	0.19654	38.56	-25.19	63.76	0.15	38.25	0.16	LINE	QP
5	0.39136	28.05	-19.99	48.03	0.15	27.72	0.18	LINE	AVERAGE
6	0.39136	33.25	-24.79	58.03	0.15	32.92	0.18	LINE	QP
7	1.619	28.56	-27.44	56.00	0.18	28.15	0.23	LINE	QP
8	1.619	23.20	-22.80	46.00	0.18	22.79	0.23	LINE	AVERAGE
9	3.799	16.14	-29.86	46.00	0.27	15.57	0.30	LINE	AVERAGE
10	3.799	24.08	-31.92	56.00	0.27	23.51	0.30	LINE	QP
11	10.019	23.16	-36.84	60.00	0.37	22.41	0.38	LINE	QP
12	10.019	16.72	-33.28	50.00	0.37	15.97	0.38	LINE	AVERAGE

Temperature	25°C	Humidity	55%
Test Engineer	Justin Chiu	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 1 (EUT 1) + Adapter

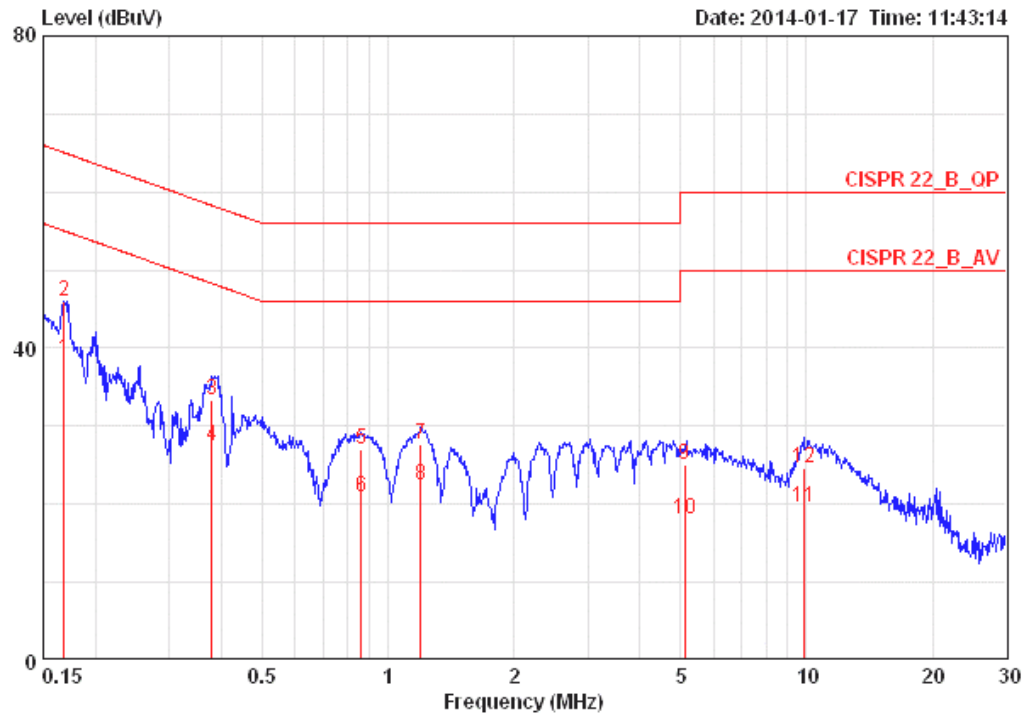

	Freq	Level	Over Limit	Limit	LISN	Read	Cable	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.16854	38.48	-16.55	55.03	0.07	38.25	0.16	NEUTRAL	AVERAGE
2	0.16854	46.04	-18.99	65.03	0.07	45.81	0.16	NEUTRAL	QP
3	0.37912	33.42	-24.88	58.30	0.07	33.17	0.18	NEUTRAL	QP
4	0.37912	27.38	-20.92	48.30	0.07	27.13	0.18	NEUTRAL	AVERAGE
5	0.86185	27.05	-28.95	56.00	0.08	26.78	0.20	NEUTRAL	QP
6	0.86185	20.88	-25.12	46.00	0.08	20.61	0.20	NEUTRAL	AVERAGE
7	1.197	27.63	-28.37	56.00	0.09	27.33	0.21	NEUTRAL	QP
8	1.197	22.56	-23.44	46.00	0.09	22.26	0.21	NEUTRAL	AVERAGE
9	5.116	25.04	-30.96	56.00	0.15	24.57	0.32	NEUTRAL	QP
10	5.116	18.04	-27.96	46.00	0.15	17.57	0.32	NEUTRAL	Average
11	9.861	19.63	-30.37	50.00	0.27	18.98	0.38	NEUTRAL	AVERAGE
12	9.861	24.68	-35.32	60.00	0.27	24.03	0.38	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	20°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac
Test Mode	Mode 1 (EUT 1)		

Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
52	5260 MHz	22.40	18.56
60	5300 MHz	21.44	18.40
64	5320 MHz	22.08	18.24
100	5500 MHz	23.04	18.56
116	5580 MHz	22.72	18.72
140	5700 MHz	23.04	18.72

Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
54	5270 MHz	39.36	35.84
62	5310 MHz	41.28	36.48
102	5510 MHz	42.56	36.80
110	5550 MHz	40.32	36.16
134	5670 MHz	42.24	37.12

Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
58	5290 MHz	85.12	75.52
106	5530 MHz	84.48	77.44

Temperature	20°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a
Test Mode	Mode 1 (EUT 1)		

Configuration IEEE 802.11a / Ant. 1

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
52	5260 MHz	41.76	24.00
60	5300 MHz	42.56	23.68
64	5320 MHz	23.52	17.12
100	5500 MHz	22.88	16.96
116	5580 MHz	43.52	25.92
140	5700 MHz	24.16	16.96

Temperature	22°C	Humidity	56%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac
Test Mode	Mode 2 (EUT 2)		

Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
52	5260 MHz	23.04	18.88
60	5300 MHz	21.76	17.60
64	5320 MHz	21.76	17.28
100	5500 MHz	19.52	17.28
116	5580 MHz	22.24	18.40
140	5700 MHz	20.80	17.76

Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
54	5270 MHz	38.40	34.56
62	5310 MHz	37.44	34.24
102	5510 MHz	40.64	36.48
110	5550 MHz	41.60	36.80
134	5670 MHz	41.92	36.48

Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
58	5290 MHz	79.36	72.96
106	5530 MHz	82.56	75.52

Temperature	22°C	Humidity	56%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a
Test Mode	Mode 2 (EUT 2)		

Configuration IEEE 802.11a / Ant. 1


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
52	5260 MHz	27.20	17.44
60	5300 MHz	26.08	17.44
64	5320 MHz	20.96	16.80
100	5500 MHz	22.40	17.44
116	5580 MHz	29.28	16.32
140	5700 MHz	19.84	16.96

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5260 MHz / Test Mode: Mode 1 (EUT 1)

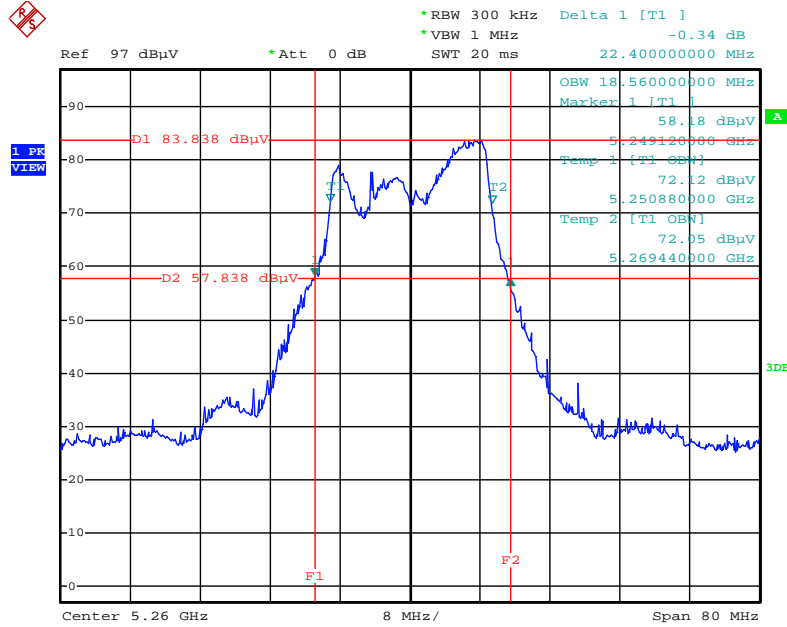


Date: 15.FEB.2014 06:43:30

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5300 MHz / Test Mode: Mode 1 (EUT 1)

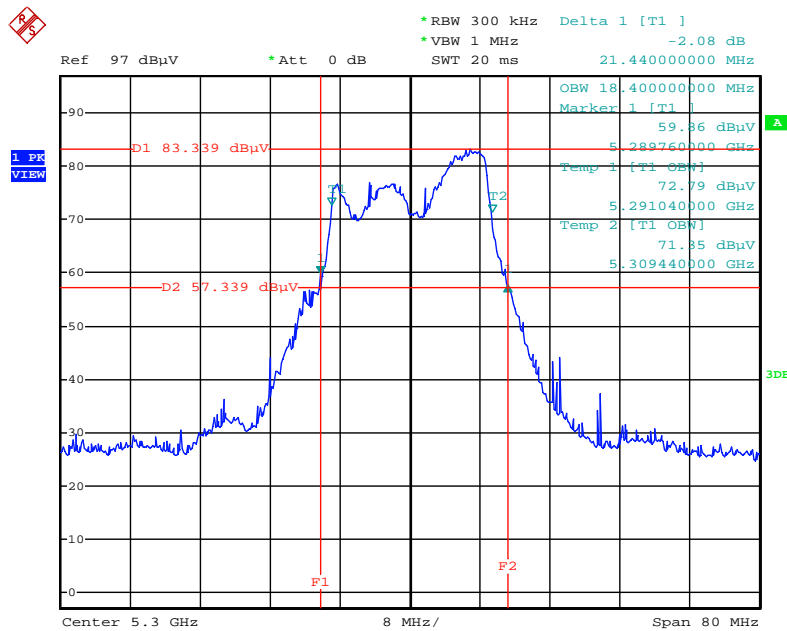


Date: 15.FEB.2014 06:43:03

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5320 MHz / Test Mode: Mode 1 (EUT 1)

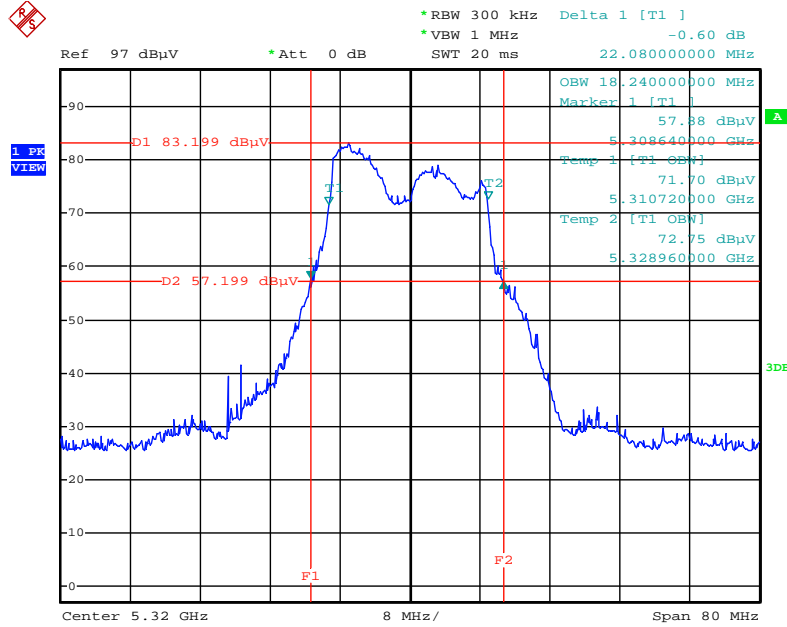


Date: 15.FEB.2014 06:42:09

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5500 MHz / Test Mode: Mode 1 (EUT 1)

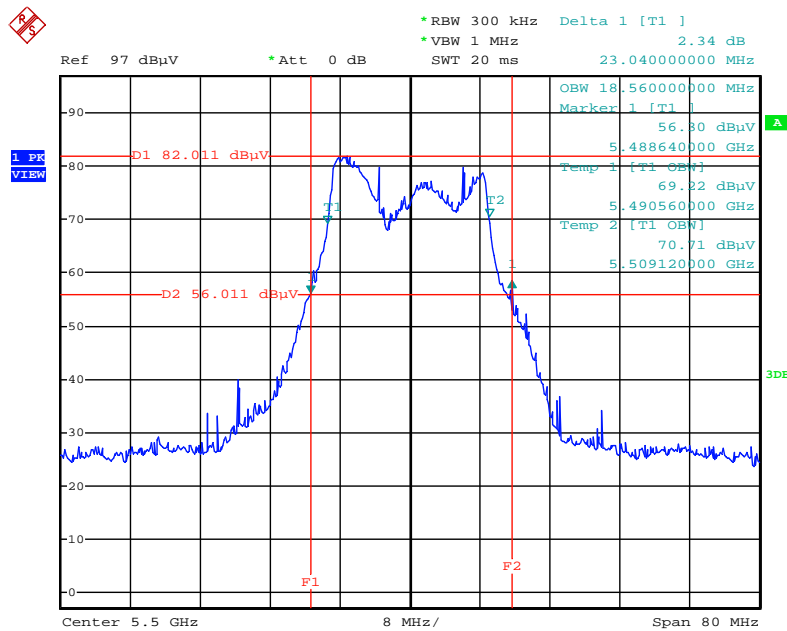


Date: 15.FEB.2014 06:40:41

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5580 MHz / Test Mode: Mode 1 (EUT 1)

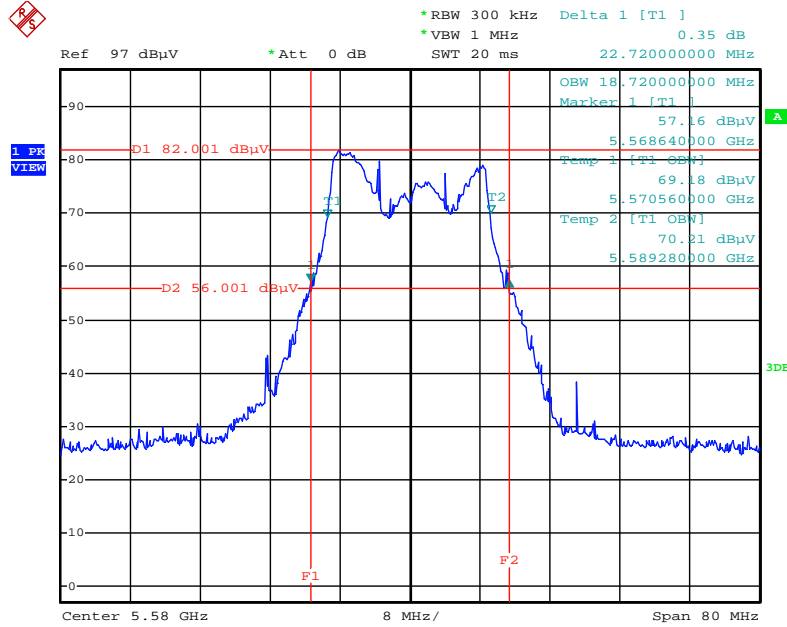


Date: 15.FEB.2014 06:41:12

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5700 MHz / Test Mode: Mode 1 (EUT 1)

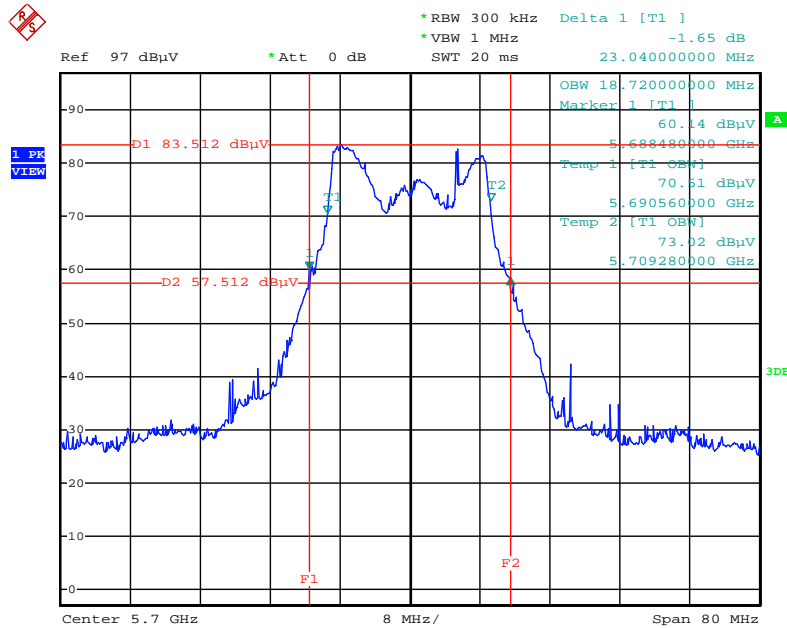


Date: 15.FEB.2014 06:38:15

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5270 MHz / Test Mode: Mode 1 (EUT 1)

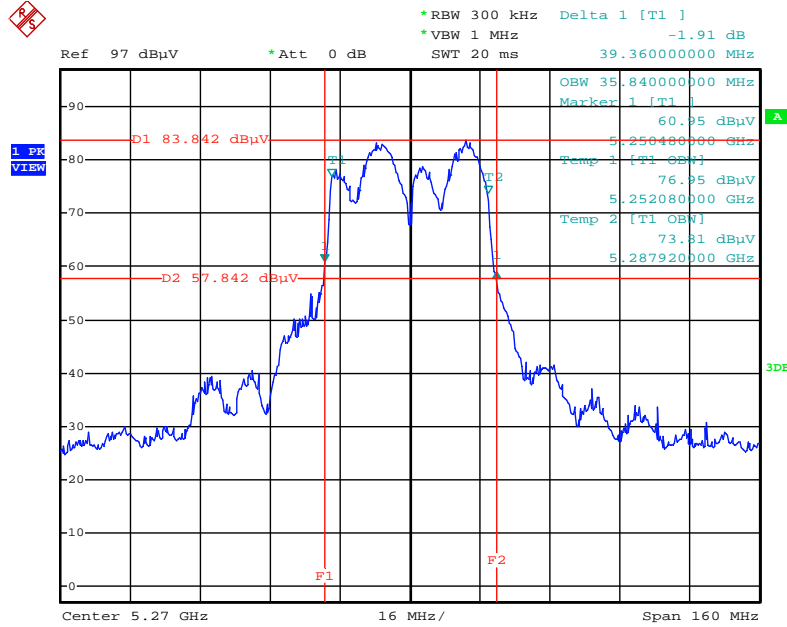


Date: 15.FEB.2014 06:51:24

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5310 MHz / Test Mode: Mode 1 (EUT 1)

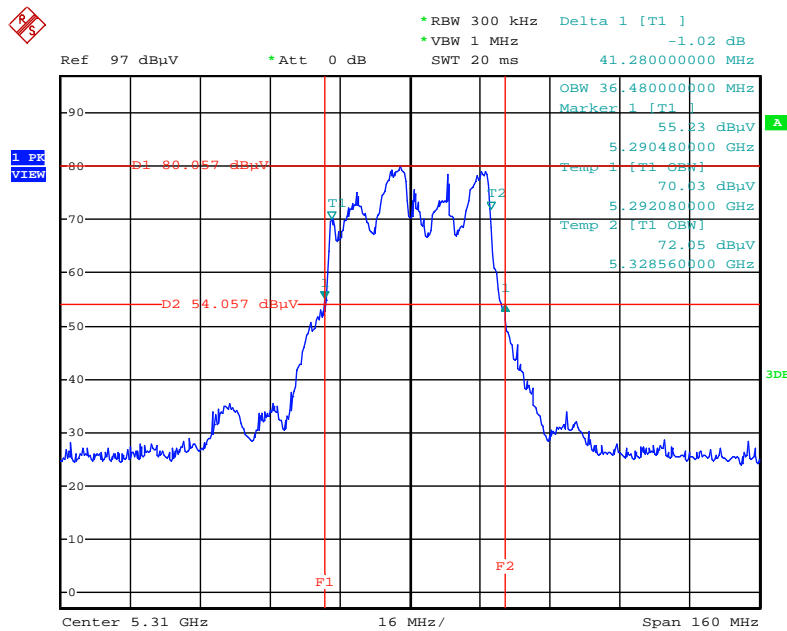


Date: 15.FEB.2014 06:51:52

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5510 MHz / Test Mode: Mode 1 (EUT 1)

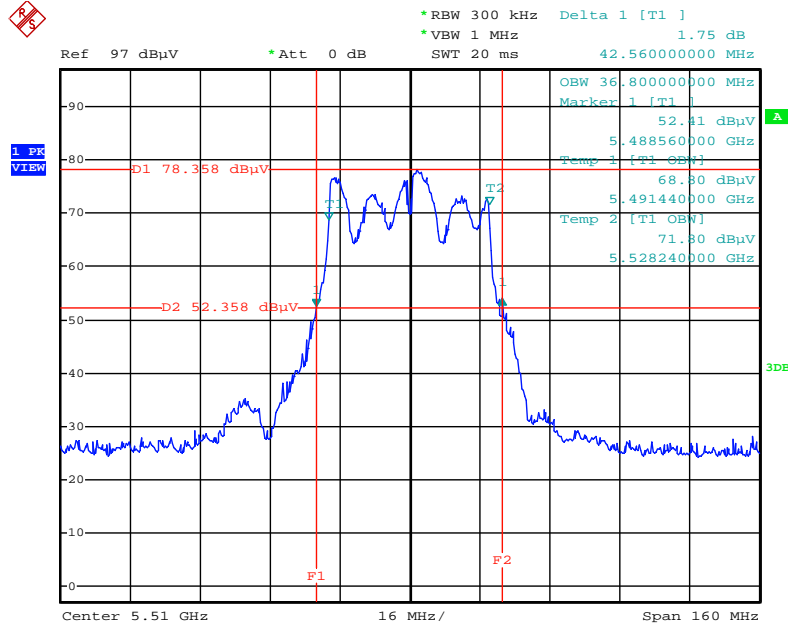


Date: 15.FEB.2014 06:52:36

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5550 MHz / Test Mode: Mode 1 (EUT 1)

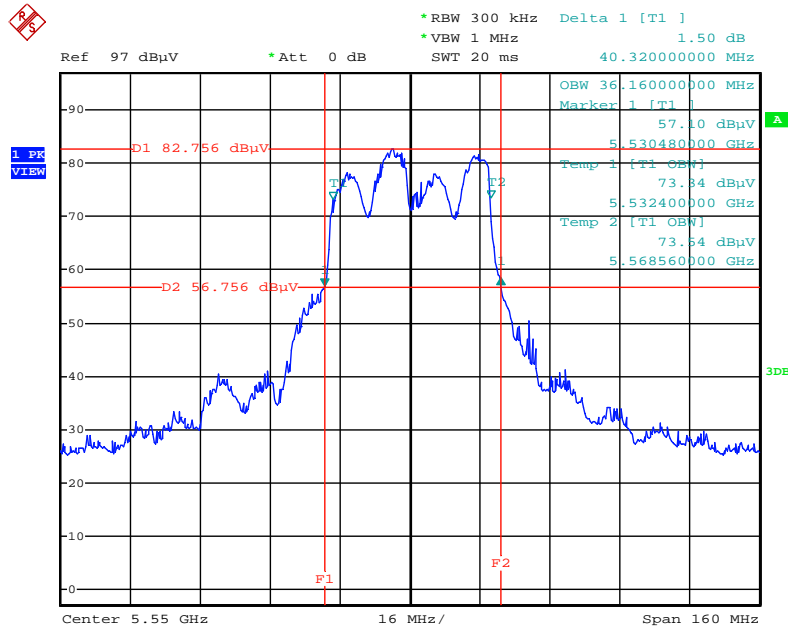


Date: 15.FEB.2014 06:53:07

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5670 MHz / Test Mode: Mode 1 (EUT 1)

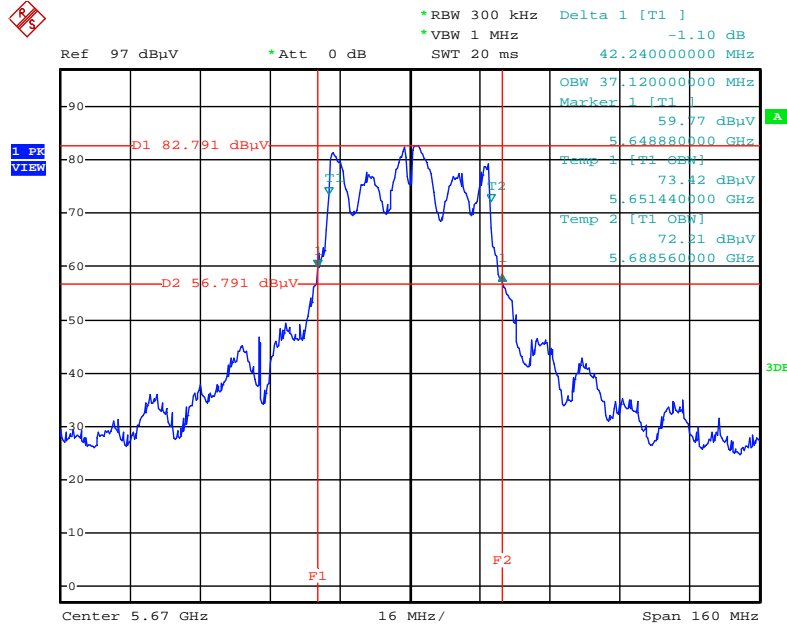


Date: 15.FEB.2014 06:53:47

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5290 MHz / Test Mode: Mode 1 (EUT 1)

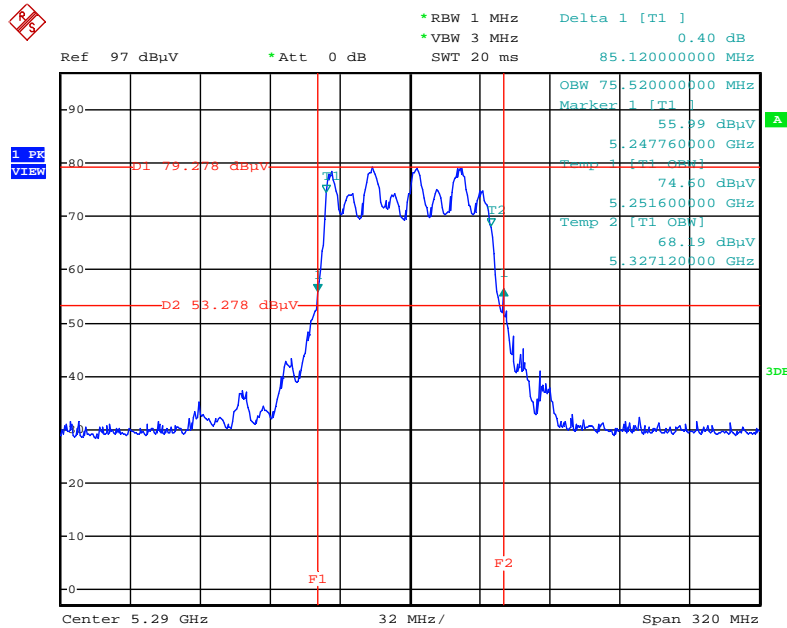


Date: 15.FEB.2014 06:55:20

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5530 MHz / Test Mode: Mode 1 (EUT 1)

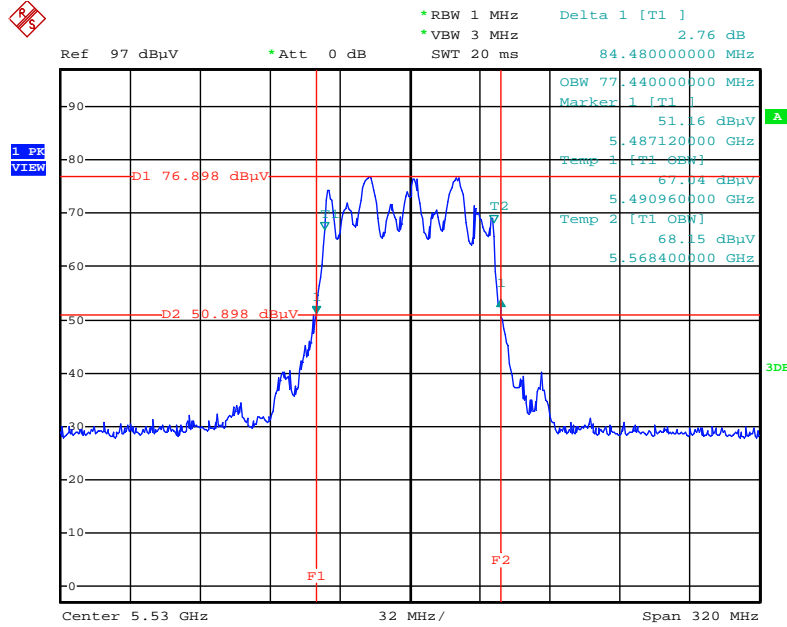


Date: 15.FEB.2014 06:55:56

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5260 MHz / Test Mode: Mode 1 (EUT 1)

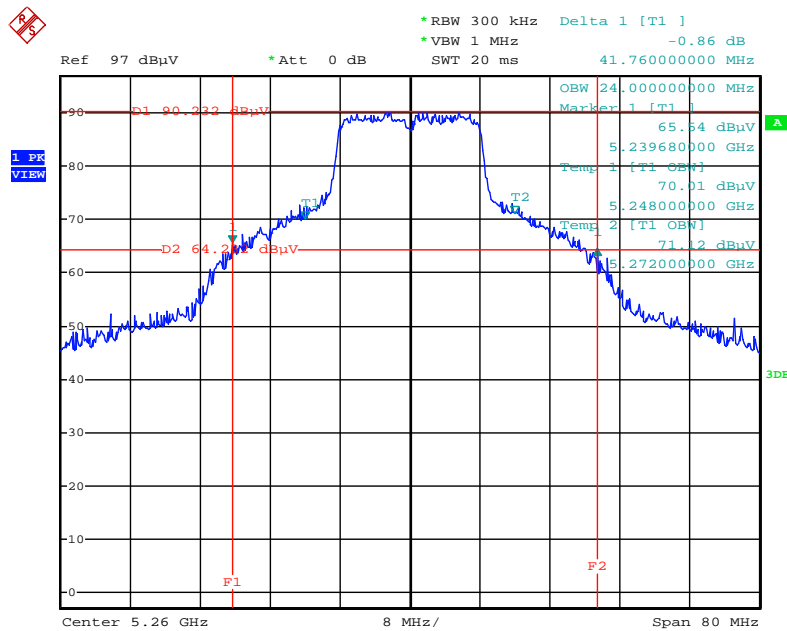


Date: 15.FEB.2014 06:29:58

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5300 MHz / Test Mode: Mode 1 (EUT 1)

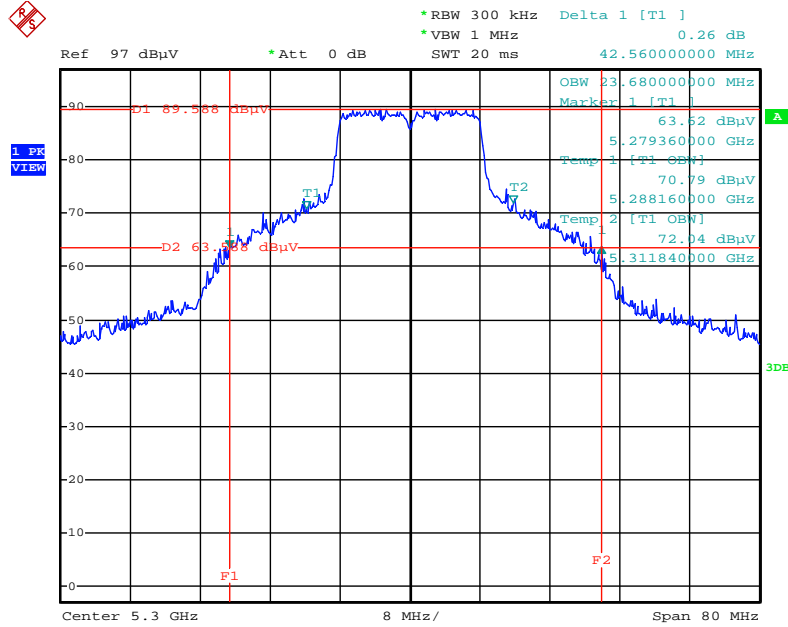


Date: 15.FEB.2014 06:31:01

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5320 MHz / Test Mode: Mode 1 (EUT 1)

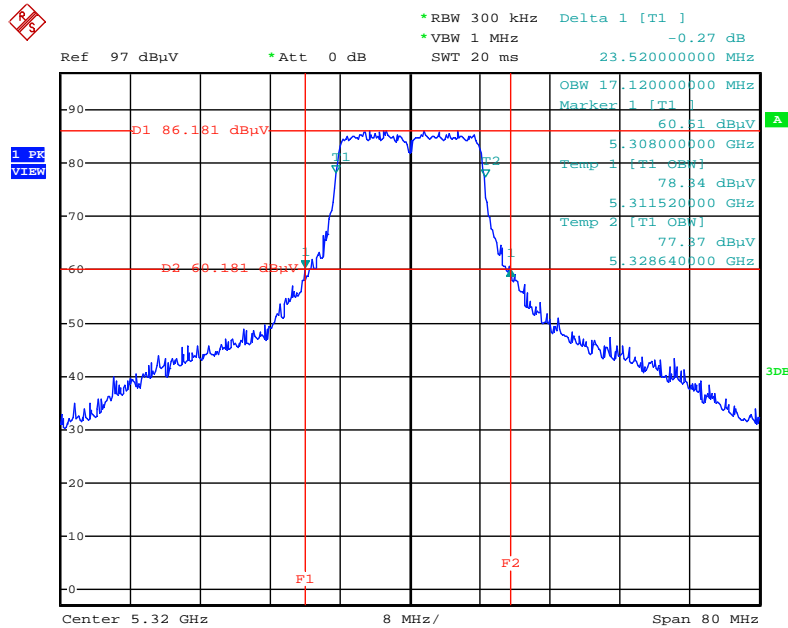


Date: 15.FEB.2014 06:31:40

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5500 MHz / Test Mode: Mode 1 (EUT 1)

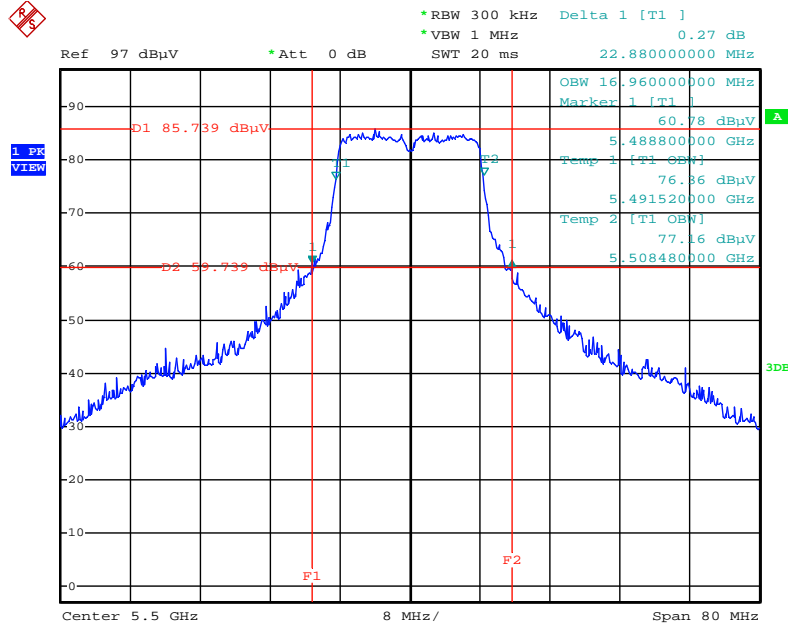


Date: 15.FEB.2014 06:34:15

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5580 MHz / Test Mode: Mode 1 (EUT 1)

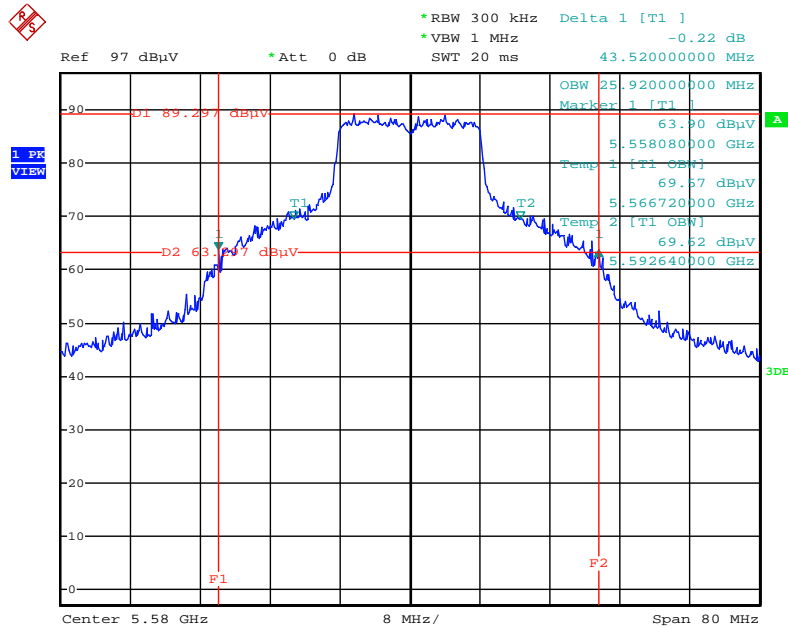


Date: 15.FEB.2014 06:34:52

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5700 MHz / Test Mode: Mode 1 (EUT 1)

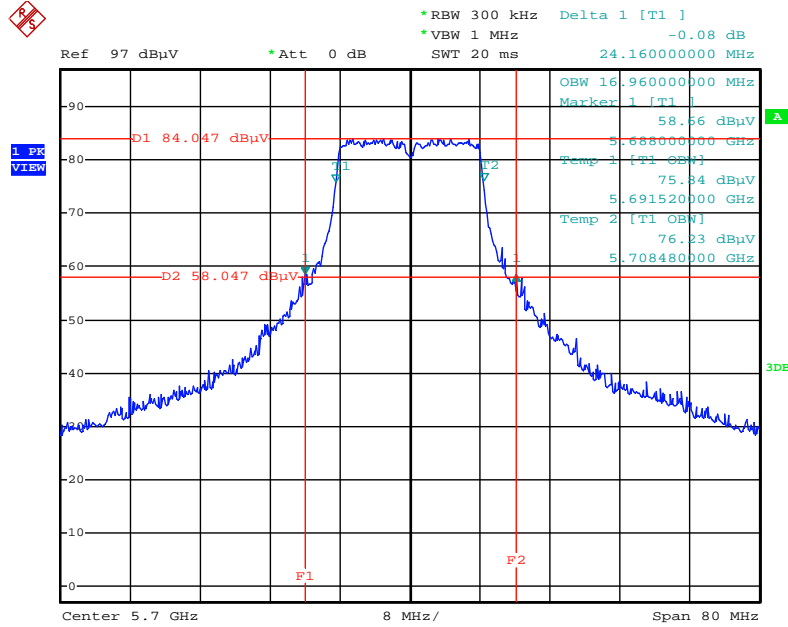


Date: 15.FEB.2014 06:35:30

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5260 MHz / Test Mode: Mode 2 (EUT 2)

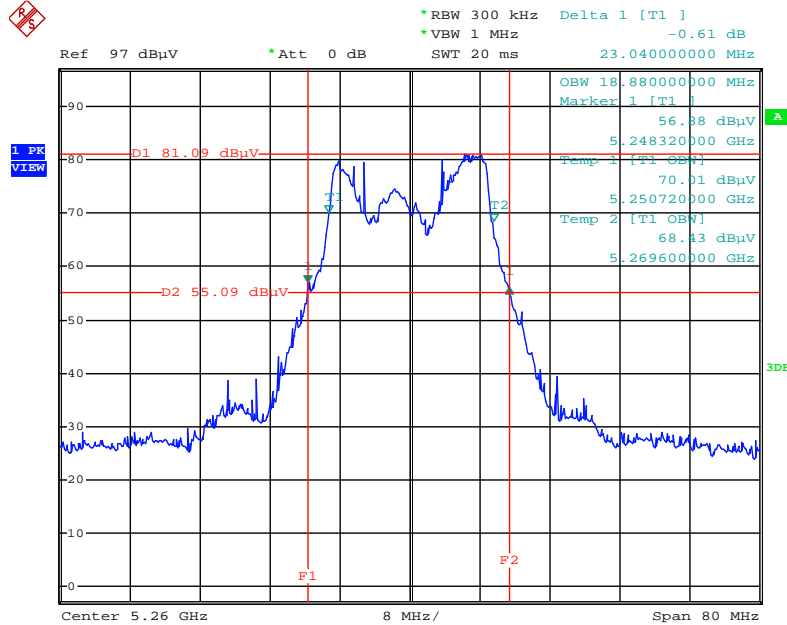


Date: 1.MAR.2014 13:20:39

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5300 MHz / Test Mode: Mode 2 (EUT 2)

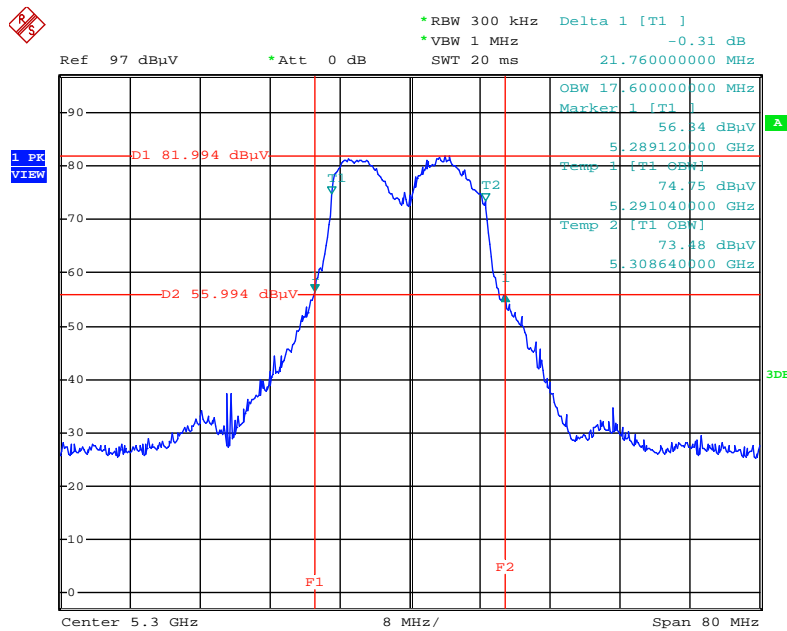


Date: 1.MAR.2014 13:21:18

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5320 MHz / Test Mode: Mode 2 (EUT 2)

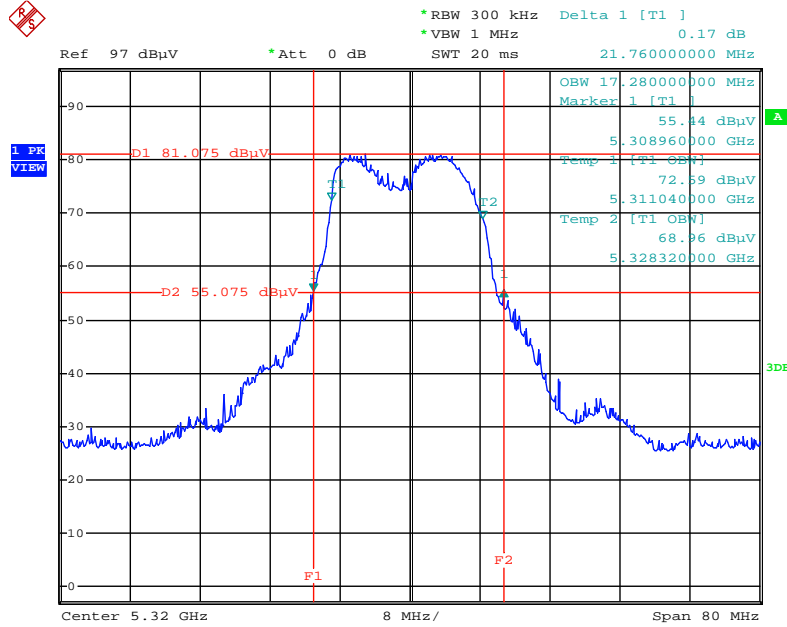


Date: 1.MAR.2014 13:22:38

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5500 MHz / Test Mode: Mode 2 (EUT 2)

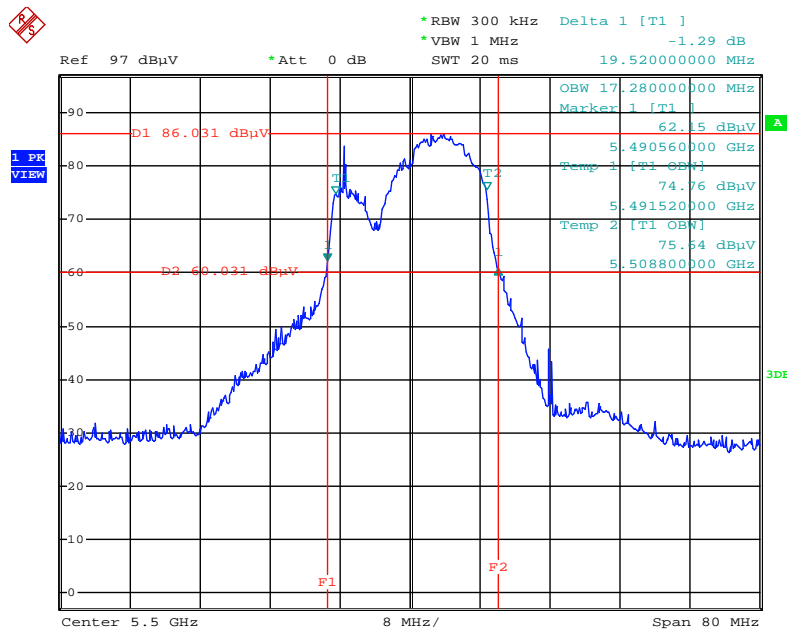


Date: 1.MAR.2014 13:23:36

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5580 MHz / Test Mode: Mode 2 (EUT 2)

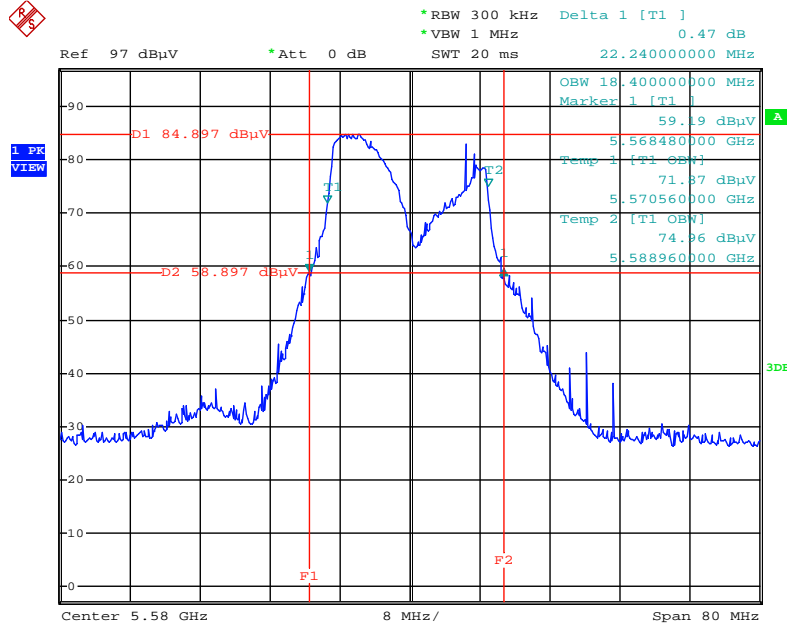


Date: 1.MAR.2014 13:24:18

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5700 MHz / Test Mode: Mode 2 (EUT 2)

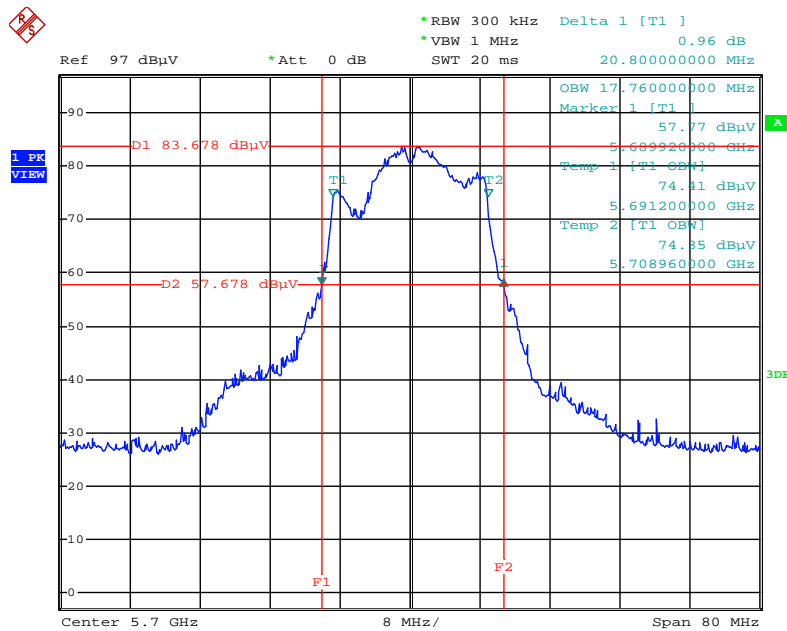


Date: 1.MAR.2014 13:25:41

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5270 MHz / Test Mode: Mode 2 (EUT 2)

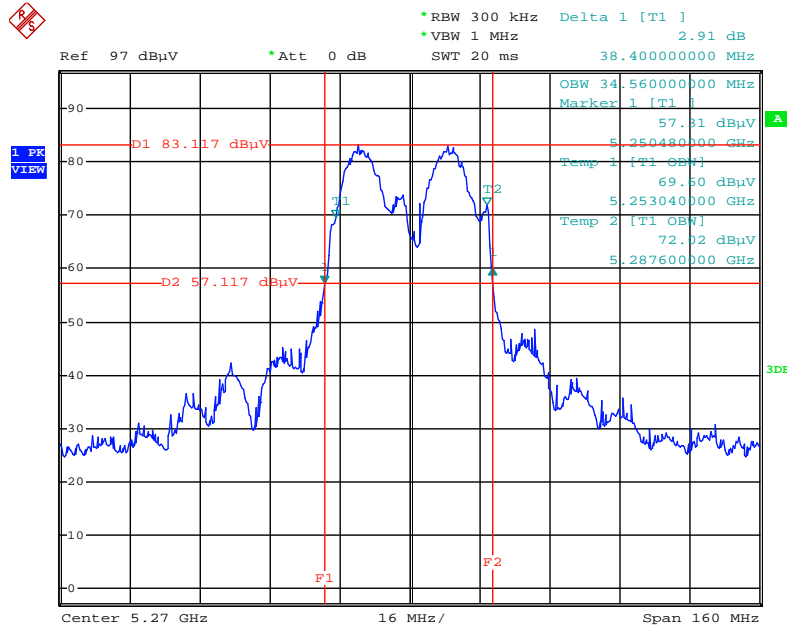


Date: 1.MAR.2014 13:33:15

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5310 MHz / Test Mode: Mode 2 (EUT 2)

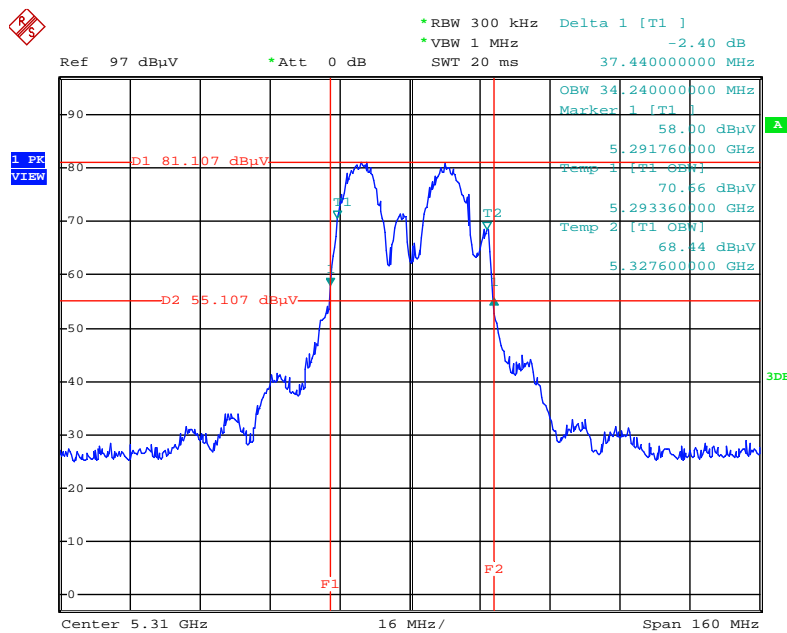


Date: 1.MAR.2014 13:34:17

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5510 MHz / Test Mode: Mode 2 (EUT 2)

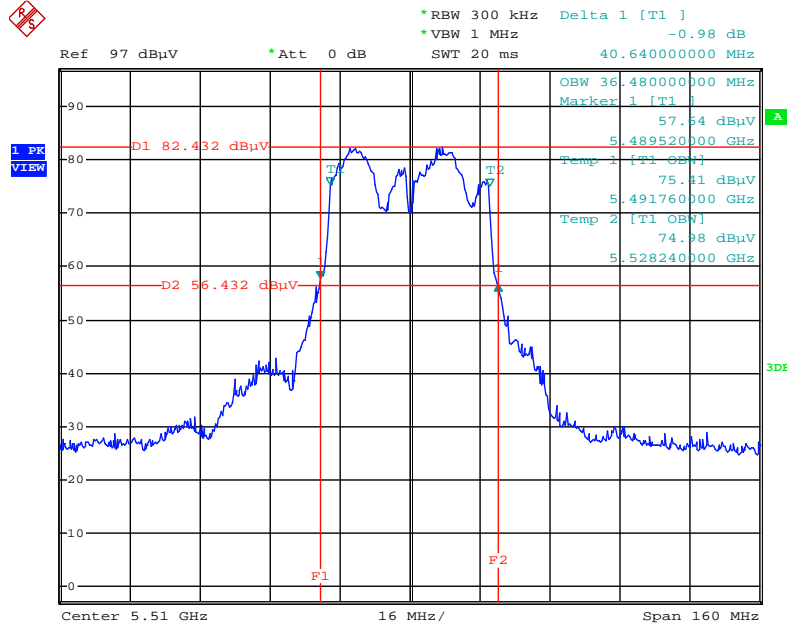


Date: 1.MAR.2014 13:36:10

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5550 MHz / Test Mode: Mode 2 (EUT 2)

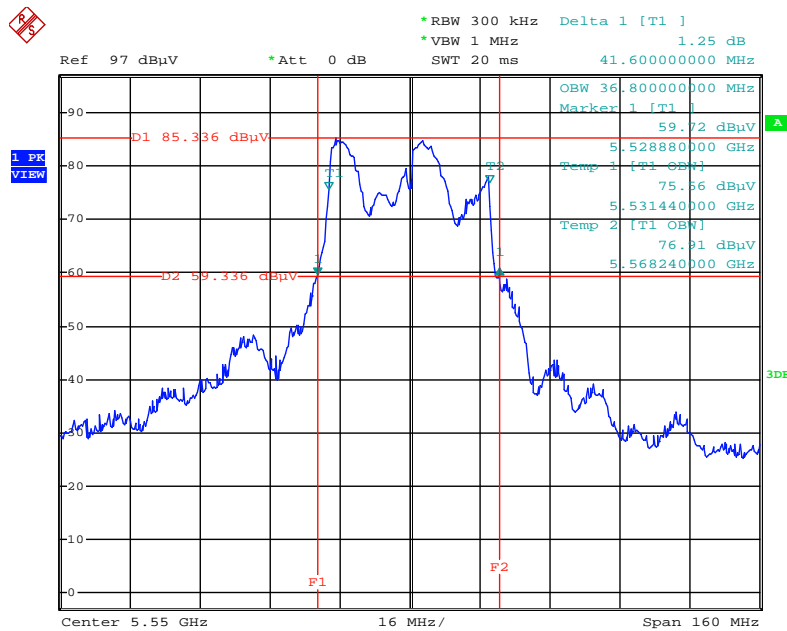


Date: 1.MAR.2014 13:37:47

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5670 MHz / Test Mode: Mode 2 (EUT 2)

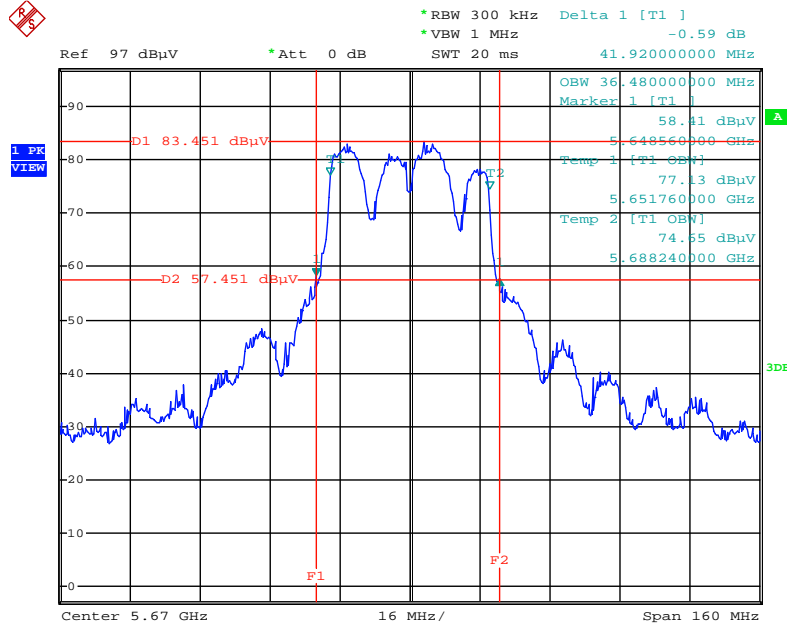


Date: 1.MAR.2014 13:38:52

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5290 MHz / Test Mode: Mode 2 (EUT 2)

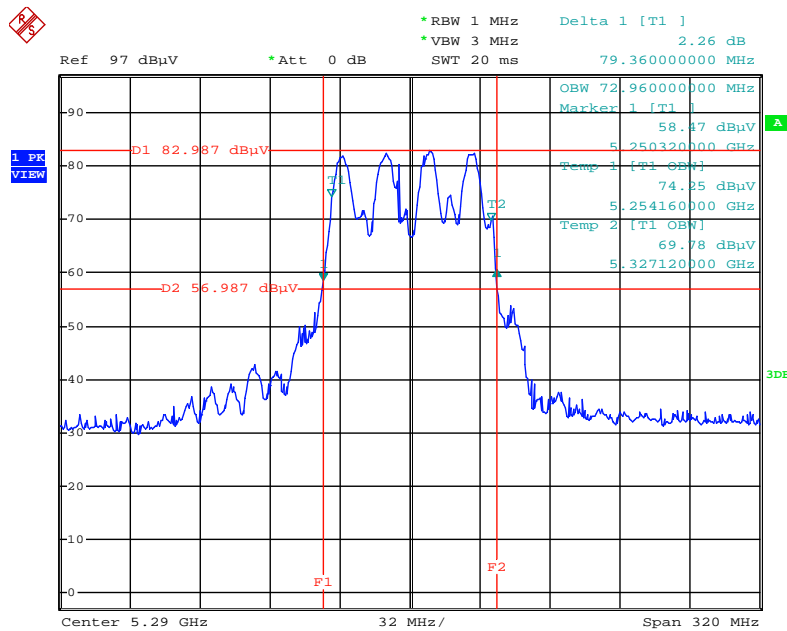


Date: 1.MAR.2014 13:42:59

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5530 MHz / Test Mode: Mode 2 (EUT 2)

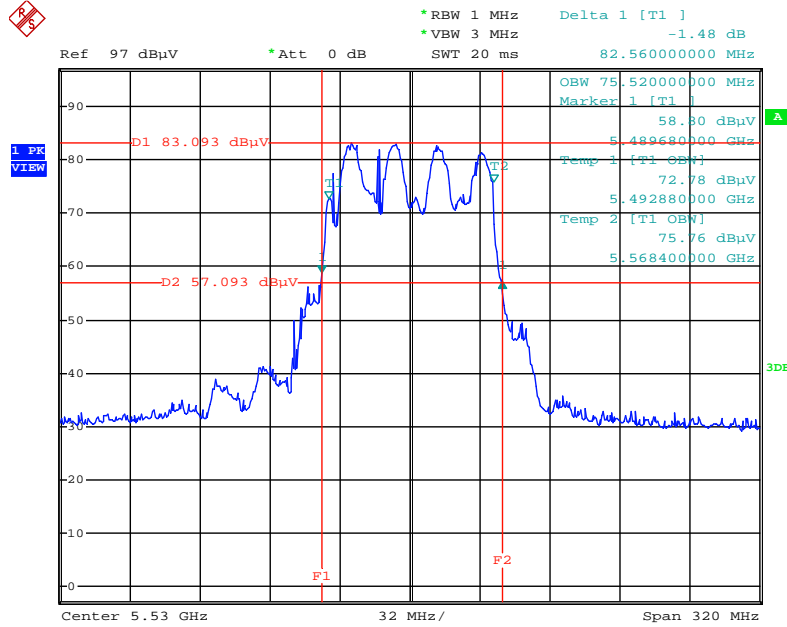


Date: 1.MAR.2014 13:44:52

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5260 MHz / Test Mode: Mode 2 (EUT 2)

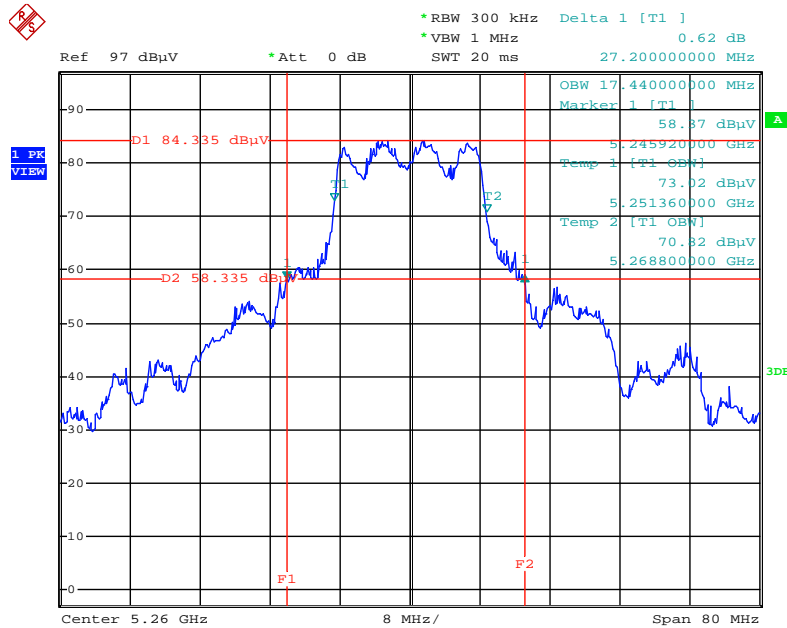


Date: 1.MAR.2014 13:06:15

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5300 MHz / Test Mode: Mode 2 (EUT 2)

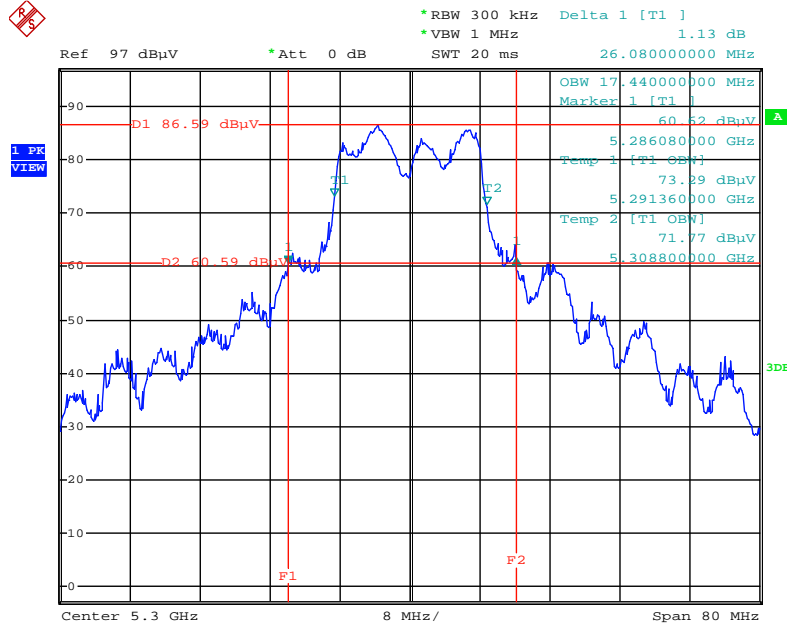


Date: 1.MAR.2014 13:07:30

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5320 MHz / Test Mode: Mode 2 (EUT 2)

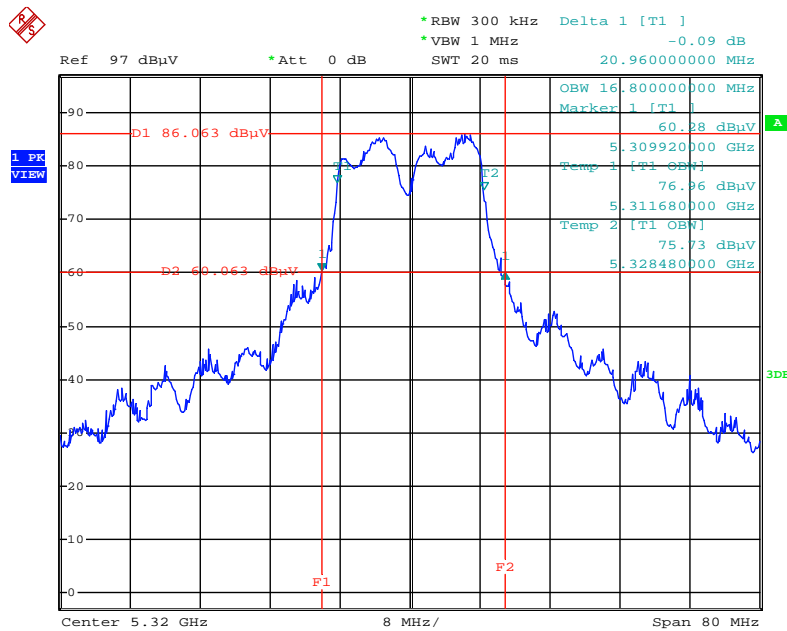


Date: 1.MAR.2014 13:08:56

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5500 MHz / Test Mode: Mode 2 (EUT 2)

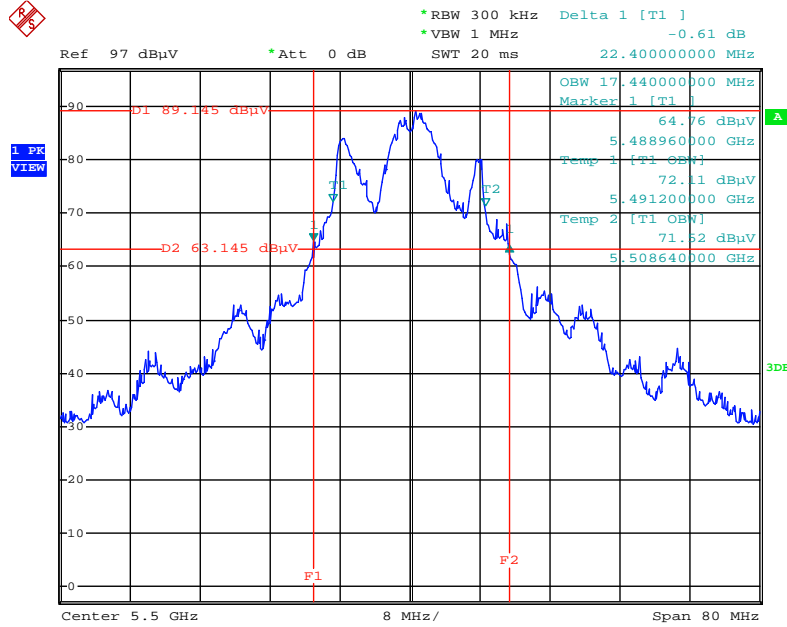


Date: 1.MAR.2014 13:10:20

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5580 MHz / Test Mode: Mode 2 (EUT 2)

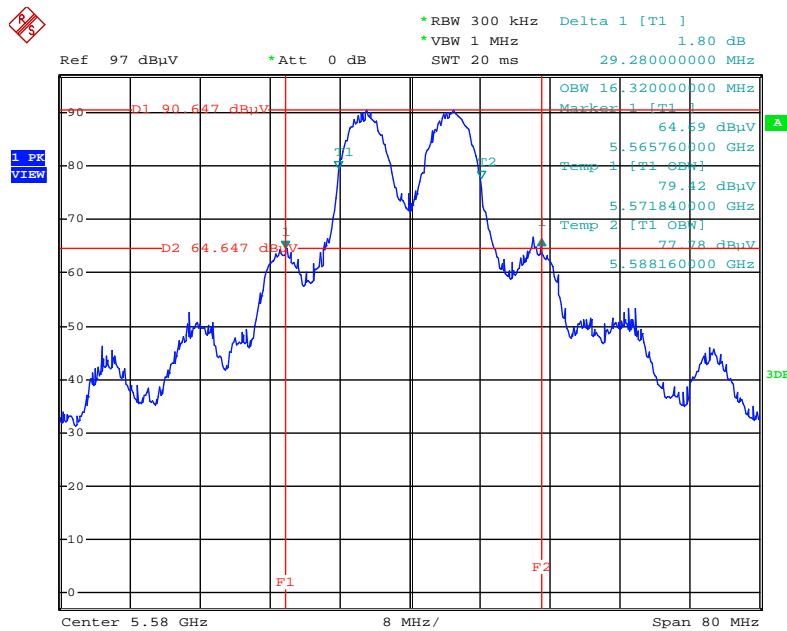

Date: 1.MAR.2014 13:11:46

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5700 MHz / Test Mode: Mode 2 (EUT 2)

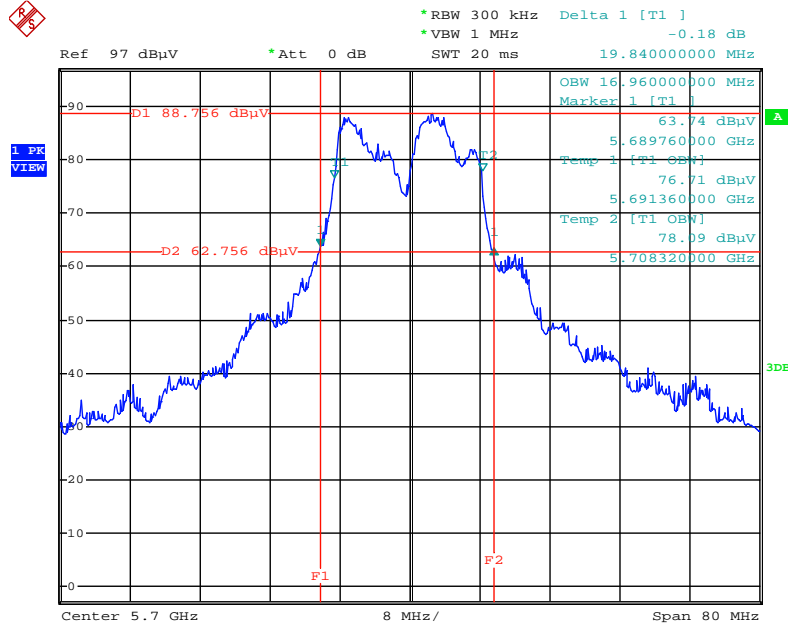

Date: 1.MAR.2014 13:13:15

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the 5.25-5.35 GHz and 5.470-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or $11 \text{ dBm} + 10\log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (E) Maximum conducted output power => (3) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout



4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac
Test Date	Feb. 15, 2014	Test Mode	Mode 1 (EUT 1)

Configuration IEEE 802.11ac MCS0, Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
52	5260 MHz	15.91	14.94	15.26	20.16	23.40	Complies
60	5300 MHz	15.19	14.51	14.91	19.65	23.40	Complies
64	5320 MHz	14.74	13.93	15.31	19.47	23.40	Complies
100	5500 MHz	14.42	13.45	15.02	19.12	23.40	Complies
116	5580 MHz	14.57	13.91	15.48	19.47	23.40	Complies
140	5700 MHz	15.81	14.53	16.37	20.41	23.40	Complies

Note: Max. antenna true gain=6.6dBi>6dBi, so power limit=24-(6.6-6)=23.40dBm.

Configuration IEEE 802.11ac MCS0, Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
54	5270 MHz	18.44	17.51	18.02	22.78	23.40	Complies
62	5310 MHz	14.54	13.47	14.73	19.05	23.40	Complies
102	5510 MHz	12.87	12.14	14.06	17.87	23.40	Complies
110	5550 MHz	16.71	15.99	18.02	21.76	23.40	Complies
134	5670 MHz	18.06	16.69	18.78	22.70	23.40	Complies

Note: Max. antenna true gain=6.6dBi>6dBi, so power limit=24-(6.6-6)=23.40dBm.

Configuration IEEE 802.11ac MCS0, Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
58	5290 MHz	11.83	11.02	11.68	16.30	23.40	Complies
106	5530 MHz	8.53	7.57	9.74	13.48	23.40	Complies

Note: Max. antenna true gain=6.6dBi>6dBi, so power limit=24-(6.6-6)=23.40dBm.

Temperature	20°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a
Test Date	Feb. 15, 2014	Test Mode	Mode 1 (EUT 1)

Configuration IEEE 802.11a / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
52	5260 MHz	23.35	23.50	Complies
60	5300 MHz	23.22	23.50	Complies
64	5320 MHz	19.37	23.50	Complies
100	5500 MHz	18.23	23.50	Complies
116	5580 MHz	21.34	23.50	Complies
140	5700 MHz	18.09	23.50	Complies

Note: Antenna true gain=6.5dBi>6dBi, so power limit=24-(6.5-6)=23.50dBm.

Temperature	22°C	Humidity	56%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac
Test Date	Feb. 15, 2014	Test Mode	Mode 2 (EUT 2)

Configuration IEEE 802.11ac MCS0, Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
52	5260 MHz	16.28	14.28	14.72	19.95	23.76	Complies
60	5300 MHz	15.87	14.76	15.75	20.26	23.46	Complies
64	5320 MHz	15.71	14.55	16.16	20.30	23.38	Complies
100	5500 MHz	15.36	15.22	16.09	20.34	23.38	Complies
116	5580 MHz	15.27	15.48	16.09	20.40	23.65	Complies
140	5700 MHz	15.73	16.52	16.03	20.88	23.49	Complies

Note: Ch 52 power limit= $11 + 10 \cdot \log(B)$ or 24dBm; $11 + 10 \cdot \log(18.88) = 23.76\text{dBm} < 24\text{dBm}$, so power limit=23.76dBm.

Ch 60 power limit= $11 + 10 \cdot \log(B)$ or 24dBm; $11 + 10 \cdot \log(17.60) = 23.46\text{dBm} < 24\text{dBm}$, so power limit=23.46dBm.

Ch 64 power limit= $11 + 10 \cdot \log(B)$ or 24dBm; $11 + 10 \cdot \log(17.28) = 23.38\text{dBm} < 24\text{dBm}$, so power limit=23.38dBm.

Ch 100 power limit= $11 + 10 \cdot \log(B)$ or 24dBm; $11 + 10 \cdot \log(17.28) = 23.38\text{dBm} < 24\text{dBm}$, so power limit=23.38dBm.

Ch 116 power limit= $11 + 10 \cdot \log(B)$ or 24dBm; $11 + 10 \cdot \log(18.40) = 23.65\text{dBm} < 24\text{dBm}$, so power limit=23.65dBm.

Ch 140 power limit= $11 + 10 \cdot \log(B)$ or 24dBm; $11 + 10 \cdot \log(17.76) = 23.49\text{dBm} < 24\text{dBm}$, so power limit=23.49dBm.

Configuration IEEE 802.11ac MCS0, Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
54	5270 MHz	19.21	17.86	18.26	23.25	24.00	Complies
62	5310 MHz	17.82	16.75	18.05	22.35	24.00	Complies
102	5510 MHz	15.05	14.94	16.75	20.43	24.00	Complies
110	5550 MHz	18.15	17.70	19.52	23.30	24.00	Complies
134	5670 MHz	18.63	17.72	19.51	23.45	24.00	Complies

Configuration IEEE 802.11ac MCS0, Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
58	5290 MHz	15.42	14.11	15.14	19.70	24.00	Complies
106	5530 MHz	12.32	11.96	14.21	17.72	24.00	Complies

Temperature	22°C	Humidity	56%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a
Test Date	Feb. 15, 2014	Test Mode	Mode 2 (EUT 2)

Configuration IEEE 802.11a / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
52	5260 MHz	21.65	23.42	Complies
60	5300 MHz	21.68	23.42	Complies
64	5320 MHz	20.33	23.25	Complies
100	5500 MHz	19.87	23.42	Complies
116	5580 MHz	21.11	23.13	Complies
140	5700 MHz	18.84	23.29	Complies

Note: Ch 52 power limit = $11 + 10 \cdot \log(B)$ or 24dBm; $11 + 10 \cdot \log(17.44) = 23.42\text{dBm} < 24\text{dBm}$, so power limit = 23.42dBm.

Ch 60 power limit = $11 + 10 \cdot \log(B)$ or 24dBm; $11 + 10 \cdot \log(17.44) = 23.42\text{dBm} < 24\text{dBm}$, so power limit = 23.42dBm.

Ch 64 power limit = $11 + 10 \cdot \log(B)$ or 24dBm; $11 + 10 \cdot \log(16.80) = 23.25\text{dBm} < 24\text{dBm}$, so power limit = 23.25dBm.

Ch 100 power limit = $11 + 10 \cdot \log(B)$ or 24dBm; $11 + 10 \cdot \log(17.44) = 23.42\text{dBm} < 24\text{dBm}$, so power limit = 23.42dBm.

Ch 116 power limit = $11 + 10 \cdot \log(B)$ or 24dBm; $11 + 10 \cdot \log(16.32) = 23.13\text{dBm} < 24\text{dBm}$, so power limit = 23.13dBm.

Ch 140 power limit = $11 + 10 \cdot \log(B)$ or 24dBm; $11 + 10 \cdot \log(16.96) = 23.29\text{dBm} < 24\text{dBm}$, so power limit = 23.29dBm.

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.25-5.35 GHz	11
5.470-5.725 GHz	11

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power => (d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
3. Multiple antenna systems was performed in accordance KDB 662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

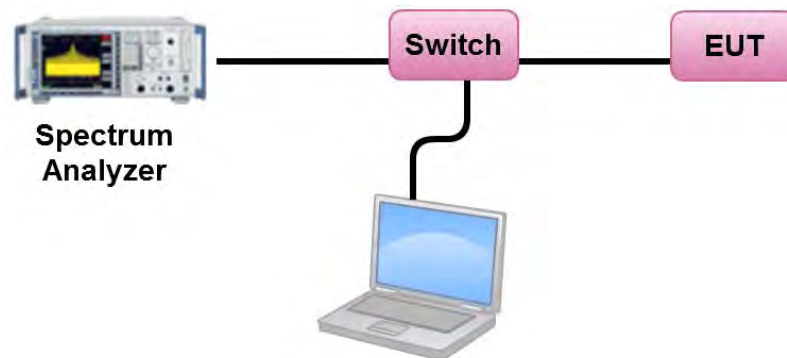

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	20°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac
Test Date	Feb. 15, 2014	Test Mode	Mode 1 (EUT 1)

Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260 MHz	5.63	5.91	Complies
60	5300 MHz	5.64	5.91	Complies
64	5320 MHz	5.66	5.91	Complies
100	5500 MHz	5.56	5.91	Complies
116	5580 MHz	5.88	5.91	Complies
140	5700 MHz	5.87	5.91	Complies

Note: Directional gain = $G_{ANT} + 10\log(N_{ANT}/N_{SS}) = 11.09\text{dBi} > 6\text{dBi}$, so limit = $11 - (11.09 - 6) = 5.91\text{dBm}$.

Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
54	5270 MHz	5.67	5.91	Complies
62	5310 MHz	2.23	5.91	Complies
102	5510 MHz	2.30	5.91	Complies
110	5550 MHz	5.54	5.91	Complies
134	5670 MHz	5.46	5.91	Complies

Note: Directional gain = $G_{ANT} + 10\log(N_{ANT}/N_{SS}) = 11.09\text{dBi} > 6\text{dBi}$, so limit = $11 - (11.09 - 6) = 5.91\text{dBm}$.

Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
58	5290 MHz	-3.67	5.91	Complies
106	5530 MHz	-6.17	5.91	Complies

Note: Directional gain = $G_{ANT} + 10\log(N_{ANT}/N_{SS}) = 11.09\text{dBi} > 6\text{dBi}$, so limit = $11 - (11.09 - 6) = 5.91\text{dBm}$.

Temperature	20°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a
Test Date	Feb. 15, 2014	Test Mode	Mode 1 (EUT 1)

Configuration IEEE 802.11a / Ant. 1

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260 MHz	10.01	10.50	Complies
60	5300 MHz	10.24	10.50	Complies
64	5320 MHz	7.22	10.50	Complies
100	5500 MHz	7.08	10.50	Complies
116	5580 MHz	9.77	10.50	Complies
140	5700 MHz	4.77	10.50	Complies

Note: Antenna true gain=6.5dBi>6dBi, so limit=11-(6.5-6)=10.50dBm.

Temperature	22°C	Humidity	56%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac
Test Date	Feb. 15, 2014	Test Mode	Mode 2 (EUT 2)

Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260 MHz	6.91	7.23	Complies
60	5300 MHz	6.91	7.23	Complies
64	5320 MHz	6.89	7.23	Complies
100	5500 MHz	7.17	7.23	Complies
116	5580 MHz	7.22	7.23	Complies
140	5700 MHz	7.09	7.23	Complies

Note: Directional gain = $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 9.77\text{dBi} > 6\text{dBi}$, so limit = $11 - (9.77 - 6) = 7.23\text{dBm}$.

Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
54	5270 MHz	7.07	7.23	Complies
62	5310 MHz	5.10	7.23	Complies
102	5510 MHz	4.17	7.23	Complies
110	5550 MHz	7.21	7.23	Complies
134	5670 MHz	6.94	7.23	Complies

Note: Directional gain = $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 9.77\text{dBi} > 6\text{dBi}$, so limit = $11 - (9.77 - 6) = 7.23\text{dBm}$.

Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
58	5290 MHz	2.59	7.23	Complies
106	5530 MHz	0.53	7.23	Complies

Note: Directional gain = $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 9.77\text{dBi} > 6\text{dBi}$, so limit = $11 - (9.77 - 6) = 7.23\text{dBm}$.

Temperature	22°C	Humidity	56%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a
Test Date	Feb. 15, 2014	Test Mode	Mode 2 (EUT 2)


Configuration IEEE 802.11a / Ant. 1

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260 MHz	8.50	11.00	Complies
60	5300 MHz	8.57	11.00	Complies
64	5320 MHz	7.09	11.00	Complies
100	5500 MHz	6.98	11.00	Complies
116	5580 MHz	8.13	11.00	Complies
140	5700 MHz	5.50	11.00	Complies


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 /
5320 MHz / Test Mode: Mode 1 (EUT 1)

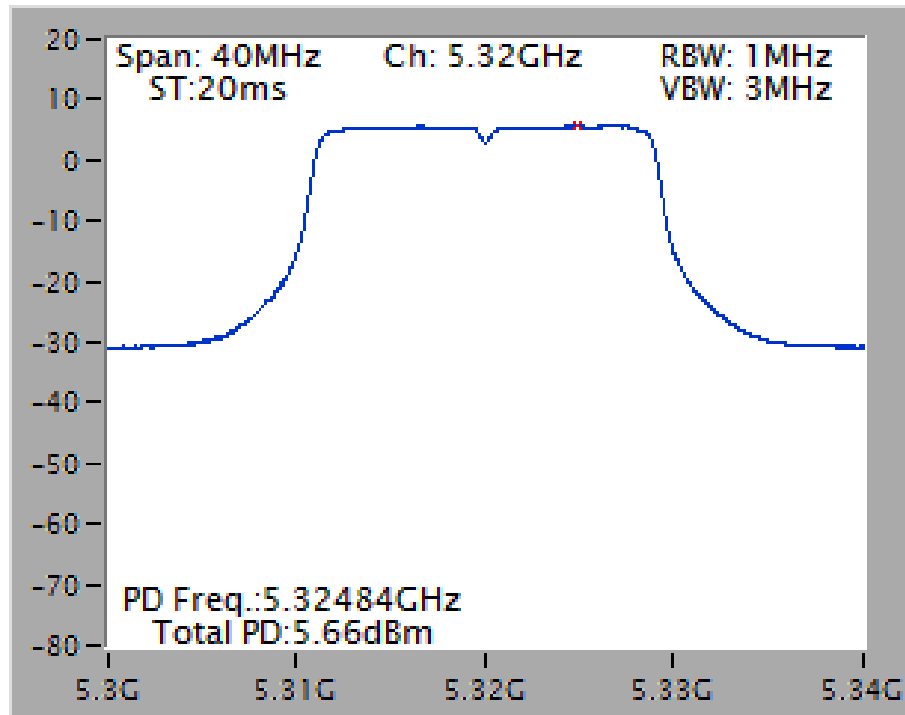


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 /
5580 MHz / Test Mode: Mode 1 (EUT 1)

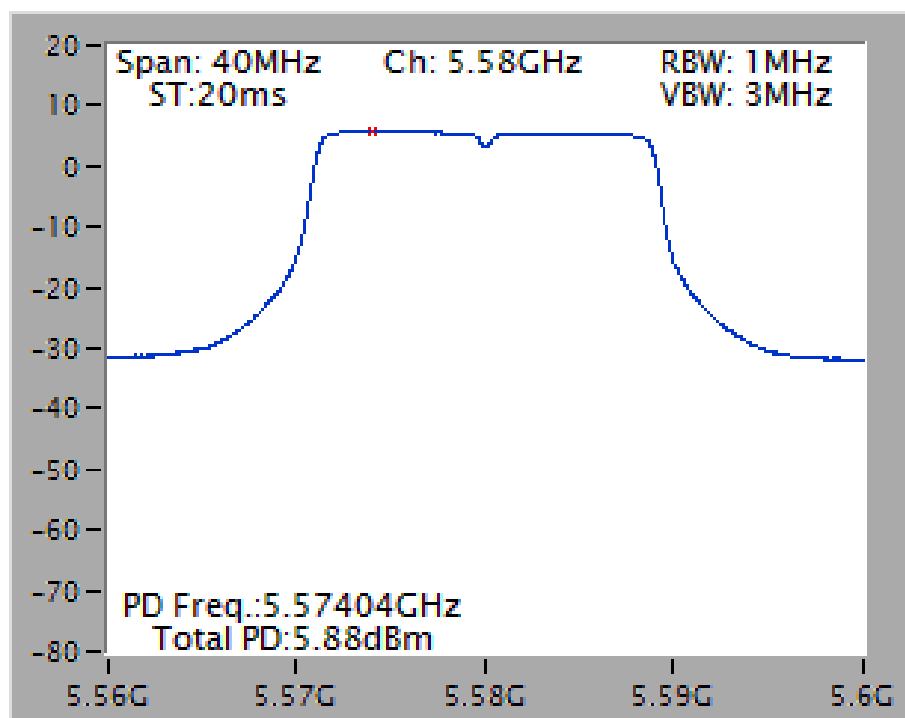


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 /
5270 MHz / Test Mode: Mode 1 (EUT 1)

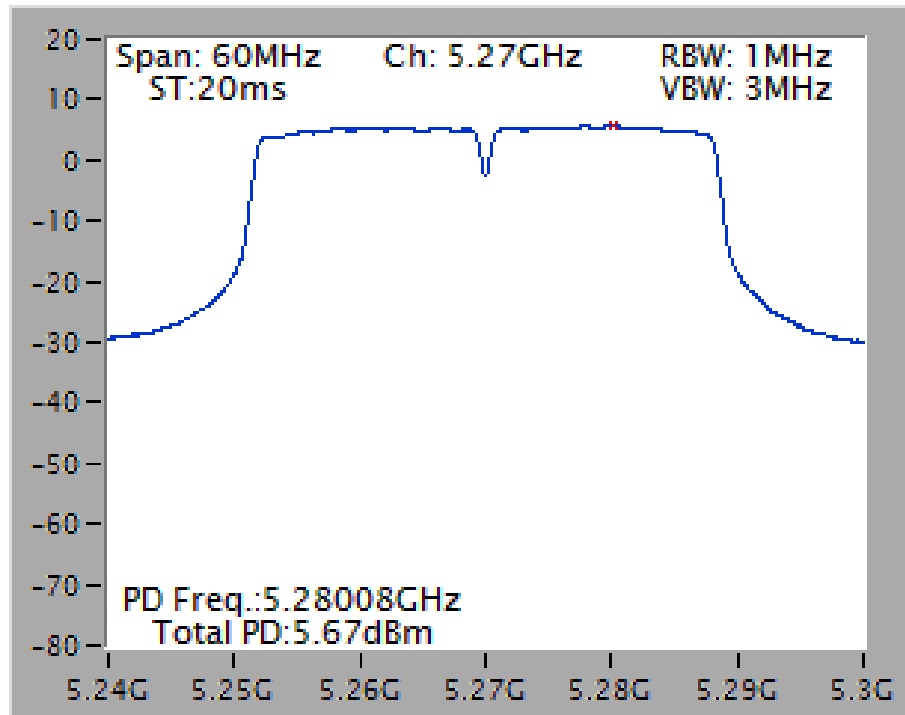


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 /
5550 MHz / Test Mode: Mode 1 (EUT 1)

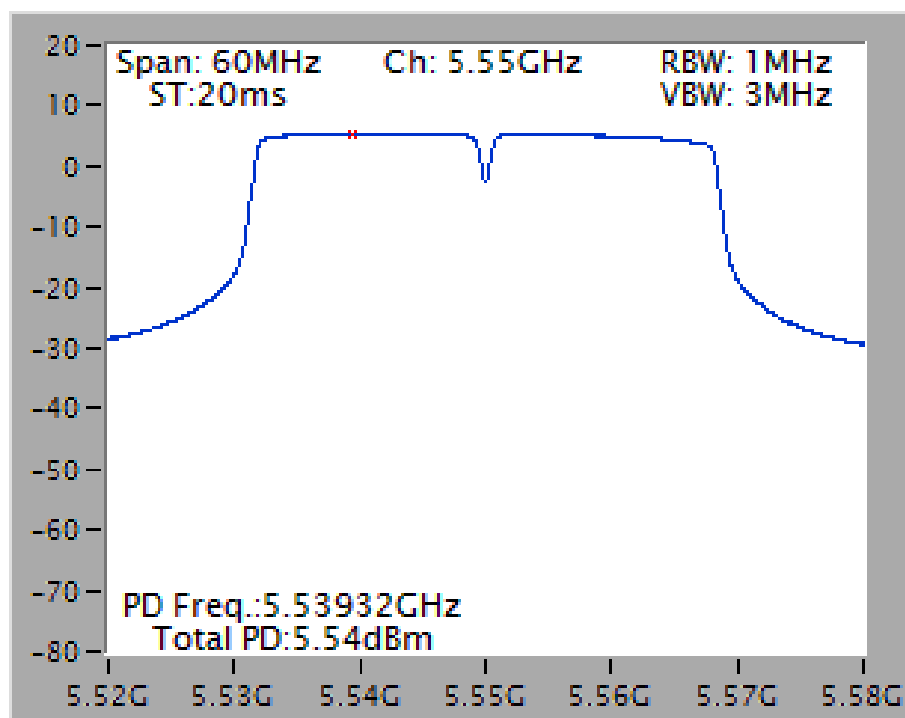


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. A + Ant. B / 5290 MHz / Test Mode: Mode 1 (EUT 1)

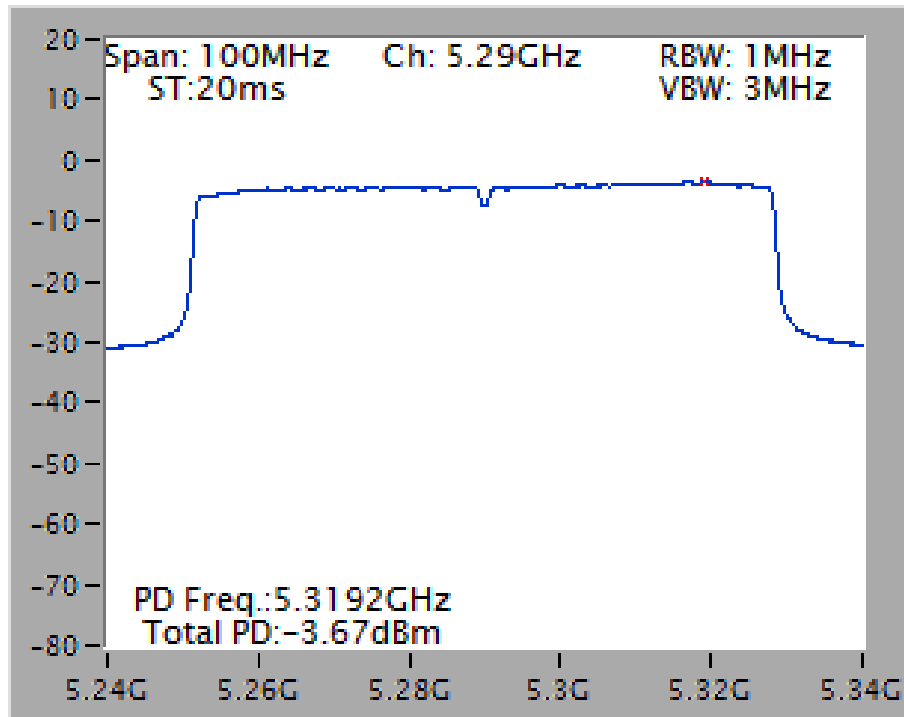


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5530 MHz / Test Mode: Mode 1 (EUT 1)

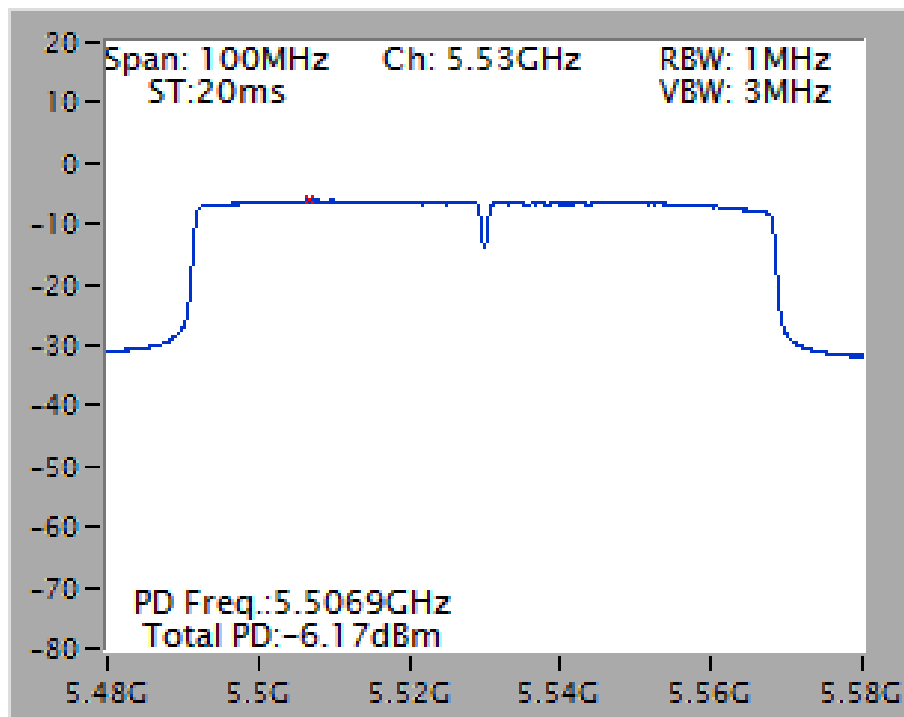


Power Density Plot on Configuration IEEE 802.11a / Ant. 1 / 5300 MHz / Test Mode: Mode 1 (EUT 1)

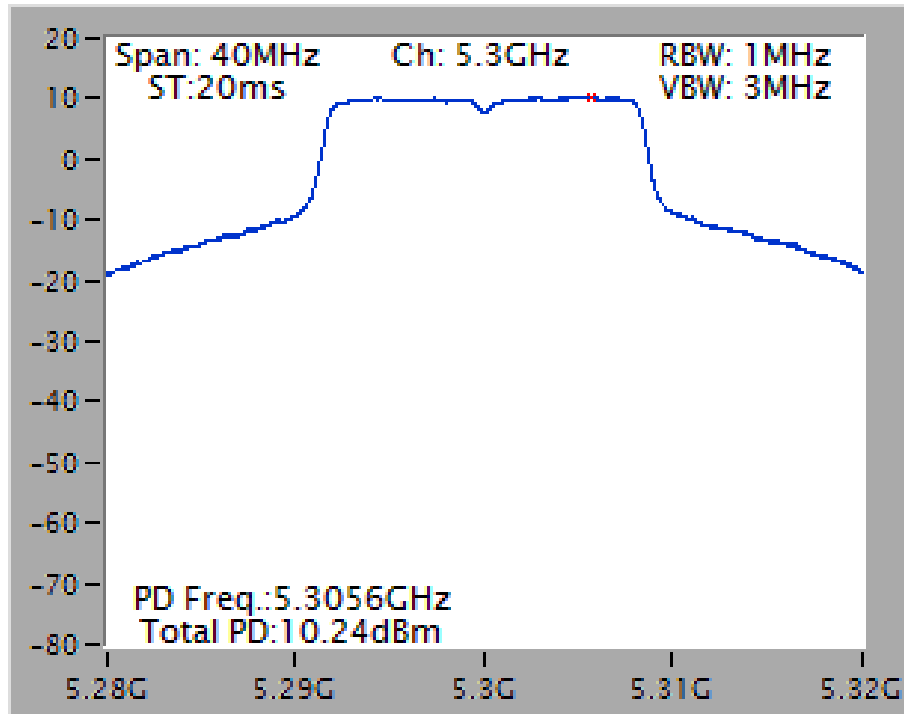


Power Density Plot on Configuration IEEE 802.11a / Ant. 1 / 5580 MHz / Test Mode: Mode 1 (EUT 1)

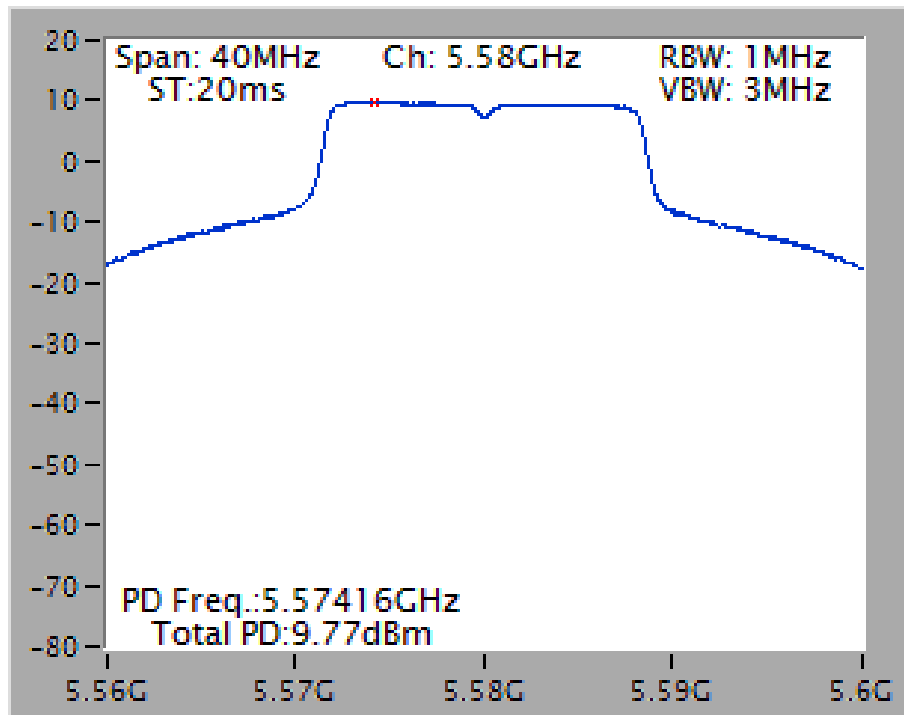


**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 /
5260 MHz / Test Mode: Mode 2 (EUT 2)**

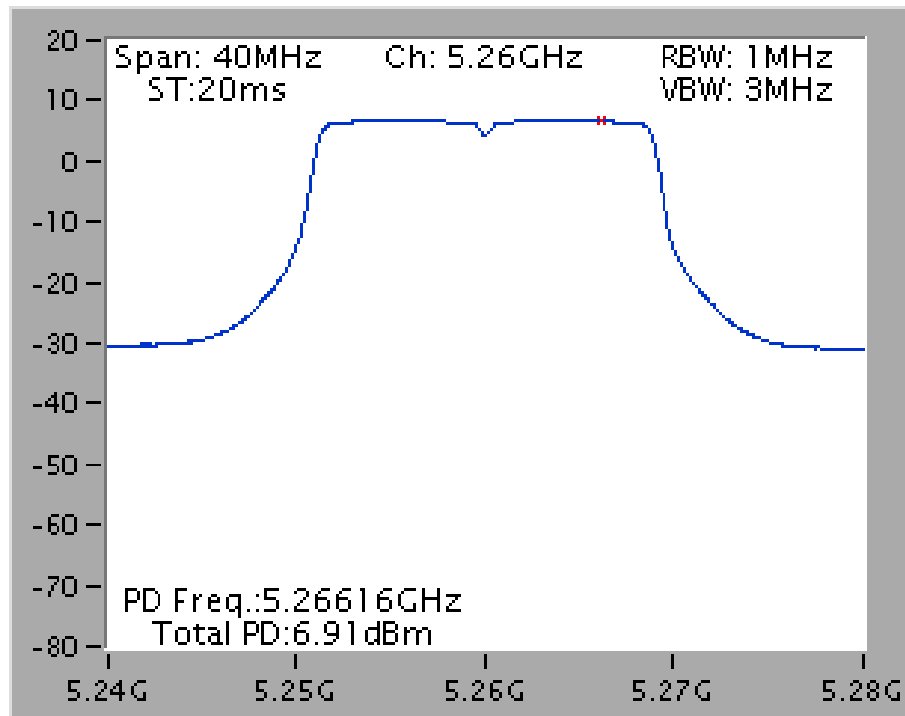


**Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 /
5580 MHz / Test Mode: Mode 2 (EUT 2)**

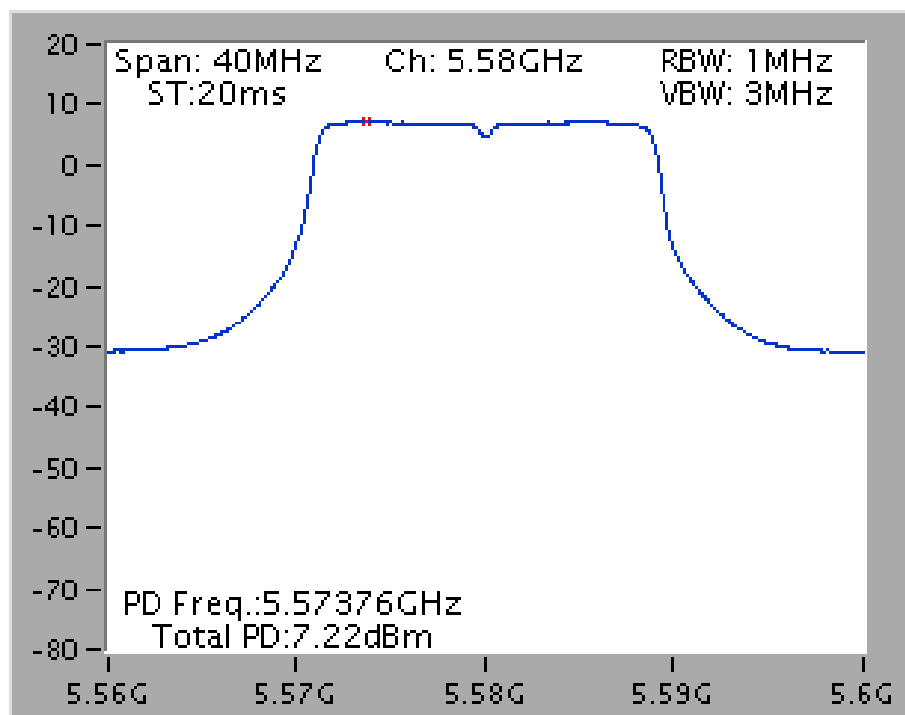


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 /
5270 MHz / Test Mode: Mode 2 (EUT 2)

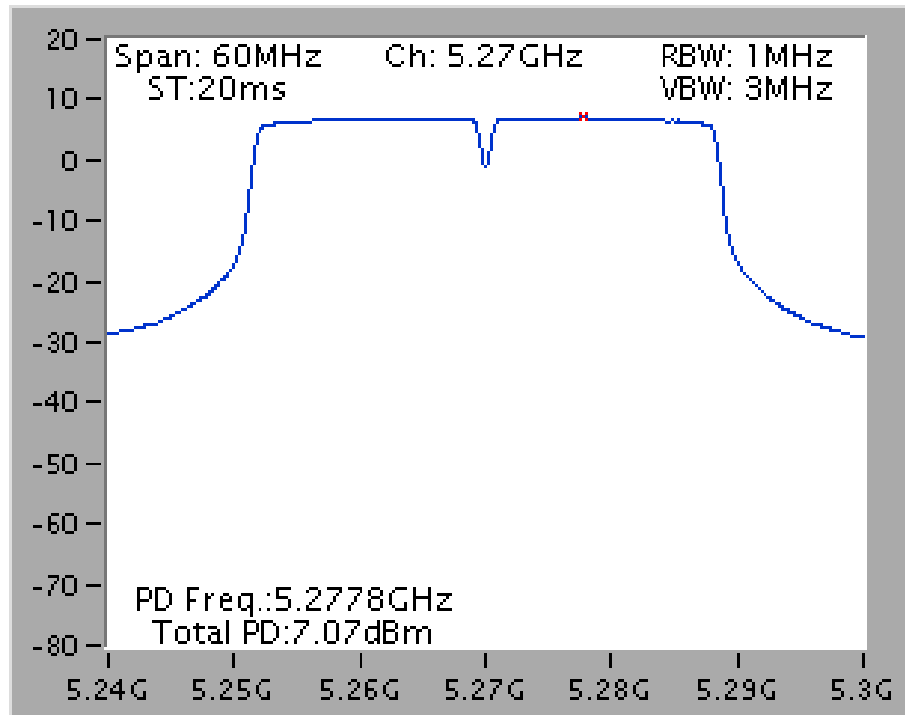


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 /
5550 MHz / Test Mode: Mode 2 (EUT 2)

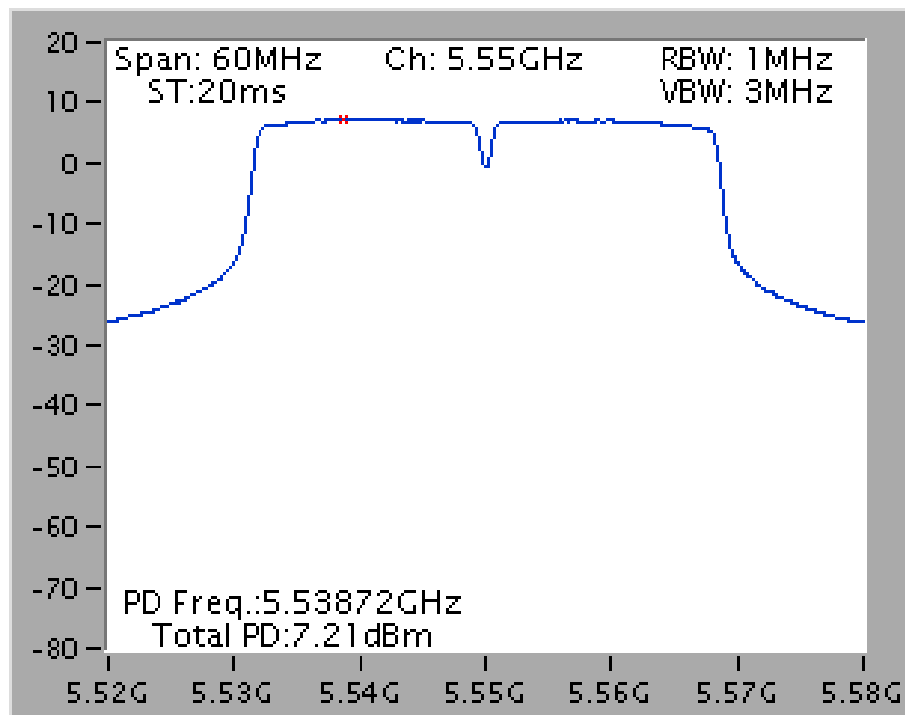


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. A + Ant. B / 5290 MHz /
Test Mode: Mode 2 (EUT 2)

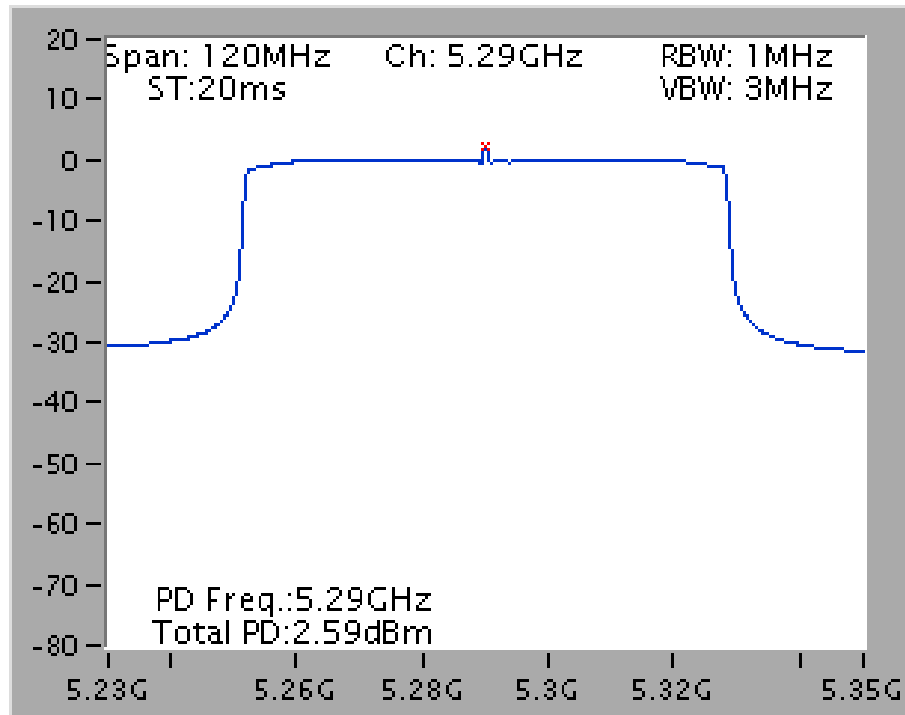


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 /
5530 MHz / Test Mode: Mode 2 (EUT 2)

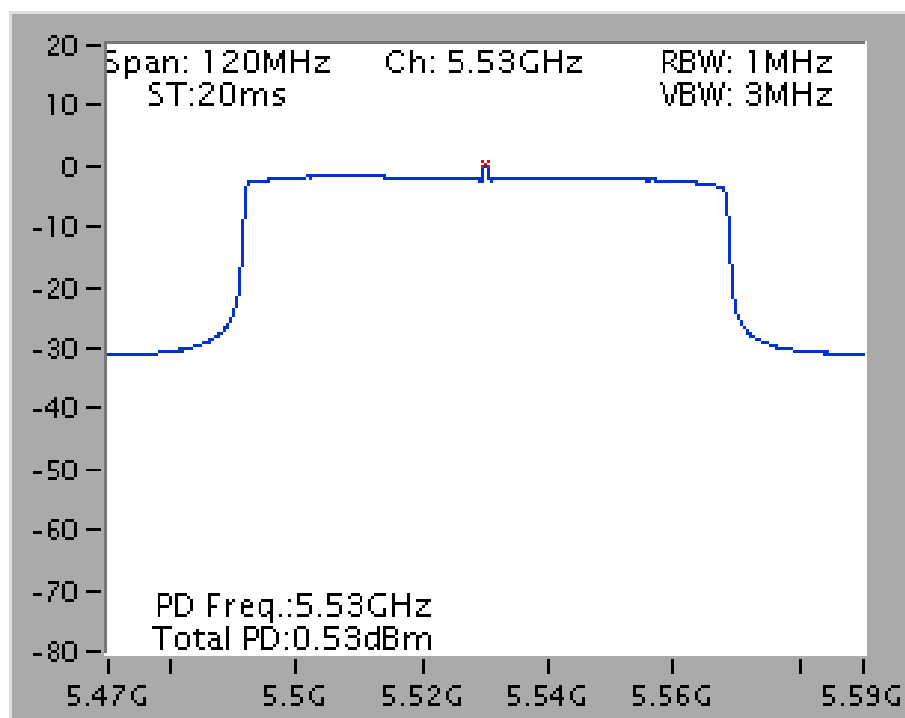

Power Density Plot on Configuration IEEE 802.11a / Ant. 1 / 5300 MHz / Test Mode: Mode 2 (EUT 2)

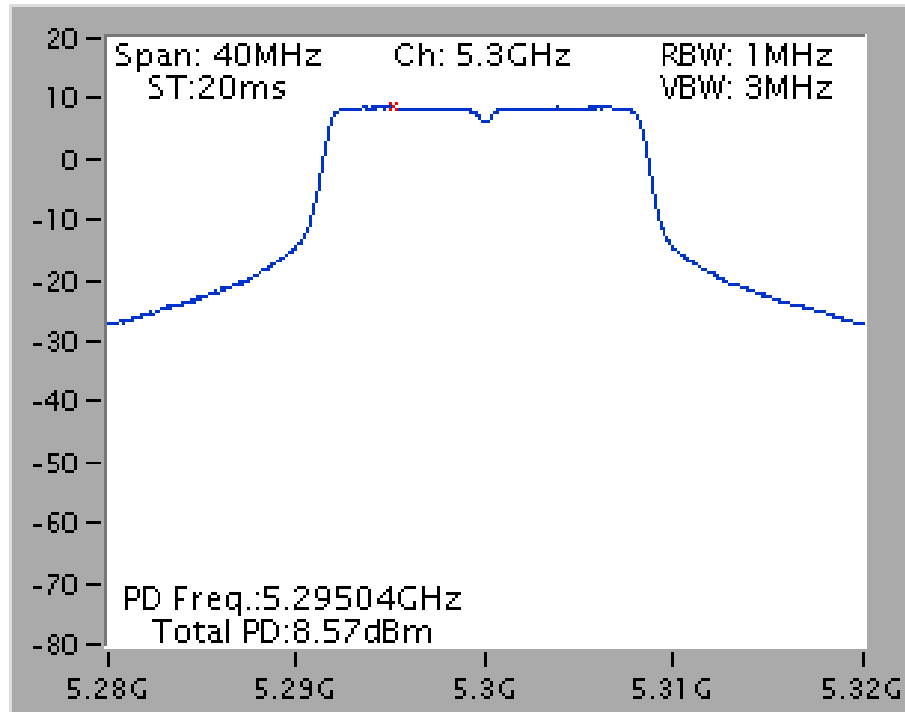

Power Density Plot on Configuration IEEE 802.11a / Ant. 1 / 5580 MHz / Test Mode: Mode 2 (EUT 2)

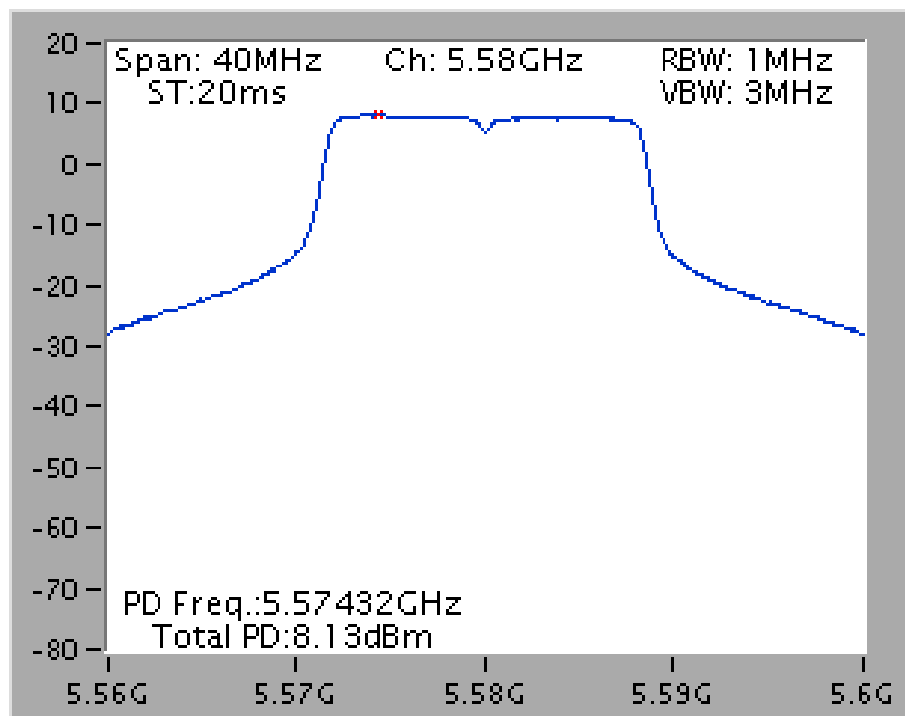

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz (Peak Trace) / 1 MHz (Average Trace)
VBW	≥ 3 MHz (Peak Trace) / ≥ 3 MHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Trace: Max hold (Peak Trace) / Trace Average Sweep Count 100 (Average Trace)
Sweep Time	AUTO

4.5.3. Test Procedures

- Trace A, Set RBW = 1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
- Delta Mark trace A Maximum frequency and trace B same frequency.
- Repeat the above procedure until measurements for all frequencies were complete.
- Testing each modulation mode on a single channel in single operating band at single output port.
All signal types need test (DSSS, OFDM). All modulation types need test (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM). All bandwidth modes need test.

4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.4.4.

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Peak Excursion

Temperature	20°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac
Test Mode	Mode 1 (EUT 1)		

Configuration IEEE 802.11ac VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5260 MHz	8.79	13	Complies
QPSK (MCS1)	5260 MHz	8.73	13	Complies
16QAM (MCS3)	5260 MHz	8.99	13	Complies
64QAM (MCS5)	5260 MHz	9.10	13	Complies
256QAM (MCS8)	5260 MHz	9.61	13	Complies
BPSK (MCS0)	5700 MHz	8.65	13	Complies
QPSK (MCS1)	5700 MHz	8.89	13	Complies
16QAM (MCS3)	5700 MHz	9.22	13	Complies
64QAM (MCS5)	5700 MHz	9.22	13	Complies
256QAM (MCS8)	5700 MHz	9.40	13	Complies

Configuration IEEE 802.11ac VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5270 MHz	8.78	13	Complies
QPSK (MCS1)	5270 MHz	8.80	13	Complies
16QAM (MCS3)	5270 MHz	9.38	13	Complies
64QAM (MCS5)	5270 MHz	9.33	13	Complies
256QAM (MCS8)	5270 MHz	9.39	13	Complies
BPSK (MCS0)	5670 MHz	8.68	13	Complies
QPSK (MCS1)	5670 MHz	9.54	13	Complies
16QAM (MCS3)	5670 MHz	9.26	13	Complies
64QAM (MCS5)	5670 MHz	9.65	13	Complies
256QAM (MCS8)	5670 MHz	9.55	13	Complies

Configuration IEEE 802.11ac VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5290 MHz	8.97	13	Complies
QPSK (MCS1)	5290 MHz	8.77	13	Complies
16QAM (MCS3)	5290 MHz	8.92	13	Complies
64QAM (MCS5)	5290 MHz	9.39	13	Complies
256QAM (MCS8)	5290 MHz	9.37	13	Complies
BPSK (MCS0)	5530 MHz	9.03	13	Complies
QPSK (MCS1)	5530 MHz	8.83	13	Complies
16QAM (MCS3)	5530 MHz	9.15	13	Complies
64QAM (MCS5)	5530 MHz	9.70	13	Complies
256QAM (MCS8)	5530 MHz	9.22	13	Complies

Temperature	20°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a
Test Mode	Mode 1 (EUT 1)		

Configuration IEEE 802.11a / Ant. 1

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (6Mbps)	5260 MHz	8.85	13	Complies
QPSK (12Mbps)	5260 MHz	9.29	13	Complies
16QAM (24Mbps)	5260 MHz	9.27	13	Complies
64QAM (48Mbps)	5260 MHz	9.51	13	Complies
BPSK (6Mbps)	5580 MHz	9.29	13	Complies
QPSK (12Mbps)	5580 MHz	9.20	13	Complies
16QAM (24Mbps)	5580 MHz	8.84	13	Complies
64QAM (48Mbps)	5580 MHz	9.33	13	Complies

Temperature	22°C	Humidity	56%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac
Test Mode	Mode 2 (EUT 2)		

Configuration IEEE 802.11ac VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5320 MHz	8.61	13	Complies
QPSK (MCS1)	5320 MHz	8.38	13	Complies
16QAM (MCS3)	5320 MHz	9.33	13	Complies
64QAM (MCS5)	5320 MHz	9.18	13	Complies
256QAM (MCS8)	5320 MHz	9.53	13	Complies
BPSK (MCS0)	5700 MHz	8.54	13	Complies
QPSK (MCS1)	5700 MHz	8.86	13	Complies
16QAM (MCS3)	5700 MHz	9.30	13	Complies
64QAM (MCS5)	5700 MHz	9.05	13	Complies
256QAM (MCS8)	5700 MHz	9.51	13	Complies

Configuration IEEE 802.11ac VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5270 MHz	8.57	13	Complies
QPSK (MCS1)	5270 MHz	9.01	13	Complies
16QAM (MCS3)	5270 MHz	10.42	13	Complies
64QAM (MCS5)	5270 MHz	10.14	13	Complies
256QAM (MCS8)	5270 MHz	9.96	13	Complies
BPSK (MCS0)	5670 MHz	8.70	13	Complies
QPSK (MCS1)	5670 MHz	8.89	13	Complies
16QAM (MCS3)	5670 MHz	9.94	13	Complies
64QAM (MCS5)	5670 MHz	9.73	13	Complies
256QAM (MCS8)	5670 MHz	9.16	13	Complies

Configuration IEEE 802.11ac VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5290 MHz	9.19	13	Complies
QPSK (MCS1)	5290 MHz	9.66	13	Complies
16QAM (MCS3)	5290 MHz	9.50	13	Complies
64QAM (MCS5)	5290 MHz	9.00	13	Complies
256QAM (MCS8)	5290 MHz	9.72	13	Complies
BPSK (MCS0)	5530 MHz	8.79	13	Complies
QPSK (MCS1)	5530 MHz	8.84	13	Complies
16QAM (MCS3)	5530 MHz	9.22	13	Complies
64QAM (MCS5)	5530 MHz	9.23	13	Complies
256QAM (MCS8)	5530 MHz	10.00	13	Complies

Temperature	22°C	Humidity	56%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a
Test Mode	Mode 2 (EUT 2)		


Configuration IEEE 802.11a / Ant. 1

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (6Mbps)	5300 MHz	8.72	13	Complies
QPSK (12Mbps)	5300 MHz	8.65	13	Complies
16QAM (24Mbps)	5300 MHz	8.77	13	Complies
64QAM (48Mbps)	5300 MHz	9.40	13	Complies
BPSK (6Mbps)	5580 MHz	8.46	13	Complies
QPSK (12Mbps)	5580 MHz	8.56	13	Complies
16QAM (24Mbps)	5580 MHz	9.50	13	Complies
64QAM (48Mbps)	5580 MHz	9.60	13	Complies

Note: All the test values were listed in the report.


For plots, only the modulation with worse result was shown.

Peak Excursion Plot on Configuration IEEE 802.11ac VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM (MCS8) / 5260 MHz / Test Mode: Mode 1 (EUT 1)

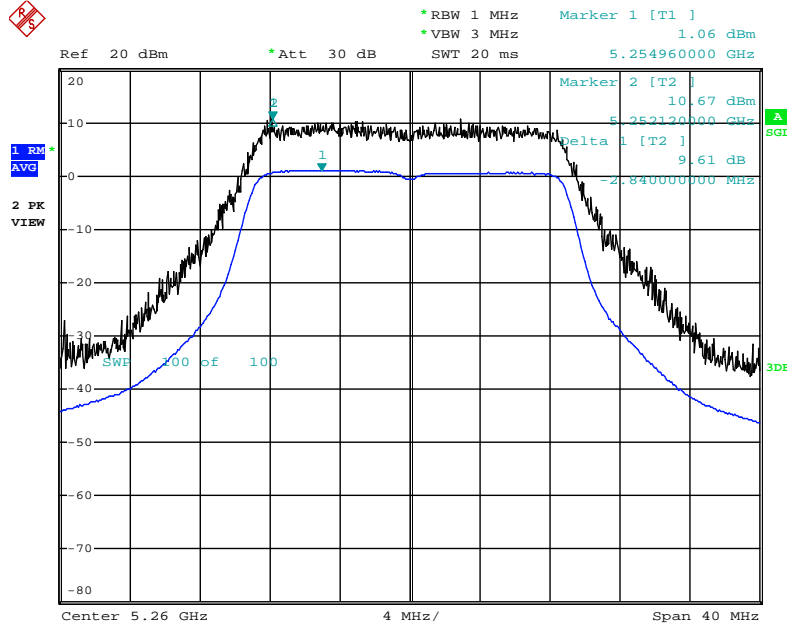


Date: 15.FEB.2014 09:55:37

Peak Excursion Plot on Configuration IEEE 802.11ac VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM (MCS8) / 5700 MHz / Test Mode: Mode 1 (EUT 1)

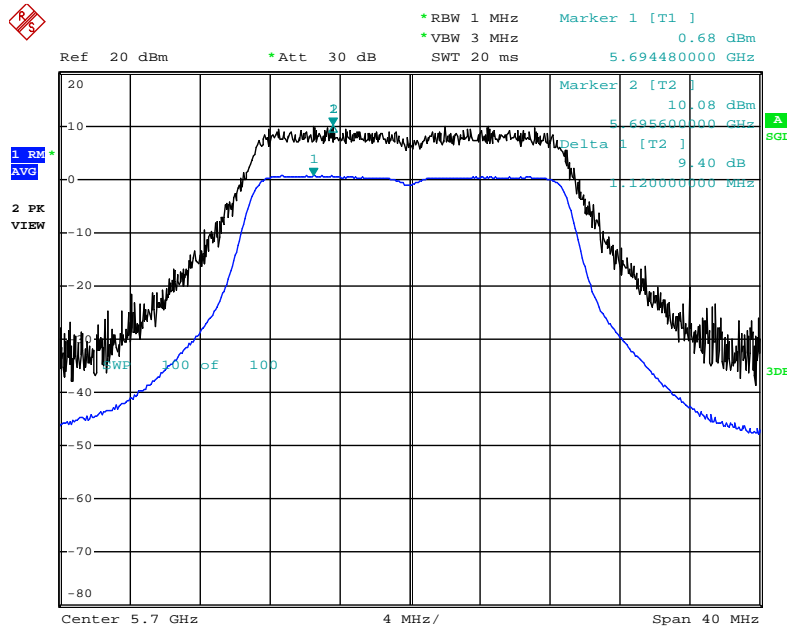


Date: 15.FEB.2014 09:58:55

Peak Excursion Plot on Configuration IEEE 802.11ac VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM (MCS8) / 5270 MHz / Test Mode: Mode 1 (EUT 1)

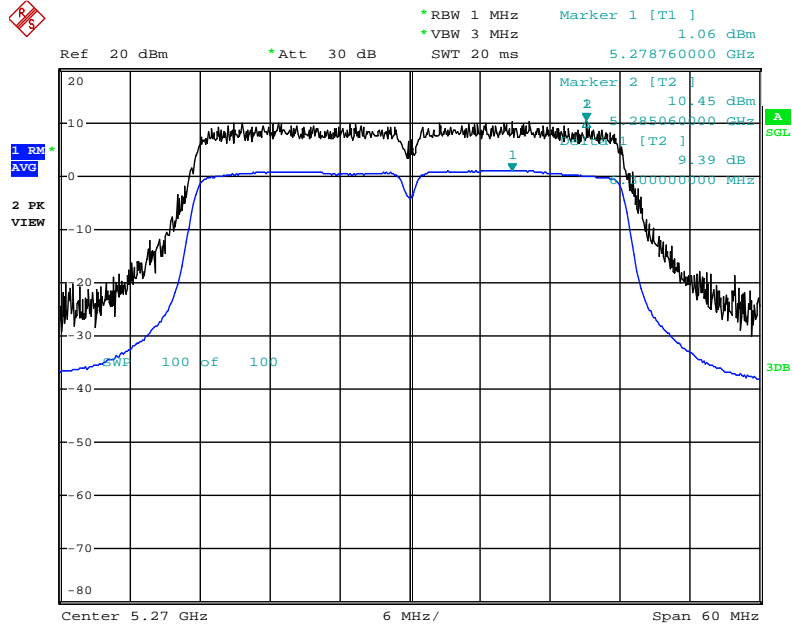


Date: 15.FEB.2014 10:28:38

Peak Excursion Plot on Configuration IEEE 802.11ac VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 64QAM (MCS5) / 5670 MHz / Test Mode: Mode 1 (EUT 1)

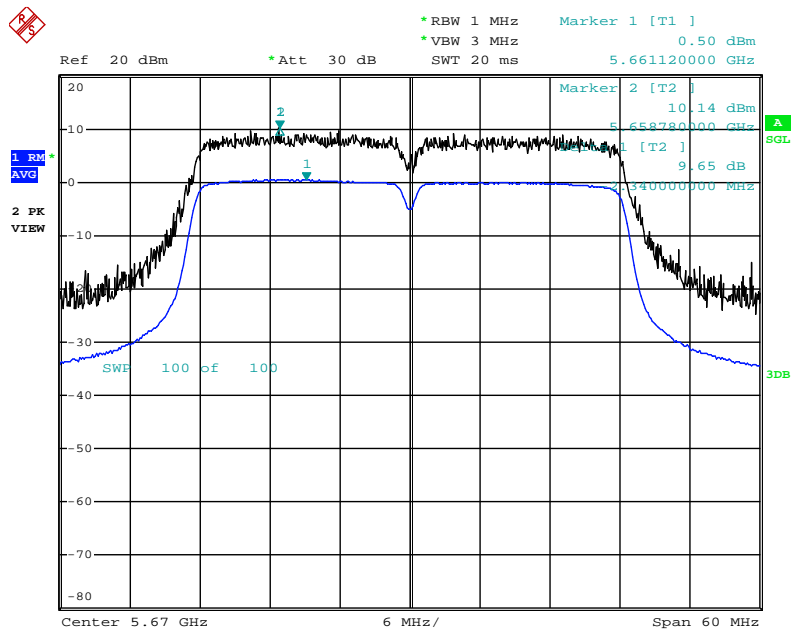


Date: 15.FEB.2014 10:30:58

Peak Excursion Plot on Configuration IEEE 802.11ac VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 64QAM (MCS5) / 5290 MHz / Test Mode: Mode 1 (EUT 1)

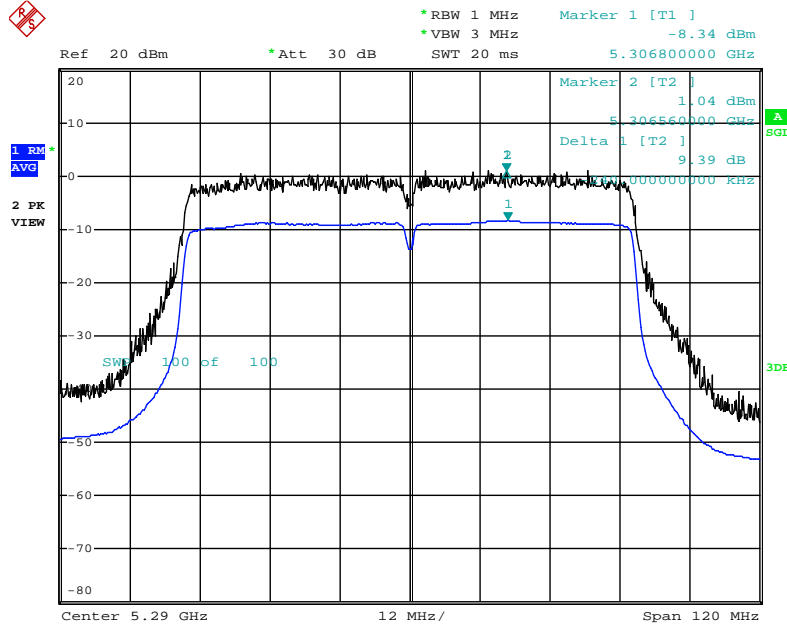


Date: 15.FEB.2014 10:41:25

Peak Excursion Plot on Configuration IEEE 802.11ac VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 64QAM (MCS5) / 5530 MHz / Test Mode: Mode 1 (EUT 1)

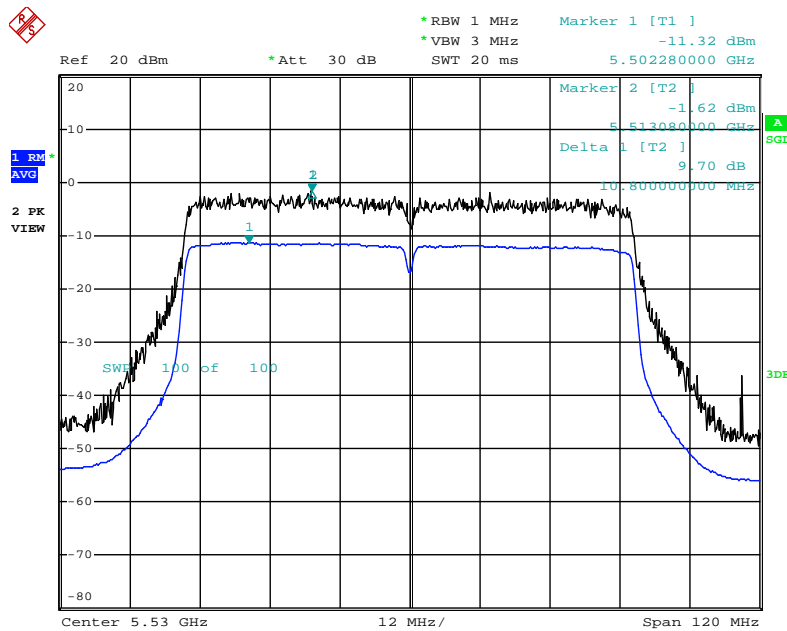


Date: 15.FEB.2014 10:45:09

**Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 1 / 64QAM (48Mbps) / 5260 MHz /
Test Mode: Mode 1 (EUT 1)**

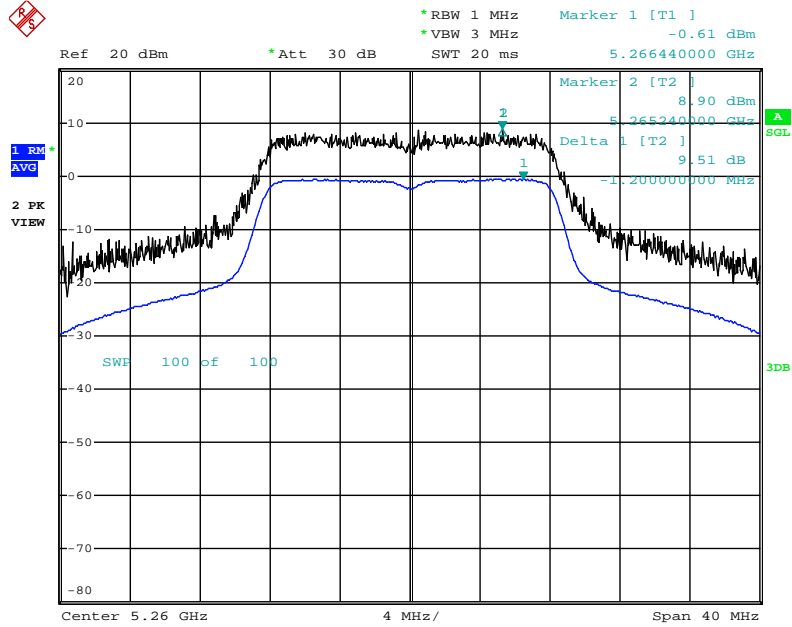


Date: 15.FEB.2014 09:39:49

**Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 1 / 64QAM (48Mbps) / 5580 MHz /
Test Mode: Mode 1 (EUT 1)**

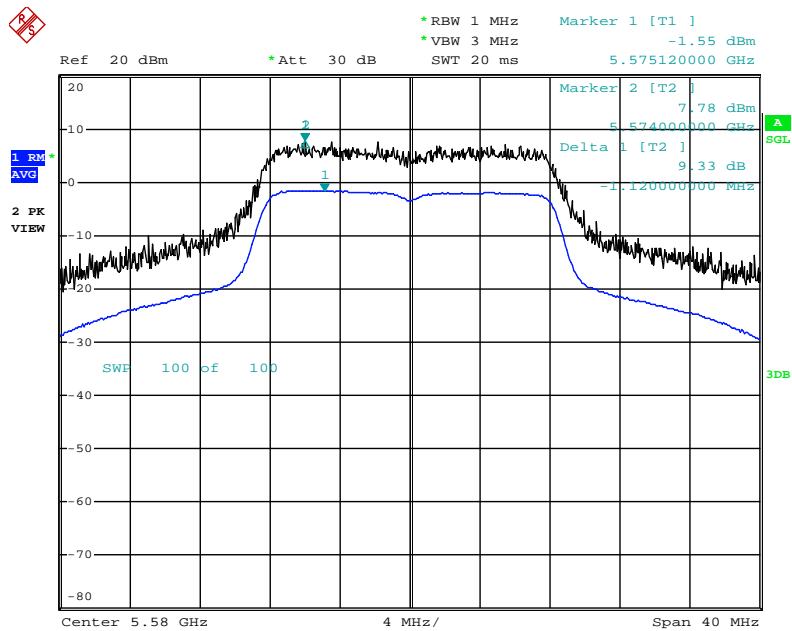


Date: 15.FEB.2014 09:43:16

Peak Excursion Plot on Configuration IEEE 802.11ac VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM (MCS8) / 5320 MHz / Test Mode: Mode 2 (EUT 2)

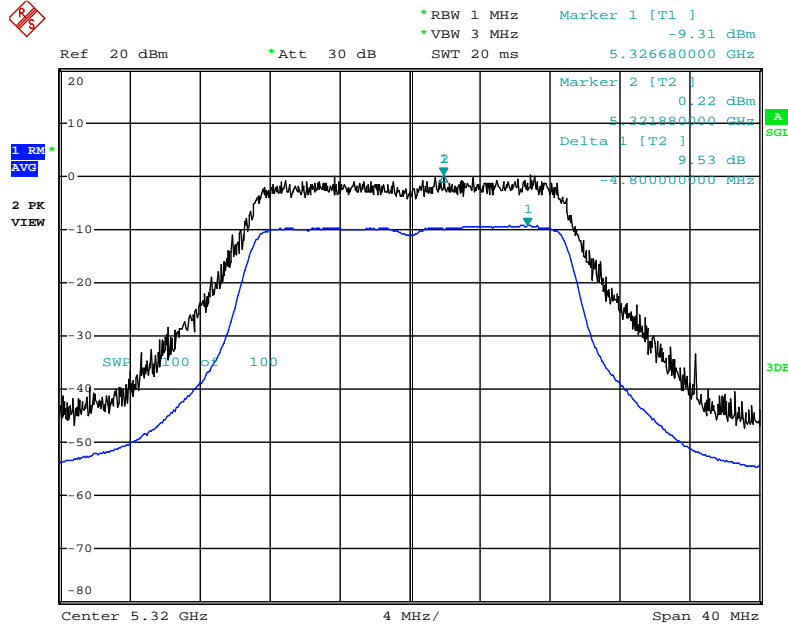


Date: 4.MAR.2014 04:12:35

Peak Excursion Plot on Configuration IEEE 802.11ac VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM (MCS8) / 5700 MHz / Test Mode: Mode 2 (EUT 2)

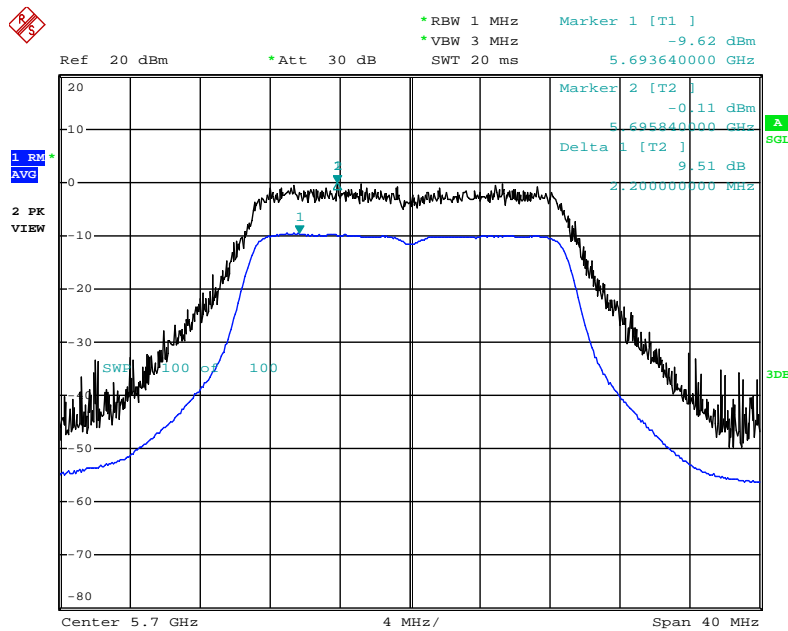


Date: 4.MAR.2014 04:15:36

Peak Excursion Plot on Configuration IEEE 802.11ac VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 16QAM (MCS3) / 5270 MHz / Test Mode: Mode 2 (EUT 2)

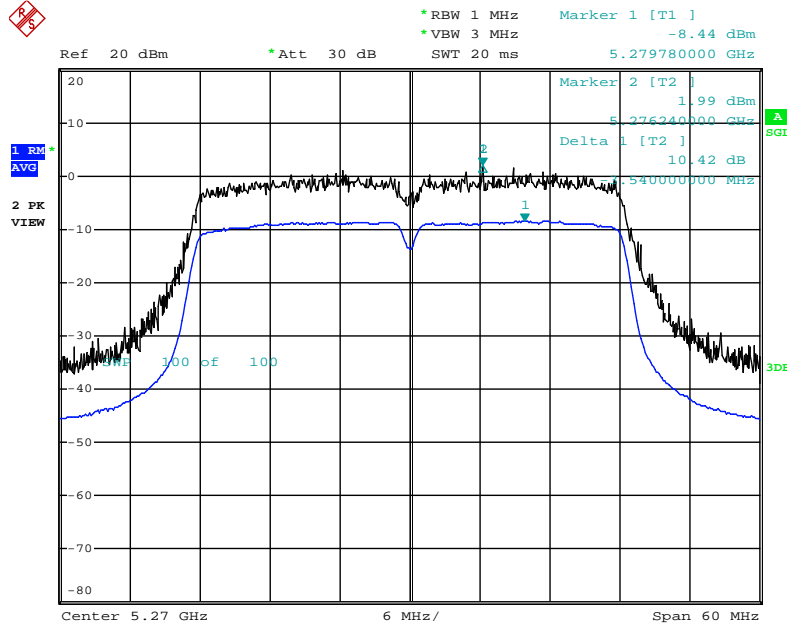


Date: 4.MAR.2014 04:23:32

Peak Excursion Plot on Configuration IEEE 802.11ac VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 16QAM (MCS3) / 5670 MHz / Test Mode: Mode 2 (EUT 2)

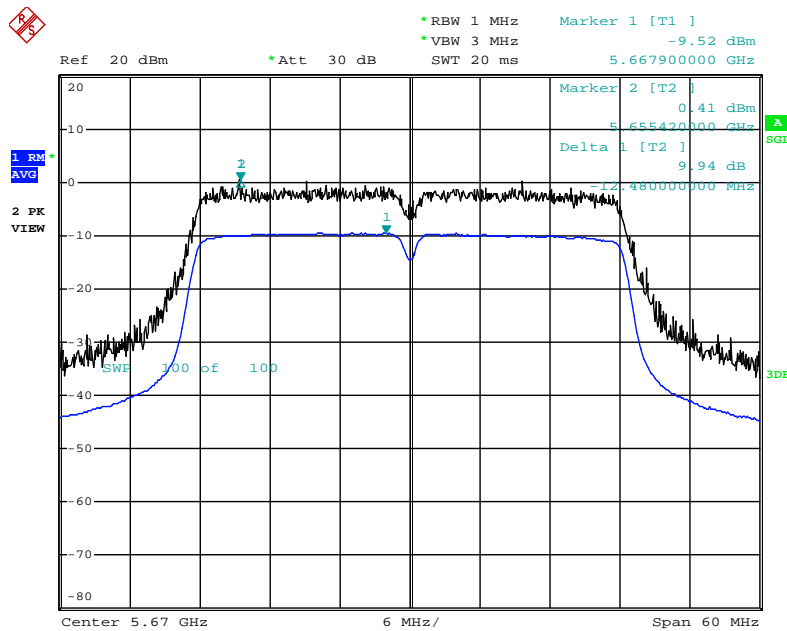


Date: 4.MAR.2014 04:26:45

Peak Excursion Plot on Configuration IEEE 802.11ac VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM (MCS8) / 5290 MHz / Test Mode: Mode 2 (EUT 2)

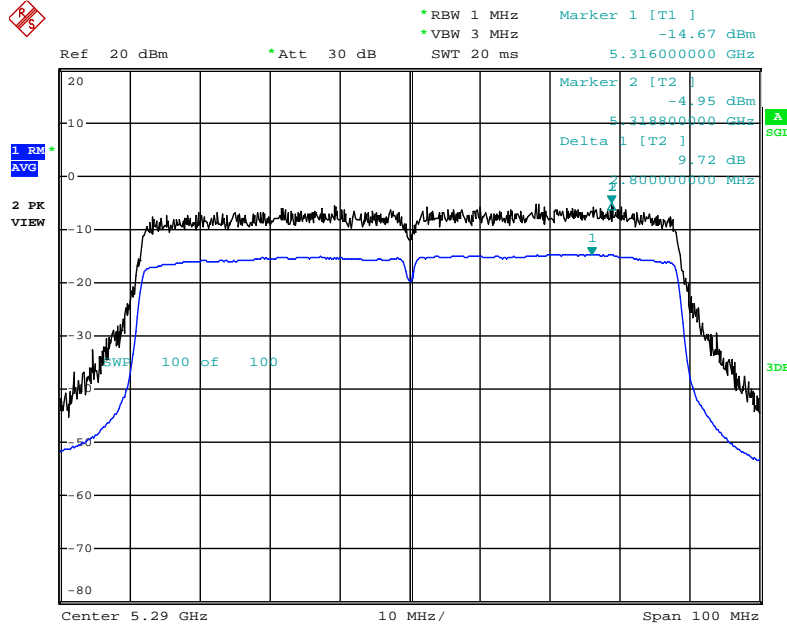


Date: 4.MAR.2014 04:44:17

Peak Excursion Plot on Configuration IEEE 802.11ac VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM (MCS8) / 5530 MHz / Test Mode: Mode 2 (EUT 2)

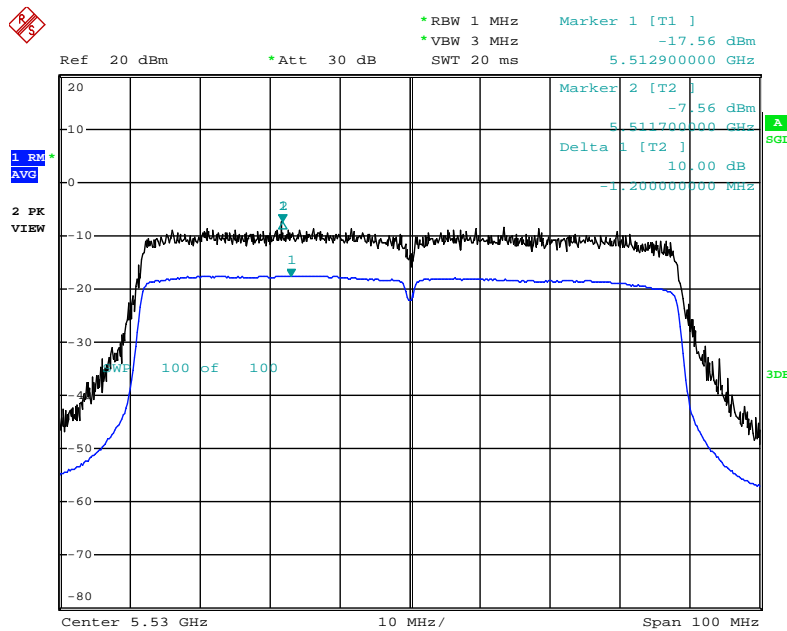


Date: 4.MAR.2014 04:48:26

**Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 1 / 64QAM (48Mbps) / 5300 MHz /
Test Mode: Mode 2 (EUT 2)**

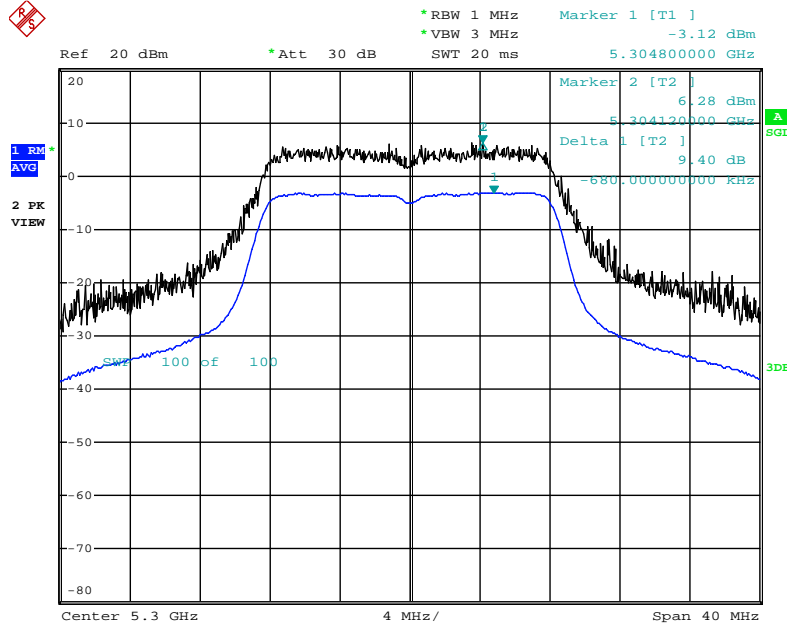

Date: 4.MAR.2014 04:03:22

**Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 1 / 64QAM (48Mbps) / 5580 MHz /
Test Mode: Mode 2 (EUT 2)**

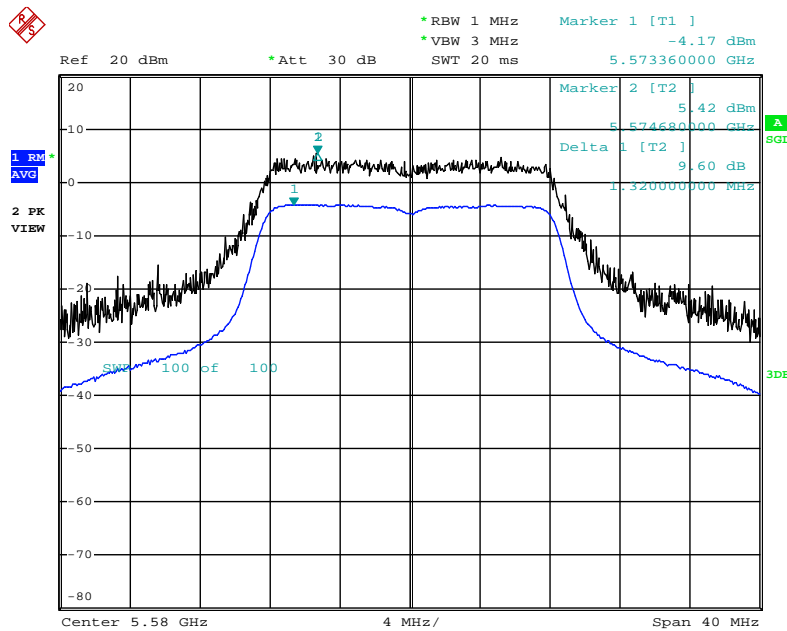

Date: 4.MAR.2014 04:05:54

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

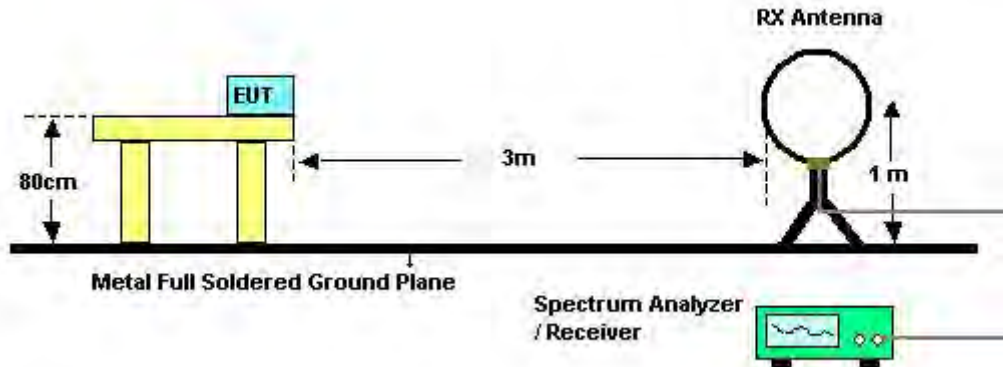

For Radiated Emissions: 30MHz~1GHz

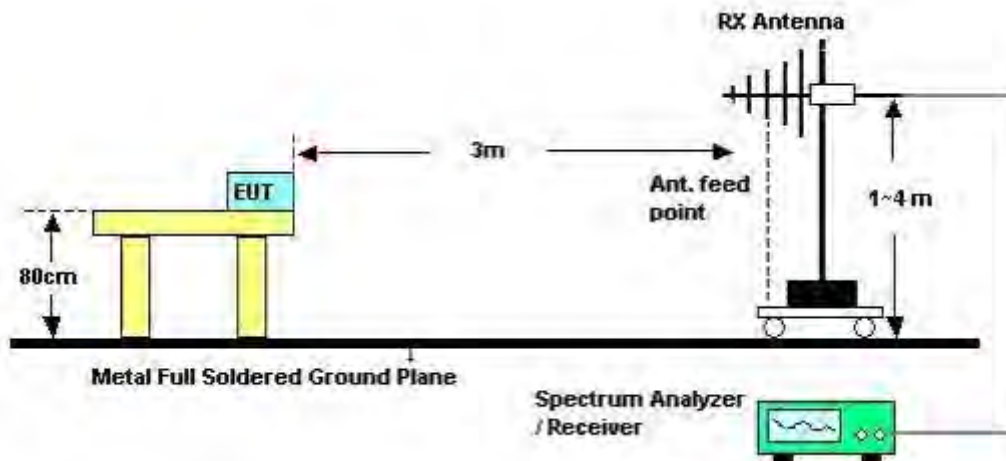

For Radiated Emissions: Above 1GHz

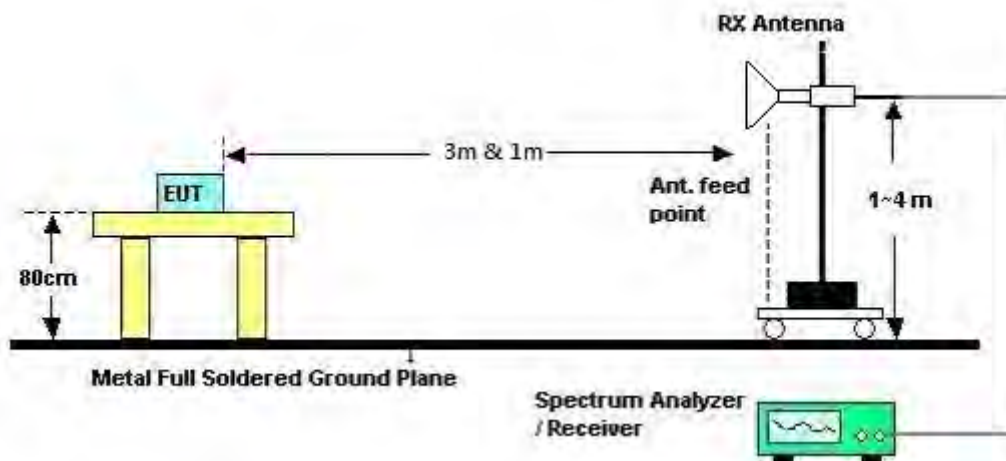

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	Normal Link
Test Date	Feb. 05, 2014		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	Normal Link
Test Mode	Mode 1		

Horizontal

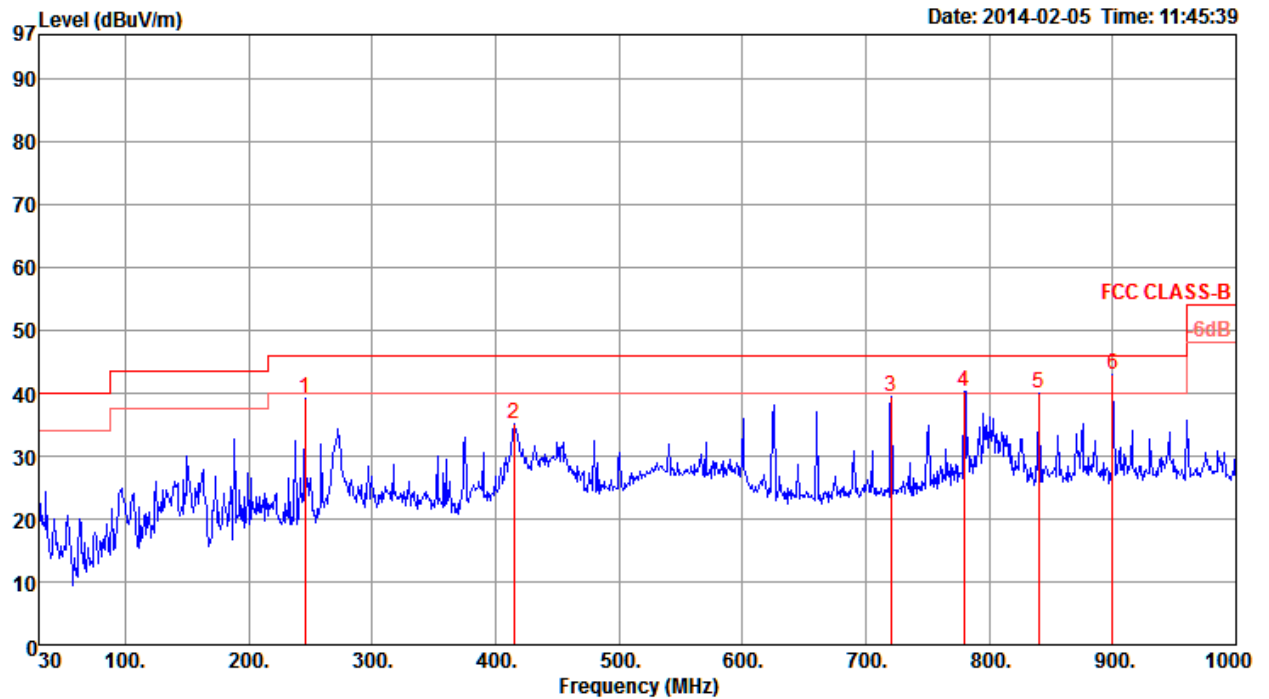

	Freq	Level	Limit	Over	Read	Cable	Preamp		Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	245.34	39.28	46.00	-6.72	51.36	2.34	26.96	-12.08	Peak	0	400	HORIZONTAL
2	415.09	35.23	46.00	-10.77	43.13	3.06	27.61	-7.90	Peak	0	400	HORIZONTAL
3	720.64	39.53	46.00	-6.47	42.37	4.18	27.10	-2.84	Peak	0	400	HORIZONTAL
4	779.81	40.25	46.00	-5.75	42.37	4.30	26.98	-2.12	Peak	0	400	HORIZONTAL
5	839.95	40.10	46.00	-5.90	41.46	4.42	26.90	-1.36	Peak	0	400	HORIZONTAL
6	900.09	42.92	46.00	-3.08	43.65	4.60	26.83	-0.73	Peak	0	400	HORIZONTAL

Vertical

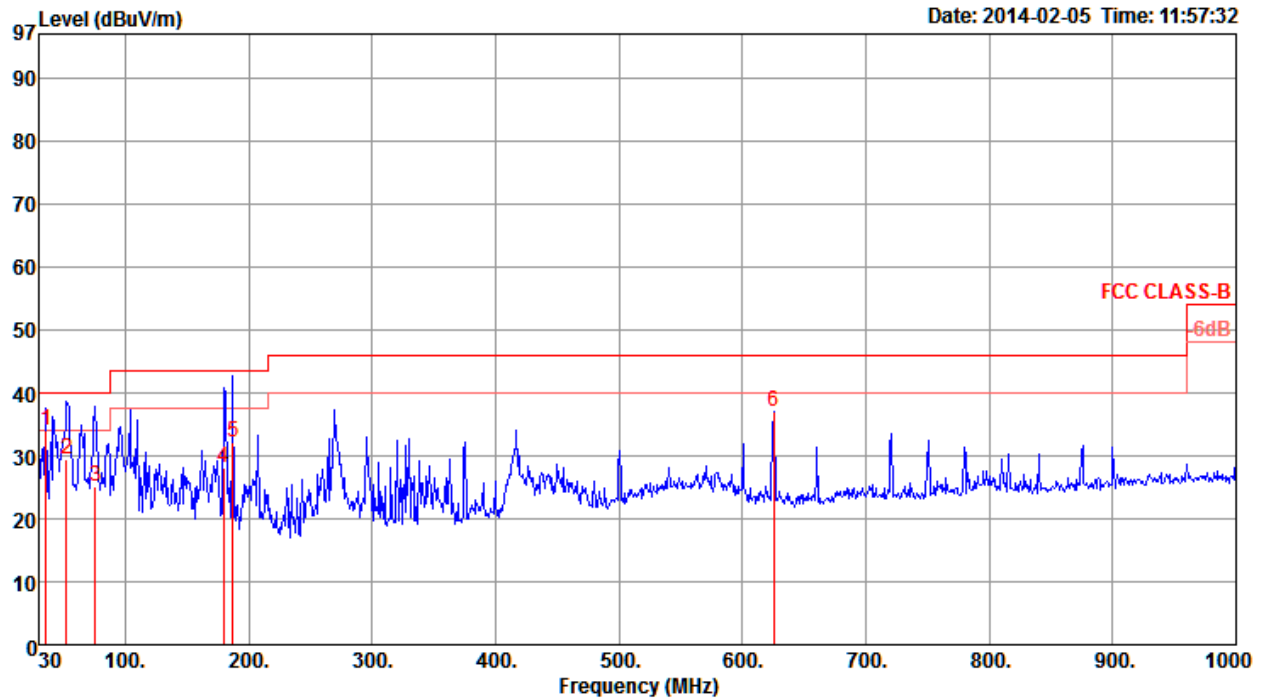

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	35.82	34.05	40.00	-5.95	44.86	0.93	28.00	-10.81	QP	307	100	VERTICAL
2	52.31	29.53	40.00	-10.47	48.01	1.09	27.91	-18.48	QP	162	100	VERTICAL
3	75.59	25.20	40.00	-14.80	44.64	1.30	27.92	-19.44	QP	69	100	VERTICAL
4	179.38	28.19	43.50	-15.31	43.64	2.00	27.39	-15.45	QP	327	100	VERTICAL
5	187.14	32.16	43.50	-11.34	47.62	2.04	27.33	-15.46	Peak	250	100	VERTICAL
6	625.58	37.13	46.00	-8.87	41.44	3.82	27.58	-4.31	Peak	0	400	VERTICAL

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	Normal Link
Test Mode	Mode 4		

Horizontal

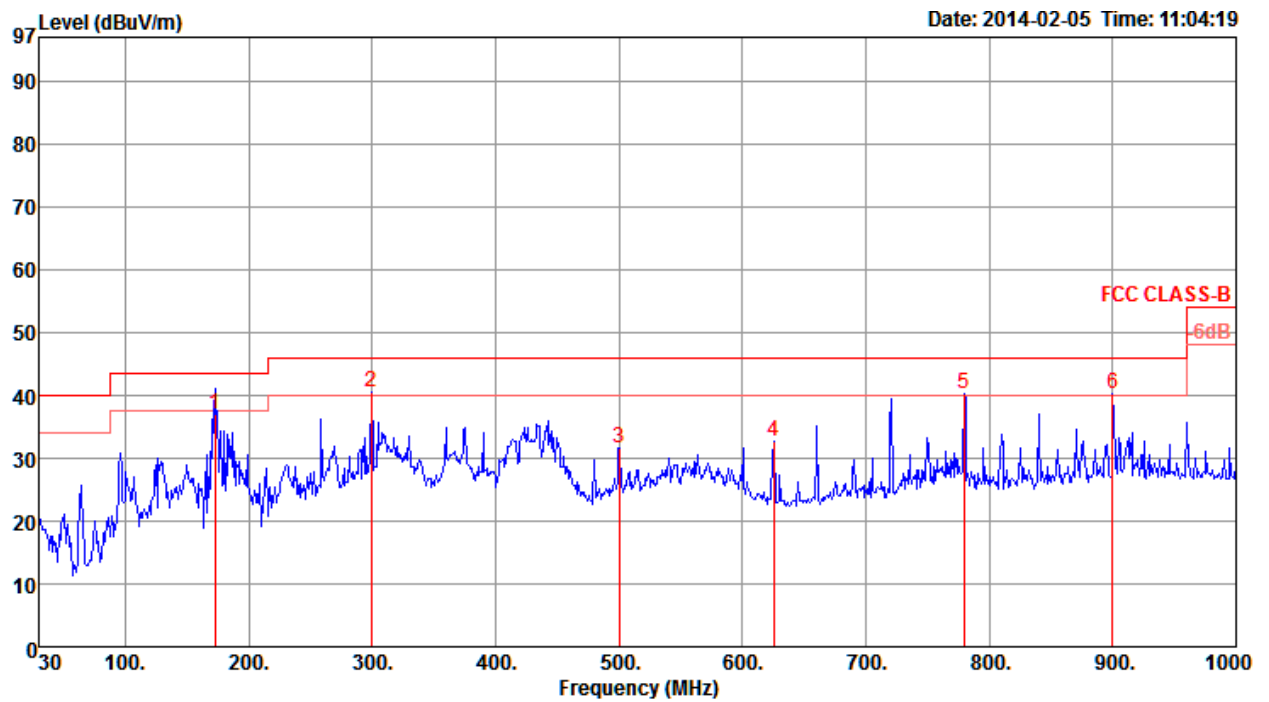

	Freq	Level	Limit	Over	Read	Cable	Preamp		Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	172.59	37.05	43.50	-6.45	52.30	1.96	27.40	-15.25	QP	192	100	HORIZONTAL
2	299.66	40.62	46.00	-5.38	51.14	2.51	26.83	-10.52	Peak	0	400	HORIZONTAL
3	500.45	31.64	46.00	-14.36	38.39	3.38	27.93	-6.75	Peak	0	400	HORIZONTAL
4	625.58	32.58	46.00	-13.42	36.89	3.82	27.58	-4.31	Peak	0	400	HORIZONTAL
5	779.81	40.36	46.00	-5.64	42.48	4.30	26.98	-2.12	Peak	0	400	HORIZONTAL
6	900.09	40.39	46.00	-5.61	41.12	4.60	26.83	-0.73	Peak	0	400	HORIZONTAL

Vertical

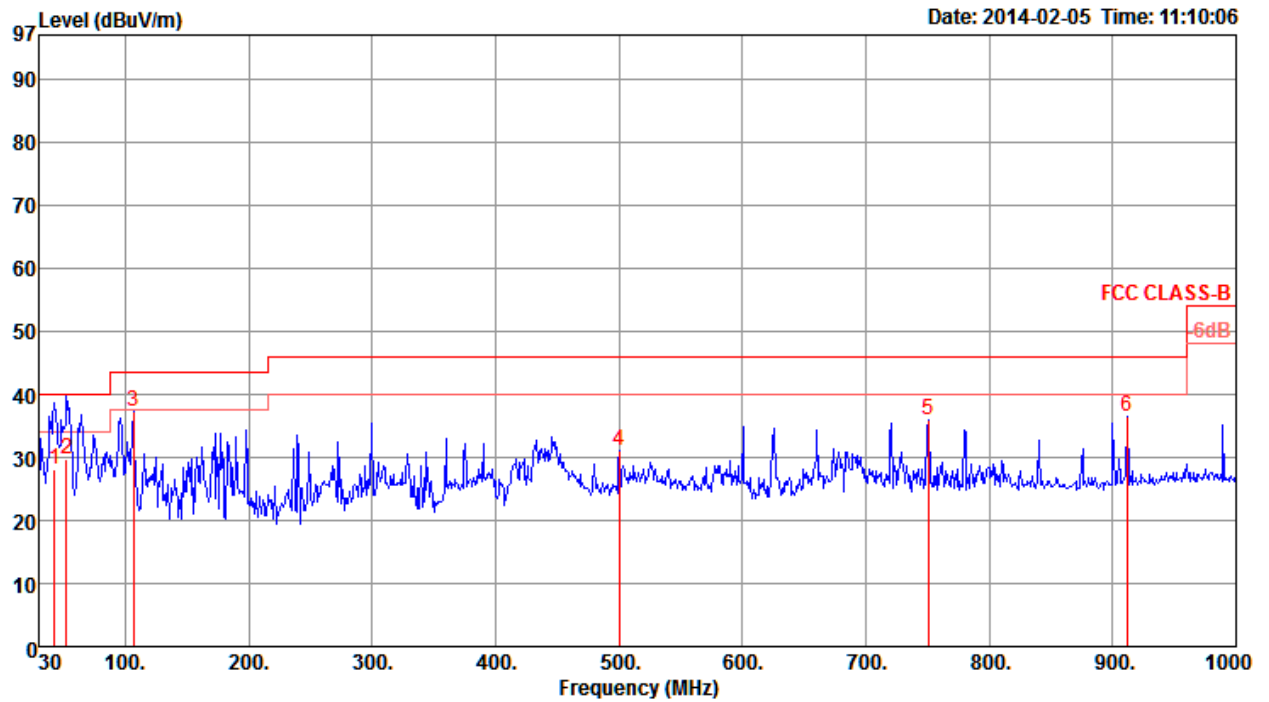

	Freq	Level	Limit	Over	Read	Cable	Preamp	Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	42.61	27.97	40.00	-12.03	42.97	1.00	27.96	-15.00	QP	253	100	VERTICAL
2	52.31	29.72	40.00	-10.28	48.20	1.09	27.91	-18.48	QP	184	100	VERTICAL
3	106.63	37.26	43.50	-6.24	51.23	1.55	27.76	-13.97	Peak	0	100	VERTICAL
4	500.45	30.99	46.00	-15.01	37.74	3.38	27.93	-6.75	Peak	0	100	VERTICAL
5	750.71	35.90	46.00	-10.10	38.60	4.21	27.12	-2.70	Peak	0	100	VERTICAL
6	911.73	36.45	46.00	-9.55	36.96	4.65	26.75	-0.51	Peak	0	100	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 52 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15780.51	61.37	74.00	-12.63	53.24	6.14	37.41	35.42	Peak	112	127	HORIZONTAL
2	15781.38	47.12	54.00	-6.88	38.99	6.14	37.41	35.42	Average	112	127	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15774.13	62.62	74.00	-11.38	54.48	6.14	37.42	35.42	Peak	100	191	VERTICAL
2	15775.06	48.32	54.00	-5.68	40.18	6.14	37.42	35.42	Average	100	191	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 60 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10599.62	44.94	54.00	-9.06	36.97	5.01	38.38	35.42	Average	100	224	HORIZONTAL
2	10599.71	59.91	74.00	-14.09	51.94	5.01	38.38	35.42	Peak	100	224	HORIZONTAL
3	15898.78	54.60	74.00	-19.40	46.60	6.15	37.29	35.44	Peak	100	132	HORIZONTAL
4	15900.03	41.28	54.00	-12.72	33.28	6.15	37.29	35.44	Average	100	132	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10600.35	39.10	54.00	-14.90	31.13	5.01	38.38	35.42	Average	100	192	VERTICAL
2	10600.54	52.36	74.00	-21.64	44.39	5.01	38.38	35.42	Peak	100	192	VERTICAL
3	15894.23	56.20	74.00	-17.80	48.19	6.15	37.30	35.44	Peak	100	178	VERTICAL
4	15894.39	41.53	54.00	-12.47	33.52	6.15	37.30	35.44	Average	100	178	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 64 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10639.17	39.50	54.00	-14.50	31.51	5.01	38.37	35.39	Average	100	216	HORIZONTAL
2	10639.74	53.16	74.00	-20.84	45.17	5.01	38.37	35.39	Peak	100	216	HORIZONTAL
3	15962.79	38.09	54.00	-15.91	30.15	6.15	37.23	35.44	Average	100	152	HORIZONTAL
4	15965.10	50.46	74.00	-23.54	42.53	6.15	37.22	35.44	Peak	100	152	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10637.02	50.71	74.00	-23.29	42.72	5.01	38.37	35.39	Peak	100	161	VERTICAL
2	10639.29	37.80	54.00	-16.20	29.81	5.01	38.37	35.39	Average	100	161	VERTICAL
3	15954.84	38.34	54.00	-15.66	30.40	6.15	37.23	35.44	Average	100	247	VERTICAL
4	15963.43	51.61	74.00	-22.39	43.67	6.15	37.23	35.44	Peak	100	247	VERTICAL



Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 100 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10995.87	53.75	74.00	-20.25	45.52	5.01	38.32	35.10	Peak	100	214	HORIZONTAL
2	10998.56	41.35	54.00	-12.65	33.12	5.01	38.32	35.10	Average	100	214	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10997.85	50.55	74.00	-23.45	42.34	5.01	38.30	35.10	Peak	100	115	VERTICAL
2	11000.54	38.36	54.00	-15.64	30.15	5.01	38.30	35.10	Average	100	115	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 116 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11155.96	59.38	74.00	-14.62	51.05	5.04	38.45	35.16	Peak	100	139	HORIZONTAL
2	11156.03	44.88	54.00	-9.12	36.55	5.04	38.45	35.16	Average	100	139	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11156.99	55.33	74.00	-18.67	47.00	5.04	38.45	35.16	Peak	100	341	VERTICAL
2	11157.12	41.14	54.00	-12.86	32.81	5.04	38.45	35.16	Average	100	341	VERTICAL



Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 140 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11392.18	39.59	54.00	-14.41	31.06	5.10	38.68	35.25	Average	100	147	HORIZONTAL
2	11392.31	52.85	74.00	-21.15	44.32	5.10	38.68	35.25	Peak	100	147	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11394.58	38.30	54.00	-15.70	29.77	5.10	38.68	35.25	Average	100	236	VERTICAL
2	11406.31	50.19	74.00	-23.81	41.64	5.10	38.70	35.25	Peak	100	236	VERTICAL



Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 54 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15791.54	38.44	54.00	-15.56	30.31	6.14	37.41	35.42	Average	100	96	HORIZONTAL
2	15823.53	50.21	74.00	-23.79	42.14	6.14	37.37	35.44	Peak	100	96	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15805.64	51.23	74.00	-22.77	43.13	6.14	37.39	35.43	Peak	100	192	VERTICAL
2	15824.68	38.64	54.00	-15.36	30.57	6.14	37.37	35.44	Average	100	192	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 62 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10617.69	38.09	54.00	-15.91	30.12	5.01	38.38	35.42	Average	100	86	HORIZONTAL
2	10623.85	50.21	74.00	-23.79	42.21	5.01	38.38	35.39	Peak	100	86	HORIZONTAL
3	15910.64	51.54	74.00	-22.46	43.54	6.15	37.29	35.44	Peak	100	226	HORIZONTAL
4	15949.04	38.32	54.00	-15.68	30.38	6.15	37.23	35.44	Average	100	226	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10604.81	50.03	74.00	-23.97	42.06	5.01	38.38	35.42	Peak	100	259	VERTICAL
2	10626.15	37.68	54.00	-16.32	29.68	5.01	38.38	35.39	Average	100	259	VERTICAL
3	15932.82	51.08	74.00	-22.92	43.12	6.15	37.25	35.44	Peak	100	309	VERTICAL
4	15941.47	38.30	54.00	-15.70	30.34	6.15	37.25	35.44	Average	100	309	VERTICAL



Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 102 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11015.26	38.49	54.00	-15.51	30.25	5.02	38.33	35.11	Average	100	302	HORIZONTAL
2	11023.59	50.10	74.00	-23.90	41.85	5.02	38.34	35.11	Peak	100	302	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11017.50	37.63	54.00	-16.37	29.40	5.02	38.32	35.11	Average	100	178	VERTICAL
2	11036.73	50.15	74.00	-23.85	41.92	5.02	38.33	35.12	Peak	100	178	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 110 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11095.71	41.35	54.00	-12.65	33.06	5.03	38.40	35.14	Average	100	214	HORIZONTAL
2	11097.31	53.20	74.00	-20.80	44.91	5.03	38.40	35.14	Peak	100	214	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11095.32	38.08	54.00	-15.92	29.79	5.03	38.40	35.14	Average	100	110	VERTICAL
2	11096.47	50.63	74.00	-23.37	42.34	5.03	38.40	35.14	Peak	100	110	VERTICAL



Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 134 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11332.37	40.41	54.00	-13.59	31.93	5.08	38.63	35.23	Average	100	212	HORIZONTAL
2	11352.50	53.21	74.00	-20.79	44.71	5.09	38.65	35.24	Peak	100	212	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	11346.09	50.84	74.00	-23.16	42.34	5.09	38.65	35.24	Peak	100	159	VERTICAL
2	11349.10	38.27	54.00	-15.73	29.77	5.09	38.65	35.24	Average	100	159	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT80 CH 58 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15865.51	38.33	54.00	-15.67	30.32	6.14	37.32	35.45	Average	100	134	HORIZONTAL
2	15888.97	51.35	74.00	-22.65	43.34	6.15	37.30	35.44	Peak	100	134	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15883.46	38.37	54.00	-15.63	30.36	6.15	37.30	35.44	Average	100	244	VERTICAL
2	15907.95	50.83	74.00	-23.17	42.83	6.15	37.29	35.44	Peak	100	244	VERTICAL



Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT80 CH 106 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11027.18	37.72	54.00	-16.28	29.47	5.02	38.34	35.11	Average	100	251	HORIZONTAL
2	11037.95	50.20	74.00	-23.80	41.96	5.02	38.34	35.12	Peak	100	251	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11037.82	50.58	74.00	-23.42	42.35	5.02	38.33	35.12	Peak	100	128	VERTICAL
2	11041.67	37.76	54.00	-16.24	29.51	5.02	38.35	35.12	Average	100	128	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 52 / Ant. 1
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15776.79	40.32	54.00	-13.68	32.19	6.14	37.41	35.42	Average	100	129 HORIZONTAL
2	15782.56	54.67	74.00	-19.33	46.54	6.14	37.41	35.42	Peak	100	129 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15777.34	41.37	54.00	-12.63	33.24	6.14	37.41	35.42	Average	100	190 VERTICAL
2	15781.35	55.25	74.00	-18.75	47.12	6.14	37.41	35.42	Peak	100	190 VERTICAL



Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 60 / Ant. 1
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10601.15	40.85	54.00	-13.15	32.88	5.01	38.38	35.42	Average	100	219	HORIZONTAL
2	10605.71	53.56	74.00	-20.44	45.59	5.01	38.38	35.42	Peak	100	219	HORIZONTAL
3	15891.03	50.89	74.00	-23.11	42.88	6.15	37.30	35.44	Peak	100	310	HORIZONTAL
4	15896.15	39.22	54.00	-14.78	31.22	6.15	37.29	35.44	Average	100	310	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10601.25	51.71	74.00	-22.29	43.74	5.01	38.38	35.42	Peak	100	44	VERTICAL
2	10602.88	39.28	54.00	-14.72	31.31	5.01	38.38	35.42	Average	100	44	VERTICAL
3	15896.54	40.75	54.00	-13.25	32.75	6.15	37.29	35.44	Average	100	188	VERTICAL
4	15899.74	54.06	74.00	-19.94	46.06	6.15	37.29	35.44	Peak	100	188	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 64 / Ant. 1
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	10640.77	37.78	54.00	-16.22	29.79	5.01	38.37	35.39	Average	100	328	HORIZONTAL
2	10647.05	50.60	74.00	-23.40	42.61	5.01	38.37	35.39	Peak	100	328	HORIZONTAL
3	15952.95	50.90	74.00	-23.10	42.96	6.15	37.23	35.44	Peak	100	160	HORIZONTAL
4	15966.57	38.30	54.00	-15.70	30.37	6.15	37.22	35.44	Average	100	160	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	10634.71	37.40	54.00	-16.60	29.41	5.01	38.37	35.39	Average	100	176	VERTICAL
2	10635.06	50.17	74.00	-23.83	42.18	5.01	38.37	35.39	Peak	100	176	VERTICAL
3	15962.72	38.26	54.00	-15.74	30.32	6.15	37.23	35.44	Average	100	267	VERTICAL
4	15968.81	50.84	74.00	-23.16	42.91	6.15	37.22	35.44	Peak	100	267	VERTICAL



Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 100 / Ant. 1
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11000.22	38.20	54.00	-15.80	29.97	5.01	38.32	35.10	Average	100	53	HORIZONTAL
2	11001.12	50.20	74.00	-23.80	41.97	5.01	38.32	35.10	Peak	100	53	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11000.38	37.78	54.00	-16.22	29.57	5.01	38.30	35.10	Average	100	146	VERTICAL
2	11009.65	50.15	74.00	-23.85	41.92	5.02	38.32	35.11	Peak	100	146	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 116 / Ant. 1
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11160.22	38.13	54.00	-15.87	29.79	5.04	38.47	35.17	Average	100	300	HORIZONTAL
2	11160.96	50.19	74.00	-23.81	41.85	5.04	38.47	35.17	Peak	100	300	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11154.17	50.55	74.00	-23.45	42.22	5.04	38.45	35.16	Peak	100	142	VERTICAL
2	11160.13	38.25	54.00	-15.75	29.91	5.04	38.47	35.17	Average	100	142	VERTICAL



Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 140 / Ant. 1
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11400.00	38.82	54.00	-15.18	30.27	5.10	38.70	35.25	Average	100	139	HORIZONTAL
2	11408.97	51.92	74.00	-22.08	43.37	5.10	38.70	35.25	Peak	100	139	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11399.81	38.88	54.00	-15.12	30.33	5.10	38.70	35.25	Average	100	141	VERTICAL
2	11402.02	50.65	74.00	-23.35	42.10	5.10	38.70	35.25	Peak	100	141	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 52 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15772.15	54.57	74.00	-19.43	45.55	6.14	38.11	35.23	Peak	100	132	HORIZONTAL
2	15773.27	41.17	54.00	-12.83	32.15	6.14	38.11	35.23	Average	100	132	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15778.72	56.37	74.00	-17.63	47.36	6.14	38.11	35.24	Peak	100	183	VERTICAL
2	15779.39	43.53	54.00	-10.47	34.52	6.14	38.11	35.24	Average	100	183	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 60 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10599.33	43.91	54.00	-10.09	35.23	5.01	38.92	35.25	Average	100	218	HORIZONTAL
2	10599.68	57.57	74.00	-16.43	48.89	5.01	38.92	35.25	Peak	100	218	HORIZONTAL
3	15907.85	39.72	54.00	-14.28	30.92	6.15	37.92	35.27	Average	100	140	HORIZONTAL
4	15908.75	52.51	74.00	-21.49	43.71	6.15	37.92	35.27	Peak	100	140	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10592.95	50.99	74.00	-23.01	42.31	5.01	38.92	35.25	Peak	100	347	VERTICAL
2	10597.53	38.73	54.00	-15.27	30.05	5.01	38.92	35.25	Average	100	347	VERTICAL
3	15901.57	39.48	54.00	-14.52	30.67	6.15	37.92	35.26	Average	100	179	VERTICAL
4	15902.47	52.87	74.00	-21.13	44.06	6.15	37.92	35.26	Peak	100	179	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 64 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10638.17	41.63	54.00	-12.37	32.91	5.01	38.93	35.22	Average	100	219	HORIZONTAL
2	10639.20	56.06	74.00	-17.94	47.34	5.01	38.93	35.22	Peak	100	219	HORIZONTAL
3	15958.88	39.36	54.00	-14.64	30.64	6.15	37.85	35.28	Average	100	52	HORIZONTAL
4	15968.30	51.37	74.00	-22.63	42.65	6.15	37.85	35.28	Peak	100	52	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10636.67	38.02	54.00	-15.98	29.30	5.01	38.93	35.22	Average	100	79	VERTICAL
2	10638.97	50.89	74.00	-23.11	42.17	5.01	38.93	35.22	Peak	100	79	VERTICAL
3	15951.25	52.03	74.00	-21.97	43.29	6.15	37.87	35.28	Peak	100	229	VERTICAL
4	15957.15	39.00	54.00	-15.00	30.28	6.15	37.85	35.28	Average	100	229	VERTICAL



Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 100 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10998.72	60.95	74.00	-13.05	51.92	5.01	39.00	34.98	Peak	134	109	HORIZONTAL
2	10999.29	46.28	54.00	-7.72	37.25	5.01	39.00	34.98	Average	134	109	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10998.97	39.20	54.00	-14.80	30.17	5.01	39.00	34.98	Average	100	257	VERTICAL
2	11000.32	51.88	74.00	-22.12	42.85	5.01	39.00	34.98	Peak	100	257	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 116 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11158.04	58.93	74.00	-15.07	49.76	5.04	39.13	35.00	Peak	133	107	HORIZONTAL
2	11158.56	45.22	54.00	-8.78	36.05	5.04	39.13	35.00	Average	133	107	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11155.87	51.60	74.00	-22.40	42.44	5.04	39.12	35.00	Peak	100	231	VERTICAL
2	11160.38	38.91	54.00	-15.09	29.74	5.04	39.13	35.00	Average	100	231	VERTICAL



Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 140 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11392.28	57.51	74.00	-16.49	48.14	5.10	39.31	35.04	Peak	157	109	HORIZONTAL
2	11393.33	43.06	54.00	-10.94	33.69	5.10	39.31	35.04	Average	157	109	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11394.20	39.12	54.00	-14.88	29.75	5.10	39.31	35.04	Average	101	235	VERTICAL
2	11395.71	52.13	74.00	-21.87	42.75	5.10	39.32	35.04	Peak	101	235	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 54 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.01	52.63	54.00	-1.37	50.24	3.39	33.90	34.90	Average	154	31	HORIZONTAL
2	5000.01	57.17	74.00	-16.83	54.78	3.39	33.90	34.90	Peak	154	31	HORIZONTAL
3	15809.54	39.41	54.00	-14.59	30.44	6.14	38.07	35.24	Average	100	131	HORIZONTAL
4	15810.23	52.14	74.00	-21.86	43.17	6.14	38.07	35.24	Peak	100	131	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.05	40.33	54.00	-13.67	37.94	3.39	33.90	34.90	Average	100	214	VERTICAL
2	5000.12	49.75	74.00	-24.25	47.36	3.39	33.90	34.90	Peak	100	214	VERTICAL
3	15810.02	39.41	54.00	-14.59	30.44	6.14	38.07	35.24	Average	100	198	VERTICAL
4	15810.42	52.51	74.00	-21.49	43.54	6.14	38.07	35.24	Peak	100	198	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 62 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 18, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.02	50.80	54.00	-3.20	49.03	3.39	33.39	35.01	Average	148	39	HORIZONTAL
2	5000.04	55.25	74.00	-18.75	53.48	3.39	33.39	35.01	Peak	148	39	HORIZONTAL
3	10621.62	54.07	74.00	-19.93	46.10	5.01	38.38	35.42	Peak	100	118	HORIZONTAL
4	10622.16	41.10	54.00	-12.90	33.13	5.01	38.38	35.42	Average	100	118	HORIZONTAL
5	15931.36	37.96	54.00	-16.04	30.00	6.15	37.25	35.44	Average	100	206	HORIZONTAL
6	15932.79	51.10	74.00	-22.90	43.14	6.15	37.25	35.44	Peak	100	206	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.03	37.06	54.00	-16.94	35.28	3.39	33.40	35.01	Average	100	114	VERTICAL
2	5000.28	47.82	74.00	-26.18	46.04	3.39	33.40	35.01	Peak	100	114	VERTICAL
3	10620.39	37.61	54.00	-16.39	29.64	5.01	38.38	35.42	Average	100	188	VERTICAL
4	10620.39	48.17	74.00	-25.83	40.20	5.01	38.38	35.42	Peak	100	188	VERTICAL
5	15928.41	50.46	74.00	-23.54	42.48	6.15	37.27	35.44	Peak	100	274	VERTICAL
6	15928.65	37.77	54.00	-16.23	29.79	6.15	37.27	35.44	Average	100	274	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 102 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4999.99	52.46	54.00	-1.54	50.07	3.39	33.90	34.90	Average	154	30	HORIZONTAL
2	5000.09	56.60	74.00	-17.40	54.21	3.39	33.90	34.90	Peak	154	30	HORIZONTAL
3	11019.53	35.26	54.00	-18.74	26.21	5.02	39.01	34.98	Average	100	166	HORIZONTAL
4	11020.49	48.54	74.00	-25.46	39.49	5.02	39.01	34.98	Peak	100	166	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.01	40.57	54.00	-13.43	38.18	3.39	33.90	34.90	Average	100	215	VERTICAL
2	5000.02	49.74	74.00	-24.26	47.35	3.39	33.90	34.90	Peak	100	215	VERTICAL
3	11019.97	35.49	54.00	-18.51	26.44	5.02	39.01	34.98	Average	100	298	VERTICAL
4	11020.02	48.01	74.00	-25.99	38.96	5.02	39.01	34.98	Peak	100	298	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 110 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.01	52.41	54.00	-1.59	50.02	3.39	33.90	34.90	Average	154	30	HORIZONTAL
2	5000.05	56.09	74.00	-17.91	53.70	3.39	33.90	34.90	Peak	154	30	HORIZONTAL
3	11019.61	44.23	54.00	-9.77	35.18	5.02	39.01	34.98	Average	104	109	HORIZONTAL
4	11019.76	57.35	74.00	-16.65	48.30	5.02	39.01	34.98	Peak	104	109	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.04	39.69	54.00	-14.31	37.30	3.39	33.90	34.90	Average	100	215	VERTICAL
2	5000.12	49.70	74.00	-24.30	47.31	3.39	33.90	34.90	Peak	100	215	VERTICAL
3	11019.66	37.61	54.00	-16.39	28.56	5.02	39.01	34.98	Average	129	219	VERTICAL
4	11020.22	48.40	74.00	-25.60	39.35	5.02	39.01	34.98	Peak	129	219	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 134 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.03	52.49	54.00	-1.51	50.10	3.39	33.90	34.90	Average	153	30	HORIZONTAL
2	5000.07	57.01	74.00	-16.99	54.62	3.39	33.90	34.90	Peak	153	30	HORIZONTAL
3	11337.50	36.30	54.00	-17.70	26.98	5.08	39.27	35.03	Average	100	204	HORIZONTAL
4	11339.88	49.59	74.00	-24.41	40.27	5.08	39.27	35.03	Peak	100	204	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4999.97	50.47	74.00	-23.53	48.08	3.39	33.90	34.90	Peak	100	215	VERTICAL
2	5000.03	40.91	54.00	-13.09	38.52	3.39	33.90	34.90	Average	100	215	VERTICAL
3	11338.22	35.91	54.00	-18.09	26.59	5.08	39.27	35.03	Average	100	130	VERTICAL
4	11340.29	49.58	74.00	-24.42	40.25	5.09	39.27	35.03	Peak	100	130	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT80 CH 58 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.03	51.73	54.00	-2.27	49.34	3.39	33.90	34.90	Average	153	30	HORIZONTAL
2	5000.10	56.45	74.00	-17.55	54.06	3.39	33.90	34.90	Peak	153	30	HORIZONTAL
3	15867.81	39.26	54.00	-14.74	30.41	6.14	37.97	35.26	Average	100	251	HORIZONTAL
4	15871.40	52.38	74.00	-21.62	43.53	6.14	37.97	35.26	Peak	100	251	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.04	39.25	54.00	-14.75	36.86	3.39	33.90	34.90	Average	100	215	VERTICAL
2	5000.15	47.98	74.00	-26.02	45.59	3.39	33.90	34.90	Peak	100	215	VERTICAL
3	15868.44	52.28	74.00	-21.72	43.43	6.14	37.97	35.26	Peak	100	313	VERTICAL
4	15872.04	39.19	54.00	-14.81	30.34	6.14	37.97	35.26	Average	100	313	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT80 CH 106 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.03	51.82	54.00	-2.18	49.43	3.39	33.90	34.90	Average	153	27	HORIZONTAL
2	5000.18	56.34	74.00	-17.66	53.95	3.39	33.90	34.90	Peak	153	27	HORIZONTAL
3	11058.82	35.91	54.00	-18.09	26.83	5.02	39.05	34.99	Average	107	182	HORIZONTAL
4	11059.76	50.02	74.00	-23.98	40.93	5.03	39.05	34.99	Peak	107	182	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5000.03	39.58	54.00	-14.42	37.19	3.39	33.90	34.90	Average	100	216	VERTICAL
2	5000.15	47.84	74.00	-26.16	45.45	3.39	33.90	34.90	Peak	100	216	VERTICAL
3	11057.73	49.46	74.00	-24.54	40.38	5.02	39.05	34.99	Peak	100	118	VERTICAL
4	11059.15	35.85	54.00	-18.15	26.77	5.02	39.05	34.99	Average	100	118	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 52 / Ant. 1
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15774.26	52.11	74.00	-21.89	43.09	6.14	38.11	35.23	Peak	100	275	HORIZONTAL
2	15778.94	39.49	54.00	-14.51	30.48	6.14	38.11	35.24	Average	100	275	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15770.87	53.37	74.00	-20.63	44.35	6.14	38.11	35.23	Peak	100	169	VERTICAL
2	15775.38	39.82	54.00	-14.18	30.80	6.14	38.11	35.23	Average	100	169	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 60 / Ant. 1
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	10599.52	40.00	54.00	-14.00	31.32	5.01	38.92	35.25	Average	100	118	HORIZONTAL
2	10604.36	52.47	74.00	-21.53	43.77	5.01	38.92	35.23	Peak	100	118	HORIZONTAL
3	15890.03	52.05	74.00	-21.95	43.22	6.15	37.94	35.26	Peak	100	291	HORIZONTAL
4	15900.22	38.95	54.00	-15.05	30.12	6.15	37.94	35.26	Average	100	291	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	10598.97	38.13	54.00	-15.87	29.45	5.01	38.92	35.25	Average	100	293	VERTICAL
2	10599.71	50.92	74.00	-23.08	42.24	5.01	38.92	35.25	Peak	100	293	VERTICAL
3	15894.87	52.01	74.00	-21.99	43.18	6.15	37.94	35.26	Peak	100	120	VERTICAL
4	15900.61	39.07	54.00	-14.93	30.26	6.15	37.92	35.26	Average	100	120	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 64 / Ant. 1
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10637.95	51.76	74.00	-22.24	43.04	5.01	38.93	35.22	Peak	100	105	HORIZONTAL
2	10639.10	38.47	54.00	-15.53	29.75	5.01	38.93	35.22	Average	100	105	HORIZONTAL
3	15954.04	39.32	54.00	-14.68	30.60	6.15	37.85	35.28	Average	100	235	HORIZONTAL
4	15964.29	52.33	74.00	-21.67	43.61	6.15	37.85	35.28	Peak	100	235	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10632.24	50.88	74.00	-23.12	42.16	5.01	38.93	35.22	Peak	100	121	VERTICAL
2	10642.28	37.87	54.00	-16.13	29.15	5.01	38.93	35.22	Average	100	121	VERTICAL
3	15953.53	38.98	54.00	-15.02	30.26	6.15	37.85	35.28	Average	100	328	VERTICAL
4	15967.31	51.49	74.00	-22.51	42.77	6.15	37.85	35.28	Peak	100	328	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 100 / Ant. 1
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10998.88	39.41	54.00	-14.59	30.38	5.01	39.00	34.98	Average	100	131	HORIZONTAL
2	11006.57	51.51	74.00	-22.49	42.47	5.01	39.01	34.98	Peak	100	131	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10996.99	50.58	74.00	-23.42	41.55	5.01	39.00	34.98	Peak	100	291	VERTICAL
2	11000.35	37.89	54.00	-16.11	28.86	5.01	39.00	34.98	Average	100	291	VERTICAL



Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 116 / Ant. 1
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11161.44	38.61	54.00	-15.39	29.44	5.04	39.13	35.00	Average	100	105	HORIZONTAL
2	11165.22	51.29	74.00	-22.71	42.11	5.05	39.13	35.00	Peak	100	105	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11159.01	50.11	74.00	-23.89	40.94	5.04	39.13	35.00	Peak	100	259	VERTICAL
2	11162.08	37.82	54.00	-16.18	28.64	5.05	39.13	35.00	Average	100	259	VERTICAL

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 140 / Ant. 1
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11400.99	41.47	54.00	-12.53	32.09	5.10	39.32	35.04	Average	100	137	HORIZONTAL
2	11401.99	54.60	74.00	-19.40	45.22	5.10	39.32	35.04	Peak	100	137	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11391.47	50.70	74.00	-23.30	41.33	5.10	39.31	35.04	Peak	100	216	VERTICAL
2	11399.17	38.81	54.00	-15.19	29.43	5.10	39.32	35.04	Average	100	216	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.7.3. Test Procedures

- The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 52, 60, 64 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Channel 52

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5252.63	113.47			76.16	3.46	33.85	0.00 Average	100	15	VERTICAL
2	5252.63	123.77			86.46	3.46	33.85	0.00 Peak	100	15	VERTICAL
3	5350.00	49.72	54.00	-4.28	12.20	3.49	34.03	0.00 Average	100	15	VERTICAL
4	5350.00	62.60	74.00	-11.40	25.08	3.49	34.03	0.00 Peak	100	15	VERTICAL

Item 1, 2 are the fundamental frequency at 5260 MHz.

Channel 60

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5300.96	112.70			75.28	3.48	33.94	0.00 Average	100	15	VERTICAL
2	5301.28	122.72			85.30	3.48	33.94	0.00 Peak	100	15	VERTICAL
3	5350.32	53.43	54.00	-0.57	15.91	3.49	34.03	0.00 Average	100	15	VERTICAL
4	5350.64	67.46	74.00	-6.54	29.94	3.49	34.03	0.00 Peak	100	15	VERTICAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5321.76	110.07			72.62	3.48	33.97	0.00 Average	100	25	VERTICAL
2	5321.92	120.31			82.86	3.48	33.97	0.00 Peak	100	25	VERTICAL
3	5351.28	53.96	54.00	-0.04	16.44	3.49	34.03	0.00 Average	100	25	VERTICAL
4	5352.72	69.95	74.00	-4.05	32.43	3.49	34.03	0.00 Peak	100	25	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 100, 140 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5460.00	47.81	54.00	-6.19	10.08	3.52	34.21	0.00	Average	107	319	VERTICAL
2	5460.00	60.27	74.00	-13.73	22.54	3.52	34.21	0.00	Peak	107	319	VERTICAL
3	5469.84	67.83	74.00	-6.17	30.07	3.52	34.24	0.00	Peak	107	319	VERTICAL
4	5470.00	53.38	54.00	-0.62	15.62	3.52	34.24	0.00	Average	107	319	VERTICAL
5	5494.71	117.18			79.39	3.53	34.26	0.00	Peak	107	319	VERTICAL
6	5508.33	106.42			68.60	3.54	34.28	0.00	Average	107	319	VERTICAL

Item 5, 6 are the fundamental frequency at 5500 MHz.

Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5693.75	109.24			71.31	3.59	34.34	0.00	Average	103	17	VERTICAL
2	5693.91	119.52			81.59	3.59	34.34	0.00	Peak	103	17	VERTICAL
3	5725.00	53.40	54.00	-0.60	15.46	3.60	34.34	0.00	Average	103	17	VERTICAL
4	5725.32	68.61	74.00	-5.39	30.67	3.60	34.34	0.00	Peak	103	17	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 54, 62 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Channel 54

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5271.28	108.09			70.74	3.47	33.88	0.00	Average	100	11	VERTICAL
2	5272.24	118.33			80.98	3.47	33.88	0.00	Peak	100	11	VERTICAL
3	5350.00	52.49	54.00	-1.51	14.97	3.49	34.03	0.00	Average	100	11	VERTICAL
4	5350.00	64.81	74.00	-9.19	27.29	3.49	34.03	0.00	Peak	100	11	VERTICAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

Channel 62

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5321.22	103.98			66.53	3.48	33.97	0.00	Average	100	17	VERTICAL
2	5321.54	114.38			76.93	3.48	33.97	0.00	Peak	100	17	VERTICAL
3	5350.00	53.54	54.00	-0.46	16.02	3.49	34.03	0.00	Average	100	17	VERTICAL
4	5350.32	69.82	74.00	-4.18	32.30	3.49	34.03	0.00	Peak	100	17	VERTICAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 102, 110, 134 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Channel 102

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5460.00	48.69	54.00	-5.31	10.96	3.52	34.21	0.00	Average	107	352	VERTICAL
2	5460.00	61.54	74.00	-12.46	23.81	3.52	34.21	0.00	Peak	107	352	VERTICAL
3	5470.00	53.47	54.00	-0.53	15.71	3.52	34.24	0.00	Average	107	352	VERTICAL
4	5470.00	66.56	74.00	-7.44	28.80	3.52	34.24	0.00	Peak	107	352	VERTICAL
5	5519.94	111.38			73.54	3.54	34.30	0.00	Peak	107	352	VERTICAL
6	5520.26	101.15			63.31	3.54	34.30	0.00	Average	107	352	VERTICAL

Item 5, 6 are the fundamental frequency at 5510 MHz.

Channel 110

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5460.00	49.68	54.00	-4.32	11.95	3.52	34.21	0.00	Average	105	12	VERTICAL
2	5460.00	61.08	74.00	-12.92	23.35	3.52	34.21	0.00	Peak	105	12	VERTICAL
3	5469.68	67.40	74.00	-6.60	29.64	3.52	34.24	0.00	Peak	105	12	VERTICAL
4	5470.00	52.55	54.00	-1.45	14.79	3.52	34.24	0.00	Average	105	12	VERTICAL
5	5548.08	108.77			70.91	3.55	34.31	0.00	Average	105	12	VERTICAL
6	5548.08	119.12			81.26	3.55	34.31	0.00	Peak	105	12	VERTICAL

Item 5, 6 are the fundamental frequency at 5550 MHz.

Channel 134

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5661.99	107.74			69.82	3.59	34.33	0.00	Average	103	8	VERTICAL
2	5663.27	118.32			80.40	3.59	34.33	0.00	Peak	103	8	VERTICAL
3	5725.32	68.05	68.20	-0.15	30.11	3.60	34.34	0.00	Peak	103	8	VERTICAL

Item 1, 2 are the fundamental frequency at 5670 MHz.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT80 CH 58, 106 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 10, 2014	Test Mode	Mode 2 (EUT 1)

Channel 58

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5271.57	96.74			59.39	3.47	33.88	0.00	Average	101	14	VERTICAL
2	5310.83	107.07			69.65	3.48	33.94	0.00	Peak	101	14	VERTICAL
3	5350.00	53.92	54.00	-0.08	16.40	3.49	34.03	0.00	Average	101	14	VERTICAL
4	5350.00	68.77	74.00	-5.23	31.25	3.49	34.03	0.00	Peak	101	14	VERTICAL

Item 1, 2 are the fundamental frequency at 5290 MHz.

Channel 106

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5460.00	48.19	54.00	-5.81	10.46	3.52	34.21	0.00	Average	106	17	VERTICAL
2	5460.00	60.35	74.00	-13.65	22.62	3.52	34.21	0.00	Peak	106	17	VERTICAL
3	5470.00	53.82	54.00	-0.18	16.06	3.52	34.24	0.00	Average	106	17	VERTICAL
4	5470.00	68.13	74.00	-5.87	30.37	3.52	34.24	0.00	Peak	106	17	VERTICAL
5	5509.17	95.50			57.68	3.54	34.28	0.00	Average	106	17	VERTICAL
6	5509.97	105.46			67.64	3.54	34.28	0.00	Peak	106	17	VERTICAL

Item 5, 6 are the fundamental frequency at 5530 MHz.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 52, 60, 64 / Ant. 1
Test Date	Feb. 08, 2014	Test Mode	Mode 2 (EUT 1)

Channel 52

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5263.60	119.14			81.80	3.46	33.88	0.00	Peak	100	20	VERTICAL
2	5265.20	108.31			70.97	3.46	33.88	0.00	Average	100	20	VERTICAL
3	5350.80	56.52	74.00	-17.48	19.00	3.49	34.03	0.00	Peak	100	20	VERTICAL
4	5352.00	45.60	54.00	-8.40	8.08	3.49	34.03	0.00	Average	100	20	VERTICAL

Item 1, 2 are the fundamental frequency at 5260 MHz.

Channel 60

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5294.40	117.05			79.67	3.47	33.91	0.00	Peak	100	329	HORIZONTAL
2	5306.40	106.34			68.92	3.48	33.94	0.00	Average	100	329	HORIZONTAL
3	5350.00	51.71	54.00	-2.29	14.19	3.49	34.03	0.00	Average	100	329	HORIZONTAL
4	5350.00	68.67	74.00	-5.33	31.15	3.49	34.03	0.00	Peak	100	329	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5314.20	116.57			79.12	3.48	33.97	0.00	Peak	110	18	VERTICAL
2	5314.40	105.92			68.47	3.48	33.97	0.00	Average	110	18	VERTICAL
3	5350.00	53.51	54.00	-0.49	15.99	3.49	34.03	0.00	Average	110	18	VERTICAL
4	5350.00	69.54	74.00	-4.46	32.02	3.49	34.03	0.00	Peak	110	18	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 100, 140 / Ant. 1
Test Date	Feb. 08, 2014	Test Mode	Mode 2 (EUT 1)

Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5460.00	47.60	54.00	-6.40	9.87	3.52	34.21	0.00	Average	100	268	VERTICAL
2	5460.00	61.90	74.00	-12.10	24.17	3.52	34.21	0.00	Peak	100	268	VERTICAL
3	5469.80	67.36	74.00	-6.64	29.60	3.52	34.24	0.00	Peak	100	268	VERTICAL
4	5470.00	52.60	54.00	-1.40	14.84	3.52	34.24	0.00	Average	100	268	VERTICAL
5	5505.80	103.64			65.82	3.54	34.28	0.00	Average	100	268	VERTICAL
6	5506.60	114.02			76.20	3.54	34.28	0.00	Peak	100	268	VERTICAL

Item 5, 6 are the fundamental frequency at 5500 MHz.

Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5697.80	105.09			67.16	3.59	34.34	0.00	Average	101	6	VERTICAL
2	5698.40	115.79			77.86	3.59	34.34	0.00	Peak	101	6	VERTICAL
3	5725.00	52.89	54.00	-1.11	14.95	3.60	34.34	0.00	Average	101	6	VERTICAL
4	5725.80	67.98	74.00	-6.02	30.04	3.60	34.34	0.00	Peak	101	6	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 52, 60, 64 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 24, 2014 & Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Channel 52

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5266.41	120.29			82.56	3.46	34.27	0.00	Peak	100	39	HORIZONTAL
2	5267.05	110.41			72.68	3.46	34.27	0.00	Average	100	39	HORIZONTAL
3	5350.00	45.81	54.00	-8.19	7.93	3.49	34.39	0.00	Average	100	39	HORIZONTAL
4	5350.00	56.88	74.00	-17.12	19.00	3.49	34.39	0.00	Peak	100	39	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5260 MHz.

Channel 60

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5305.45	119.31			81.89	3.48	33.94	0.00	Peak	100	51	HORIZONTAL
2	5305.77	109.39			71.97	3.48	33.94	0.00	Average	100	51	HORIZONTAL
3	5350.00	48.16	54.00	-5.84	10.64	3.49	34.03	0.00	Average	100	51	HORIZONTAL
4	5350.00	60.57	74.00	-13.43	23.05	3.49	34.03	0.00	Peak	100	51	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5326.25	108.14			70.68	3.49	33.97	0.00	Average	101	51	HORIZONTAL
2	5326.89	117.71			80.25	3.49	33.97	0.00	Peak	101	51	HORIZONTAL
3	5350.00	53.07	54.00	-0.93	15.55	3.49	34.03	0.00	Average	101	51	HORIZONTAL
4	5350.16	66.05	74.00	-7.95	28.53	3.49	34.03	0.00	Peak	101	51	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT20 CH 100, 140 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 24, 2014	Test Mode	Mode 3 (EUT 2)

Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5455.19	60.51	74.00	-13.49	22.80	3.52	34.19	0.00	Peak	100	134	HORIZONTAL
2	5460.00	47.15	54.00	-6.85	9.44	3.52	34.19	0.00	Average	100	134	HORIZONTAL
3	5470.00	52.16	54.00	-1.84	14.43	3.52	34.21	0.00	Average	100	134	HORIZONTAL
4	5470.00	64.97	74.00	-9.03	27.24	3.52	34.21	0.00	Peak	100	134	HORIZONTAL
5	5491.99	115.10			77.34	3.53	34.23	0.00	Peak	100	134	HORIZONTAL
6	5492.63	105.38			67.62	3.53	34.23	0.00	Average	100	134	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5500 MHz.

Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5706.57	106.67			68.73	3.60	34.34	0.00	Average	165	233	HORIZONTAL
2	5707.21	116.33			78.39	3.60	34.34	0.00	Peak	165	233	HORIZONTAL
3	5725.00	52.72	54.00	-1.28	14.78	3.60	34.34	0.00	Average	165	233	HORIZONTAL
4	5725.16	67.63	74.00	-6.37	29.69	3.60	34.34	0.00	Peak	165	233	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 54, 62 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 24, 2014 & Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Channel 54

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5267.12	116.03			78.30	3.46	34.27	0.00	Peak	100	39	HORIZONTAL
2	5268.40	106.36			68.63	3.46	34.27	0.00	Average	100	39	HORIZONTAL
3	5350.00	48.42	54.00	-5.58	10.54	3.49	34.39	0.00	Average	100	39	HORIZONTAL
4	5350.00	60.93	74.00	-13.07	23.05	3.49	34.39	0.00	Peak	100	39	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

Channel 62

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5301.99	102.50			65.08	3.48	33.94	0.00	Average	100	49	HORIZONTAL
2	5301.99	112.44			75.02	3.48	33.94	0.00	Peak	100	49	HORIZONTAL
3	5350.00	53.30	54.00	-0.70	15.78	3.49	34.03	0.00	Average	100	49	HORIZONTAL
4	5350.00	67.36	74.00	-6.64	29.84	3.49	34.03	0.00	Peak	100	49	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT40 CH 102, 110, 134 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 24, 2014 & Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Channel 102

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5460.00	46.21	54.00	-7.79	8.50	3.52	34.19	0.00	Average	100	50	HORIZONTAL
2	5460.00	58.15	74.00	-15.85	20.44	3.52	34.19	0.00	Peak	100	50	HORIZONTAL
3	5468.40	53.44	54.00	-0.56	15.71	3.52	34.21	0.00	Average	100	50	HORIZONTAL
4	5468.40	68.90	74.00	-5.10	31.17	3.52	34.21	0.00	Peak	100	50	HORIZONTAL
5	5507.76	101.25			63.46	3.54	34.25	0.00	Average	100	50	HORIZONTAL
6	5507.76	111.13			73.34	3.54	34.25	0.00	Peak	100	50	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5510 MHz.

Channel 110

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5460.00	47.18	54.00	-6.82	9.13	3.52	34.53	0.00	Average	110	40	HORIZONTAL
2	5460.00	59.58	74.00	-14.42	21.53	3.52	34.53	0.00	Peak	110	40	HORIZONTAL
3	5470.00	50.05	54.00	-3.95	11.98	3.52	34.55	0.00	Average	110	40	HORIZONTAL
4	5470.00	62.47	74.00	-11.53	24.40	3.52	34.55	0.00	Peak	110	40	HORIZONTAL
5	5554.17	118.23			80.06	3.55	34.62	0.00	Peak	110	40	HORIZONTAL
6	5555.13	107.93			69.76	3.55	34.62	0.00	Average	110	40	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5550 MHz.

Channel 134

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5662.63	115.47			77.55	3.59	34.33	0.00	Peak	106	131	HORIZONTAL
2	5684.42	105.25			67.33	3.59	34.33	0.00	Average	106	131	HORIZONTAL
3	5725.00	52.59	54.00	-1.41	14.65	3.60	34.34	0.00	Average	106	131	HORIZONTAL
4	5725.00	64.44	74.00	-9.56	26.50	3.60	34.34	0.00	Peak	106	131	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5670 MHz.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0, Nss1 VHT80 CH 58, 106 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 18, 2014	Test Mode	Mode 3 (EUT 2)

Channel 58

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5262.76	98.23			60.89	3.46	33.88	0.00	Average	103	51	HORIZONTAL
2	5264.36	107.54			70.20	3.46	33.88	0.00	Peak	103	51	HORIZONTAL
3	5350.00	53.59	54.00	-0.41	16.07	3.49	34.03	0.00	Average	103	51	HORIZONTAL
4	5350.00	67.36	74.00	-6.64	29.84	3.49	34.03	0.00	Peak	103	51	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5290 MHz.

Channel 106

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5460.00	49.89	54.00	-4.11	12.18	3.52	34.19	0.00	Average	110	134	HORIZONTAL
2	5460.00	61.34	74.00	-12.66	23.63	3.52	34.19	0.00	Peak	110	134	HORIZONTAL
3	5465.99	53.94	54.00	-0.06	16.23	3.52	34.19	0.00	Average	110	134	HORIZONTAL
4	5467.60	66.13	74.00	-7.87	28.40	3.52	34.21	0.00	Peak	110	134	HORIZONTAL
5	5507.56	105.63			67.84	3.54	34.25	0.00	Peak	110	134	HORIZONTAL
6	5546.03	96.12			58.28	3.55	34.29	0.00	Average	110	134	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5530 MHz.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 52, 60, 64 / Ant. 1
Test Date	Feb. 25, 2014	Test Mode	Mode 3 (EUT 2)

Channel 52

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5263.21	116.56			78.83	3.46	34.27	0.00	Peak	102	42	HORIZONTAL
2	5264.81	105.94			68.21	3.46	34.27	0.00	Average	102	42	HORIZONTAL
3	5350.00	46.52	54.00	-7.48	8.64	3.49	34.39	0.00	Average	102	42	HORIZONTAL
4	5350.00	57.62	74.00	-16.38	19.74	3.49	34.39	0.00	Peak	102	42	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5260 MHz.

Channel 60

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5293.91	105.93			68.14	3.47	34.32	0.00	Average	100	42	HORIZONTAL
2	5301.60	116.17			78.37	3.48	34.32	0.00	Peak	100	42	HORIZONTAL
3	5350.00	47.01	54.00	-6.99	9.13	3.49	34.39	0.00	Average	100	42	HORIZONTAL
4	5350.32	58.96	74.00	-15.04	21.08	3.49	34.39	0.00	Peak	100	42	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5314.87	116.69			79.24	3.48	33.97	0.00	Peak	114	129	HORIZONTAL
2	5317.92	105.93			68.48	3.48	33.97	0.00	Average	114	129	HORIZONTAL
3	5350.00	53.33	54.00	-0.67	15.81	3.49	34.03	0.00	Average	114	129	HORIZONTAL
4	5350.16	69.20	74.00	-4.80	31.68	3.49	34.03	0.00	Peak	114	129	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

Temperature	22°C	Humidity	51%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 100, 140 / Ant. 1
Test Date	Feb. 24, 2014	Test Mode	Mode 3 (EUT 2)

Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5458.40	63.30	74.00	-10.70	25.59	3.52	34.19	0.00	Peak	100	131	HORIZONTAL
2	5460.00	47.51	54.00	-6.49	9.80	3.52	34.19	0.00	Average	100	131	HORIZONTAL
3	5469.04	71.00	74.00	-3.00	33.27	3.52	34.21	0.00	Peak	100	131	HORIZONTAL
4	5470.00	53.74	54.00	-0.26	16.01	3.52	34.21	0.00	Average	100	131	HORIZONTAL
5	5494.71	104.97			67.21	3.53	34.23	0.00	Average	100	131	HORIZONTAL
6	5502.08	115.89			78.10	3.54	34.25	0.00	Peak	100	131	HORIZONTAL

Item 5, 6 are the fundamental frequency at 5500 MHz.

Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5692.95	106.72			68.79	3.59	34.34	0.00	Average	100	351	HORIZONTAL
2	5696.15	116.47			78.54	3.59	34.34	0.00	Peak	100	351	HORIZONTAL
3	5725.00	52.32	54.00	-1.68	14.38	3.60	34.34	0.00	Average	100	351	HORIZONTAL
4	5727.40	70.61	74.00	-3.39	32.67	3.60	34.34	0.00	Peak	100	351	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $0^\circ\text{C} \sim 50^\circ\text{C}$.

4.8.4. Test Setup Layout

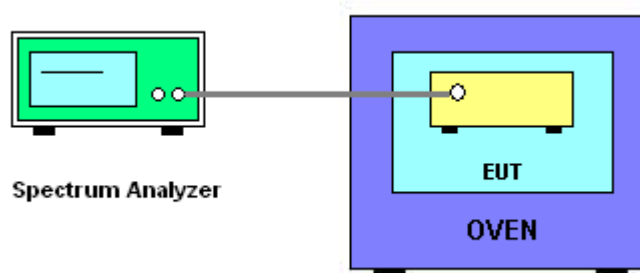

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Temperature	20°C	Humidity	56%
Test Engineer	Benson Peng	Test Date	Feb. 15, 2014
Test Mode	Mode 1 (EUT 1)		

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)	
	5300 MHz	5500 MHz
126.50	5299.9816	5499.9832
110.00	5299.9814	5499.9830
93.50	5299.9822	5499.9826
Max. Deviation (MHz)	0.018600	0.017400
Max. Deviation (ppm)	3.51	3.16

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)	
	5300 MHz	5500 MHz
0	5299.9820	5499.9838
10	5299.9822	5499.9836
20	5299.9814	5499.9830
30	5299.9816	5499.9826
40	5299.9810	5499.9820
50	5299.9808	5499.9816
Max. Deviation (MHz)	0.019200	0.018400
Max. Deviation (ppm)	3.62	3.35

Temperature	22°C	Humidity	56%
Test Engineer	Nick Peng	Test Date	Feb. 15, 2014
Test Mode	Mode 2 (EUT 2)		

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)	
	5300 MHz	5500 MHz
126.50	5299.9816	5499.9832
110.00	5299.9814	5499.9830
93.50	5299.9822	5499.9826
Max. Deviation (MHz)	0.018600	0.017400
Max. Deviation (ppm)	3.51	3.16

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)	
	5300 MHz	5500 MHz
0	5299.9820	5499.9838
10	5299.9822	5499.9836
20	5299.9814	5499.9830
30	5299.9816	5499.9826
40	5299.9810	5499.9820
50	5299.9808	5499.9816
Max. Deviation (MHz)	0.019200	0.018400
Max. Deviation (ppm)	3.62	3.35

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9 kHz ~ 2.75 GHz	Apr. 12, 2013	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150 kHz ~ 100 MHz	Nov. 23, 2013	Conduction (CO01-CB)
Artificial Mains Network	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150 kHz ~ 30 MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz - 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz - 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 04, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch Receiver VSWR 1= AMN/LISN VSWR 2=	-0.080	dB	U-shaped	0.060
Combined standard uncertainty $U_c(y)$				1.2
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				2.4

Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.173	dB	K=1	0.086
Cable loss	± 0.174	dB	K=2	0.087
Antenna gain	± 0.169	dB	K=2	0.084
Site imperfection	± 0.433	dB	Triangular	0.214
Pre-amplifier gain	± 0.366	dB	K=2	0.183
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.778
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.555

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.191	dB	K=1	0.095
Cable loss	±0.169	dB	K=2	0.084
Antenna gain	±0.191	dB	K=2	0.096
Site imperfection	±0.582	dB	Triangular	0.291
Pre-amplifier gain	±0.304	dB	K=2	0.152
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.839
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.678

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.186	dB	K=1	0.093
Cable loss	±0.167	dB	K=2	0.083
Antenna gain	±0.190	dB	K=2	0.095
Site imperfection	±0.488	dB	Triangular	0.244
Pre-amplifier gain	±0.269	dB	K=2	0.134
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.771
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.541

Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	±0.038	dB	K=2	0.019
Attenuator	±0.047	dB	K=2	0.024
Power Meter specification	±0.300	dB	Triangular	0.150
Power Sensor specification	±0.300	dB	Rectangular	0.150
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				0.863
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				1.726