



**FCC PART 15 SUBPART C TEST REPORT**

**FCC PART 15.247**

**Report Reference No.....: WE08070002**

Compiled by  
( position+printed name+signature)..: File administrators Tracy Qi

Supervised by  
( position+printed name+signature)..: Test Engineer Tracy Qi

Approved by  
( position+printed name+signature)..: Manager Jimmy Li

Date of issue.....: Aug 08, 2008

**Testing Laboratory Name .....: Shenzhen Huatongwei International Inspection Co., Ltd**

Address.....: Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

**Applicant's name .....: Invengo Information Technology Co., Ltd.**

Address.....: 3/F, No T2-B, High-Tech Industrial Park South, Shenzhen, China

**Test specification:**

Standard .....: **FCC Part 15.247: Operation within the bands 920-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz Direct Sequence System**

TRF Originator.....: Shenzhen Huatongwei International Inspection CO., Ltd

Master TRF.....: Dated 2006-06

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description ..... :** Reader

FCC ID..... TQ4YWGIT-R5678903

Trade Mark ..... /

Model/Type reference..... XCRF-860

Listed Models ..... /

Antenna Designation ..... Dedicated Antenna with 6 dB Gain (Replace by end user is not permitted)

Result.....: **Positive**

**TEST REPORT**

<b>Test Report No. :</b>	<b>WE08070002</b>	Aug 08, 2008
		Date of issue

Equipment under Test : Reader

Model /Type : XCRF-860

Listed Models : /

Applicant : Invengo Information Technology Co., Ltd.

Address : 3/F, No T2-B, High-Tech Industrial Park South, Shenzhen, China

<b>Test Result</b> according to the standards on page 4:	<b>Positive</b>
--	-----------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b>1.</b>	<b><u>TEST STANDARDS .....</u></b>	<b><u>4</u></b>
<b>2.</b>	<b><u>SUMMARY .....</u></b>	<b><u>5</u></b>
2.1.	General Remarks	5
2.2.	Equipment Under Test	5
2.3.	Short description of the Equipment under Test (EUT)	5
2.4.	EUT operation mode	5
2.5.	EUT configuration	5
2.6.	Related Submittal(s) / Grant (s)	6
2.7.	Modifications	6
<b>3.</b>	<b><u>TEST ENVIRONMENT .....</u></b>	<b><u>7</u></b>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	8
3.4.	Configuration of Tested System	8
3.5.	Test Description	9
3.6.	Statement of the measurement uncertainty	9
3.7.	Equipments Used during the Test	10
<b>4.</b>	<b><u>TEST CONDITIONS AND RESULTS .....</u></b>	<b><u>11</u></b>
4.1.	Conducted Emissions Test	11
4.2.	Radiated Emission Test	14
4.3.	Maximum Peak Output Power	17
4.4.	Hopping Channel	20
4.5.	Channel Separation	21
4.6.	Band Edge Measurement	22
4.7.	20dB Bandwidth Measurement	24
4.8.	Operation Frequency	26
4.9.	Dwell Time	27
	APPENDIX 1--PHOTOGRAPHS OF SET UP	28
	APPENDIX 2--PHOTOGRAPHS OF EUT	30

## **1. TEST STANDARDS**

The tests were performed according to following standards:

**[FCC Rules Part 15.247](#)**: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

## 2. SUMMARY

### 2.1. General Remarks

- Date of receipt of test sample : Jul 4, 2008
- Testing commenced on : July 15, 2008
- Testing concluded on : Aug 06, 2008

### 2.2. Equipment Under Test

#### Power supply system utilised

- Power supply voltage :
  - 120V / 60 Hz
  - 12 V DC
  - Other (specified in blank below)
- 115V / 60Hz
- 24 V DC

/

---

### 2.3. Short description of the Equipment under Test (EUT)

902~928 MHz lower power, RFID reader, It is designed by way of utilizing the FHSS technology to achieve the system operation.

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

### 2.4. EUT operation mode

The EUT has been tested under typical operating condition.

### 2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab
- Power Cable
  - Length (m) : /
  - Shield : /
  - Detachable : /
- Multimeter
  - Manufacturer : /
  - Model No. : /

**2.6. Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for FCC ID: TQ4YWGIT-R5678903 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

**2.7. Modifications**

No modifications were implemented to meet testing criteria.

### **3. TEST ENVIRONMENT**

#### **3.1. Address of the test laboratory**

Shenzhen Huatongwei International Inspection Co., Ltd  
Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China  
Phone: 86-755-26715686 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

#### **3.2. Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

##### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: August 02, 2007. Valid time is until March 04, 2009.

##### **A2LA-Lab Cert. No. 2243.01**

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is from Aug 24, 2005 to Sept 30, 2009.

##### **FCC-Registration No.: 662850**

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date September 12, 2006.

##### **IC-Registration No.: 5377**

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377 on November 28<sup>th</sup>, 2005.

##### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

##### **NEMKO-Aut. No.: ELA125**

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025:2005 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10, the Authorization is valid through April 25, 2009.

##### **VCCI**

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: December 20, 2006. Valid time is until December 19, 2009.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: December 20, 2006. Valid time is until December 19, 2009.

## IECEE CB

Shenzhen Huatongwei International Inspection Co Ltd has been assessed and determined to fully comply with the requirements of ISO/IEC 17025: 2005-05, The Basic Rules, IECEE 01: 2006-10 and Rules of Procedure IECEE 02: 2006-10, and the relevant IECEE CB-Scheme Operational Documents. It is therefore entitled to operate as a CB Testing Laboratory under the responsibility of Nemko A/S. This certificate remains valid until May 25th 2009 at which time it will be reissued by the IECEE Executive Secretary upon successful completion of the normally scheduled 3-year Reassessment Program administered by the IECEE CB Scheme.

## DNV

Shenzhen Huatongwei International Inspection Co Ltd has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025(2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until 09 July, 2010.

### 3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	<u>15-35 ° C</u>
Humidity:	<u>30-60 %</u>
Atmospheric pressure:	<u>950-1050mbar</u>

### 3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

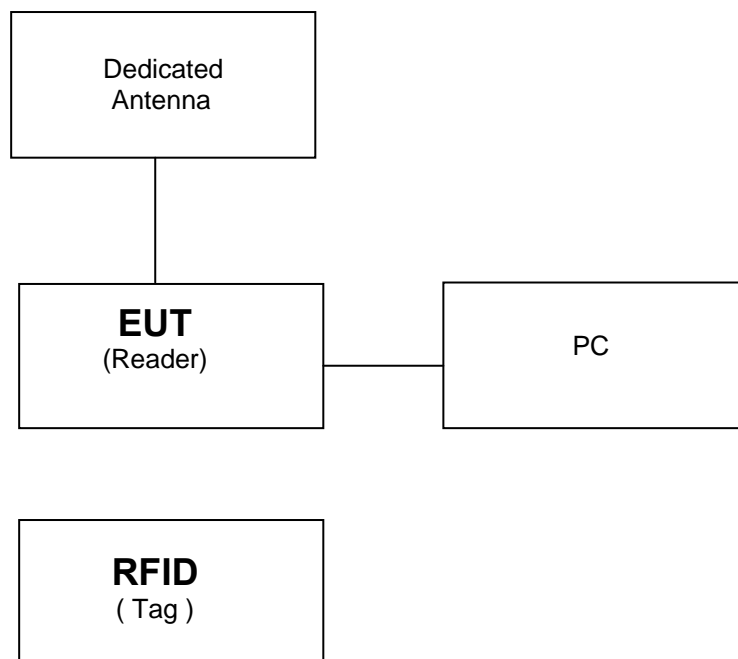




Table 2-1 Equipment Used in Tested System

No.	Product	Manufacturer	Model No.	Serial No.	FCC ID
1	PC	DELL	DIMENSION 2350	OD0120	DoC

### 3.5. Test Description

FCC PART 15		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247	Channel Separation	PASS
FCC Part 15.247	Hopping Channels	PASS
FCC Part 15.247	20dB Bandwidth	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.247	Operation Frequency	PASS
FCC Part 15.247	Spurious Emission	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247	Out of Band Emission and Restricted Band Radiation	PASS
FCC Part 15.247	Dwell Time	PASS

Remark: The measurement uncertainty is not included in the test result.

### 3.6. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.22dB	(1)
Radiated Emission	1~12.75GHz	4.35dB	(1)
Conducted Disturbance	0.15~30MHz	3.29dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

**3.7. Equipments Used during the Test**

AC Power Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCS30	100038	2007/10
2	ARTIFICIAL MAINS	ROHDE & SCHWARZ	ESH2-Z5	100028	2007/10
3	PULSE LIMITER	ROHDE & SCHWARZ	ESHSZ2	100044	2007/10
4	EMI TEST SOFTWARE	ROHDE & SCHWARZ	ES-K1 1.71	N/A	2007/10


Radiated Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA-BROADBAND ANTENNA	ROHDE & SCHWARZ	HL562	100015	2007/06
2	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESI 26	100009	2007/10
3	RF TEST PANEL	ROHDE & SCHWARZ	TS / RSP	335015/ 0017	2007/10
4	TURNTABLE	ETS	2088	2149	2007/10
5	ANTENNA MAST	ETS	2075	2346	2007/10
6	EMI TEST SOFTWARE	ROHDE & SCHWARZ	ESK1	N/A	2007/10

Maximum Peak Output Power / Hopping Channel / 20dB Bandwidth / Band Edge Measurement					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCI	100106	2007/10

## 4. TEST CONDITIONS AND RESULTS

### 4.1. Conducted Emissions Test

#### TEST CONFIGURATION

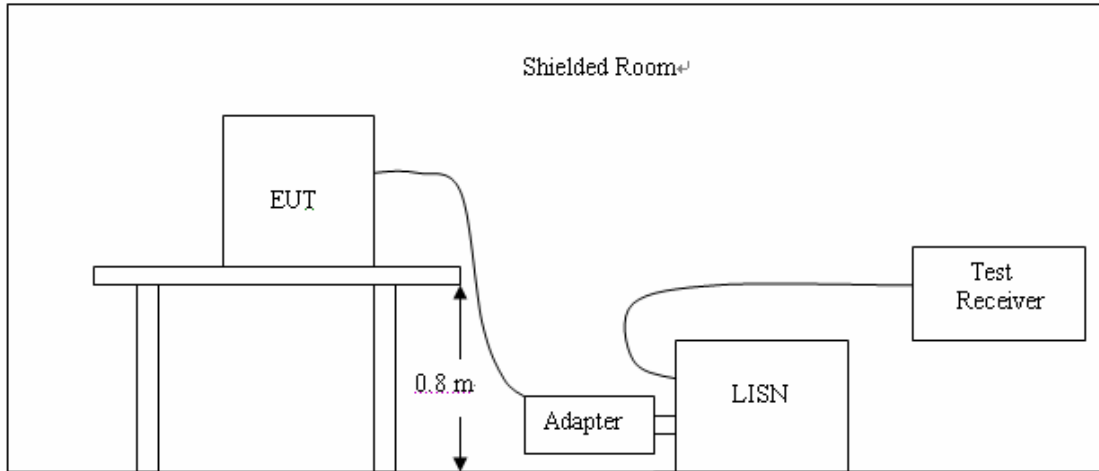

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4.
- 2 Support equipment, if needed, was placed as per ANSI C63.4.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4 The EUT received DC8V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dBµV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

\* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.


**TEST RESULTS**

Shenzhen Huatongwei International Inspection CO.,Ltd

Voltage Mains Test FCC PART 15C

EUT: RFID M/N:XCRF-860  
 Manufacturer: INVENGO  
 Operating Condition: ON  
 Test Site: 3# SHIELDED ROOM  
 Operator: TRACY  
 Test Specification: AC 120V/60Hz  
 Comment:  
 Start of Test: 7/28/2008 / 10:30:34AM

SCAN TABLE: "Voltage (9K-30M)FIN"  
 Short Description: 150K-30M Voltage

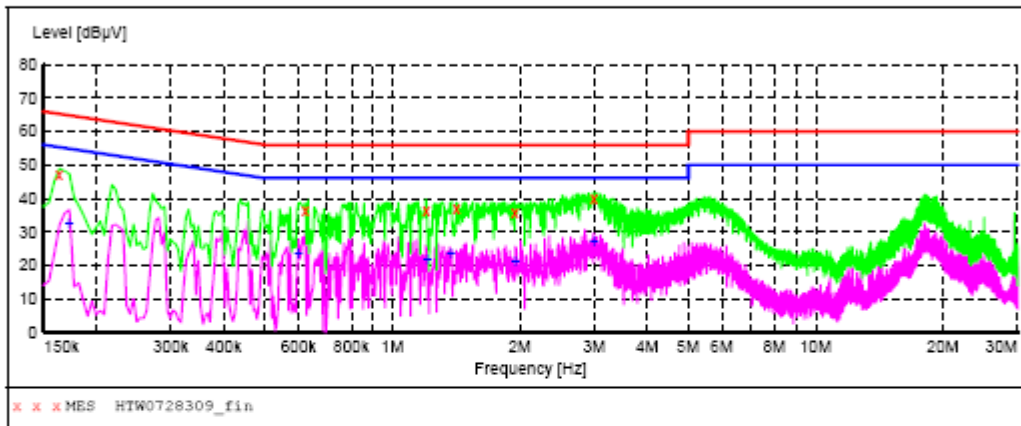

**MEASUREMENT RESULT: "HTW0728309\_fin"**

7/28/2008 10:34AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	FE
0.162500	47.20	10.0	65	18.1	QP	L1	GND
0.622500	36.40	10.1	56	19.6	QP	L1	GND
1.203000	36.40	10.2	56	19.6	QP	L1	GND
1.419000	36.90	10.2	56	19.1	QP	L1	GND
1.950000	35.80	10.2	56	20.2	QP	L1	GND
2.994000	40.20	10.2	56	15.8	QP	L1	GND

**MEASUREMENT RESULT: "HTW0728309\_fin2"**

7/28/2008 10:34AM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	FE
0.172500	32.70	10.0	55	22.1	AV	L1	GND
0.600000	23.80	10.1	46	22.2	AV	L1	GND
1.212000	22.00	10.2	46	24.0	AV	L1	GND
1.378500	23.50	10.2	46	22.5	AV	L1	GND
1.954500	21.50	10.2	46	24.5	AV	L1	GND
2.994000	27.40	10.2	46	18.6	AV	L1	GND

Shenzhen Huatongwei International Inspection CO.,Ltd

Voltage Mains Test FCC PART 15C

EUT: RFID M/N:XCRF-860  
 Manufacturer: INVENGO  
 Operating Condition: ON  
 Test Site: 3# SHIELDED ROOM  
 Operator: TRACY  
 Test Specification: AC 120V/60Hz  
 Comment:  
 Start of Test: 7/28/2008 / 10:35:06AM

SCAN TABLE: "Voltage (9K-30M)FIN"  
 Short Description: 150K-30M Voltage

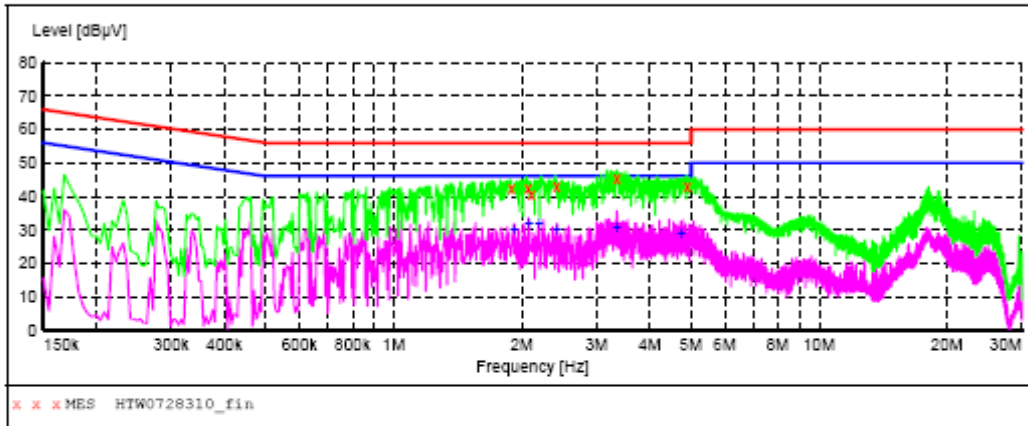

MEASUREMENT RESULT: "HTW0728310\_fin"

7/28/2008 10:38AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	FE
1.891500	42.30	10.2	56	13.7	QP	N	GND
2.067000	42.40	10.2	56	13.6	QP	N	GND
2.107500	40.50	10.2	56	15.5	QP	N	GND
2.413500	42.70	10.2	56	13.3	QP	N	GND
3.349500	45.40	10.3	56	10.6	QP	N	GND
4.906500	42.90	10.3	56	13.1	QP	N	GND

MEASUREMENT RESULT: "HTW0728310\_fin2"


7/28/2008 10:38AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	FE
1.918500	30.10	10.2	46	15.9	AV	N	GND
2.080500	32.10	10.2	46	13.9	AV	N	GND
2.197500	31.90	10.2	46	14.1	AV	N	GND
2.427000	30.60	10.2	46	15.4	AV	N	GND
3.349500	30.80	10.3	46	15.2	AV	N	GND
4.744500	28.90	10.3	46	17.1	AV	N	GND


### 4.2. Radiated Emission Test

#### TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

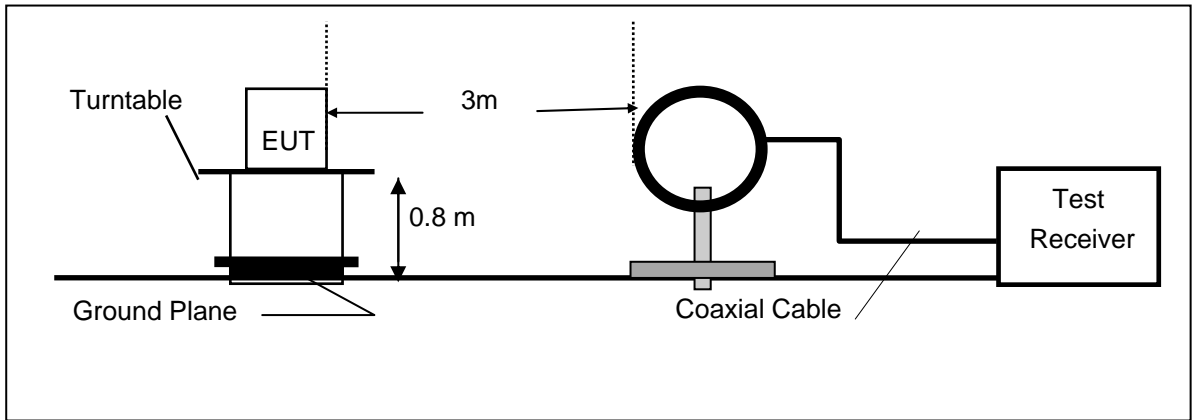

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

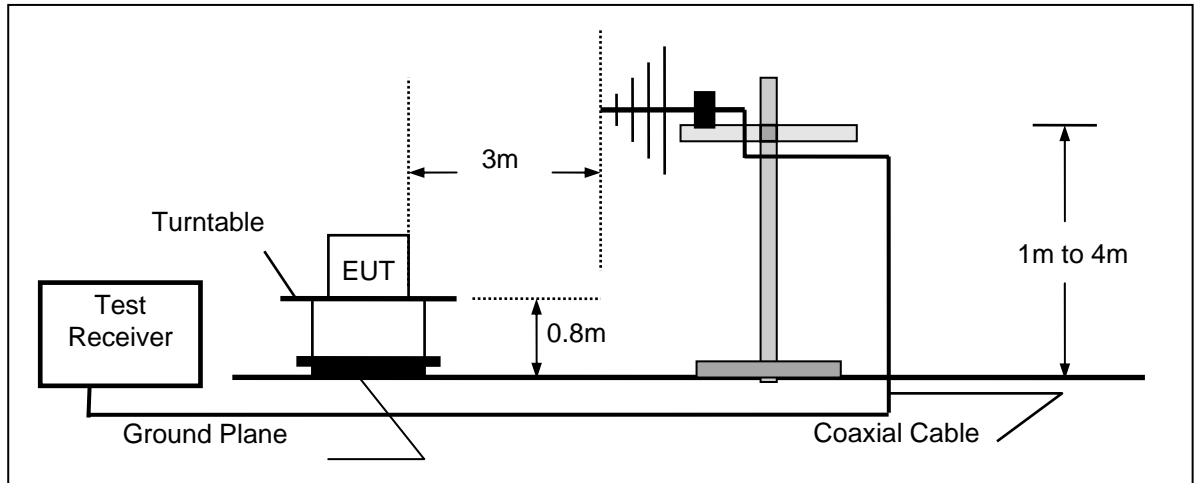

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

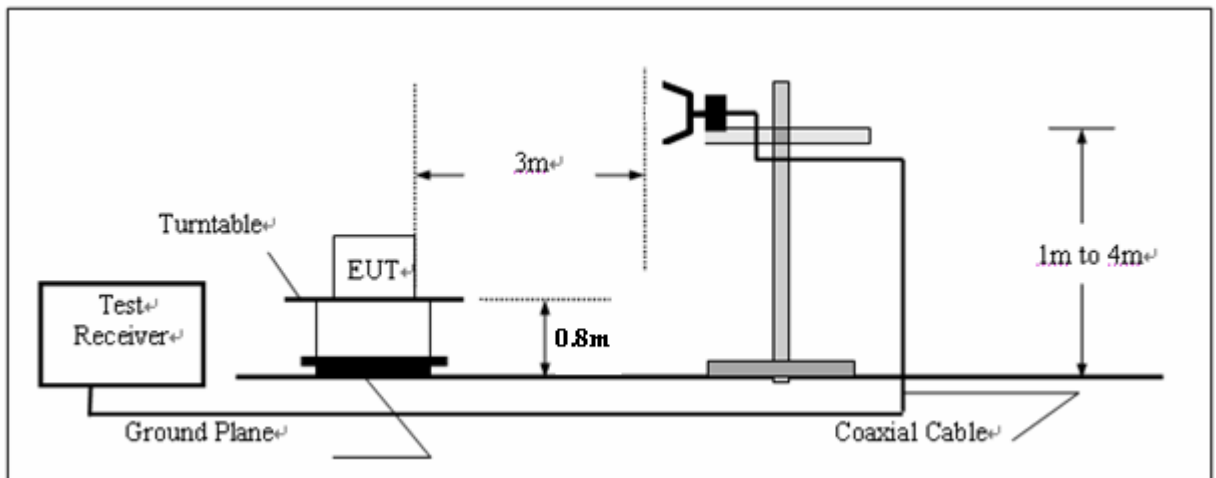

**TEST PROCEDURE**

- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
- 2 Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

**RADIATION LIMIT**

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

**TEST RESULTS****Below 1GHz:**

Frequency (MHz)	Ant/CL/ Amp.CF (dB)	Meter Reading at 3m(dB $\mu$ V)		Limits (dB $\mu$ V/m)	Emission Level at 3m(dB $\mu$ V/m)	
		Horizontal	Vertical		Horizontal	Vertical
30.00	20.70	*	*	40.00	*	*
74.70	11.00	26.10	31.80	40.00	30.70	31.80
107.76	14.10	25.40	20.90	43.50	26.40	33.80
168.02	10.90	18.20	11.90	43.50	31.40	33.00
500.42	20.10	18.40	15.20	46.00	38.50	42.40
519.86	20.70	20.	10.30	46.00	32.00	24.40
930.02	25.50	13.10	13.00	46.00	40.20	38.60
1000.00	24.30	*	*	54.00	*	*

**REMARKS :**

1. \*Undetectable

2. The IF bandwidth of EMI Test Receiver was 120KHz for measuring from 30 MHz to 1 GHz and 1 MHz for measuring above 1 GHz

**Spurious Emission on Transmitting:**

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBUV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBUV/m)	Limit3m (dBUV/m)	Safe Margin (dB)
Below 1 GHz	V	Peak	---				At least 20
Below 1 GHz	H	Peak	---				dB down
Above 1 GHz	V	Peak	---				than the
Above 1 GHz	H	Peak	---				Limit

**Remark:**

- (1) Measuring frequencies from 25 MHz to the 10 GHz.
- (2) Datum of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) The IF bandwidth of EMI Test Receiver between 25MHz to 1GHz was 120KHz and 1 MHz for above 1 GHz

**Spurious Emission on Receiving:**

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBUV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBUV/m)	Limit3m (dBUV/m)	Safe Margin (dB)
Below 1 GHz	V	Peak	---				At least 20
Below 1 GHz	H	Peak	---				dB down
Above 1 GHz	V	Peak	---				than the
Above 1 GHz	H	Peak	---				Limit


**Remark:**

- (1) Measuring frequencies from 25 MHz to the 10 GHz.
- (2) Datum of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) The IF bandwidth of EMI Test Receiver between 25MHz to 1GHz was 120KHz and 1 MHz for above 1 GHz



### 4.3. Maximum Peak Output Power

#### TEST CONFIGURATION



#### TEST PROCEDURE

1. Connect the EUT to Spectrum Analyzer through a 10 dB attenuator.
2. The spectrum shall be set as follows:
  - Span : 1.5 times channel integration bandwidth.
  - RBW : 10 KHz
  - VBW : 30 KHz
  - Detector : Peak
  - Sweep : Single trace
- 3 Compute the combined power of all signal responses contained in the trace by covering all the data points.
4. For 99% occupied BW, place the markers at the frequency at which 0.5% of the power lies to the right of the right marker and 0.5% of the power lies to the left of the left marker.
5. The peak output power is the channel power integrated over 99% bandwidth.


#### LIMIT

The Maximum Peak Output Power Measurement is 30dBm.


#### TEST RESULTS

Company	Invengo Information Technology Co., Ltd.	Test Date	07/28/2008
Product Name	Reader	Test By	Tracy Qi
Model Name	XCRF-860	TEMP&Humidity	25 °C, 53%


Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	902.75	26.61	30	PASS
Mid	914.75	26.75	30	PASS
High	927.25	24.03	30	PASS

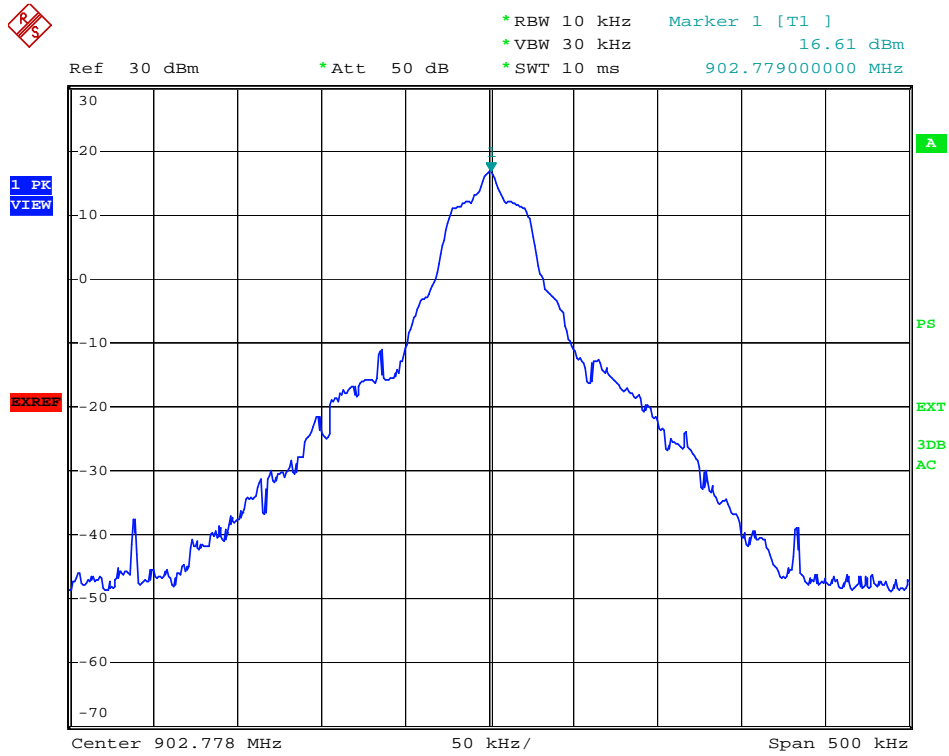

Date: 6.AUG.2008 10:00:49

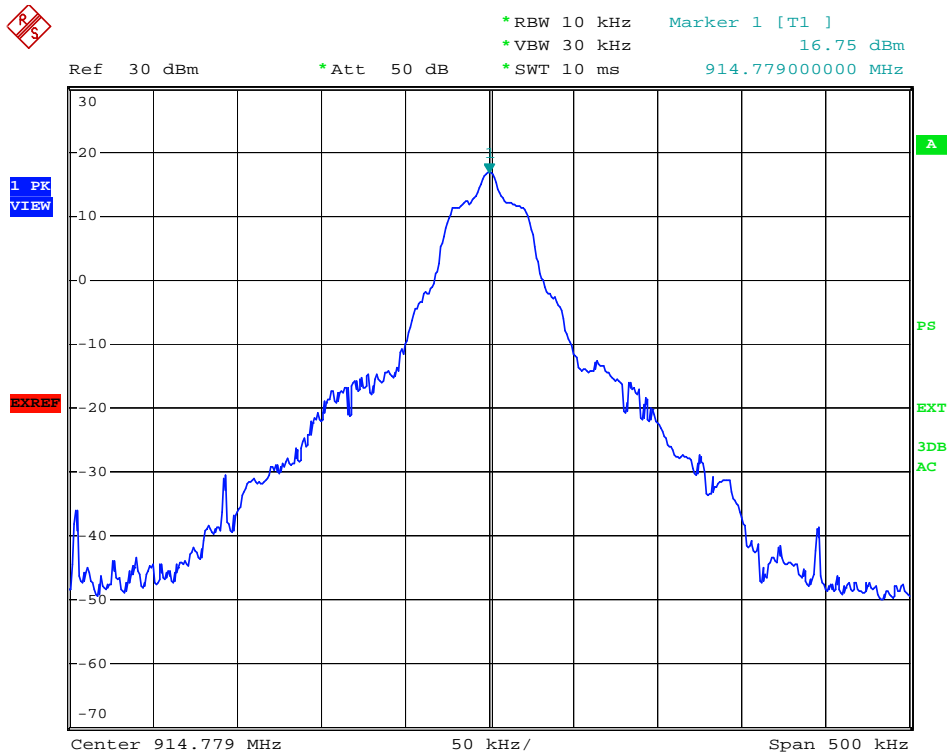


Date: 6.AUG.2008 10:02:07

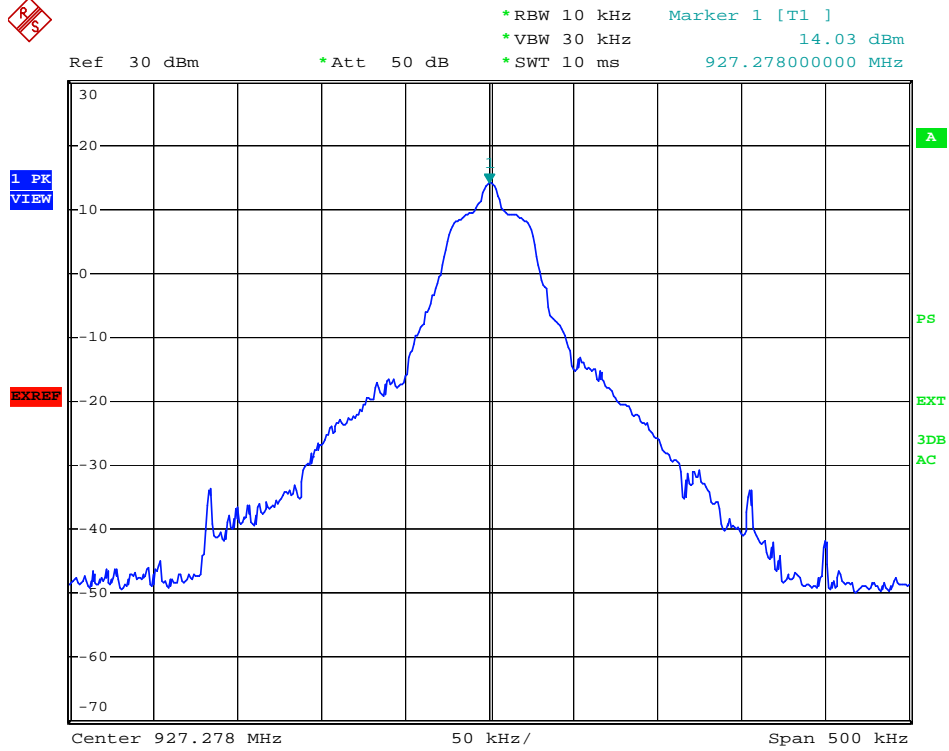

Date: 6.AUG.2008 10:03:00

### 4.4. Hopping Channel

#### TEST CONFIGURATION

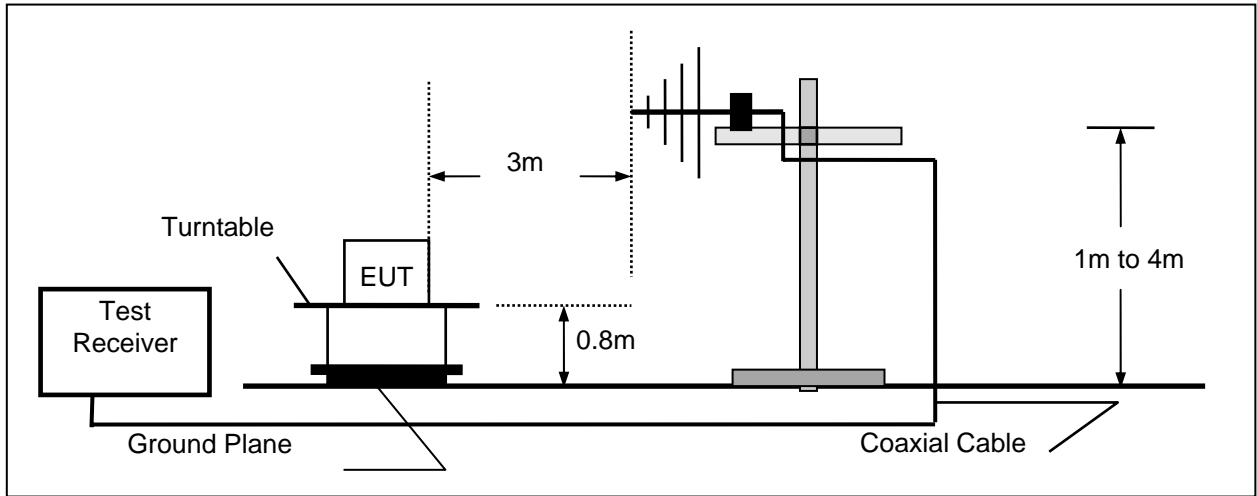

#### TEST PROCEDURE


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as Normal Operation mode
3. Set SPA Start Frequency = 902 MHz, Stop Frequency= 928 MHz, RBW= 100 KHz, VBW= 300 KHz.
4. Set SPA Trace 1 Max hold, then View.

#### LIMIT

Per 15.247 (a)(1)(i) At least 50 hopping Frequencies for 20 dB channel bandwidth less than 250 KHz

#### TEST RESULTS

Total 50 Channel

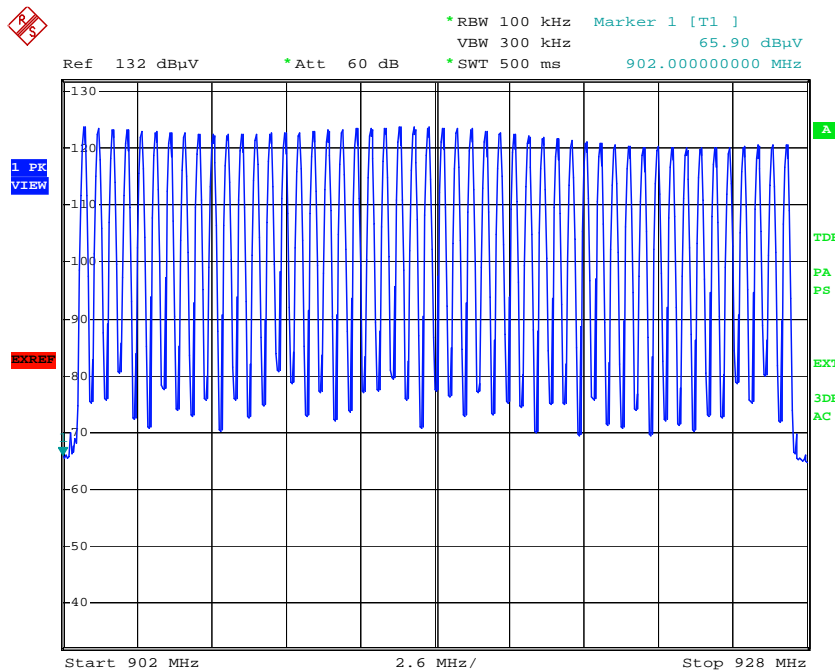

### 4.5. Channel Separation

#### TEST CONFIGURATION

The same as described in Section 4.4


#### TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as Normal Operation mode
3. Set Start Frequency = 902MHz, Stop Frequency = 904 MHz, RBW= 10 KHz, VBW= 30 KHz
4. Set SPA Trace 1 Max hold, then View.

#### LIMIT

Per 15.247 (a)(1) At least 25 KHz or 20 dB bandwidth of the hopping Channel, whichever is greater

#### TEST RESULTS

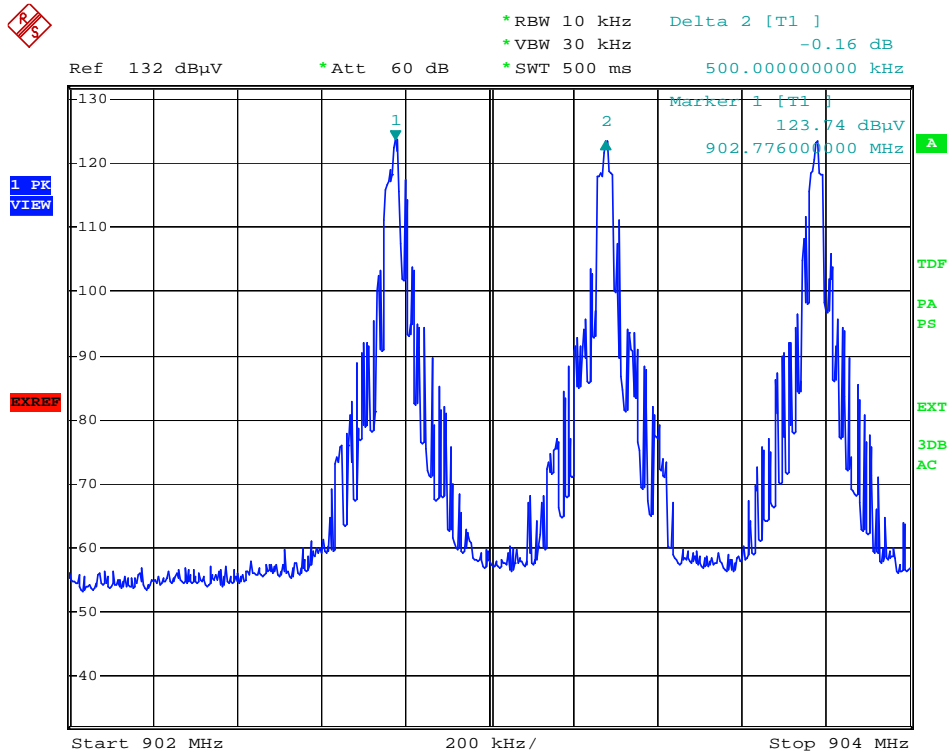

Date: 6.AUG.2008 09:37:38

### 4.6. Band Edge Measurement

#### TEST CONFIGURATION

The same as described in Section 4.4


#### TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as Continuous Transmitting Mode.
3. Set SPA Center Frequency = Bottom Channel for lowest frequency band edge ( Top Channel for highest frequency band edge ) RBW= 10 KHz, VBW= 30 KHz
4. Set SPA Trace 1 Max hold, then View.


#### LIMIT

Per 15.247 (c) In any 100 KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100 KHz bandwidth within the band that contains the highest level of the desired power.

#### TEST RESULTS

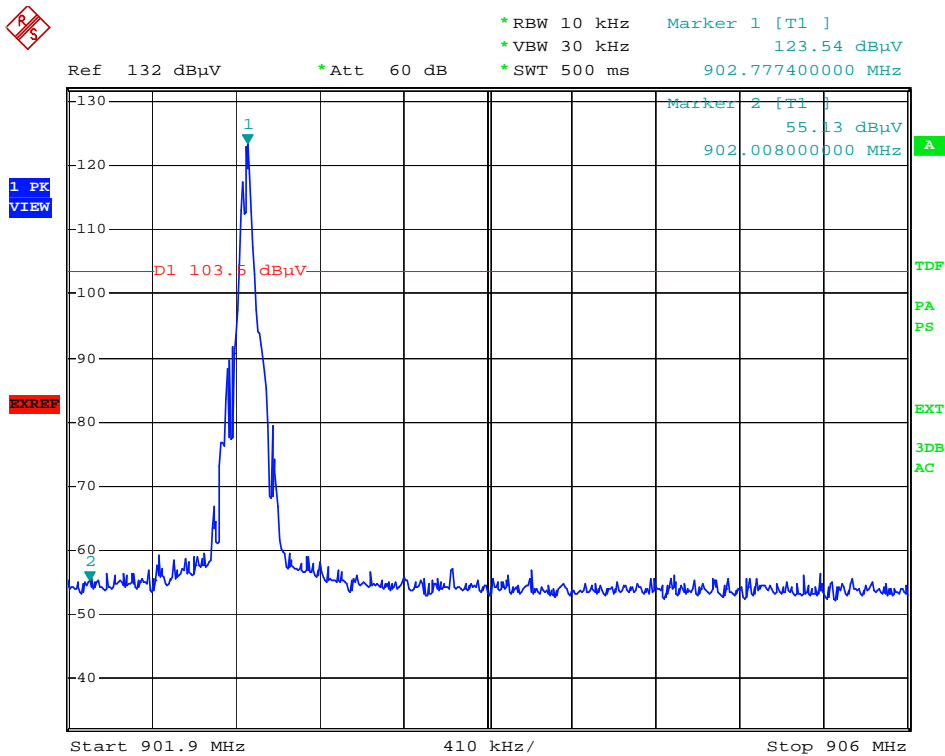

Date: 6.AUG.2008 09:56:24

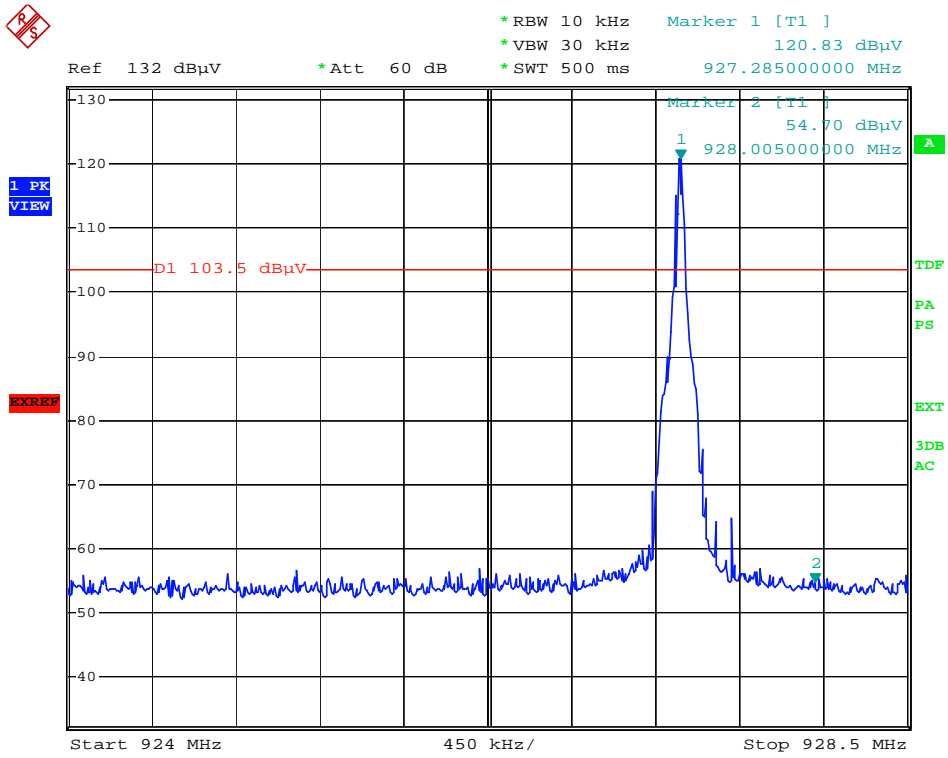

Date: 6.AUG.2008 09:57:55

### 4.7. 20dB Bandwidth Measurement

#### TEST CONFIGURATION

The same as described in Section 4.4


#### TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as continuous transmitting mode
3. Set SPA Center Frequency = Operation Frequency, RBW, VBW= 30 KHz, Span =500 KHz.
4. Set SPA Trace 1 Max hold, then View.

#### LIMIT

Per 15.247 (a)(1) At least 25 KHz or 20 dB bandwidth of the hopping Channel, whichever is greater

#### TEST RESULTS

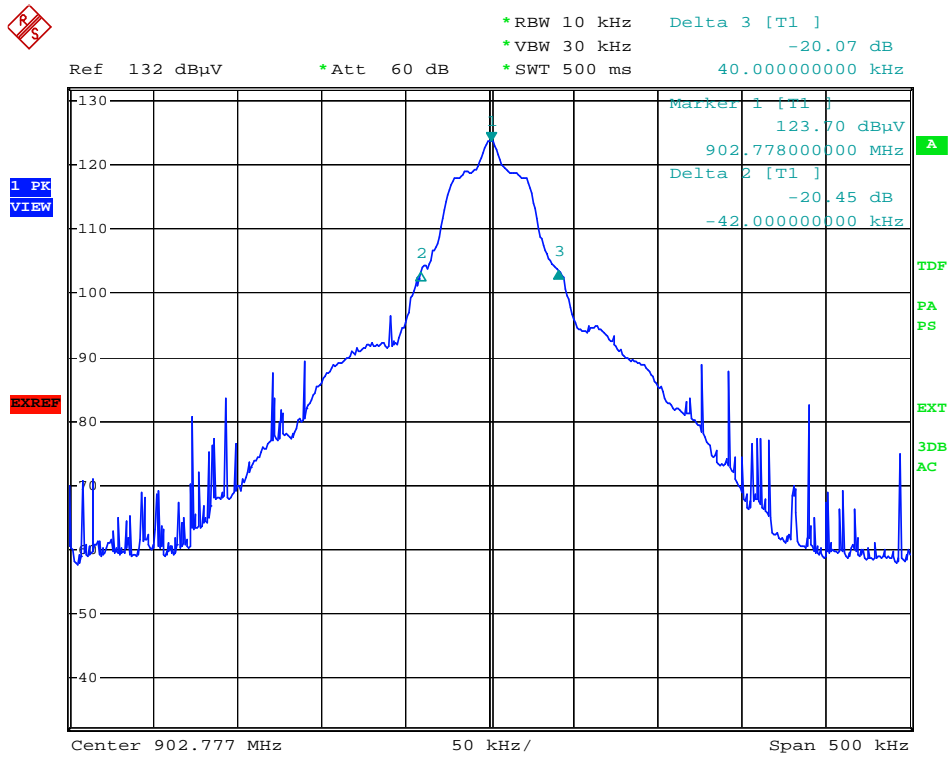


Date: 6.AUG.2008 09:46:37






\*RBW 10 kHz    Marker 1 [T1 ]  
\*VBW 30 kHz    123.51 dBμV  
\*SWT 500 ms    914.778000000 MHz  
Ref 132 dBμV    \*Att 60 dB

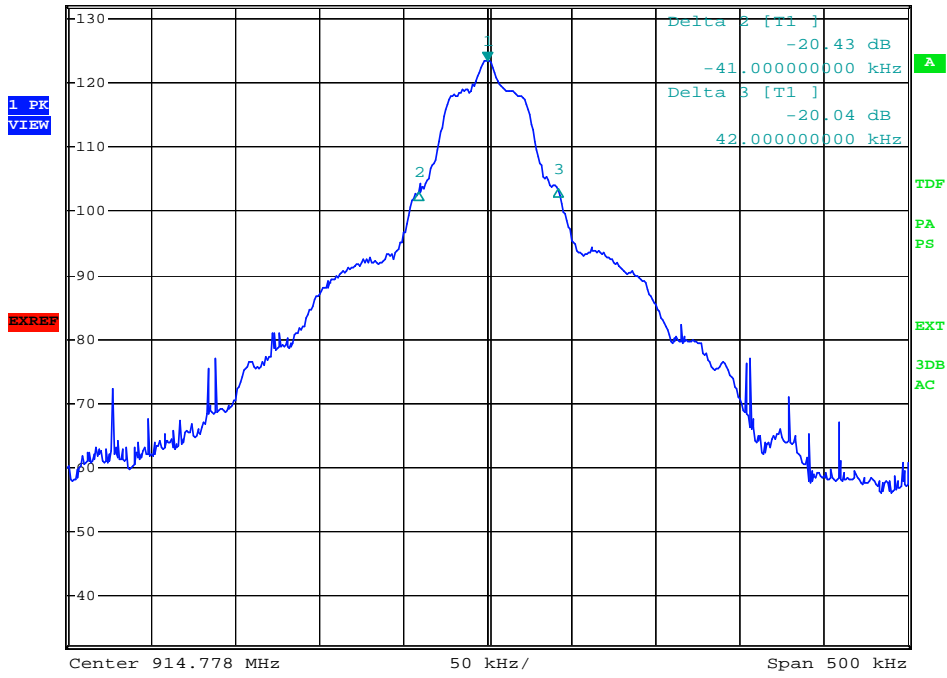

Date: 6.AUG.2008 09:47:57



\*RBW 10 kHz    Marker 1 [T1 ]  
\*VBW 30 kHz    120.68 dBμV  
\*SWT 500 ms    927.279000000 MHz  
Ref 132 dBμV    \*Att 60 dB

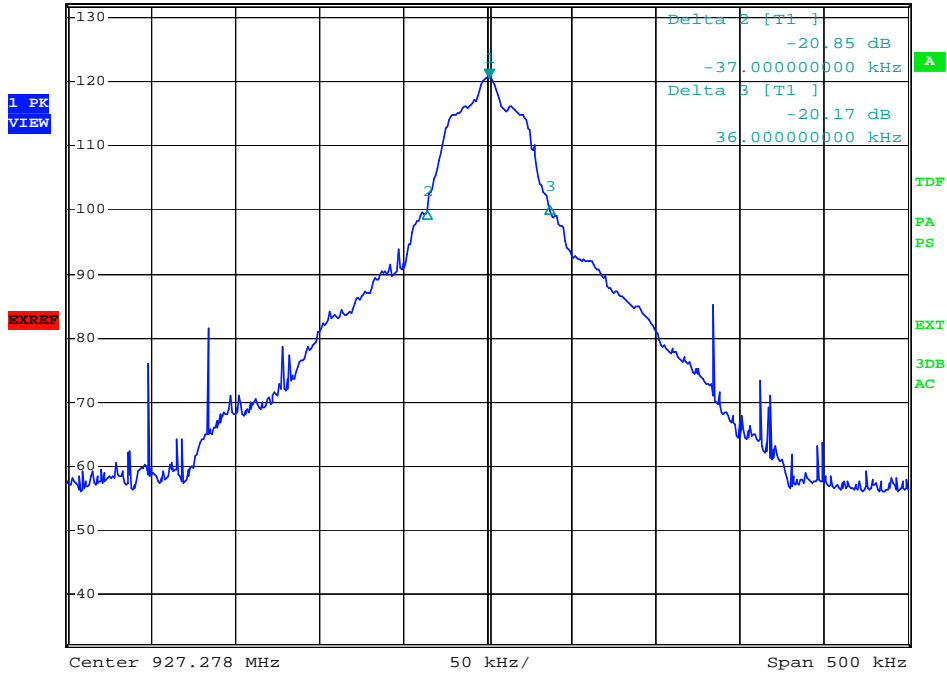

Date: 6.AUG.2008 09:49:54

### 4.8. Operation Frequency

#### TEST CONFIGURATION

The same as described in Section 4.4

#### TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as Continuous Transmitting Mode.
3. Set SPA Start Frequency = 902MHz, Stop Frequency = 908 MHz, RBW= 10 KHz, VBW= 30 KHz,
4. Set SPA Trace 1 Max hold, then View.

#### LIMIT


Per 15.247 The operation frequencies shall lie wholly within 902 MHz to 928 MHz

#### TEST RESULTS

Limits and Measurement Result Of Operation Frequency		
Applicable Limits	Measurement Result	
	Test Data	Criteria
Per 15.247 The operation frequencies shall lie wholly within 902 MHz to 928 MHz	FI=902.780 MHz Ft=927.324 MHz	PASS

#### Notes:

FI means the lowest band edge frequency of the bottom channel; Ft means the highest band edge frequency of the top channel

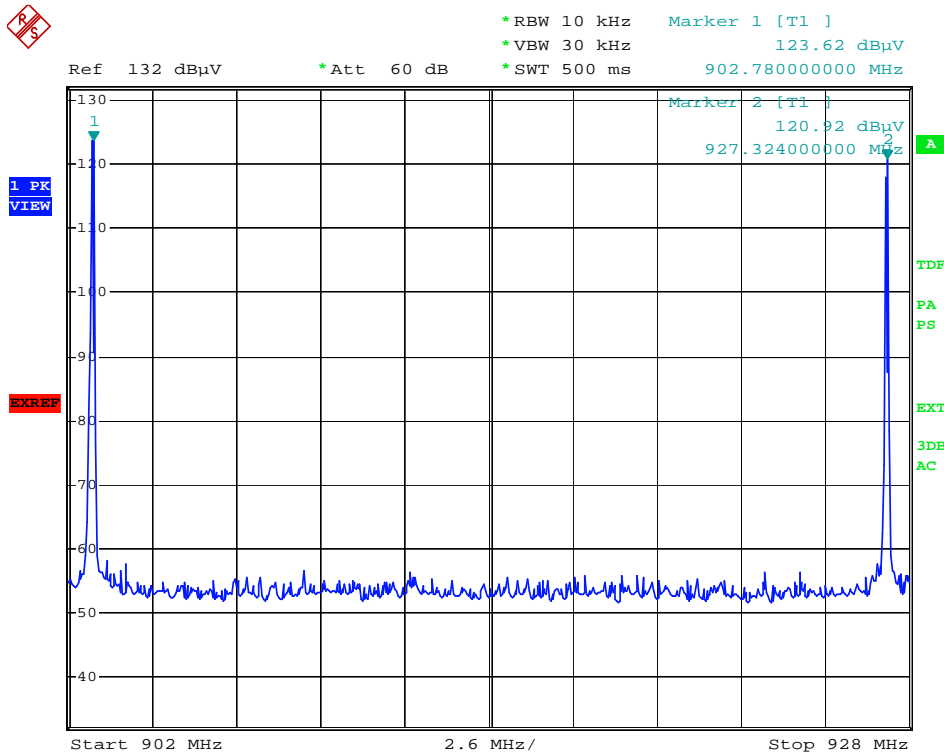

### 4.9. Dwell Time

#### TEST CONFIGURATION

The same as described in Section 4.4


#### TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as Normal Operation mode
3. Set SPA Span= 0 Hz, RBW= 100 KHz, VBW= 300 KHz
4. Set SPA Trace 1 Max hold, then View.

#### LIMIT

Per 15.247 (a)(1)(ii) The average time of occupancy on any frequency shall not be greater than 0.4 seconds



#### TEST RESULTS

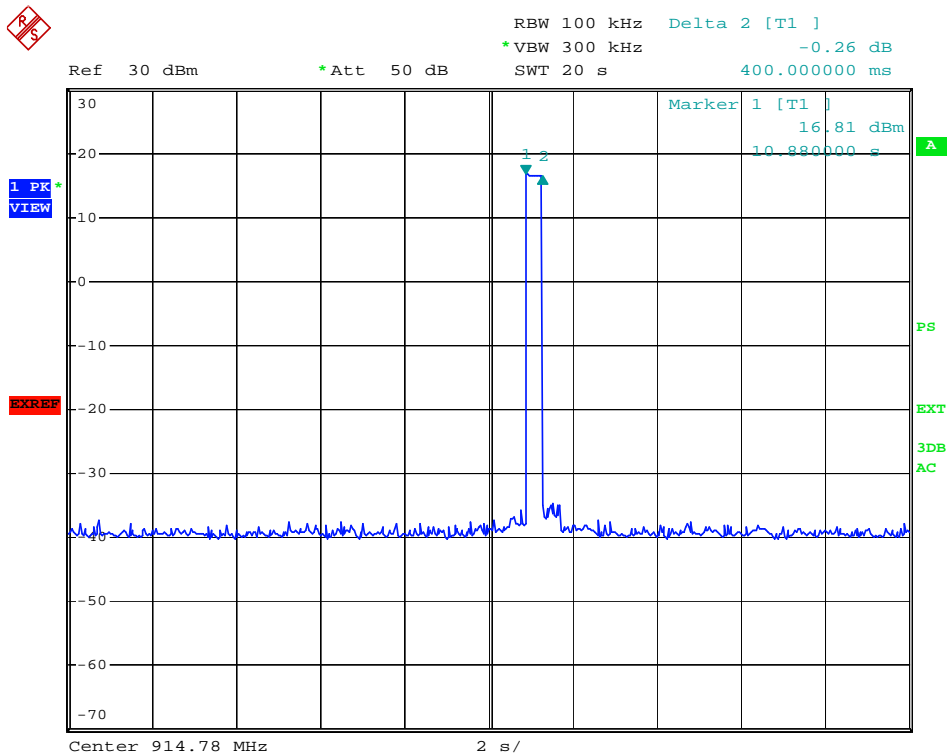

Date: 6.AUG.2008 10:05:36

**APPENDIX 1--PHOTOGRAPHS OF SET UP**

**Radiated Emission**

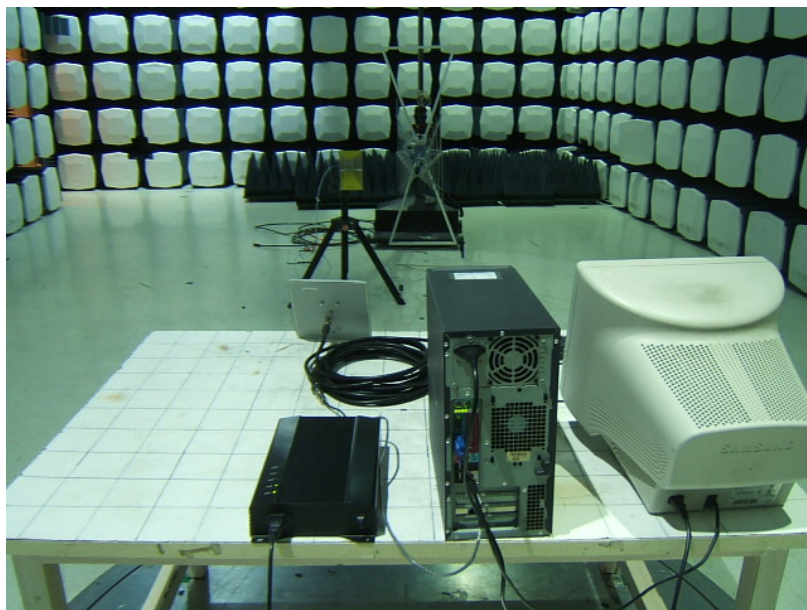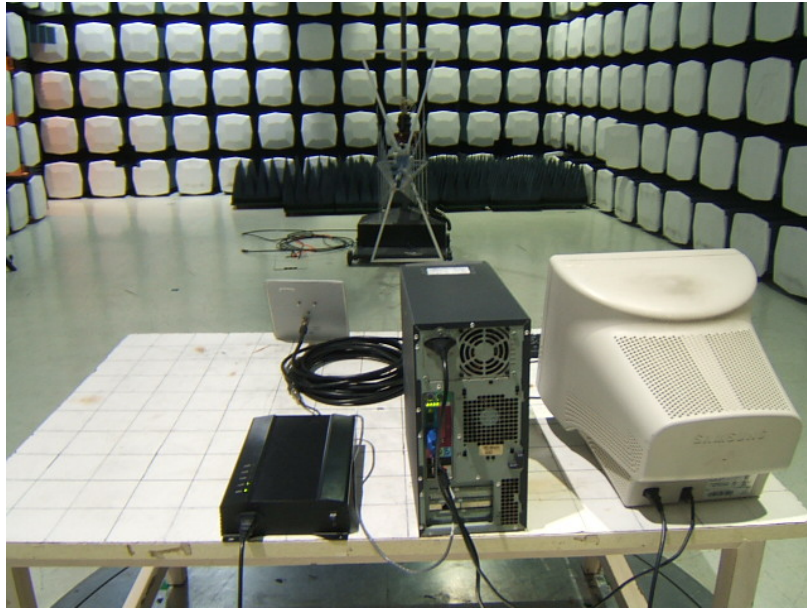

Conducted Emission




**APPENDIX 2--PHOTOGRAPHS OF EUT**

**External Photos of EUT**

***Top View of EUT***



***Bottom View of EUT***

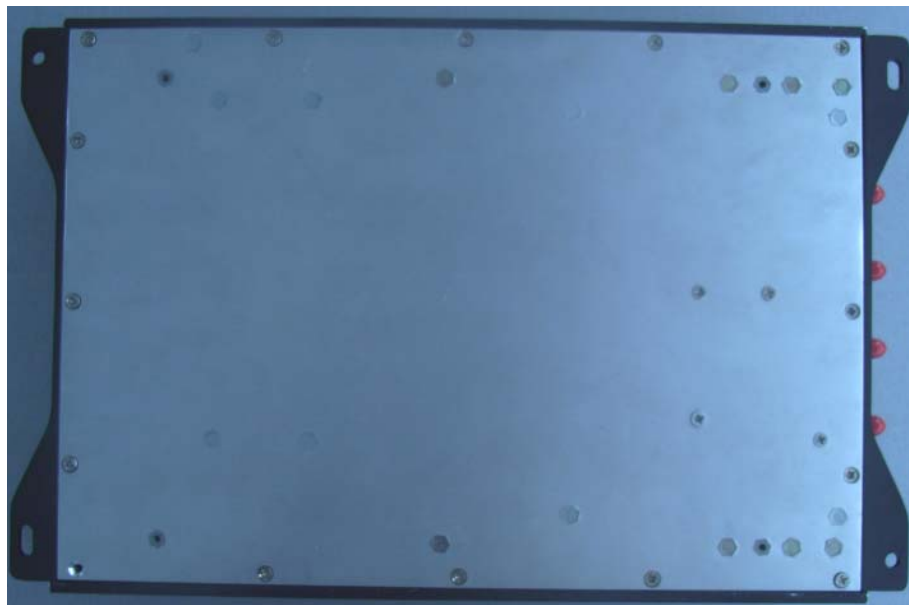

**Front View of EUT**



**Back View of EUT**



**Left View of EUT**



***Right View of EUT***



***Cable of System***




***Antenna of System***






**Internal Photos of EUT**


***Internal of EUT-1***

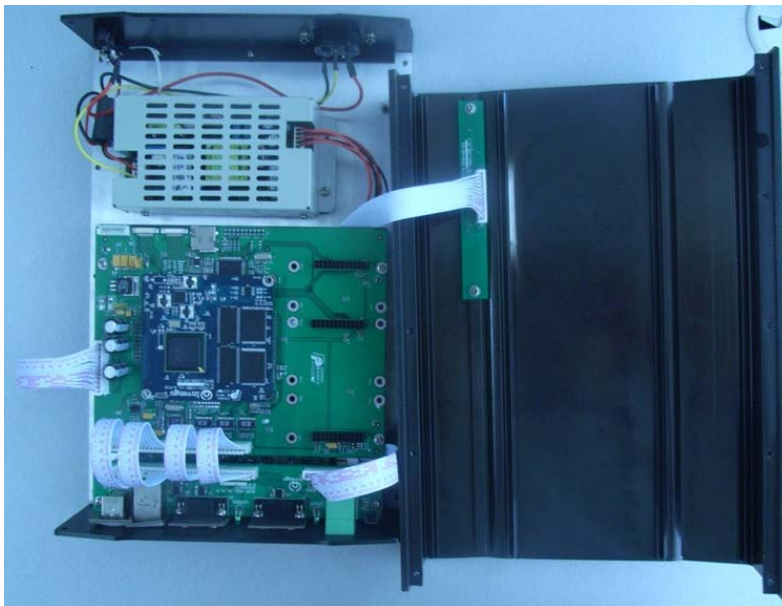


***Internal of EUT-2***

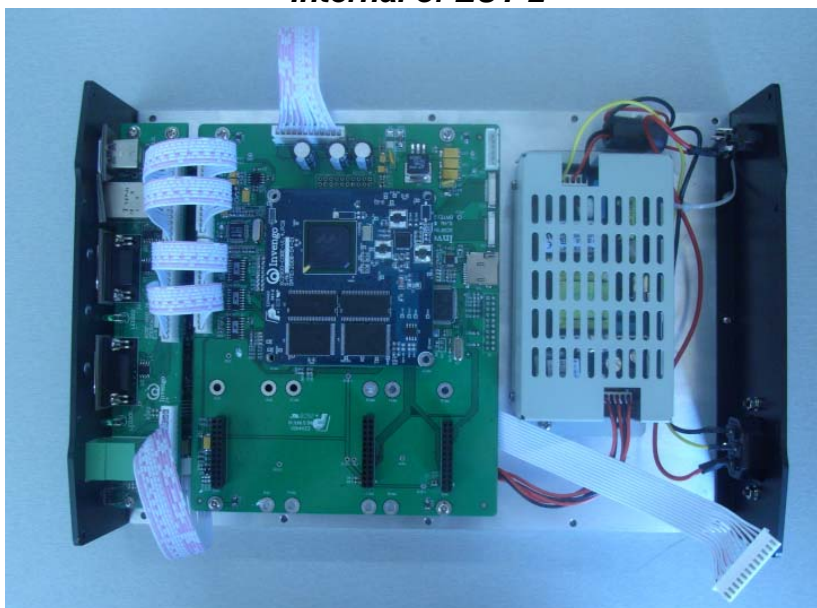

***Internal of EUT-3***

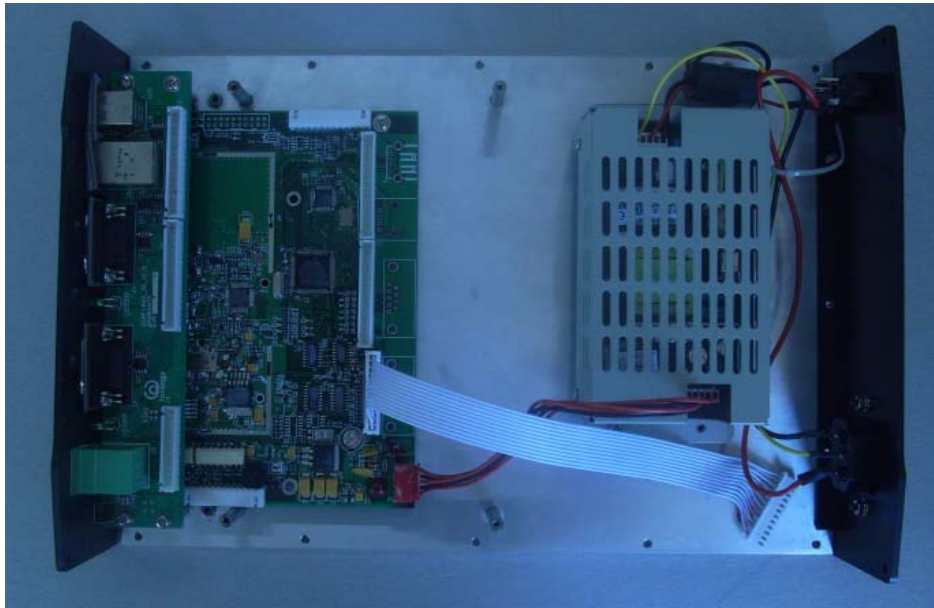


***Internal of EUT-4***

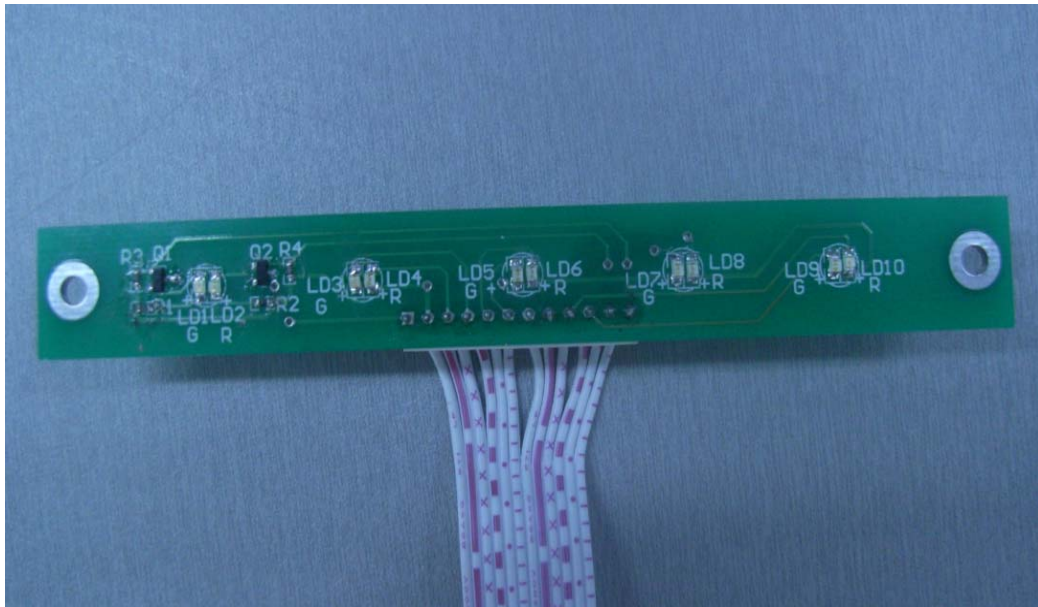


***Internal of EUT-5***



***Internal of EUT-6***

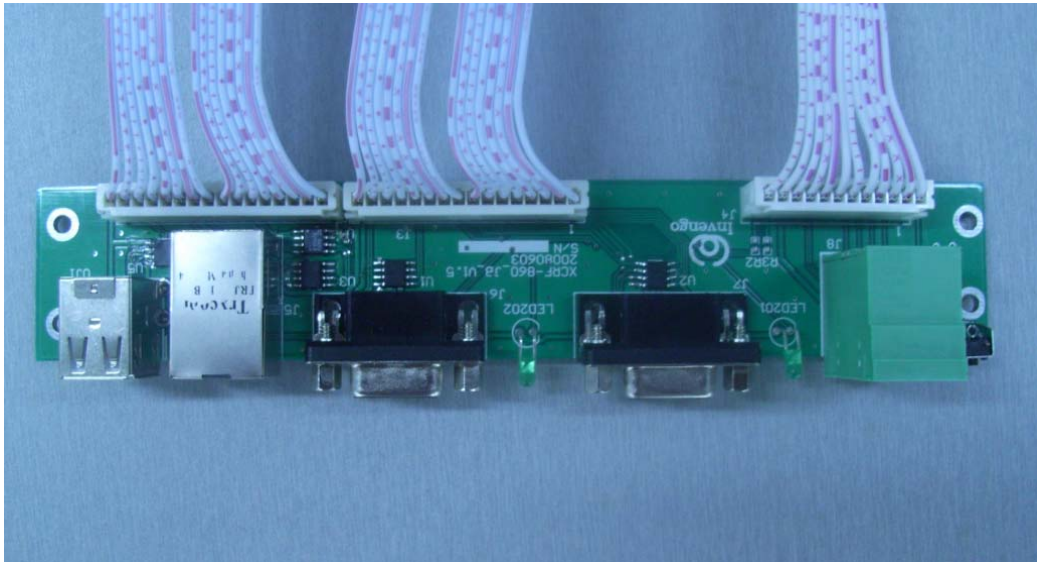


***Internal of EUT-7***

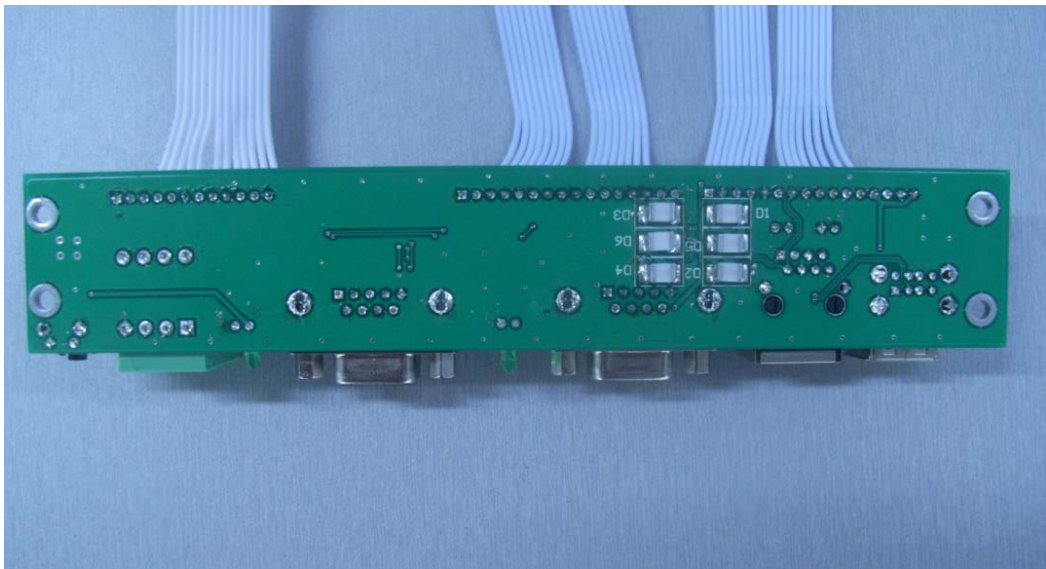


***Internal of EUT-8***




***Internal of EUT-9***

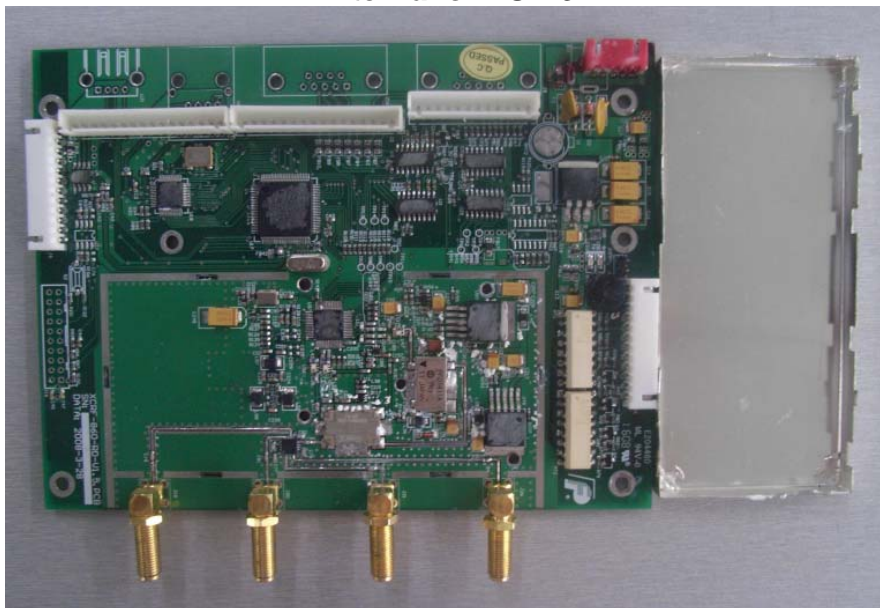


***Internal of EUT-10***

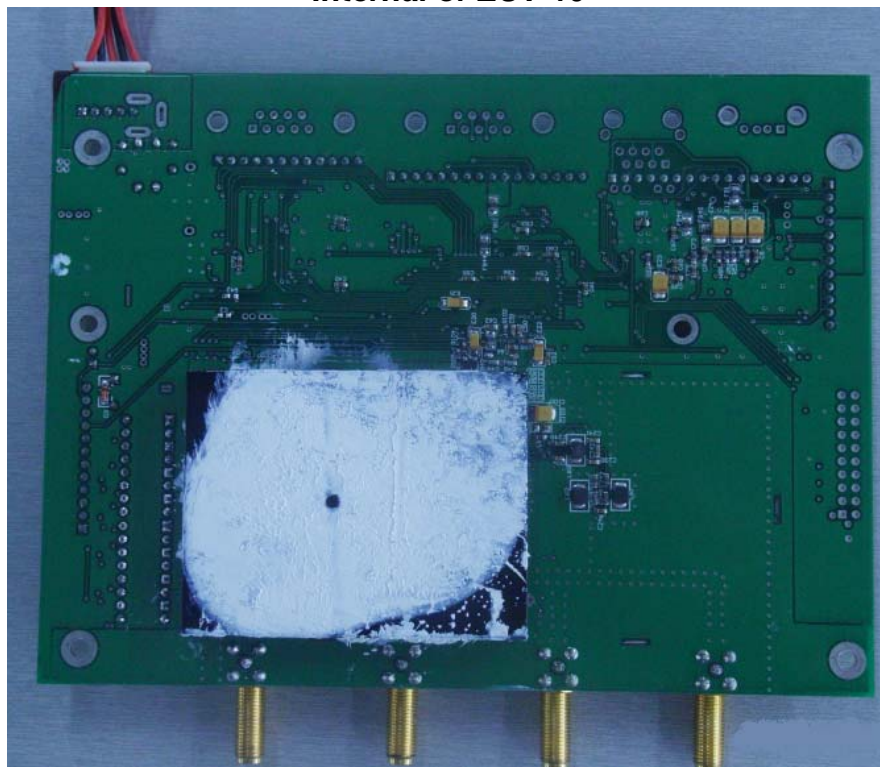


*Internal of EUT-11*

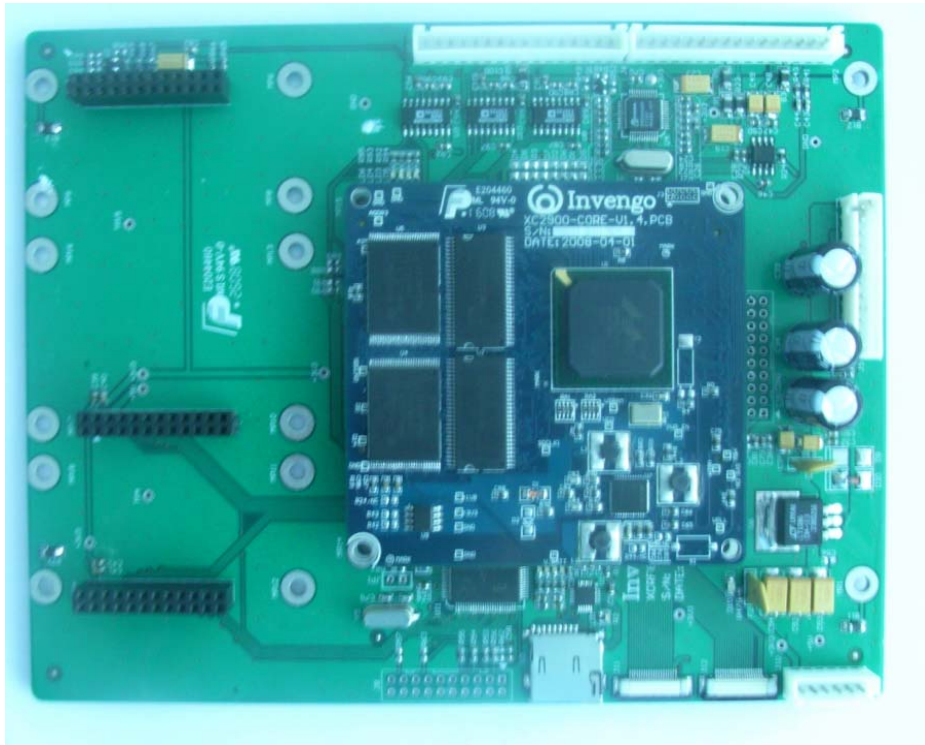


*Internal of EUT-12*

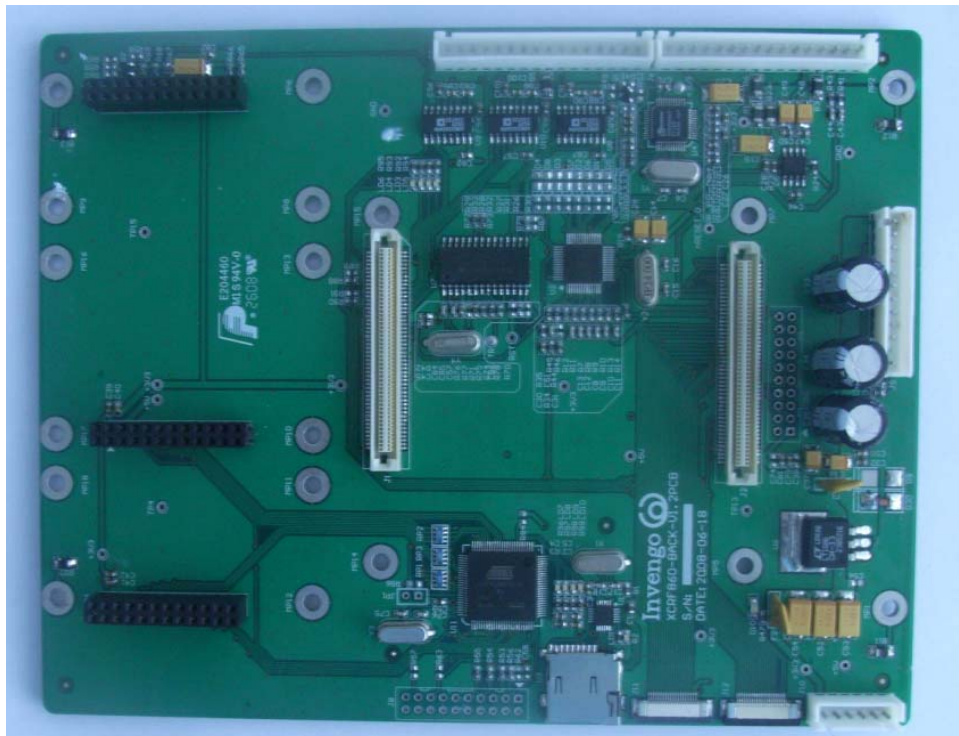


*Internal of EUT-13*

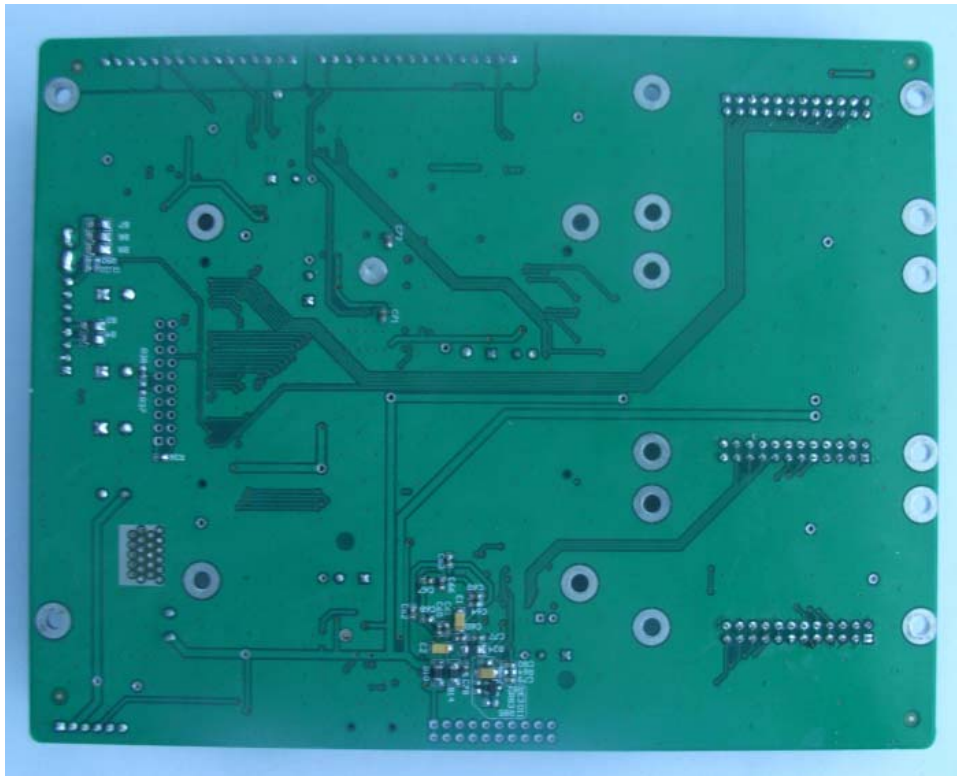


*Internal of EUT-14*

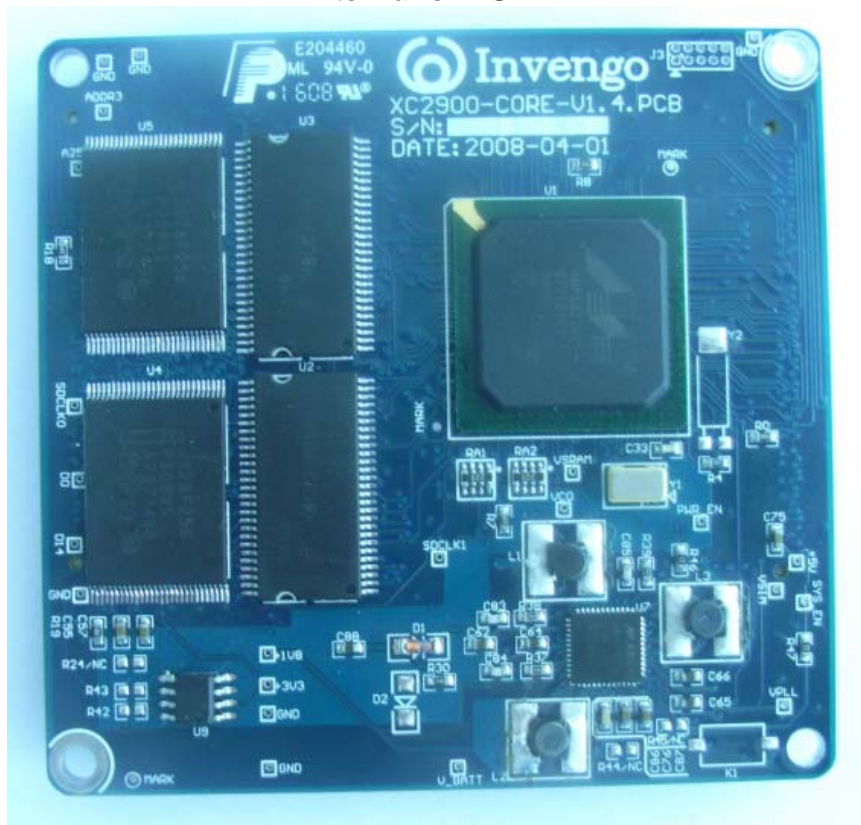

*Internal of EUT-15*

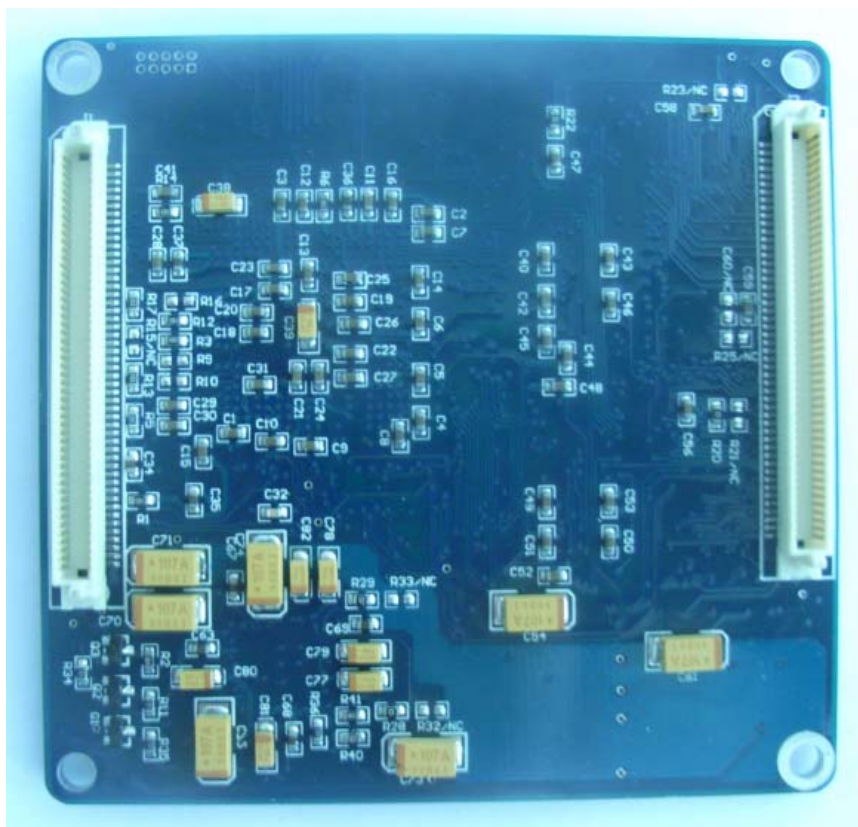


*Internal of EUT-16*

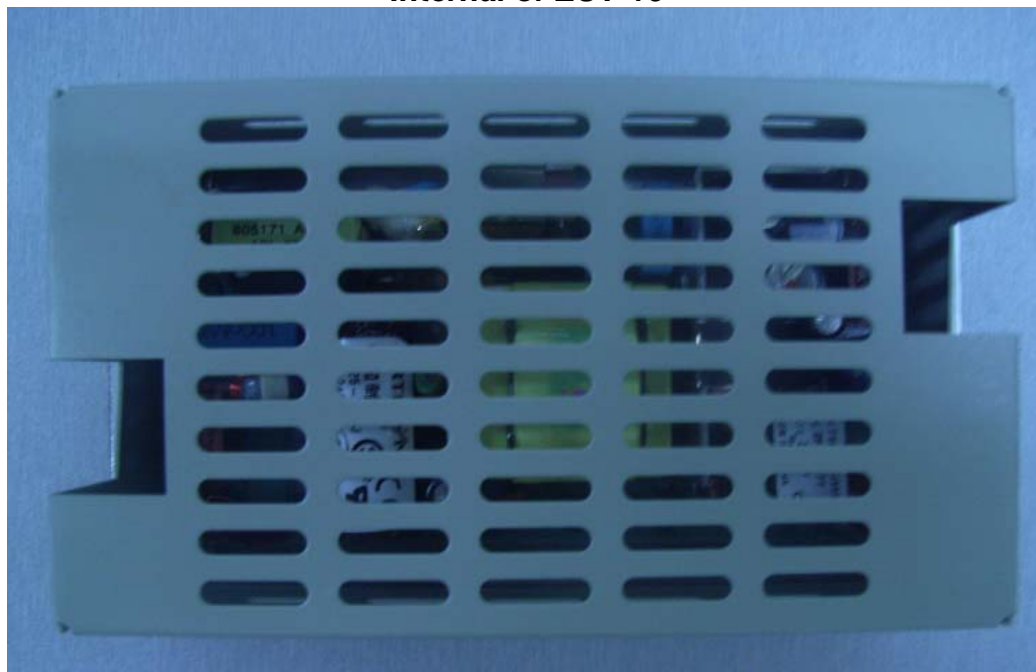

*Internal of EUT-17*



*Internal of EUT-18*

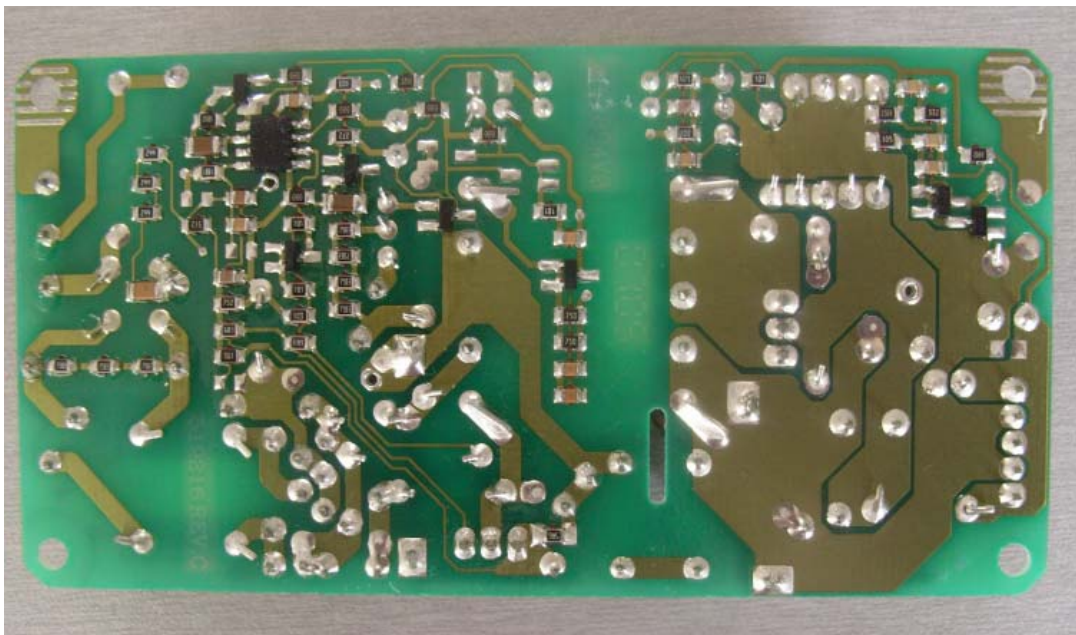

.....End of Report.....