

# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

**Test Report No.** : OT-19D-RWD-040

**AGR No.** : A19NA-393

**Applicant** : HYUNDAI MOBIS CO., LTD.

**Address** : 203, Teheran-ro, Gangnam-gu, Seoul, Korea

**Manufacturer** : Jiangsu Mobis Automotive Parts Co., Ltd.

**Address** : No.70 Hope Road South, Economic Developing Zone, Yancheng City, Jiangsu Province, China

**Type of Equipment** : DIGITAL CAR AUDIO SYSTEM

**FCC ID.** : TQ8-ACB10H7GN

**Model Name** : ACB10H7GN

**Multiple Model Name** : N/A

**Serial number** : N/A

**Total page of Report** : 78 pages (including this page)

**Date of Incoming** : November 26, 2019


**Date of issue** : December 11, 2019

## SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:   
 \_\_\_\_\_  
 Ha-Ram Lee / Assistant Manager  
 ONETECH Corp.

Approved by:   
 \_\_\_\_\_  
 Jae-Ho Lee / Chief Engineer  
 ONETECH Corp.

## CONTENTS

**PAGE**

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>6</b>
<b>2. TEST SUMMARY.....</b>	<b>7</b>
<b>2.1 TEST ITEMS AND RESULTS .....</b>	<b>7</b>
<b>2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....</b>	<b>7</b>
<b>2.3 RELATED SUBMITTAL(S) / GRANT(S) .....</b>	<b>7</b>
<b>2.4 PURPOSE OF THE TEST .....</b>	<b>7</b>
<b>2.5 TEST METHODOLOGY.....</b>	<b>7</b>
<b>2.6 TEST FACILITY.....</b>	<b>8</b>
<b>3. GENERAL INFORMATION.....</b>	<b>9</b>
<b>3.1 PRODUCT DESCRIPTION.....</b>	<b>9</b>
<b>3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....</b>	<b>10</b>
<b>4. EUT MODIFICATIONS.....</b>	<b>10</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>11</b>
<b>5.1 JUSTIFICATION.....</b>	<b>11</b>
<b>5.2 PERIPHERAL EQUIPMENT .....</b>	<b>11</b>
<b>5.3 MODE OF OPERATION DURING THE TEST .....</b>	<b>12</b>
<b>5.4 CONFIGURATION OF TEST SYSTEM.....</b>	<b>12</b>
<b>5.5 ANTENNA REQUIREMENT .....</b>	<b>12</b>
<b>6. PRELIMINARY TEST .....</b>	<b>13</b>
<b>6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....</b>	<b>13</b>
<b>6.2 GENERAL RADIATED EMISSIONS TESTS .....</b>	<b>13</b>
<b>7. MINIMUM 20 DB BANDWIDTH.....</b>	<b>14</b>
<b>7.1 OPERATING ENVIRONMENT .....</b>	<b>14</b>
<b>7.2 TEST SET-UP .....</b>	<b>14</b>
<b>7.3 TEST EQUIPMENT USED.....</b>	<b>14</b>
<b>7.4 TEST DATA FOR 1 MBPS .....</b>	<b>15</b>
<b>7.5 TEST DATA FOR 2 MBPS .....</b>	<b>17</b>
<b>7.6 TEST DATA FOR 3 MBPS .....</b>	<b>19</b>
<b>8. HOPPING FREQUENCY SEPARATION.....</b>	<b>21</b>
<b>8.1 OPERATING ENVIRONMENT .....</b>	<b>21</b>
<b>8.2 TEST SET-UP .....</b>	<b>21</b>

8.3 TEST EQUIPMENT USED .....	21
8.4 TEST DATA FOR 1 MBPS .....	22
8.5 TEST DATA FOR 2 MBPS .....	23
8.6 TEST DATA FOR 3 MBPS .....	24
<b>9. NUMBER OF HOPPING CHANNELS .....</b>	<b>25</b>
9.1 OPERATING ENVIRONMENT .....	25
9.2 TEST SET-UP .....	25
9.3 TEST EQUIPMENT USED .....	25
9.4 TEST DATA FOR 1 MBPS .....	26
9.5 TEST DATA FOR 2 MBPS .....	29
9.6 TEST DATA FOR 3 MBPS .....	32
<b>10. TIME OF OCCUPANCY .....</b>	<b>35</b>
10.1 OPERATING ENVIRONMENT .....	35
10.2 TEST SET-UP .....	35
10.3 TEST EQUIPMENT USED .....	35
10.4 TEST DATA FOR 1 MBPS .....	36
10.5 TEST DATA FOR 2 MBPS .....	39
10.6 TEST DATA FOR 3 MBPS .....	42
<b>11. MAXIMUM PEAK OUTPUT POWER .....</b>	<b>45</b>
11.1 OPERATING ENVIRONMENT .....	45
11.2 TEST SET-UP .....	45
11.3 TEST EQUIPMENT USED .....	45
11.4 TEST DATA FOR 1 MBPS .....	46
11.5 TEST DATA FOR 2 MBPS .....	49
11.6 TEST DATA FOR 3 MBPS .....	52
<b>12. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND .....</b>	<b>55</b>
12.1 OPERATING ENVIRONMENT .....	55
12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT .....	55
12.3 TEST SET-UP FOR RADIATED MEASUREMENT .....	55
12.4 TEST EQUIPMENT USED .....	55
12.5 TEST DATA FOR CONDUCTED EMISSION .....	56
12.5.1 Test data for 1 Mbps .....	56
12.5.2 Test data for 2 Mbps .....	61
12.5.3 Test data for 3 Mbps .....	66
12.6 TEST DATA FOR TRANSMITTING MODE RADIATED EMISSION .....	71
12.6.1 Radiated Emission which fall in the Restricted Band .....	71

*12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz*.....74

*12.6.3 Spurious Radiated Emission*.....77

### Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-19D-RWD-040	December 11, 2019	Initial Issue	All

**1. VERIFICATION OF COMPLIANCE**

Applicant : HYUNDAI MOBIS CO., LTD.  
 Address : 203, Teheran-ro, Gangnam-gu, Seoul, Korea  
 CONTACT PERSON : Seung hoon Choe / Senior Engineer  
 Telephone No. : +82-31-260-0098  
 FCC ID : TQ8-ACB10H7GN  
 Model Name : ACB10H7GN  
 Brand Name : HYUNDAI MOBIS  
 Serial Number : N/A  
 DATE : December 11, 2019

EQUIPMENT CLASS	<i>DSS – PART 15 SPREAD SPECTRUM TRANSMITTER</i>
KIND OF EQUIPMENT	DIGITAL CAR AUDIO SYSTEM
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	3 m Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

## 2. TEST SUMMARY

### 2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (b) (1)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	N/A (See Note)
15.203	Antenna Requirement	Met requirement / PASS

Note: This test is not performed because the EUT is operated by DC.

### 2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

### 2.3 Related Submittal(s) / Grant(s)

Original submittal only

### 2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247

### 2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

## 2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013



### 3. GENERAL INFORMATION

#### 3.1 Product Description

The HYUNDAI MOBIS CO., LTD., Model ACB10H7GN (referred to as the EUT in this report) is a DIGITAL CAR AUDIO SYSTEM. The product specification described herein was obtained from product data sheet or user’s manual.

Device Type	DIGITAL CAR AUDIO SYSTEM	
Operating Frequency	2 402 MHz ~ 2 480 MHz	
RF Output Power	1 Mbps	-4.68 dBm
	2 Mbps	-4.37 dBm
	3 Mbps	-4.03 dBm
Number of Channel	79 Channels	
Modulation Type	GFSK for 1 Mbps, $\pi/4$ -DQPSK for 2 Mbps, 8-DPSK for 3 Mbps	
Antenna Type	PCB Antenna	
Antenna Gain	-0.16 dBi	
List of each Osc. or crystal Freq.(Freq. $\geq$ 1 MHz)	12 MHz, 26 MHz, 62.4 MHz	
Rated Supply Voltage	DC 14.4 V	

**3.2 Alternative type(s)/model(s); also covered by this test report.**

-. None

**4. EUT MODIFICATIONS**

-. None

## 5. SYSTEM TEST CONFIGURATION

### 5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	N/A	N/A	-
Front Board	N/A	N/A	-

### 5.2 Peripheral equipment

-None

### 5.3 Mode of operation during the test

For Bluetooth function testing, software used to control the EUT for staying in continuous transmitting and receiving mode is programmed. The EUT was set at Low Channel (2 402 MHz), Middle Channel (2 441 MHz), and High Channel (2 480 MHz) with each data transfer rate, 1 Mbps, 2 Mbps, and 3 Mbps. To get a maximum radiated emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this test report.

### 5.4 Configuration of Test System

**Radiated Emission Test:** The EUT was tested in the Transmitting mode. Preliminary radiated emissions test was conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 m Semi Anechoic Chamber. The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

### 5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed as to be attached permanently to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

**Antenna Construction:**

The transmitter antenna of the EUT is a PCB Antenna, so no consideration of replacement by the user.

## 6. PRELIMINARY TEST

### 6.1 AC Power line Conducted Emissions Tests

- As this product is only using DC power, AC conducted emission test has not been performed.

### 6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting mode.	X


## 7. MINIMUM 20 dB BANDWIDTH

### 7.1 Operating environment

Temperature : 24 °C  
 Relative humidity : 48 % R.H.

### 7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 10 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

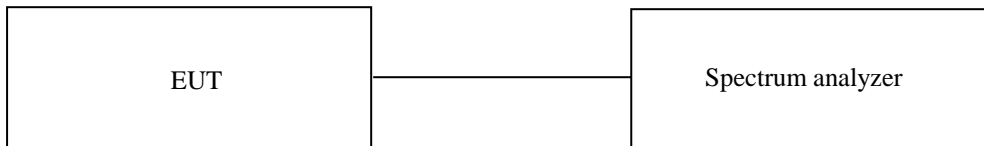

### 7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101199	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.


7.4 Test data for 1 Mbps

-. Test Date : November 28, 2019

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	920.10
Middle	2 441	920.10
High	2 480	920.10



Tested by: Sieon Lee / Assistant Manager

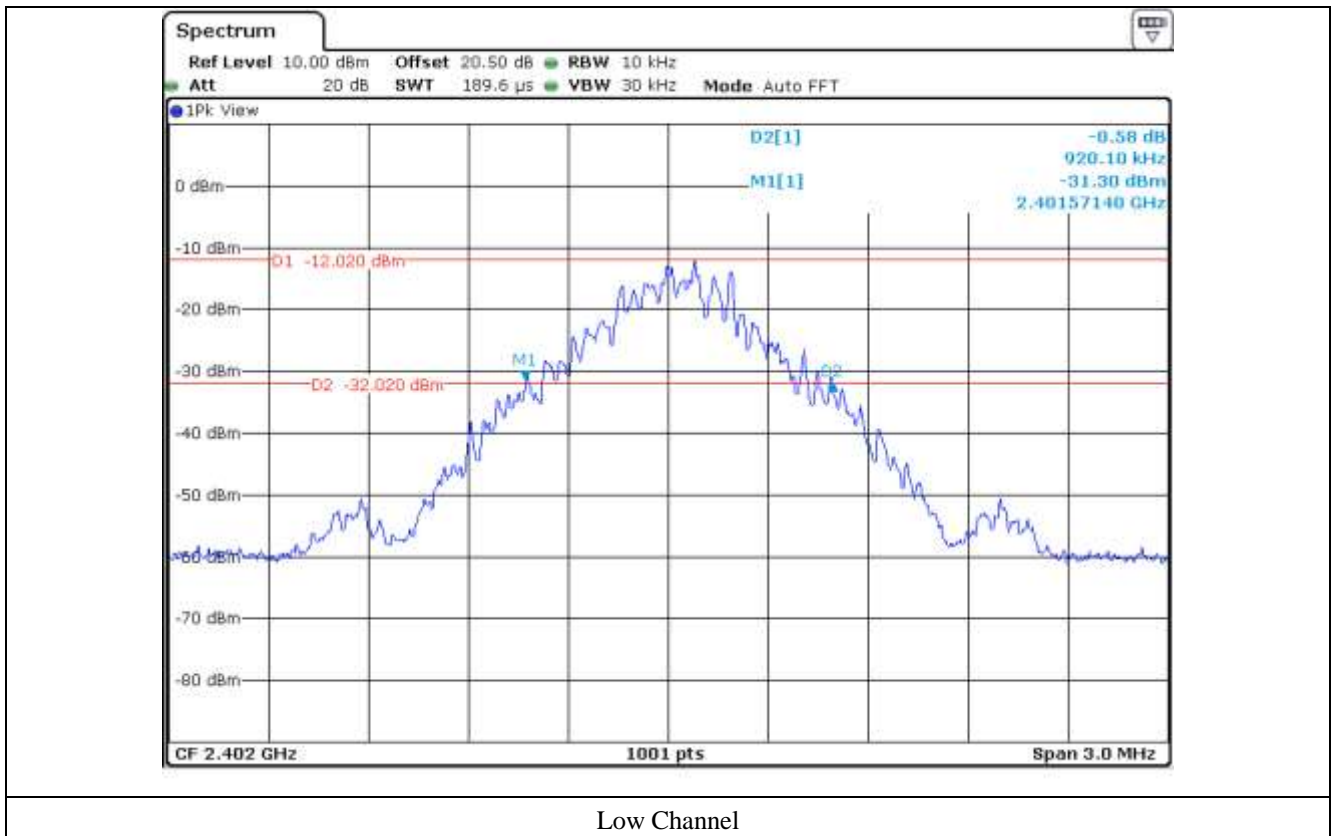



Middle Channel



High Channel




### 7.5 Test data for 2 Mbps

-. Test Date : November 28, 2019

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	1 285.70
Middle	2 441	1 285.70
High	2 480	1 285.70

Tested by: Sieon Lee / Assistant Manager

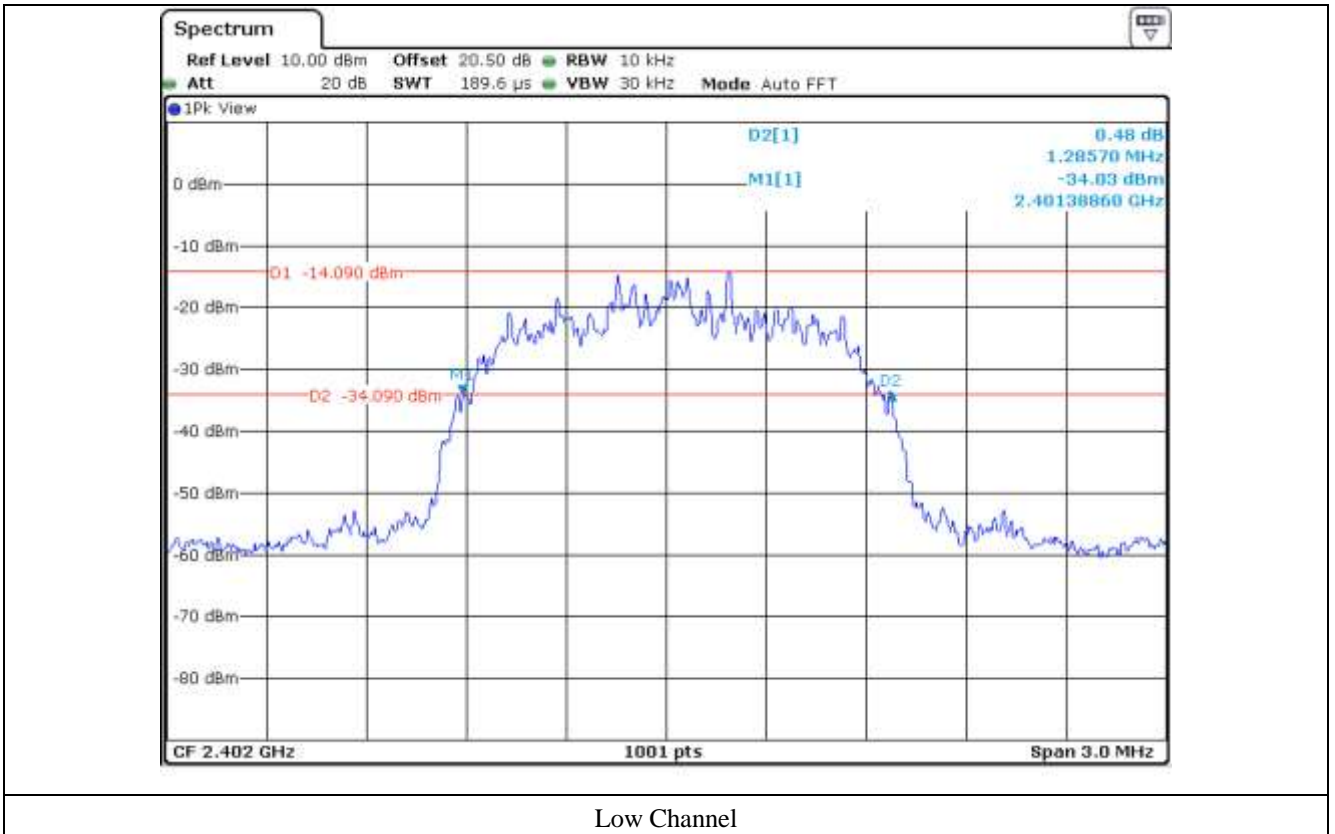

Low Channel



Middle Channel



High Channel


7.6 Test data for 3 Mbps

-. Test Date : November 28, 2019

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	1 255.70
Middle	2 441	1 261.70
High	2 480	1 258.70



Tested by: Sieon Lee / Assistant Manager

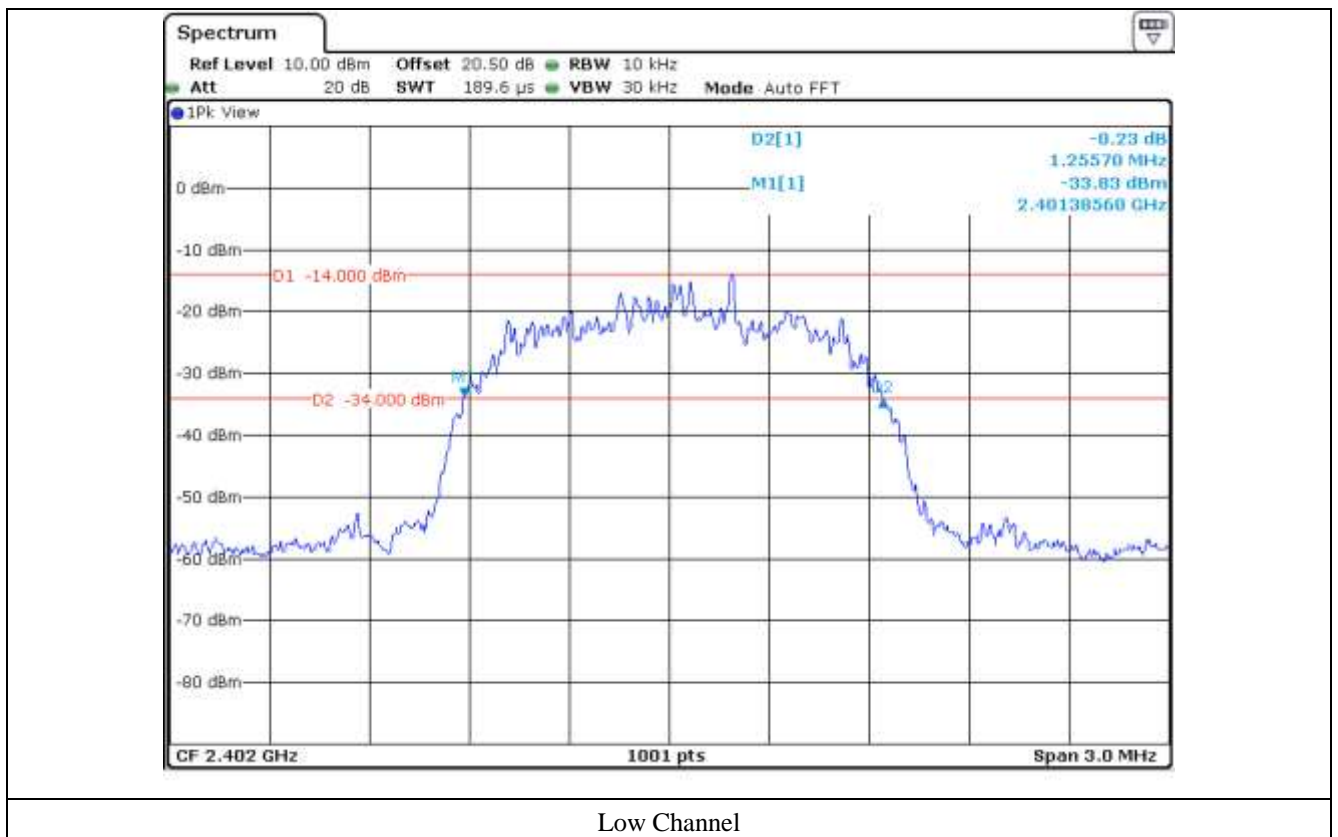



Middle Channel



High Channel


## 8. HOPPING FREQUENCY SEPARATION

### 8.1 Operating environment

Temperature : 24 °C  
 Relative humidity : 48 % R.H.

### 8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 10 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.

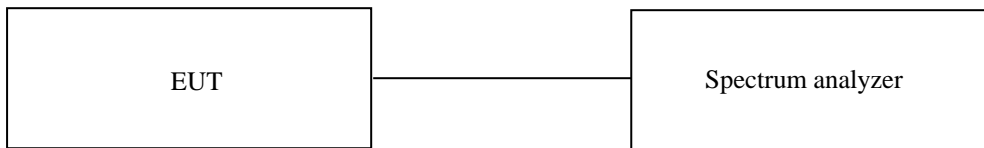

### 8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101199	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

**8.4 Test data for 1 Mbps**


-. Test Date : November 28, 2019

-. Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
1 004.00	613.40	Separated by 25 kHz or <u>two-thirds of the 20 dB bandwidth of the hopping channel</u> , whichever is greater.



**Tested by: Sieon Lee / Assistant Manager**

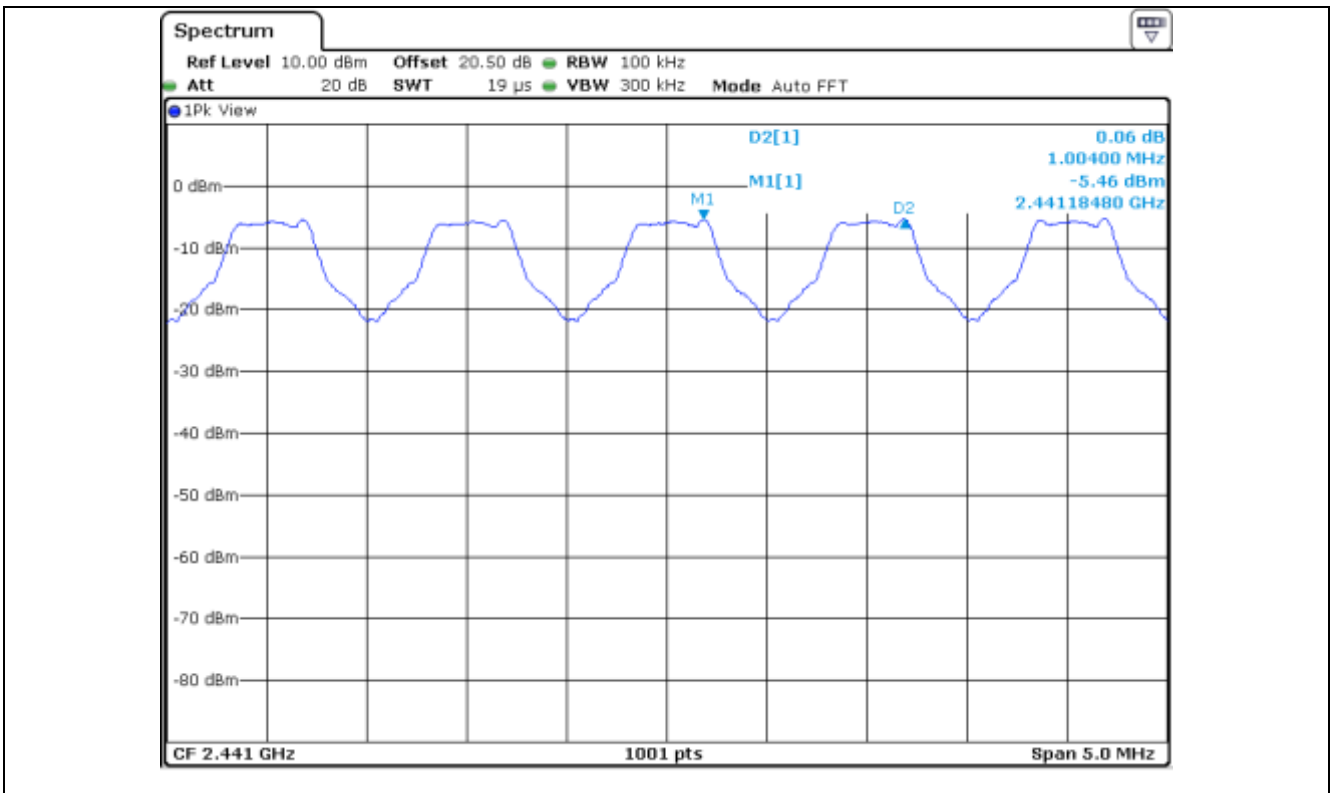


### 8.5 Test data for 2 Mbps

- Test Date : November 28, 2019

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
1 004.00	857.13	Separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

**Tested by: Sieon Lee / Assistant Manager**

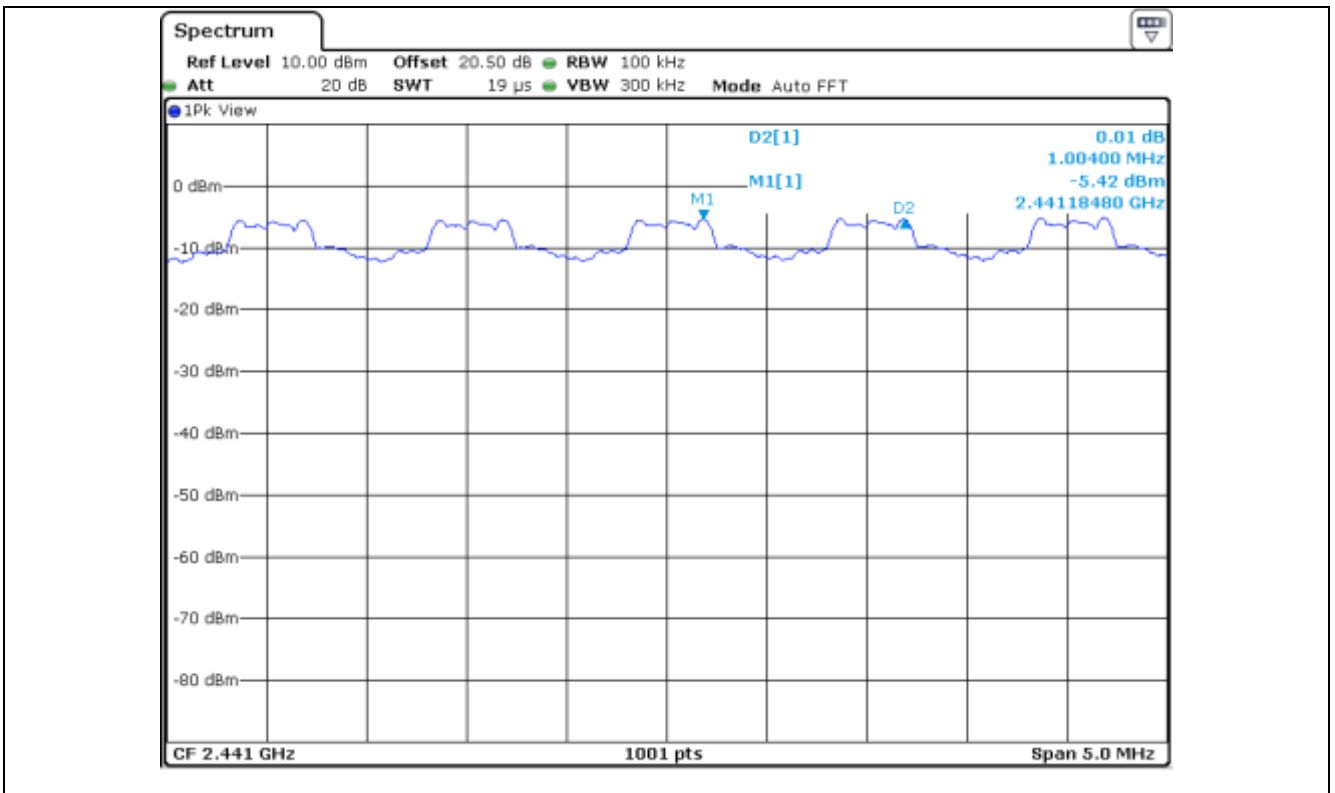


### 8.6 Test data for 3 Mbps

- Test Date : November 28, 2019

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
1004.00	841.13	Separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Tested by: Sion Lee / Assistant Manager

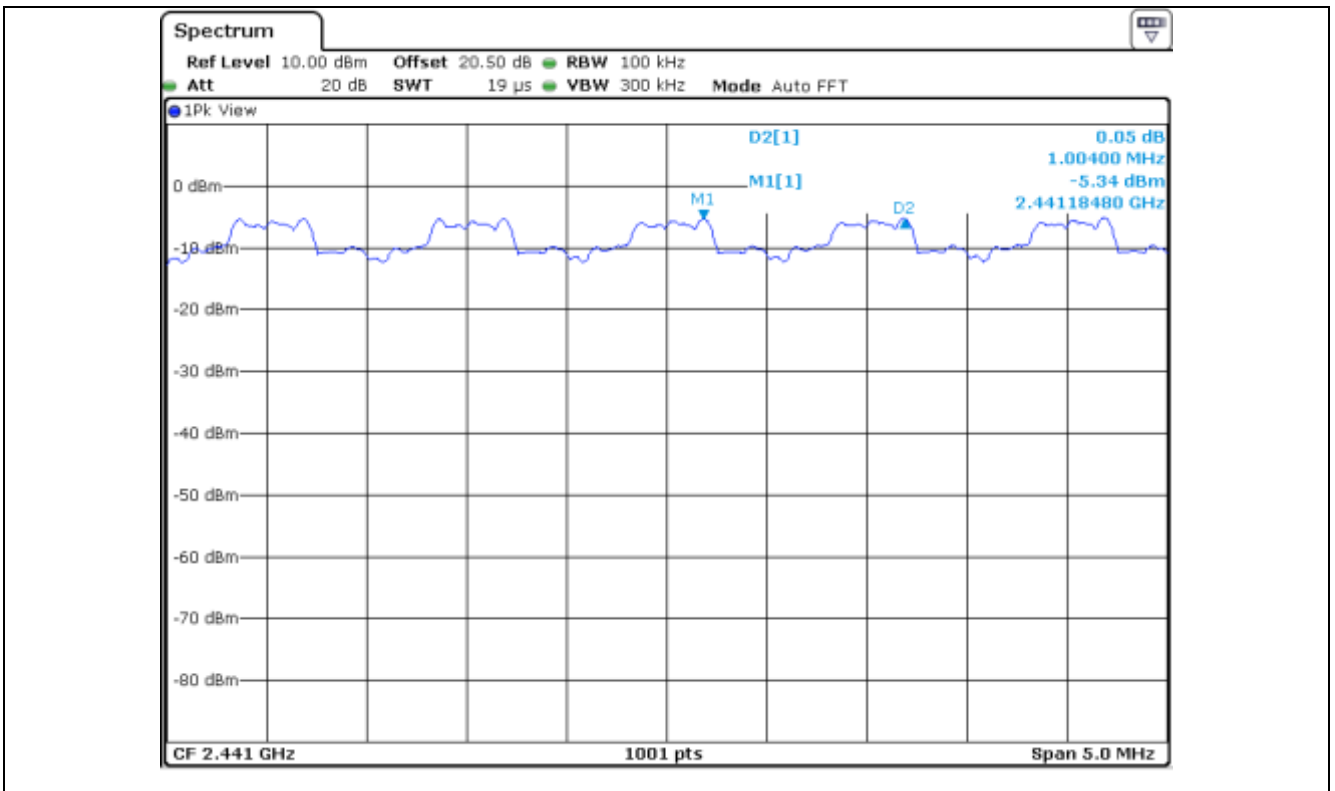




## 9. NUMBER OF HOPPING CHANNELS

### 9.1 Operating environment

Temperature : 24 °C  
 Relative humidity : 48 % R.H.

### 9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 100 MHz and the resolution bandwidth is set to 1 MHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.

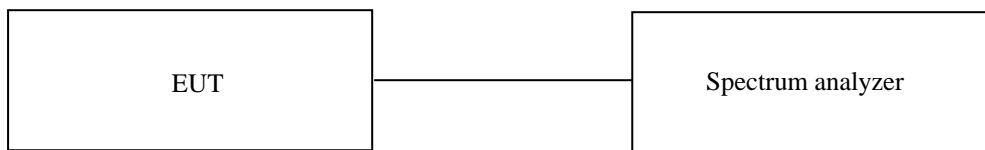

### 9.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101199	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.


**9.4 Test data for 1 Mbps**


- Test Date : November 28, 2019
- Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
1 Mbps	79	Minimum of 15	64




**Tested by: Sicon Lee / Assistant Manager**

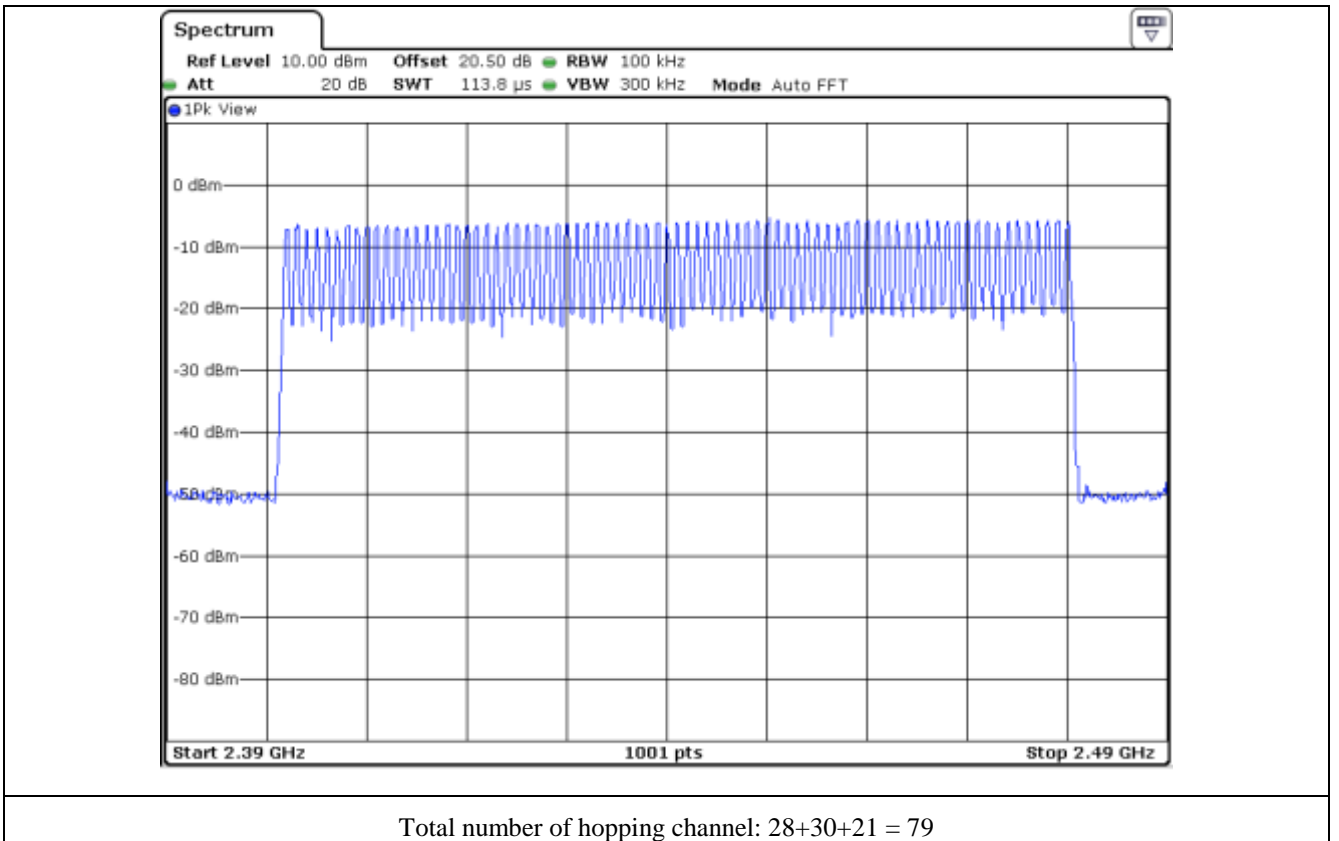


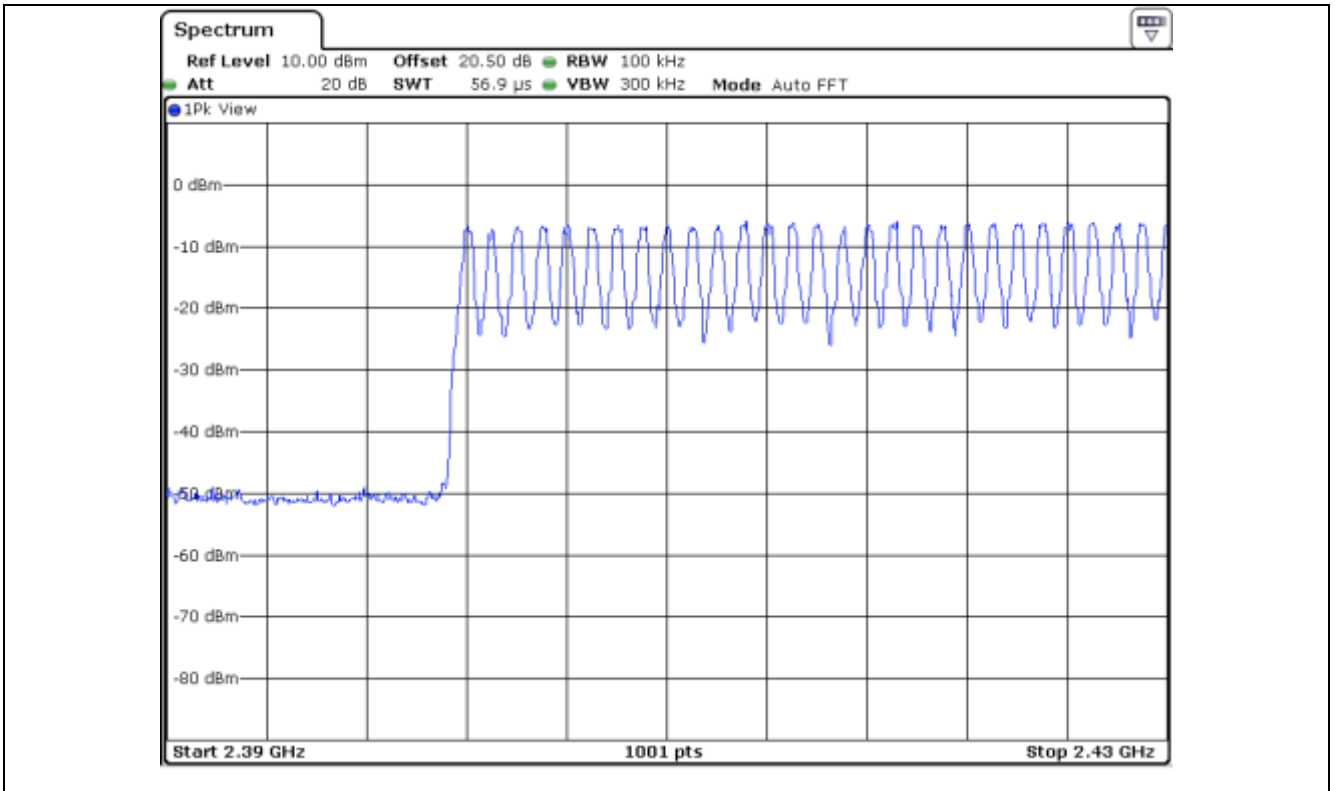

Number of hopping channel: 28

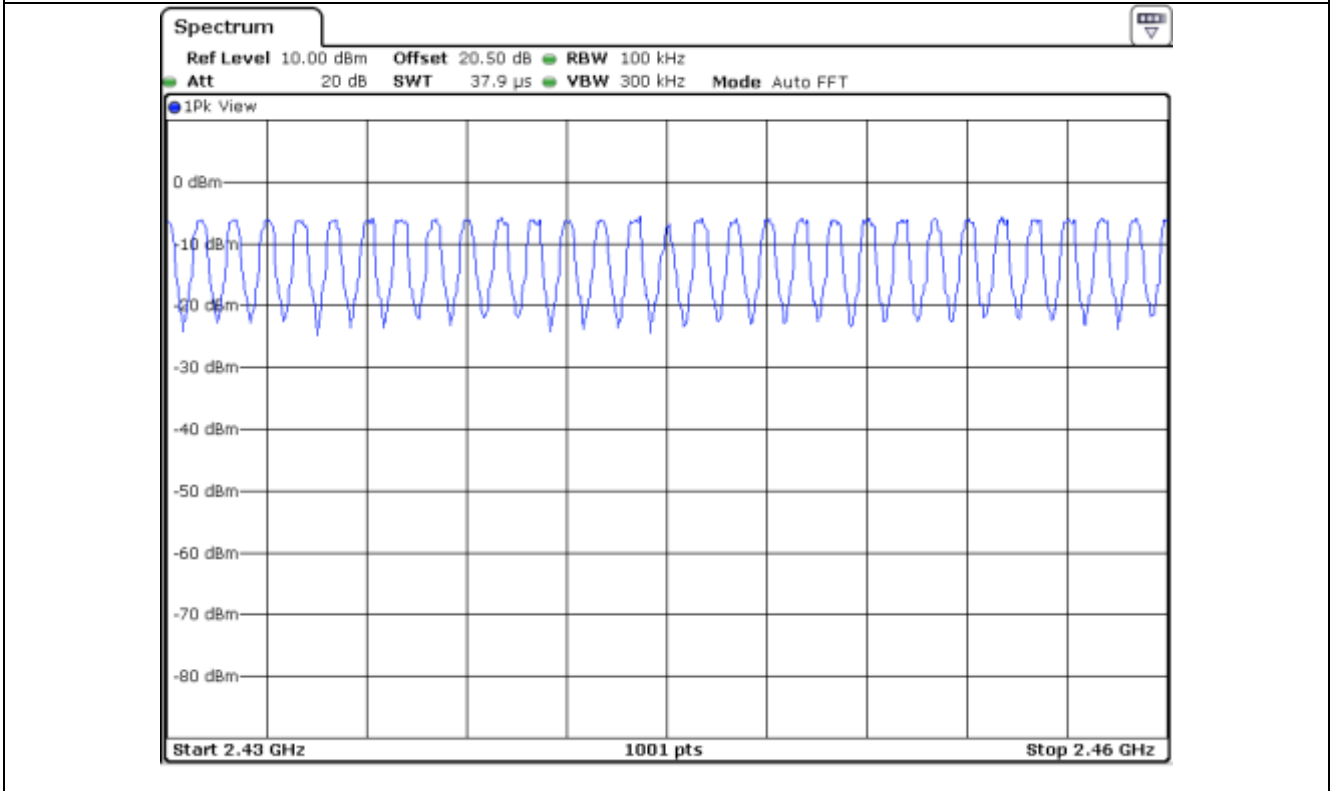

Number of hopping channel: 30

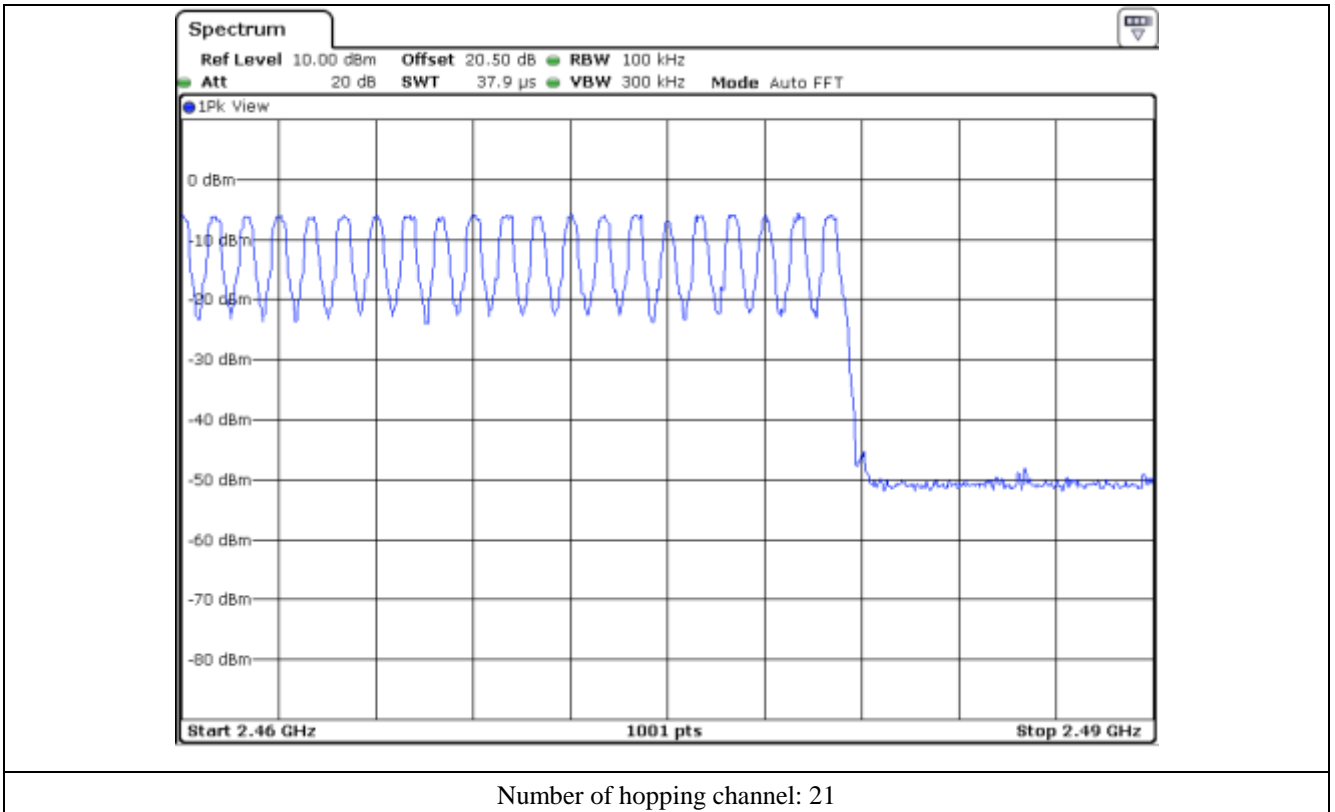



### 9.5 Test data for 2 Mbps

- Test Date : November 28, 2019
- Test Result : Pass


Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
2 Mbps	79	Minimum of 15	64

Tested by: Sicon Lee / Assistant Manager

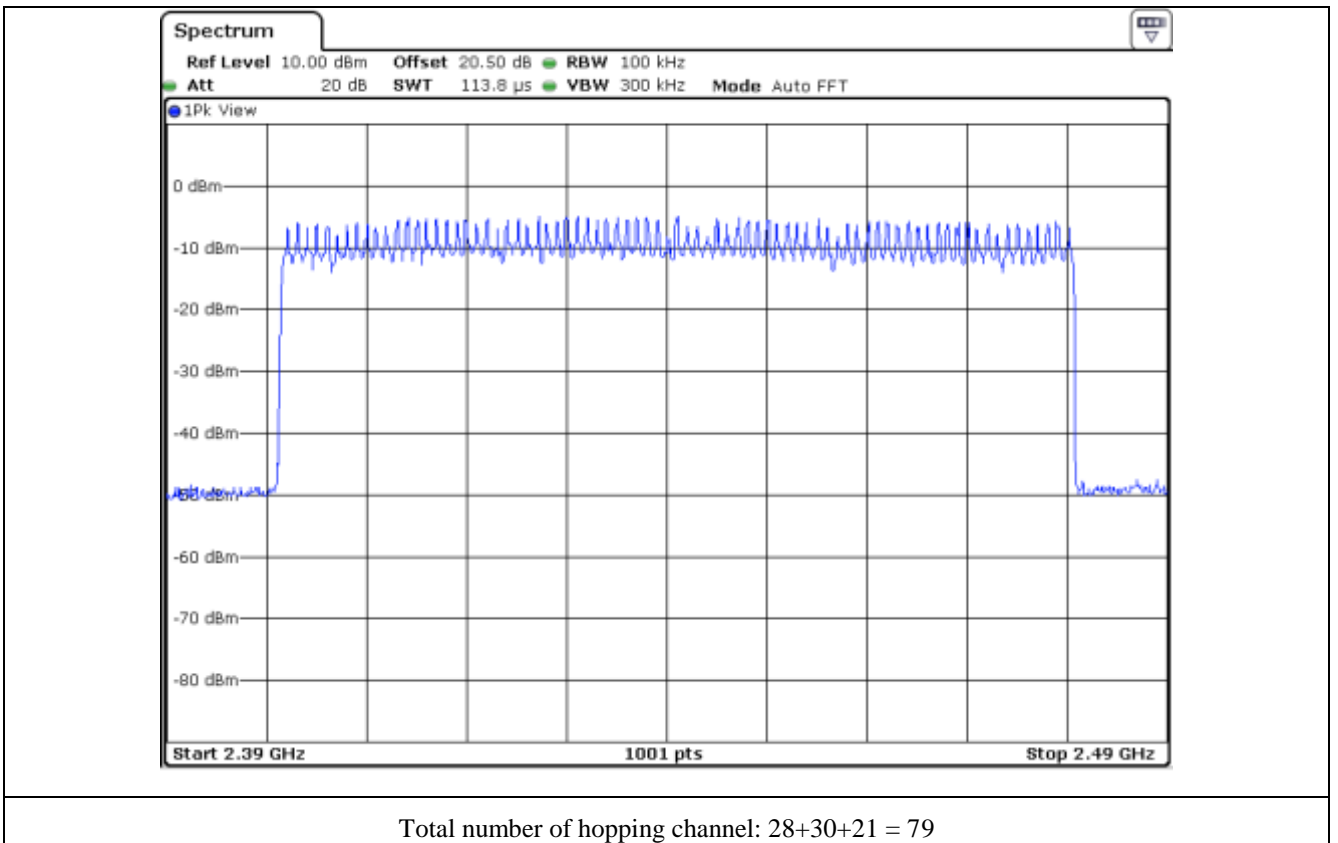


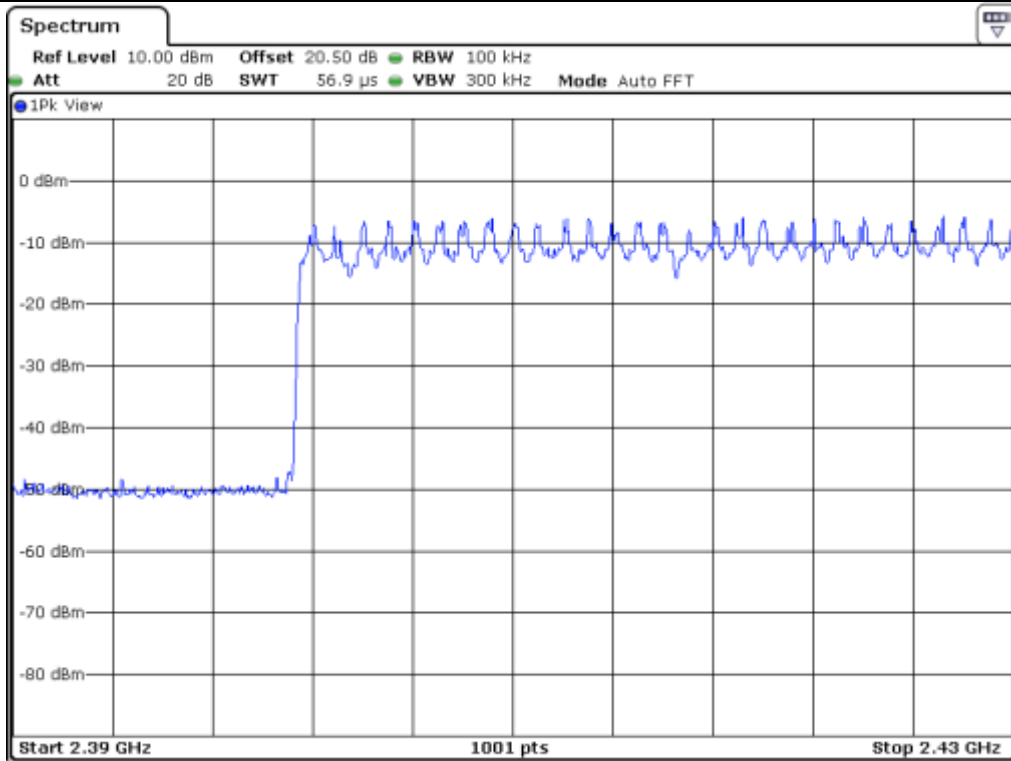

Number of hopping channel: 28

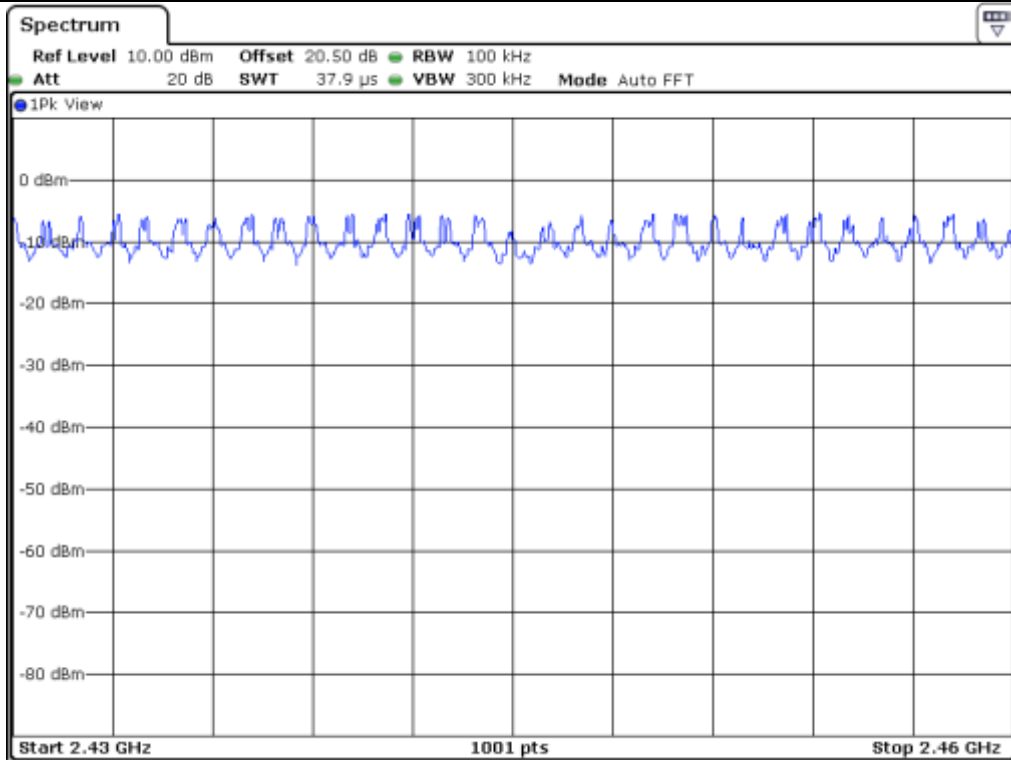

Number of hopping channel: 30

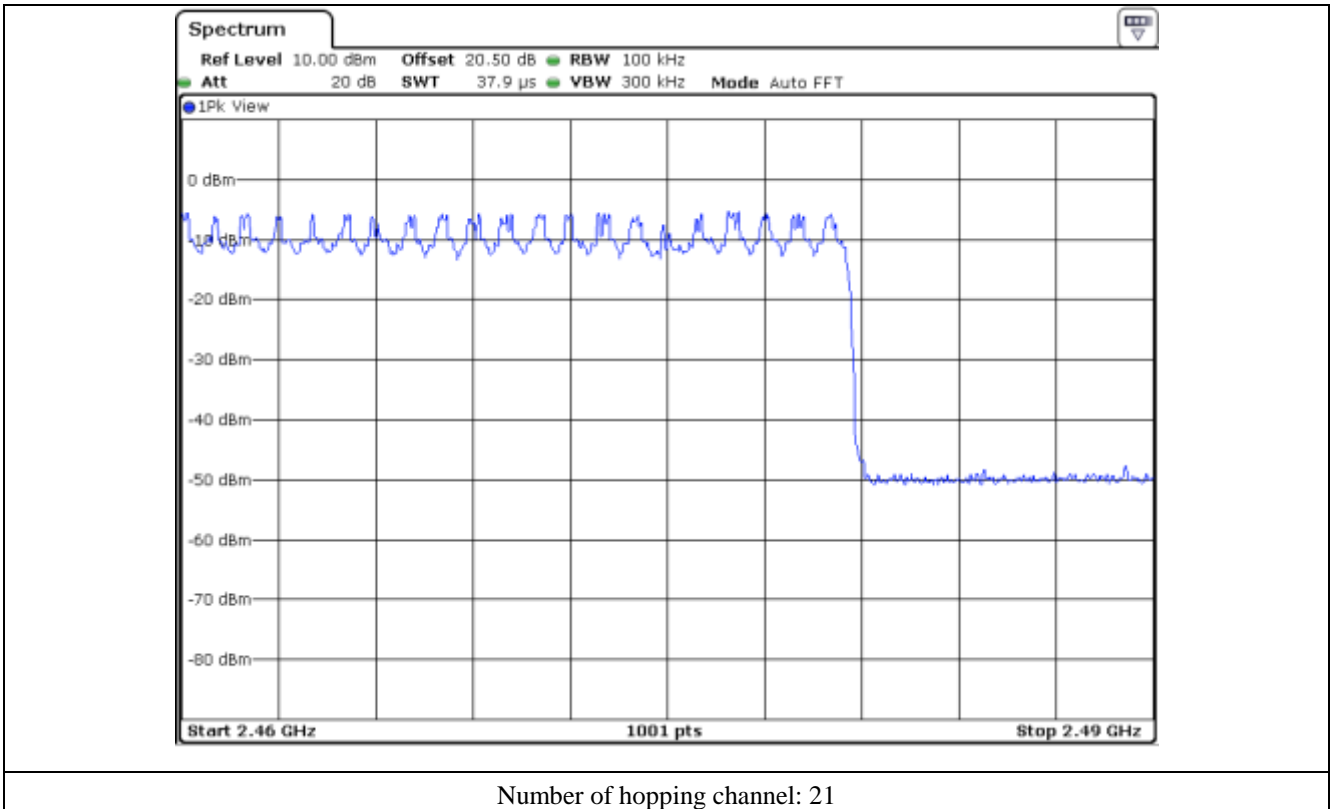


**9.6 Test data for 3 Mbps**

- Test Date : November 28, 2019
- Test Result : Pass


Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
3 Mbps	79	Minimum of 15	64




**Tested by: Sicon Lee / Assistant Manager**

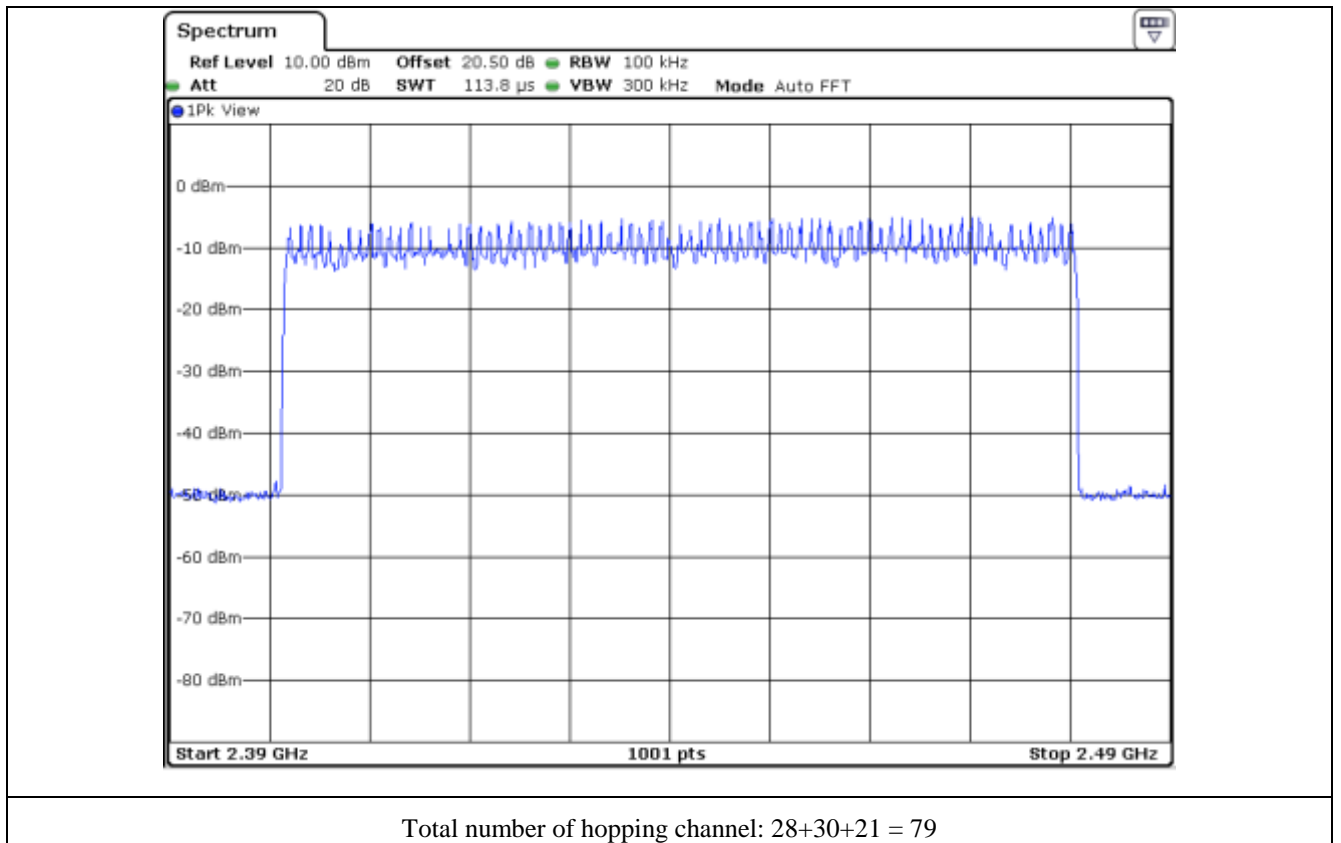




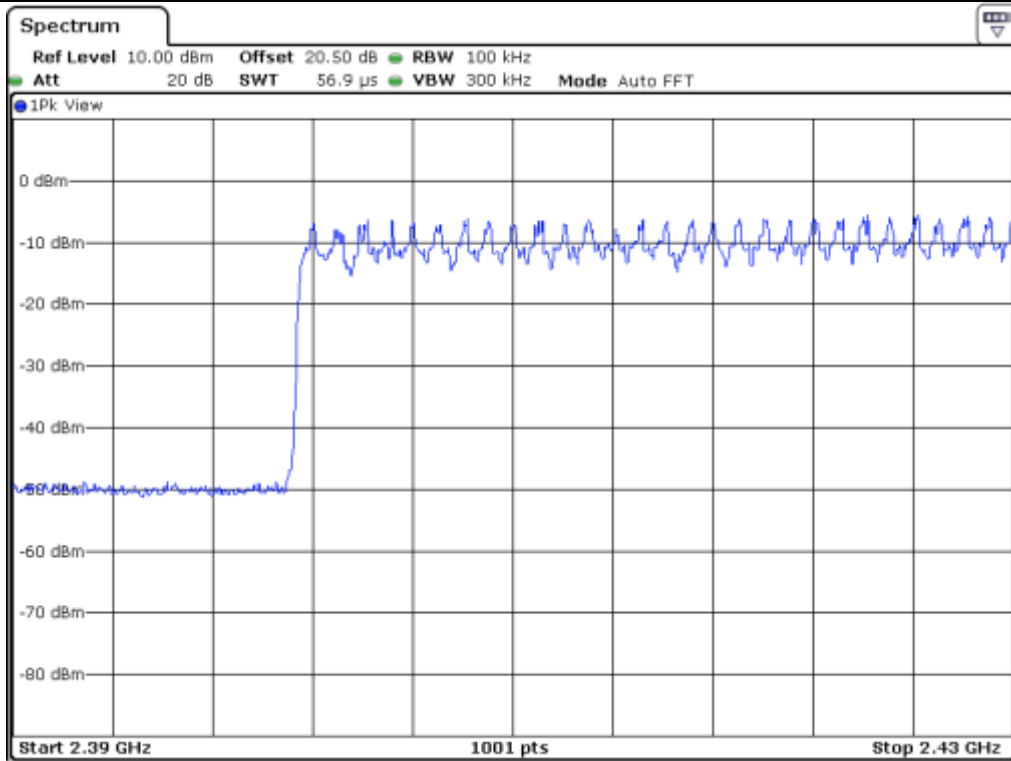

Number of hopping channel: 28

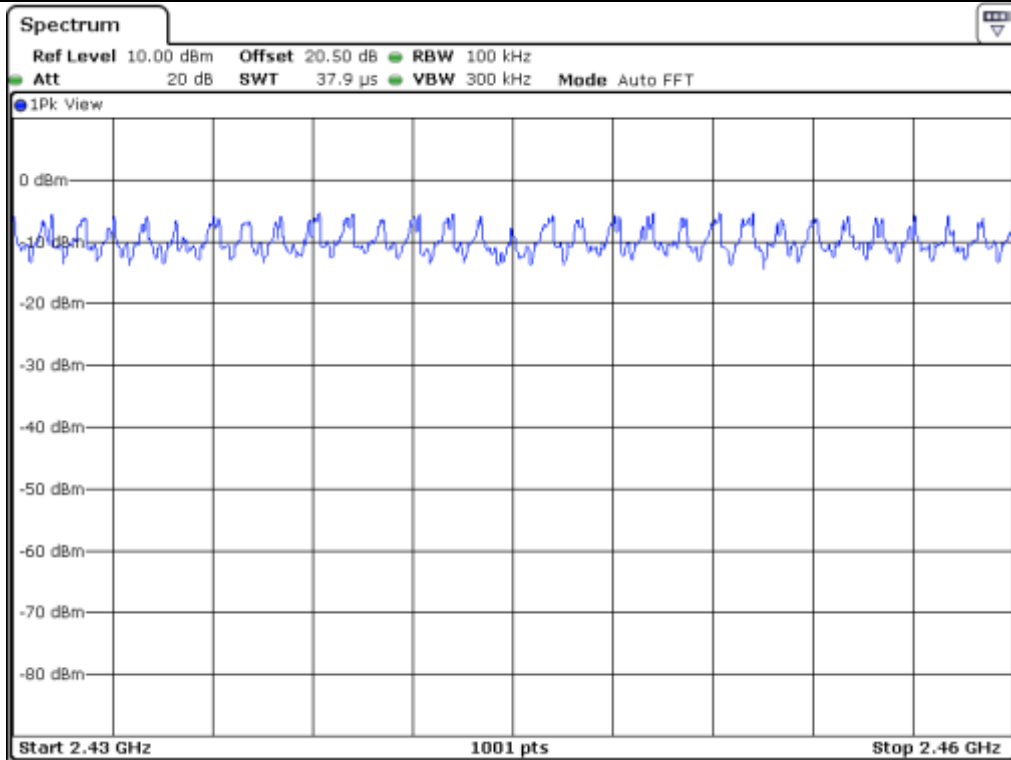

Number of hopping channel: 30

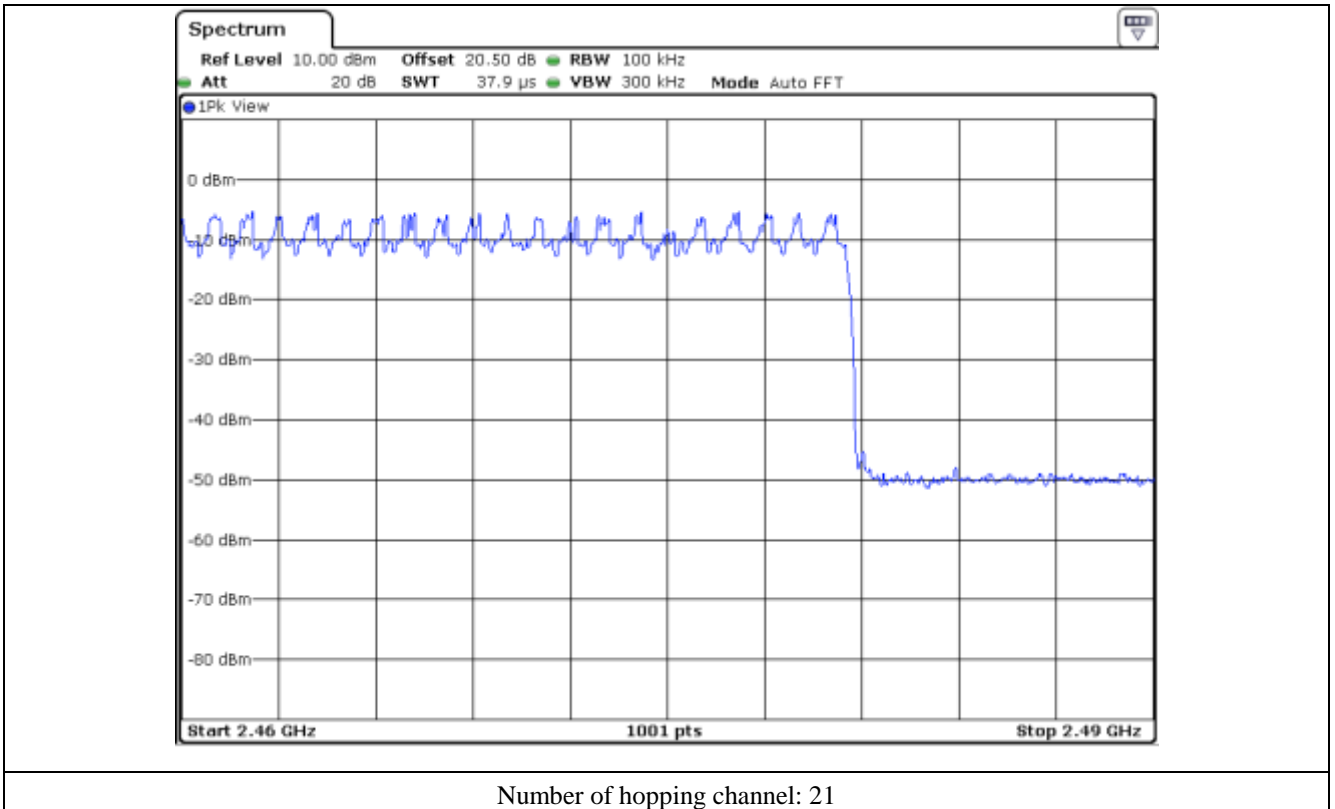


## 10. TIME OF OCCUPANCY

### 10.1 Operating environment

Temperature : 24 °C  
 Relative humidity : 48 % R.H.

### 10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.

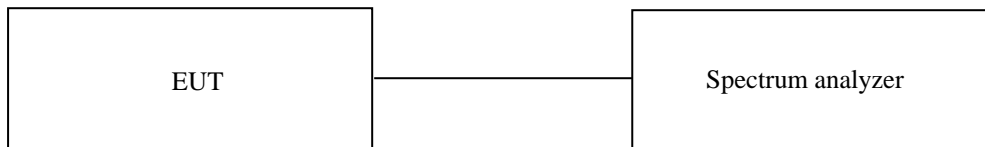

### 10.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101199	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

**10.4 Test data for 1 Mbps**

- Test Date : November 28, 2019

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (s)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.385	10.13	31.6	123.24	400	PASS
DH3	1.640	5.060	31.6	262.23	400	
DH5	2.880	3.38	31.6	307.61	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time \* Hops per second with channels \* period time


Remark: See next page for an overview sweep performed with peak detector.




**Tested by: Sieon Lee / Assistant Manager**

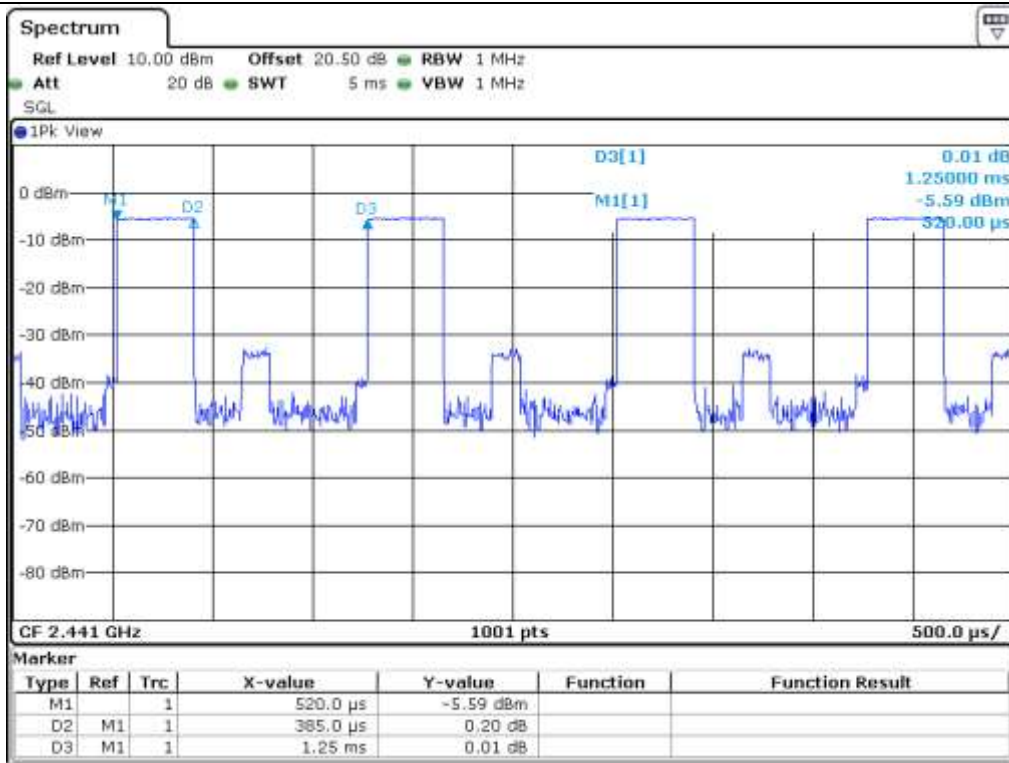

DH1

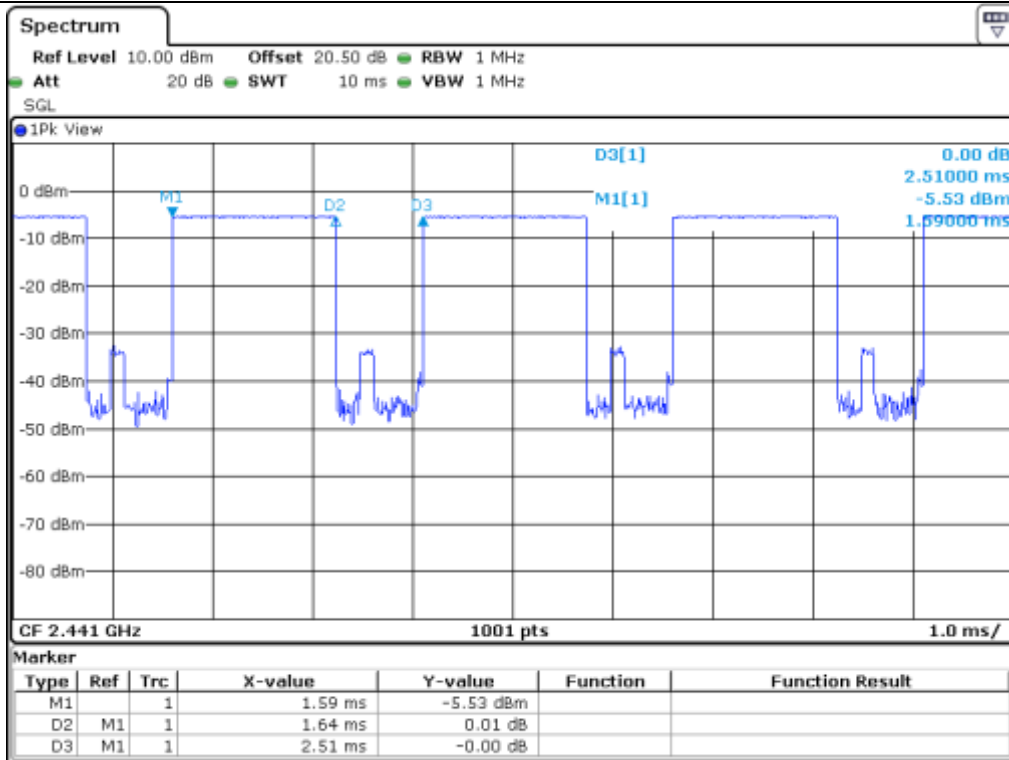

DH3

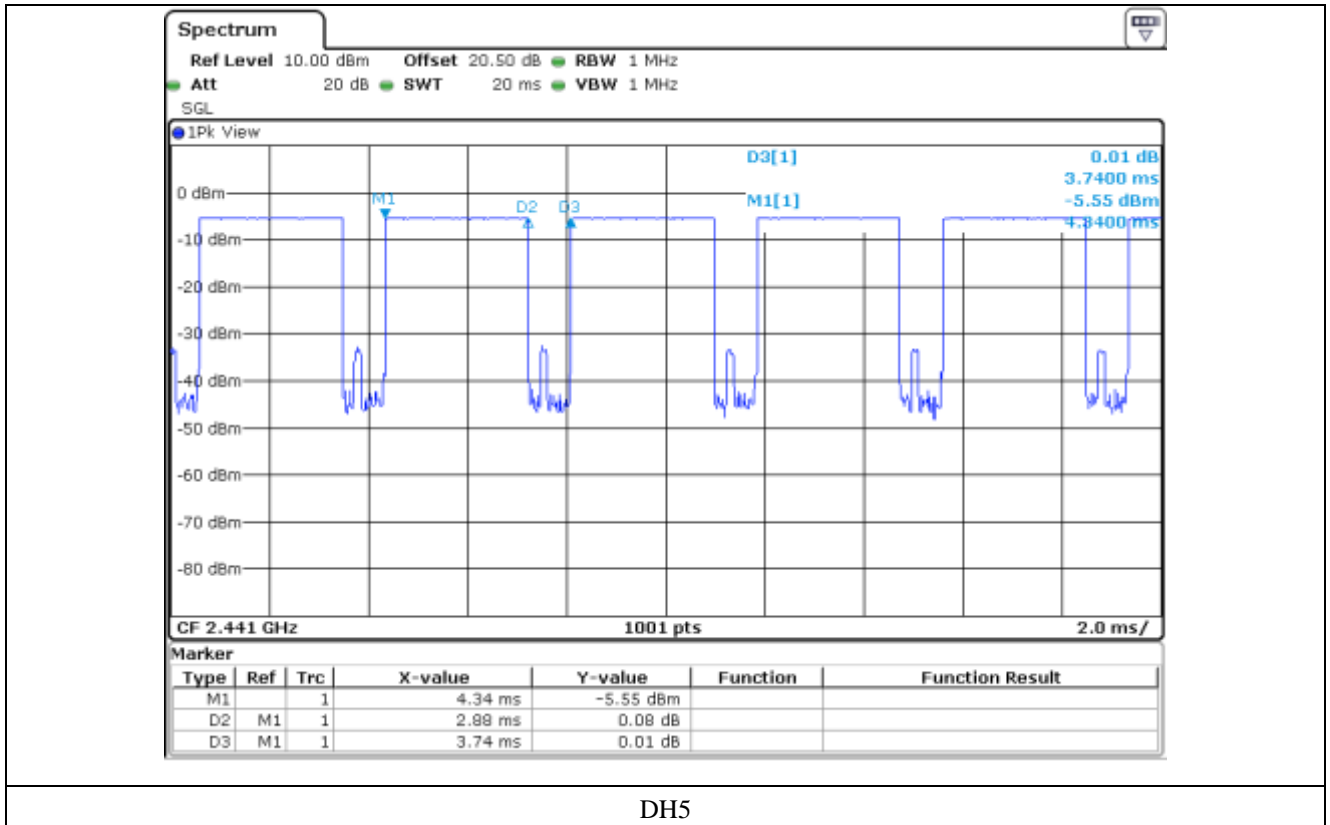

**10.5 Test data for 2 Mbps**

- Test Date : November 28, 2019

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For 2-DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for 2-DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and 2-DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for 2-DH1, and 5.06 times (= 1 600/4/79) for 2-DH3, and 3.38 times (= 1 600/6/79) for 2-DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (s)	Total Dwell Time (ms)	Limit (ms)	Test Result
2-DH1	0.390	10.13	31.6	124.84	400	PASS
2-DH3	1.645	5.060	31.6	263.03	400	
2-DH5	2.885	3.38	31.6	308.14	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time \* Hops per second with channels \* period time


Remark: See next page for an overview sweep performed with peak detector.



**Tested by: Sieon Lee / Assistant Manager**

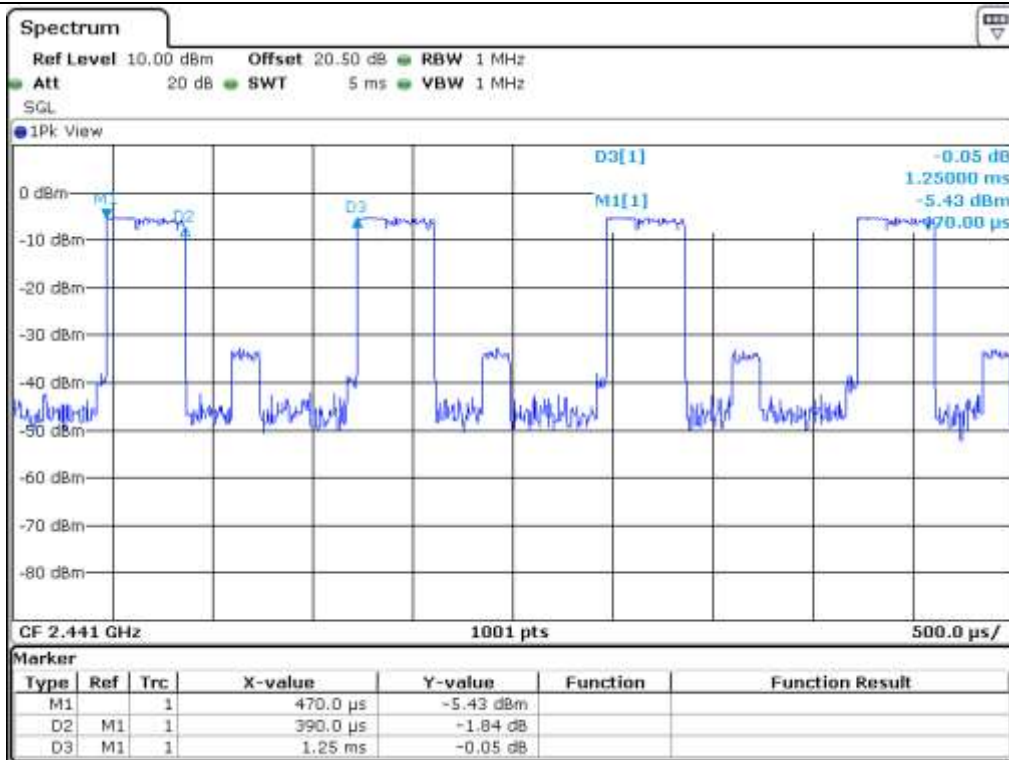


2-DH1

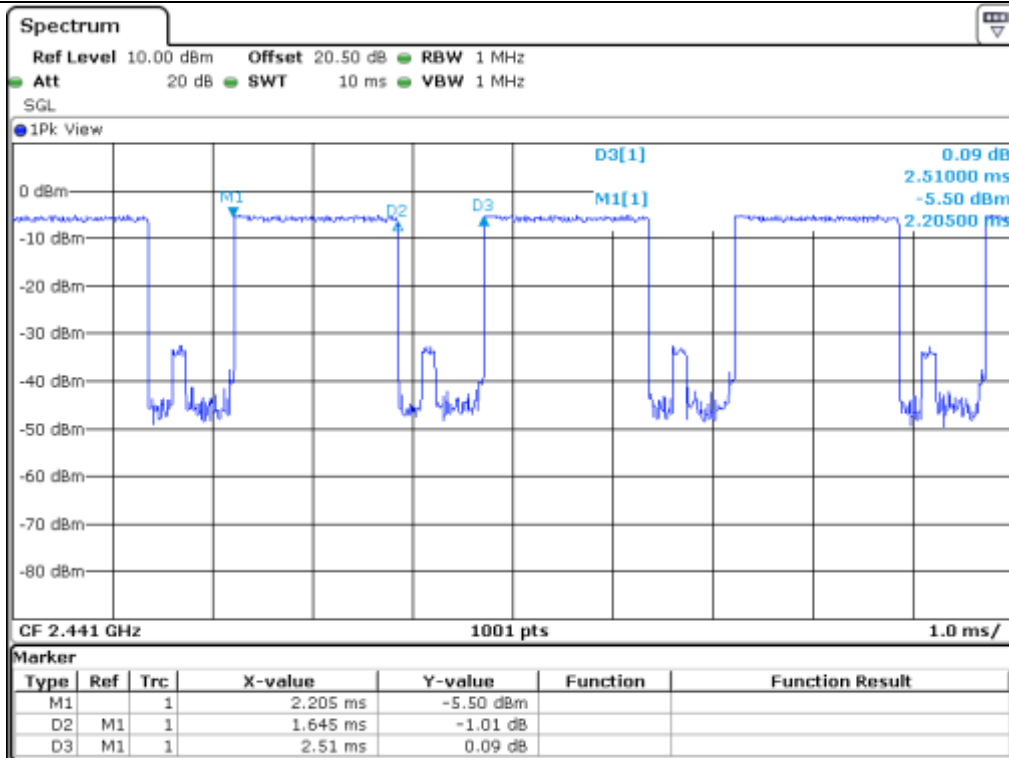

2-DH3



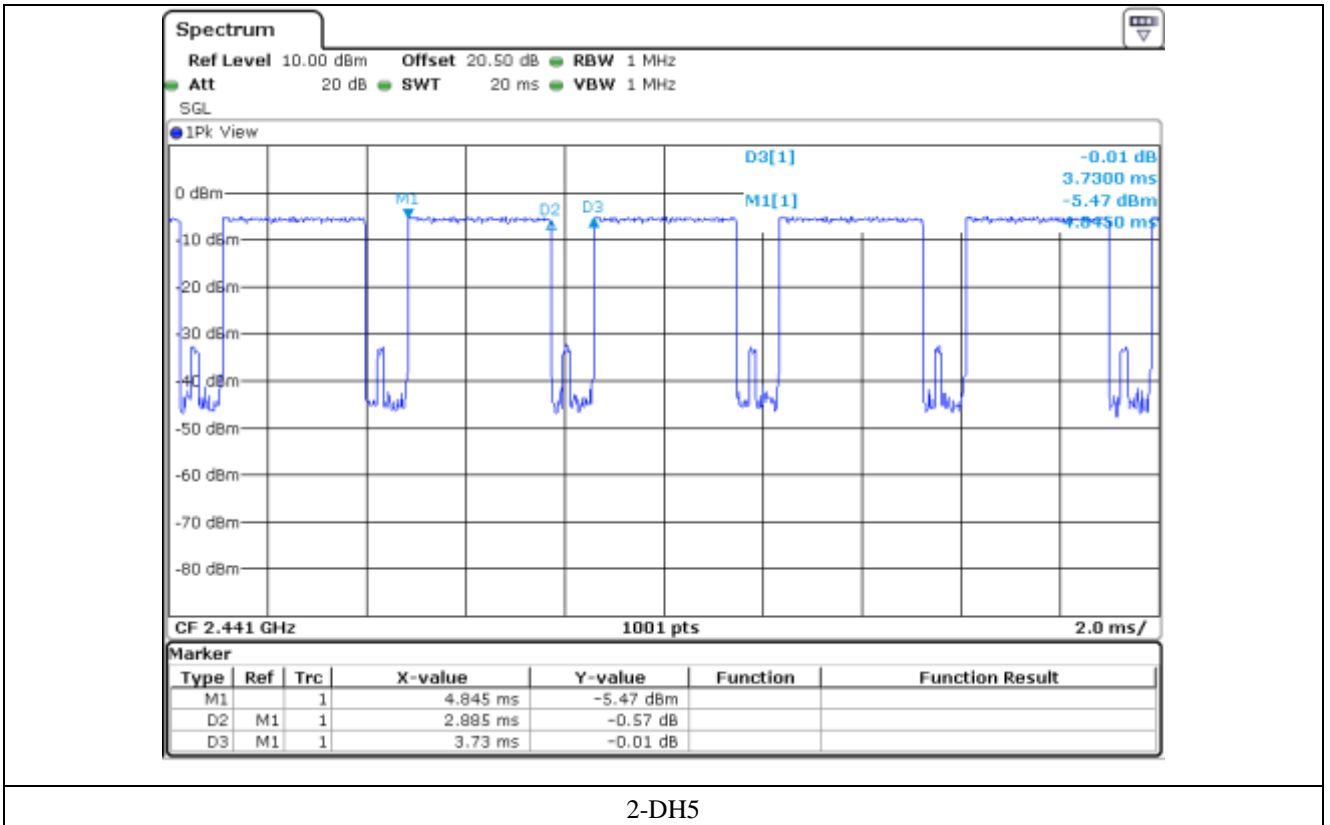

2-DH5

**10.6 Test data for 3 Mbps**

- Test Date : November 28, 2019

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For 3-DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for 3-DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and 3-DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for 3-DH1, and 5.06 times (= 1 600/4/79) for 3-DH3, and 3.38 times (= 1 600/6/79) for 3-DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (s)	Total Dwell Time (ms)	Limit (ms)	Test Result
3-DH1	0.385	10.13	31.6	123.24	400	PASS
3-DH3	1.645	5.060	31.6	263.03	400	
3-DH5	2.885	3.38	31.6	308.14	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time \* Hops per second with channels \* period time


Remark: See next page for an overview sweep performed with peak detector.




**Tested by: Seion Lee / Assistant Manager**

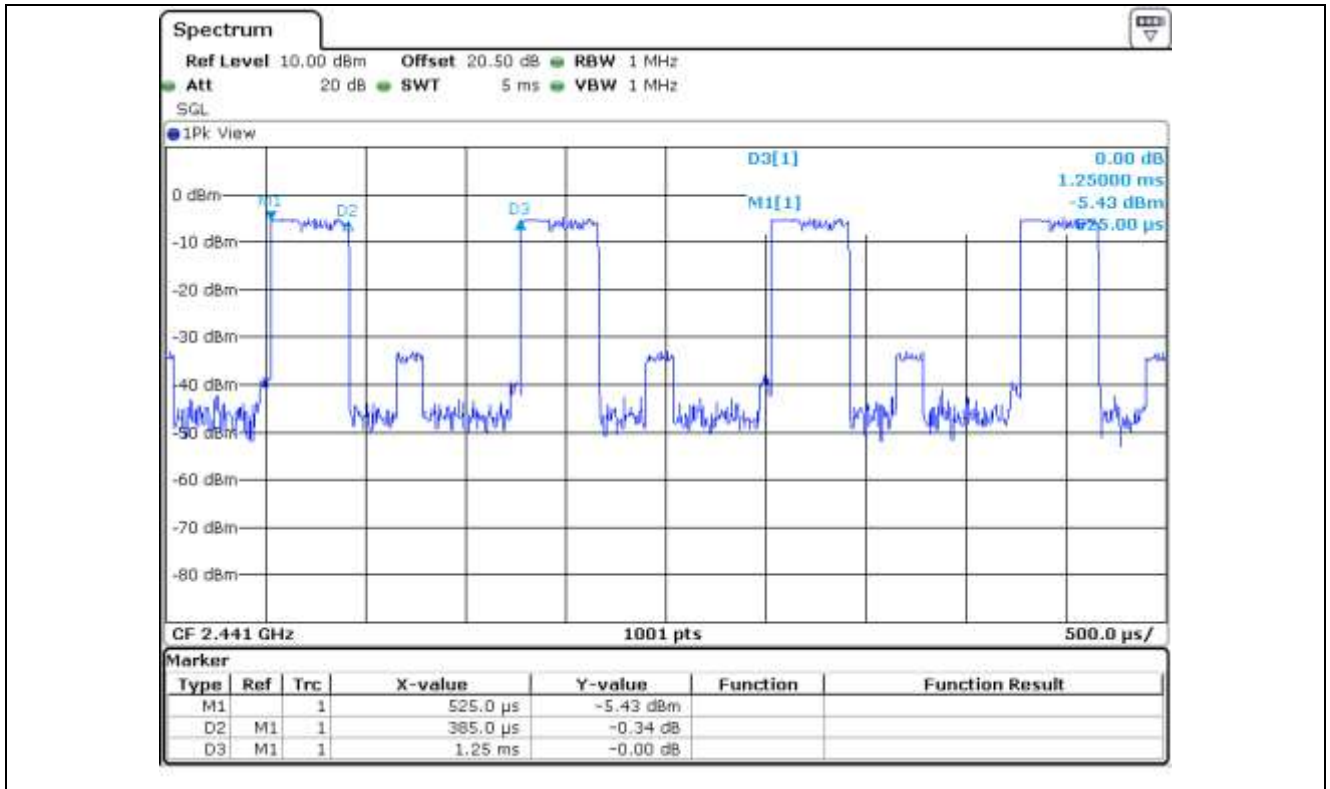

3-DH1

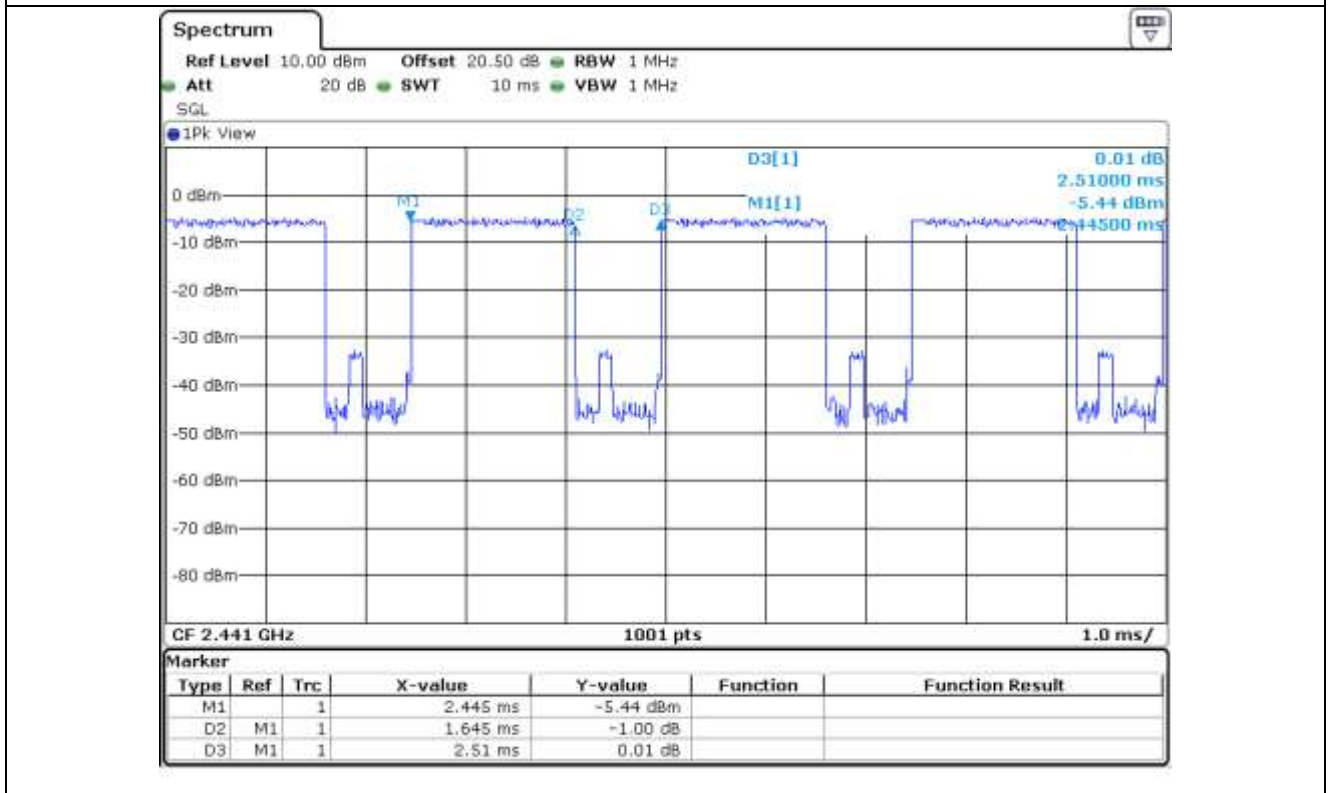

3-DH3

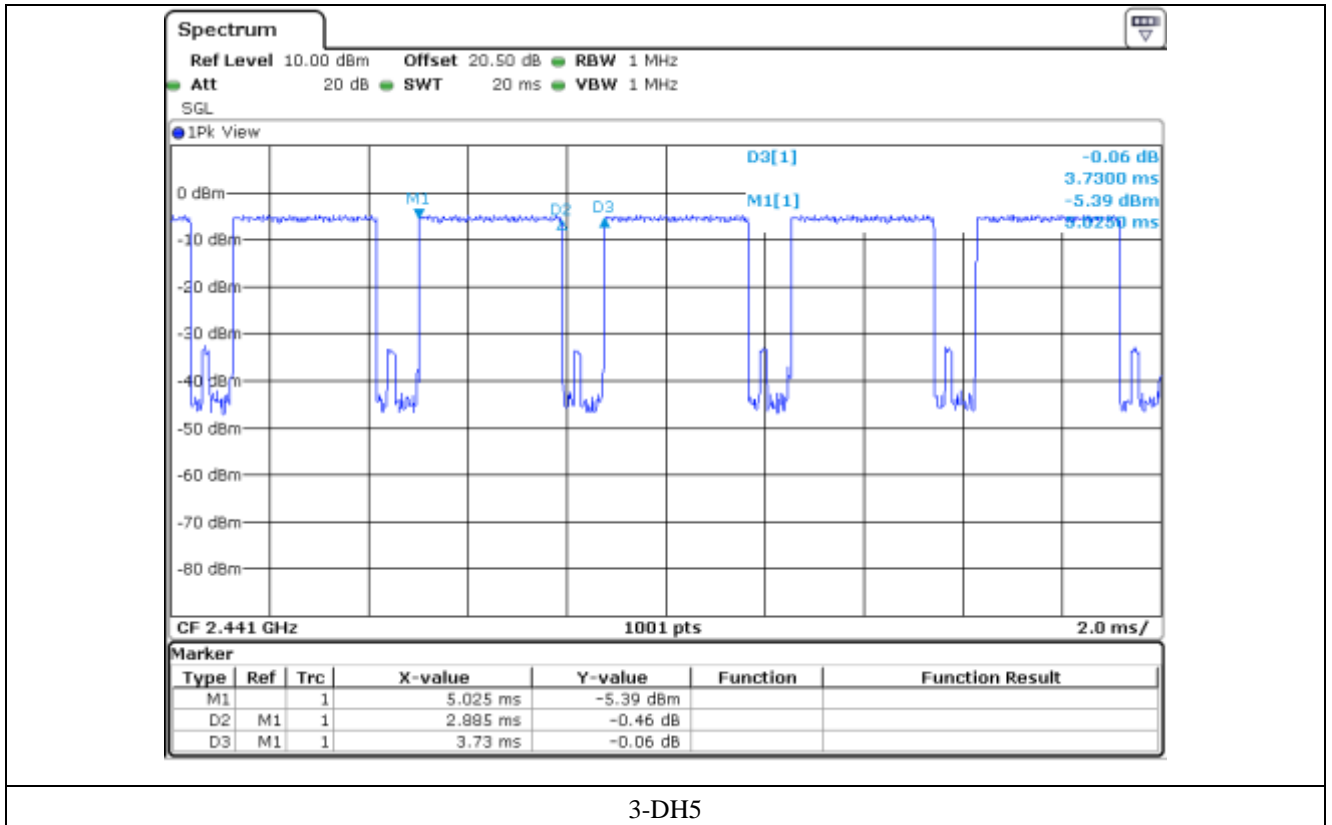


## 11. MAXIMUM PEAK OUTPUT POWER

### 11.1 Operating environment

Temperature : 24 °C  
 Relative humidity : 48 % R.H

### 11.2 Test set-up

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The EUT was operating in transmit mode at the appropriate center frequency.

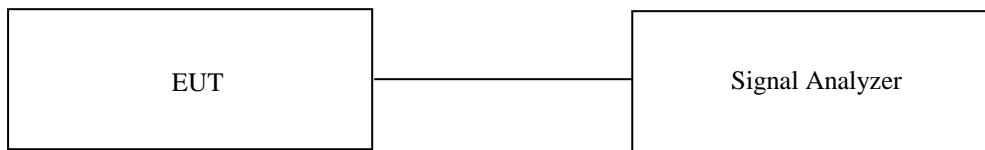

### 11.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101199	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

**11.4 Test data for 1 Mbps**

-. Test Date : November 28, 2019


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	-5.75	21.00	26.75
MIDDLE	2 441	-4.89	21.00	25.89
HIGH	2 480	-4.68	21.00	25.68


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




**Tested by: Sieon Lee / Assistant Manager**

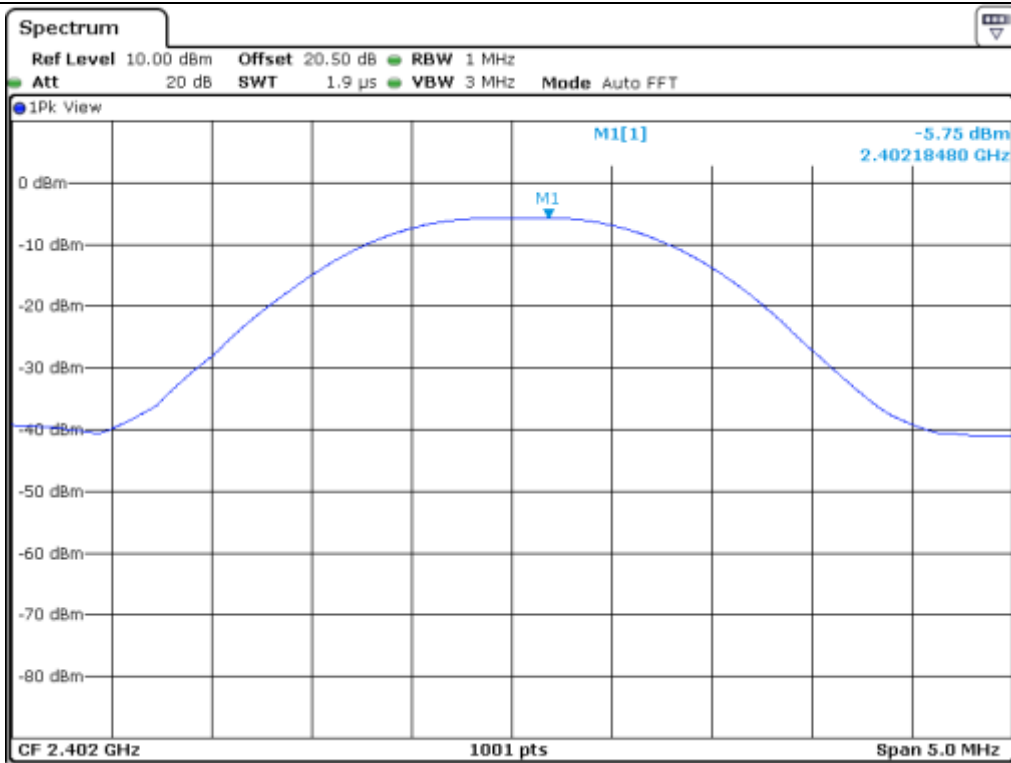

Low Channel

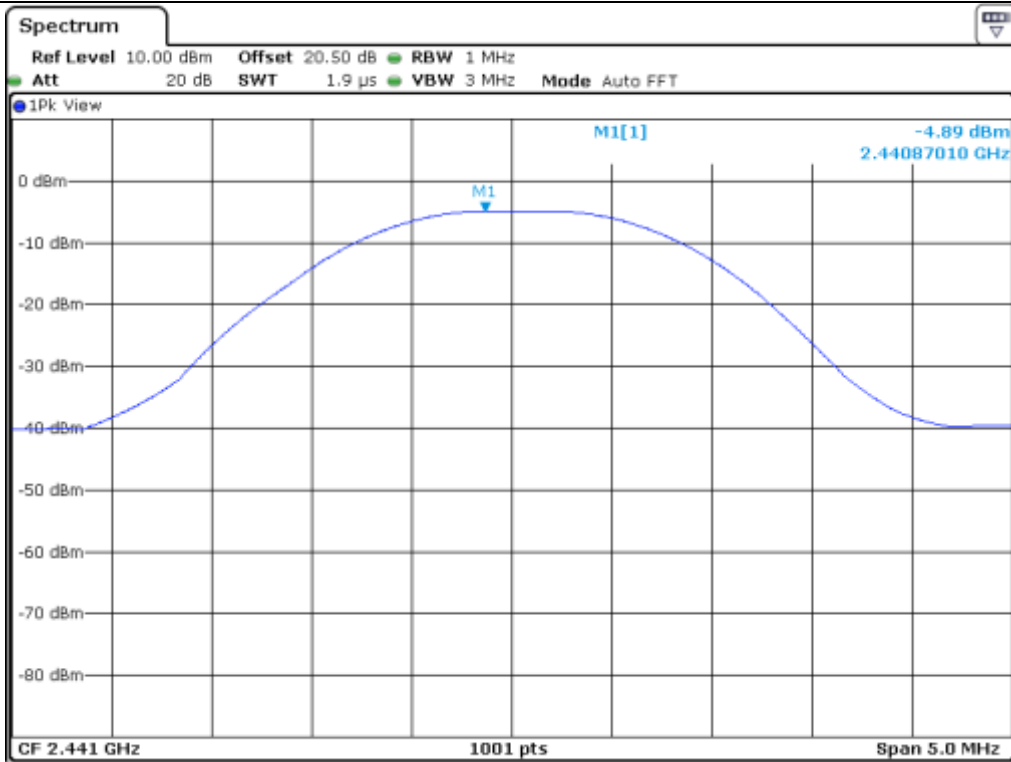

Middle Channel

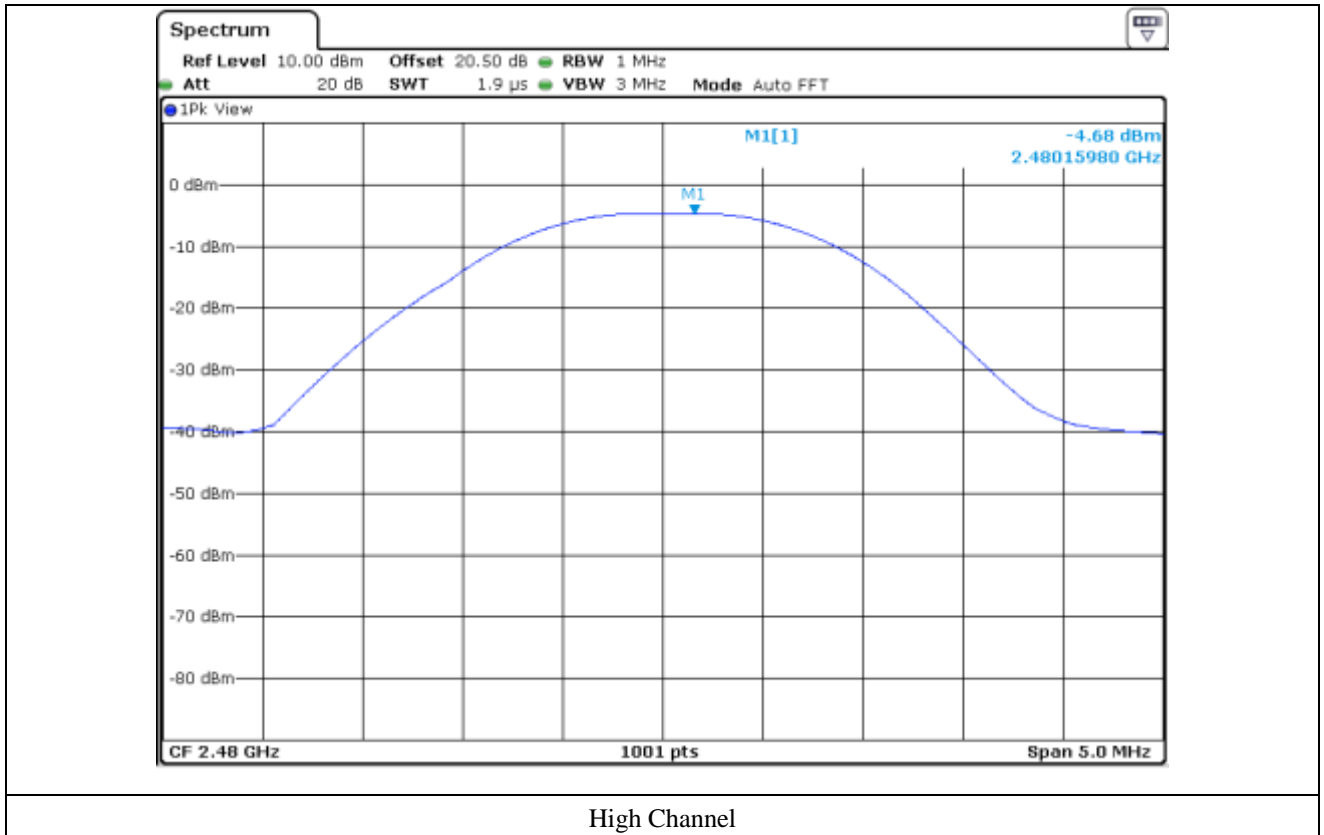



**11.5 Test data for 2 Mbps**

-. Test Date : November 28, 2019


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	-5.58	21.00	26.58
MIDDLE	2 441	-4.67	21.00	25.67
HIGH	2 480	-4.37	21.00	25.37


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




**Tested by: Sieon Lee / Assistant Manager**

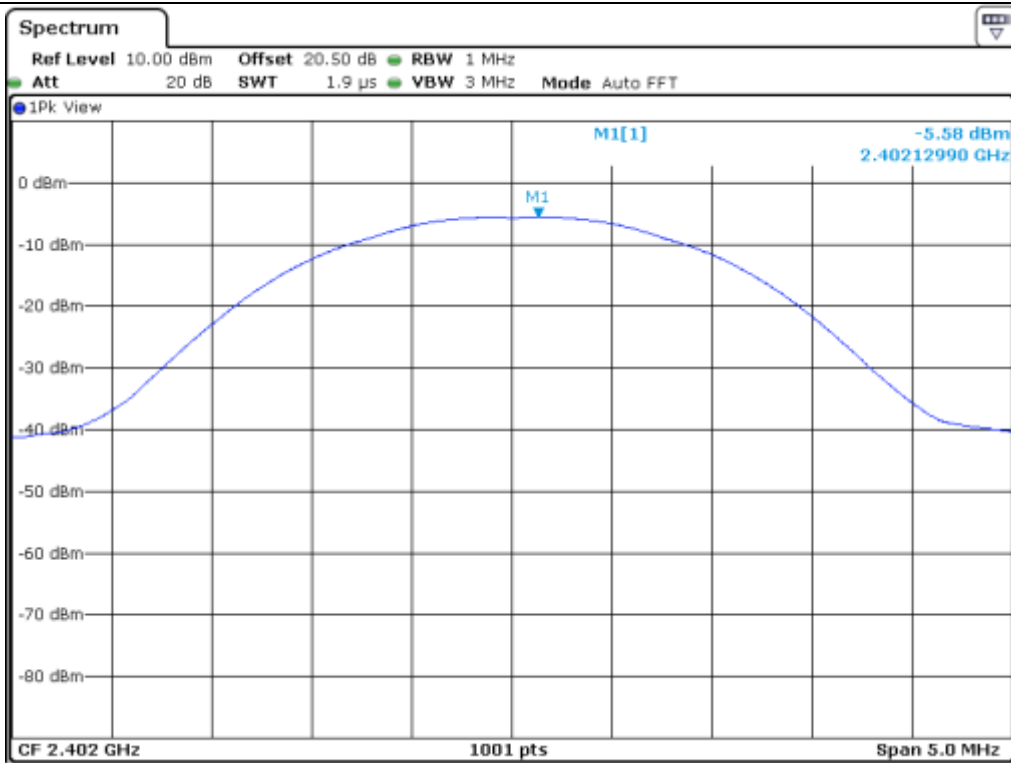

Low Channel

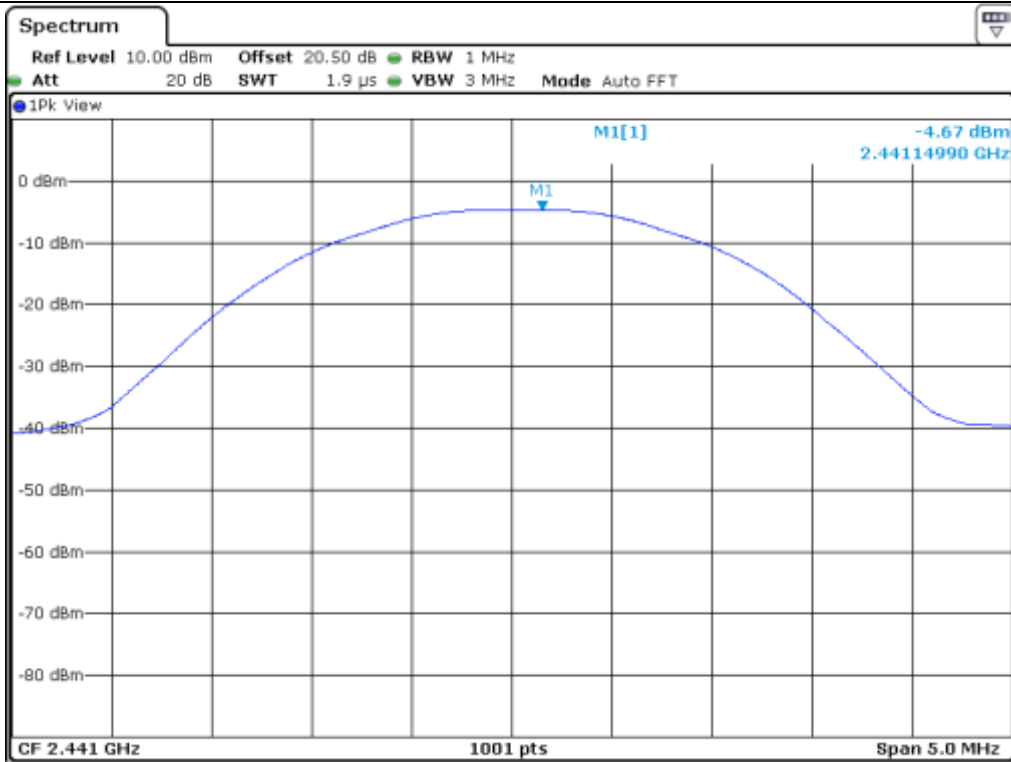

Middle Channel

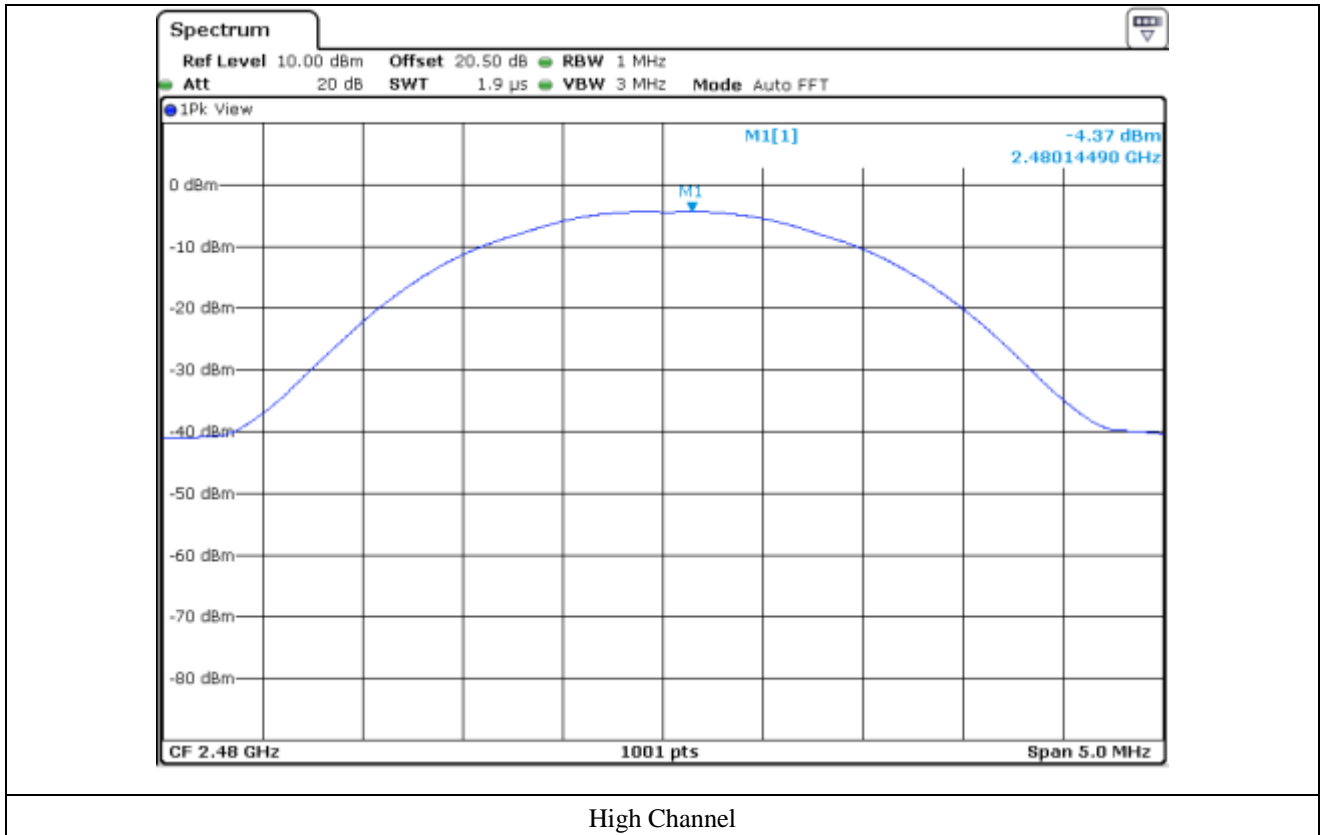

High Channel

**11.6 Test data for 3 Mbps**

-. Test Date : November 28, 2019


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	-5.17	21.00	26.17
MIDDLE	2 441	-4.31	21.00	25.31
HIGH	2 480	-4.03	21.00	25.03


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




**Tested by: Sieon Lee / Assistant Manager**

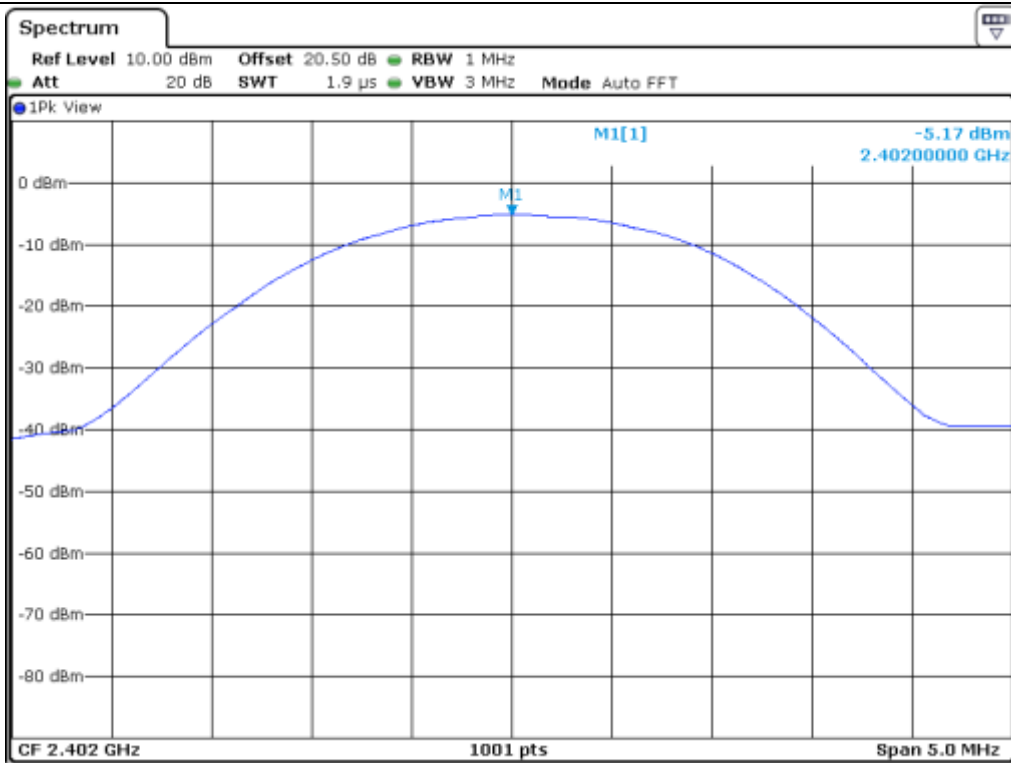

Low Channel

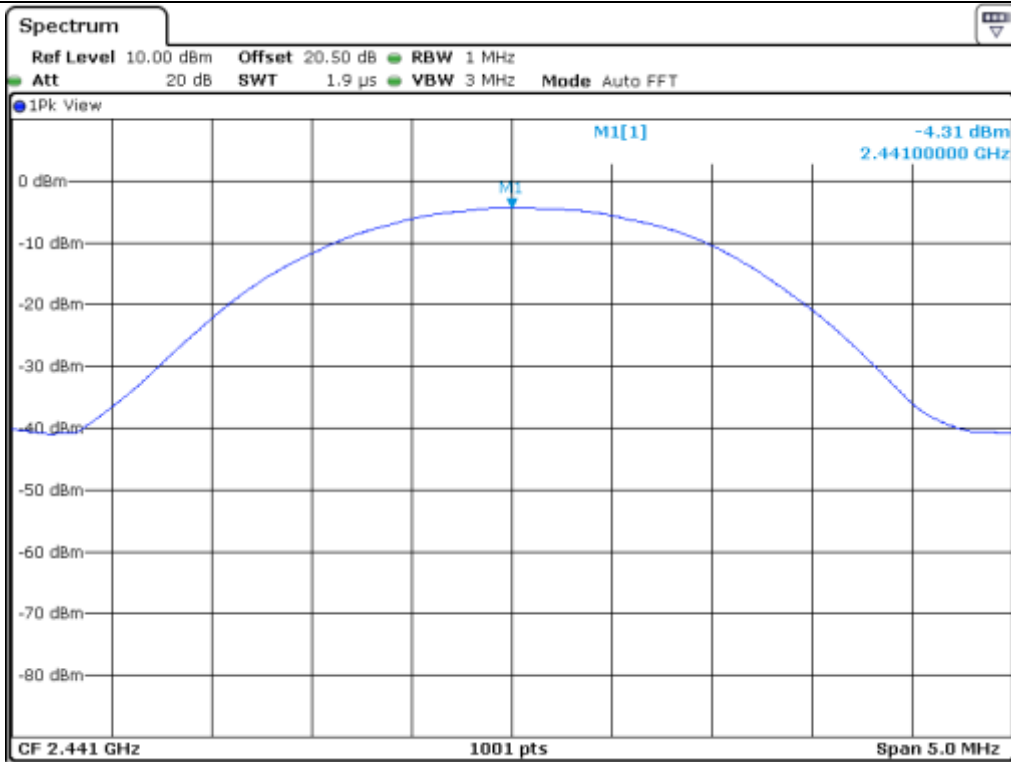

Middle Channel

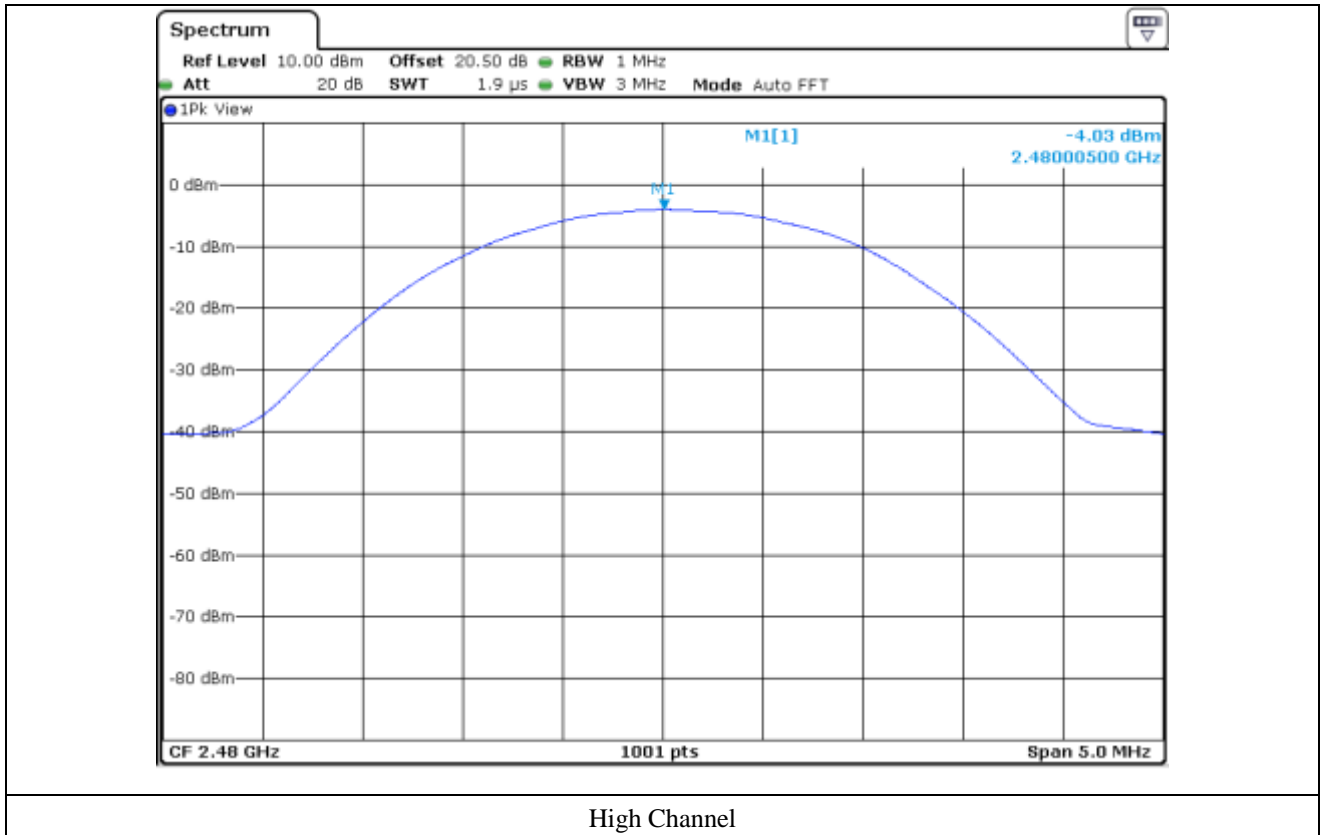


## 12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

### 12.1 Operating environment

Temperature : 24 °C  
 Relative humidity : 48 % R.H

### 12.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

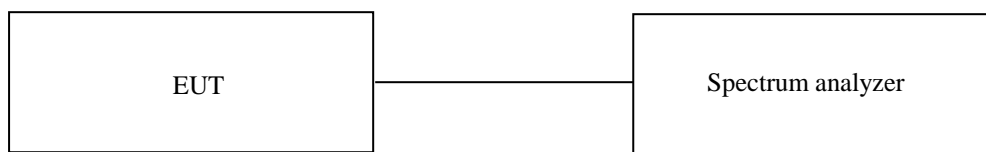

### 12.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m, open-field test site. The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The frequency spectrum from 30 kHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 ms in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


### 12.4 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
<input type="checkbox"/>	ESCI	Rohde & Schwarz	EMI Test Receiver	101012	Oct. 22, 2019 (1Y)
<input checked="" type="checkbox"/>	ESR	Rohde & Schwarz	EMI Test Receiver	101470	Oct. 22, 2019 (1Y)
<input checked="" type="checkbox"/>	310N	Sonoma Instrument	AMPLIFIER	312544	Mar. 18, 2019 (1Y)
<input type="checkbox"/>	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Jul. 24, 2019 (1Y)
<input checked="" type="checkbox"/>	BBV 9718 B	Schwarzbeck	Broadband Pre-Amplifier	009	Mar. 20, 2019 (1Y)
<input checked="" type="checkbox"/>	MA240	HD GmbH	Antenna Master	N/A	N/A
<input type="checkbox"/>	HD100	HD GmbH	Position Controller	N/A	N/A
<input checked="" type="checkbox"/>	DS420S	HD GmbH	Turn Table	N/A	N/A
<input type="checkbox"/>	FMZB 1513	Schwarzbeck	LOOP ANTENNA	1513-235	May. 13, 2018 (2Y)
<input checked="" type="checkbox"/>	VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-255	Jun. 05, 2018 (2Y)
<input checked="" type="checkbox"/>	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Jul. 16, 2019 (1Y)
<input type="checkbox"/>	BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 16, 2019 (1Y)
<input type="checkbox"/>	83051A	Agilent	Microwave System Preamplifer	3950M00201	Mar. 12, 2019 (1Y)


All test equipment used is calibrated on a regular basis.

12.5 Test data for conducted emission

12.5.1 Test data for 1 Mbps

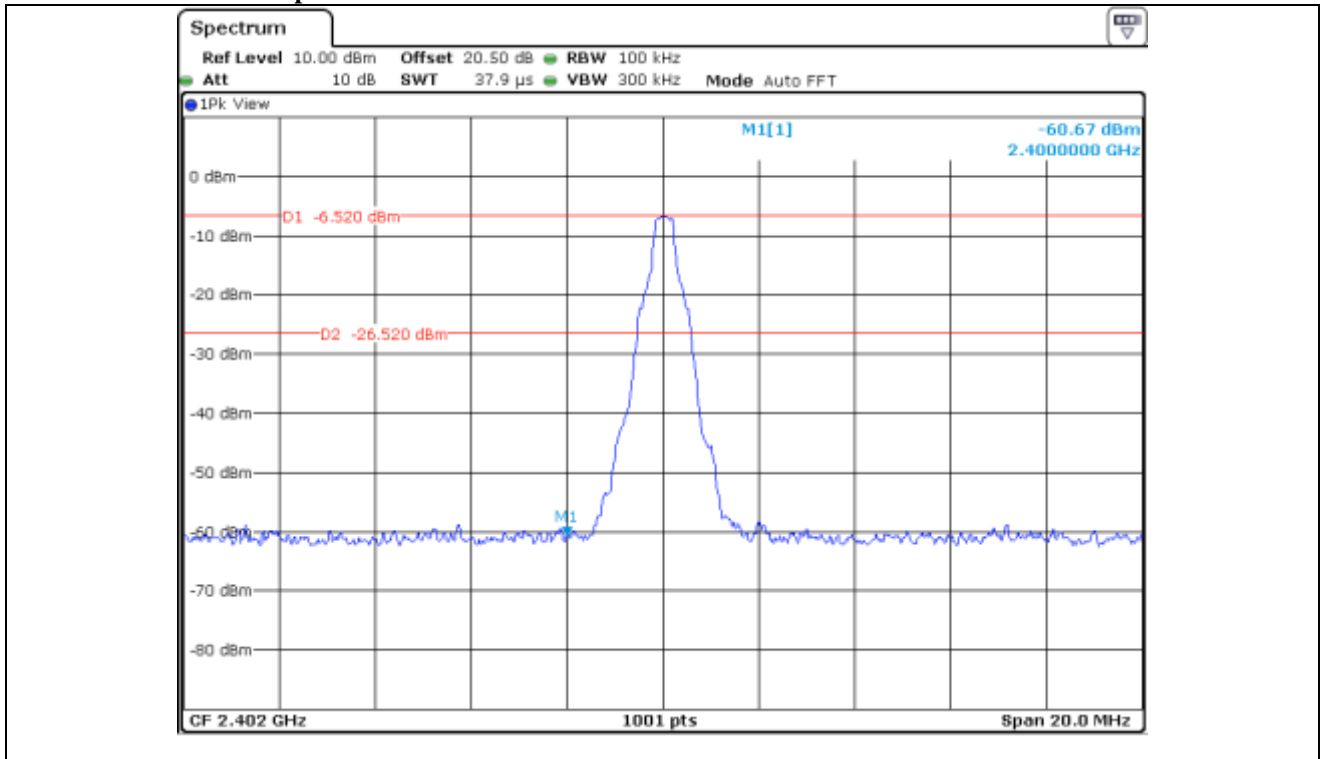


Low Channel

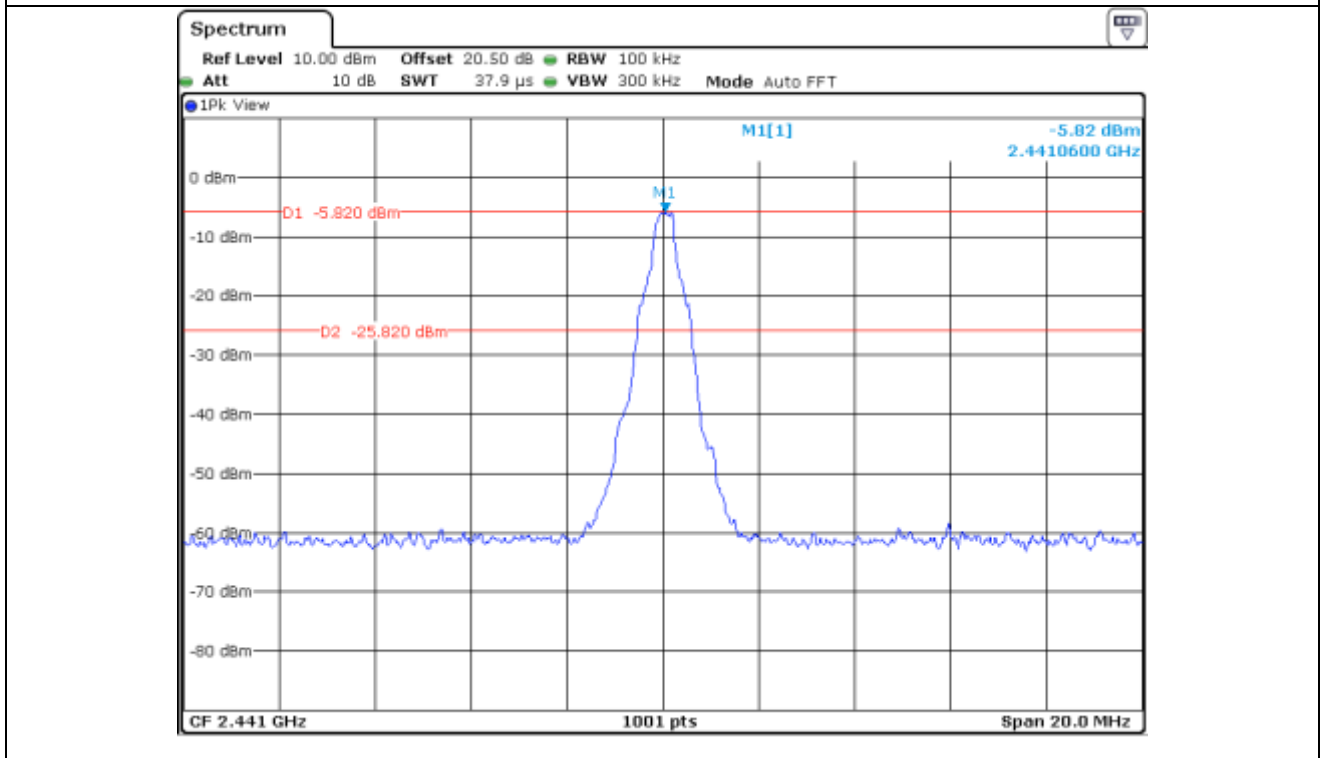


Middle Channel




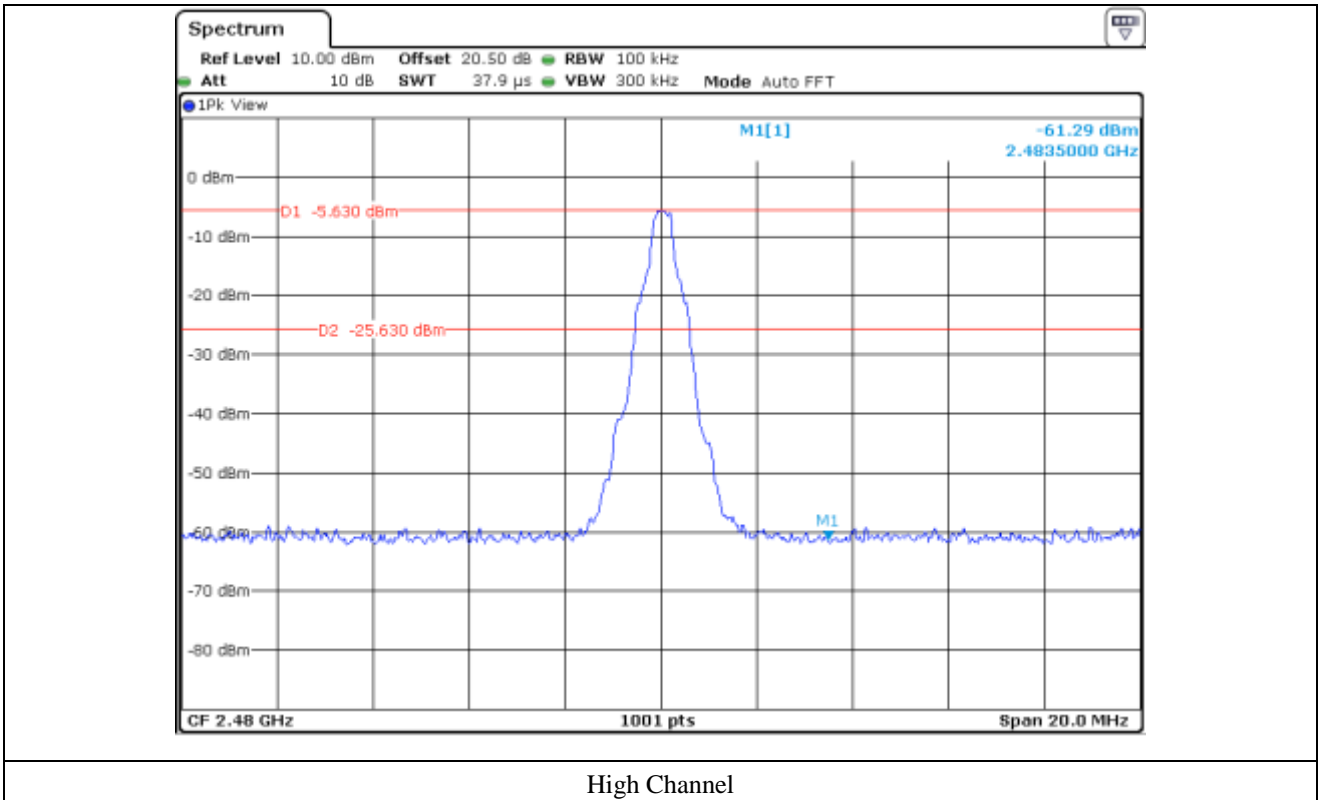


High Channel

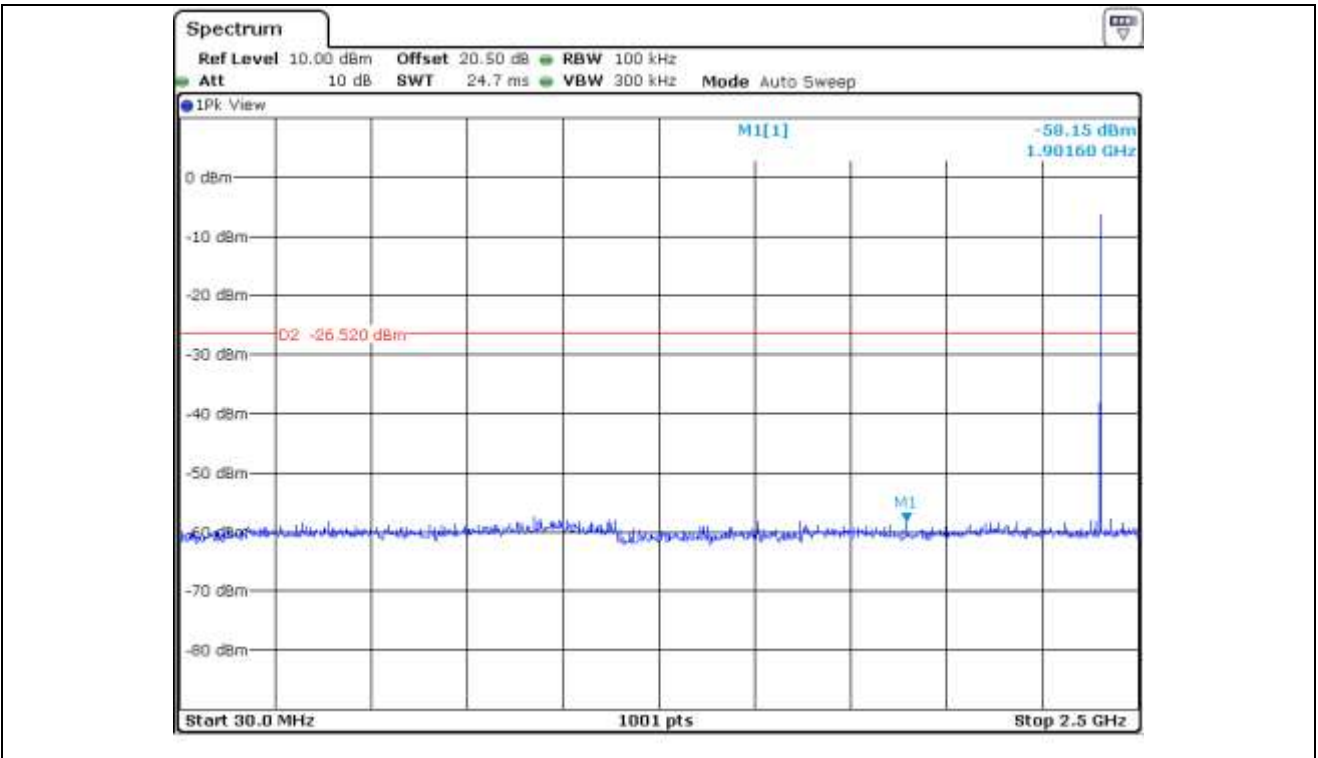


Low Channel

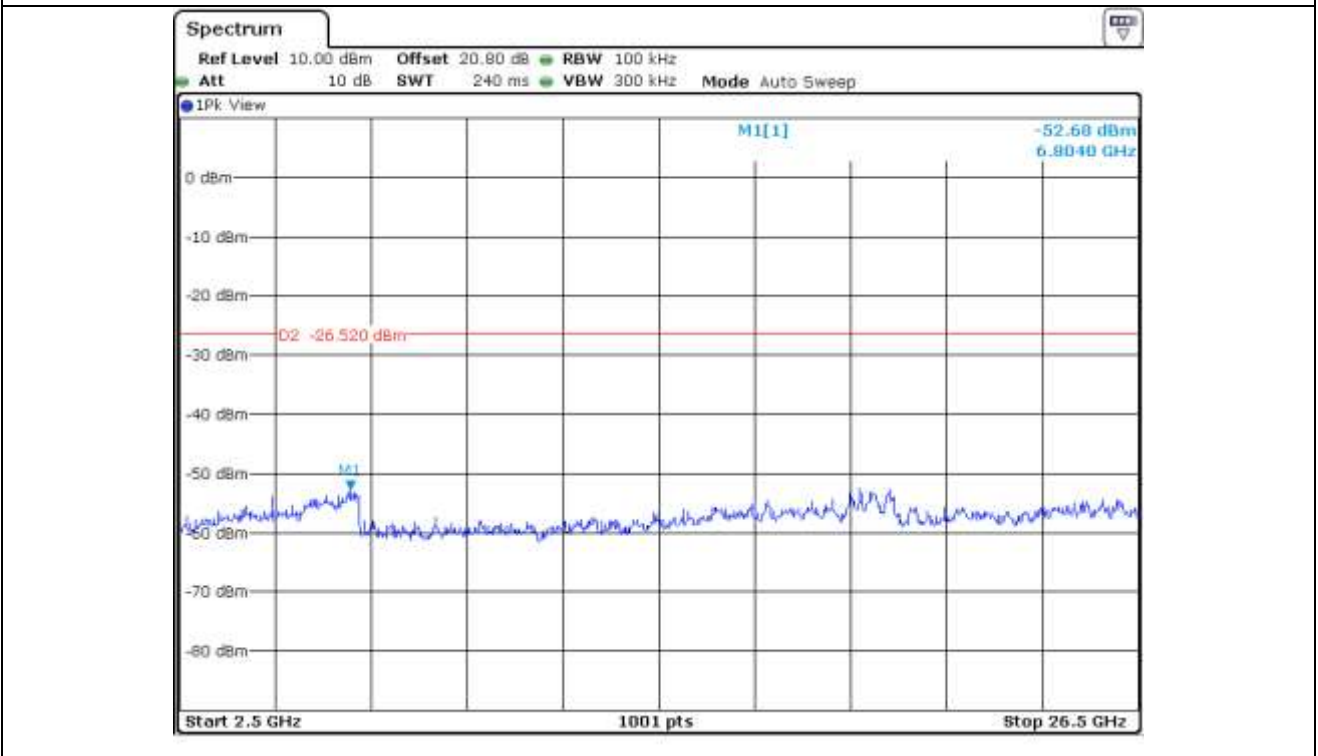


Low Channel

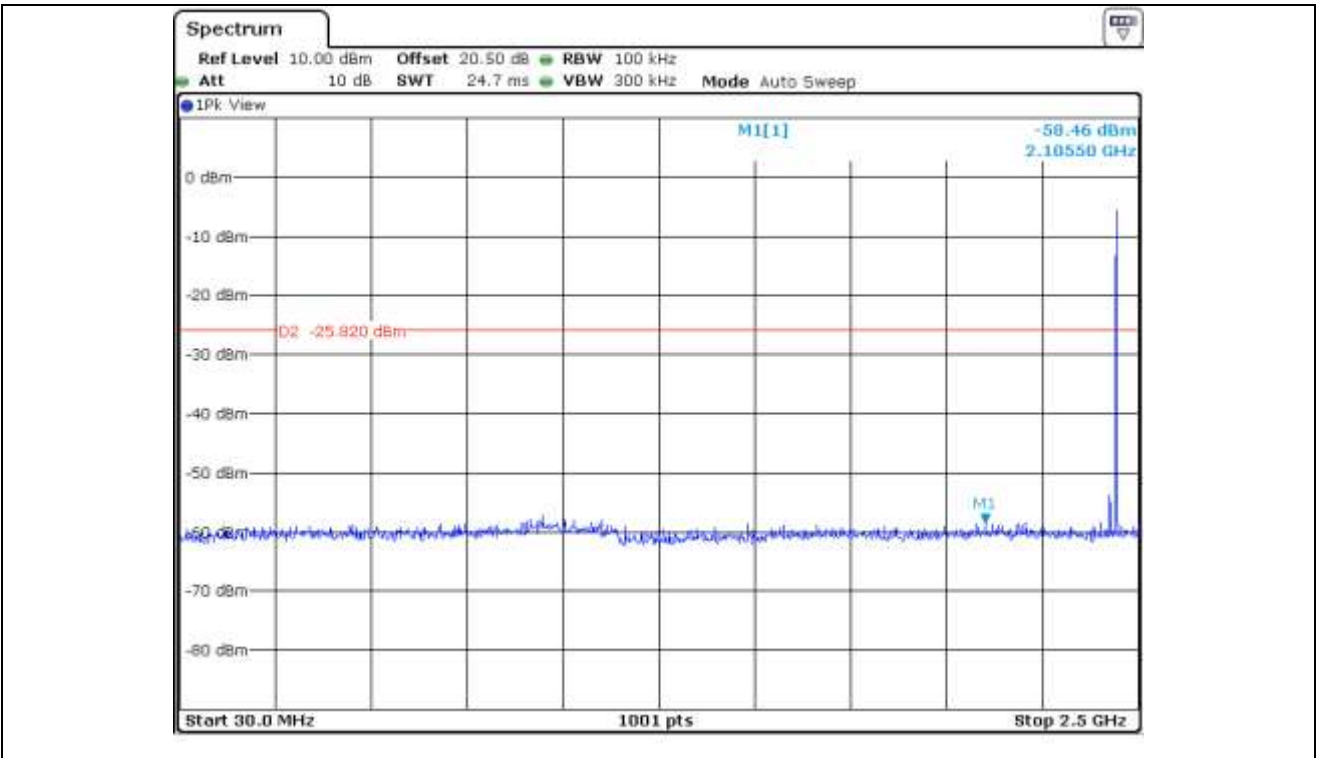


Middle Channel

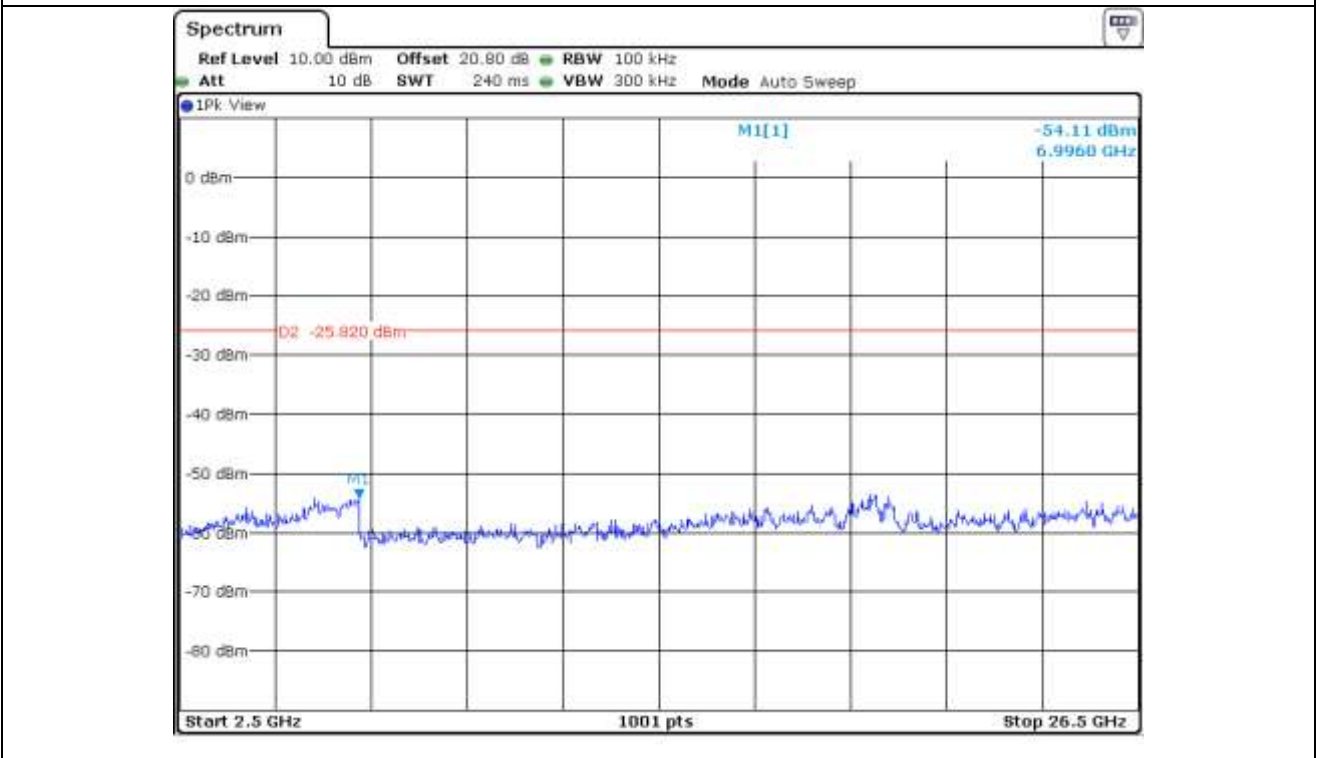

Middle Channel

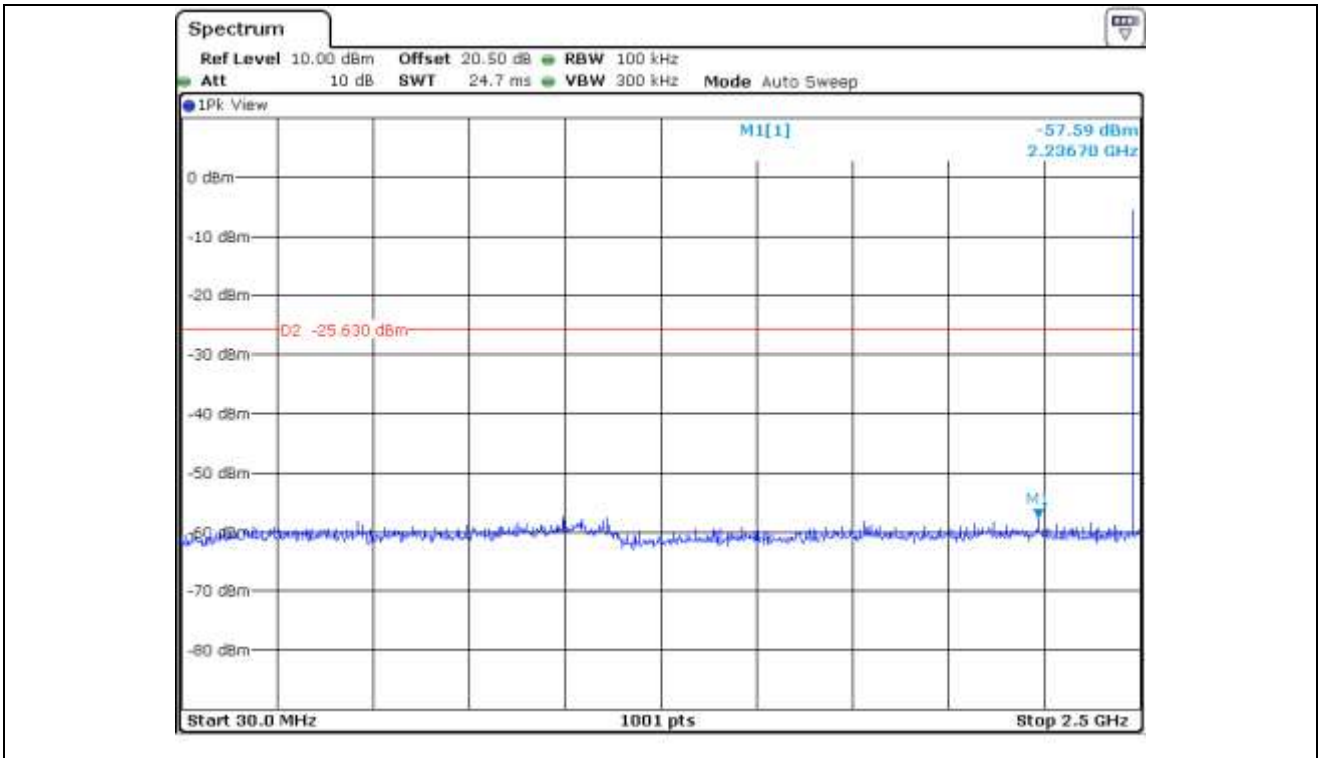


High Channel

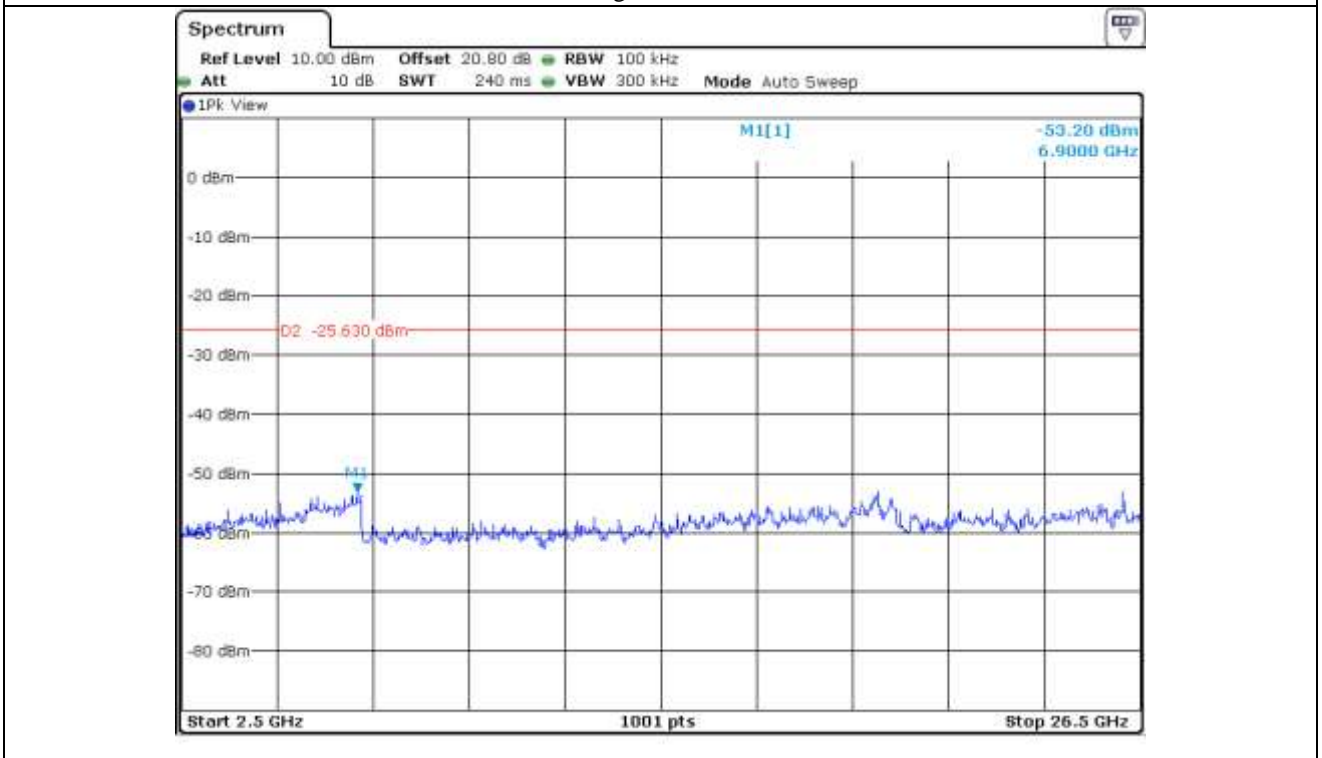


High Channel


12.5.2 Test data for 2 Mbps

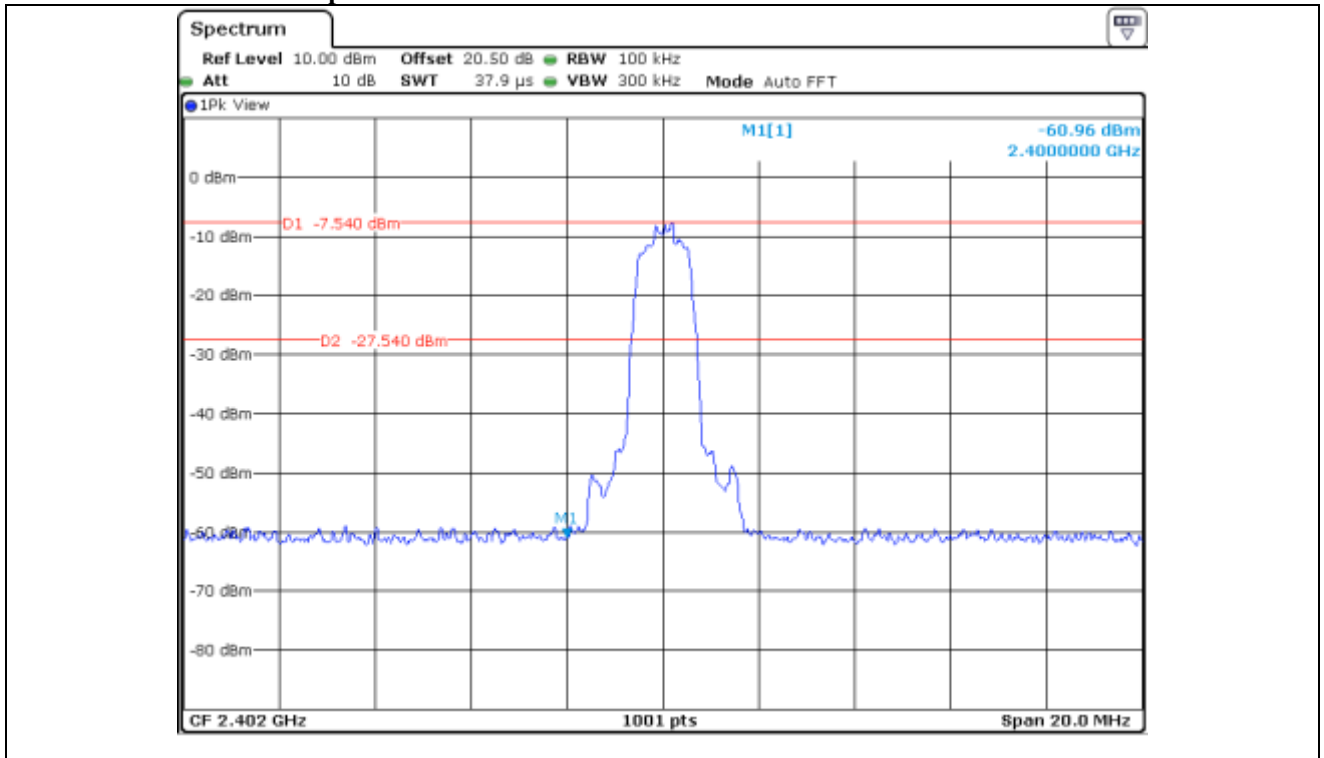


Low Channel

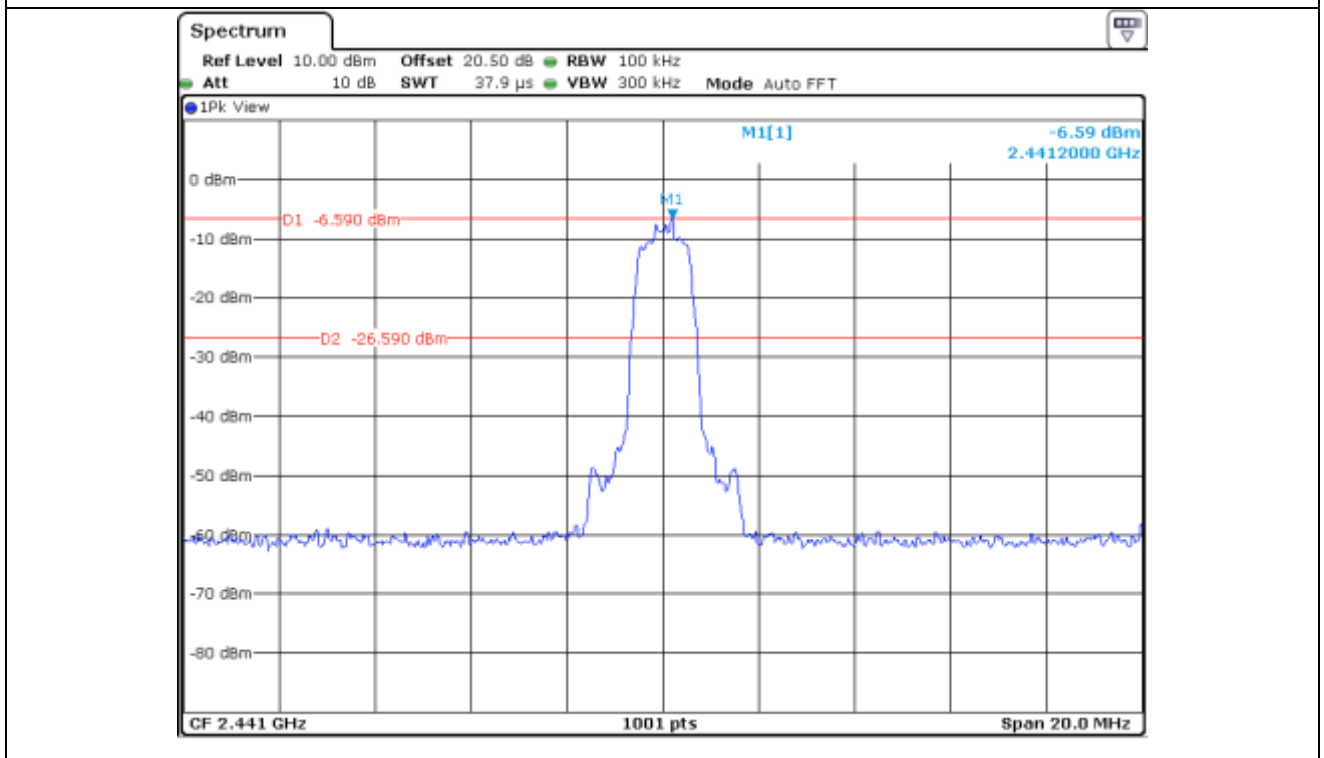


Middle Channel

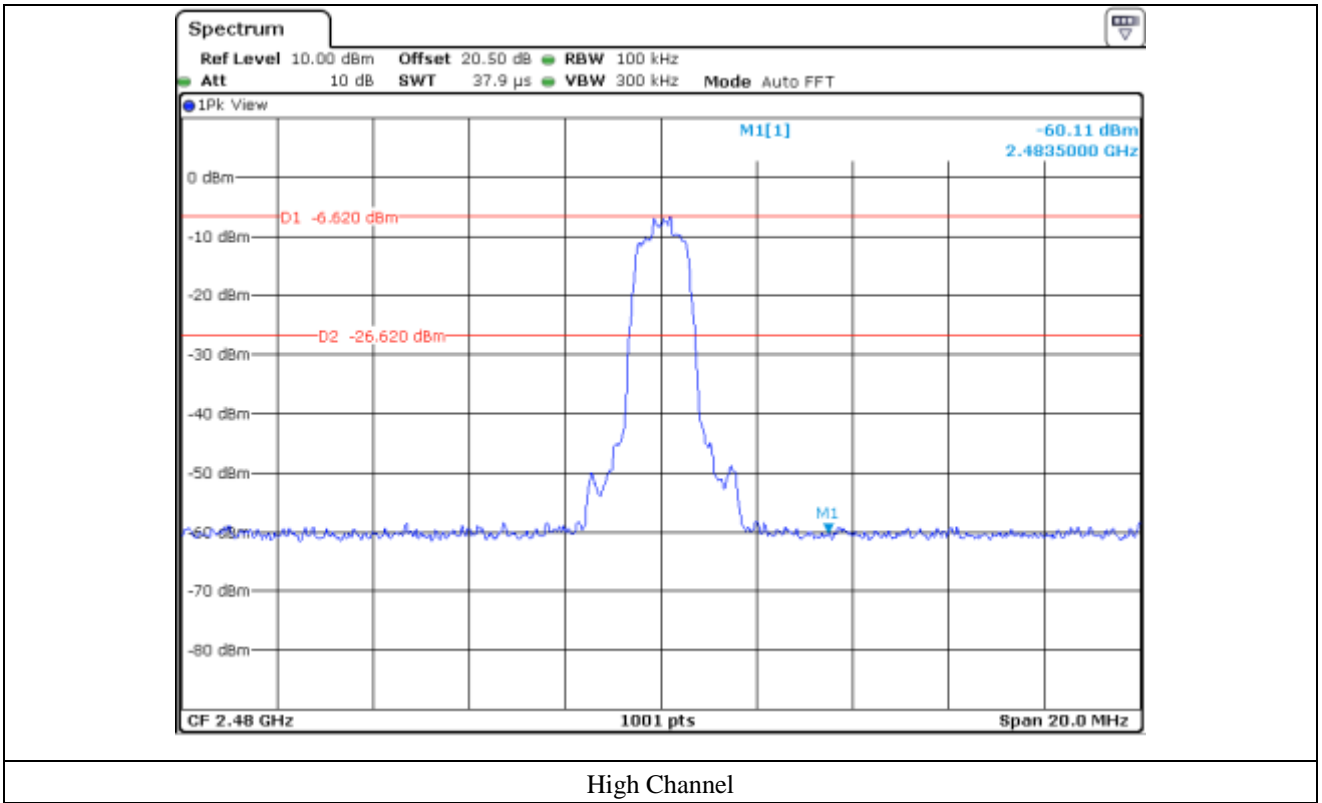


High Channel

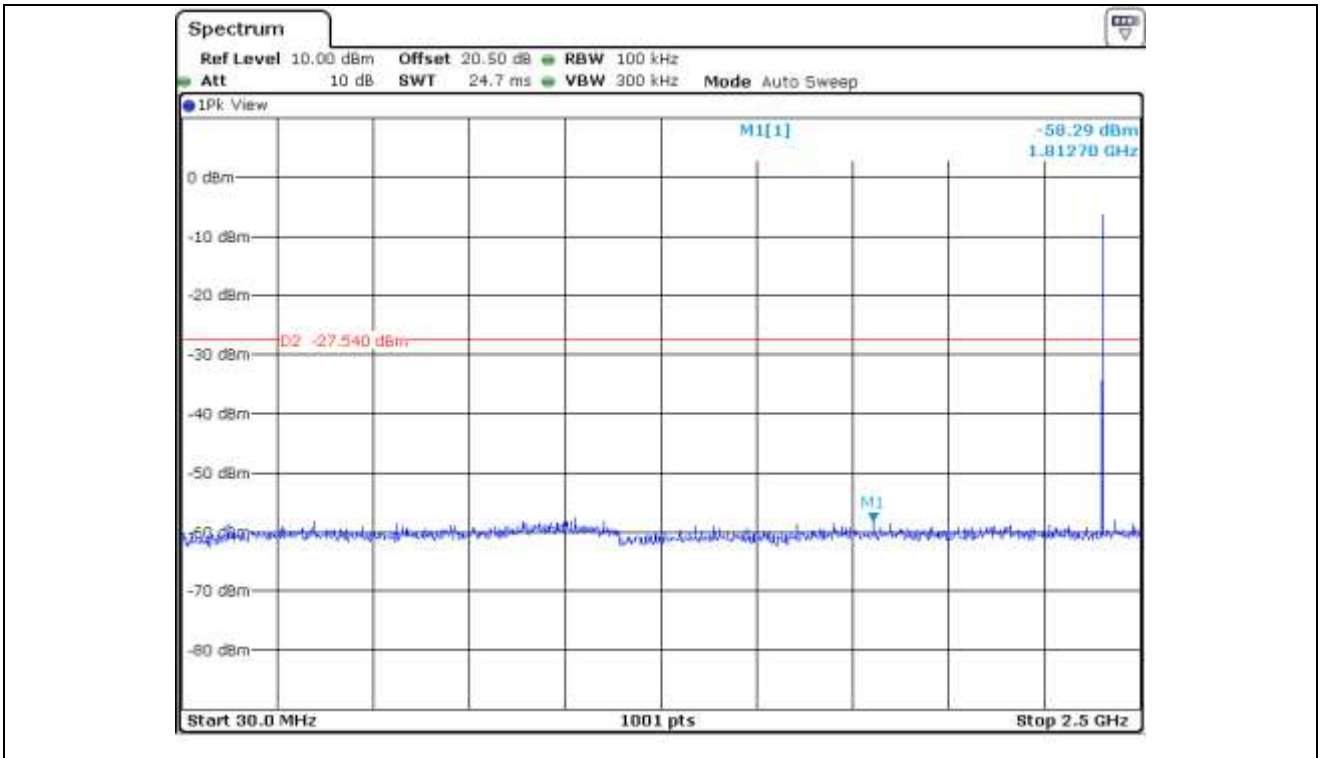


Low Channel

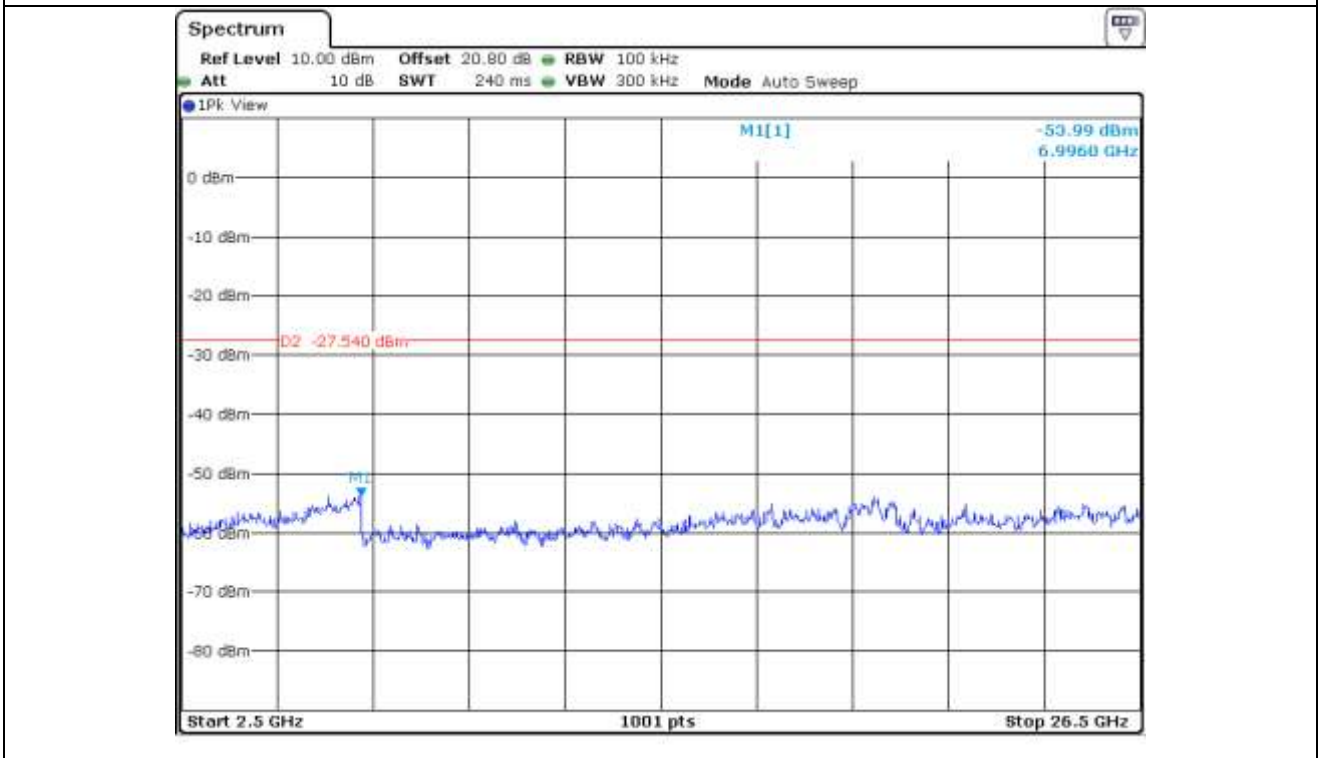

Low Channel

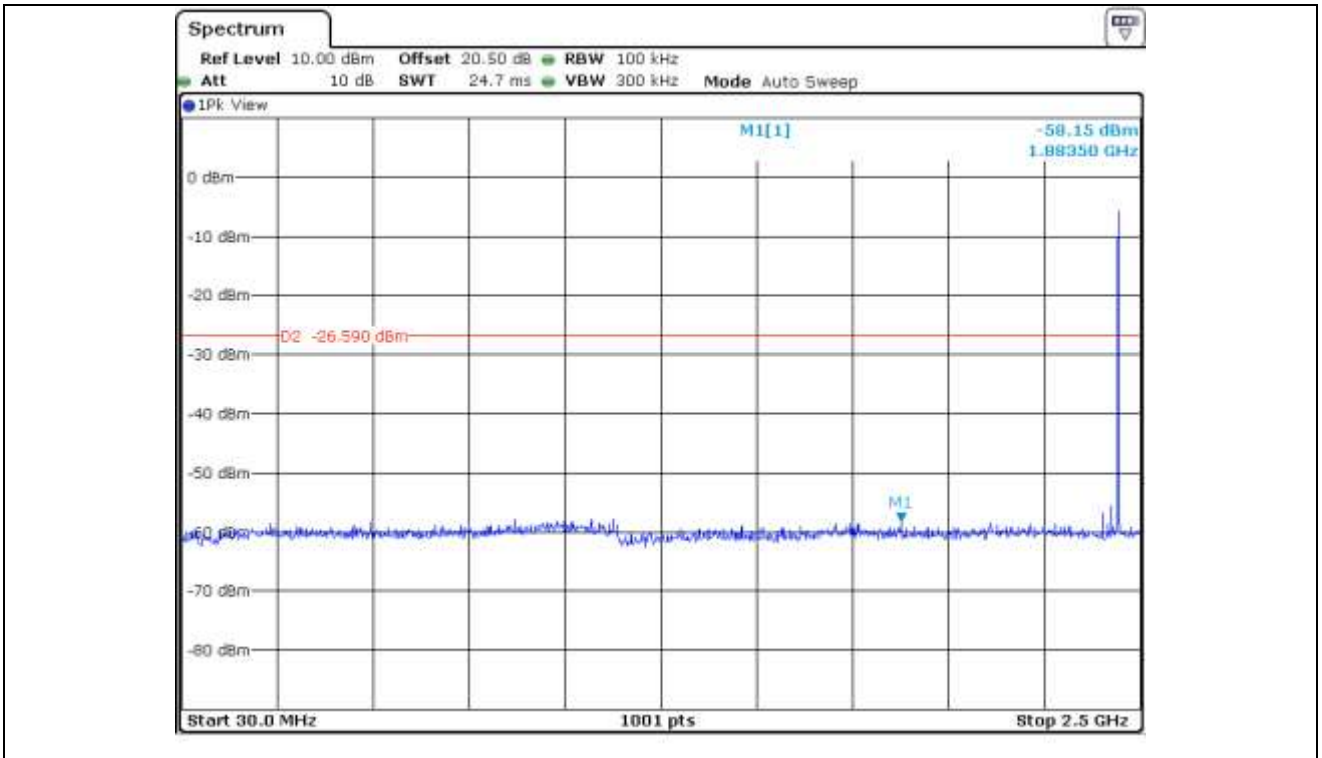


Middle Channel

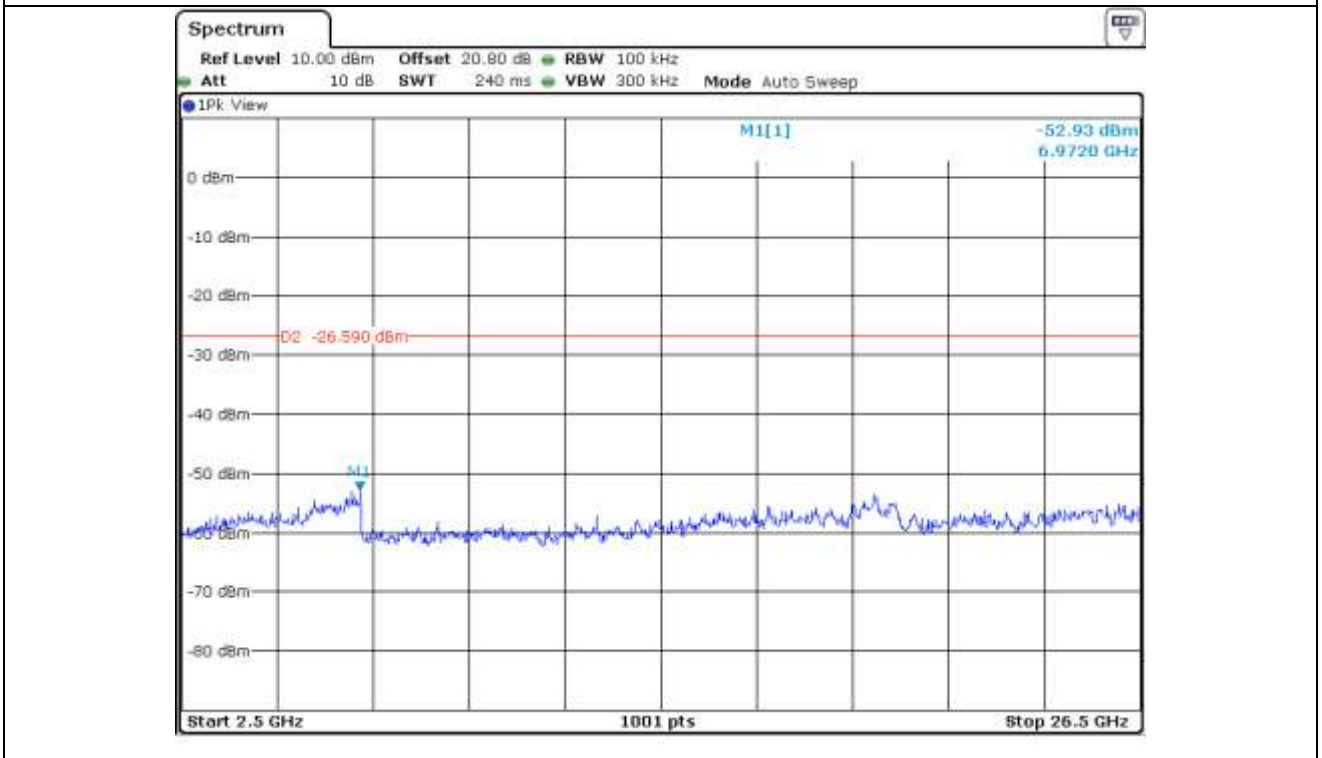


Middle Channel



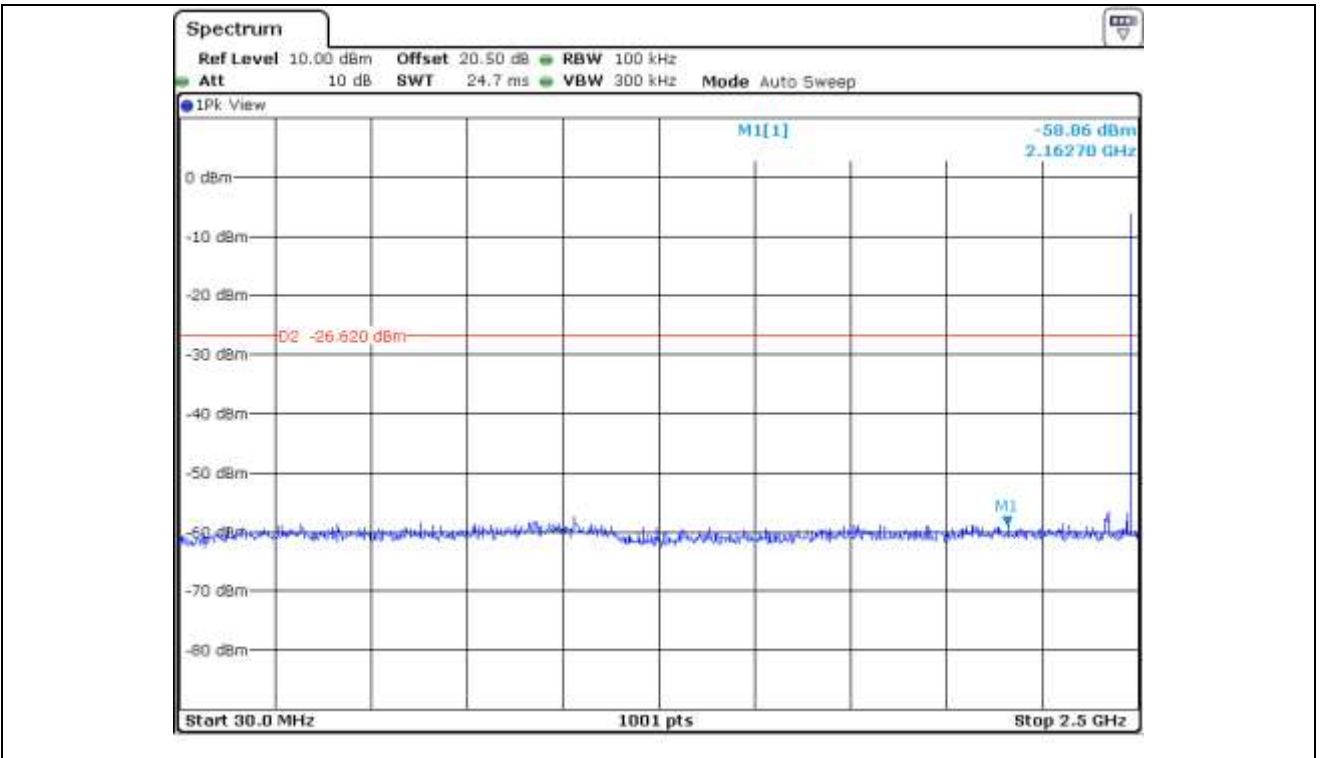


High Channel

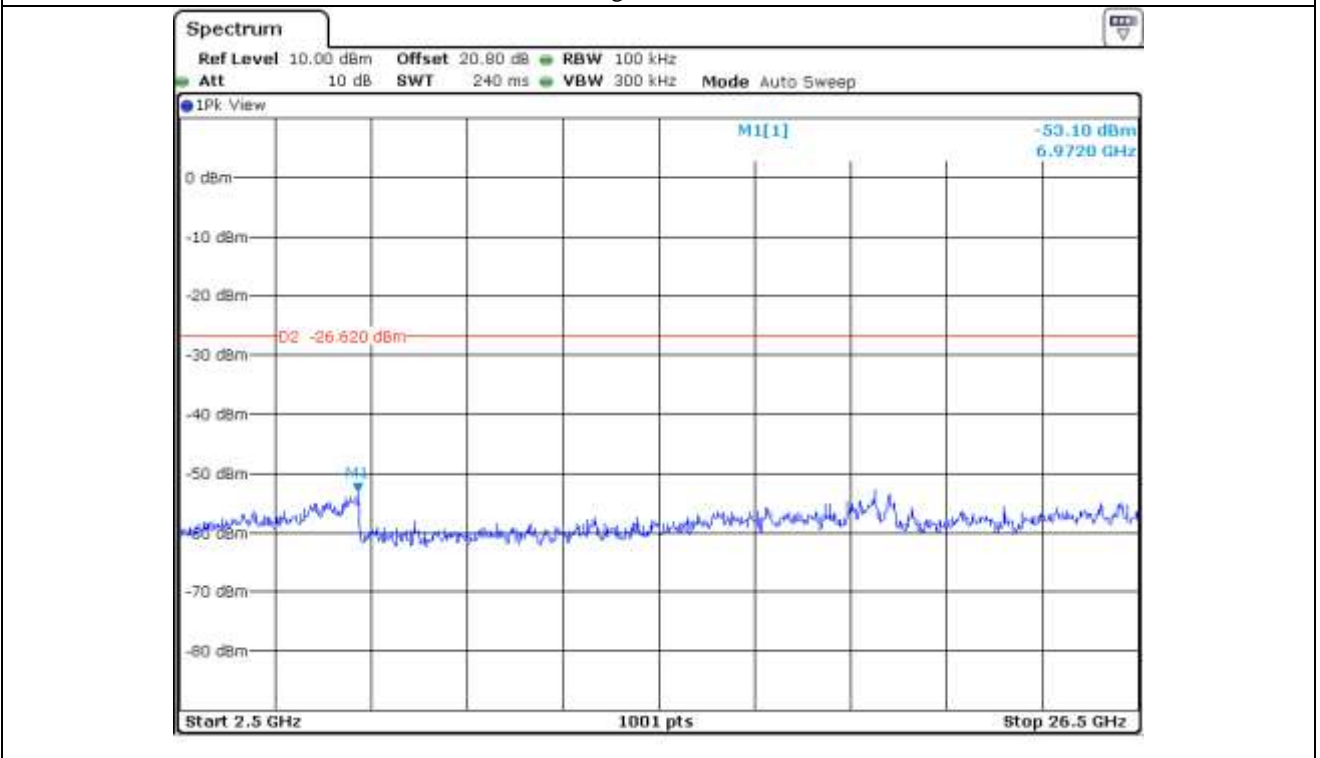


High Channel


12.5.3 Test data for 3 Mbps

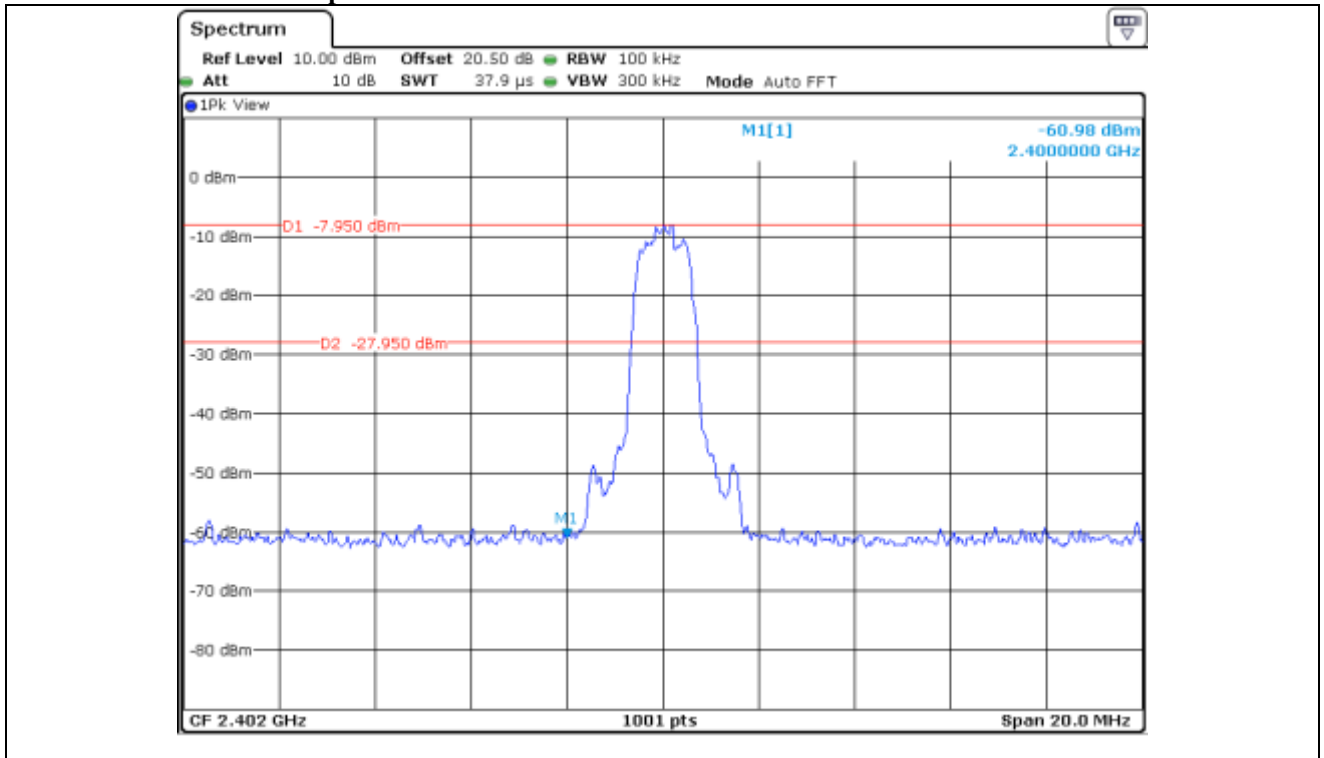


Low Channel

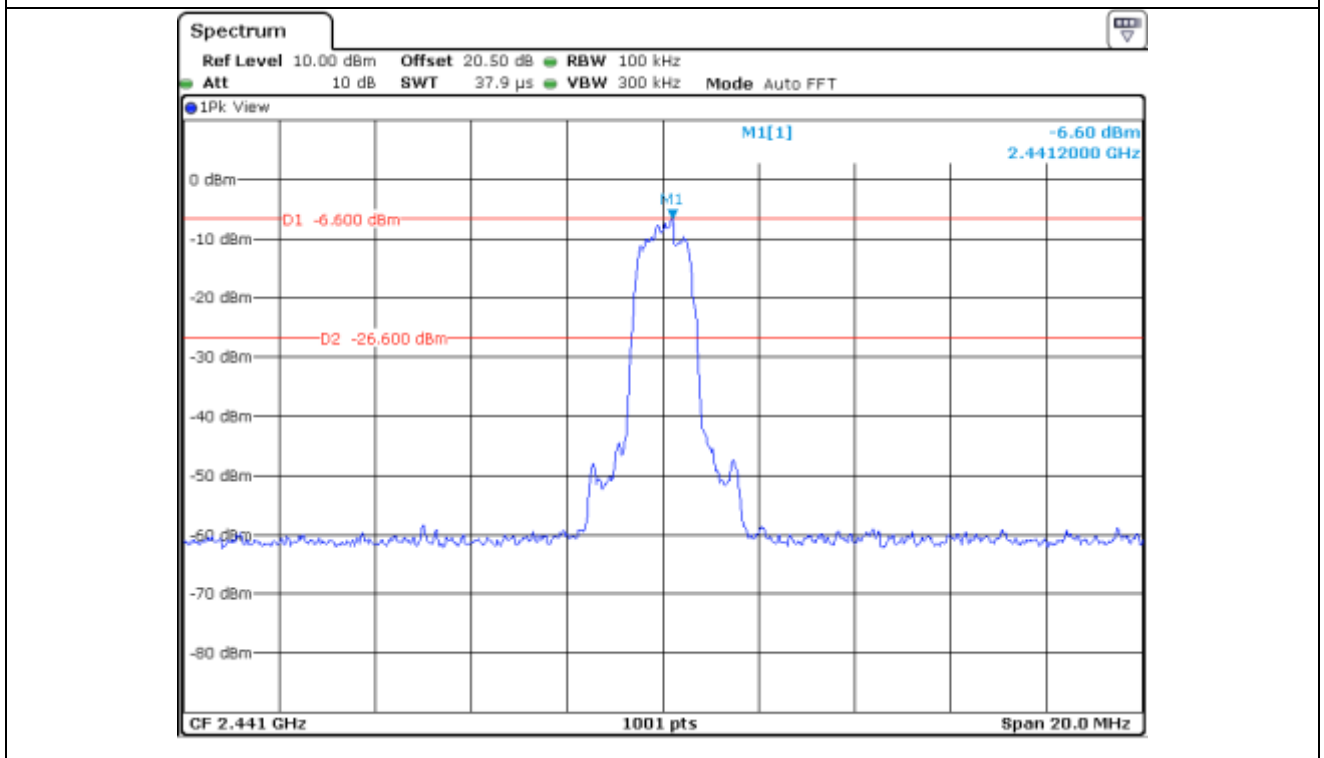


Middle Channel

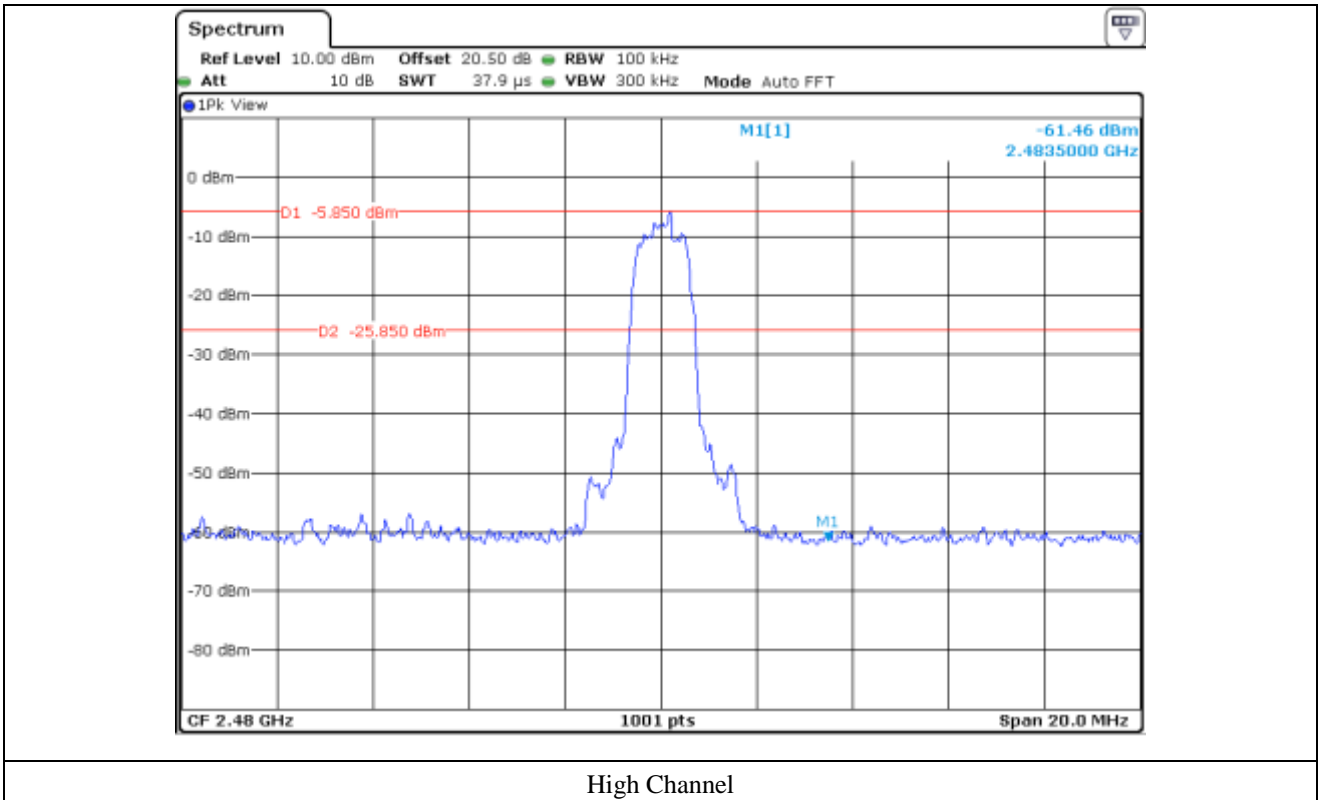


High Channel

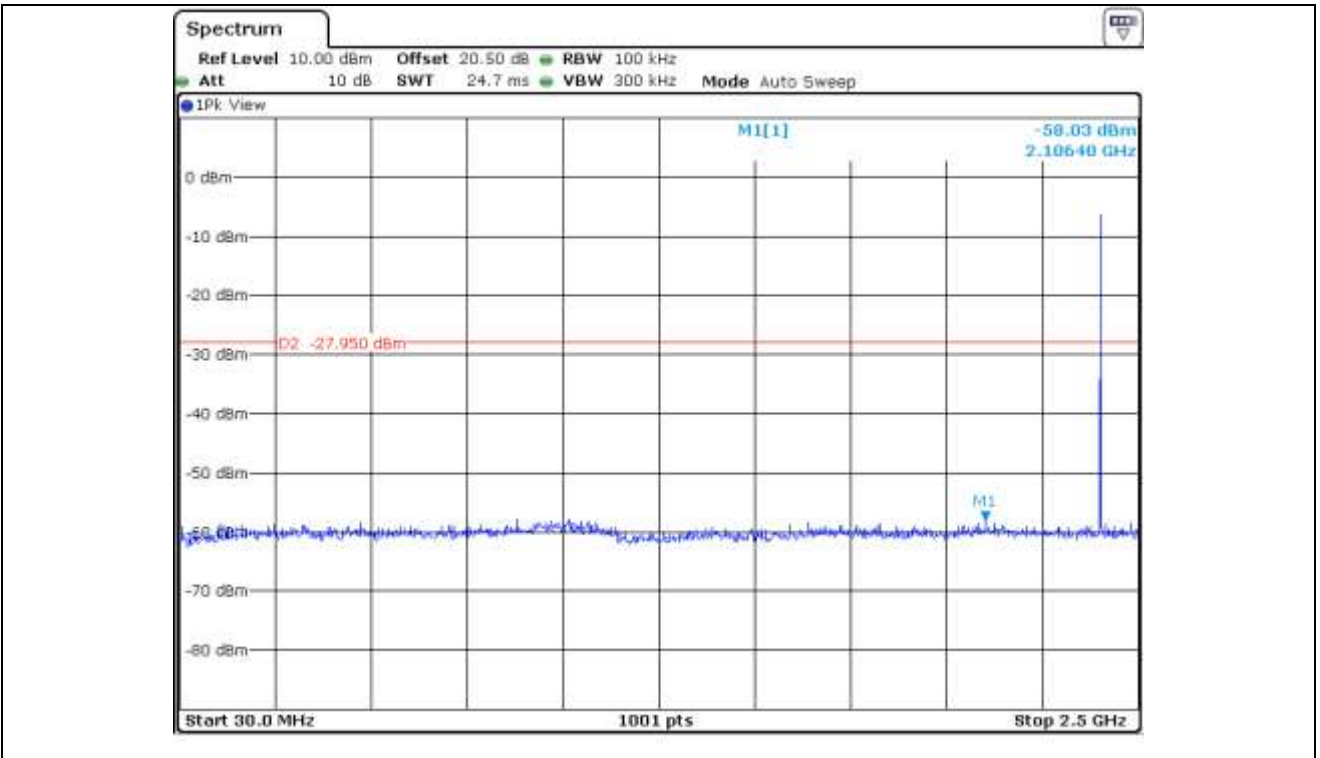


Low Channel

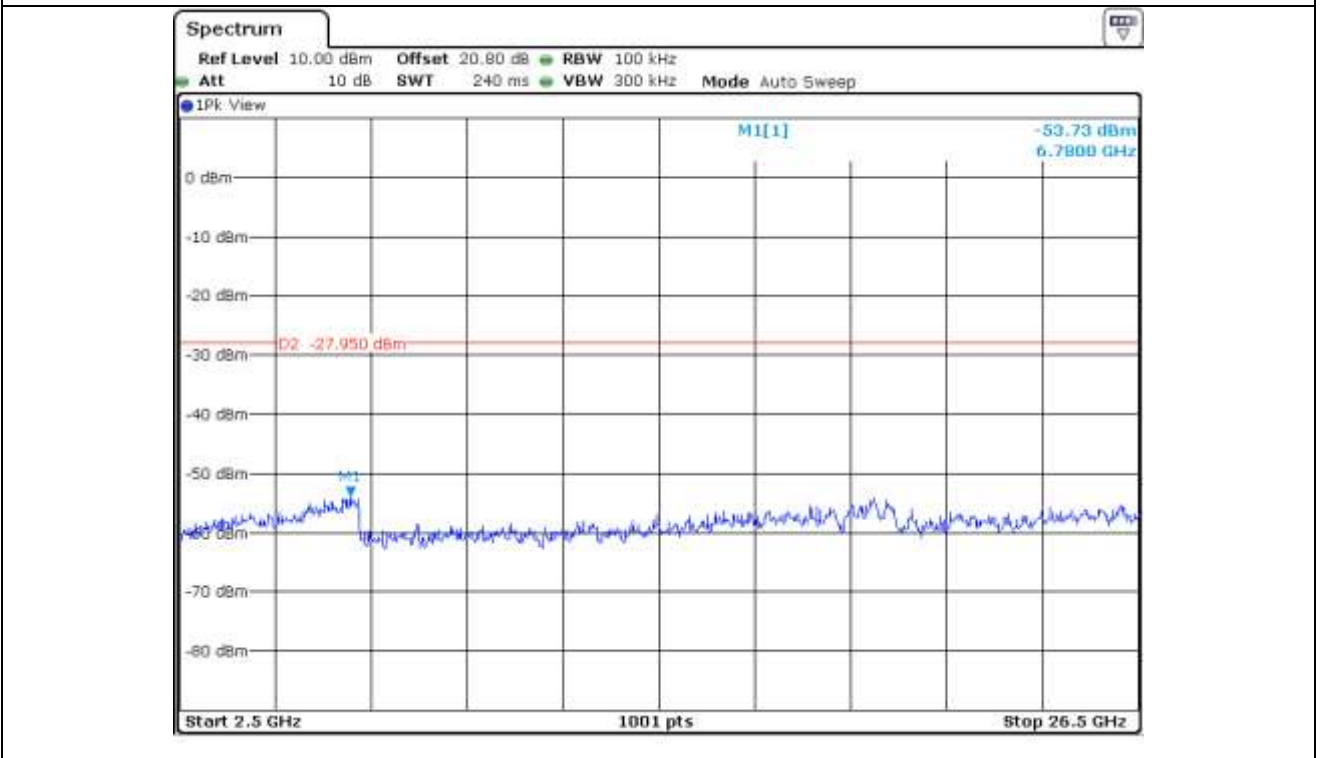


Low Channel

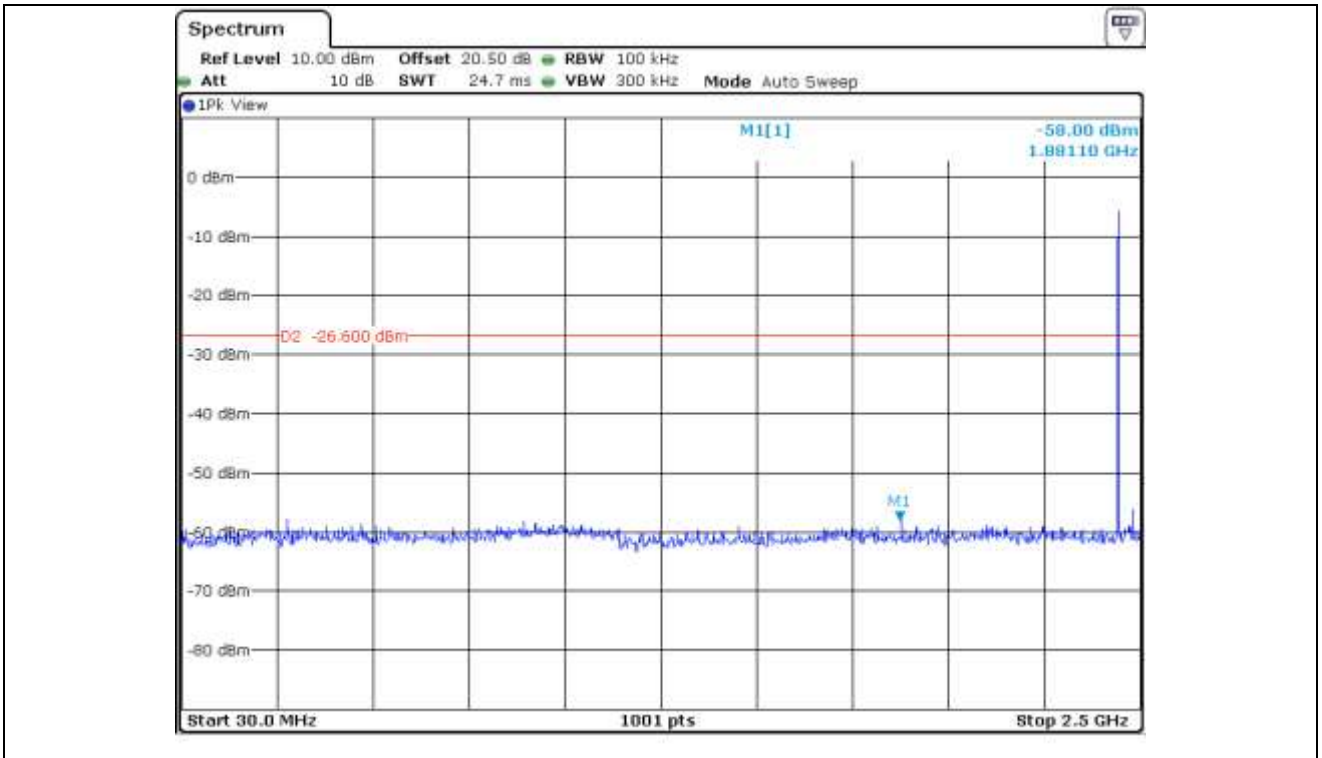


Middle Channel

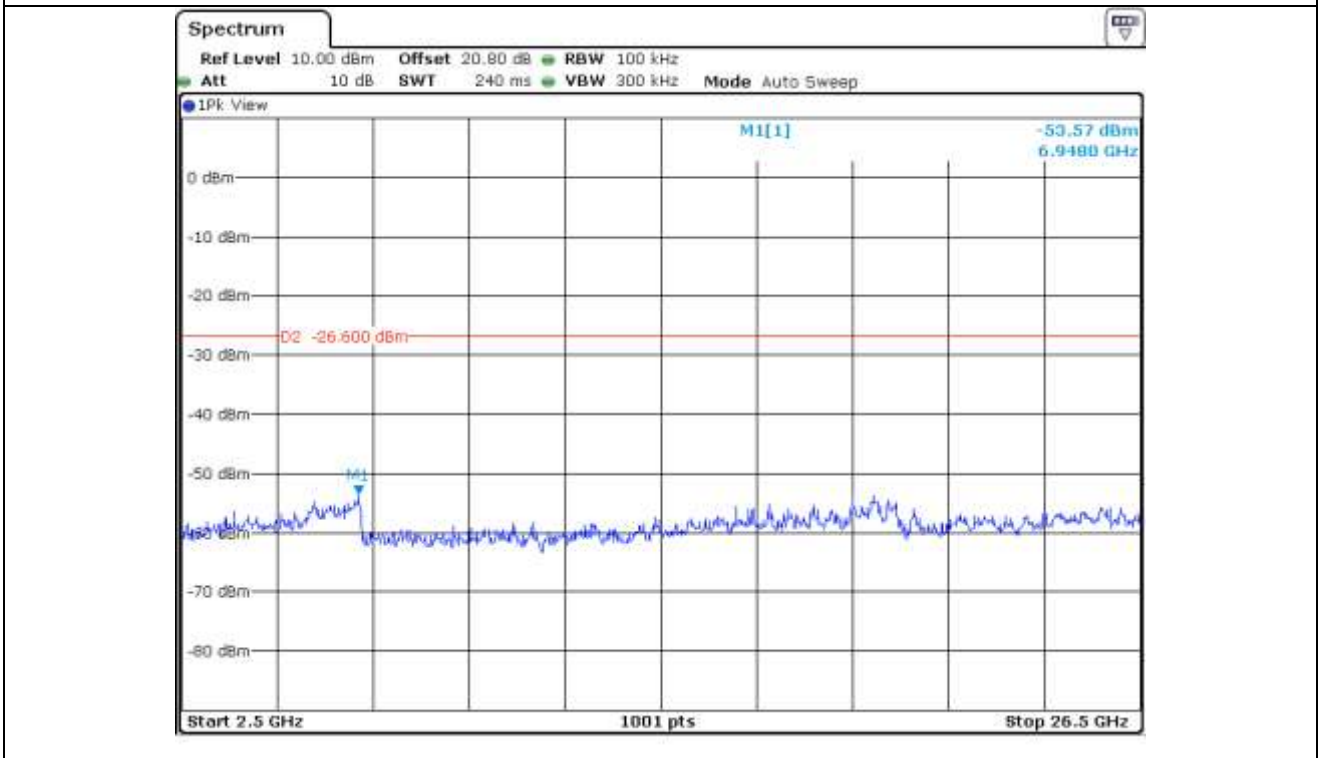

Middle Channel

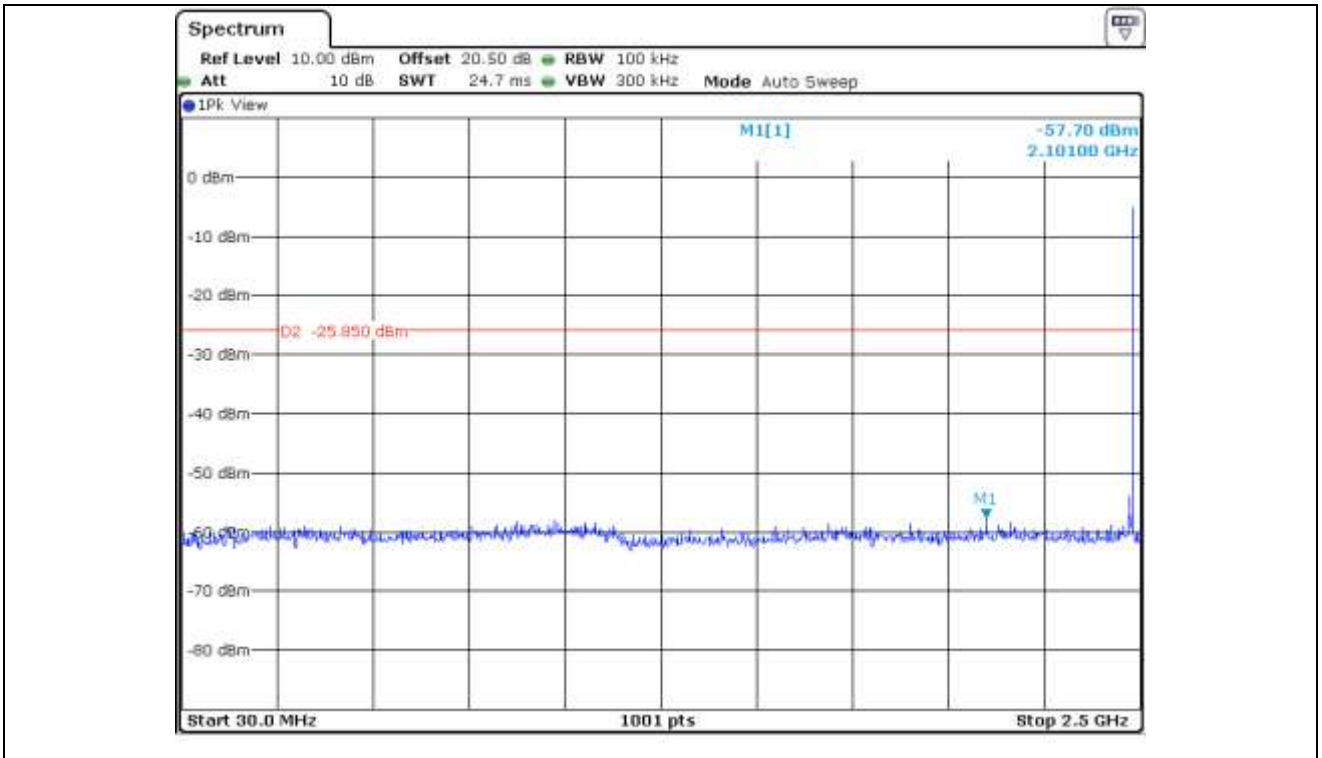

High Channel

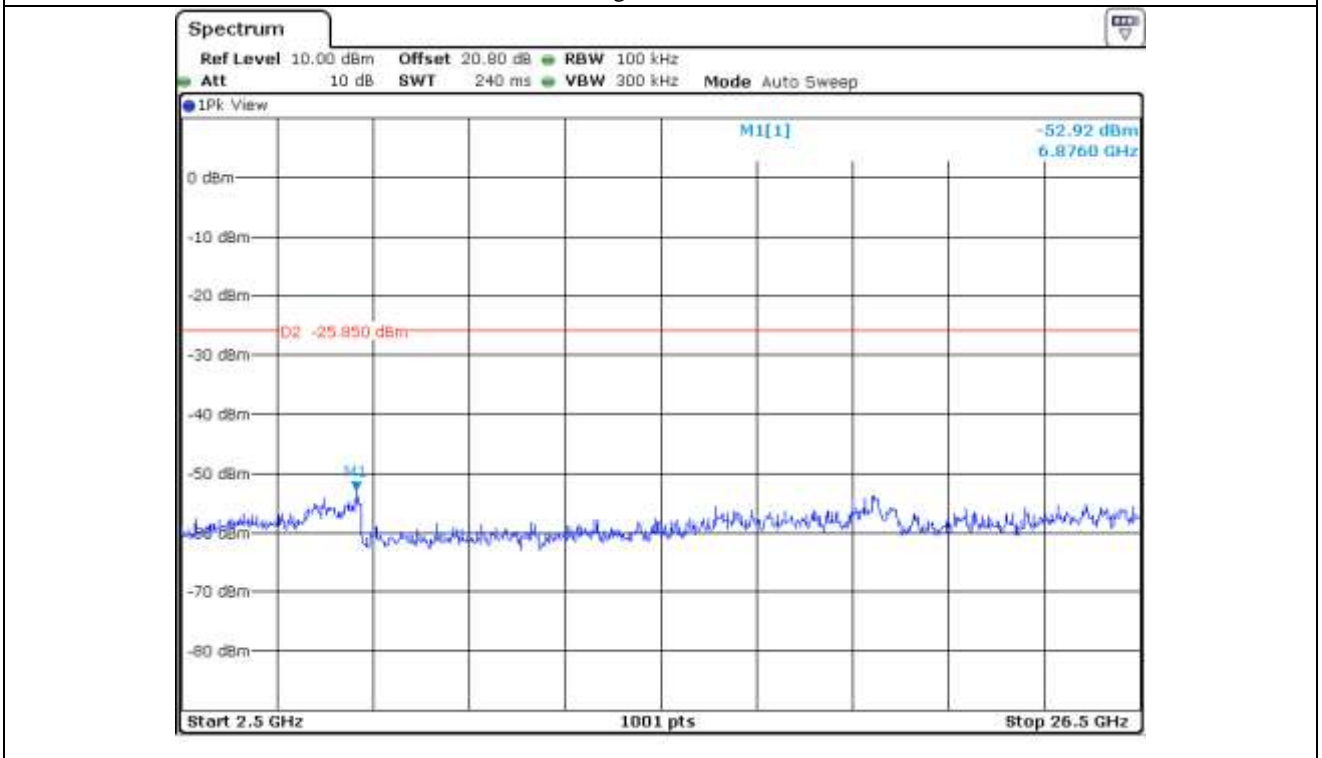

High Channel

**12.6 Test data for Transmitting Mode radiated emission**

**12.6.1 Radiated Emission which fall in the Restricted Band**

**12.6.1.1 Test data for 1 Mbps**

- . Test Date : November 28, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>										
2 340.49	47.63	Peak	H	27.30	6.60	45.80		35.73	74.00	38.27
2 388.02	37.34	Average	H				1.13	26.57	54.00	27.43
2 375.97	46.81	Peak	V					34.91	74.00	39.09
2 325.54	37.51	Average	V				1.13	26.74	54.00	27.26
<b>Test Data for High Channel</b>										
2 498.23	46.43	Peak	H	27.50	6.80	45.80		34.93	74.00	39.07
2 485.35	36.21	Average	H				1.13	25.84	54.00	28.16
2 488.75	46.48	Peak	V					34.98	74.00	39.02
2 491.34	36.71	Average	V				1.13	26.34	54.00	27.66

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



**Tested by: Sieon Lee / Assistant Manager**

**12.6.1.2 Test data for 2 Mbps**

- . Test Date : November 28, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>										
2 325.23	47.69	Peak	H	27.30	6.60	45.80		35.79	74.00	38.21
2 341.37	37.31	Average	H				1.12	26.53	54.00	27.47
2 388.68	47.19	Peak	V					35.29	74.00	38.71
2 348.24	37.60	Average	V				1.12	26.82	54.00	27.18
<b>Test Data for High Channel</b>										
2 487.58	46.13	Peak	H	27.50	6.80	45.80		34.63	74.00	39.37
2 490.76	36.82	Average	H				1.12	26.44	54.00	27.56
2 491.22	46.93	Peak	V					35.43	74.00	38.57
2 486.05	36.58	Average	V				1.12	26.20	54.00	27.80

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



**Tested by: Sieon Lee / Assistant Manager**



**12.6.1.3 Test data for 3 Mbps**

- . Test Date : November 28, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>										
2 340.57	47.40	Peak	H	27.30	6.60	45.80		35.50	74.00	38.50
2 354.40	37.35	Average	H				1.12	26.57	54.00	27.43
2 387.64	47.59	Peak	V					35.69	74.00	38.31
2 340.01	37.37	Average	V				1.12	26.59	54.00	27.41
<b>Test Data for High Channel</b>										
2 492.56	46.30	Peak	H	27.50	6.80	45.80		34.80	74.00	39.20
2 489.13	36.53	Average	H				1.12	26.15	54.00	27.85
2 497.93	46.05	Peak	V					34.55	74.00	39.45
2 488.68	36.70	Average	V				1.12	26.32	54.00	27.68

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



**Tested by: Sieon Lee / Assistant Manager**

**12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz**

**12.6.2.1 Test data for 1 Mbps**

- . Test Date : November 28, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode
- . Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>										
4 804.00	49.97	Peak	H	31.20	9.80	45.30		45.67	74.00	28.33
	44.68	Average	H				1.13	40.38	54.00	13.62
	50.57	Peak	V					46.27	74.00	27.73
	43.53	Average	V				1.13	39.23	54.00	14.77
<b>Test Data for Middle Channel</b>										
4 882.00	49.29	Peak	H	31.40	9.80	45.30		45.19	74.00	28.81
	43.28	Average	H				1.13	39.18	54.00	14.82
	50.21	Peak	V					46.11	74.00	27.89
	42.32	Average	V				1.13	38.22	54.00	15.78
<b>Test Data for High Channel</b>										
4 960.00	48.99	Peak	H	31.60	9.90	45.30		45.19	74.00	28.81
	41.44	Average	H				1.13	37.64	54.00	16.36
	49.01	Peak	V					45.21	74.00	28.79
	40.69	Average	V				1.13	36.89	54.00	17.11

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "\*" Frequency fall in restricted band



**Tested by: Sieon Lee / Assistant Manager**

**12.6.2.2 Test data for 2 Mbps**

- Test Date : November 28, 2019
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>										
4 804.00	49.91	Peak	H	31.20	9.80	45.30		45.61	74.00	28.39
	41.07	Average	H				1.12	37.07	54.00	16.93
	49.95	Peak	V					45.65	74.00	28.35
	40.44	Average	V				1.12	36.14	54.00	17.86
<b>Test Data for Middle Channel</b>										
4 882.00	48.57	Peak	H	31.40	9.80	45.30		44.47	74.00	29.53
	40.61	Average	H				1.12	36.51	54.00	17.49
	49.08	Peak	V					44.98	74.00	29.02
	40.42	Average	V				1.12	36.32	54.00	17.68
<b>Test Data for High Channel</b>										
4 960.00	48.39	Peak	H	31.60	9.90	45.30		44.59	74.00	29.41
	39.96	Average	H				1.12	36.16	54.00	17.84
	48.70	Peak	V					44.90	74.00	29.10
	38.70	Average	V				1.12	34.90	54.00	19.10

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "\*" Frequency fall in restricted band



**Tested by: Sieon Lee / Assistant Manager**

**12.6.2.3 Test data for 3 Mbps**

- Test Date : November 28, 2019
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>										
4 804.00	49.28	Peak	H	31.20	9.80	45.30		44.98	74.00	29.02
	40.93	Average	H				1.12	36.93	54.00	17.07
	49.31	Peak	V					45.01	74.00	28.99
	40.81	Average	V				1.12	36.51	54.00	17.49
<b>Test Data for Middle Channel</b>										
4 882.00	49.31	Peak	H	31.40	9.80	45.30		45.21	74.00	28.79
	39.96	Average	H				1.12	35.86	54.00	18.14
	49.80	Peak	V					45.70	74.00	28.30
	39.52	Average	V				1.12	35.42	54.00	18.58
<b>Test Data for High Channel</b>										
4 960.00	48.26	Peak	H	31.60	9.90	45.30		44.46	74.00	29.54
	38.49	Average	H				1.12	34.69	54.00	19.31
	48.43	Peak	V					44.63	74.00	29.37
	38.04	Average	V				1.12	34.24	54.00	19.76

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "\*" Frequency fall in restricted band




**Tested by: Sieon Lee / Assistant Manager**

12.6.3 Spurious Radiated Emission

12.6.3.1 Test Data for 30 MHz ~ 1 GHz

Humidity Level : 48 % R.H. Temperature: 24 °C  
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247  
 Result : PASSED

EUT : DIGITAL CAR AUDIO SYSTEM Date: November 28, 2019  
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)  
 Operating mode : Transmitting mode

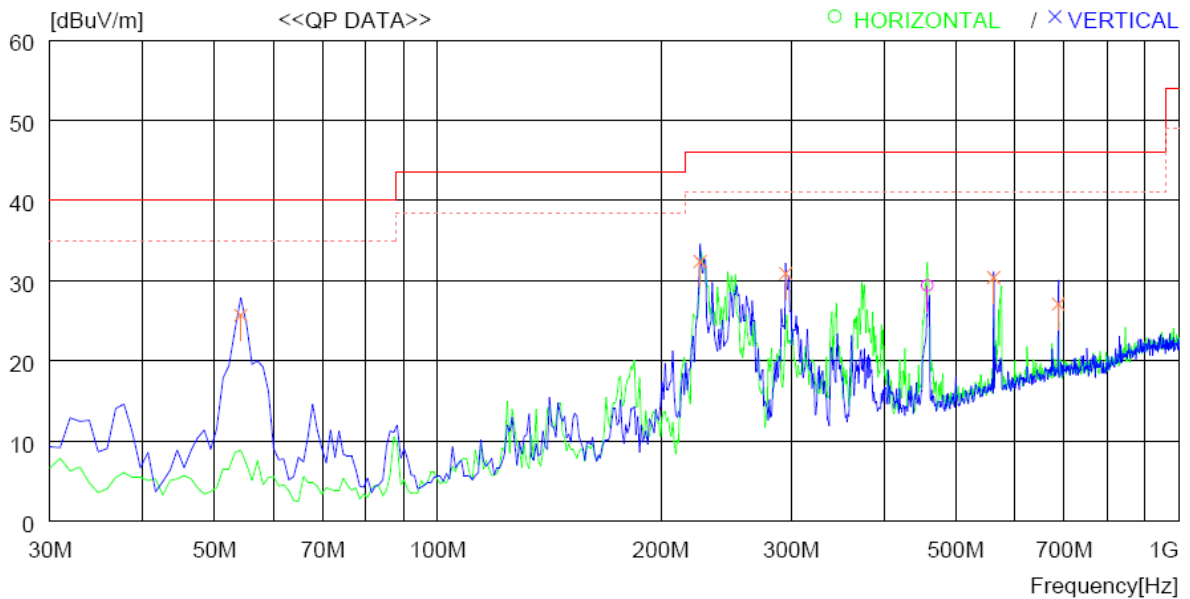

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	457.771	42.9	17.2	2.1	32.8	29.4	46.0	16.6	100	359
----- Vertical -----										
2	54.250	48.2	9.6	0.6	32.7	25.7	40.0	14.3	100	110
3	225.940	52.3	11.3	1.4	32.6	32.4	46.0	13.6	200	359
4	294.810	48.8	13.2	1.6	32.7	30.9	46.0	15.1	100	344
5	562.529	42.0	19.1	2.3	33.0	30.4	46.0	15.6	200	72
6	687.655	36.7	20.8	2.5	32.9	27.1	46.0	18.9	200	359

**Tested by: Sieon Lee / Assistant Manager**

**12.6.3.2 Test Data for Below 30 MHz**

- Test Date : November 28, 2019
- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Not sufficient to state emissions were not detected, emissions detected were 20 dB below the limit								

**12.6.3.3 Test Data for above 1 GHz**

- Test Date : November 28, 2019
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Not sufficient to state emissions were not detected, emissions detected were 20 dB below the limit								



**Tested by: Sieon Lee / Assistant Manager**