

Report Number: F690501/RF-RTL014291 Page: 92 of 120

# 6. Peak Power Spectral Density

#### 6.1. Test Setup



#### 6.2. Limit

#### According to 15.407(a)(1)(iv)

For client devices in the 5.15-5.25 @ band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dB i. In addition, the maximum power spectral density shall not exceed 11 dB m in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dB i are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

# According to 15.407(a)(2)

For the 5.25-5.35 @ and 5.47-5.725 @ bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dB m + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dB i are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB i.

#### According to 15.407(a)(3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dB m in any 500-klb band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB i. However, fixed point-to point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dB i without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



Report Number: F690501/RF-RTL014291 Page: 93 of 120

#### 6.3. Test Procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

- 1. This measurement settings are specified in section F of KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- 2. Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
- 3. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- 4. Make the following adjustments to the peak value of the spectrum, if applicable:
  - a) If Method SA-2 or SA-2 Alternative was used, add 10 log (1/x), where x is the duty cycle, to the peak of the spectrum.
  - b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
- 5. The result is the Maximum PSD over 1 Mb reference bandwidth.
- 6. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (*i.e.*, 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
  - a) Set RBW  $\geq 1/T$ , where T is defined in section II.B.1.a).
  - b) Set VBW ≥ 3 RBW.
  - c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add 10log(500 kHz/RBW) to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
  - d) If measurement bandwidth of Maximum PSD is specified in 1 Mb, add 10log(1 Mb/RBW) to the measured result, whereas RBW (< 1 Mb) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
  - e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.
- 7. In case of band crossing channels 138, 142 and 144, the measurement is complied with section Ⅲ.A of KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



Report Number: F690501/RF-RTL014291 Page: 94 of 120

# 6.4. Test Result

Ambient temperature : (23  $\pm$  1)  $^{\circ}$ C Relative humidity : 47  $^{\circ}$  R.H.

Test mode: 11a

Band	Frequency (Mb)	Ch.	Data Rate (Mbps)	Measured PPSD (dB m)	Duty Cycle Correction Factor (dB)	Final PPSD (dB m)	Limit (dB m/1 MHz)
	5 180	36		-3.77		-3.53	
U-NII 1	5 220	44		-3.47		-3.23	
	5 240	48		-4.19		-3.95	
	5 260	52		-3.46		-3.22	
U-NII 2A	5 300	60	6	-3.63	0.24	-3.39	11
	5 320	64		-4.19		-3.95	
	5 500	100		-4.19		-3.95	
U-NII 2C	5 580	116		-3.49		-3.25	
	5 720	144		-3.69		-3.45	
Band	Frequency ( <del>脈</del> )	Ch.	Data Rate (Mbps)	Measured PPSD (dB m)	Duty Cycle Correction Factor (dB)	Final PPSD (dB m)	Limit (個 m/500 ㎞)
	5 745	149		-6.62		-6.38	
U-NII 3	5 785	157	6	-6.92	0.24	-6.68	30
	5 825	165		-6.93		-6.69	

Test mode: 11ac VHT20

Band	Frequency (脈)	Ch.	Data Rate (Mbps)	Measured PPSD (dB m)	Duty Cycle Correction Factor (dB)	Final PPSD (dB m)	Limit (dB m/1 Mhz)
	5 180	36		-4.25		-4.03	
U-NII 1	5 220	44		-3.79		-3.57	
	5 240	48		-4.01		-3.79	
	5 260	52		-4.23		-4.01	
U-NII 2A	5 300	60	MCS0	-3.63	0.22	-3.41	11
	5 320	64		-4.48		-4.26	
	5 500	100		-4.49		-4.27	
U-NII 2C	5 580	116		-4.18		-3.96	
	5 720	144		-4.31		-4.09	
Band	Frequency ( <del>脈</del> )	Ch.	Data Rate (Mbps)	Measured PPSD (dB m)	Duty Cycle Correction Factor (dB)	Final PPSD (dB m)	Limit (dB m/500 kHz)
	5 745	149		-7.57	0.22	-7.35	
U-NII 3	5 785	157	MCS0	-6.83		-6.61	30
	5 825	165		-7.14		-6.92	

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



Report Number: F690501/RF-RTL014291 Page: 95 of 120

Test mode: 11ac\_VHT40

1001111040	. 11ac_vn140						
Band	Frequency (脈)	Ch.	Data Rate (Mbps)	Measured PPSD (dB m)	Duty Cycle Correction Factor (dB)	Final PPSD (dB m)	Limit (dB m/1 MHz)
U-NII 1	5 190	38		-12.41		-10.58	
O-INII I	5 230	46		-12.31		-10.48	
U-NII 2A	5 270	54		-9.42	1.83	-7.59	11
U-INII ZA	5 310	62	MCS4	-9.72		-7.89	
	5 510	102		-9.71		-7.88	
U-NII 2C	5 550	110		-9.55		-7.72	
	5 710	142		-9.80		-7.97	
Band	Frequency (Mb)	Ch.	Data Rate (Mbps)	Measured PPSD (dB m)	Duty Cycle Correction Factor (dB)	Final PPSD (dB m)	Limit (dB m/500 kHz)
U-NII 3	5 755	151	MCS4	-12.96	4.00	-11.13	20
U-INII 3	5 795	159	IVIC54	-13.21	1.83	-11.38	30

Test mode: 11ac\_VHT80

Band	Frequency (Mb)	Ch.	Data Rate (Mbps)	Measured PPSD (dB m)	Duty Cycle Correction Factor (dB)	Final PPSD (dB m)	Limit (dB m/1 MHz)
U-NII 1	5 210	42	-13.78			-12.92	
U-NII 2A	5 290	58	MCCO	-11.34	0.86	-10.48	11
U-NII 2C	5 530	106	MCS0	-12.22		-11.36	
U-INII 2C	5 690	138		-12.23		-11.37	
Band	Frequency (脈)	Ch.	Data Rate (Mbps)	Measured PPSD (dB m)	Duty Cycle Correction Factor (dB)	Final PPSD (dB m)	Limit (個 m/500 뭾)
U-NII 3	5 775	155	MCS0	-12.80	0.86	-11.94	30

#### Remark;

1. Final PPSD (dB m) = Measured PPSD (dB m) + Duty Cycle Correction Factor (dB)

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



Report Number: F690501/RF-RTL014291 Page: 96 of 120

# **Band-crossing channels**

Mode	Band	Frequency (Mb)	Ch.	Data Rate (Mbps)	Measured PPSD (dB m)	Duty Cycle Correction Factor (dB)	Final PPSD (dB m)	Limit (dB m/1 MHz or dB m/500 kHz)
11a	U-NII 2C	5 720	144	6	-4.04	0.24	-3.80	11
Ha	U-NII 3	5 720	144	6	-9.34	0.24	-9.10	30
11ac_VHT20	U-NII 2C	5 720	144	MCS0	-4.22	0.22	-4.00	11
	U-NII 3	5 720	144		-9.51		-9.29	30
11ac VHT40	U-NII 2C	5 710	142	MCS4	-9.78	1.83	-7.95	11
TTAC_VHT40	U-NII 3	5 710	142	IVIC54	-14.79	1.03	-12.96	30
11ac_VHT80	U-NII 2C	5 690	138	MCS0	-12.54	0.86	-11.68	11
	U-NII 3	5 690	138	IVICSU	-17.57		-16.71	30

# Remark;

1. Final PPSD (dB m) = Measured PPSD (dB m) + Duty Cycle Correction Factor (dB)




Report Number: F690501/RF-RTL014291 Page: 97 of 120

#### - Test plots

# 802.11a (Band 1)

Low Channel (5 180 Mb)

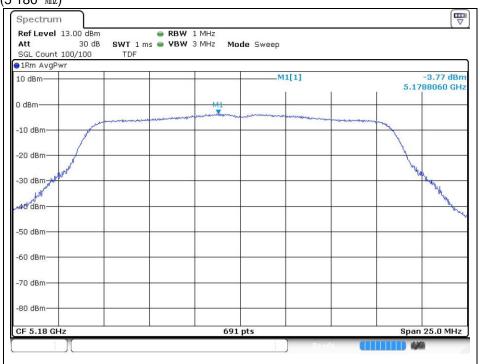

### Middle Channel (5 220 Mb)




The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 98 of 120

# High Channel (5 240 Mz)

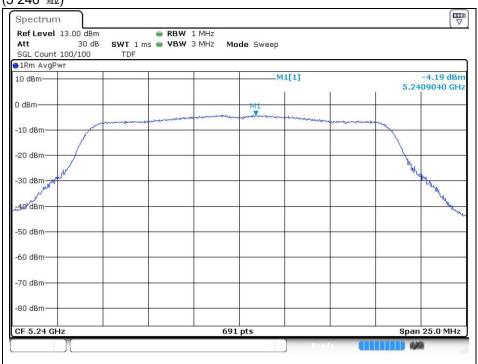

#### 802.11a (Band 2A)

Low Channel (5 260 Mb)

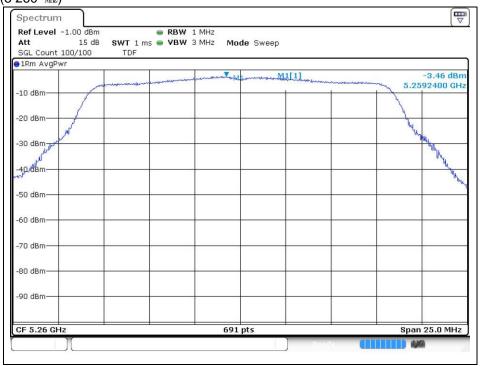

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 99 of 120

#### Middle Channel (5 300 Mb)



# High Channel (5 320 账)

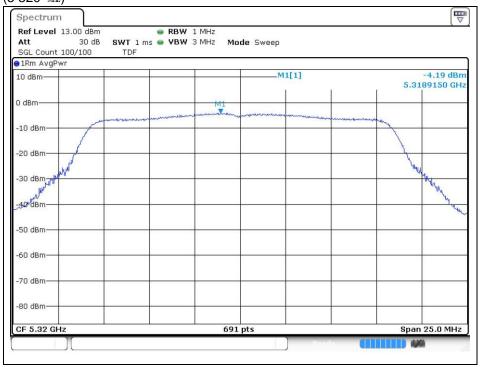


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 100 of 120

#### 802.11a (Band 2C)

Low Channel (5 500 账)

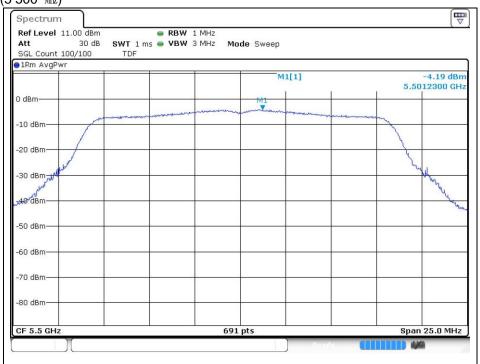

# Middle Channel (5 580 Mb)

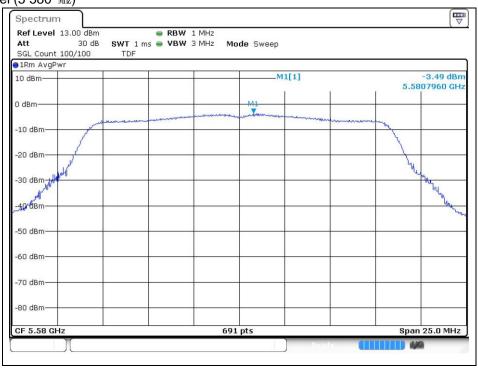


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 101 of 120

# High Channel (5 720 眦)

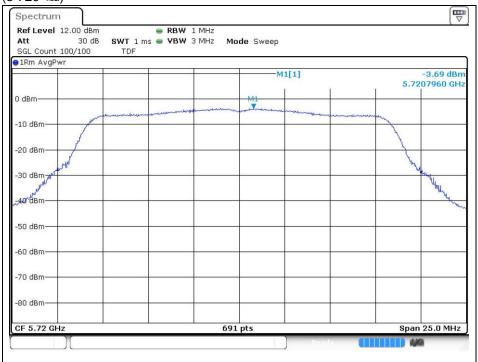

#### 802.11a (Band 3)

Low Channel (5 745 Mb)

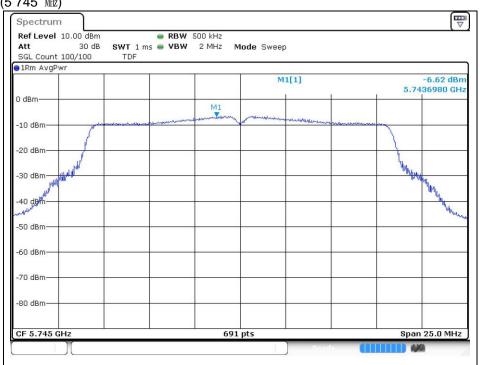


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 102 of 120

#### Middle Channel (5 785 Mb)

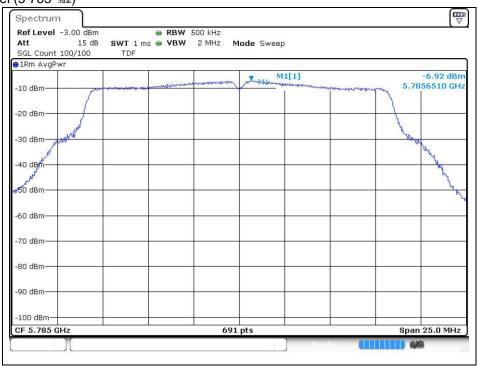

# High Channel (5 825 账)

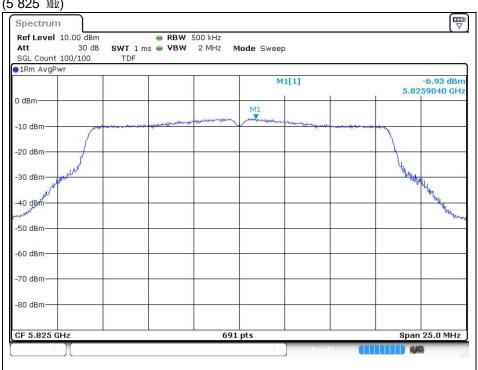


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 103 of 120

# 802.11ac\_VHT20 (Band 1)

Low Channel (5 180 Mb)

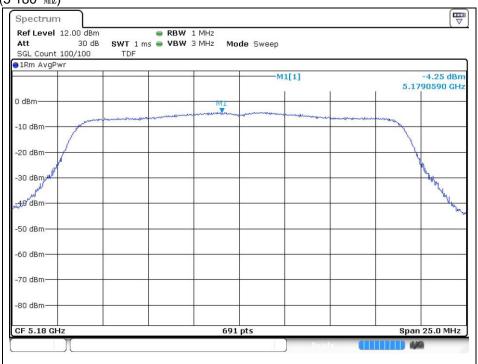

# Middle Channel (5 220 Mb)

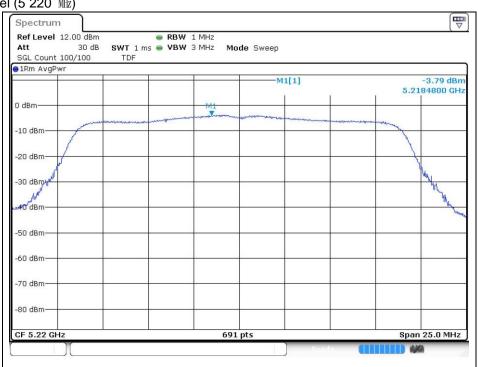


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 104 of 120

# High Channel (5 240 Mz)

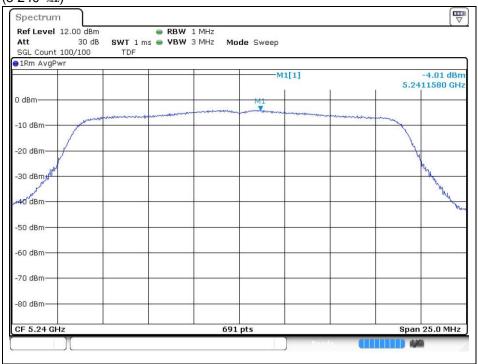

# 802.11ac\_VHT20 (Band 2A)

Low Channel (5 260 Mb)

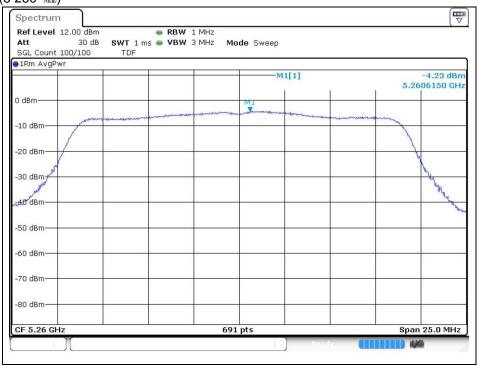


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 105 of 120

#### Middle Channel (5 300 Mb)

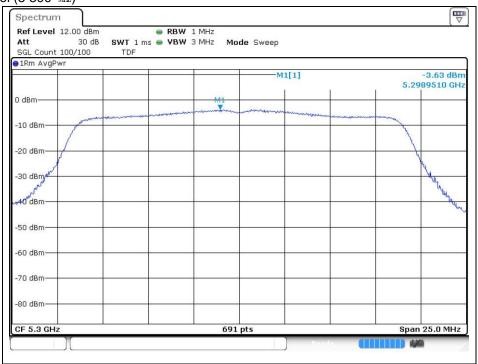

# High Channel (5 320 账)

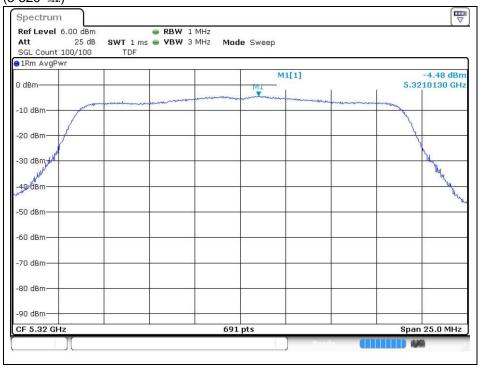


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 106 of 120

# 802.11ac\_VHT20 (Band 2C)

Low Channel (5 500 Mb)

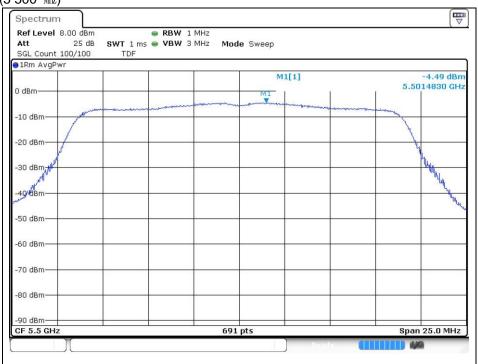

# Middle Channel (5 580 Mb)

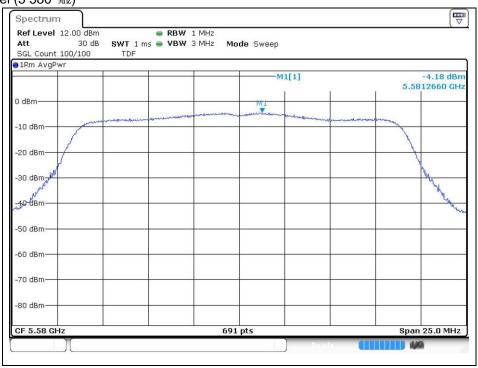


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 107 of 120

#### High Channel (5 720 №)

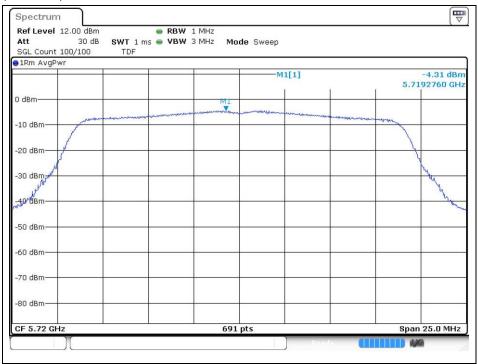

# 802.11ac\_VHT20 (Band 3)

Low Channel (5 745 Mb)

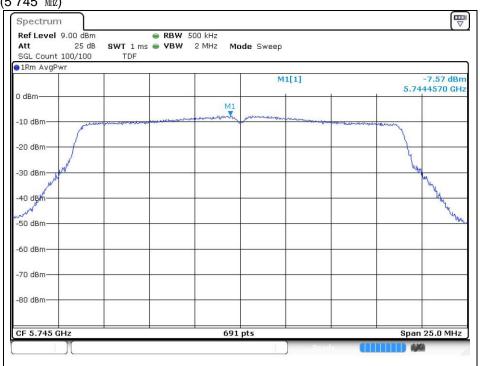

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 108 of 120

#### Middle Channel (5 785 Mb)



# High Channel (5 825 账)

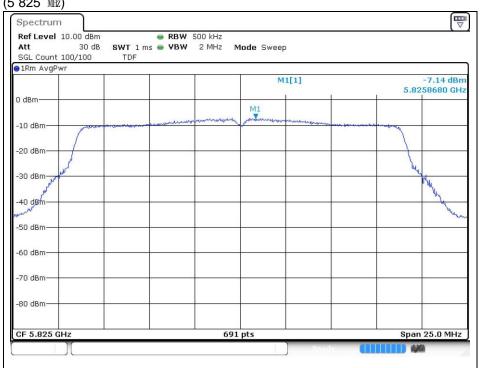


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 109 of 120

# 802.11ac\_VHT40 (Band 1)

Low Channel (5 190 账)

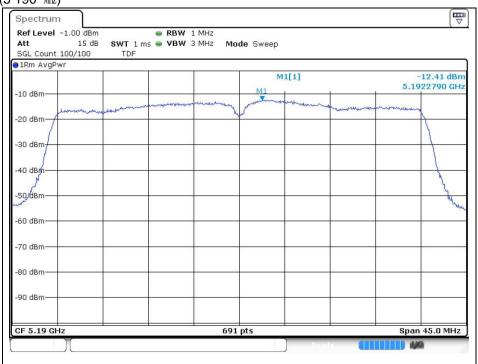

# High Channel (5 230 眦)

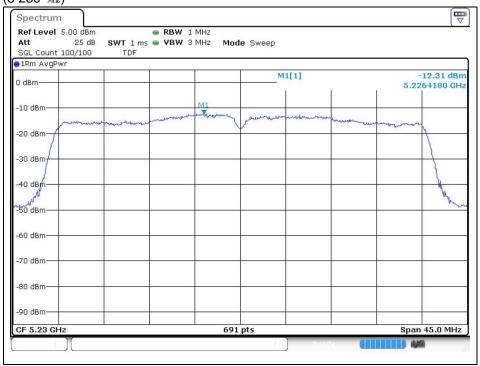


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 110 of 120

# 802.11ac\_VHT40 (Band 2A)

Low Channel (5 270 Mb)

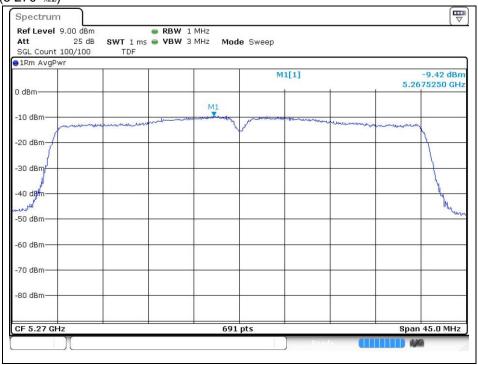

# High Channel (5 310 眦)

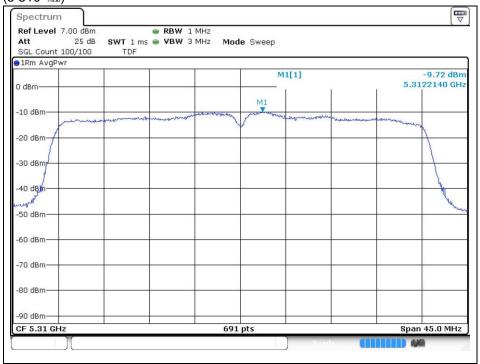


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 111 of 120

# 802.11ac\_VHT40 (Band 2C)

Low Channel (5 510 Mb)

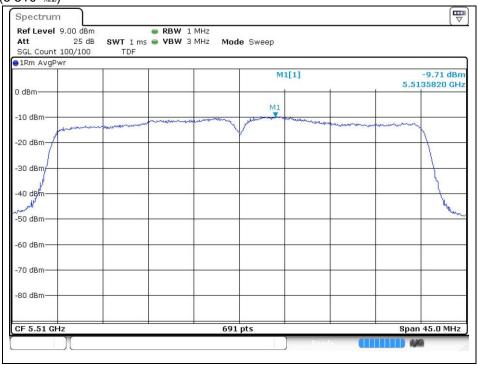

# Middle Channel (5 550 Mb)

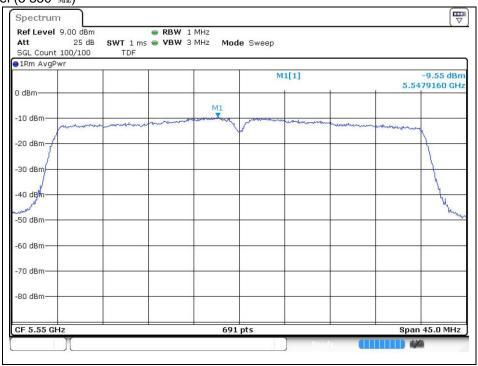


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 112 of 120

# High Channel (5 710 Mb)

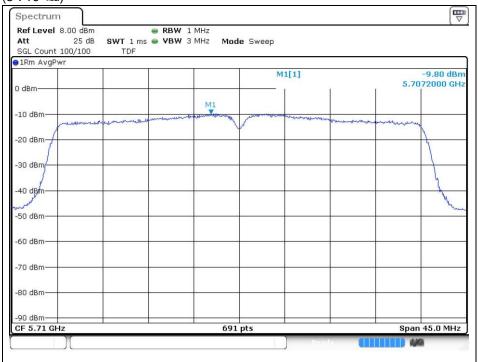

# 802.11ac\_VHT40 (Band 3)

Low Channel (5 755 账)

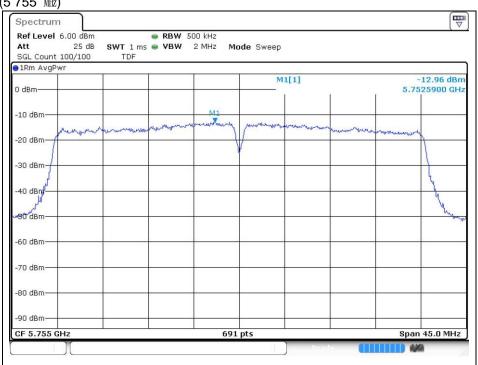


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 113 of 120

# High Channel (5 795 Mb)

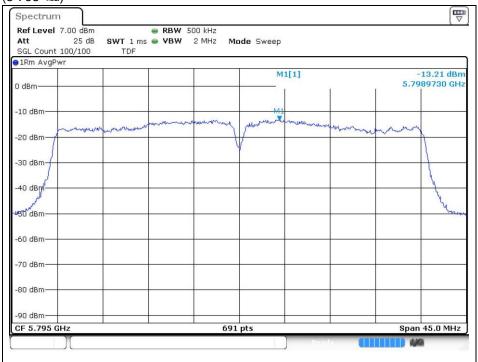

# 802.11ac\_VHT80 (Band 1)

Middle Channel (5 210 Mb)

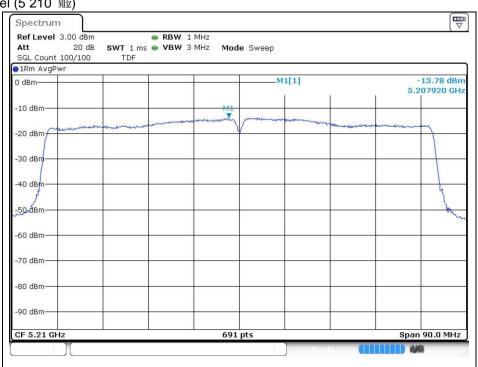


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



Report Number: F690501/RF-RTL014291 Page: 114 of 120


# 802.11ac\_VHT80 (Band 2A)

Middle Channel (5 290 Mb)

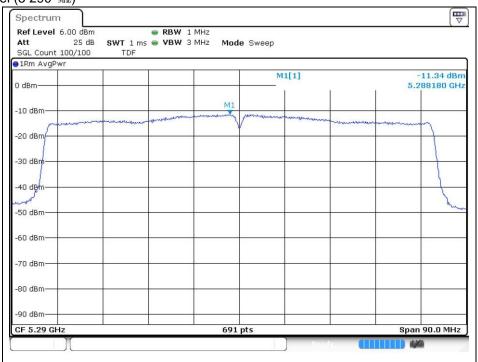

# 802.11ac\_VHT80 (Band 2C)

Low Channel (5 530 Mb)

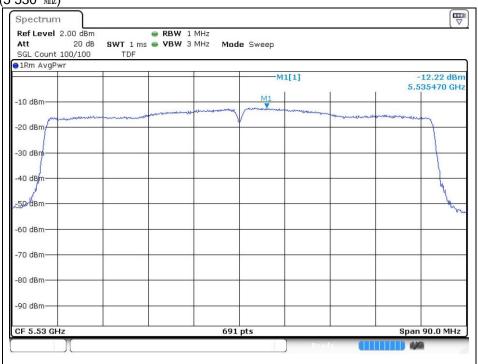


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



Report Number: F690501/RF-RTL014291 Page: 115 of 120


# 802.11ac\_VHT80 (Band 2C)

High Channel (5 690 Mb)

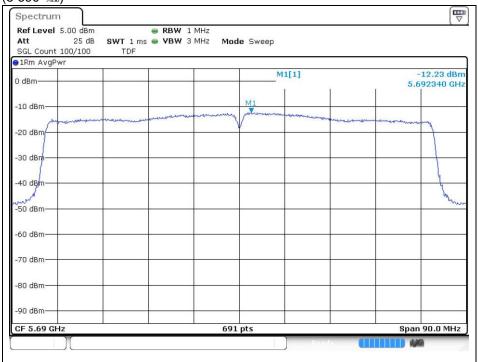

# 802.11ac\_VHT80 (Band 3)

Middle Channel (5 775 Mb)

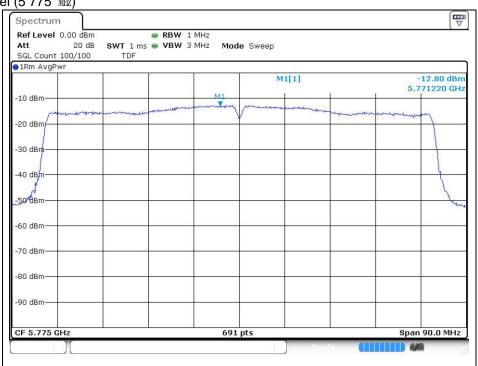


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 116 of 120

#### **Band-crossing channels**

U-NII 2C 11a (5 720 账)

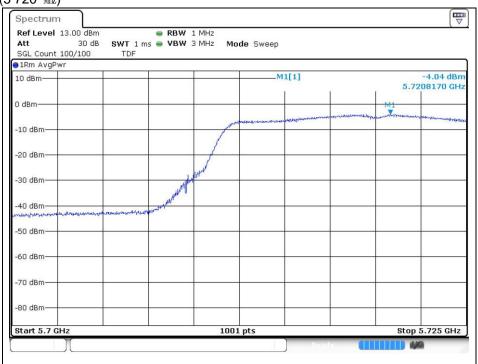

# U-NII 3 11a (5 720 Mb)

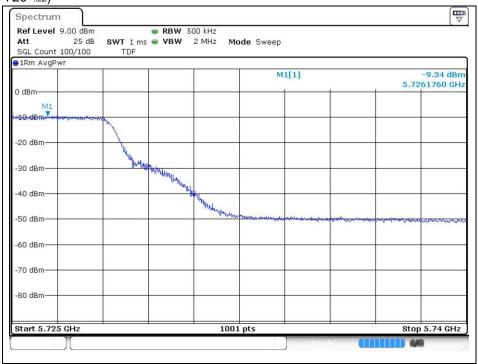


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 117 of 120

# U-NII 2C 11ac\_VHT20 (5 720 Nb)

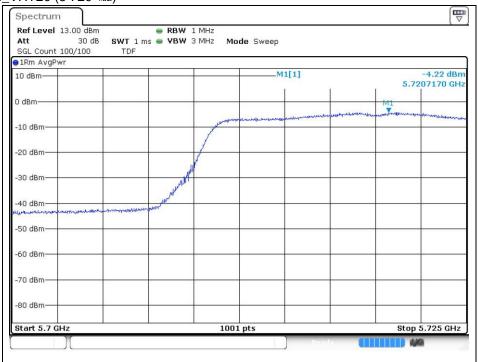

# U-NII 3 11ac\_VHT20 (5 720 账)

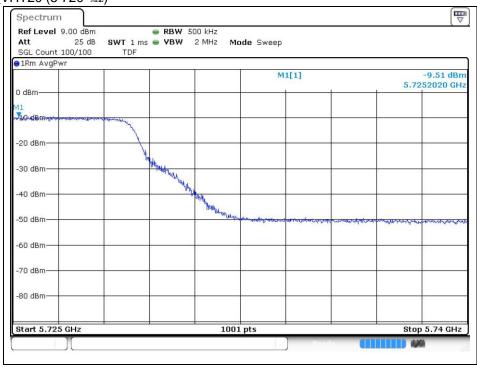


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 118 of 120

# U-NII 2C 11ac\_VHT40 (5 710 Nb)

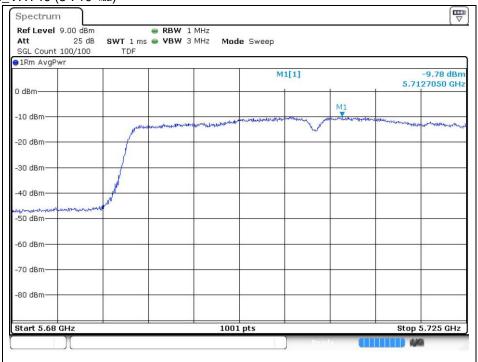

# U-NII 3 11ac\_VHT40 (5 710 Mb)

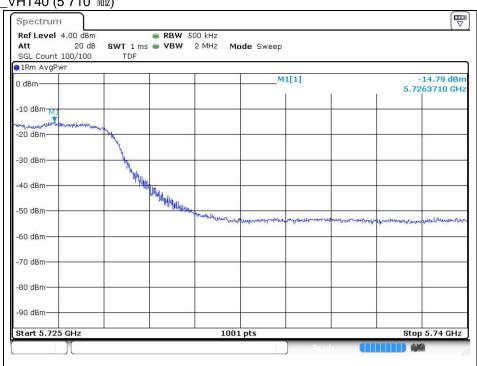


The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.




Report Number: F690501/RF-RTL014291 Page: 119 of 120

# U-NII 2C 11ac\_VHT80 (5 690 Nb)

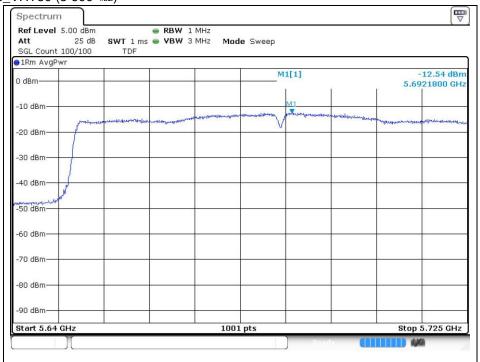

# U-NII 3 11ac\_VHT80 (5 690 账)

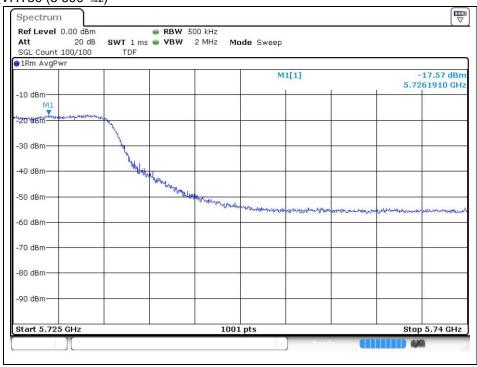

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



Report Number: F690501/RF-RTL014291 Page: 120 of 120

# 7. Antenna Requirement

# 7.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.407(a) if transmitting antennas of directional gain greater than 6 dB i are used, the power shall be reduced by the amount in dB that the gain of the antenna exceeds 6 dB i.

# 7.2. Antenna Connected Construction

Antenna used in this product is Pattern antenna and peak max gain of antenna as below.

Band	5 150 Mb ~ 5 250 Mb	5 250 № ~ 5 350 №	5 470 № ~ 5 725 №	5 725 MHz ~ 5 850 MHz				
Mode	11a/n_HT20, HT40, 11ac_VHT20, VHT40, VHT80							
Gain	-0.61 dBi	-0.18 dBi	-0.77 dBi	-0.18 dBi				

# - End of the Test Report -