

# TEST REPORT

of

FCC CFR 47 part 1, 1.1307(b), 1.1310


FCC ID: TQ8-ADC40GWAN

1. Equipment Under Test : DISPLAY CAR SYSTEM
2. Model Name : ADC40GWAN
3. Variant Model Name(s) : -
4. Applicant : Hyundai Mobis Co., Ltd.
5. Manufacturer : Hyundai Mobis Co., Ltd.
6. Date of Receipt : 2020.03.26
7. Date of Test(s) : 2020.04.02 ~ 2020.06.26
8. Date of Issue : 2020.06.26

In the configuration tested, the EUT complied with the standards specified above. This test report does not assure KOLAS accreditation.

- 1) The results of this test report are effective only to the items tested.
- 2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.

**Tested by:**

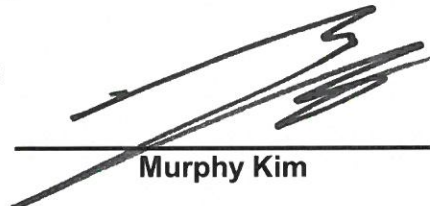

Murphy Kim

**Technical  
Manager:**



Jungmin Yang

**SGS Korea Co., Ltd. Gunpo Laboratory**



**SGS Korea Co., Ltd.**

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

<http://www.sgsgroup.kr>

Report Number: F690501-RF-RTL000838

Page: 2 of 8

---

# INDEX

<u>Table of Contents</u>	Page
1. General Information -----	3
2. RF Exposure Evaluation -----	5



**SGS Korea Co., Ltd.**

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807  
Tel. +82 31 428 5700 / Fax. +82 31 427 2370  
<http://www.sgsgroup.kr>

Report Number: F690501-RF-RTL000838

Page: 3 of 8

---

## 1. General Information

### 1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Telephone : +82 31 688 0901

FAX : +82 31 688 0921

### 1.2. Details of Applicant

Applicant : Hyundai Mobis Co., Ltd.

Address : 203, Teheran-ro, Gangnam-gu, Seoul, South Korea, 135-977

Contact Person : Choe, Seung-hoon

Phone No. : +82 31 260 0098

### 1.3. Details of Manufacturer

Company : Same as applicant

Address : Same as applicant

### 1.4. Description of EUT

<b>Kind of Product</b>	DIGITAL CAR SYSTEM
<b>Model Name</b>	ADC40GWAN
<b>Power Supply</b>	DC 14.4 V
<b>Frequency Range</b>	2 402 MHz ~ 2 480 MHz (Bluetooth) 2 412 MHz ~ 2 462 MHz (11b/g/n_HT20) 5 180 MHz ~ 5 240 MHz (Band 1: 11a/n_HT20, 11ac_VHT20) 5 190 MHz ~ 5 230 MHz (Band 1: 11n_HT40, 11ac_VHT40) 5 210 MHz (Band 1: 11ac_VHT80) 5 260 MHz ~ 5 320 MHz (Band 2A: 11a/n_HT20, 11ac_VHT20) 5 270 MHz ~ 5 310 MHz (Band 2A: 11n_HT40, 11ac_VHT40) 5 290 MHz (Band 2A: 11ac_VHT80) 5 500 MHz ~ 5 720 MHz (Band 2C: 11a/n_HT20, 11ac_VHT20) 5 510 MHz ~ 5 710 MHz (Band 2C: 11n_HT40, 11ac_VHT40) 5 530 MHz ~ 5 690 MHz (Band 2C: 11ac_VHT80) 5 745 MHz ~ 5 825 MHz (Band 3: 11a/n_HT20, 11ac_VHT20) 5 755 MHz ~ 5 795 MHz (Band 3: 11n_HT40, 11ac_VHT40) 5 775 MHz (Band 3: 11ac_VHT80)
<b>Modulation Technique</b>	DSSS, OFDM, GFSK, $\pi/4$ DQPSK, 8DPSK
<b>Number of Channels</b>	79 channels (Bluetooth) 11 channels (11b/g/n_HT20) 4 channels (Band 1: 11a/n_HT20, 11ac_VHT20) 2 channels (Band 1: 11n_HT40, 11ac_VHT40) 1 channel (Band 1: 11ac_VHT80) 4 channels (Band 2A: 11a/n_HT20, 11ac_VHT20) 2 channels (Band 2A: 11n_HT40, 11ac_VHT40) 1 channel (Band 2A: 11ac_VHT80) 9 channels (Band 2C: 11a/n_HT20, 11ac_VHT20) 4 channels (Band 2C: 11n_HT40, 11ac_VHT40) 2 channels (Band 2C: 11ac_VHT80) 5 channels (Band 3: 11a/n_HT20, 11ac_VHT20) 2 channels (Band 3: 11n_HT40, 11ac_VHT40) 1 channel (Band 3: 11ac_VHT80)
<b>Antenna Type</b>	Pattern antenna
<b>Antenna Gain</b>	2 400 MHz ~ 2 483.5 MHz: -0.18 dB i (Bluetooth) 2 400 MHz ~ 2 483.5 MHz: -0.01 dB i (WLAN 2.4 G) 5 150 MHz ~ 5 250 MHz: -0.61 dB i (WLAN 5 G) 5 250 MHz ~ 5 350 MHz: -0.18 dB i (WLAN 5 G) 5 470 MHz ~ 5 725 MHz: -0.77 dB i (WLAN 5 G) 5 725 MHz ~ 5 850 MHz: -0.18 dB i (WLAN 5 G)

### 1.5. Test Report Revision

Revision	Report Number	Date of Issue	Description
0	F690501-RF-RTL000838	2020.06.26	Initial

## 2. RF Exposure Evaluation

### 2.1. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

#### LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f <sup>2</sup>	6
30-300	61.4	0.163	1.0	6
300-1 500	-	-	f/300	6
1 500-100 000	-	-	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f <sup>2</sup>	30
30-300	27.5	0.073	0.2	30
<b><u>300-1 500</u></b>	<b>=</b>	<b>=</b>	<b><u>f/1500</u></b>	<b><u>30</u></b>
<b><u>1 500-100 000</u></b>	<b>-</b>	<b>-</b>	<b><u>1.0</u></b>	<b><u>30</u></b>

#### 2.1.1. Friis transmission formula: $P_d = (P_{out} \cdot G) / (4 \cdot \pi \cdot R^2)$

Where  $P_d$  = power density in mW/cm<sup>2</sup>

$P_{out}$  = output power to antenna in mW

G = gain of antenna in linear scale

$\pi$  = 3.1416

R = distance between observation point and center of the radiator in cm

$P_d$  the limit of MPE, 1 mW/cm<sup>2</sup>. If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

### 2.1.2. Test Result of RF Exposure Evaluation

Test Item : RF Exposure Evaluation Data  
 Test Mode : Normal Operation

### 2.1.3. Test information of Cable Loss and Antenna Gain

Test Item	Frequency (MHz)	Cable Loss (dB)	Antenna Gain (dB i)	Final Antenna Gain (dB i)
CDMA - BC0	824 ~ 849	-1.71	-0.16	-1.87
CDMA - BC1	1 850 ~ 1 910	-3.30	4.80	1.50
LTE - Band 2	1 850 ~ 1 910	-3.30	4.80	1.50
LTE - Band 4	1 710 ~ 1 755	-3.30	2.93	-0.37
LTE - Band 5	824 ~ 849	-1.71	-0.16	-1.87
LTE - Band 13	777 ~ 787	-1.71	0.67	-1.04

**Note;**

- Final Antenna Gain (dB i) = Cable Loss (dB) + Antenna Gain (dB i)

**2.1.3. Output Power into Antenna & RF Exposure Evaluation Distance**

**Bluetooth**

**- Maximum tune up tolerance**

Frequency (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm <sup>2</sup> )	Limits (mW/cm <sup>2</sup> )
2 400 ~ 2 483.5	3	-0.18	0.000 381	1

**WLAN (2.4G)**

**- Maximum tune up tolerance**

Frequency (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm <sup>2</sup> )	Limits (mW/cm <sup>2</sup> )
2 400 ~ 2 483.5	11	-0.01	0.002 499	1

**WLAN (5G)**

**- Maximum tune up tolerance**

Frequency (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm <sup>2</sup> )	Limits (mW/cm <sup>2</sup> )
5 150 ~ 5 250	8	-0.61	0.001 091	1
5 250 ~ 5 350	8	-0.18	0.001 204	1
5 470 ~ 5 725	8	-0.77	0.001 051	1
5 725 ~ 5 850	8	-0.18	0.001 204	1

**CDMA - BC0**

**- Maximum tune up tolerance**

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Final Antenna Gain (dB i)	Power Density at 20 cm (mW/cm <sup>2</sup> )	Limits (mW/cm <sup>2</sup> )
824 ~ 849	25.7	-1.87	0.048 054	0.55

**CDMA - BC1**

**- Maximum tune up tolerance**

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Final Antenna Gain (dB i)	Power Density at 20 cm (mW/cm <sup>2</sup> )	Limits (mW/cm <sup>2</sup> )
1 850 ~ 1 910	25.7	1.50	0.104 407	1

**LTE - Band 2**

**- Maximum tune up tolerance**

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Final Antenna Gain (dB i)	Power Density at 20 cm (mW/cm <sup>2</sup> )	Limits (mW/cm <sup>2</sup> )
1 850 ~ 1 910	25.7	1.50	0.104 407	1

**LTE - Band 4**

**- Maximum tune up tolerance**

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Final Antenna Gain (dB i)	Power Density at 20 cm (mW/cm <sup>2</sup> )	Limits (mW/cm <sup>2</sup> )
1 710 ~ 1 755	25.7	-0.37	0.067 878	1

**LTE - Band 5**

**- Maximum tune up tolerance**

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Final Antenna Gain (dB i)	Power Density at 20 cm (mW/cm <sup>2</sup> )	Limits (mW/cm <sup>2</sup> )
824 ~ 849	25.7	1.87	0.113 692	0.55

**LTE - Band 13**

**- Maximum tune up tolerance**

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Final Antenna Gain (dB i)	Power Density at 20 cm (mW/cm <sup>2</sup> )	Limits (mW/cm <sup>2</sup> )
777 ~ 787	25.7	-1.04	0.058 174	0.52

**Note;**

- The power density Pd (5th column) at a distance of 20 cm calculated from the friis transmission formula is far below the limit of 1 mW/cm<sup>2</sup>.
- This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.
- This equipment should be installed and operated with minimum 20 cm between the radiator and your body.
- The antenna gain of this transmitter is less than 6 dBi and must not be collocated or operating in conjunction with any other antenna or transmitter unless authorized to do so by the FCC.
- According to KDB 447498 D01 RF Exposure Guidance 4.1.

**Simultaneous transmission of RF Exposure test exclusion for worst case configuration.**

Bluetooth: the ratio is 0.000 381 / 1  
 WLAN: the ratio is 0.002 499 / 1  
 WWLAN: the ratio is 0.113 692 / 0.55

Confirm the sum result of individual MPEs ratio is ≤ 1.0;  
 Bluetooth + WLAN + WWLAN: (0.000 381 / 1) + (0.002 499 / 1) + (0.113 692 / 0.55) = 0.209 593 ≤ 1.0

**- End of the Test Report -**