



Test Plots (GFSK)
Dwell Time (CH.78)

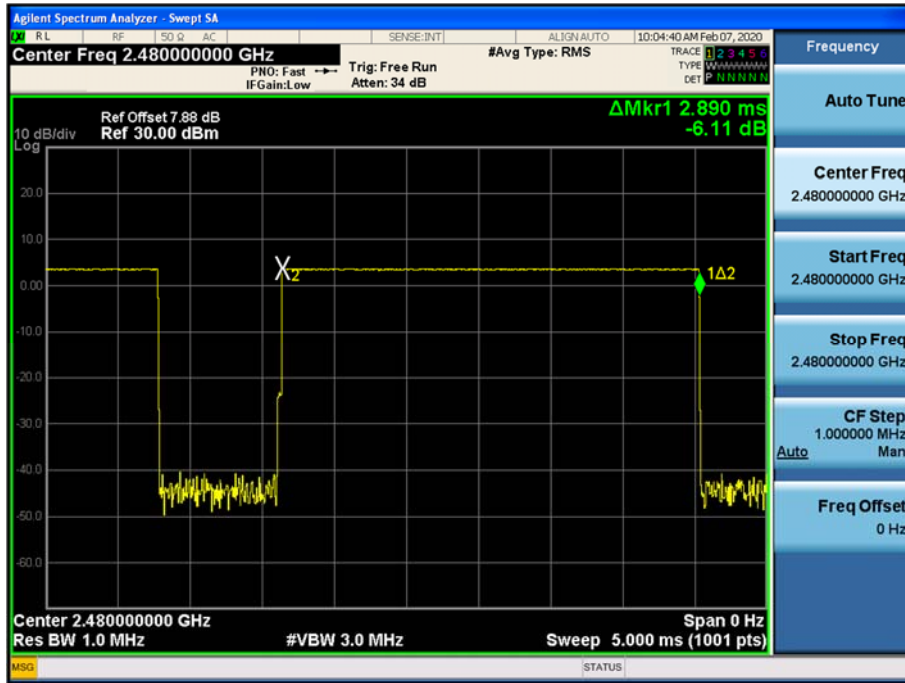


Test Plots (8DPSK)
Dwell Time (CH.0)

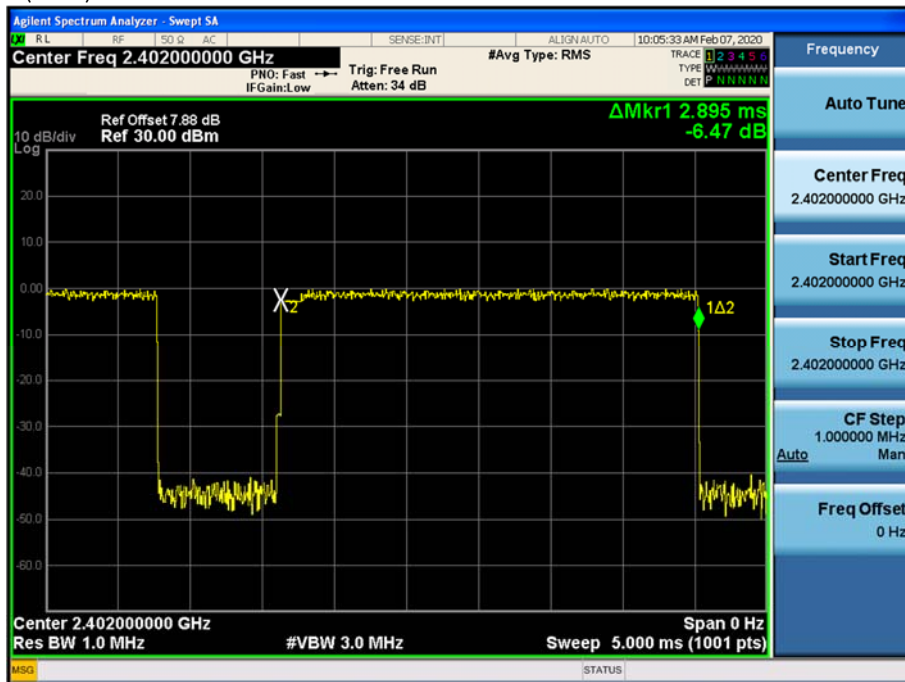


Test Plots (8DPSK)

Dwell Time (CH.39)

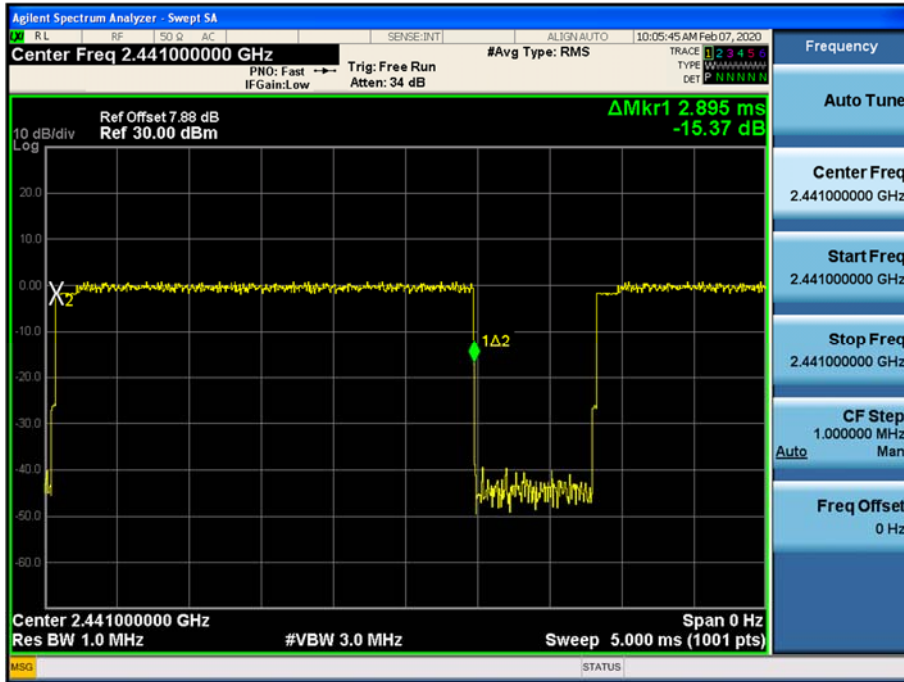


Test Plots (8DPSK)

Dwell Time (CH.78)

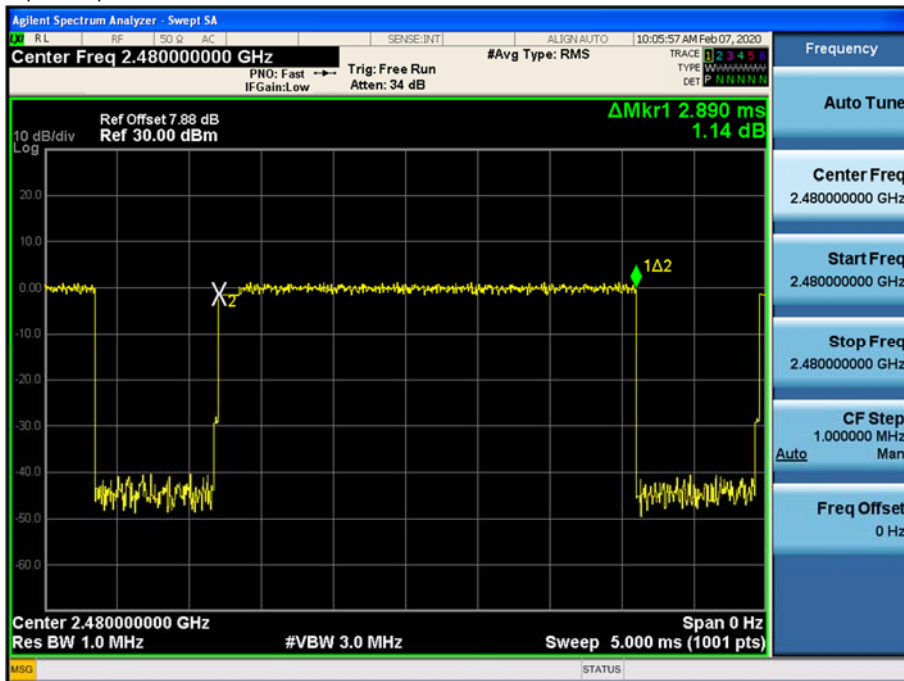


Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.0)

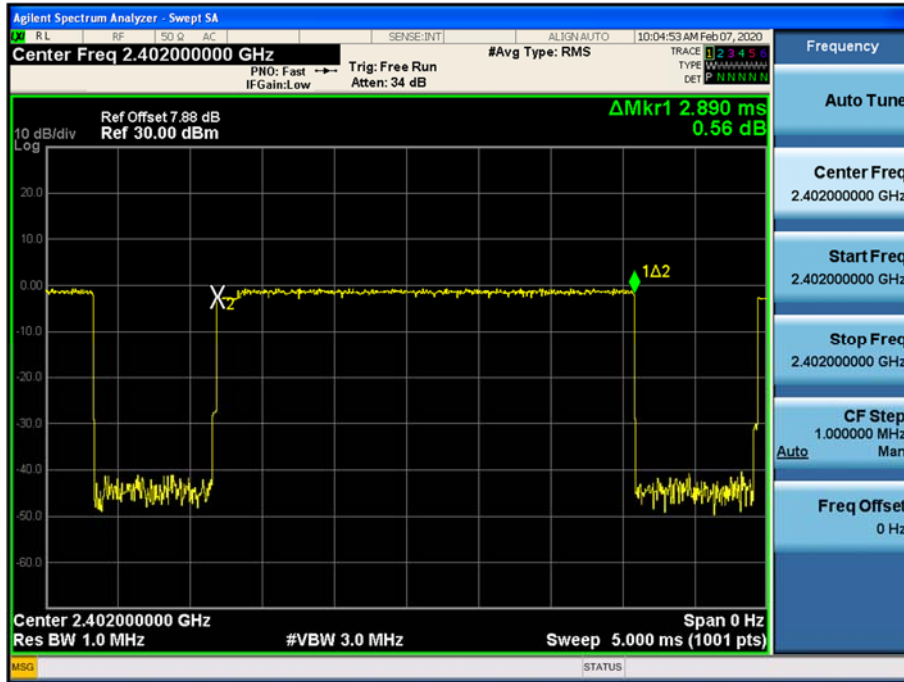

 Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.39)

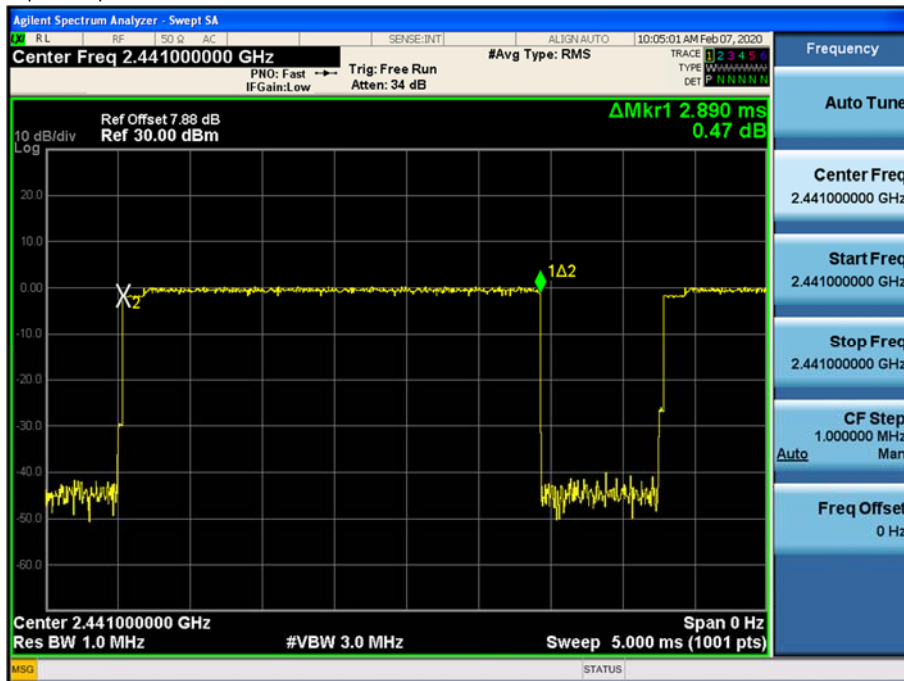

Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.78)

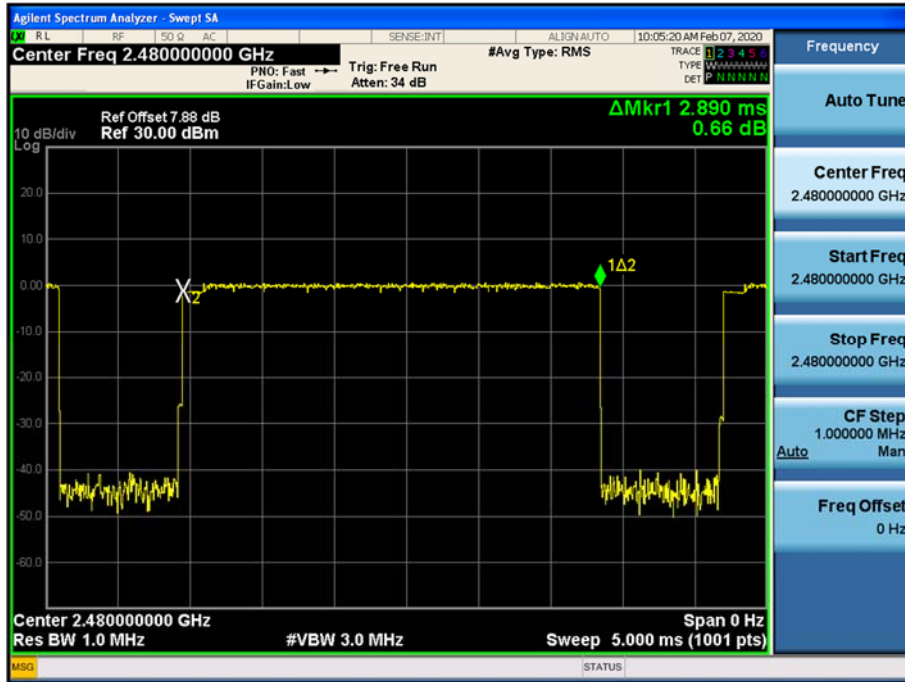

10.6 SPURIOUS EMISSIONS


10.6.1 CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.


Test Plots (GFSK)- 30 MHz - 1 GHz

Spurious Emission (CH.39)

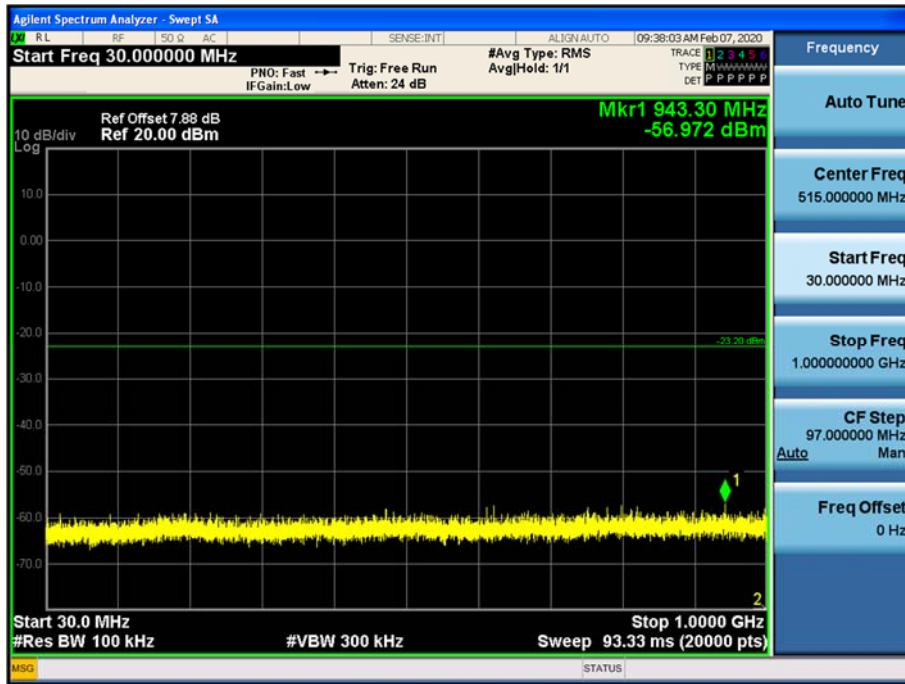


Test Plots (GFSK)- 1 GHz – 3 GHz

Spurious Emission (CH.39)

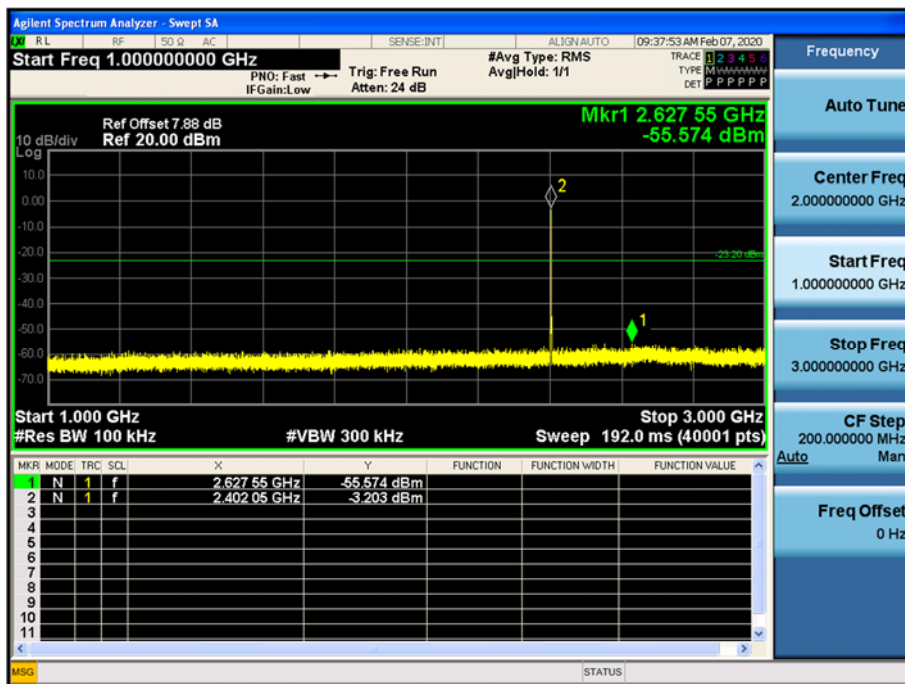


Test Plots(GFSK)- 3 GHz - 5 GHz

Spurious Emission (CH.39)

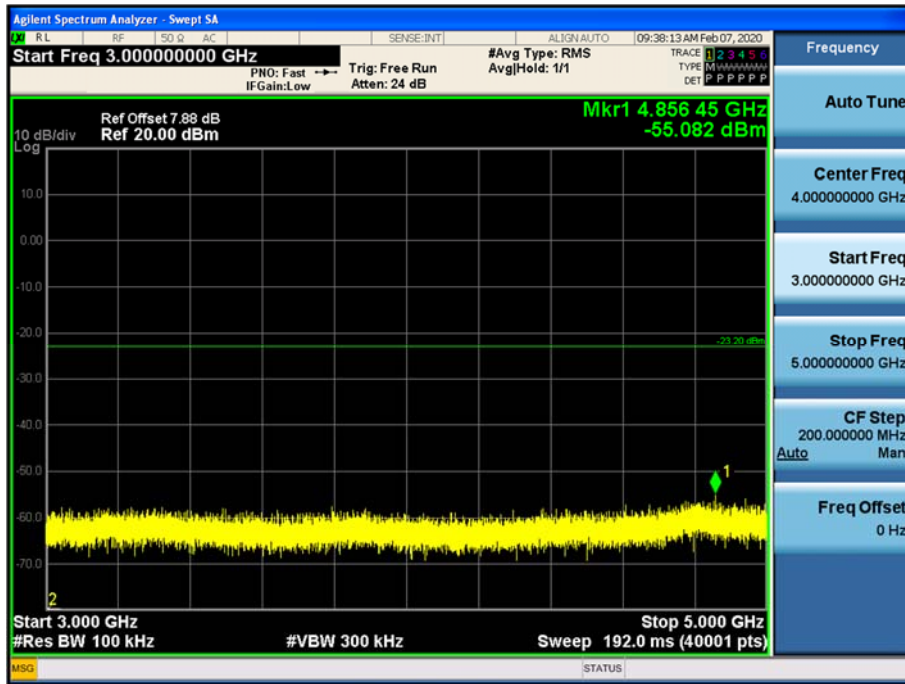


Test Plots (GFSK)- 5 GHz - 7 GHz

Spurious Emission (CH.39)

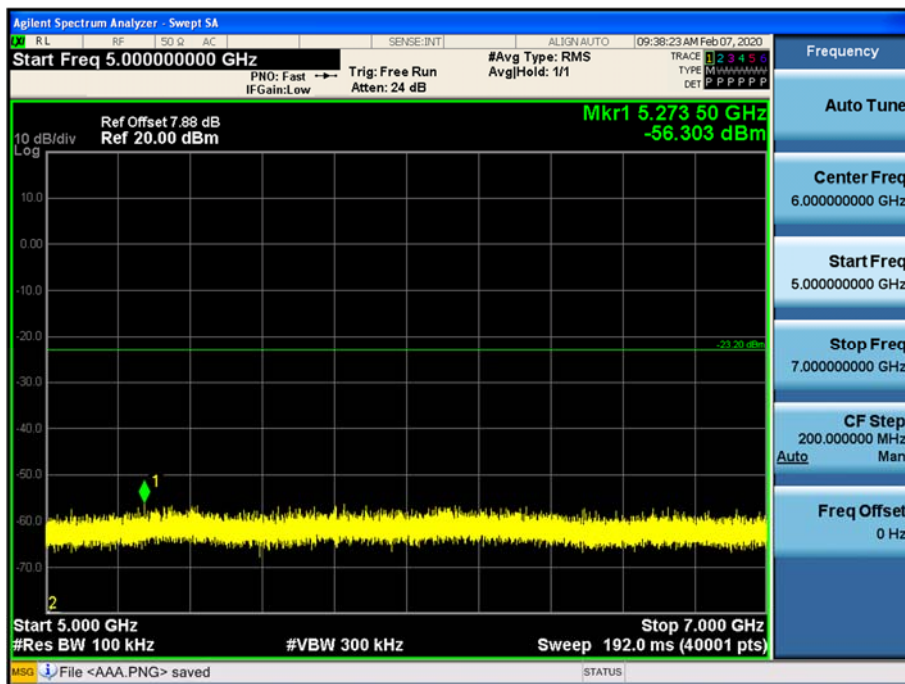


Test Plots(GFSK)- 7 GHz - 9 GHz

Spurious Emission (CH.39)

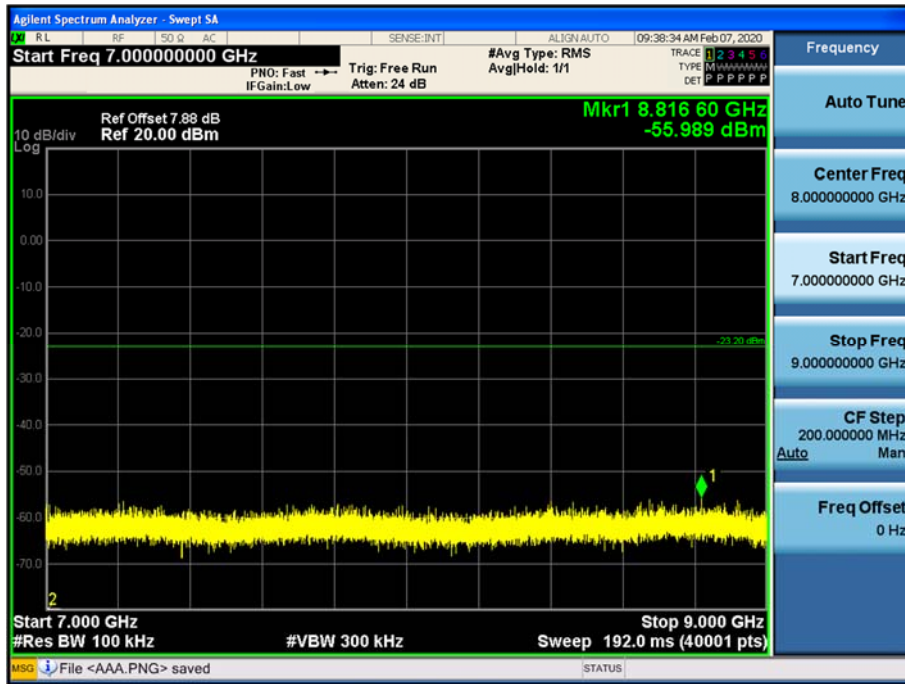


Test Plots(GFSK)- 9 GHz - 11 GHz

Spurious Emission (CH.39)

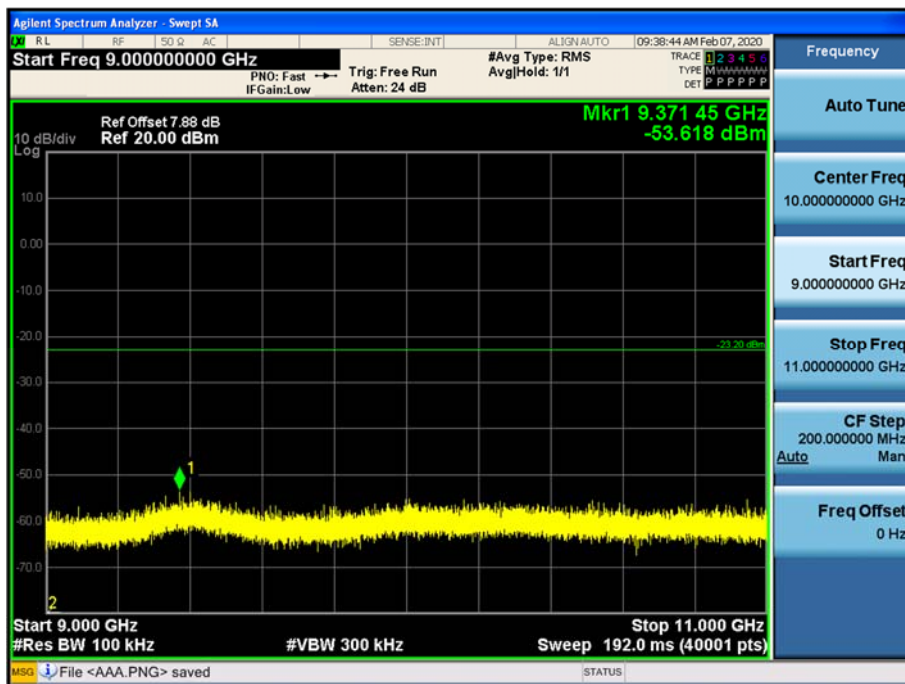


Test Plots(GFSK) 11 GHz - 13 GHz

Spurious Emission (CH.39)

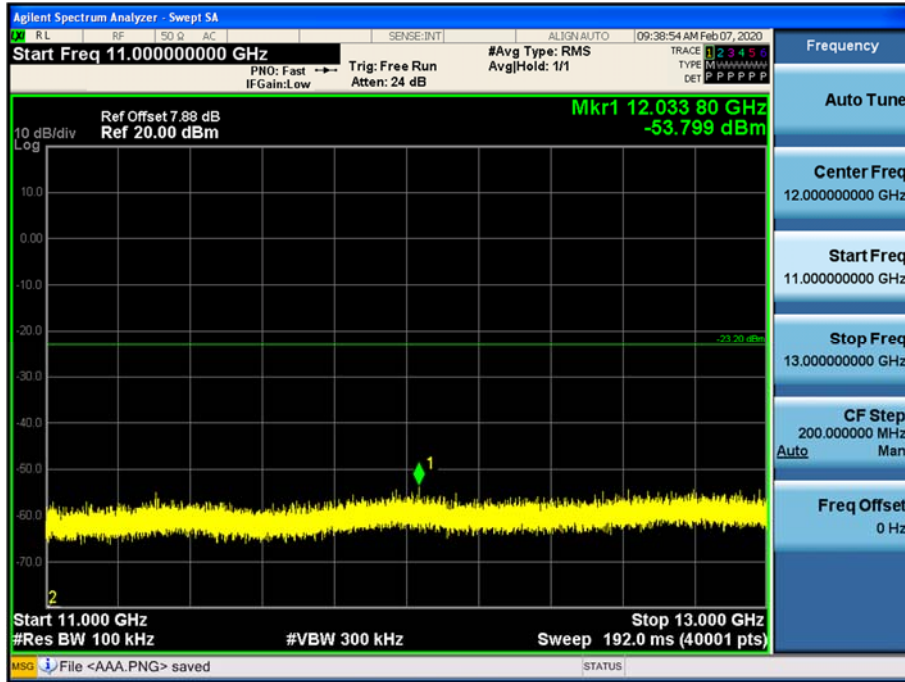


Test Plots (GFSK)- 13 GHz – 15 GHz

Spurious Emission (CH.39)

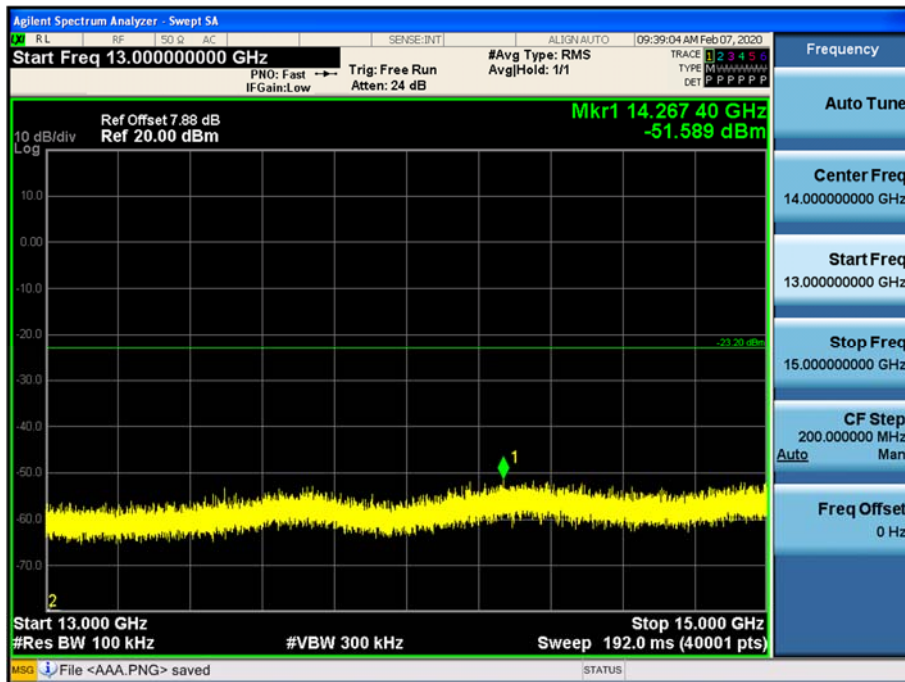


Test Plots(GFSK)- 15 GHz - 17 GHz

Spurious Emission (CH.39)

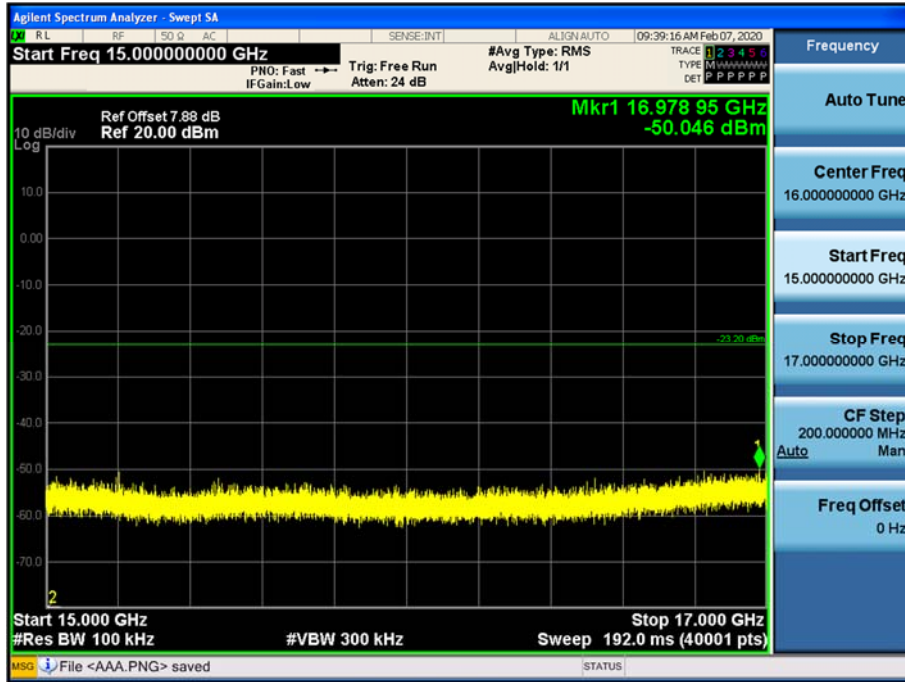


Test Plots(GFSK)- 17 GHz - 19 GHz

Spurious Emission (CH.39)

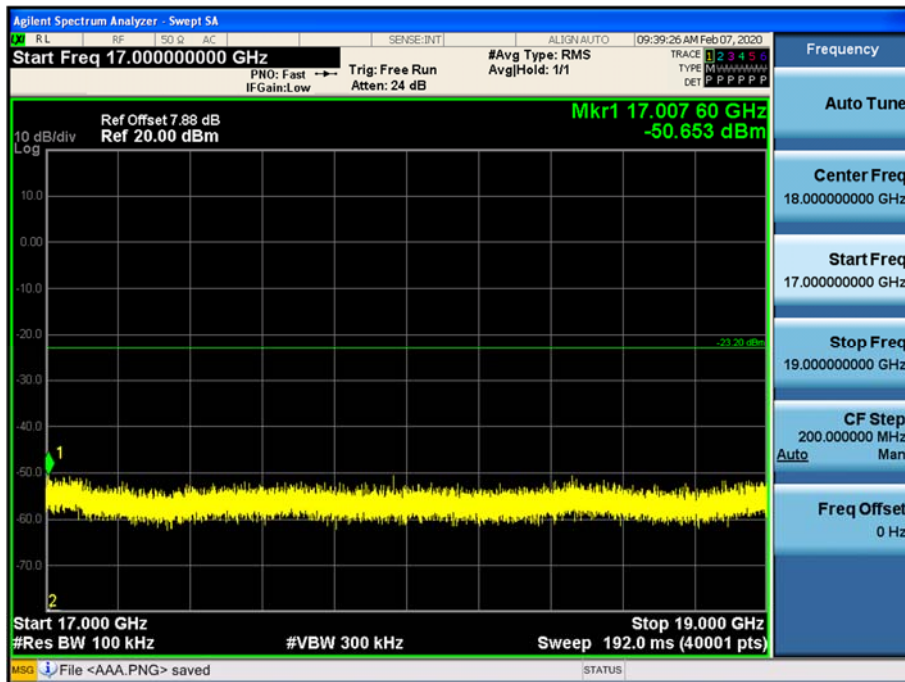


Test Plots (GFSK)- 19 GHz - 21 GHz

Spurious Emission (CH.39)

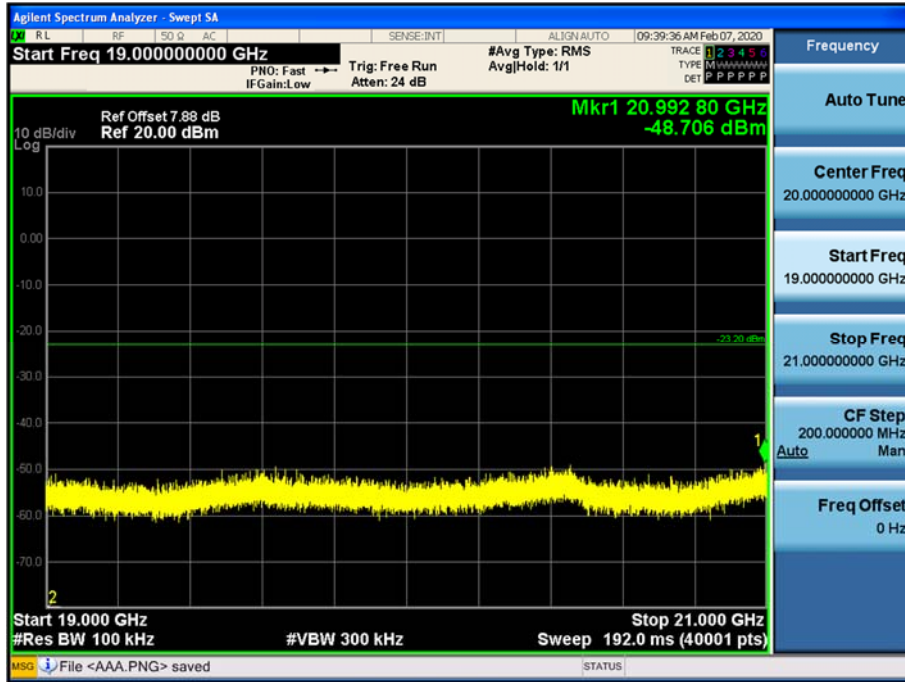


Test Plots (GFSK)- 21 GHz - 23 GHz

Spurious Emission (CH.39)

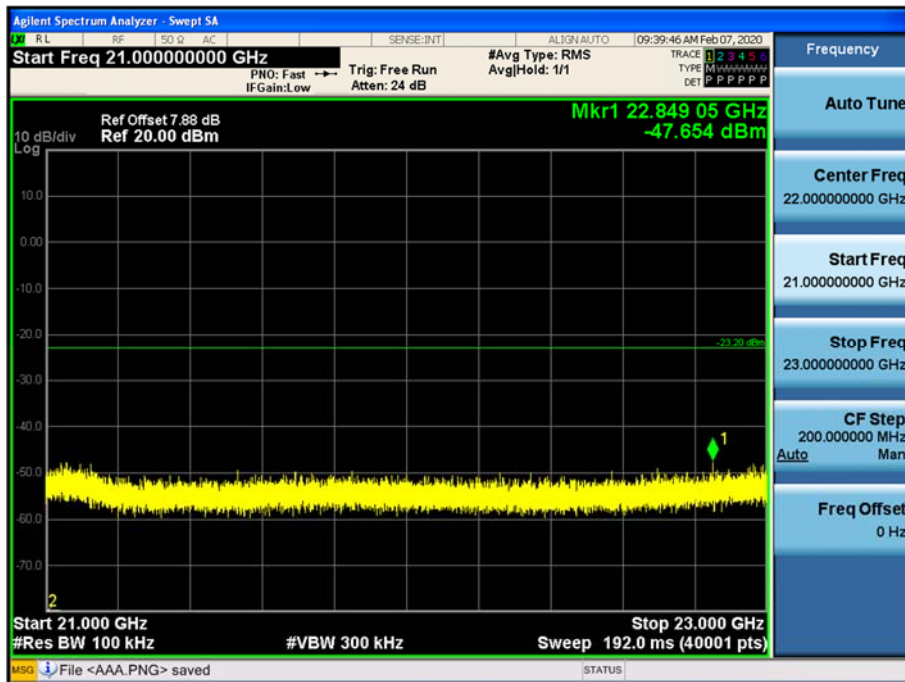

Test Plots (GFSK)- 23 GHz - 25 GHz

Spurious Emission (CH.39)

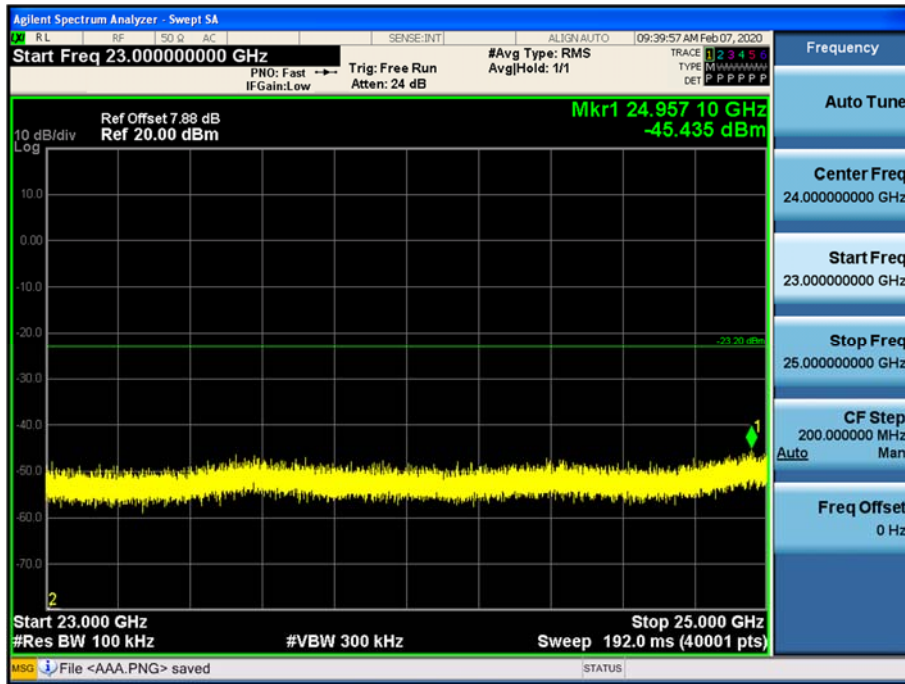

10.6.2 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
2. Radiated test is performed with hopping off.

Frequency Range : Above 1 GHz

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4804	41.98	2.36	V	44.34	73.98	29.64	PK
4804	29.21	2.36	V	31.57	53.98	22.41	AV
7206	39.45	8.66	V	48.11	73.98	25.87	PK
7206	26.01	8.66	V	34.67	53.98	19.31	AV
4804	42.33	2.36	H	44.69	73.98	29.29	PK
4804	29.38	2.36	H	31.74	53.98	22.24	AV
7206	39.74	8.66	H	48.40	73.98	25.58	PK
7206	26.04	8.66	H	34.70	53.98	19.28	AV

Operation Mode: CH Mid(GFSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4882	40.85	2.84	V	43.69	73.98	30.29	PK
4882	28.54	2.84	V	31.38	53.98	22.60	AV
7323	39.55	9.27	V	48.82	73.98	25.16	PK
7323	25.64	9.27	V	34.91	53.98	19.07	AV
4882	40.19	2.84	H	43.03	73.98	30.95	PK
4882	28.45	2.84	H	31.29	53.98	22.69	AV
7323	39.45	9.27	H	48.72	73.98	25.26	PK
7323	25.33	9.27	H	34.60	53.98	19.38	AV

Operation Mode: CH High(GFSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	42.12	2.14	V	44.26	73.98	29.72	PK
4960	28.17	2.14	V	30.31	53.98	23.67	AV
7440	38.33	10.06	V	48.39	73.98	25.59	PK
7440	25.19	10.06	V	35.25	53.98	18.73	AV
4960	42.21	2.14	H	44.35	73.98	29.63	PK
4960	28.31	2.14	H	30.45	53.98	23.53	AV
7440	38.82	10.06	H	48.88	73.98	25.10	PK
7440	25.34	10.06	H	35.40	53.98	18.58	AV

Operation Mode: CH Low($\pi/4$ DQPSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4804	43.18	2.36	V	45.54	73.98	28.44	PK
4804	29.58	2.36	V	31.94	53.98	22.04	AV
7206	40.31	8.66	V	48.97	73.98	25.01	PK
7206	26.01	8.66	V	34.67	53.98	19.31	AV
4804	42.85	2.36	H	45.21	73.98	28.77	PK
4804	29.22	2.36	H	31.58	53.98	22.40	AV
7206	39.59	8.66	H	48.25	73.98	25.73	PK
7206	25.82	8.66	H	34.48	53.98	19.50	AV

 Operation Mode: CH Mid($\pi/4$ DQPSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4882	41.68	2.84	V	44.52	73.98	29.46	PK
4882	28.54	2.84	V	31.38	53.98	22.60	AV
7323	39.40	9.27	V	48.67	73.98	25.31	PK
7323	26.14	9.27	V	35.41	53.98	18.57	AV
4882	41.38	2.84	H	44.22	73.98	29.76	PK
4882	28.22	2.84	H	31.06	53.98	22.92	AV
7323	39.37	9.27	H	48.64	73.98	25.34	PK
7323	26.12	9.27	H	35.39	53.98	18.59	AV

 Operation Mode: CH High ($\pi/4$ DQPSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	42.96	2.14	V	45.10	73.98	28.88	PK
4960	28.22	2.14	V	30.36	53.98	23.62	AV
7440	38.21	10.06	V	48.27	73.98	25.71	PK
7440	25.33	10.06	V	35.39	53.98	18.59	AV
4960	43.24	2.14	H	45.38	73.98	28.60	PK
4960	28.27	2.14	H	30.41	53.98	23.57	AV
7440	38.58	10.06	H	48.64	73.98	25.34	PK
7440	25.40	10.06	H	35.46	53.98	18.52	AV

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4804	42.60	2.36	V	44.96	73.98	29.02	PK
4804	29.74	2.36	V	32.10	53.98	21.88	AV
7206	40.12	8.66	V	48.78	73.98	25.20	PK
7206	26.07	8.66	V	34.73	53.98	19.25	AV
4804	42.26	2.36	H	44.62	73.98	29.36	PK
4804	29.17	2.36	H	31.53	53.98	22.45	AV
7206	40.07	8.66	H	48.73	73.98	25.25	PK
7206	26.02	8.66	H	34.68	53.98	19.30	AV

Operation Mode: CH Mid(8DPSK)


Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4882	41.56	2.84	V	44.40	73.98	29.58	PK
4882	28.61	2.84	V	31.45	53.98	22.53	AV
7323	39.85	9.27	V	49.12	73.98	24.86	PK
7323	26.29	9.27	V	35.56	53.98	18.42	AV
4882	41.29	2.84	H	44.13	73.98	29.85	PK
4882	28.51	2.84	H	31.35	53.98	22.63	AV
7323	39.67	9.27	H	48.94	73.98	25.04	PK
7323	26.28	9.27	H	35.55	53.98	18.43	AV

Operation Mode: CH High(8DPSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	41.33	2.14	V	43.47	73.98	30.51	PK
4960	28.29	2.14	V	30.43	53.98	23.55	AV
7440	39.25	10.06	V	49.31	73.98	24.67	PK
7440	25.31	10.06	V	35.37	53.98	18.61	AV
4960	41.85	2.14	H	43.99	73.98	29.99	PK
4960	28.40	2.14	H	30.54	53.98	23.44	AV
7440	39.38	10.06	H	49.44	73.98	24.54	PK
7440	25.54	10.06	H	35.60	53.98	18.38	AV


RESULT PLOTS (Worst case : H)

Radiated Spurious Emissions plot – Average Reading (8DPSK, Ch.78 3rd Harmonic)

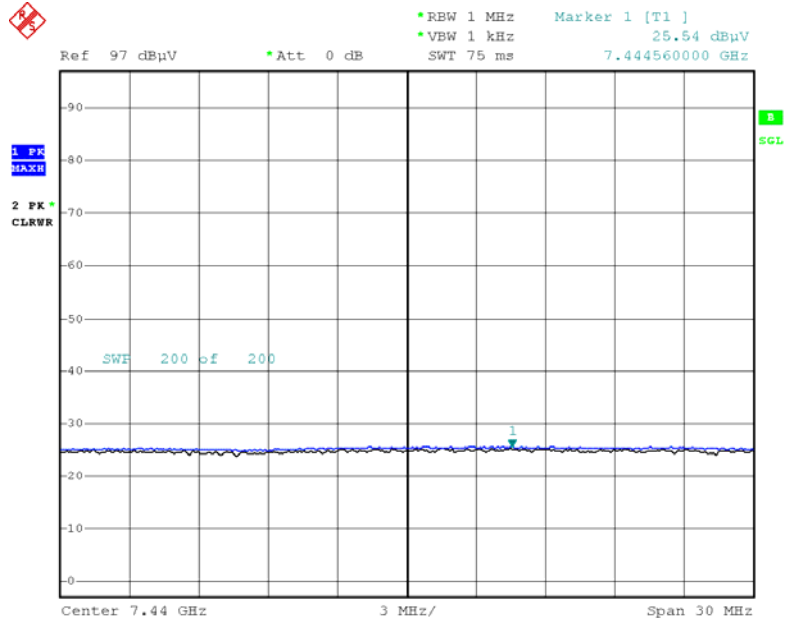

Date: 29.JAN.2020 09:35:27

Radiated Spurious Emissions plot – Peak Reading (8DPSK, Ch.78 3rd Harmonic)

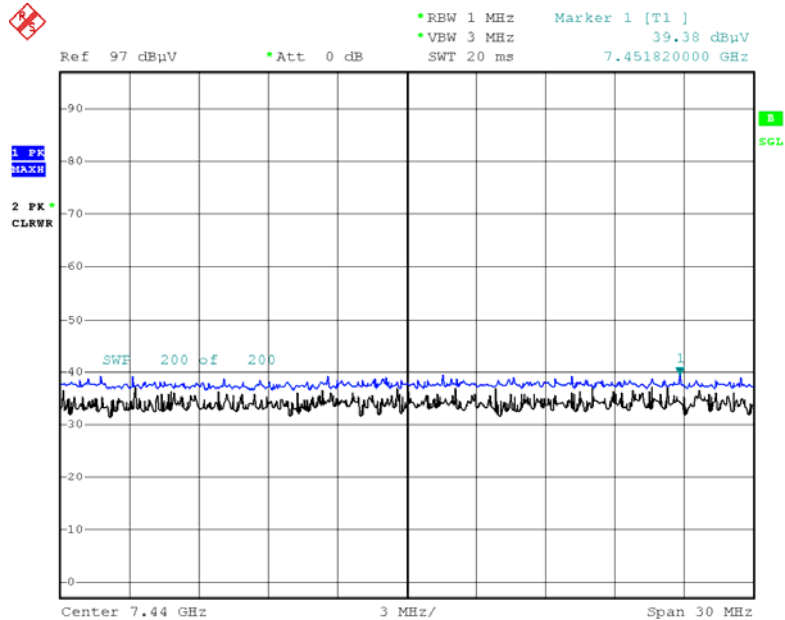

Date: 29.JAN.2020 09:35:45

Note:

Plot of worst case are only reported.

10.6.3 RADIATED RESTRICTED BAND EDGES

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+CL [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect [dB]
2390.0	46.67	0.56	H	0	47.23	73.98	26.75	PK
2390.0	33.67	0.56	H	-24.73	9.49	53.98	44.49	AV
2390.0	46.58	0.56	V	0	47.14	73.98	26.84	PK
2390.0	33.64	0.56	V	-24.73	9.46	53.98	44.52	AV
2483.5	53.56	1.24	H	0	54.80	73.98	19.18	PK
2483.5	50.35	1.24	H	-24.73	26.85	53.98	27.13	AV
2483.5	52.47	1.24	V	0	53.71	73.98	20.27	PK
2483.5	49.89	1.24	V	-24.73	26.39	53.98	27.59	AV

Operation Mode	EDR(8DPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78


Frequency [MHz]	Reading dBuV	※ A.F.+CL [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect [dB]
2390.0	46.05	0.56	H	0	46.61	73.98	27.37	PK
2390.0	33.65	0.56	H	-24.73	9.47	53.98	44.51	AV
2390.0	46.02	0.56	V	0	46.58	73.98	27.40	PK
2390.0	33.58	0.56	V	-24.73	9.40	53.98	44.58	AV
2483.5	51.12	1.24	H	0	52.36	73.98	21.62	PK
2483.5	45.43	1.24	H	-24.73	21.93	53.98	32.05	AV
2483.5	50.33	1.24	V	0	51.57	73.98	22.41	PK
2483.5	44.21	1.24	V	-24.73	20.71	53.98	33.27	AV

Operation Mode	EDR($\pi/4$ DQPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+CL [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect [dB]
2390.0	46.74	0.56	H	0	47.30	73.98	26.68	PK
2390.0	33.56	0.56	H	-24.73	9.38	53.98	44.60	AV
2390.0	46.38	0.56	V	0	46.94	73.98	27.04	PK
2390.0	33.52	0.56	V	-24.73	9.34	53.98	44.64	AV
2483.5	50.89	1.24	H	0	52.13	73.98	21.85	PK
2483.5	45.35	1.24	H	-24.73	21.85	53.98	32.13	AV
2483.5	50.47	1.24	V	0	51.71	73.98	22.27	PK
2483.5	44.29	1.24	V	-24.73	20.79	53.98	33.19	AV


RESULT PLOTS

Radiated Restricted Band Edges plot – Average Reading (GFSK, Ch.78, X-H)

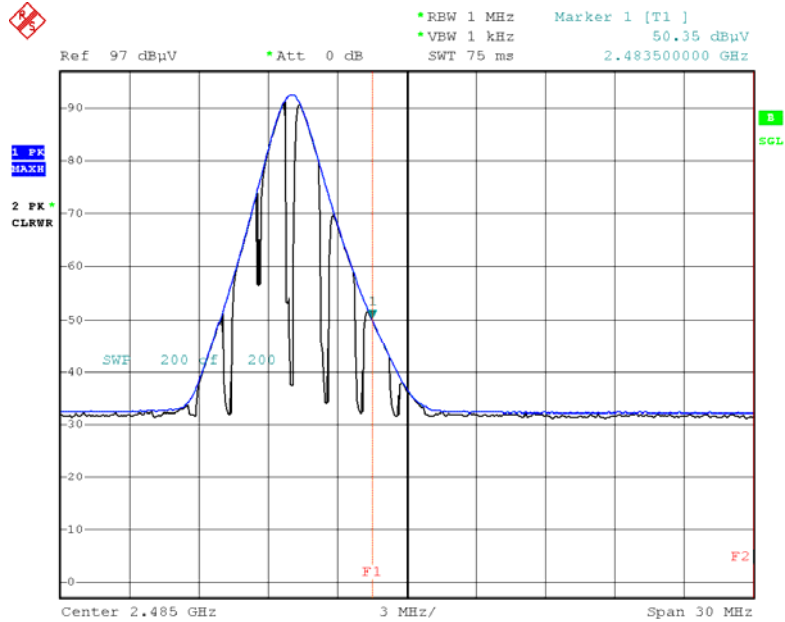

Date: 28.JAN.2020 02:11:12

Radiated Restricted Band Edges plot – Peak Reading (GFSK, Ch.78, X-H)

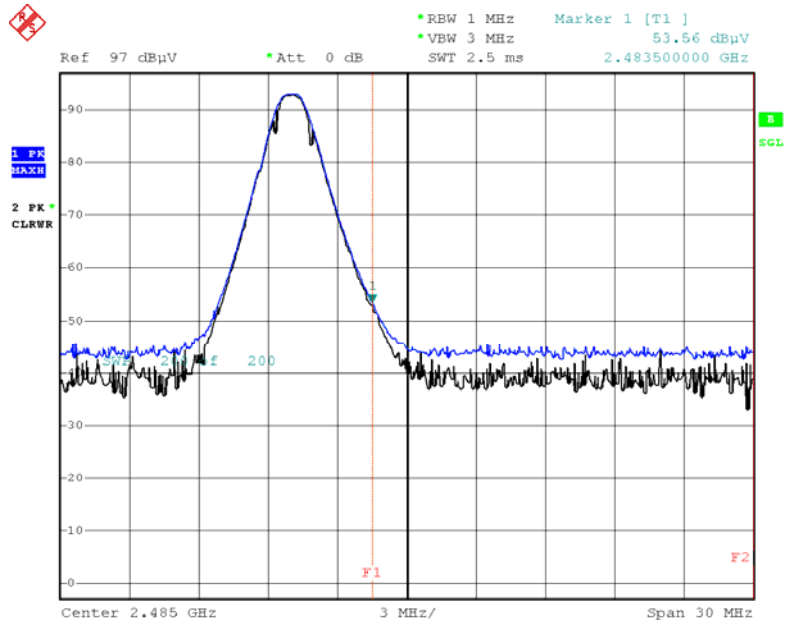

Date: 28.JAN.2020 02:11:28

Note:

Plot of worst case are only reported.

10.7 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

11. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/11/2019	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/18/2019	Annual	100033
ESPAC	SU-642 / Temperature Chamber	03/12/2019	Annual	0093008124
Agilent	N9020A / Signal Analyzer	05/23/2019	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	01/13/2020	Annual	MY49431210
Agilent	N1911A / Power Meter	04/10/2019	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/10/2019	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/11/2019	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/24/2019	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/18/2019	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/02/2019	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/16/2019	Annual	100422

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Emco	2090 / Controller	N/A	N/A	060520
Ets	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	04/26/2019	Biennial	1513-175
Schwarzbeck	VULB 9160 / Hybrid Antenna	08/09/2018	Biennial	3368
Schwarzbeck	BBHA 9120D / Horn Antenna	11/18/2019	Biennial	9120D-1191
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	11/29/2019	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/11/2019	Annual	836650/016
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/26/2019	Annual	101068-SZ
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/19/2019	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/10/2020	Annual	1
CERNEX WEINSCHL	CBLU1183540B-01/Broadband Bench Top LNA 56-10 / Attenuator(10 dB)	12/24/2019	Annual	N/A
CERNEX Api tech.	CBL06185030 / Broadband Low Noise Amplifier 18B-03 / Attenuator (3 dB)	12/24/2019	Annual	N/A
Wainwright Instruments	WHKX10-2700-3000-18000-40SS / High Pass Filter	12/24/2019	Annual	N/A
Wainwright Instruments	WHKX8-6090-7000-18000-40SS / High Pass Filter	12/24/2019	Annual	N/A
T&M SYSTEM	COAXIAL ATTENUATOR / Thru	12/24/2019	Annual	N/A
CERNEX	CBL18265035 / Power Amplifier	12/26/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/18/2019	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/26/2019	Annual	3000C000276

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

12. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2003-FI003-P