

# TEST REPORT

of

FCC Part 15 Subpart C §15.209  
IC RSS-210 Issue 10 and RSS-Gen Issue 5

FCC ID: TQ8-BCM-E50  
IC Certification: 5074A-BCME50

1. Equipment Under Test : Body Control Module
2. Model Name : BCM-E50
3. Variant Model Name(s) : -
4. Applicant : Hyundai Mobis Co., Ltd.
5. Manufacturer : Hyundai Mobis Co., Ltd.
6. Date of Receipt : 2020.02.07
7. Date of Test(s) : 2020.02.27 ~ 2020.03.24
8. Date of Issue : 2020.03.30

In the configuration tested, the EUT complied with the standards specified above. This test report does not assure KOLAS accreditation.

- 1) The results of this test report are effective only to the items tested.
- 2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.

**Tested by:**



Jinhyoung Cho

**Technical  
Manager:**



Jungmin Yang

**SGS Korea Co., Ltd. Gunpo Laboratory**



**SGS Korea Co., Ltd.**

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807  
Tel. +82 31 428 5700 / Fax. +82 31 427 2370  
<http://www.sgsgroup.kr>

Report Number: F690501-RF-RTL000487

Page: 2 of 20

---

# INDEX

## Table of Contents

1. General Information -----	3
2. Field Strength of Fundamental and Spurious Emission-----	6
3. 20 dB Bandwidth -----	17
4. Occupied Bandwidth-----	19

## 1. General Information

### 1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

### 1.2. Details of Applicant

Applicant : Hyundai Mobis Co., Ltd.

Address : 203, Teheran-ro, Gangnam-gu, Seoul, South Korea, 135-977

Contact Person : Choe, Seung-hoon

Phone No. : +82 31 260 0098

### 1.3. Details of Manufacturer

Company : Same as applicant

Address : Same as applicant

### 1.4. Description of EUT

<b>Kind of Product</b>		Body Control Module
<b>Model Name</b>		BCM-E50
<b>Power Supply</b>		DC 12.0 V
<b>Frequency Range</b>		Tx: 125.00 kHz, Rx: 433.92 MHz
<b>Antenna Type</b>	<b>Tx</b>	Coil antenna
	<b>Rx</b>	Chip antenna

### 1.5. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due
Spectrum Analyzer	R&S	FSV30	103102	Jun. 05, 2019	Annual	Jun. 05, 2020
Signal Generator	R&S	SMBV100A	259067	Jun. 10, 2019	Annual	Jun. 10, 2020
DC Power Supply	Agilent	U8002A	MY50060028	Mar. 03, 2020	Annual	Mar. 03, 2021
Test Receiver	R&S	ESU26	100109	Feb. 18, 2020	Annual	Feb. 18, 2021
Loop Antenna	Schwarzbeck Mess-Elektronik	FMZB 1519	1519-039	Aug. 22, 2019	Biennial	Aug. 22, 2021
Bilog Antenna	Schwarzbeck Mess-Elektronik	VULB 9163	396	Mar. 21, 2019	Biennial	Mar. 21, 2021
Turn Table	Innco systems GmbH	DS 1200 S	N/A	N.C.R.	N/A	N.C.R.
Controller	Innco systems GmbH	CONTROLLER CO3000-4P	CO3000/963/3 8330516/L	N.C.R.	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L x W x H (9.6 m x 6.4 m x 6.6 m)	N/A	N.C.R.	N/A	N.C.R.
Coaxial Cable	SUCOFLEX	104 (3 m)	MY3258414	Jan. 28, 2020	Semi-annual	Jul. 28, 2020
Coaxial Cable	SUCOFLEX	104 (10 m)	MY3145814	Jan. 28, 2020	Semi-annual	Jul. 28, 2020

### 1.6. Test Procedure(s)

The measurement procedures described in the American National Standard of Procedure for Compliance Testing of unlicensed Wireless Devices (ANSI C63.10-2013).

### 1.7. Sample Calculation

Where relevant, the following sample calculation is provided:

$$\text{Field strength level (dB}\mu\text{V/m)} = \text{Measured level (dB}\mu\text{V)} + \text{Antenna factor (dB)} + \text{Cable loss (dB)}$$

### 1.8. Summary of Test Results

The EUT has been tested according to the following specifications:

<b>Applied Standard: FCC Part15 subpart C, IC RSS-210 Issue 10 and RSS-Gen Issue 5</b>			
Section in FCC	Section in IC	Test Item(s)	Result
15.209	RSS-210 Issue 10, 7.3, RSS-Gen Issue 5, 8.9	Radiated emission, Spurious Emission and Field Strength of Fundamental	Complied
2.1049	-	20 dB Bandwidth	Complied
-	RSS-Gen Issue 5, 6.7	Occupied Bandwidth	Complied

### 1.9. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Occupied Bandwidth	± 9.66 kHz
Radiated Emission, 9 kHz to 30 MHz	± 3.59 dB
Radiated Emission, below 1 GHz	± 5.88 dB

Uncertainty figures are valid to a confidence level of 95 %.


### 1.10. Test Report Revision

Revision	Report Number	Date of Issue	Description
0	F690501-RF-RTL000487	2020.03.30	Initial


## 2. Field Strength of Fundamental and Spurious Emission

### 2.1. Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz emissions.

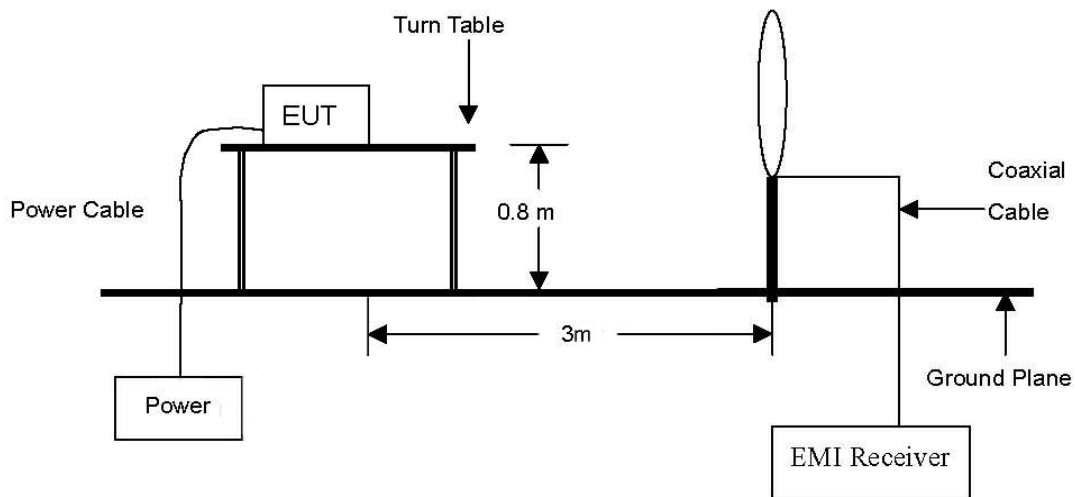

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

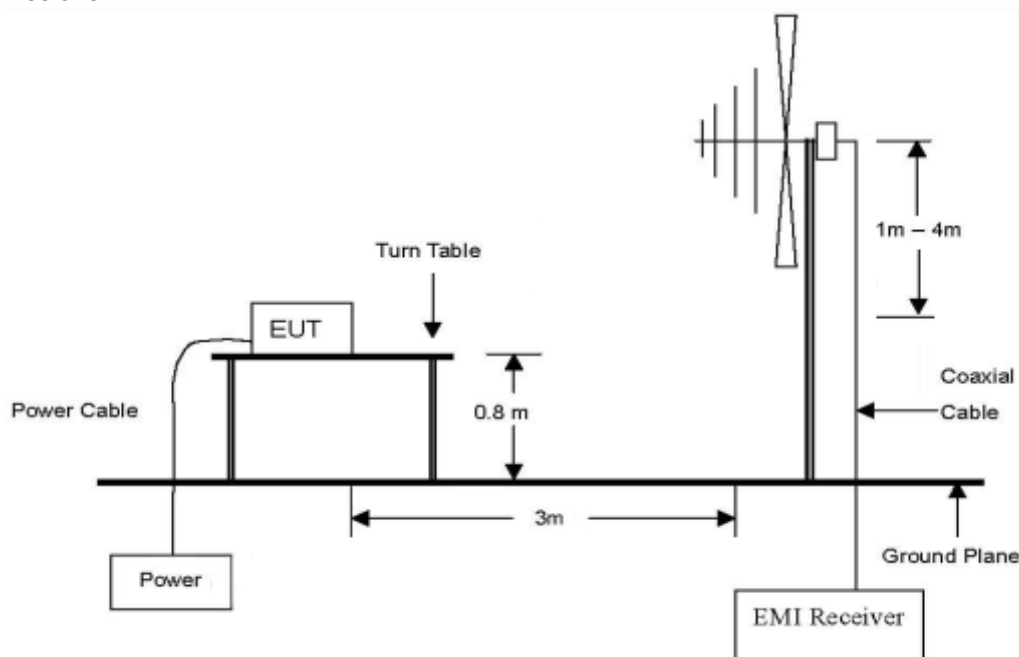

## 2.2. Limit

### 2.2.1. FCC

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meter)
0.009-0.490	2 400/F(kHz)	300
0.490-1.705	24 000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

According to §15.209(d), The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1 000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

## 2.2.2. IC

### 2.2.2.1. Transmitter Emission Limits

According to RSS-Gen Issue 5, 8.9.

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

**Table 5 - General field strength limits at frequencies above 30 MHz**

Frequency (MHz)	Field Strength ( $\mu V/m$ at 3 m)
30-88	100
88-216	150
216-960	200
Above 960	500

**Table 6 - General field strength limits at frequencies below 30 MHz**

Frequency	Magnetic Field Strength (H-Field) ( $\mu A/m$ )	Measurement Distance (m)
9-490 kHz <sup>1</sup>	6.37/F (F in kHz)	300
490-1 705 kHz	63.7/F (F in kHz)	30
1.705-30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

According to RSS-210 Issue10, 7.3.

Transmitters whose wanted and unwanted emissions fall within the general field strength limits specified in RSS-Gen may operate licence-exempt in any of the frequency bands, other than the restricted frequency bands listed in RSS-Gen and the TV bands 54-72 MHz 76-88 MHz, 174-216 MHz and 470-602 MHz, and shall be certified under RSS-210. Under no circumstances shall the level of any unwanted emissions exceed the level of the fundamental emissions.

Devices operating below 490 kHz for which all emissions are at least 40 dB below the general field strength limit listed in RSS-Gen (for transmitters at frequencies below 30 MHz) are Category II devices and are subject to the requirements specified in RSS-310, Licence-Exempt Radio Apparatus: Category II Equipment.



## 2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.10-2013.

### 2.3.1. Test Procedures for Emission from 9 kHz to 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum Hold Mode.

### 2.3.2. Test Procedures for emission from above 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site below 1 GHz. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna is a bi-log antenna and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

#### Note;

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1 GHz.
2. Definition of DUT Axis.  
Definition of the test orthogonal plan for EUT was described in the test setup photo.  
The test orthogonal plan of EUT is X – axis during radiation test.

## 2.4. Field Strength of Fundamental Test Result


Ambient temperature : (23 ± 1) °C  
 Relative humidity : 47 % R.H.

Radiated Emissions			Ant.	Correction Factors		Total		Limit	
Frequency (MHz)	Reading (dBµV)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dBµV/m) at 3 m	Actual (dBµV/m) at 300 m	Limit (dBµV/m) at 300 m	Margin (dB)
0.125	53.90	Average	H	17.80	0.07	<u>71.77</u>	-8.23	25.67	33.90

### Remark;

1. According to §15.31(f)(2) 300 m Result (dBµV/m) = 3 m Result (dBµV/m) - 40log (300/3) (dBµV/m).
2. According to §15.209(d), the measurements were tested by using Quasi peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1 000 MHz in these three bands on measurements employing an average detector.
3. The limit above was calculated based on table of §15.209(a).
4. According to ANSI C63.10: 2013, For measurement below 30 MHz.  
 conversion factor from E-field to H-field is considered as free-space impedance [1 µV/m = (1/377 Ω) × 1 µA/m]  
 The FCC limits are same to the IC limits.
5. Actual (dBµV/m) at 3 m = Reading (dBµV) + AF (dB/m) + CL (dB).

**- Test plot**

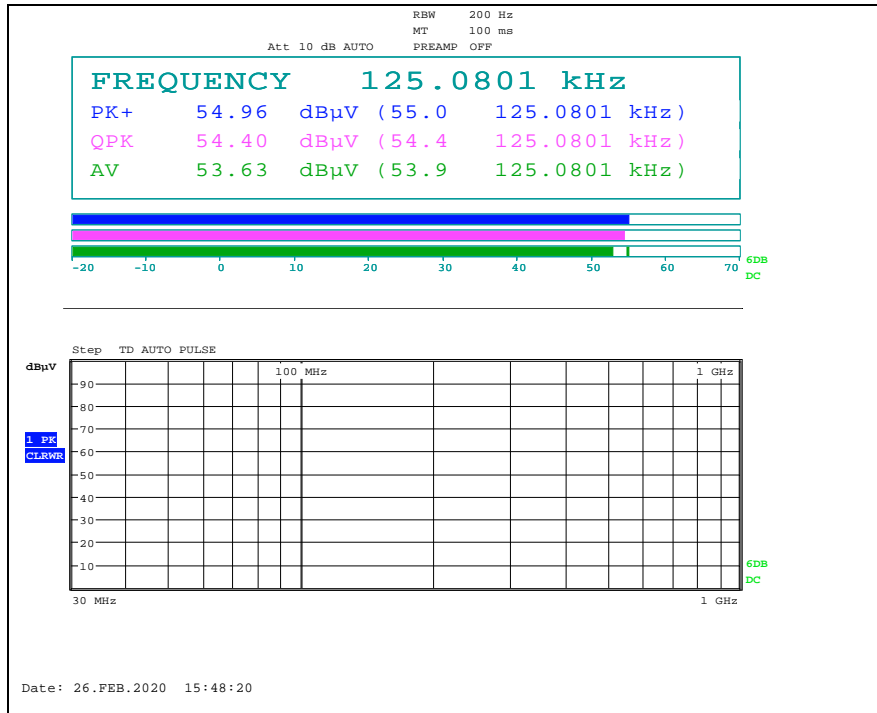

## 2.5. Spurious Emission Test Result

Ambient temperature : (23 ± 1) °C  
 Relative humidity : 47 % R.H.

The following table shows the highest level of radiated emissions on between polarizations of horizontal and vertical.

### Below 30 MHz

Radiated Emissions			Ant.	Correction Factors		Total		Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB $\mu$ V/m) at 3 m	Actual (dB $\mu$ V/m) at 30 m or 300 m	Limit (dB $\mu$ V/m) at 30 m or 300 m	Margin (dB)
0.022	25.60	Average	H	18.14	0.02	43.76	-36.24	40.76	77.00
0.035	26.30	Average	H	17.89	0.02	44.21	-35.79	36.72	72.51
0.069	20.50	Average	H	17.84	0.04	38.38	-41.62	30.83	72.45
0.375	27.90	Average	H	17.76	0.18	45.84	-34.16	16.12	50.28
0.623	19.60	Quasi-Peak	H	17.80	0.27	37.67	-2.33	31.71	34.04

**Above 30 MHz**



Radiated Emissions			Ant	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
32.75	44.30	V	P	16.10	-26.69	33.71	40.00	6.29
125.83	39.50	H	P	14.80	-25.29	29.01	43.50	14.49
275.69	34.80	H	P	18.71	-24.93	28.58	46.00	17.42
278.12	35.50	V	P	18.76	-24.92	29.34	46.00	16.66
377.34	33.70	V	P	20.75	-24.71	29.74	46.00	16.26
902.48	36.70	V	P	28.15	-22.16	<b>42.69</b>	46.00	3.31



**Remark;**


1. According to §15.31(f)(2)
  - 300 m Result (dBμV/m) = 3 m Result (dBμV/m) - 40log (300/3) (dBμV/m)
  - 30 m Result (dBμV/m) = 3 m Result (dBμV/m) - 40log (30/3) (dBμV/m)
2. According to field strength table of general requirement in §15.209(a), field strength limits below 1.705 MHz were calculated as below.
  - 9 kHz to 490 kHz: 20log (2 400 / F (kHz)) at 300 m (dBμV/m)
  - 490 kHz to 1 705 kHz: 20log (24 000 / F (kHz)) at 30 m (dBμV/m)
3. According to §15.209(d), the measurements were tested by using Quasi peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1 000 MHz in these three bands on measurements employing an average detector.
4. According to ANSI C63.10: 2013, For measurement below 30 MHz.  
 conversion factor from E-field to H-field is considered as free-space impedance [1 μV/m = (1/377 Ω) × 1 μA/m]  
 The FCC limits are same to the IC limits.
5. The limit above was calculated based on table of §15.209 (a).
6. Actual (dBμV/m) at 3 m = Reading (dBμV) + AF (dB/m) + CL (dB) or  
 Reading (dBμV) + AF (dB/m) + AMP (dB) + CL (dB).

- Test plots


Below 30 MHz

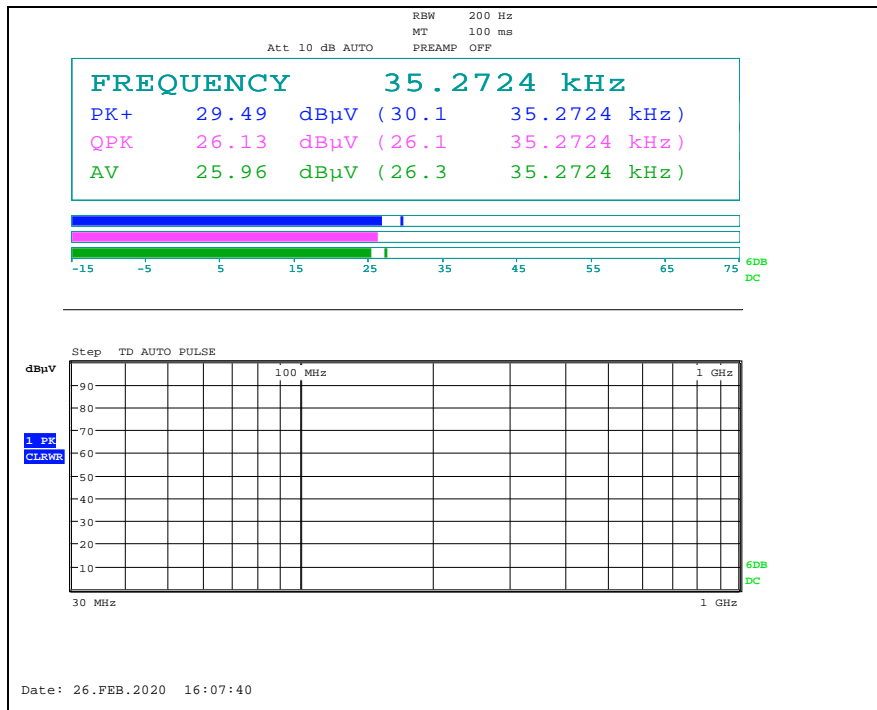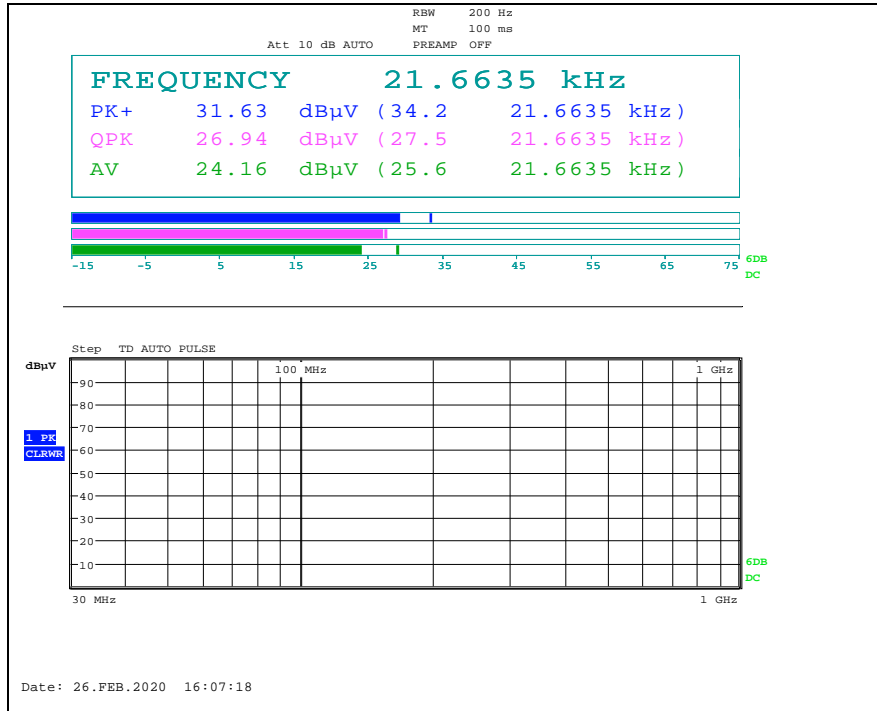

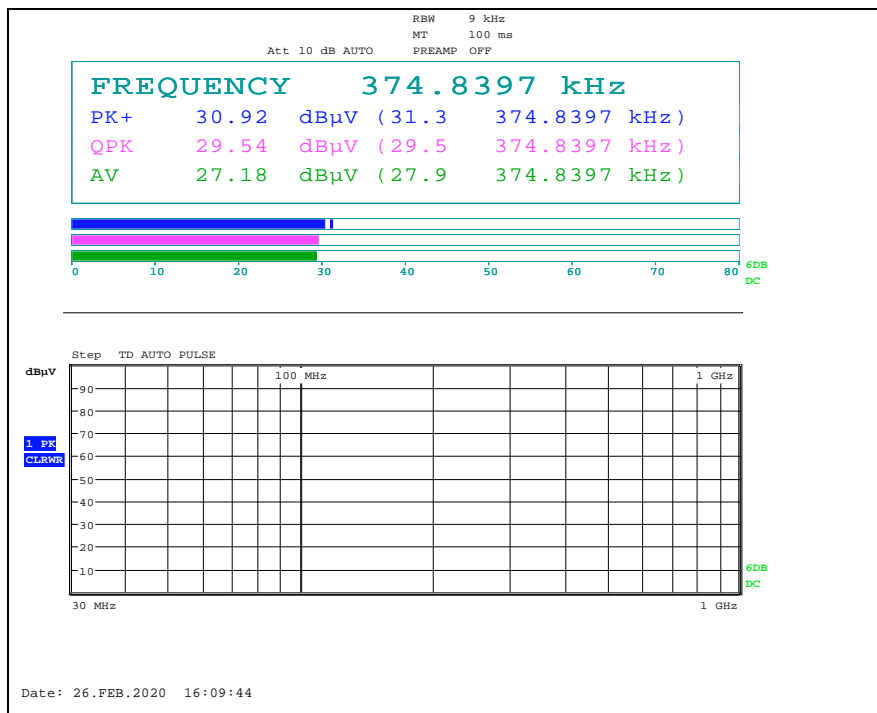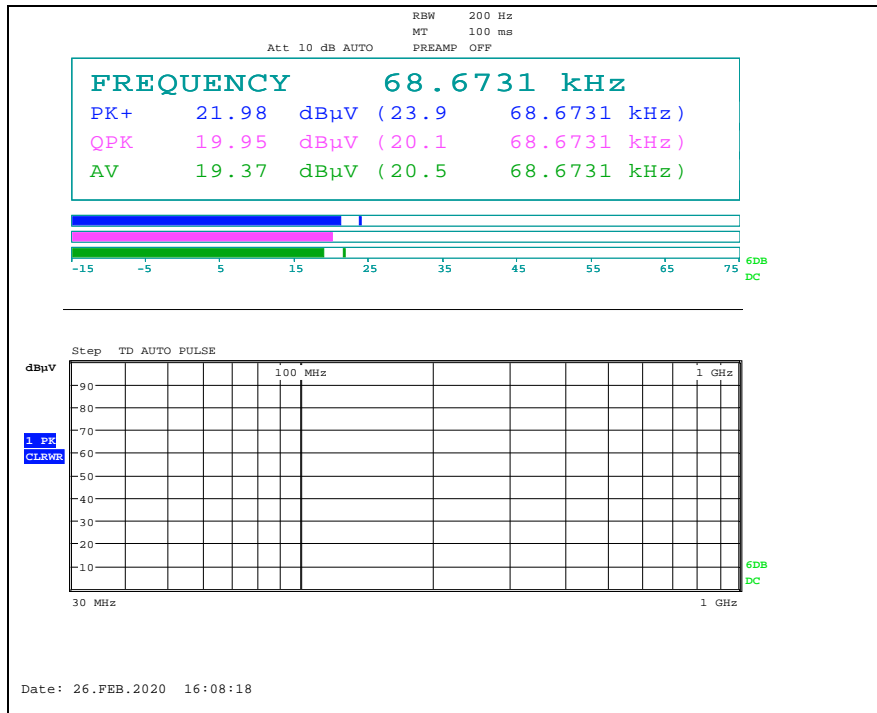

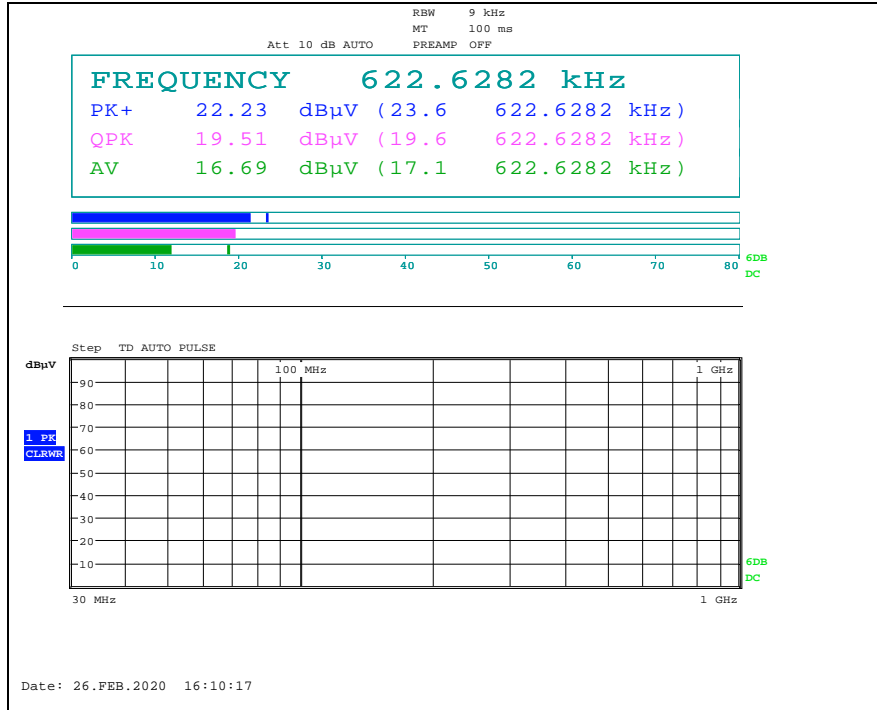

**Above 30 MHz**

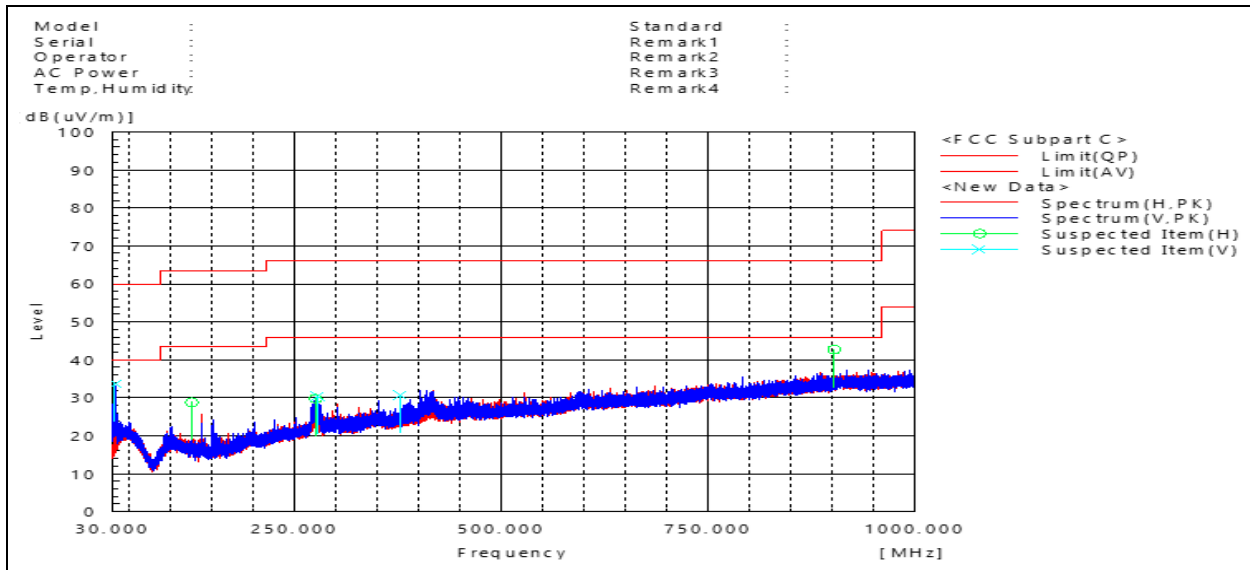


**Remark;**

- Traces shown in the plot were made by using a peak detector.



### 3. 20 dB Bandwidth

#### 3.1. Test Setup

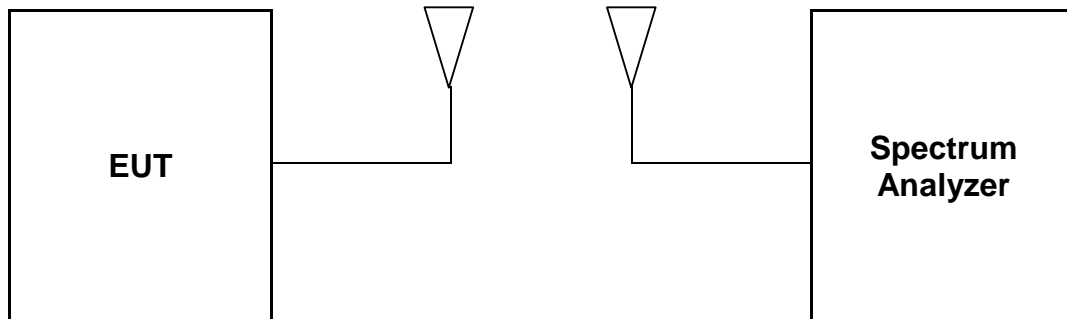

#### 3.2. Limits

None; for reporting purposed only

#### 3.3. Test Procedure


1. Span = the spectrum analyzer shall be between two times and five times the OBW, RBW = 1% to 5% of the OBW, VBW = set approximately 3 x RBW, Sweep = auto, Detector = peak, Trace = max hold.
2. The marker-to-peak function to set the mark to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is 20 dB bandwidth of the emission

### 3.4. Test Result

Ambient temperature : (23 ± 1) °C  
 Relative humidity : 47 % R.H.


Frequency (kHz)	20 dB Bandwidth (kHz)	Limit
125	20.839	Reporting proposed only

**- Test plot**

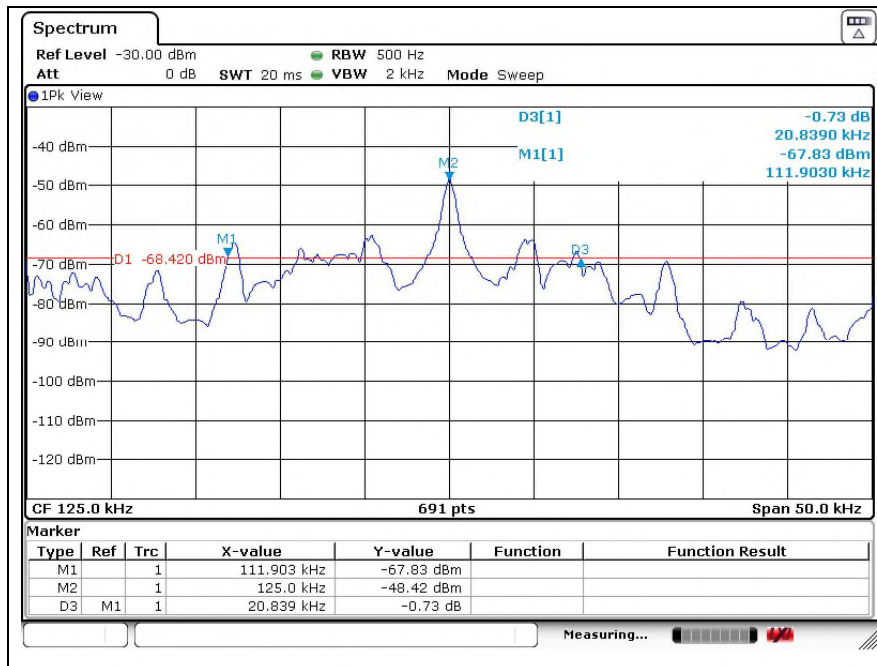

## 4. Occupied Bandwidth

### 4.1. Test Setup

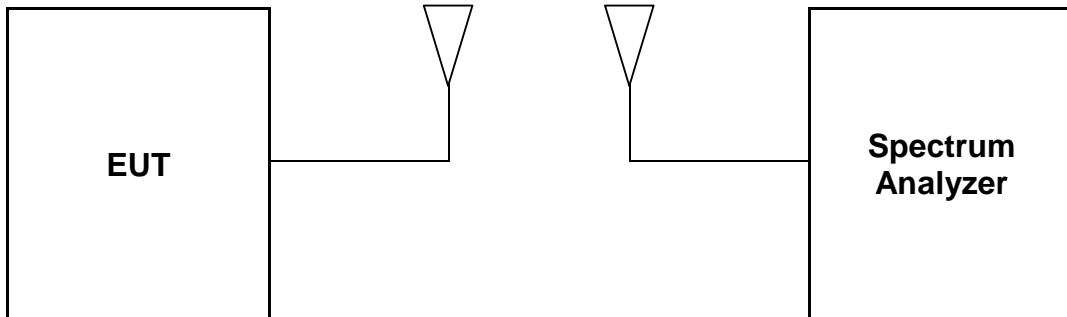

### 4.2. Limit

None; for reporting purposed only

### 4.3. Test Procedure


1. Set the spectrum analyzer as SPAN = shall be between 1.5 times and 5.0 times the OBW, RBW = 1% to 5% of the OBW, VBW = set approximately 3 x RBW, Detector = peak, Trace mode = max hold.
2. Measure lowest and highest frequencies are placed in a running sum until 0.5 % and 99.5 % of the total is reached.
3. Record the SPAN between the lowest and the highest frequencies for the 99 % occupied bandwidth.

### 4.4. Test Result

Ambient temperature : (23 ± 1) °C  
 Relative humidity : 47 % R.H.

Frequency (kHz)	Occupied Bandwidth (kHz)	Limit
125	26.122	Reporting proposed only

**- Test plot**

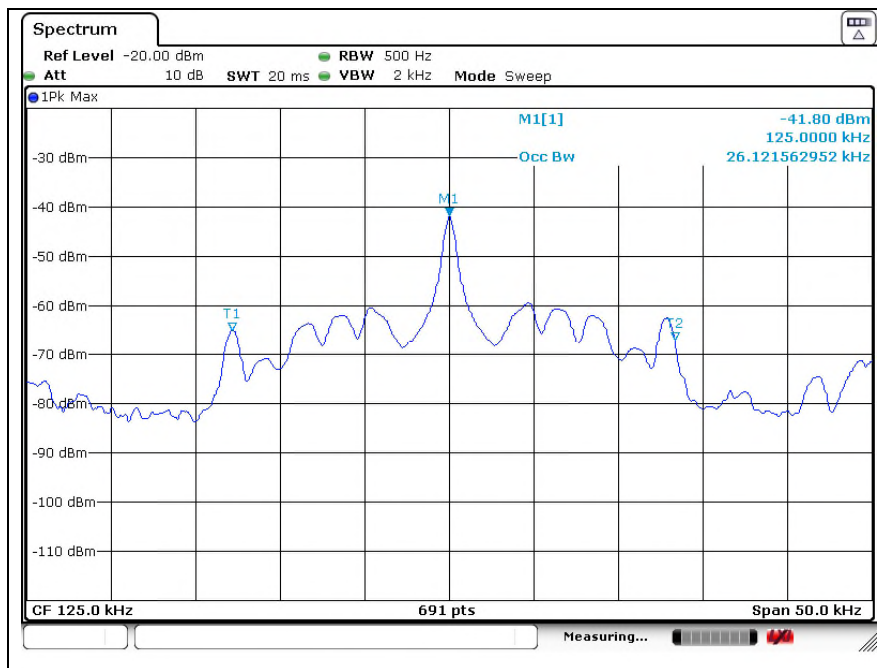

**- End of the Test Report -**