

On your side

**HCT**

# TEST REPORT

FCC/IC UNII Test for ATB31EYAN&ATB31EYKN  
Certification

**APPLICANT**  
HYUNDAI MOBIS CO., LTD.

**REPORT NO.**  
HCT-RF-1909-FI003-R1

**DATE OF ISSUE**  
September 10, 2019

**HCT Co., Ltd.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 F ax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 Fax. +82 31 645 6401



REPORT NO.  
HCT-RF-1909-FI003-R1

DATE OF ISSUE  
September 10, 2019

Other Model  
FCC: ATB30EYAN  
IC: ATB30EYKN

Applicant **HYUNDAI MOBIS CO., LTD.**  
203, Teheran-ro, Gangnam-gu, Seoul, 135-977, South Korea

Eut Type	Car Audio System
FCC Model Name	ATB31EYAN
IC Model Name	ATB31EYKN
FCC ID	TQ8-ATB31EYAN
IC	5074A-ATB31EYKN
Modulation type	OFDM
FCC Classification	Unlicensed National Information Infrastructure(UNII)
FCC Rule Part(s)	Part 15.407
IC Rule Part(s)	RSS-247 Issue 2 (February 2017), RSS-Gen Issue 5(April 2018)

This test results were applied only to the test methods required by the standard.

Tested by  
Se Wook Park

(signature)

Technical Manager  
Jong Seok Lee

(signature)

HCT CO., LTD.  
*Soo Chan Lee*  
SooChan Lee / CEO

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	September 06, 2019	Initial Release
1	September 10, 2019	Added the PMN, HVIN on Page 5

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

### Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / IC Rules under normal use and maintenance

## CONTENTS

1. GENERAL INFORMATION	5
EUT DESCRIPTION	5
2. MAXIMUM OUTPUT POWER	6
3. TEST METHODOLOGY	7
EUT CONFIGURATION	7
EUT EXERCISE	7
GENERAL TEST PROCEDURES	7
DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION	9
5. FACILITIES AND ACCREDITATIONS	9
5.1 FACILITIES	9
5.2 EQUIPMENT	9
6. ANTENNA REQUIREMENTS	10
7. MEASUREMENT UNCERTAINTY	10
8. DESCRIPTION OF TESTS	11
9. SUMMARY OF TEST RESULTS	33
10. TEST RESULT	35
10.1 DUTY CYCLE	35
10.2 26DB BANDWIDTH & 99 % BANDWIDTH	38
10.3 6DB BANDWIDTH	47
10.4 OUTPUT POWER MEASUREMENT	50
10.5 POWER SPECTRAL DENSITY	53
10.6 FREQUENCY STABILITY.	62
10.6.1 80MHz BW	62
10.7 STRADDLE CHANNEL	78
10.7.1 26dB Bandwidth	78
10.7.2 6dB Bandwidth	81
10.7.3 Output Power	84
10.7.4 Power Spectral Density	87
10.8 RADIATED SPURIOUS EMISSIONS	90
10.9 RADIATED RESTRICTED BAND EDGE	127
10.10 RECEIVER SPURIOUS EMISSIONS	142
11. LIST OF TEST EQUIPMENT	143
12. ANNEX A_ TEST SETUP PHOTO	145

## 1. GENERAL INFORMATION

### EUT DESCRIPTION

FCC Model	ATB31EYAN	
IC Model	ATB31EYKN	
FCC Additional Model	ATB30EYAN	
IC Additional Model	ATB30EYKN	
EUT Type	Car Audio System	
Power Supply	DC 14.4 V	
Modulation Type	OFDM : 802.11a, 802.11n, 802.11ac	
Frequency Range (MHz)	U-NII-1	20MHz BW : 5180 - 5240 40MHz BW : 5190 - 5230 80MHz BW : 5210
	U-NII-2A	20MHz BW : 5260 - 5320 40MHz BW : 5270 - 5310 80MHz BW : 5290
	U-NII-2C	20MHz BW : 5500 - 5720 40MHz BW : 5510 - 5710 80MHz BW : 5530 - 5690
	U-NII-3	20MHz BW : 5745 - 5825 40MHz BW : 5755 - 5795 80MHz BW : 5775
Antenna Specification	Antenna type: Printed Antenna Peak Gain : 3.51 dBi	
Straddle channel	Supported	
TDWR Band	Not Supported	
Dynamic Frequency Selection	Slave without radar detection	
Date(s) of Tests	July 04, 2019~ August 30, 2019	
PMN (Product Marketing Number)	ATB31EYKN, ATB30EYKN	
HVIN (Hardware Version Identification Number)	ATB31EYKN, ATB30EYKN	
FVIN (Firmware Version Identification Number)	N/A	
HMN (Host Marketing Name)	N/A	

## 2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Band	Mode	RF Output Power (dBm)	RF Output Power (W)
U-NII-1	802.11a	9.47	0.01
	802.11n (HT20)	9.55	0.01
	802.11n (HT40)	4.96	0.00
	802.11ac (VHT20)	9.30	0.01
	802.11ac (VHT40)	4.80	0.00
	802.11ac (VHT80)	4.61	0.00
U-NII-2A	802.11a	9.85	0.01
	802.11n (HT20)	9.74	0.01
	802.11n (HT40)	9.79	0.01
	802.11ac (VHT20)	9.49	0.01
	802.11ac (VHT40)	9.31	0.01
	802.11ac (VHT80)	8.39	0.01
U-NII-2C	802.11a	9.58	0.01
	802.11n (HT20)	9.32	0.01
	802.11n (HT40)	9.28	0.01
	802.11ac (VHT20)	9.27	0.01
	802.11ac (VHT40)	9.04	0.01
	802.11ac (VHT80)	9.25	0.01
U-NII-3	802.11a	9.24	0.01
	802.11n (HT20)	8.97	0.01
	802.11n (HT40)	8.81	0.01
	802.11ac (VHT20)	9.17	0.01
	802.11ac (VHT40)	8.99	0.01
	802.11ac (VHT80)	8.45	0.01

### 3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 dated December 14, 2017 entitled “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E” and ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’ were used in the measurement.

#### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E. / RSS-Gen issue 5, RSS-247 issue 2.

#### GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.



## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032 ).

For ISSED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 6. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203, § 15.407:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

\* The antennas of this E.U.T are permanently attached.

\* The E.U.T Complies with the requirement of § 15.203, § 15.407 / RSS-Gen

## 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

## 8. DESCRIPTION OF TESTS

### 8.1. Duty Cycle

#### Test Configuration

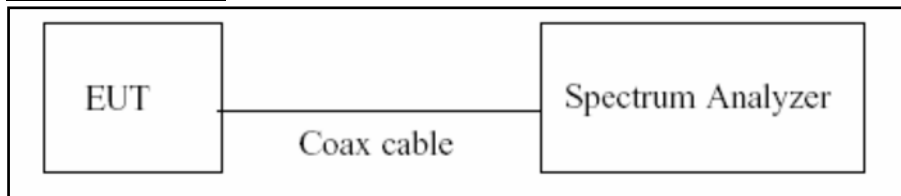

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on} / T_{total}$  and Duty Cycle Factor =  $10 \cdot \log(1 / \text{Duty Cycle})$

## 8.2. 6dB Bandwidth & 26dB Bandwidth & 99 % Bandwidth

### Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### Test Configuration

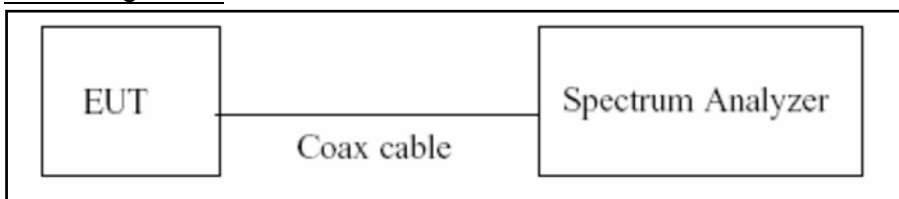

### Test Procedure(26dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

### Test Procedure (6dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.2 in KDB 789033 D02 v02r01.

1. RBW = 100 kHz
2. VBW  $\geq$  3\*RBW
3. Detector = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Note:**

1. We tested X dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.
2. DFS test channels should be defined. So, We performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.
3. The 26 dB bandwidth is used to determine the conducted power limits.

### Test Procedure (99 % Bandwidth measurement)

The 99 % bandwidth is used to determine the conducted power limits(for IC).

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dBbandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized. (6.9.3 in ANSI 63.10-2013)

RBW = 1% ~ 5% of the occupied bandwidth

VBW  $\geq$  3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


### 8.3. Output Power Measurement

**Limit**


Band	Limit
UNII 1	- Master : Not exceed 1 W(=30dBm) - Slave : Not exceed 250 mW(=23.98 dBm)
UNII 2A, 2C	Not exceed the lesser of 250 mW or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.)
UNII 3	Not exceed 1 W(=30dBm)

**Test Configuration**

Power Meter

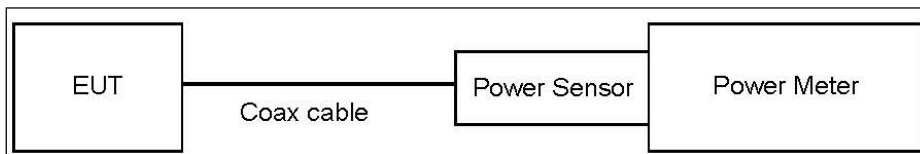

Spectrum Analyzer(Only Straddle Channel)

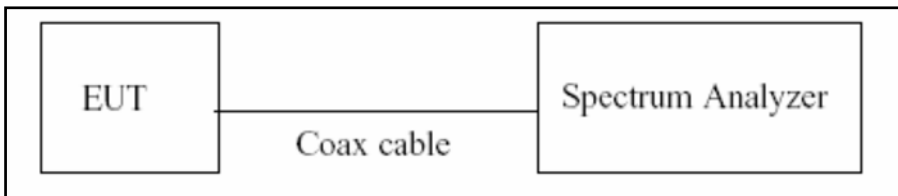

**Test Procedure(Power Meter)**

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

### Test Procedure(Spectrum Analyzer)

The transmitter output is connected to the Spectrum Analyzer.

We use the spectrum analyzer's integrated band power measurement function.

We tested according to Procedure E.2.d) in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW  $\geq$  3 MHz.
5. Number of points in sweep  $\geq$  2\*span/RBW.
6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to "free run".
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add  $10\log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

### Sample Calculation

Total Power(dBm) = Reading Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

### Note

1. Spectrum reading values are not plot data.

The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(20 dB) + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	22.2
UNII 2A	22.2
UNII 2C	22.2
UNII 3	22.2

(Actual value of loss for the attenuator and cable combination)




### 8.4. Power Spectral Density

**Limit**

Band	Limit
UNII 1	11 dBm/MHz
UNII 2A, 2C	11 dBm/MHz
UNII 3	30 dBm/500 kHz

**Test Configuration**

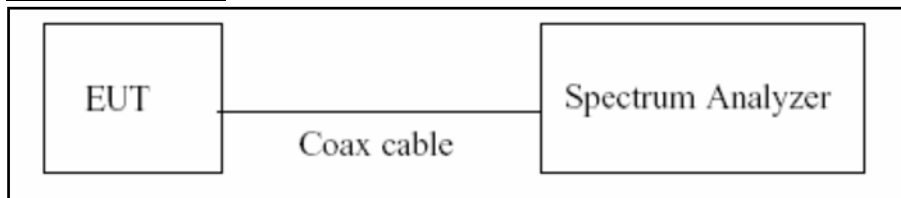

**Test Procedure**

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
3. VBW  $\geq$  3 MHz
4. Number of points in sweep  $\geq$  2\*span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add 10 log(1/x), where x is the duty cycle, to the peak of the spectrum.

**Sample Calculation**

Total PSD(dBm) = Reading Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

**Note**

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(20 dB) + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	22.2
UNII 2A	22.2
UNII 2C	22.2
UNII 3	22.2


(Actual value of loss for the attenuator and cable combination)

## 8.5. Frequency Stability

### Limit

Maintained within the band

### Test Configuration

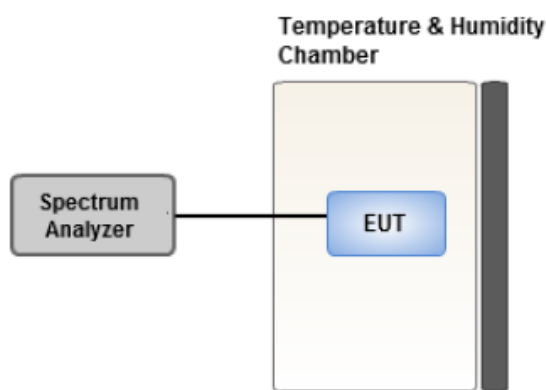

### Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C.
2. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

## 8.6. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

### 8.7. Radiated Test


**Limit**

1. UNII 1: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of  $-27$  dBm/MHz.
  
2. UNII 2A, 2C: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of  $-27$  dBm/MHz.
  
3. UNII 3: All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
  
4. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

## Test Configuration


Below 30 MHz

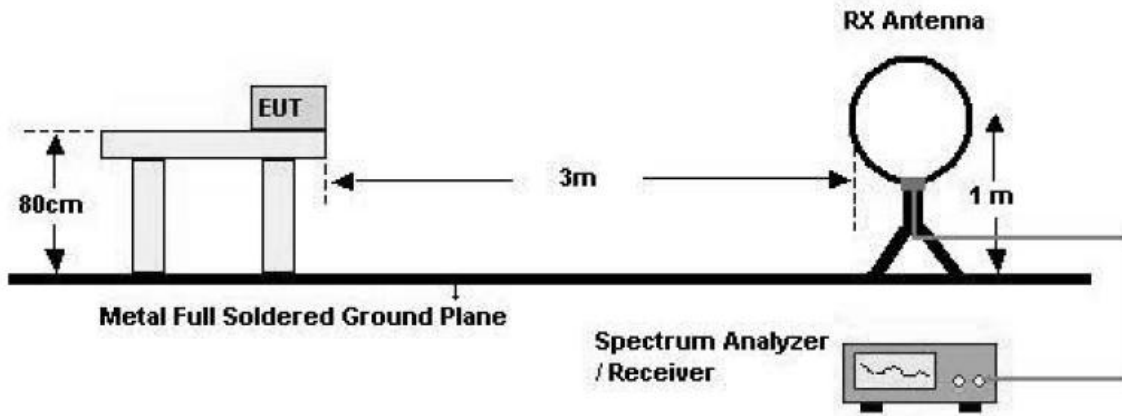

30 MHz - 1 GHz

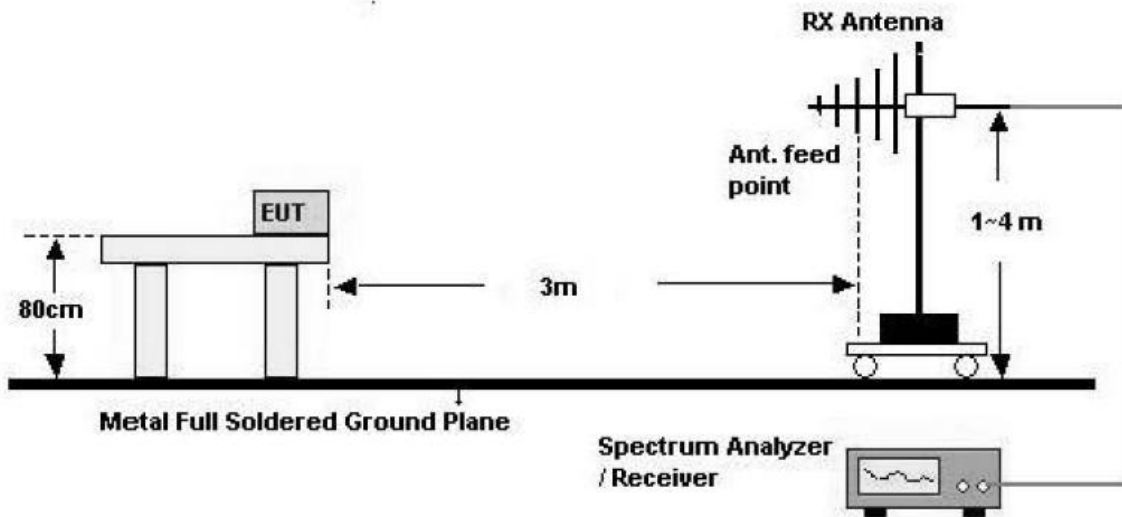

Above 1 GHz

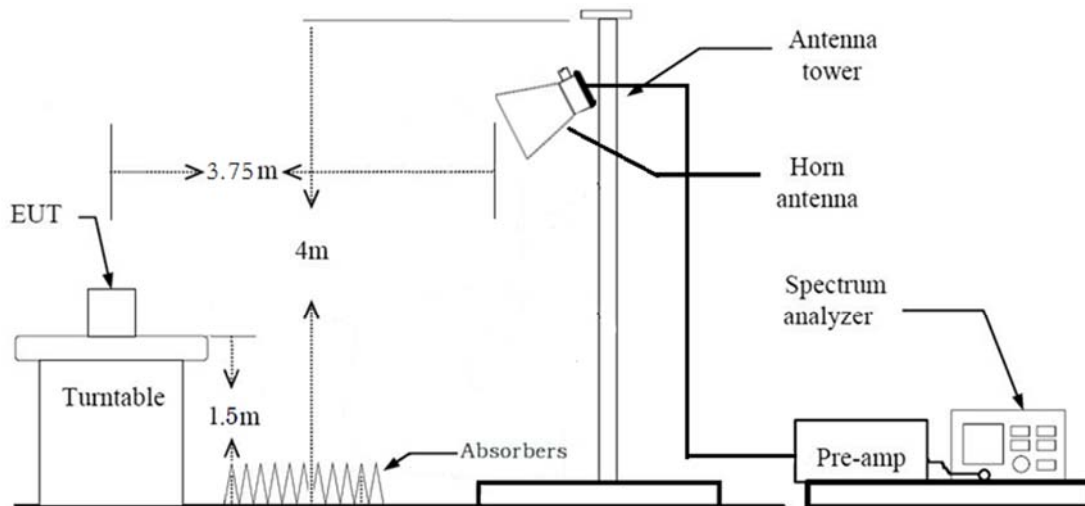

### Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40 \cdot \log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40 \cdot \log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq 3 \cdot$ RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

### **KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

(Worst case: semi-anechoic chamber(10 m chamber))

### **Test Procedure of Radiated spurious emissions(Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
  
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq$  3\*RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz

\*In general, (1) is used mainly

6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)



### **Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).  
\*Distance extrapolation factor =  $20 \cdot \log(\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
  - (1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep Time = auto
    - Trace mode = max hold
    - Allow sweeps to continue until the trace stabilizes.Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where x is the duty cycle.
  - (2) Measurement Type(Average, G.6.d in KDB 789033 v02r01):
    - RBW = 1 MHz
    - VBW(Duty cycle  $\geq$  98 percent) =  $\text{VBW} \leq \text{RBW}/100$ (i.e., 10 kHz) but not less than 10 Hz.
    - VBW(Duty cycle is < 98 percent) =  $\text{VBW} \geq 1/T$ , where T is the minimum transmission duration.
    - The analyzer is set to linear detector mode.
    - Detector = Peak.
    - Sweep time = auto.
    - Trace mode = max hold.
    - Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of  $1/x$ , where x is the duty cycle.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
11. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
12. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

### Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).  
\*Distance extrapolation factor =  $20 \cdot \log(\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting

(1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where x is the duty cycle.

(2) Measurement Type(Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle  $\geq$  98 percent) =  $\text{VBW} \leq \text{RBW}/100$ (i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 percent) =  $\text{VBW} \geq 1/T$ , where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of  $1/x$ , where x is the duty cycle.

10. Measured Frequency Range :

- 4500MHz ~ 5150MHz
- 5350MHz ~ 5460MHz
- 5460MHz ~ 5470MHz
- (75 MHz or more below the 5725MHz) ~ 5725MHz
- 5850MHz ~ (75 MHz or more above the 5850MHz)

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

**The actual setting value of VBW**

Mode	Worst Data rate (Mbps)	Duty Cycle	Duty Cycle Factor (dB)	The actual setting value of VBW (Hz)
802.11a	6	0.934	0.297	1000
802.11n(HT20)	MCS 0	0.928	0.323	1000
802.11n(HT40)	MCS 0	0.868	0.614	3000
802.11ac(VHT20)	MCS 0	0.931	0.313	1000
802.11ac(VHT40)	MCS 0	0.868	0.616	3000
802.11ac(VHT80)	MCS 0	0.766	1.155	10000

### 8.8. Receiver Spurious Emissions

**Limit**


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:


Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

### Test Configuration

30 MHz - 1 GHz

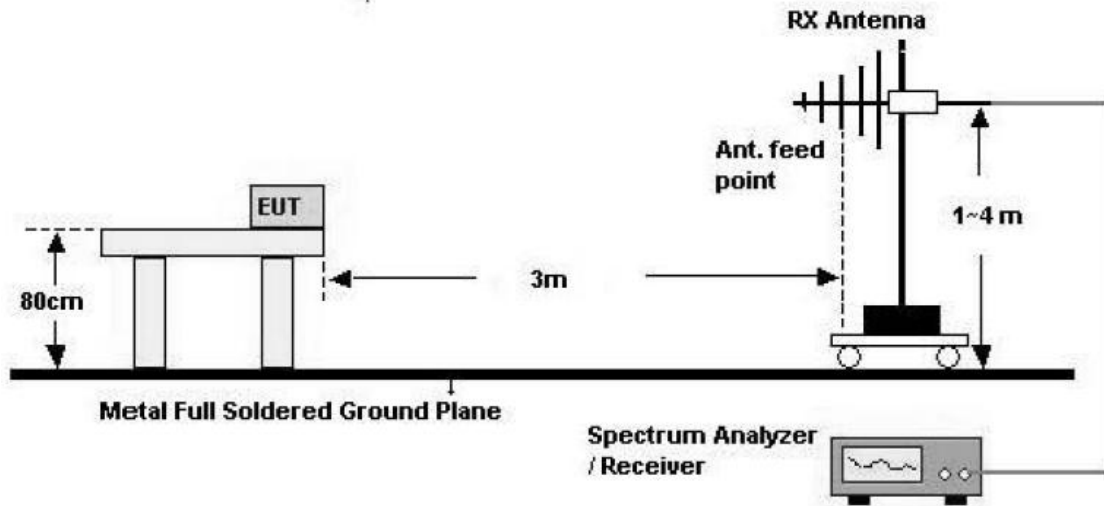

Above 1 GHz

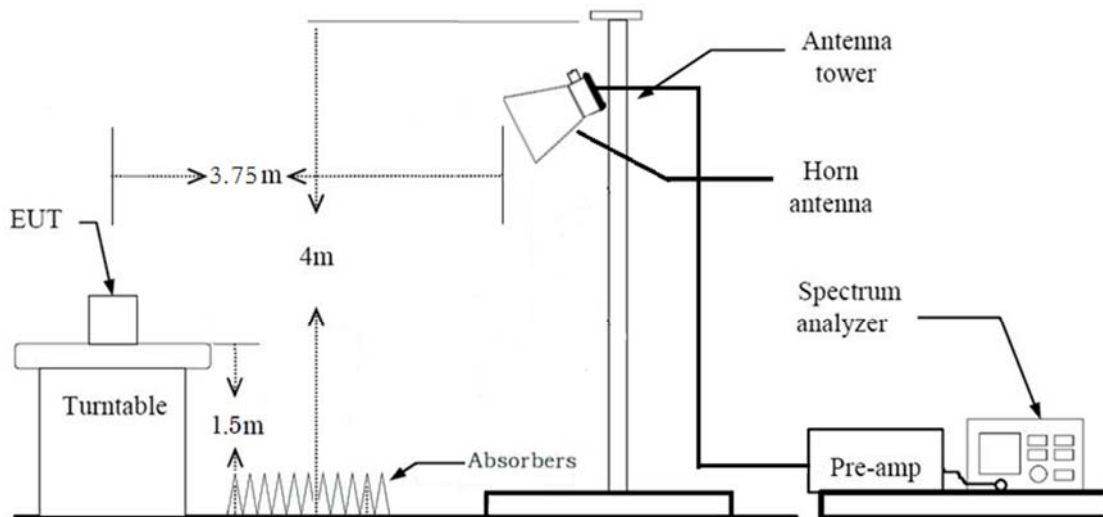

### **Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).  
\*Distance extrapolation factor =  $20 \cdot \log(\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq 3 \cdot$ RBW
  - (2) Measurement Type(Average):
    - We performed using a reduced video BW method was done with the analyzer in linear mode
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds
    - The actual setting value of VBW = 1 kHz
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

## 8.9. Worst case configuration and mode

### Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone
2. EUT Axis
  - Radiated Spurious Emissions : X
  - Radiated Restricted Band Edge : X
3. All datarate of operation were investigated and the worst case datarate results are reported
  - 802.11a : 6Mbps
  - 802.11n : MCS0
  - 802.11ac : MCS0
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane
5. ATB31EYAN & ATB30EYAN were tested and the worst case results are reported.  
(Worst case : ATB31EYAN)

### AC Power line Conducted Emissions

1. We don't perform powerline conducted emission test. Because this EUT is used with vehicle.

### Conducted test

1. All datarate of operation were investigated and the worst case datarate results are reported
2. ATB31EYAN & ATB30EYAN were tested and the worst case results are reported.  
(Worst case : ATB31EYAN)



## 9. SUMMARY OF TEST RESULTS

### FCC

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
26dB Bandwidth	§ 15.407 (for Power Measurement)	N/A	Conducted	PASS
6 dB Bandwidth	§ 15.407(e)	>500 kHz (5725-5850 MHz)		PASS
Maximum Conducted Output Power	§ 15.407(a)(1)	< 250 mW(5150-5250 MHz)  < 250 mW or 11+10 log log <sub>10</sub> (BW) dBm (5250-5350 MHz)  < 250 mW or 11+10 log log <sub>10</sub> (BW) dBm (5470-5725 MHz)  <1 W(5725-5850 MHz)		PASS
Peak Power Spectral Density	§ 15.407(a)(1),(5)	<11 dBm/ MHz (5150-5250 MHz) <11 dBm/ MHz (5250-5350 MHz) <11 dBm/ MHz (5470-5725 MHz) <30 dBm/500 kHz(5725-5850 MHz)		PASS
Frequency Stability	§ 15.407(g) § 2.1055	Maintained within the band		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.207	<FCC 15.207 limits		N/A
Undesirable Emissions	§ 15.407(b)	<-27 dBm/MHz EIRP (UNII1, 2A, 2C) cf. Section 8.7 (UNII 3)		Radiated
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(5), (6)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	PASS	

## IC

Test Description	IC Part Section(s)	Test Limit	Test Condition	Test Result
99% Bandwidth	RSS-GEN, 6.7	N/A	CONDUCTED	PASS
6 dB Bandwidth	RSS-247, 6.2.4.1	> 500 kHz (5725~5850 MHz)		PASS
Maximum Conducted Output Power,	RSS-247, 6.2	< 250 mW or $11+10 \log_{10}$ (BW) dBm (5470-5600, 5650-5725 MHz) Whichever power is less		PASS
	RSS-247, 6.2.4.1	<1 W (5725-5850 MHz)		
Maximum e.i.r.p	RSS-247, 6.2	< 30 mW or $1.76+10 \log_{10}$ (BW) dBm (5150-5250 MHz) < 30 mW or $1.76+10 \log_{10}$ (BW) dBm (5250-5350 MHz) < 1 W or $17+10 \log_{10}$ (BW) dBm (5470-5725 MHz) Whichever power is less		PASS
Power Spectral Density	RSS-247 6.2	<10 dBm/ MHz(e.i.r.p.) (5150-5250 MHz) <11 dBm/MHz(Conducted) (5250-5350 MHz, 5470-5600 MHz, 5650-5725 MHz)		PASS
	RSS-247, 6.2.4.1	<30 dBm/500 kHz(Conducted) (5725-5850 MHz)		
Frequency Stability	RSS-GEN 8.11	should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation.		PASS
AC Conducted Emissions 150 kHz-30 MHz	RSS-GEN, 8.8	RSS-GEN section 8.8 table 4		N/A
Undesirable Emissions	RSS-247, 6.2.1.2	26 dBc at 5250~5350 MHz (5150~5350 MHz)	PASS	
	RSS-247, 6.2	<-27 dBm/ MHz EIRP (5150-5350 MHz, 5470-5725 MHz)	PASS	
	RSS-247, 6.2.4.2	cf. Section 9.8.1 (UNII 3)		
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	RSS-Gen, 8.9 RSS-Gen, 8.10	RSS-Gen section 8.9 table 5, 6 section 8.10 table 7	RADIATED	PASS
Receiver Spurious Emissions	RSS-GEN, 5 RSS-GEN, 7.3	RSS-GEN section 7.3 table 3	PASS	

## 10. TEST RESULT

### 10.1 DUTY CYCLE


Mode	Data Rate (Mbps)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11a	6	1.429	1.530	0.934	0.297
	9	0.959	1.062	0.903	0.444
	12	0.723	0.825	0.877	0.569
	18	0.493	0.594	0.830	0.808
	24	0.372	0.473	0.787	1.040
	36	0.256	0.357	0.715	1.454
	48	0.196	0.298	0.659	1.809
	54	0.180	0.281	0.639	1.943

Mode	MCS Index	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11n (HT20)	0	1.336	1.439	0.928	0.323
	1	0.688	0.789	0.872	0.596
	2	0.472	0.573	0.824	0.843
	3	0.364	0.465	0.782	1.067
	4	0.256	0.357	0.716	1.451
	5	0.200	0.301	0.664	1.781
	6	0.185	0.286	0.646	1.900
	7	0.168	0.270	0.622	2.061
802.11n (HT40)	0	0.664	0.765	0.868	0.614
	1	0.352	0.453	0.777	1.097
	2	0.248	0.349	0.710	1.487
	3	0.197	0.298	0.660	1.804
	4	0.144	0.246	0.588	2.310
	5	0.116	0.218	0.534	2.722
	6	0.108	0.209	0.516	2.873
	7	0.100	0.201	0.497	3.037

Mode	MCS Index	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11ac (VHT20)	0	1.344	1.445	0.931	0.313
	1	0.690	0.793	0.871	0.601
	2	0.476	0.577	0.824	0.838
	3	0.368	0.469	0.784	1.056
	4	0.260	0.362	0.718	1.438
	5	0.204	0.305	0.668	1.750
	6	0.188	0.290	0.651	1.867
	7	0.172	0.274	0.627	2.025
	8	0.152	0.253	0.600	2.216
802.11ac (VHT40)	0	0.668	0.770	0.868	0.616
	1	0.356	0.457	0.779	1.086
	2	0.252	0.354	0.714	1.466
	3	0.200	0.301	0.664	1.781
	4	0.148	0.249	0.595	2.254
	5	0.120	0.221	0.542	2.660
	6	0.112	0.214	0.526	2.790
	7	0.104	0.205	0.506	2.958
	8	0.096	0.197	0.488	3.120
	9	0.088	0.190	0.463	3.340
802.11ac (VHT80)	0	0.332	0.433	0.766	1.155
	1	0.188	0.289	0.651	1.867
	2	0.140	0.241	0.581	2.360
	3	0.116	0.218	0.535	2.719
	4	0.092	0.193	0.476	3.220
	5	0.080	0.181	0.443	3.539
	6	0.076	0.177	0.430	3.668
	7	0.072	0.173	0.416	3.812
	8	0.068	0.169	0.403	3.947
	9	0.064	0.165	0.389	4.106

**Note:**

In order to simplify the report, attached plots were only lowest datarate.

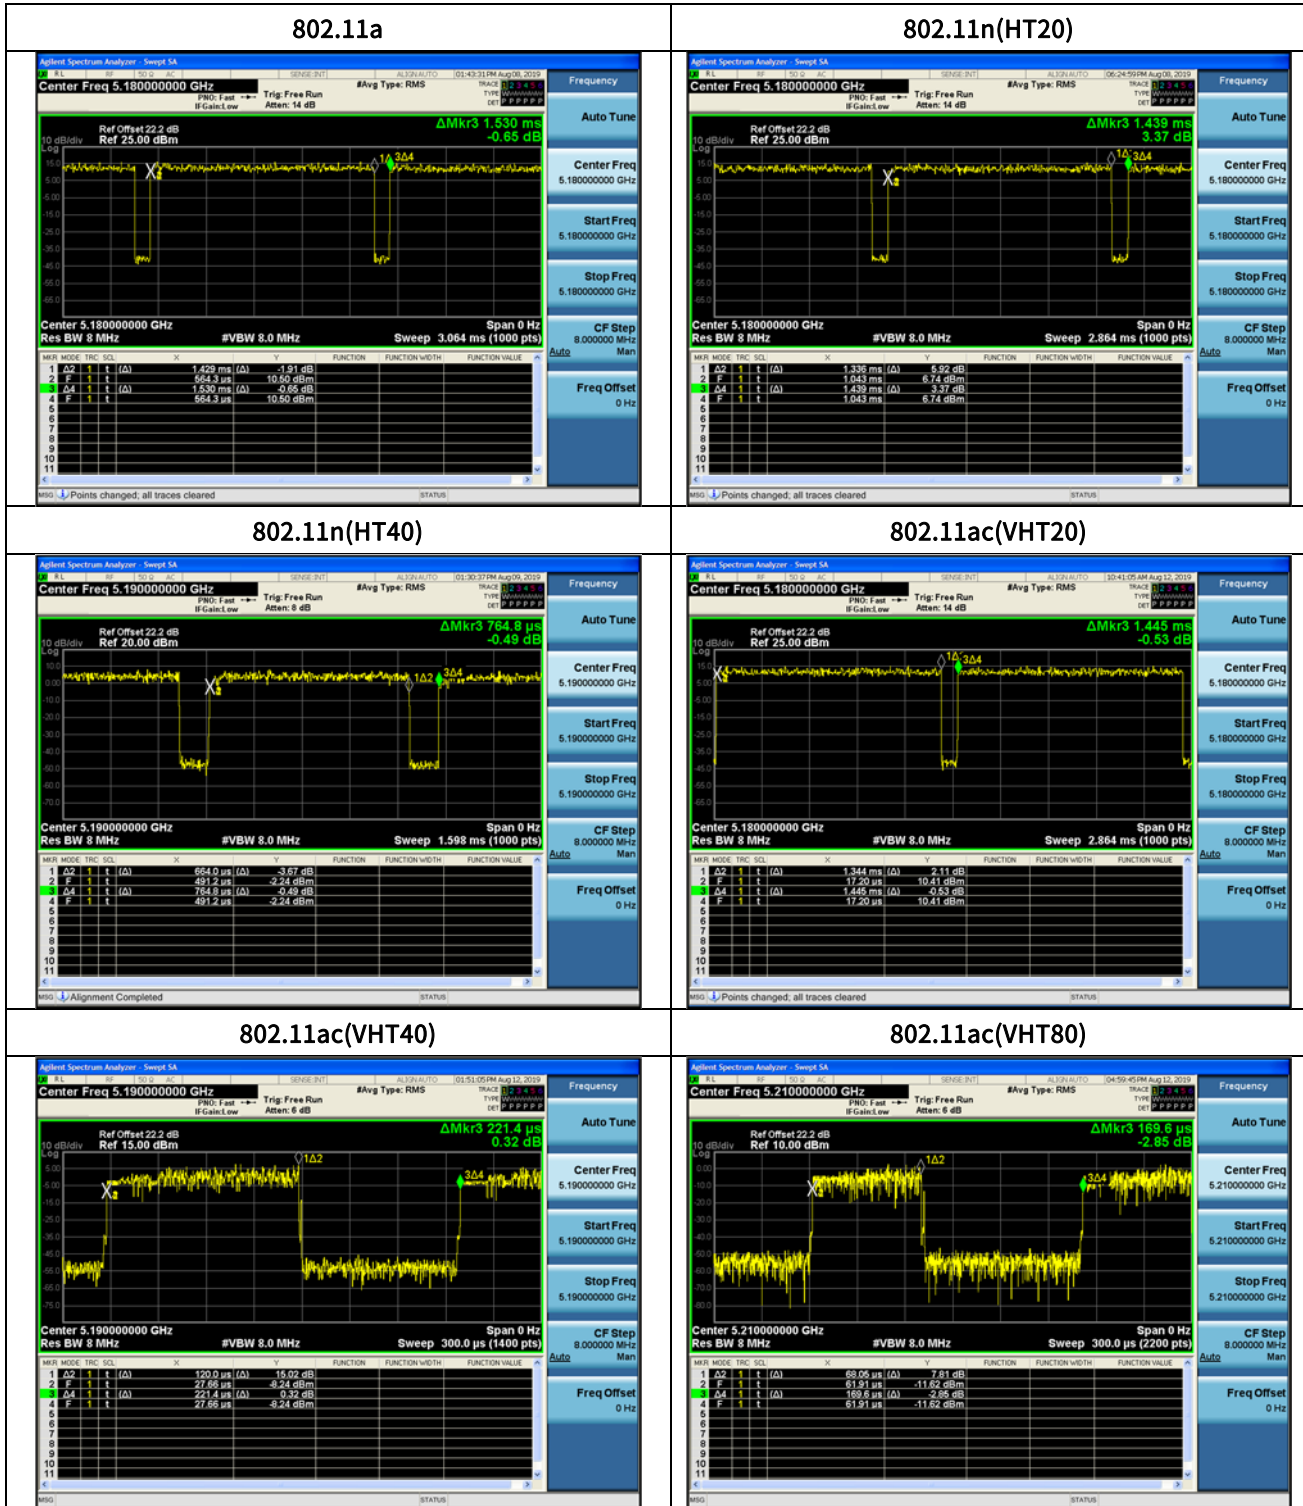

**10.2 26DB BANDWIDTH & 99 % BANDWIDTH**

802.11a Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	21.08	16.642
5200	40	20.88	16.614
5240	48	21.02	16.644
5260	52	20.98	16.623
5300	60	21.20	16.654
5320	64	20.89	16.607
5500	100	20.87	16.617
5600	120	20.90	16.586
5720	144	20.86	16.645
5745	149	20.92	16.612
5785	157	20.93	16.618
5825	165	20.89	16.614

802.11n(HT20) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	21.34	17.798
5200	40	21.19	17.763
5240	48	21.19	17.776
5260	52	21.03	17.805
5300	60	21.30	17.828
5320	64	21.55	17.786
5500	100	21.27	17.771
5600	120	21.29	17.756
5720	144	21.35	17.775
5745	149	21.52	17.757
5785	157	21.27	17.787
5825	165	21.56	17.785

802.11n(HT40) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5190	38	39.41	36.186
5230	46	39.63	36.139
5270	54	39.49	36.050
5310	62	39.61	36.142
5510	102	39.53	36.180
5590	118	39.58	36.107
5710	142	39.50	36.113
5755	151	39.49	36.093
5795	159	39.26	36.085

802.11ac(VHT20) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	21.50	17.777
5200	40	21.26	17.810
5240	48	21.27	17.772
5260	52	21.38	17.781
5300	60	21.45	17.775
5320	64	21.15	17.720
5500	100	21.00	17.829
5600	120	21.22	17.765
5720	144	21.39	17.733
5745	149	21.19	17.750
5785	157	21.29	17.735
5825	165	21.14	17.753

802.11ac(VHT40) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5190	38	39.52	36.165
5230	46	39.32	36.037
5270	54	39.45	36.018
5310	62	39.25	36.102
5510	102	39.76	36.190
5590	118	39.55	36.137
5710	142	39.52	36.143
5755	151	39.34	36.135
5795	159	39.26	36.089


802.11ac(VHT80) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5210	42	81.35	75.473
5290	58	80.89	75.457
5530	106	80.78	75.475
5690	138	81.07	75.418
5775	155	80.99	75.549



■ Test Plots(802.11a)

Note:


In order to simplify the report, attached plots were only the most wide channel.

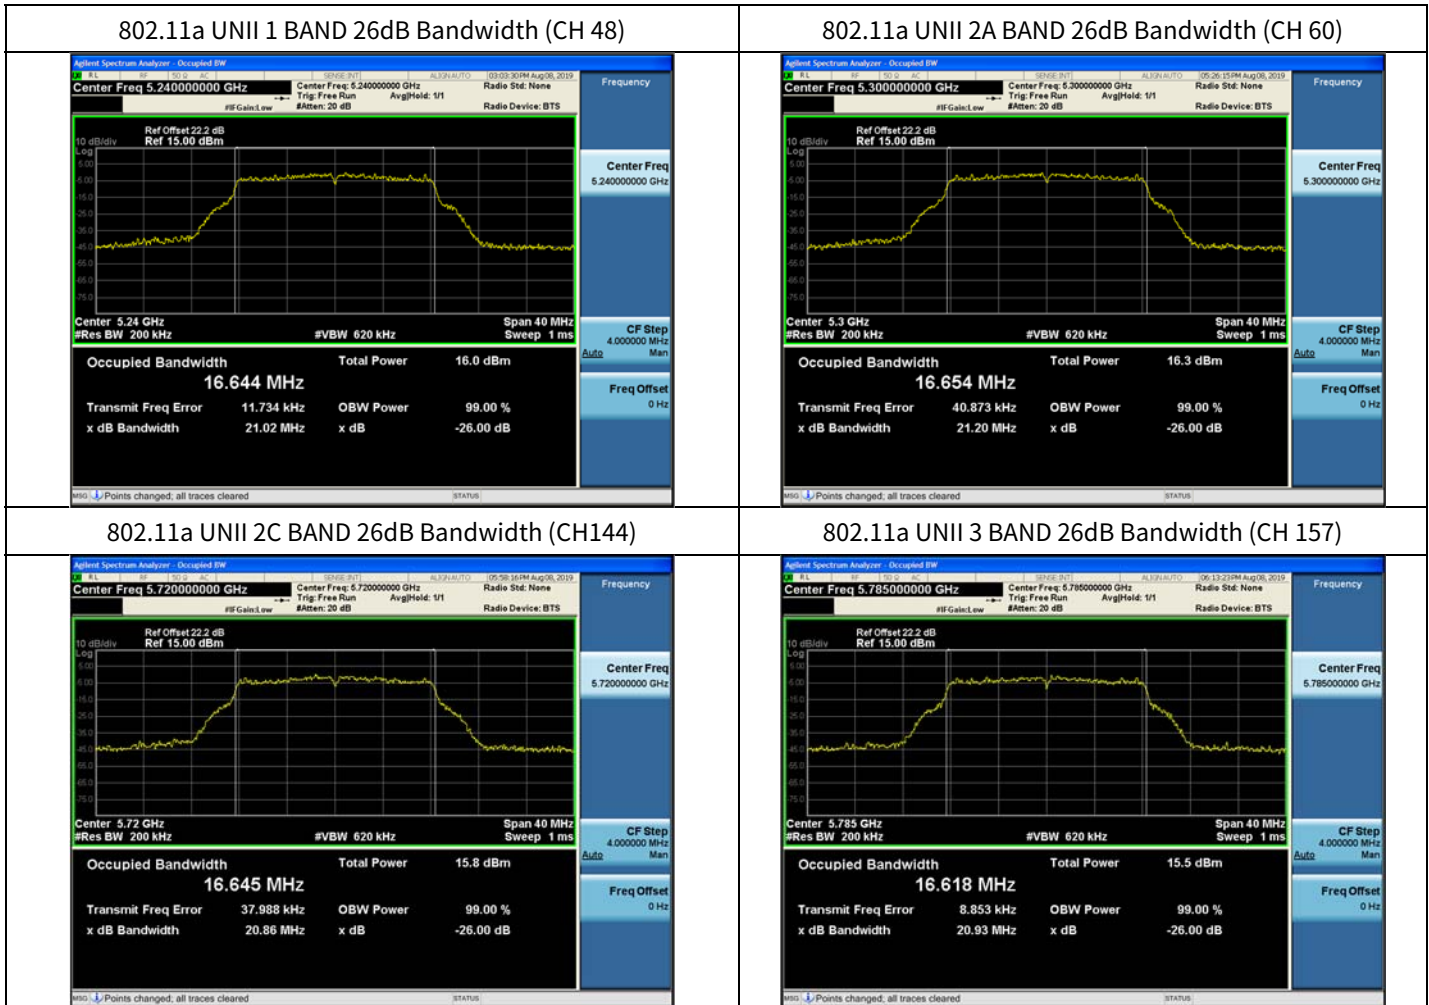

▣ Test Plots(802.11n(HT20))

Note:


In order to simplify the report, attached plots were only the most wide channel.

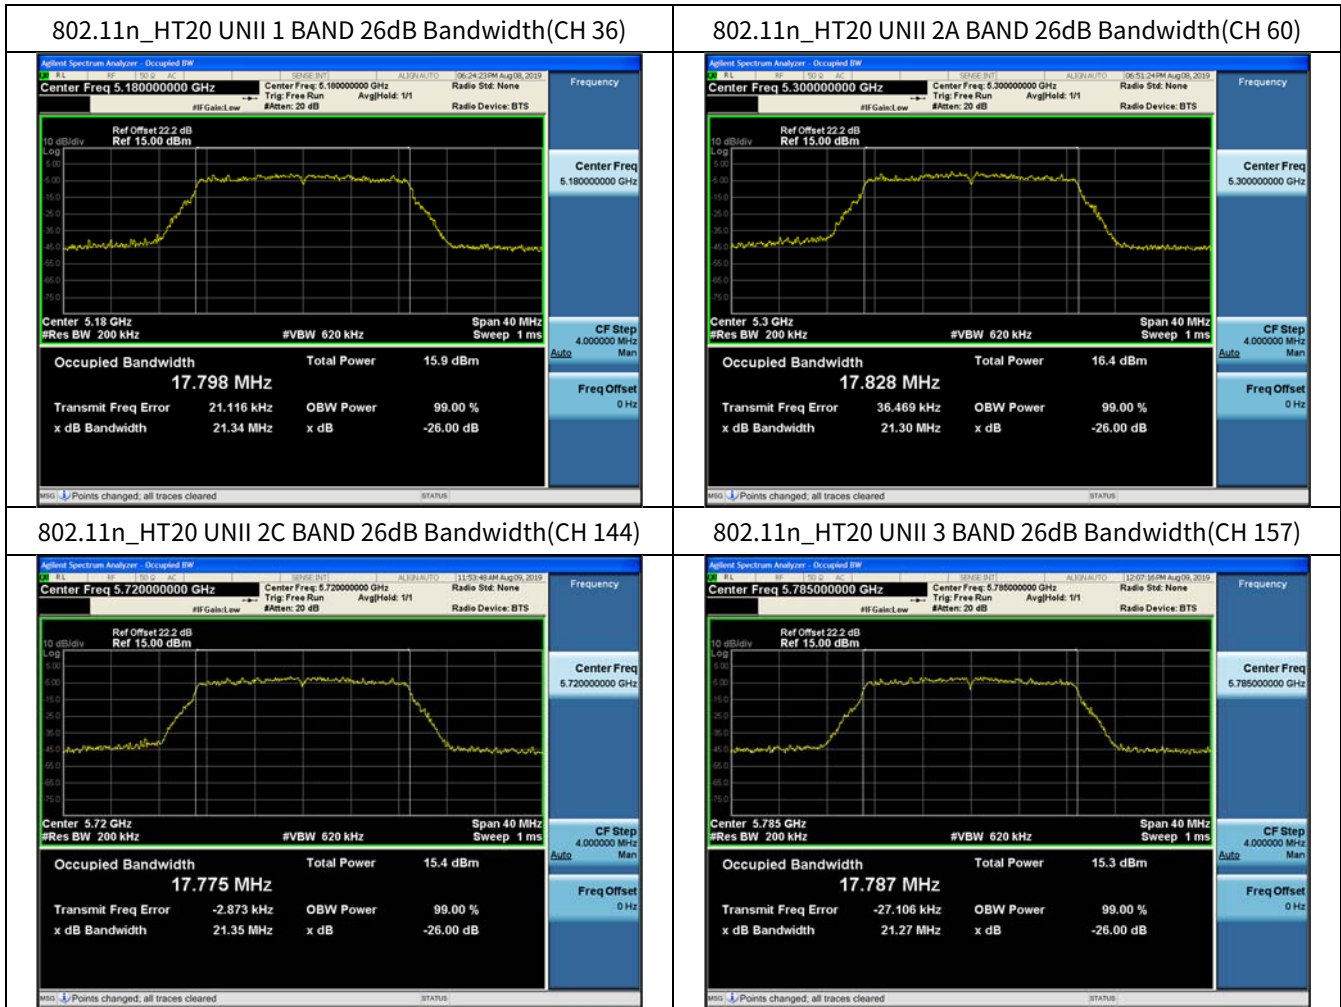

▣ Test Plots(802.11n(HT40))

Note:


In order to simplify the report, attached plots were only the most wide channel.

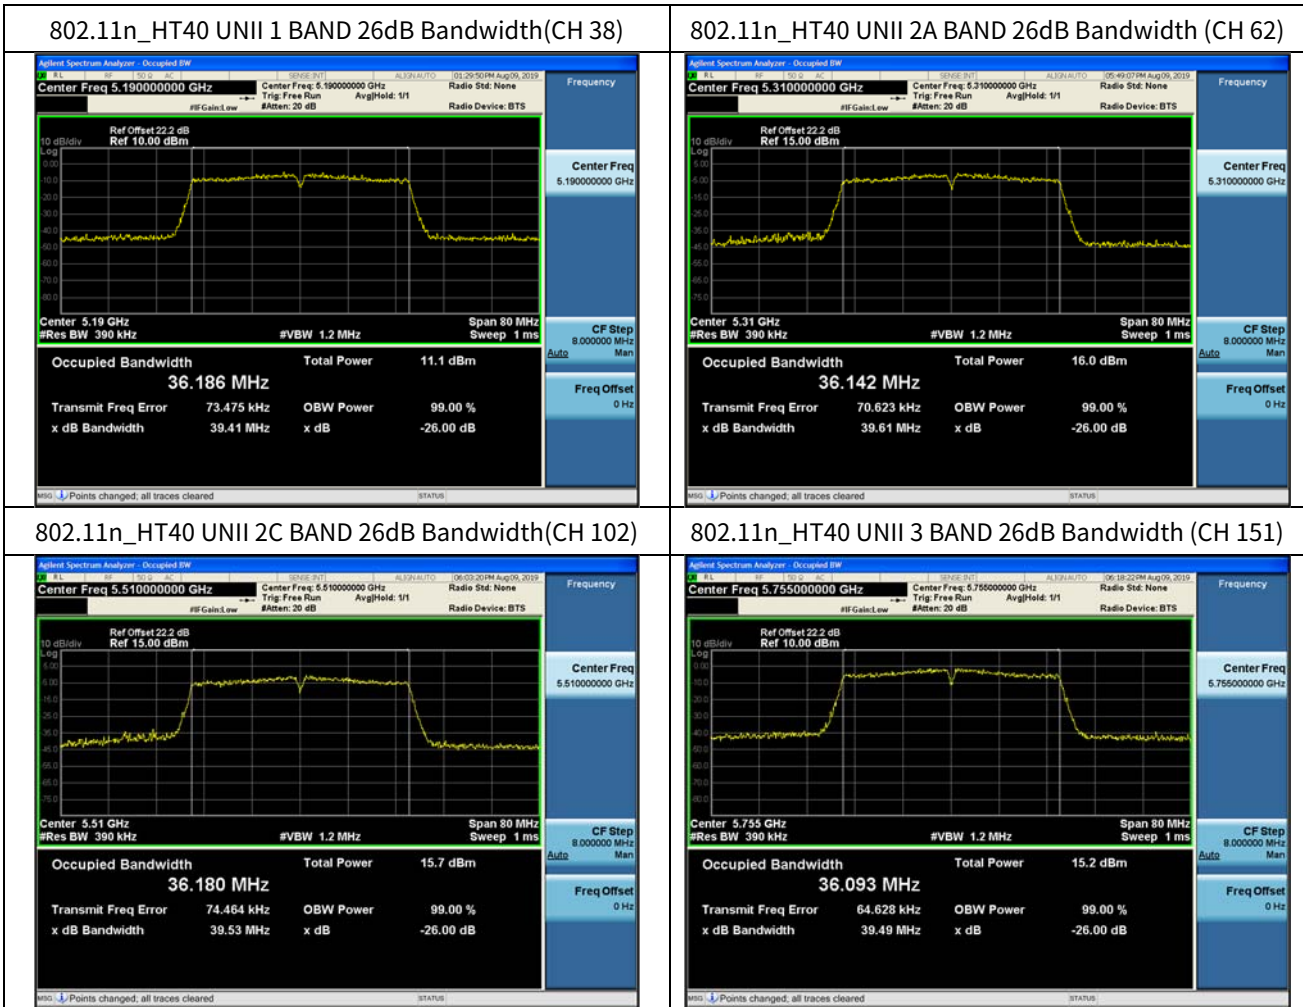

▣ Test Plots(802.11ac(VHT20))

Note:


In order to simplify the report, attached plots were only the most wide channel.

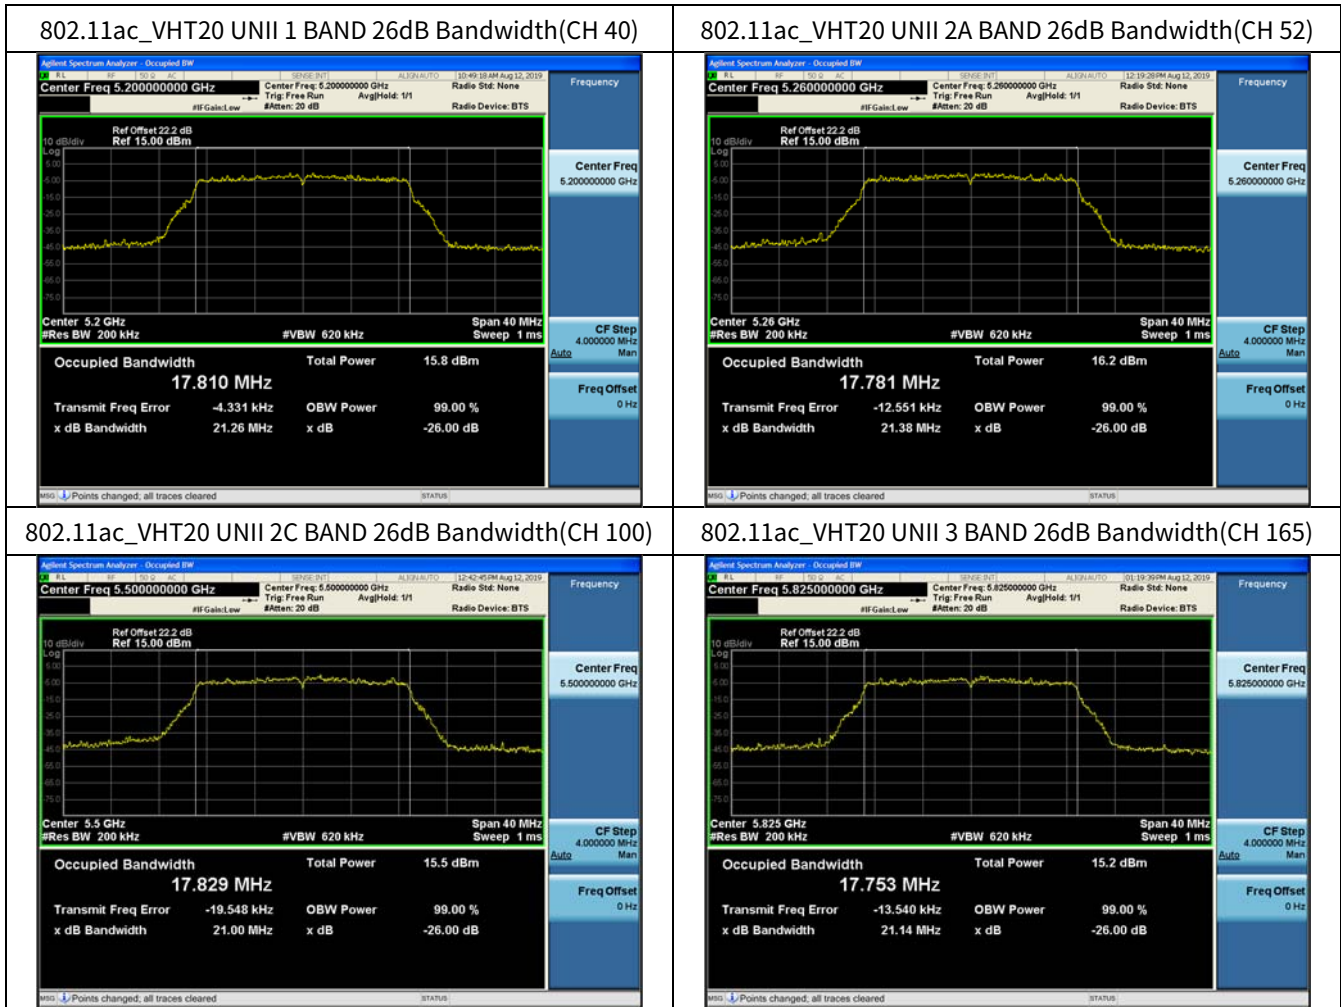

▣ Test Plots(802.11ac(VHT40))

Note:


In order to simplify the report, attached plots were only the most wide channel.

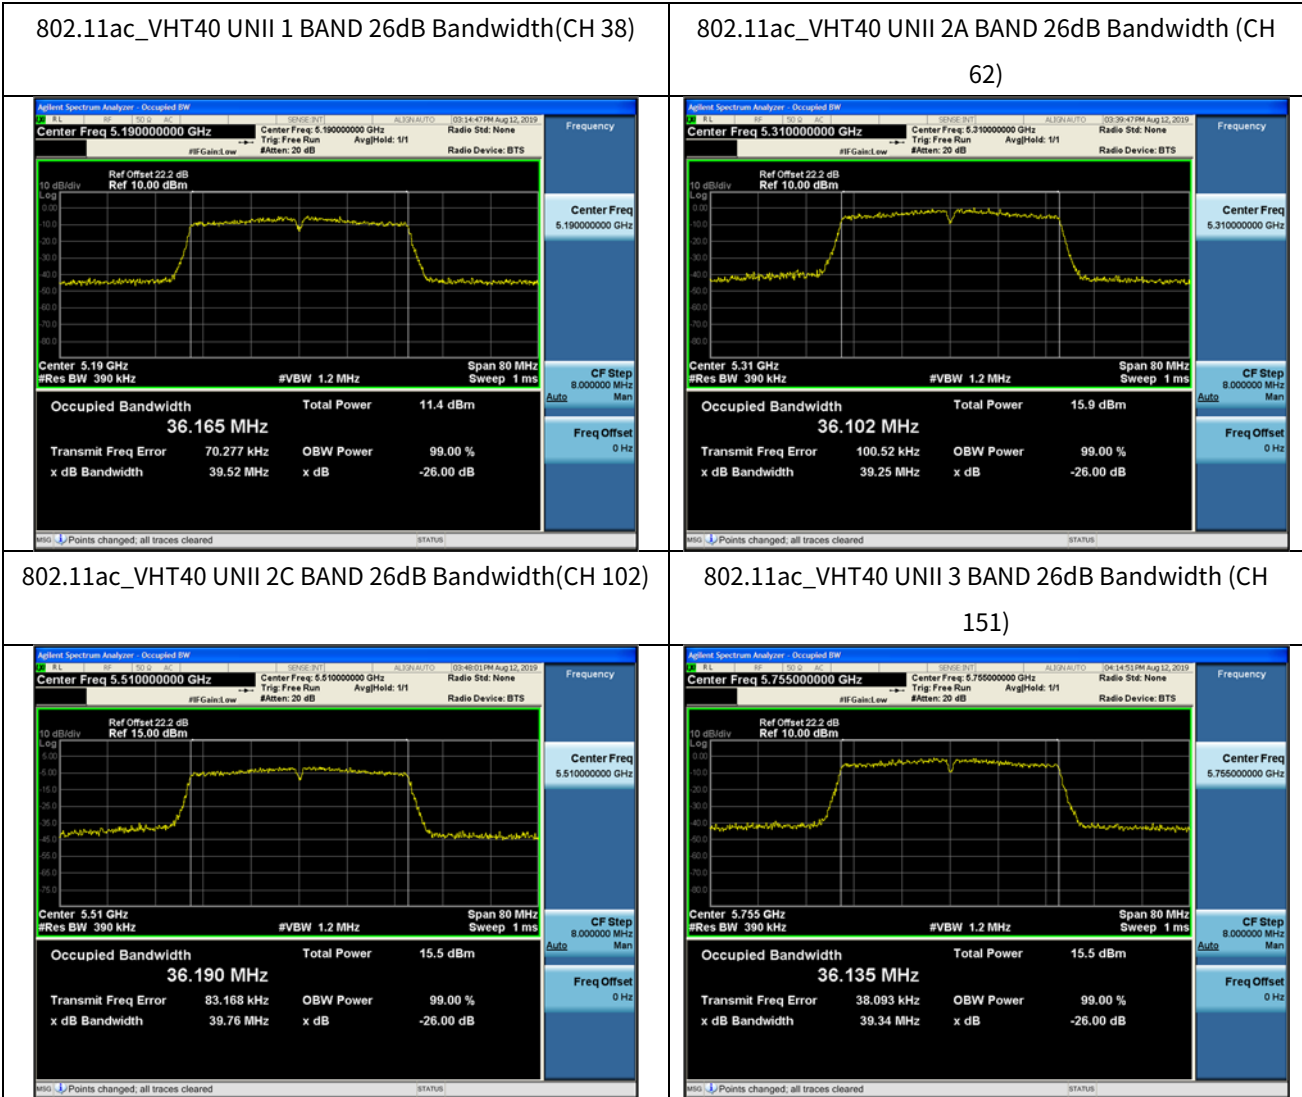

■ Test Plots(802.11ac(VHT80))

Note:

In order to simplify the report, attached plots were only the most wide channel.

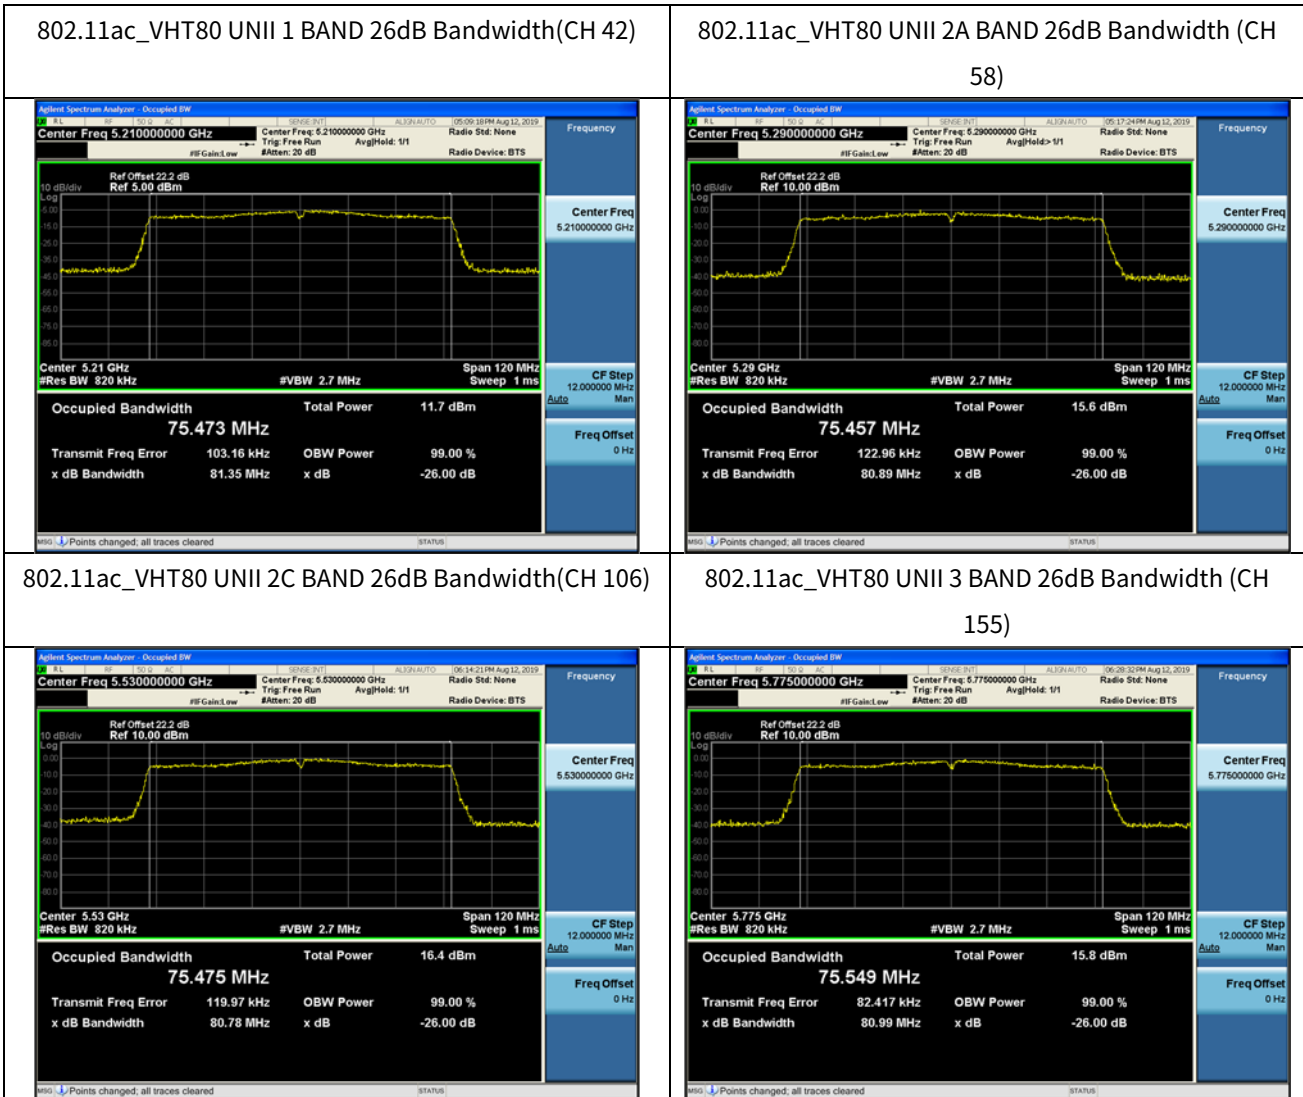

**10.3 6DB BANDWIDTH**

802.11a Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	16.37	> 0.5	Pass
5785	157	16.33	> 0.5	Pass
5825	165	16.35	> 0.5	Pass

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.19	> 0.5	Pass
5785	157	17.32	> 0.5	Pass
5825	165	17.58	> 0.5	Pass

802.11n(HT40) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	35.62	> 0.5	Pass
5795	159	35.53	> 0.5	Pass

802.11ac(VHT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.34	> 0.5	Pass
5785	157	17.64	> 0.5	Pass
5825	165	16.93	> 0.5	Pass


802.11ac(VHT40) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	35.41	> 0.5	Pass
5795	159	35.54	> 0.5	Pass

802.11ac(VHT80) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5775	155	75.33	> 0.5	Pass



▣ Test Plots

**Note:** In order to simplify the report, attached plots were only the most narrow channel.

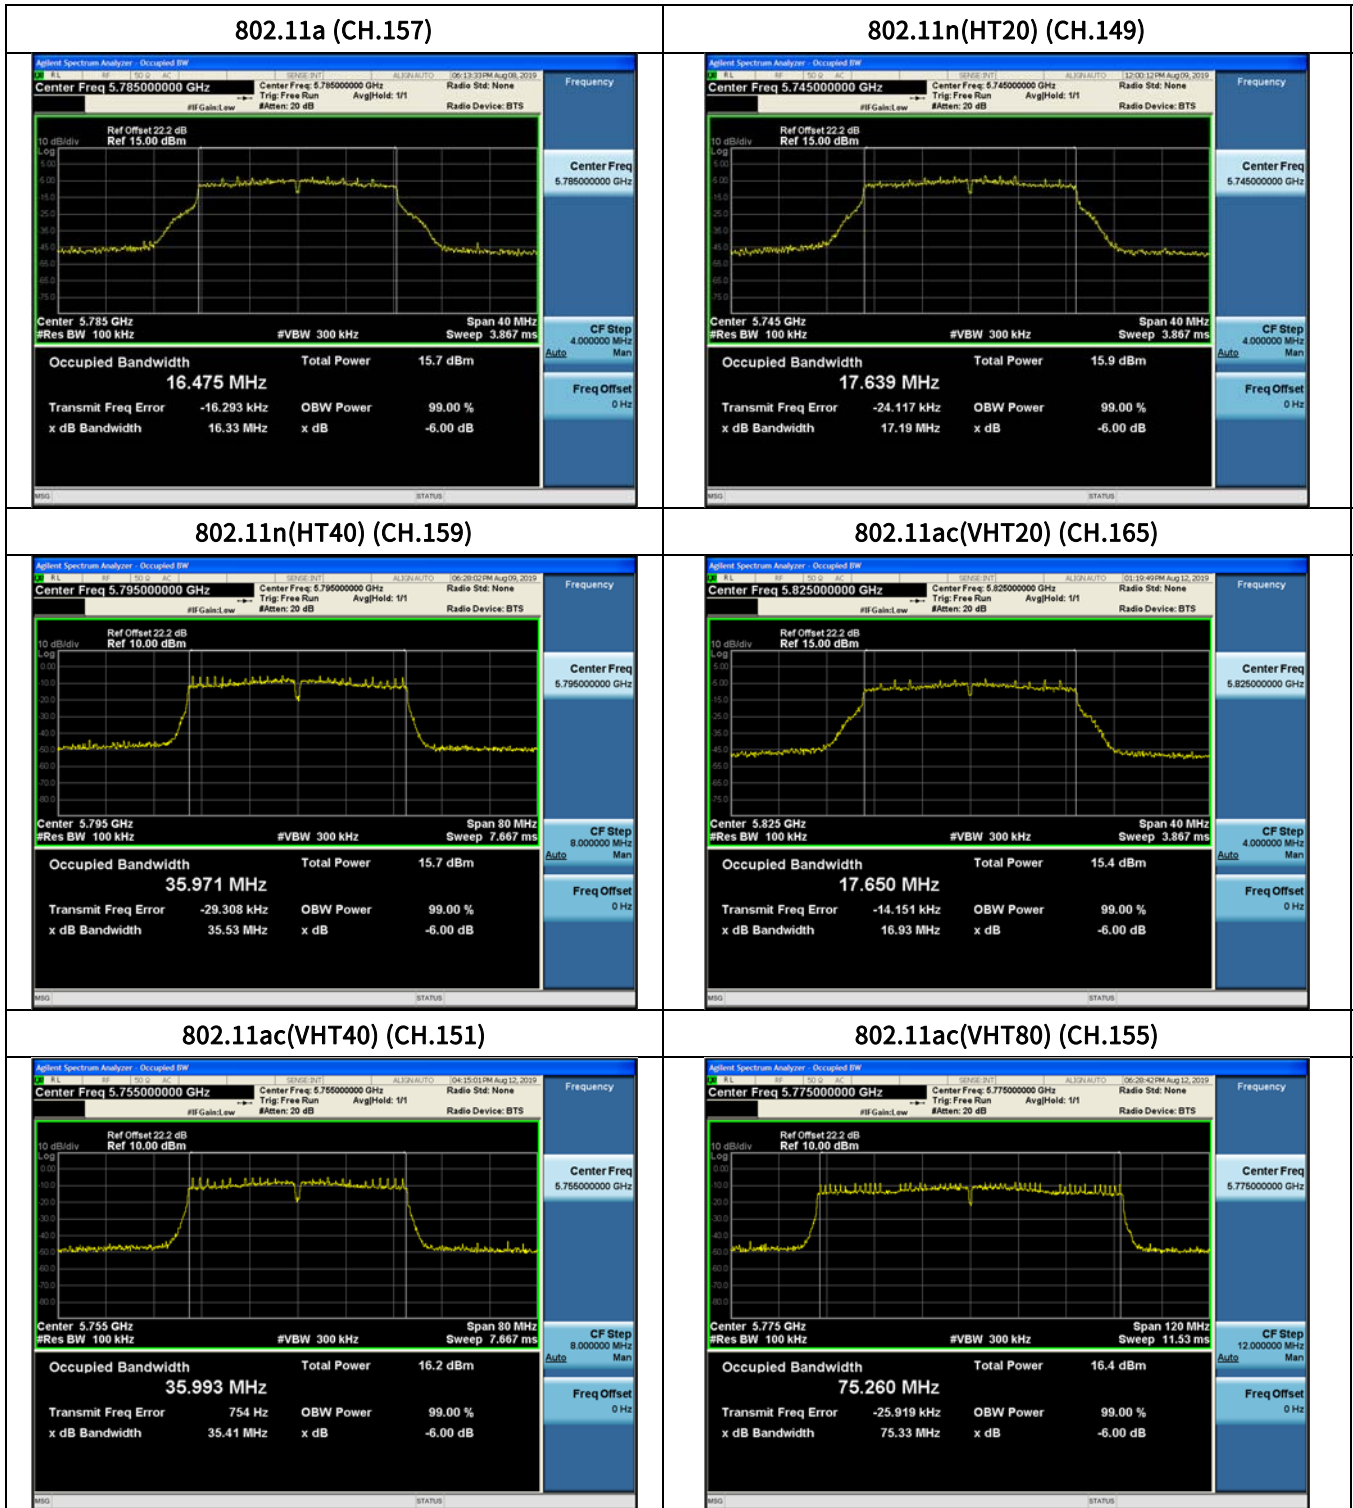

### 10.4 OUTPUT POWER MEASUREMENT

802.11a Mode		Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Ant Gain [dBi]	EIPR	Limit (dBm)
Frequency [MHz]	Channel No.						
5180	36	8.80	0.30	9.10	3.51	12.61	14.09
5200	40	8.76	0.57	9.33	3.51	12.84	14.09
5240	48	9.17	0.30	9.47	3.51	12.98	14.09
5260	52	9.53	0.30	9.82	3.12	12.94	14.09
5300	60	9.28	0.57	9.85	3.12	12.97	14.09
5320	64	9.47	0.30	9.77	3.12	12.89	14.09
5500	100	9.29	0.30	9.58	-	-	23.33
5580	116	8.87	0.57	9.44	-	-	23.33
5720	144	8.99	0.30	9.28	-	-	23.33
5745	149	8.80	0.44	9.24	-	-	30.00
5785	157	8.37	0.57	8.94	-	-	30.00
5825	165	8.42	0.57	8.99	-	-	30.00

802.11n(20MHz) Mode		Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Ant Gain [dBi]	EIPR	Limit (dBm)
Frequency [MHz]	Channel No.						
5180	36	8.41	0.84	9.25	3.51	12.76	14.09
5200	40	8.68	0.84	9.52	3.51	13.03	14.09
5240	48	9.22	0.32	9.55	3.51	13.06	14.09
5260	52	9.41	0.32	9.74	3.12	12.86	14.09
5300	60	9.33	0.32	9.65	3.12	12.77	14.09
5320	64	8.83	0.84	9.67	3.12	12.79	14.09
5500	100	8.45	0.84	9.30	-	-	23.33
5580	116	8.72	0.60	9.32	-	-	23.33
5720	144	8.27	0.60	8.86	-	-	23.33
5745	149	8.12	0.84	8.97	-	-	30.00
5785	157	8.00	0.84	8.85	-	-	30.00
5825	165	7.96	0.60	8.56	-	-	30.00

802.11n(40MHz) Mode		Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Ant Gain [dBi]	EIPR	Limit (dBm)
Frequency [MHz]	Channel No.						
5190	38	2.07	2.72	4.79	3.51	8.30	14.09
5230	46	2.65	2.31	4.96	3.51	8.47	14.09
5270	54	7.06	2.72	9.79	3.12	12.91	14.09
5310	62	6.78	2.72	9.51	3.12	12.63	14.09
5510	102	6.24	3.04	9.28	-	-	23.33
5550	110	8.47	0.61	9.08	-	-	23.33
5710	142	7.38	1.49	8.87	-	-	23.33
5755	151	5.94	2.87	8.81	-	-	30.00
5795	159	5.89	2.72	8.61	-	-	30.00

802.11ac(20MHz) Mode		Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Ant Gain [dBi]	EIPR	Limit (dBm)
Frequency [MHz]	Channel No.						
5180	36	8.42	0.31	8.73	3.51	12.24	14.09
5200	40	8.43	0.84	9.27	3.51	9.27	14.09
5240	48	8.70	0.60	9.30	3.51	9.30	14.09
5260	52	8.89	0.60	9.49	3.12	12.61	14.09
5300	60	8.82	0.60	9.43	3.12	12.55	14.09
5320	64	8.55	0.84	9.39	3.12	12.51	14.09
5500	100	8.48	0.60	9.08	-		23.33
5580	116	8.52	0.60	9.12	-		23.33
5720	144	8.66	0.60	9.27	-		23.33
5745	149	8.57	0.60	9.17	-		30.00
5785	157	8.26	0.60	8.86	-		30.00
5825	165	8.27	0.31	8.58	-		30.00

802.11ac(40MHz) Mode		Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Ant Gain [dBi]	EIPR	Limit (dBm)
Frequency [MHz]	Channel No.						
5190	38	4.15	0.62	4.77	3.51	8.28	14.09
5230	46	1.85	2.96	4.80	3.51	8.31	14.09
5270	54	6.19	3.12	9.31	3.12	12.43	14.09
5310	62	7.48	1.78	9.26	3.12	12.38	14.09
5510	102	5.70	3.34	9.04	-	-	23.33
5550	110	6.16	2.79	8.95	-	-	23.33
5710	142	7.68	1.09	8.77	-	-	23.33
5755	151	5.65	3.34	8.99	-	-	30.00
5795	159	5.78	2.96	8.74	-	-	30.00

802.11ac(80MHz) Mode		Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Ant Gain [dBi]	EIPR	Limit (dBm)
Frequency [MHz]	Channel No.						
5210	42	2.25	2.36	4.61	3.51	8.12	14.09
5290	58	6.03	2.36	8.39	3.12	11.51	14.09
5530	106	6.89	2.36	9.25	-	-	23.33
5690	138	7.70	1.16	8.86	-	-	23.33
5775	155	6.09	2.36	8.45	-	-	30.00

### 10.5 POWER SPECTRAL DENSITY

802.11a Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.				
5180	36	-1.240	0.297	-0.943	11
5200	40	-1.325	0.569	-0.756	11
5240	48	-0.772	0.297	-0.475	11
5260	52	-0.620	0.297	-0.323	11
5300	60	-0.656	0.569	-0.087	11
5320	64	-0.653	0.297	-0.356	11
5500	100	-1.226	0.297	-0.929	11
5580	116	-0.850	0.569	-0.281	11
5720	144	-1.250	0.297	-0.953	11
5745	149	-3.959	0.444	-3.515	30
5785	157	-4.362	0.569	-3.793	30
5825	165	-4.474	0.569	-3.905	30

802.11n(20MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.				
5180	36	-1.895	0.843	-1.052	11
5200	40	-1.601	0.843	-0.758	11
5240	48	-1.048	0.323	-0.725	11
5260	52	-0.546	0.323	-0.223	11
5300	60	-0.885	0.323	-0.562	11
5320	64	-1.521	0.843	-0.678	11
5500	100	-1.917	0.843	-1.074	11
5580	116	-1.709	0.596	-1.113	11
5720	144	-1.989	0.596	-1.393	11
5745	149	-4.520	0.843	-3.677	30
5785	157	-4.985	0.843	-4.142	30
5825	165	-5.089	0.596	-4.493	30

802.11n(40MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.				
5190	38	-11.347	2.722	-8.625	11
5230	46	-10.648	2.310	-8.338	11
5270	54	-6.145	2.722	-3.423	11
5310	62	-5.971	2.722	-3.249	11
5510	102	-6.637	3.037	-3.600	11
5590	118	-4.790	0.614	-4.176	11
5710	142	-6.959	2.722	-4.237	11
5755	151	-10.130	2.873	-7.257	30
5795	159	-9.722	2.722	-7.000	30

802.11ac(20MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.				
5180	36	-1.941	0.313	-1.628	11
5200	40	-1.728	0.838	-0.890	11
5240	48	-1.781	0.601	-1.180	11
5260	52	-1.297	0.601	-0.696	11
5300	60	-1.576	0.601	-0.975	11
5320	64	-1.790	0.838	-0.952	11
5500	100	-1.935	0.601	-1.334	11
5580	116	-1.787	0.601	-1.186	11
5720	144	-1.735	0.601	-1.134	11
5745	149	-4.242	0.601	-3.641	30
5785	157	-4.569	0.601	-3.968	30
5825	165	-4.846	0.313	-4.533	30


802.11ac(40MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.				
5190	38	-9.126	0.616	-8.510	11
5230	46	-10.734	2.958	-7.776	11
5270	54	-6.932	3.120	-3.812	11
5310	62	-5.633	1.781	-3.852	11
5510	102	-7.293	3.340	-3.953	11
5590	118	-7.065	2.790	-4.275	11
5710	142	-5.480	1.086	-4.394	11
5755	151	-9.870	3.340	-6.530	30
5795	159	-9.421	2.958	-6.463	30

802.11ac(80MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.				
5210	42	-13.721	2.360	-11.361	11
5290	58	-10.128	2.360	-7.768	11
5530	106	-8.785	2.360	-6.425	11
5690	138	-8.485	1.155	-7.330	11
5775	155	-12.105	2.360	-9.745	30

▣ Test Plots(802.11a)

Note:

In order to simplify the report, attached plots were only channel of highest power.

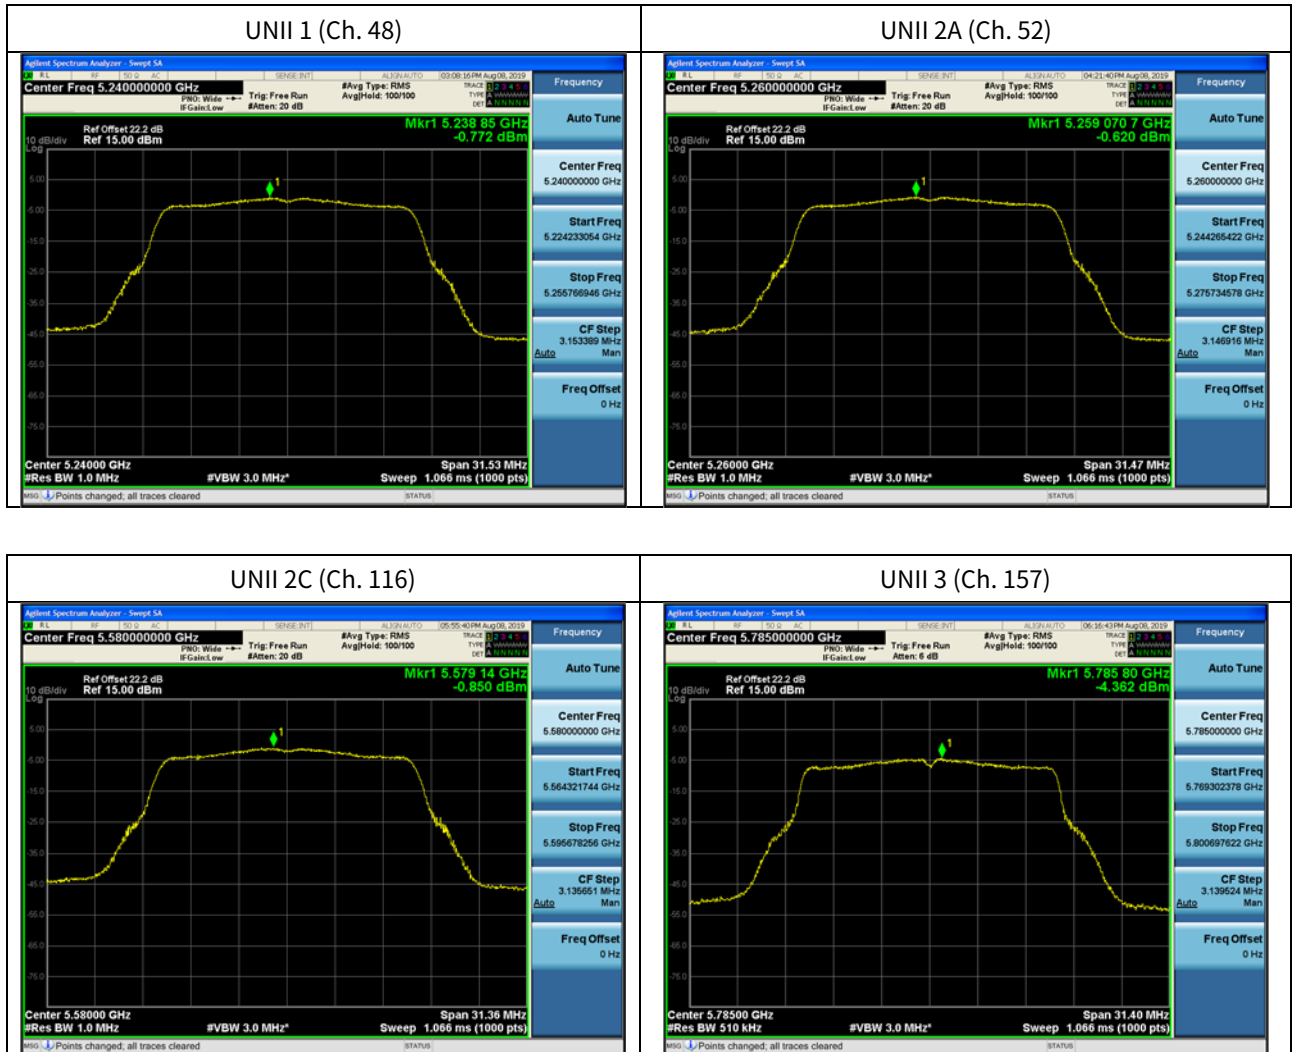




▣ Test Plots(802.11n(HT20))

Note:


In order to simplify the report, attached plots were only channel of highest power.

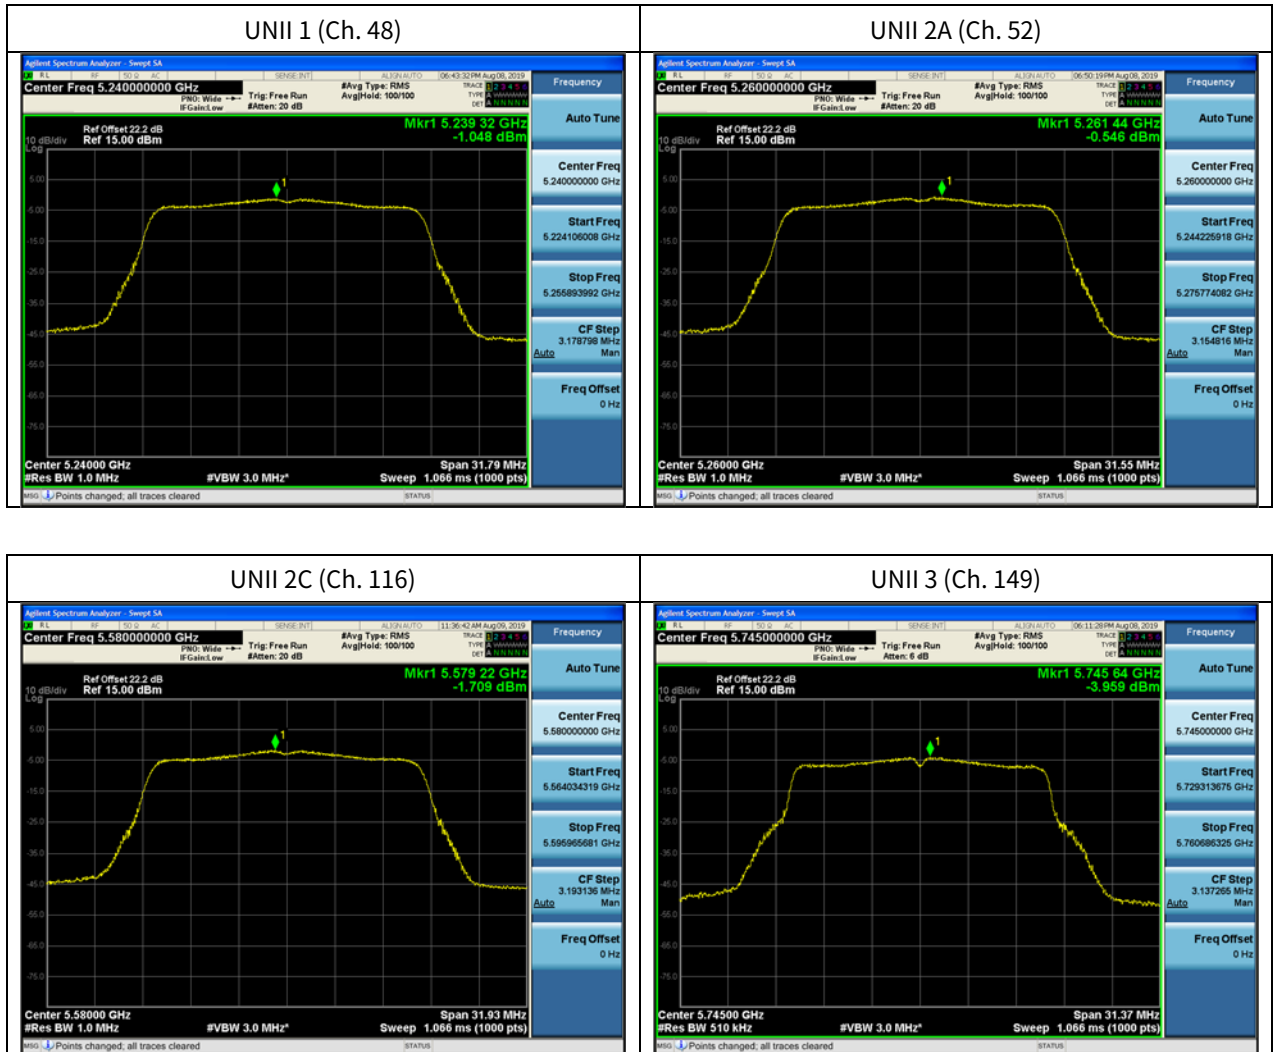

▣ Test Plots(802.11n(HT40))

Note:


In order to simplify the report, attached plots were only channel of highest power.

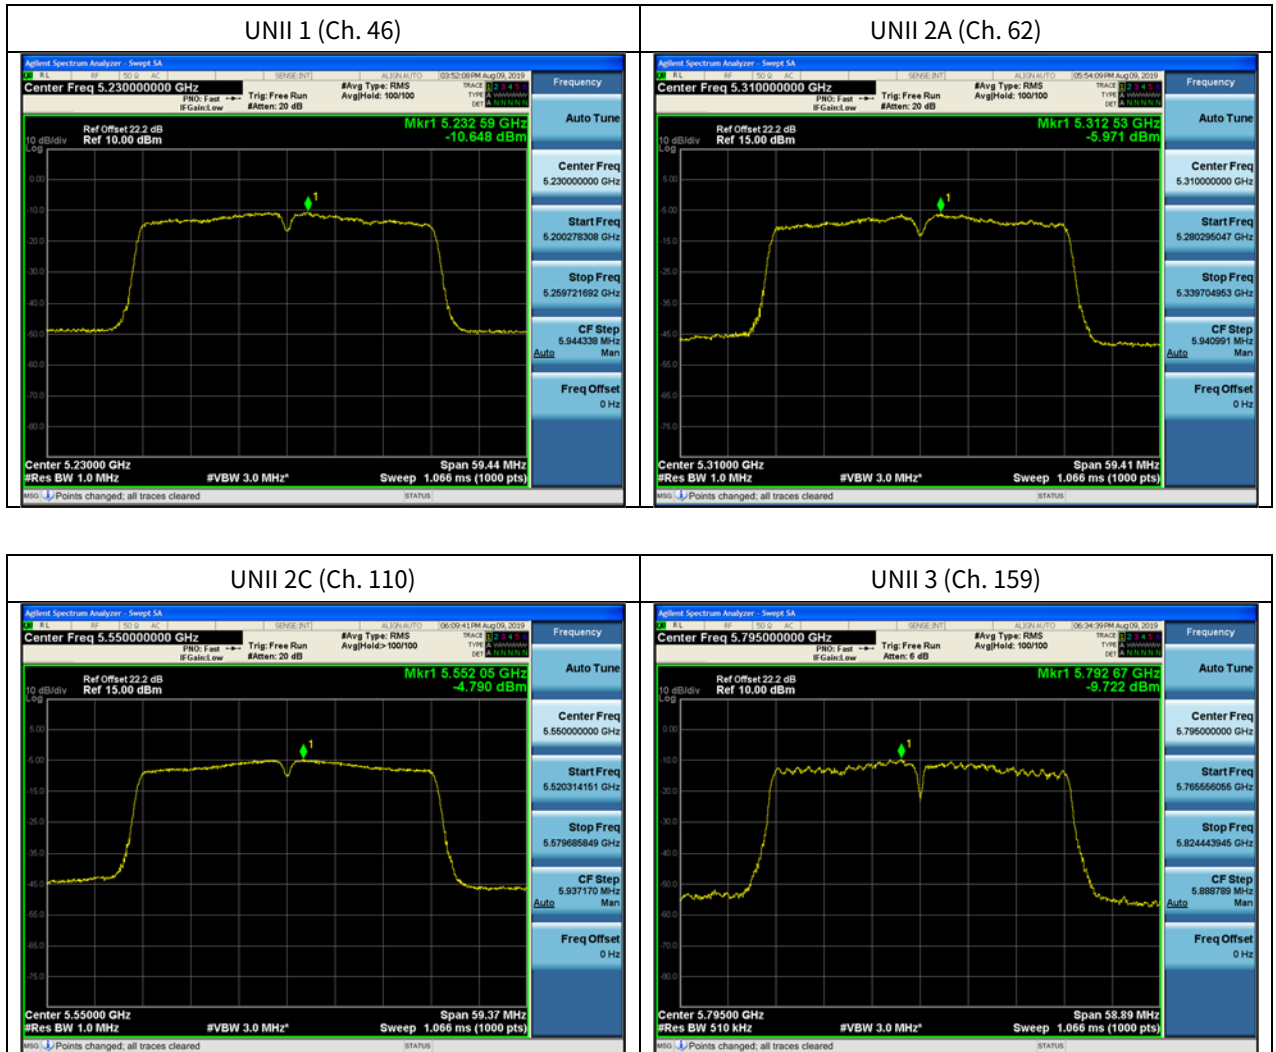

▣ Test Plots(802.11ac(VHT20))

Note:


In order to simplify the report, attached plots were only channel of highest power.

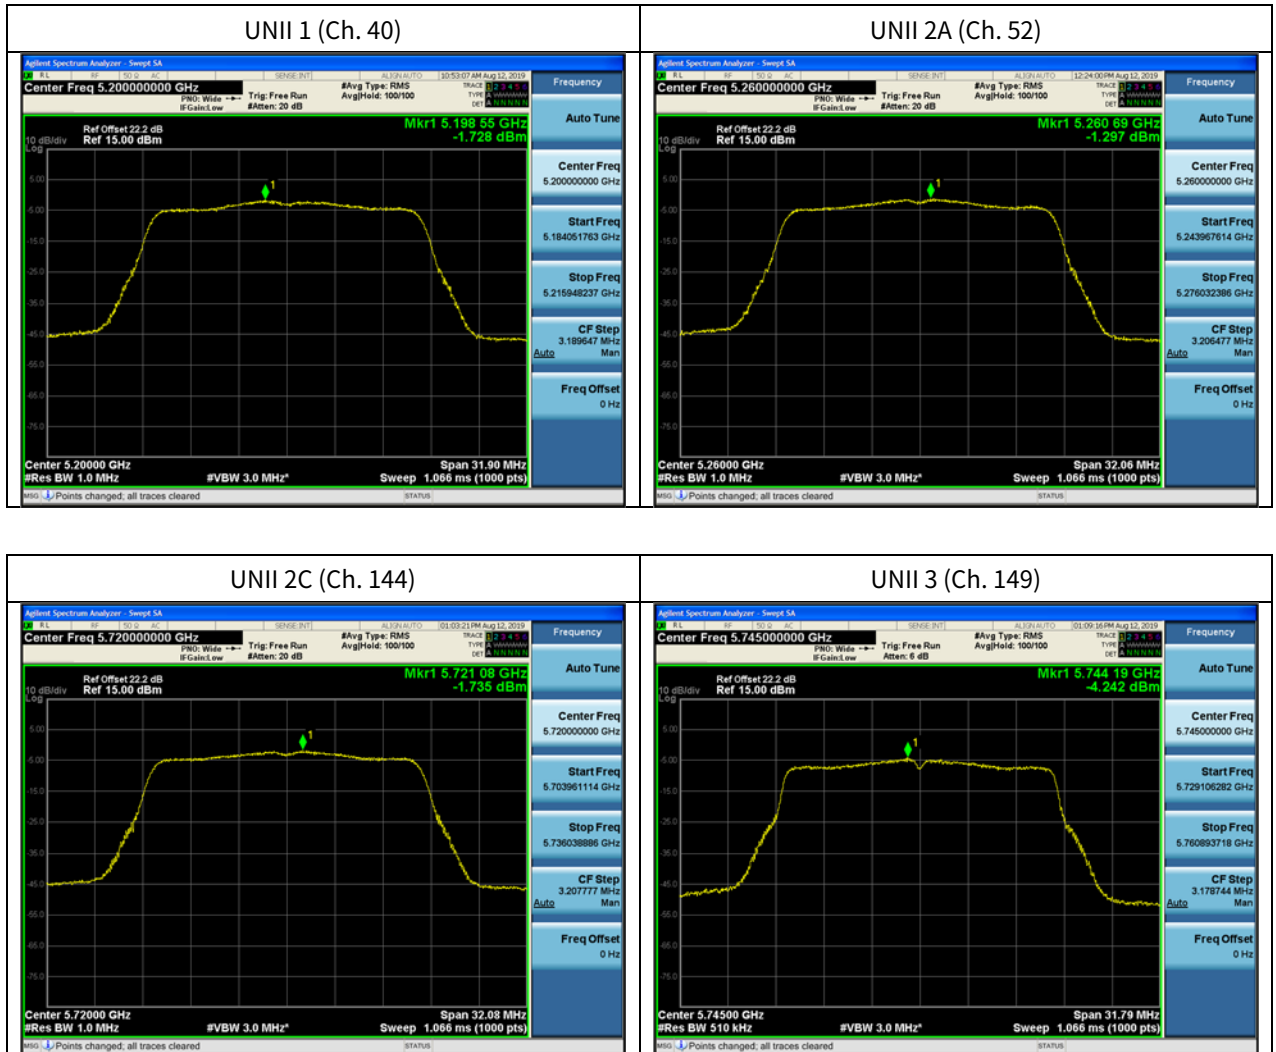

▣ Test Plots(802.11ac(VHT40))

Note:


In order to simplify the report, attached plots were only channel of highest power.

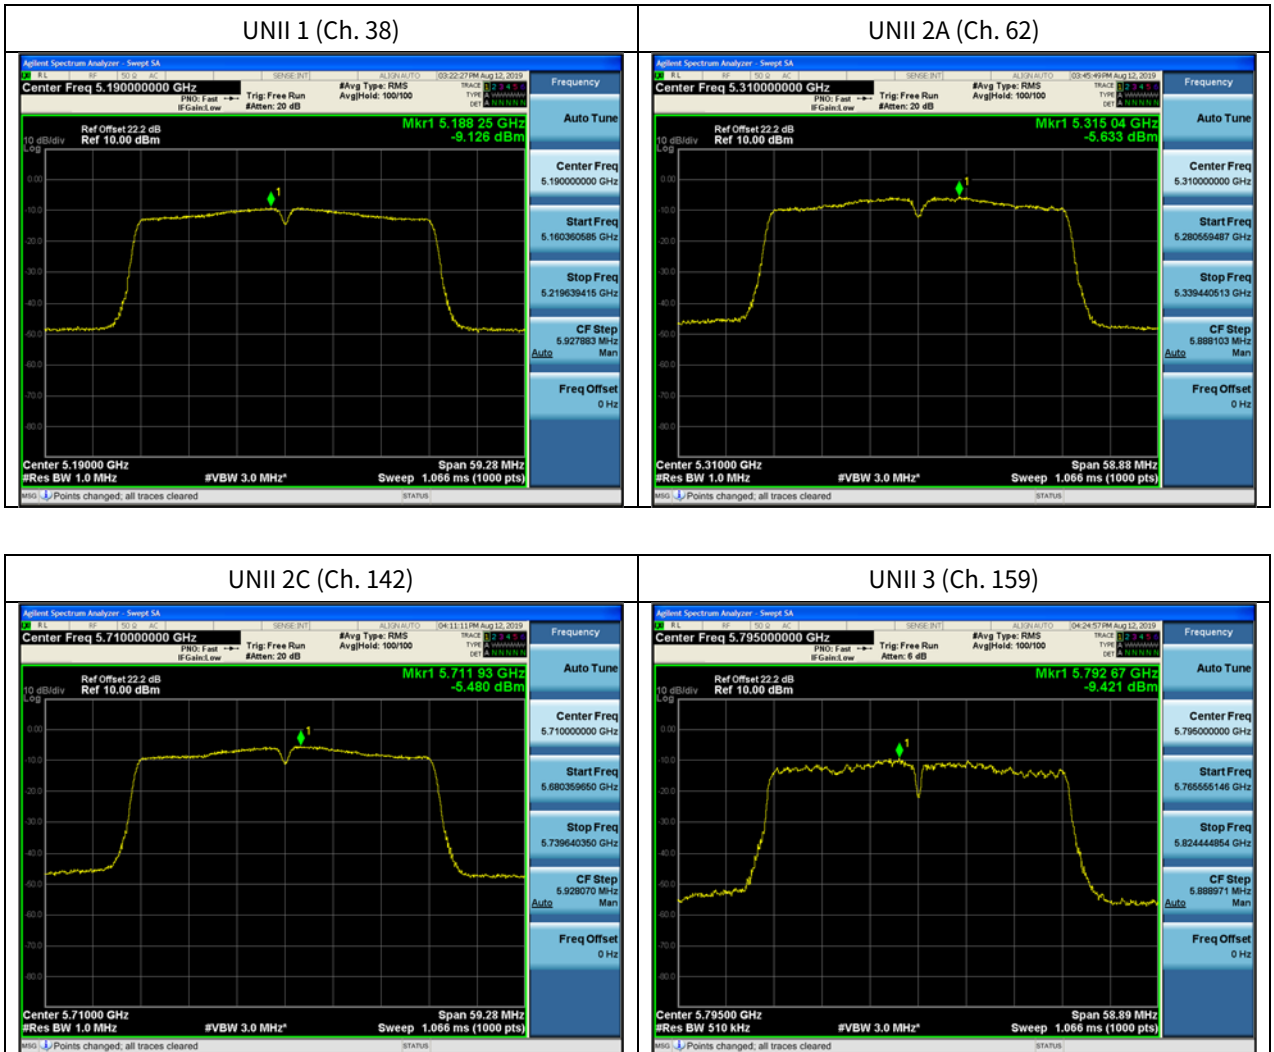

▣ Test Plots(802.11ac(VHT80))

Note:

In order to simplify the report, attached plots were only channel of highest power.

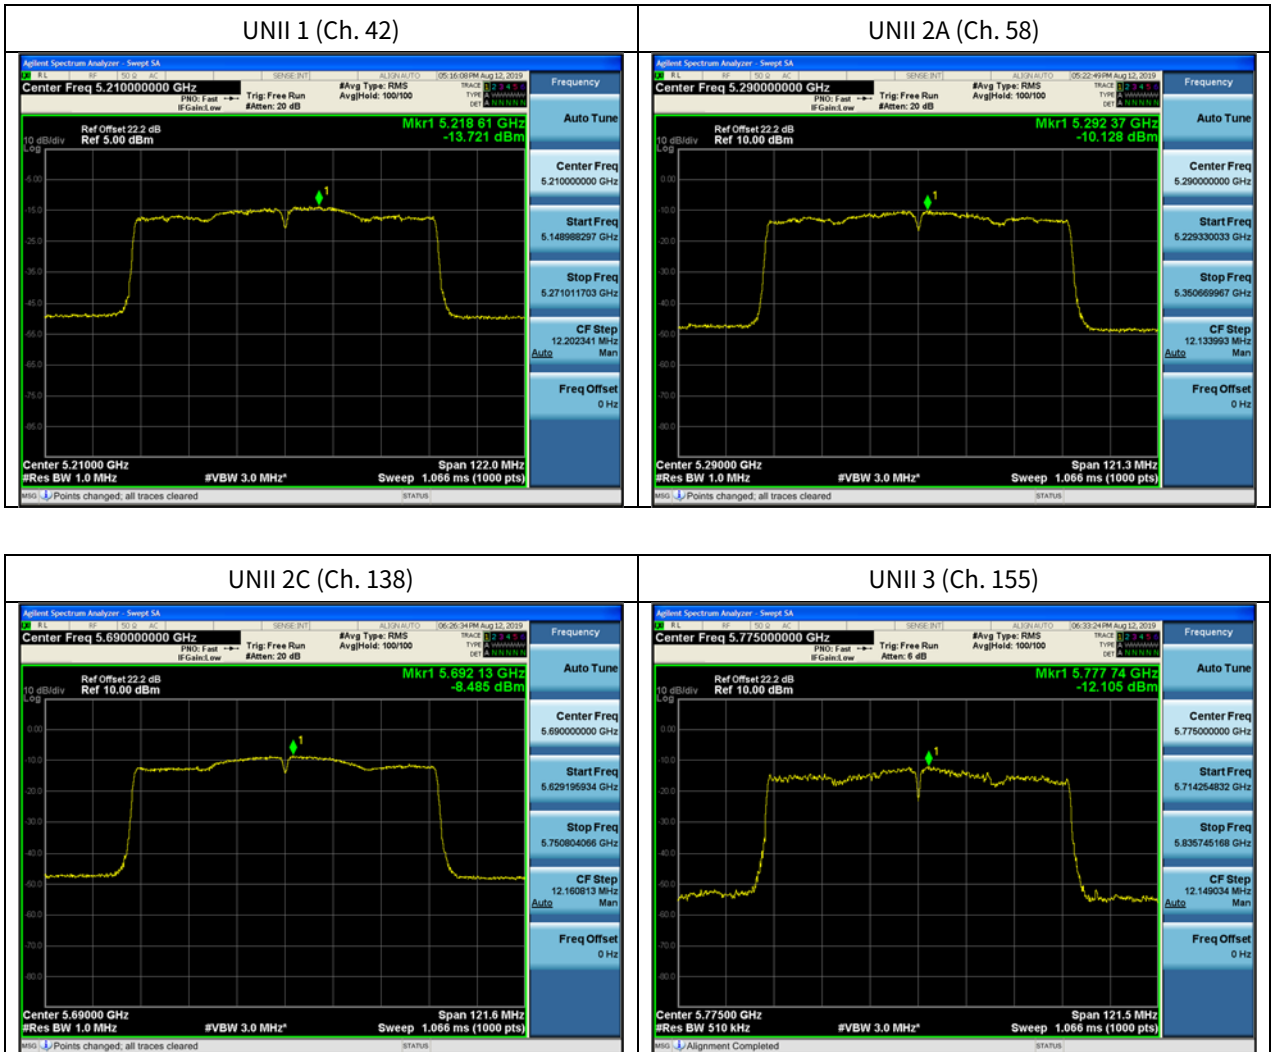

## 10.6 FREQUENCY STABILITY.

### 10.6.1 80MHz BW

#### Startup after the EUT is energized

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,210,000,000 Hz
CHANNEL:	42
REFERENCE VOLTAGE:	14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5210062.38	62.38
100%		-30	5210009.62	9.62
100%		-20	5210099.39	99.39
100%		-10	5210072.43	72.43
100%		0	5210043.37	43.37
100%		+10	5210018.25	18.25
100%		+30	5210028.74	28.74
100%		+40	5210022.65	22.65
100%		+50	5210093.26	93.26
115%		16.00	+20	5210047.50
End. Point	9.00	+20	5210022.14	22.14

#### Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,290,000,000 Hz  
 CHANNEL: 58  
 REFERENCE VOLTAGE: 14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5290012.25	12.25
100%		-30	5290002.48	2.48
100%		-20	5290087.56	87.56
100%		-10	5290056.57	56.57
100%		0	5290007.89	7.89
100%		+10	5290086.58	86.58
100%		+30	5290063.31	63.31
100%		+40	5290057.78	57.78
100%		+50	5290086.05	86.05
115%		16.00	+20	5290015.25
End. Point	9.00	+20	5290046.19	46.19

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,530,000,000 Hz  
 CHANNEL: 106  
 REFERENCE VOLTAGE: 14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5530072.91	72.91
100%		-30	5530060.33	60.33
100%		-20	5530025.96	25.96
100%		-10	5530048.99	48.99
100%		0	5530009.28	9.28
100%		+10	5530075.49	75.49
100%		+30	5530047.05	47.05
100%		+40	5530036.64	36.64
100%		+50	5530063.24	63.24
115%		16.00	+20	5530004.06
End. Point	9.00	+20	5530063.38	63.38

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,775,000,000 Hz  
 CHANNEL: 155  
 REFERENCE VOLTAGE: 14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5775019.17	19.17
100%		-30	5775049.41	49.41
100%		-20	5775008.62	8.62
100%		-10	5775006.44	6.44
100%		0	5775001.95	1.95
100%		+10	5775088.97	88.97
100%		+30	5775096.18	96.18
100%		+40	5775010.46	10.46
100%		+50	5775042.18	42.18
115%		16.00	+20	5775051.20
End. Point	9.00	+20	5775028.61	28.61

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

**2 minutes after the EUT is energized**

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,210,000,000 Hz  
 CHANNEL: 42  
 REFERENCE VOLTAGE: 14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5210045.78	45.78
100%		-30	5210089.05	89.05
100%		-20	5210001.48	1.48
100%		-10	5210054.50	54.50
100%		0	5210038.27	38.27
100%		+10	5210031.32	31.32
100%		+30	5210015.49	15.49
100%		+40	5210099.24	99.24
100%		+50	5210027.70	27.70
115%		16.00	+20	5210014.69
End. Point	9.00	+20	5210083.64	83.64

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,290,000,000 Hz  
 CHANNEL: 58  
 REFERENCE VOLTAGE: 14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5290011.03	11.03
100%		-30	5290093.86	93.86
100%		-20	5290050.79	50.79
100%		-10	5290052.49	52.49
100%		0	5290071.29	71.29
100%		+10	5290004.30	4.3
100%		+30	5290054.71	54.71
100%		+40	5290028.50	28.5
100%		+50	5290005.93	5.93
115%		16.00	+20	5290094.84
End. Point	9.00	+20	5290025.02	25.02

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,530,000,000 Hz  
 CHANNEL: 106  
 REFERENCE VOLTAGE: 14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5530092.57	92.57
100%		-30	5530024.84	24.84
100%		-20	5530055.83	55.83
100%		-10	5530045.30	45.3
100%		0	5530097.08	97.08
100%		+10	5530058.90	58.9
100%		+30	5530006.93	6.93
100%		+40	5530076.31	76.31
100%		+50	5530095.68	95.68
115%		16.00	+20	5530052.61
End. Point	9.00	+20	5530050.76	50.76

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,775,000,000 Hz  
 CHANNEL: 155  
 REFERENCE VOLTAGE: 14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5775048.48	48.48
100%		-30	5775061.98	61.98
100%		-20	5775070.80	70.8
100%		-10	5775032.85	32.85
100%		0	5775066.68	66.68
100%		+10	5775058.88	58.88
100%		+30	5775072.98	72.98
100%		+40	5775086.51	86.51
100%		+50	5775063.16	63.16
115%		16.00	+20	5775045.64
End. Point	9.00	+20	5775066.54	66.54

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

**5 minutes after the EUT is energized**

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,210,000,000 Hz  
 CHANNEL: 42  
 REFERENCE VOLTAGE: 14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5210070.66	70.66
100%		-30	5210013.21	13.21
100%		-20	5210061.94	61.94
100%		-10	5210067.16	67.16
100%		0	5210047.23	47.23
100%		+10	5210008.25	8.25
100%		+30	5210001.38	1.38
100%		+40	5210066.78	66.78
100%		+50	5210082.80	82.80
115%		16.00	+20	5210008.79
End. Point	9.00	+20	5210071.16	71.16

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,290,000,000 Hz  
 CHANNEL: 58  
 REFERENCE VOLTAGE: 14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5290005.09	5.09
100%		-30	5290014.04	14.04
100%		-20	5290080.93	80.93
100%		-10	5290004.48	4.48
100%		0	5290061.70	61.7
100%		+10	5290040.34	40.34
100%		+30	5290096.69	96.69
100%		+40	5290086.35	86.35
100%		+50	5290059.47	59.47
115%		16.00	+20	5290040.70
End. Point	9.00	+20	5290077.16	77.16

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,530,000,000 Hz  
 CHANNEL: 106  
 REFERENCE VOLTAGE: 14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5530024.24	24.24
100%		-30	5530074.94	74.94
100%		-20	5530008.50	8.5
100%		-10	5530043.38	43.38
100%		0	5530011.75	11.75
100%		+10	5530083.16	83.16
100%		+30	5530024.61	24.61
100%		+40	5530093.83	93.83
100%		+50	5530048.24	48.24
115%		16.00	+20	5530056.13
End. Point	9.00	+20	5530004.52	4.52

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,775,000,000 Hz  
 CHANNEL: 155  
 REFERENCE VOLTAGE: 14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5775013.47	13.47
100%		-30	5775030.51	30.51
100%		-20	5775043.26	43.26
100%		-10	5775066.07	66.07
100%		0	5775034.06	34.06
100%		+10	5775029.35	29.35
100%		+30	5775061.49	61.49
100%		+40	5775031.52	31.52
100%		+50	5775046.65	46.65
115%		16.00	+20	5775066.44
End. Point	9.00	+20	5775042.62	42.62

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

**10 minutes after the EUT is energized**

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,210,000,000 Hz  
 CHANNEL: 42  
 REFERENCE VOLTAGE: 14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5210023.20	23.20
100%		-30	5210060.25	60.25
100%		-20	5210045.63	45.63
100%		-10	5210059.50	59.50
100%		0	5210066.02	66.02
100%		+10	5210003.44	3.44
100%		+30	5210023.06	23.06
100%		+40	5210072.97	72.97
100%		+50	5210029.32	29.32
115%		16.00	+20	5210046.58
End. Point	9.00	+20	5210055.47	55.47

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,290,000,000 Hz  
 CHANNEL: 58  
 REFERENCE VOLTAGE: 14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5290049.95	49.95
100%		-30	5290081.72	81.72
100%		-20	5290053.49	53.49
100%		-10	5290011.26	11.26
100%		0	5290091.84	91.84
100%		+10	5290080.42	80.42
100%		+30	5290026.05	26.05
100%		+40	5290010.04	10.04
100%		+50	5290012.66	12.66
115%		16.00	+20	5290049.17
End. Point	9.00	+20	5290082.03	82.03

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,530,000,000 Hz  
 CHANNEL: 106  
 REFERENCE VOLTAGE: 14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5530019.28	19.28
100%		-30	5530034.23	34.23
100%		-20	5530098.82	98.82
100%		-10	5530017.95	17.95
100%		0	5530030.47	30.47
100%		+10	5530094.62	94.62
100%		+30	5530008.35	8.35
100%		+40	5530028.53	28.53
100%		+50	5530027.68	27.68
115%		16.00	+20	5530083.61
End. Point	9.00	+20	5530024.85	24.85

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,775,000,000 Hz  
 CHANNEL: 155  
 REFERENCE VOLTAGE: 14.4 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5775075.26	75.26
100%		-30	5775043.09	43.09
100%		-20	5775095.97	95.97
100%		-10	5775092.70	92.7
100%		0	5775004.75	4.75
100%		+10	5775024.45	24.45
100%		+30	5775067.93	67.93
100%		+40	5775001.15	1.15
100%		+50	5775087.15	87.15
115%		16.00	+20	5775070.24
End. Point	9.00	+20	5775037.04	37.04

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

## 10.7 STRADDLE CHANNEL

### 10.7.1 26dB Bandwidth

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26dB Bandwidth [MHz]
802.11a	UNII 2C	5720	144	5 709.40	15.60
802.11n(HT20)				5 709.32	15.68
802.11ac(VHT20)				5 709.32	15.68
802.11a	UNII 3	5720	144	5 730.52	5.52
802.11n(HT20)				5 730.60	5.60
802.11ac(VHT20)				5 730.60	5.60

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26dB Bandwidth [MHz]
802.11n(HT40)	UNII 2C	5710	142	5 690.48	34.52
802.11ac(VHT40)				5 690.32	34.68
802.11n(HT40)	UNII 3	5710	142	5 729.84	4.84
802.11ac(VHT40)				5 729.92	4.92

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26dB Bandwidth [MHz]
802.11ac(VHT80)	UNII 2C	5690	138	5 649.80	75.20
	UNII 3	5690	138	5 730.56	5.56

**Note:**

[UNII 2C] 26dB Bandwidth = 5725MHz - Measured Frequency[MHz]

[UNII 3C] 26dB Bandwidth = Measured Frequency[MHz] -5725MHz

■ Test Plots (26dB Bandwidth)

802.11a UNII Band




802.11n(HT20) UNII Band



802.11ac(VHT20) UNII Band



## ■ Test Plots (26dB Bandwidth)

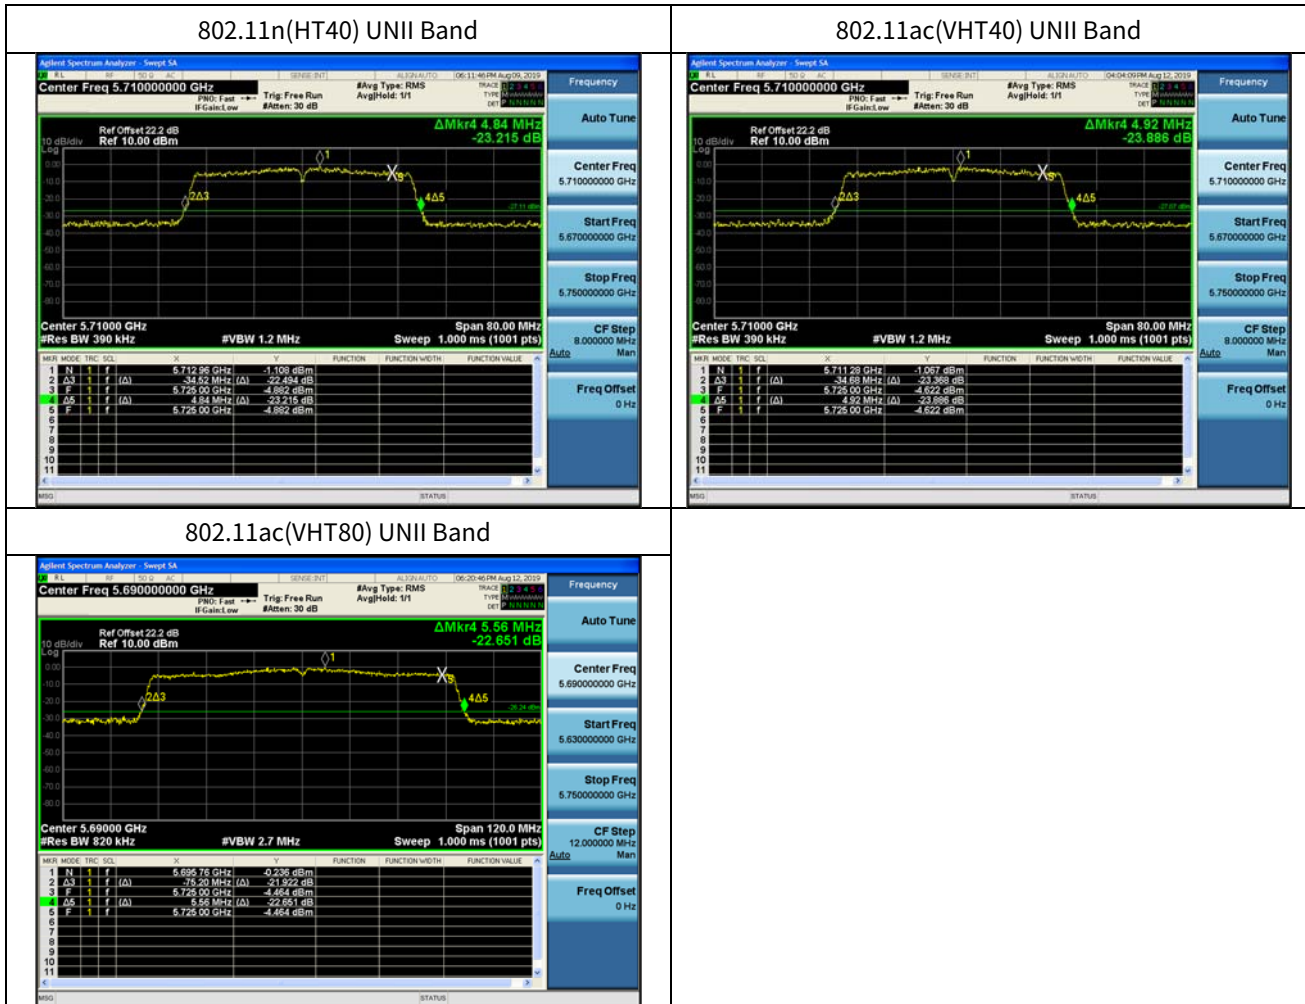



### 10.7.2 6dB Bandwidth

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	6dB Bandwidth [MHz]	Limit [MHz]
802.11a	UNII 3	5720	144	5728.16	3.16	> 0.5
802.11n(HT20)				5728.46	3.46	> 0.5
802.11ac(VHT20)				5728.77	3.77	> 0.5


Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	6dB Bandwidth [MHz]	Limit [MHz]
802.11n(HT40)	UNII 3	5710	142	5727.76	2.76	> 0.5
802.11ac(VHT40)				5728.13	3.13	> 0.5

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	6dB Bandwidth [MHz]	Limit [MHz]
802.11ac(VHT80)	UNII 3	5690	138	5727.73	2.73	> 0.5


**Note:**

6dB Bandwidth = Measured Frequency[MHz] – 5725MHz


Test Plots (UNII 3 Band 6dB Bandwidth)

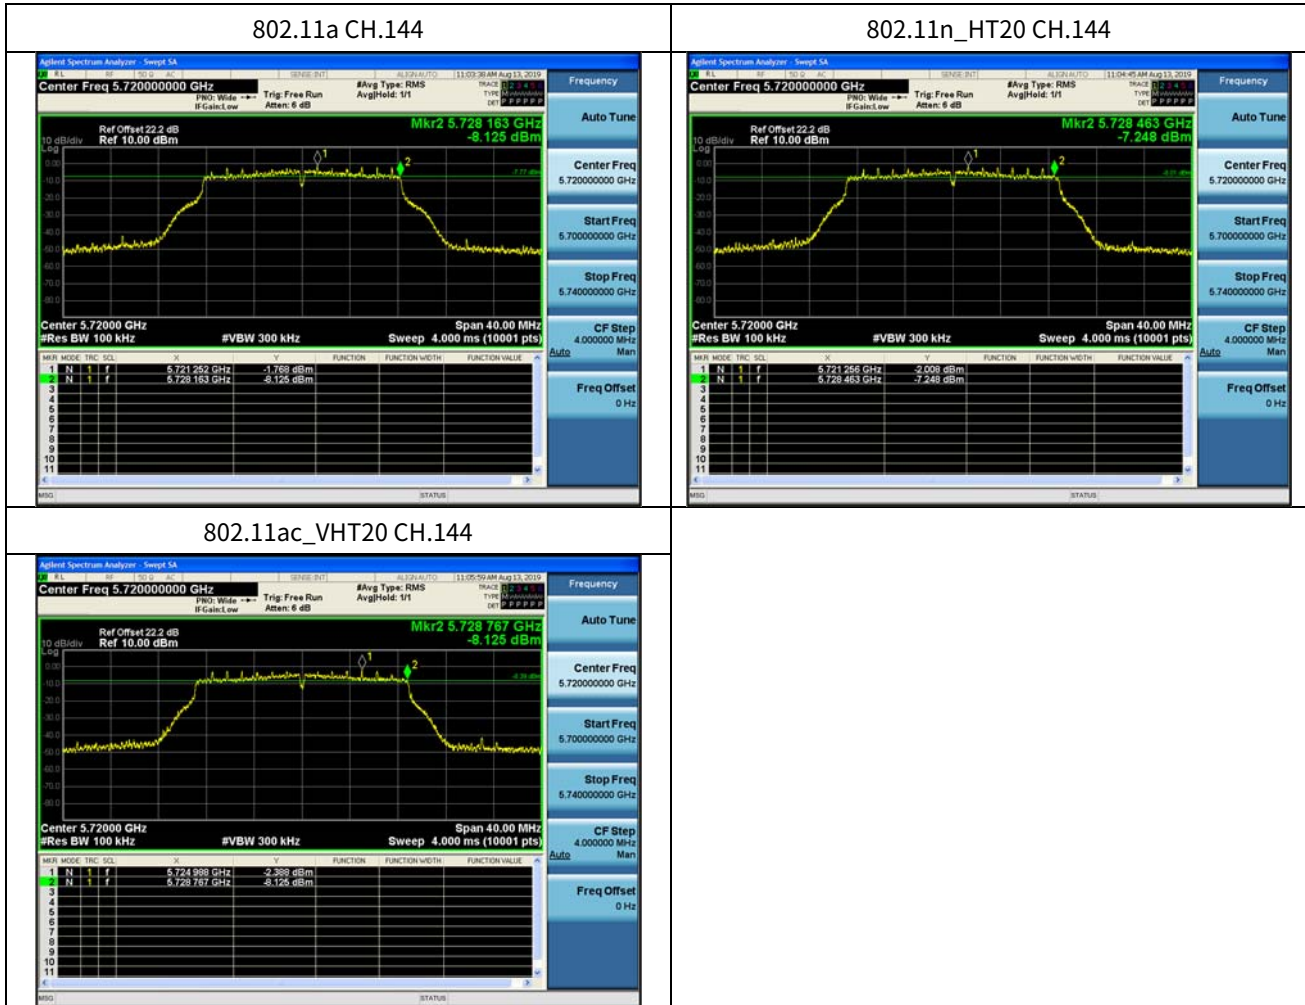


802.11n\_HT40 CH.142

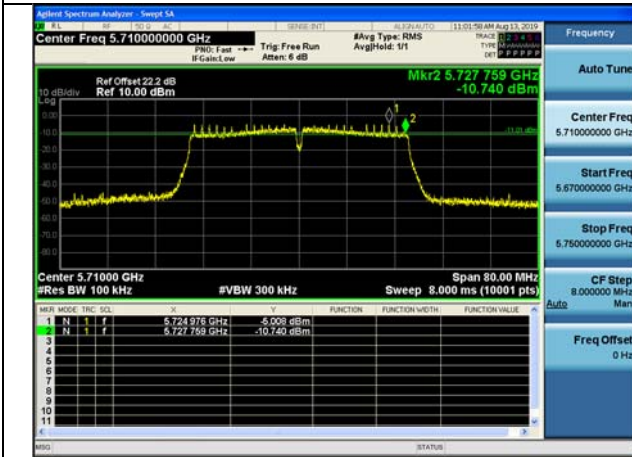

802.11ac\_VHT40 CH.142

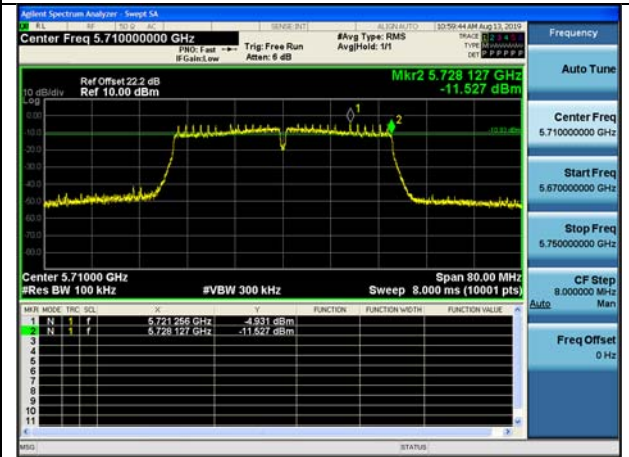

802.11ac\_VHT80 CH.138

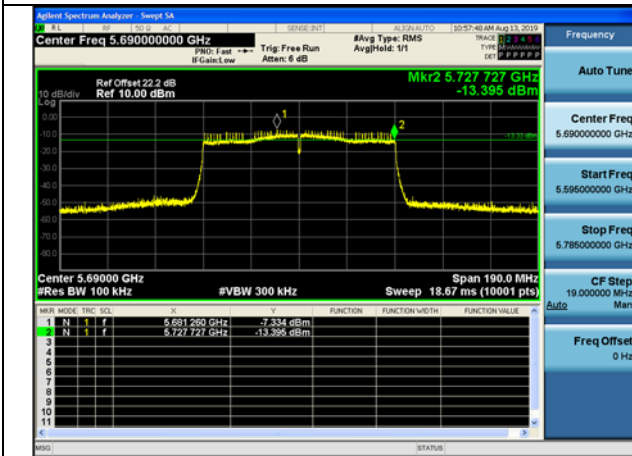


### 10.7.3 Output Power


Mode	Frequency [MHz]	Channel	Measured Power (dBm)	Duty Cycle Factor (dB)	Total Power (dBm)	Limit (dBm)
802.11a	5720	144	8.19	0.297	8.49	24.25
802.11n(HT20)	(UNII 2C Band)		7.63	0.596	8.23	24.28
802.11ac(VHT20)			7.68	0.601	8.28	24.28
802.11a	5720	144	1.10	0.297	1.40	30.00
802.11n(HT20)	(UNII 3 Band)		0.82	0.596	1.42	30.00
802.11ac(VHT20)			1.20	0.601	1.80	30.00

Mode	Frequency [MHz]	Channel	Measured Power (dBm)	Duty Cycle Factor (dB)	Total Power (dBm)	Limit (dBm)
802.11n(HT40)	5710	142	5.84	2.722	8.56	26.95
802.11ac(VHT40)	(UNII 2C Band)		7.33	1.086	8.42	26.98
802.11n(HT40)	5710	142	-5.23	2.722	-2.51	30.00
802.11ac(VHT40)	(UNII 3 Band)		-3.96	1.086	-2.87	30.00

Mode	Frequency [MHz]	Channel	Measured Power (dBm)	Duty Cycle Factor (dB)	Total Power (dBm)	Limit (dBm)
802.11ac(VHT80)	5690 (UNII 2C Band)	138	7.46	1.155	8.62	30.07
	5690 (UNII 3 Band)	138	-6.95	1.155	-5.79	30.00

## Test Plots

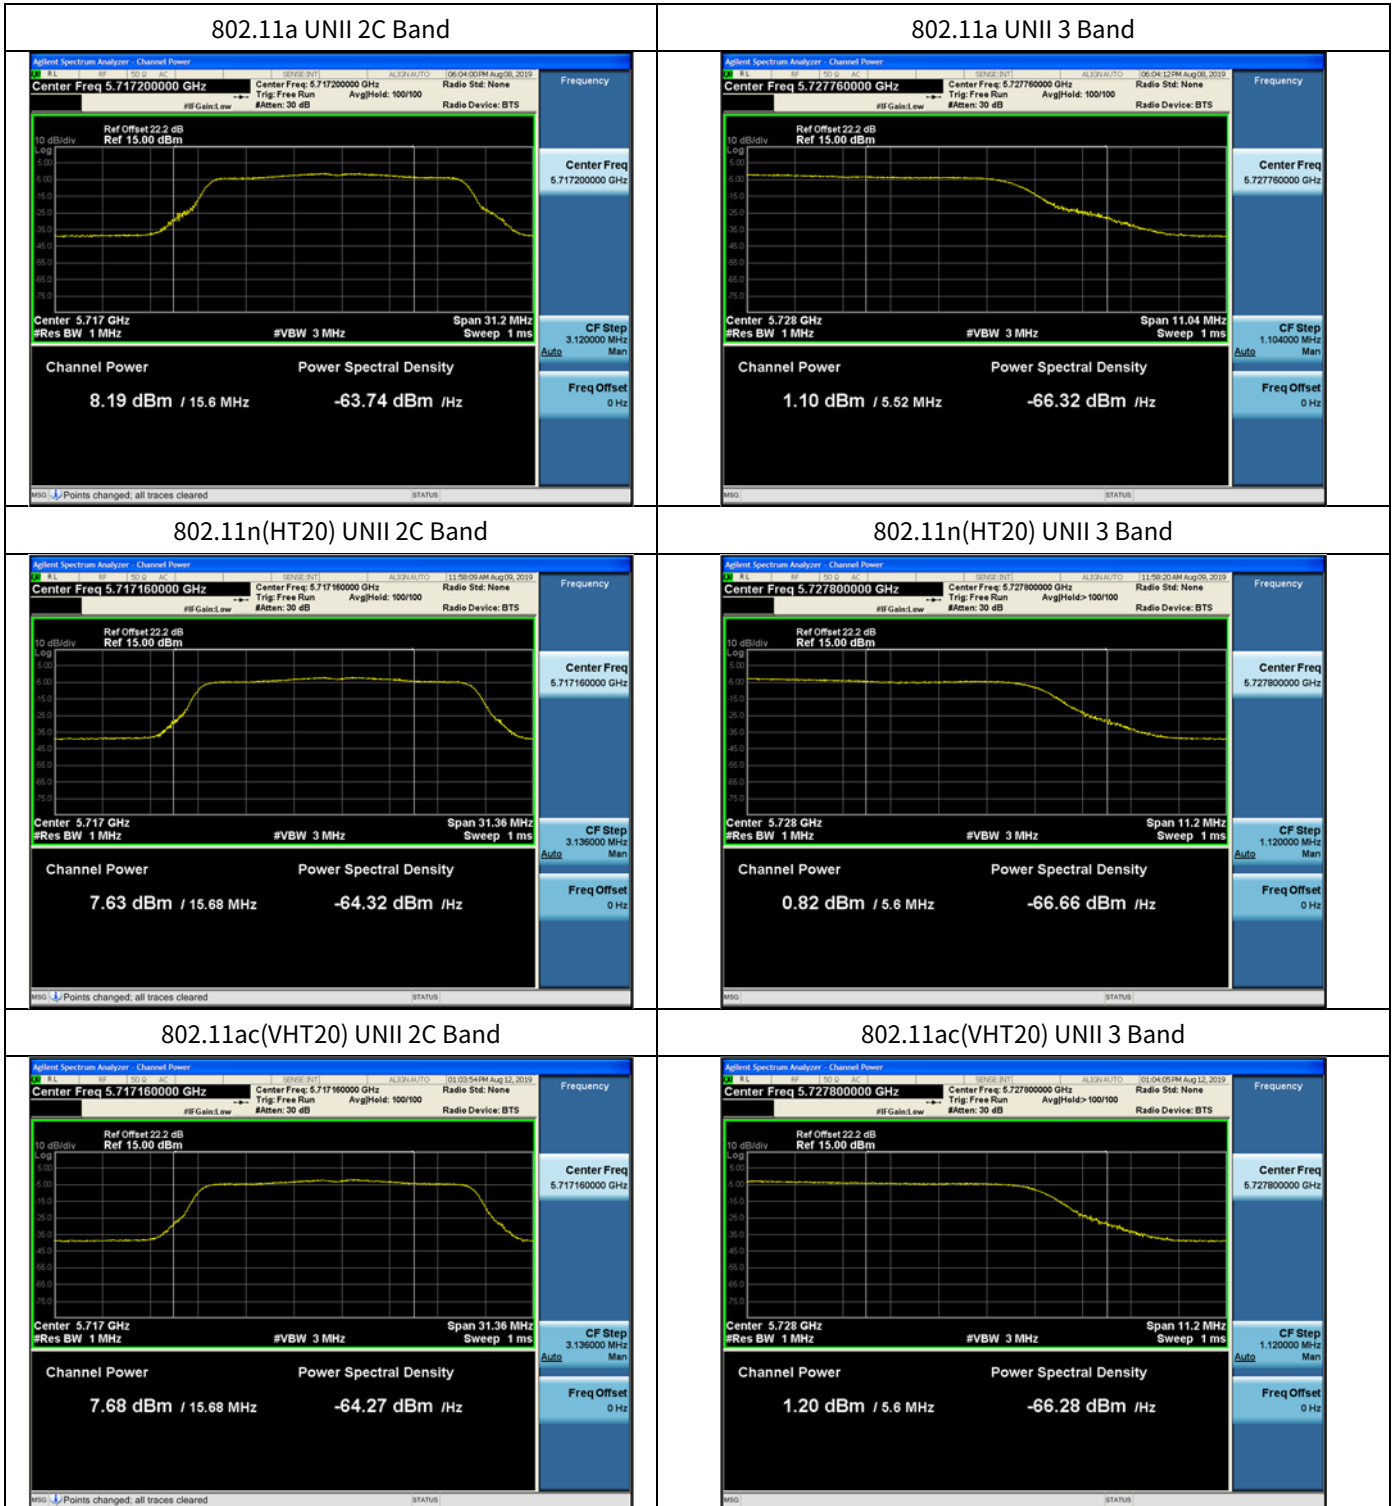

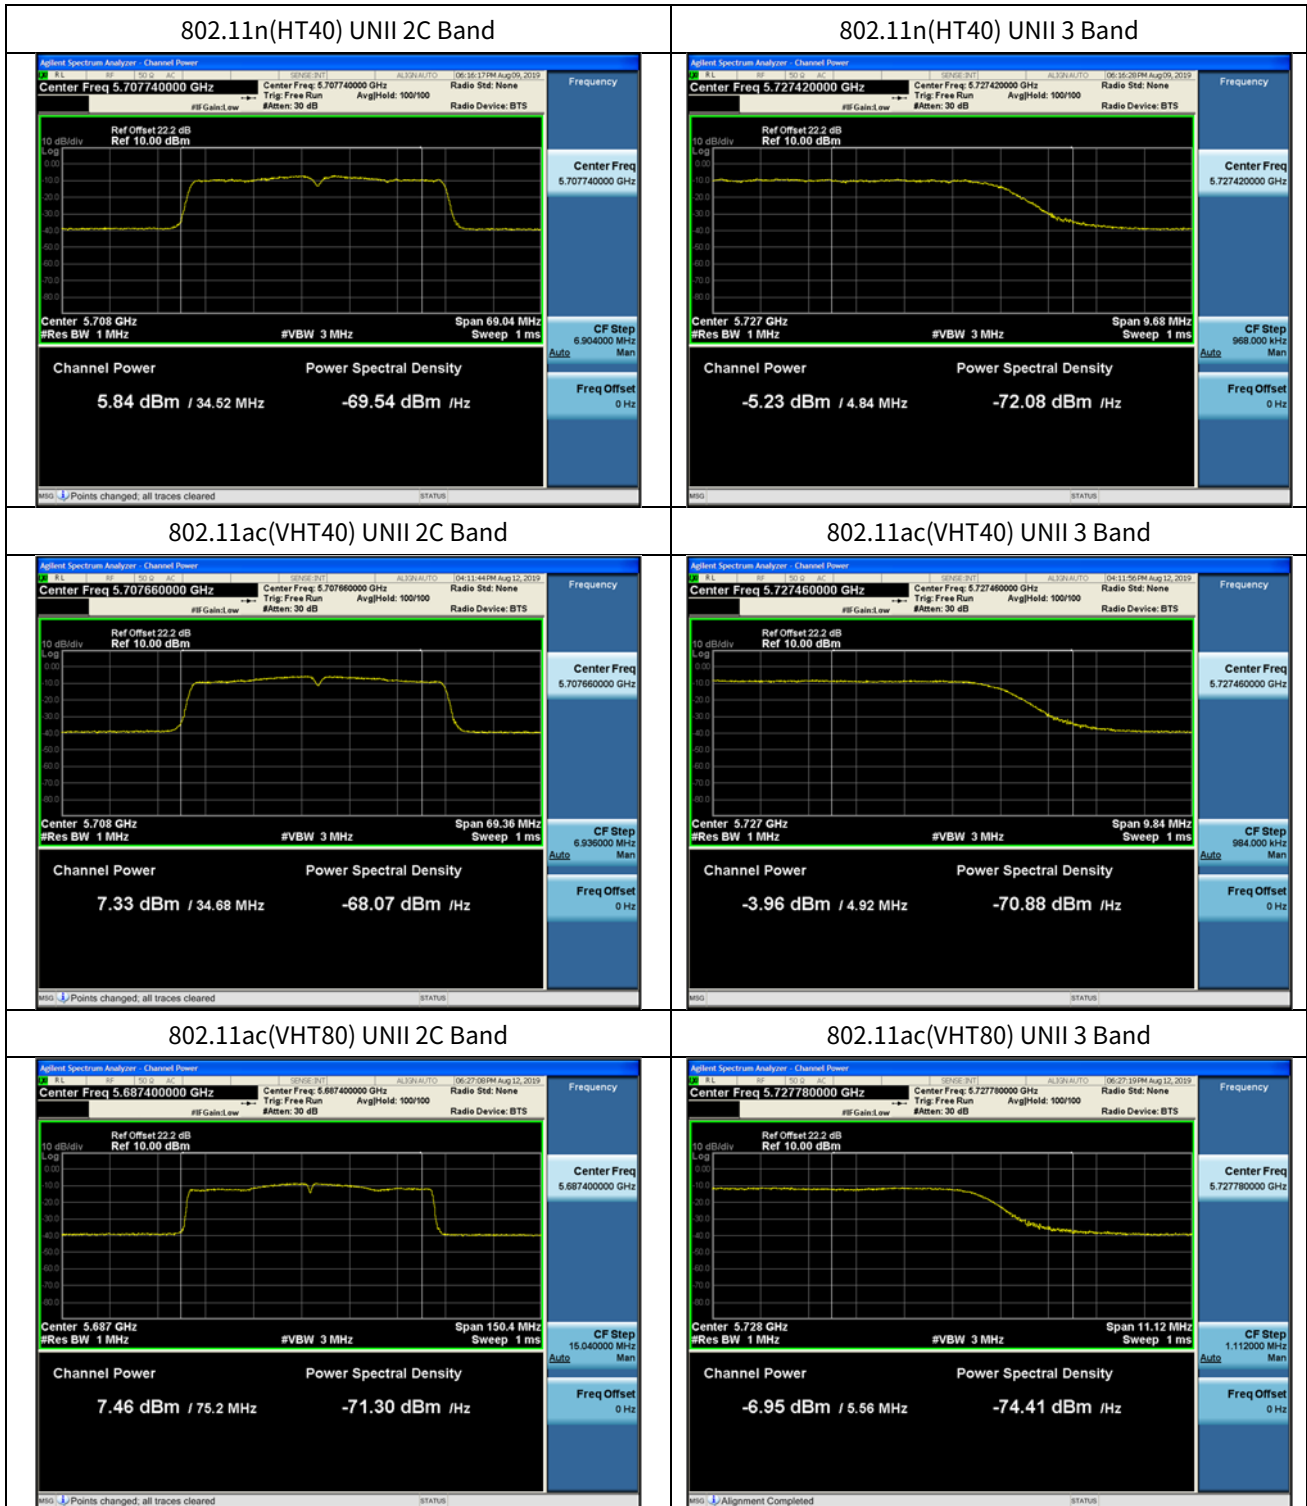

### 10.7.4 Power Spectral Density

Mode	Frequency [MHz]	Channel	Measured Density (dBm)	Duty Cycle Factor (dB)	Total PSD (dBm)	Limit (dBm)
802.11a	5720 (UNII 2C Band)	144	-1.088	0.297	-0.791	11.00
802.11n(HT20)			-2.014	0.596	-1.418	11.00
802.11ac(VHT20)			-1.619	0.601	-1.018	11.00
802.11a	5720 (UNII 3 Band)	144	-6.312	0.297	-6.015	30.00
802.11n(HT20)			-6.856	0.596	-6.260	30.00
802.11ac(VHT20)			-6.708	0.601	-6.107	30.00

Mode	Frequency [MHz]	Channel	Measured Density (dBm)	Duty Cycle Factor (dB)	Total PSD (dBm)	Limit (dBm)
802.11n(HT40)	5710 (UNII 2C Band)	142	-7.217	2.722	-4.495	11.00
802.11ac(VHT40)			-5.614	1.086	-4.528	11.00
802.11n(HT40)	5710 (UNII 3 Band)	142	-11.538	2.722	-8.816	30.00
802.11ac(VHT40)			-10.947	1.086	-9.861	30.00

Mode	Frequency [MHz]	Channel	Measured Density (dBm)	Duty Cycle Factor (dB)	Total PSD (dBm)	Limit (dBm)
802.11ac(VHT80)	5690 (UNII 2C Band)	138	-8.570	1.155	-7.415	11.00
	5690 (UNII 3 Band)	138	-14.660	1.155	-13.505	30.00