

FCC PART 25 TYPE APPROVAL  
MEASUREMENT AND TEST REPORT

For

**Globalstar USA, LLC**

461 S. Milpitas Blvd.  
Milpitas, CA 95035, U.S.A.

FCC ID: TSEMCM-4M

<b>This Report Concerns:</b> <input checked="" type="checkbox"/> Original Report	<b>Product name:</b> Modular Four-Channel Satellite Modem
<b>Test Engineer:</b> James Ma	<i>James Ma</i>
<b>Report Number:</b> R0612141-25	
<b>Report Date:</b> 2007-02-07	
<b>Reviewed By:</b> Hans Mellberg, VP of Engineering	
<b>Prepared By (J8):</b>	Bay Area Compliance Laboratory Corporation (BACL) 1274 Anvilwood Ave. Sunnyvale, CA 94089 Tel: (408) 732-9162 Fax: (408) 732 9164

**Note:** This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
EUT PHOTO .....	4
MECHANICAL DESCRIPTION .....	4
OBJECTIVE .....	5
RELATED SUBMITTAL(S)/GRANT(S).....	5
TEST METHODOLOGY .....	5
MEASUREMENT UNCERTAINTY .....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>7</b>
JUSTIFICATION .....	7
EUT EXERCISE SOFTWARE .....	7
SPECIAL ACCESSORIES .....	7
EQUIPMENT MODIFICATIONS .....	7
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS .....	7
POWER SUPPLY INFORMATION.....	7
EXTERNAL I/O CABLING LIST AND DETAILS.....	7
TEST SETUP BLOCK DIAGRAM.....	8
<b>SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
<b>§1.1307(B) (1) &amp; §2.1091 - RF EXPOSURE.....</b>	<b>10</b>
<b>§2.1047 – MODULATION CHARACTERISTICS .....</b>	<b>12</b>
<b>§2.1051 &amp; §25 – SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....</b>	<b>13</b>
STANDARD APPLICABLE .....	13
MEASUREMENT PROCEDURE.....	13
EQUIPMENT LISTS .....	13
MEASUREMENT RESULT .....	13
<b>§15.107 - CONDUCTED EMISSIONS .....</b>	<b>27</b>
EUT SETUP .....	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST PROCEDURE .....	27
CONDUCTED EMISSIONS TEST DATA .....	27
TEST RESULTS SUMMARY .....	27
<b>§ 2.1053 &amp; §25.202 (F) – FIELD STRENGTH OF SPURIOUS RADIATION .....</b>	<b>30</b>
STANDARD APPLICABLE .....	30
MEASUREMENT PROCEDURE.....	30
EQUIPMENT LISTS .....	30
MEASUREMENT RESULT .....	30
TEST RESULTS SUMMARY.....	31
OUT OF BAND (CARRIER ON).....	32
<b>§25.202 (F) (1)..(3) – EMISSION LIMITATIONS.....</b>	<b>35</b>
STANDARD APPLICABLE .....	35
MEASUREMENT PROCEDURE.....	35
EQUIPMENT LISTS .....	35
MEASUREMENT RESULT .....	35
<b>§2.1046 &amp; §25.204 – POWER OUTPUT .....</b>	<b>38</b>
STANDARD APPLICABLE .....	38
MEASUREMENT PROCEDURE.....	38
EQUIPMENT LISTS .....	38
MEASUREMENT RESULT .....	38

<b>§25.216(B) &amp; §25.216(G) – EMISSIONS FROM MOBILE EARTH STATIONS FOR PROTECTION OF AERONAUTICAL RADIONAVIGATION-SATELLITE SERVICE .....</b>	<b>42</b>
APPLICABLE STANDARD .....	42
MEASUREMENT PROCEDURE.....	42
EQUIPMENT LISTS .....	42
MEASUREMENT RESULT .....	42
<b>§2.1055 – FREQUENCY STABILITY &amp; §25.202(D) – FREQUENCY TOLERANCE .....</b>	<b>44</b>
STANDARD APPLICABLE .....	44
TEST EQUIPMENT LIST AND DETAILS.....	44
MEASUREMENT RESULT .....	44
MEASUREMENT RESULT .....	45
<b>EXHIBIT A - FCC ID LABEL INFORMATION .....</b>	<b>46</b>
FCC § 2.925 IDENTIFICATION OF EQUIPMENT.....	46
SUGGESTED CONTENT OF FCC ID LABEL.....	46
PROPOSED LABEL LOCATION ON EUT .....	46
<b>EXHIBIT B - TEST SETUP PHOTOGRAPHS .....</b>	<b>47</b>
AC LINES CONDUCTED EMISSION-FRONT VIEW* .....	47
AC LINES CONDUCTED EMISSION-REAR VIEW* .....	47
RECEIVER RADIATED EMISSIONS – FRONT VIEW .....	48
RADIATED RECEIVER RADIATED EMISSIONS – REAR VIEW .....	48
TRANSMITTER RADIATED EMISSION WITH 4.5 dBi ANTENNA – FRONT VIEW .....	49
TRANSMITTER RADIATED EMISSION WITH 4.5 dBi ANTENNA – REAR VIEW .....	49
TRANSMITTER RADIATED EMISSION WITH 2.3 dBi ANTENNA – FRONT VIEW.....	50
TRANSMITTER RADIATED EMISSION WITH 2.3 dBi ANTENNA – REAR VIEW.....	50
<b>EXHIBIT C - EUT PHOTOGRAPHS.....</b>	<b>51</b>
EUT - FRONT VIEW .....	51
EUT - REAR VIEW .....	51
EUT COVER OFF - TOP VIEW .....	52
MODEM BOARD WITH ATTACHED RF BOARD AND SHIELDING - TOP VIEW .....	52
MODEM BOARD WITH ATTACHED BOARD - BOTTOM VIEW .....	53
MODEM BOARD WITHOUT SHIELDING - TOP VIEW .....	53
ATTACHED MODEM BOARD WITH SHIELDING - TOP VIEW .....	54
ATTACHED MODEM BOARD WITHOUT SHIELDING - TOP VIEW .....	54
ATTACHED MODEM BOARD WITHOUT SHIELDING - REAR VIEW .....	55

---

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *Globalstar USA, LLC's* product, *FCC ID: TSEMCM-4M*, model number: *MCM-4M* or the "EUT" as referred to in this report is a *Modular Four-Channel Satellite Modem* designed to operate at 1.6 GHz. The EUT is a full duplex data access device able to establish up to four concurrent satellite connections. There are two components that comprise the EUT : an Antenna (either 2.3 dBi or 4.5 dBi) and a Multi Channel Modem (*MCM-4M*). Designed either to connect to a public server site or to a private site such as a Virtual Private Network (VPN), the EUT features a single standard Ethernet connection and is powered by 12 VCD from an AC/DC adapter.

### EUT Photo



*Please see Exhibit C for additional EUT photos*

### Mechanical Description

The *Globalstar USA, LLC's* product, *FCC ID: TSEMCM-4M* or the "EUT" as referred to in this report is a *Single Antenna Multi Channel Modem*, which measures approximately 420mmL x 400mmW x 40mmH and weighs 4.99 kg.

*\* The test data gathered are from production sample, serial number: 2907, provided by the manufacturer.*

**Objective**

This type approval report is prepared on behalf of *Globalstar USA, LLC* in accordance with Part 2, Subpart J, and Part 25, Subparts C of the Federal Communication Commissions rules.

The objective of the manufacturer is to demonstrate compliance with FCC rules for Radiated Emission, Frequency Tolerance, Emission Limitation (out of band), Power Density, Emission Limitation (in band), and Power Limit.

**Related Submittal(s)/Grant(s)**

No Related Submittals.

**Test Methodology**

All measurements contained in this report were conducted with TIA/EIA 603-C.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.

**Measurement Uncertainty**

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the values ranging from  $\pm 2.0$  dB for Conducted Emissions tests and  $\pm 4.0$  dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

Detailed instrumentation measurement uncertainties can be found in BACL Corp. report QAP-018.

**Test Facility**

The test site used by BACL Corp. to conduct and collect safety measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11, 1997 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the test methods and procedures set forth in ANSI C63.4-2003 & TIA/EIA-603.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: R-2463 and C-2698. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is a National Institute of Standards and Technology (NIST) accredited laboratory under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/hdocs/210/214/scopes/2001670.htm>.

## SYSTEM TEST CONFIGURATION

### Justification

The host system was configured for testing according to TIA/EIA 603-C.

The EUT was tested in the normal (native) operating mode to represent *worst*-case results during the final qualification test.

### EUT Exercise Software

The EUT was operating in max power mode during radiated and conducted testing.

### Special Accessories

NA

### Equipment Modifications

No modifications were made to the EUT.

### Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
IBM	Laptop	560	78-HN065 97/04
Anritsu	Global Star User terminal tester	MT8803G	MB06886
Anritsu	Global Star User terminal tester	MT8803G	MB08587
Dell	Laptop	300M	NA


### Power Supply Information

Manufacturer	Description	Model	Serial Number
GUI Inc	ADC power supply	EA1050A-120	DTS-120500UC-p-ET

### External I/O Cabling List and Details

Cable Description	Length (M)	Port/From	To
Serial cable	1.5	Laptop (IBM)	EUT (SDM1)
Serial cable	1.5	Laptop (dell)	EUT (SDM2)

### Test Setup Block Diagram

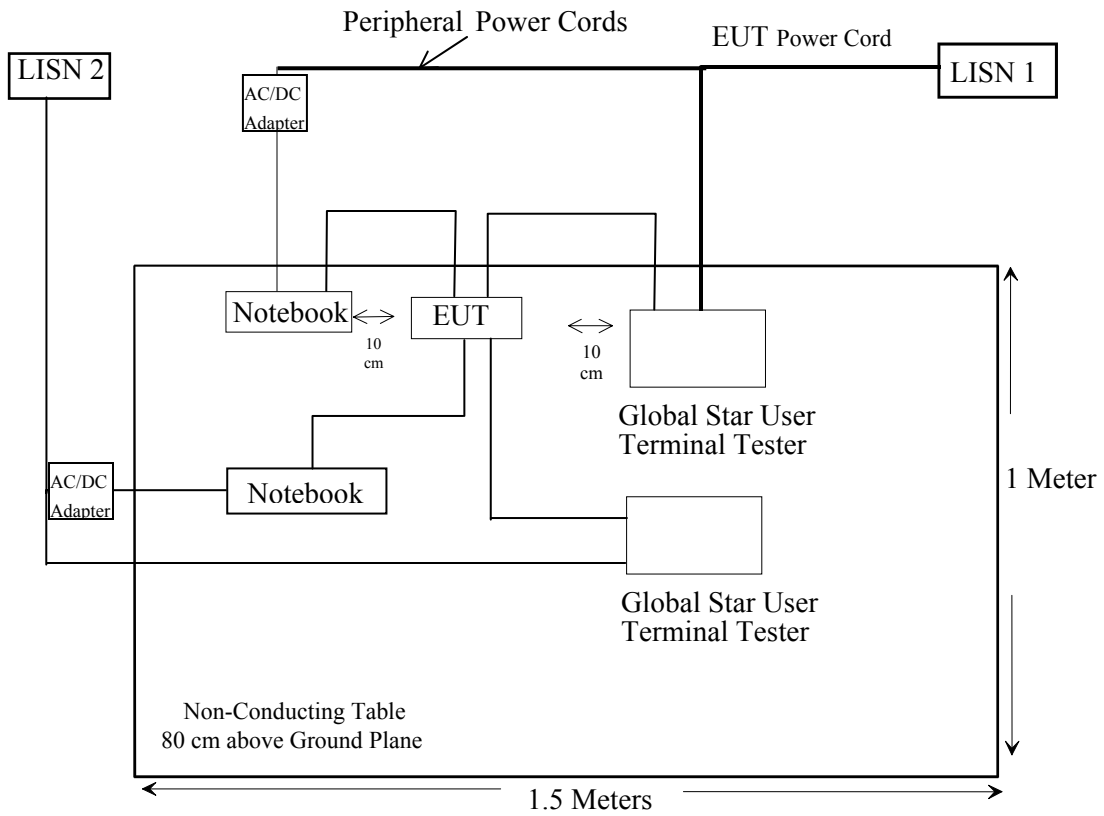



## SUMMARY OF TEST RESULTS

Results reported relate only to the product tested.

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§2.1046 & §25.204	Power Output	Compliant
§2.1047 (d)	Modulation Characteristics	NA
§2.1049	Occupied Bandwidth	Compliant
§1.1307(b)(1) & §2.1091	RF Exposure	Compliant
§2.1051	Spurious Emission at Antenna Terminals	Compliant
§15.107	AC Line Conducted Emission	Compliant
§2.1053 & §25.202(f)	Field Strength of Spurious Radiation	Compliant
§2.1055 & §25.202(d)	Frequency Stability/ Tolerance	Compliant
§2.1057	Spectrum Investigated	Compliant
§25.202(a)(4)(i)	1610 – 1626.5 GHz Authorized Frequency	NA
§25.202(f)	Emission Limitations (Emission Mask)	Compliant
§25.204(a)	Power Limits	Compliant
§25.209	Antenna Performance	Compliant
§25.213	Protection of Radio astronomy	site dependent
§25.216 (c) &/or (f)	Emission from Mobile Earth Station for Protection of Aeronautical Radio navigation-Satellite Service (e.i.r.p. density)	Compliant

## **§1.1307(b) (1) & §2.1091 - RF EXPOSURE**

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

<b>Frequency Range (MHz)</b>	<b>Electric Field Strength (V/m)</b>	<b>Magnetic Field Strength (A/m)</b>	<b>Power Density (mW/cm<sup>2</sup>)</b>	<b>Averaging Time (minute)</b>
<b>Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

### **MPE Prediction**

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

**2.3 dBi antenna**

Maximum peak output power at antenna input terminal (dBm):	<u>32.53(dBm)</u>
Maximum peak output power at antenna input terminal (mW):	<u>1790.61 (mW)</u>
Predication distance (cm):	<u>73.70 cm</u>
Predication frequency (MHz):	<u>1615.65 (MHz)</u>
Maximum Antenna Gain, typical (dBi):	<u>2.3 (dBi)</u>
Maximum Antenna Gain (numeric):	<u>1.698 (numeric)</u>
Power density of predication frequency at 73.7 cm (mW/cm <sup>2</sup> ):	<u>0.045 (mW/cm<sup>2</sup>)</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm <sup>2</sup> ):	<u>1.00 (mW/cm<sup>2</sup>)</u>

**4.5 dBi antenna**

Maximum peak output power at antenna input terminal (dBm):	<u>32.53(dBm)</u>
Maximum peak output power at antenna input terminal (mW):	<u>1790.61 (mW)</u>
Predication distance (cm):	<u>73.70 cm</u>
Predication frequency (MHz):	<u>1615.65 (MHz)</u>
Maximum Antenna Gain, typical (dBi):	<u>4.5 (dBi)</u>
Maximum Antenna Gain (numeric):	<u>2.818 (numeric)</u>
Power density of predication frequency at 73.7 cm (mW/cm <sup>2</sup> ):	<u>0.072 (mW/cm<sup>2</sup>)</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm <sup>2</sup> ):	<u>1.00 (mW/cm<sup>2</sup>)</u>

**Test Result**

The power density of predication frequency at 73.7 cm is 0.072 mW/cm<sup>2</sup> for the 4.5 dBi antenna and 0.045 mW/cm<sup>2</sup> for the 2.3 dBi antenna, both of which were according to calculation under the MPE limit for uncontrolled exposure of 1.00 mW/cm<sup>2</sup>.

---

## **§2.1047 – MODULATION CHARACTERISTICS**

---

The EUT uses digital modulation techniques only which were employed during the tests for occupied bandwidth. Part 25 does not have a modulation characteristics requirement for digital modulation thus this section is not applicable.

## **§2.1051 & §25 – SPURIOUS EMISSIONS AT ANTENNA TERMINALS**

### **Standard Applicable**

§2.1051: The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in §2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§25: Protection of the radio-navigation-satellite service: Mobile earth stations operating in the 1610-1626.5 MHz band shall limit out-of-band emissions in the 1574.397-1576.443 MHz band so as not to exceed an e.i.r.p. density level of -70 dB (W/MHz) averaged over any 20 ms period. The e.i.r.p. of any discrete spurious emission (i.e., bandwidth less than 600 Hz) in the 1574.397-1576.443 MHz band shall not exceed -80 dBW.

For out-of-band emissions for frequencies removed from the midpoint of the assigned frequency segment by more than 250% of the authorized bandwidth (1.23MHz), at least

$43 + 10 \log (P_{\text{watts}})$  attenuation below the mean power of the transmitter.

For Middle Channel =  $43 + 10 \log (1.79 \text{ W}) = 45.53 \text{ dBc}$

### **Measurement Procedure**

Spurious emissions appearing at the antenna terminals were measured with a spectrum analyzer by connecting the spectrum analyzer directly via a short cable to the antenna output terminals or across the antenna leads on the PCB as specified by the manufacturer.

### **Equipment Lists**

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Cal. Date</b>
Agilent	Analyzer, Spectrum	E4446A	US44300386	2006-03-06

\* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

### **Measurement Result**



#### **Environmental Conditions**



Temperature:	23° C
Relative Humidity:	65%
ATM Pressure:	1025 mbar


\* *The testing was performed by James Ma on 2007-01-03.*

The following plots show that all emissions are at least 45.53 dB below the fundamental.


Low Channel

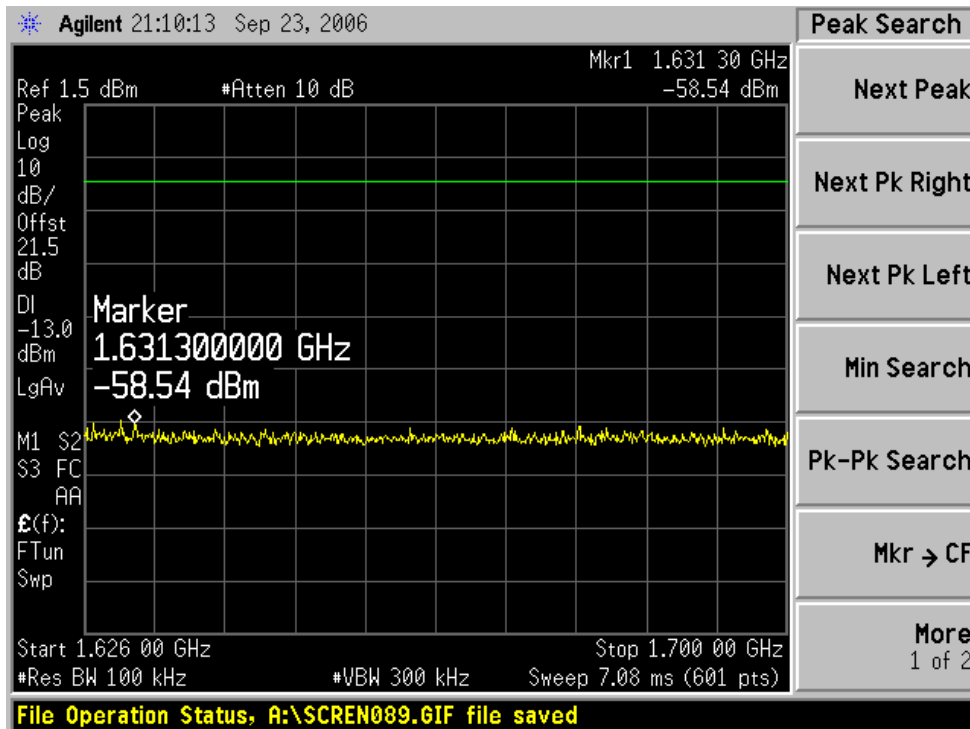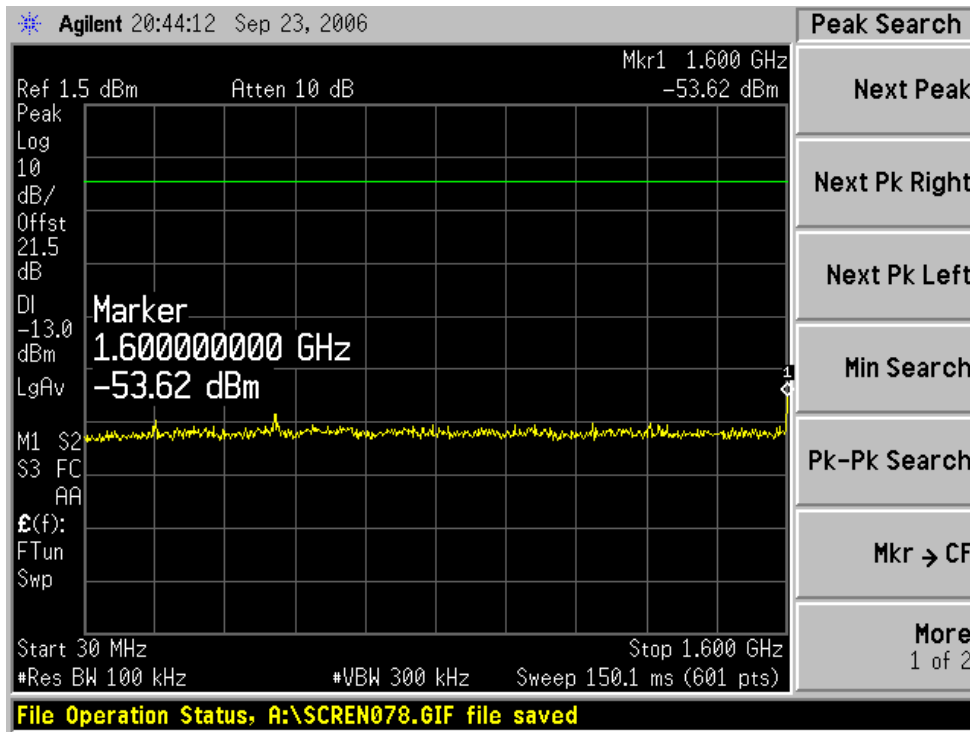

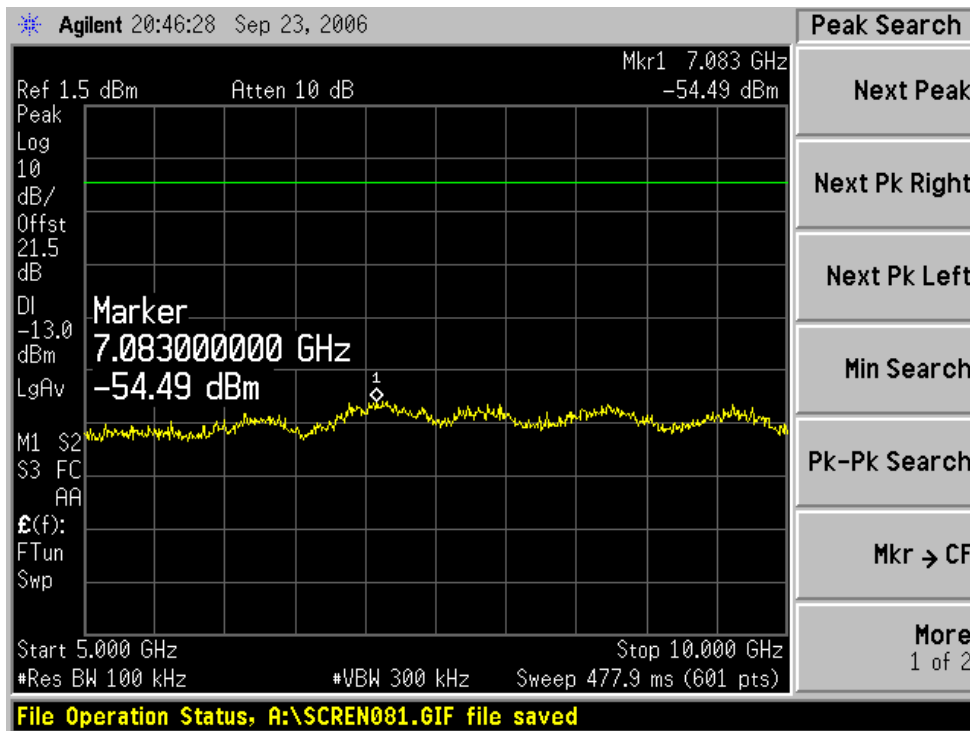
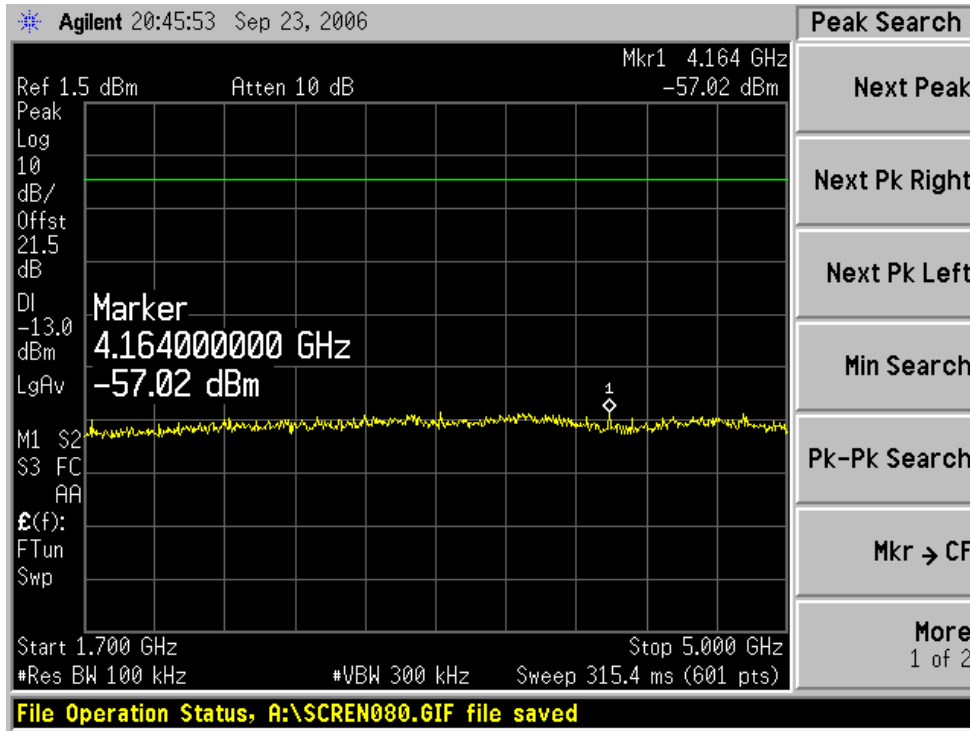



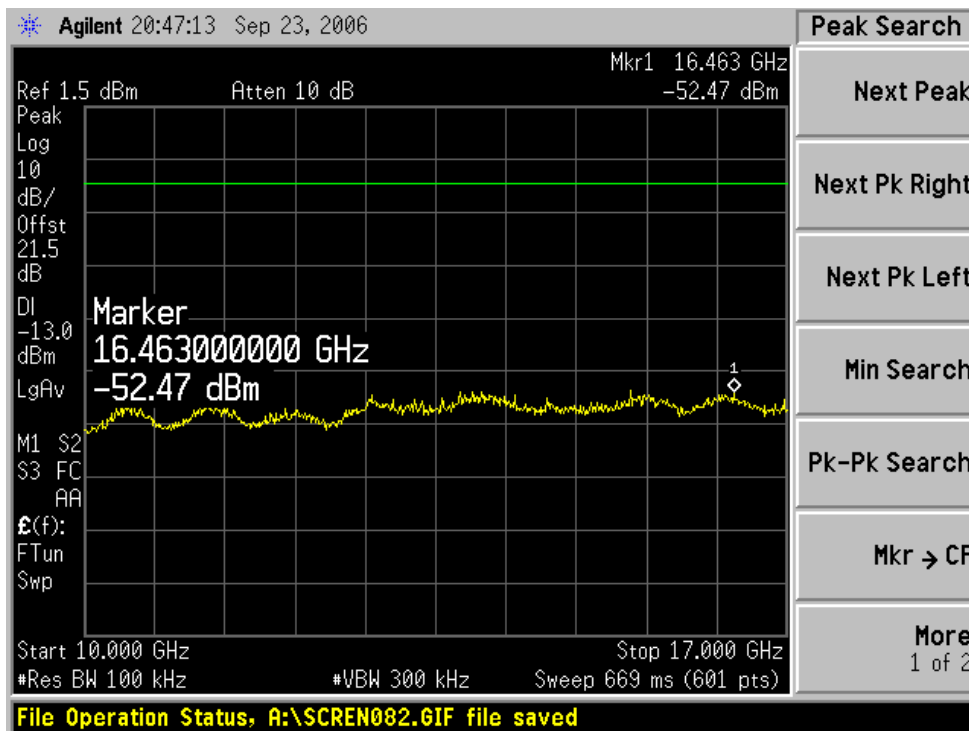


Middle Channel:


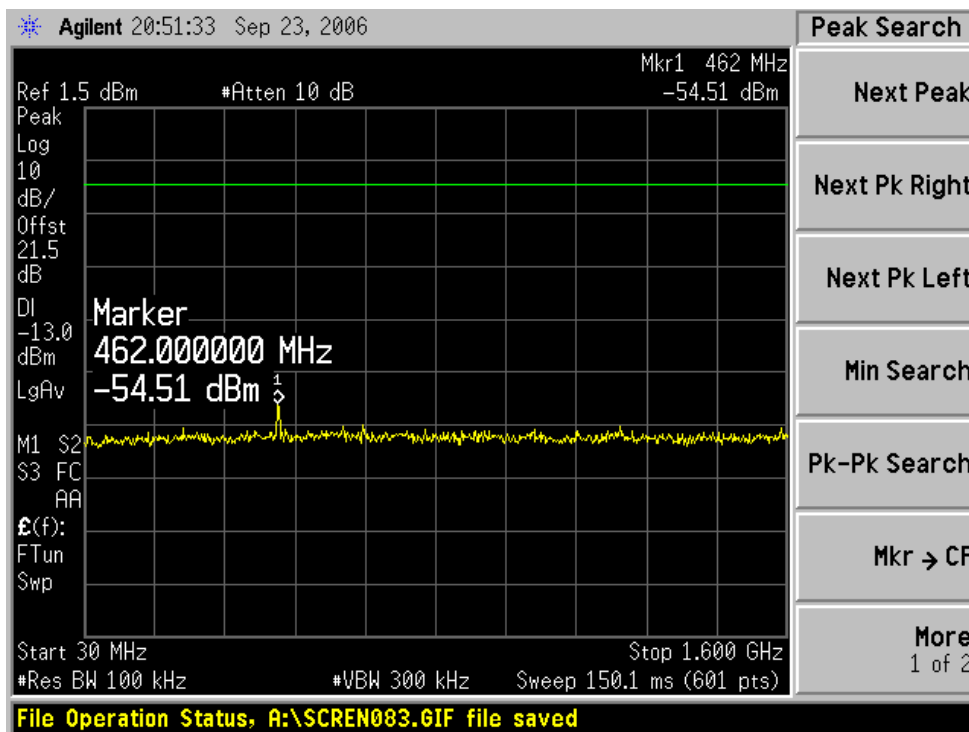






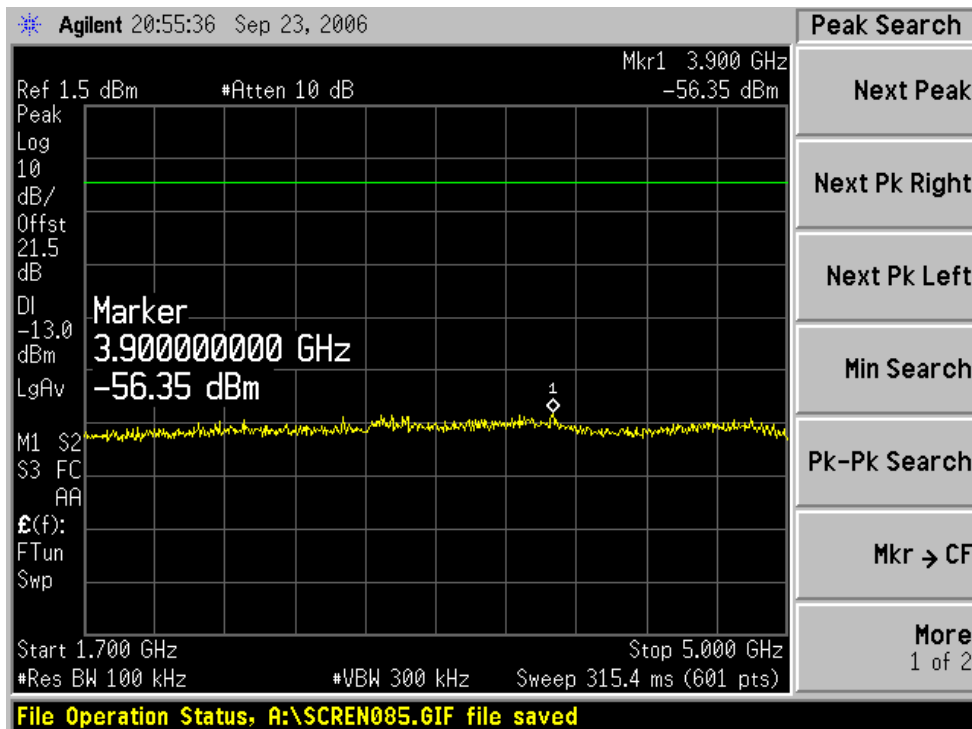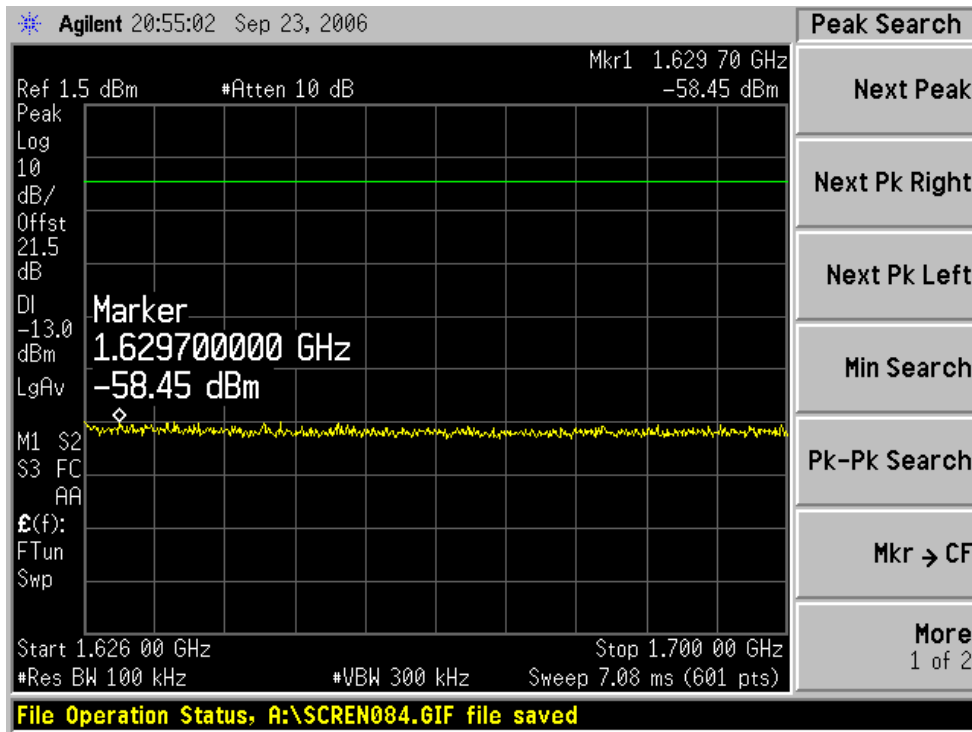


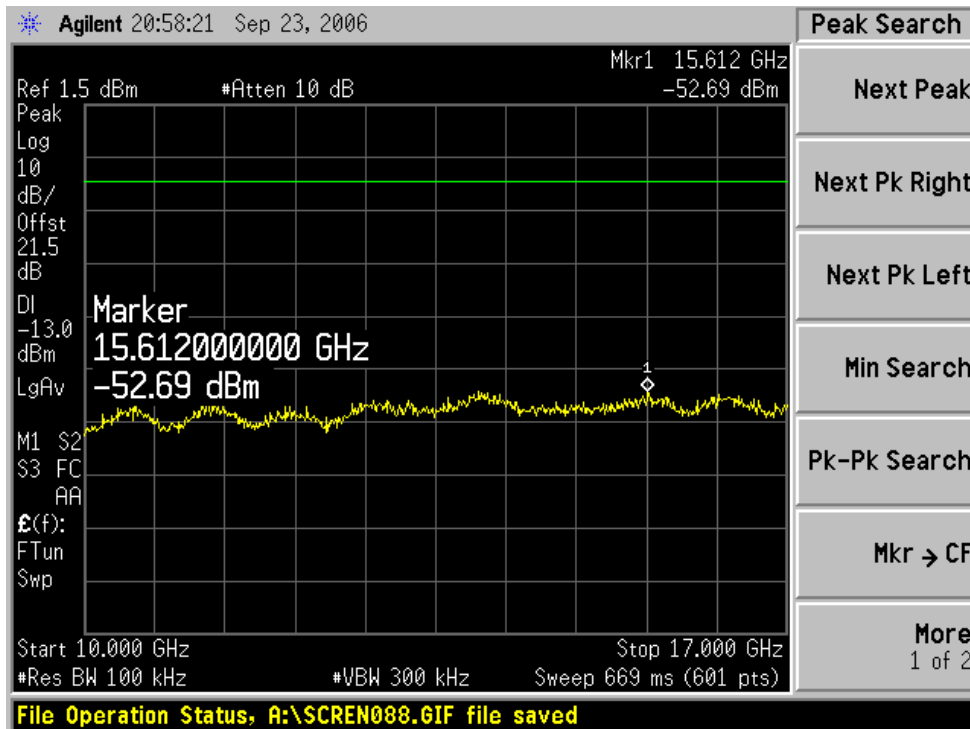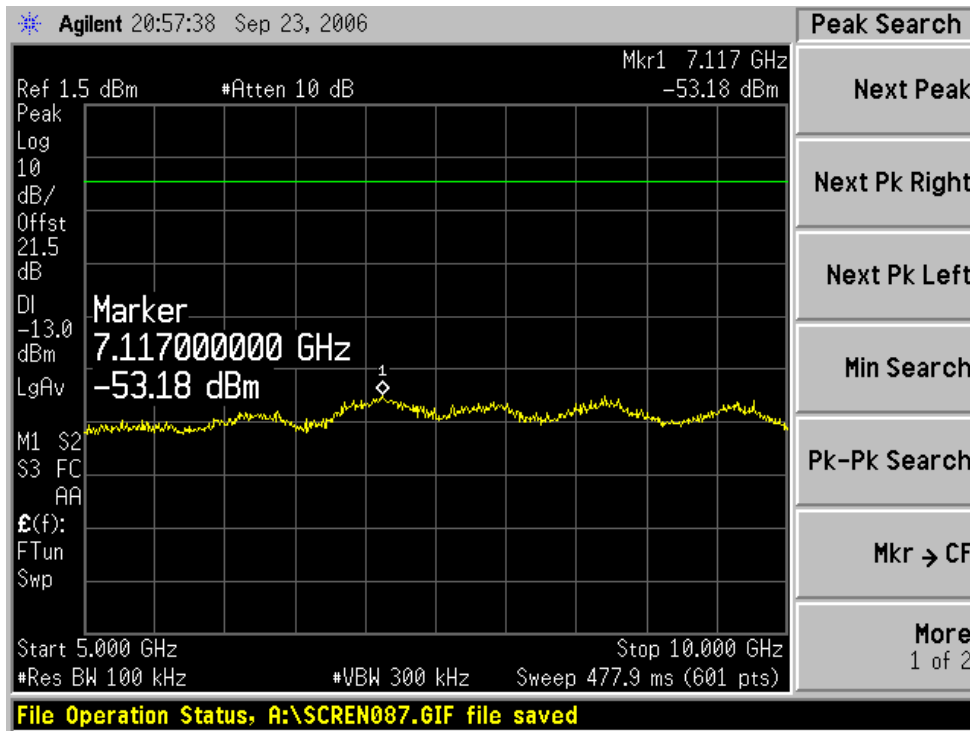



High Channel

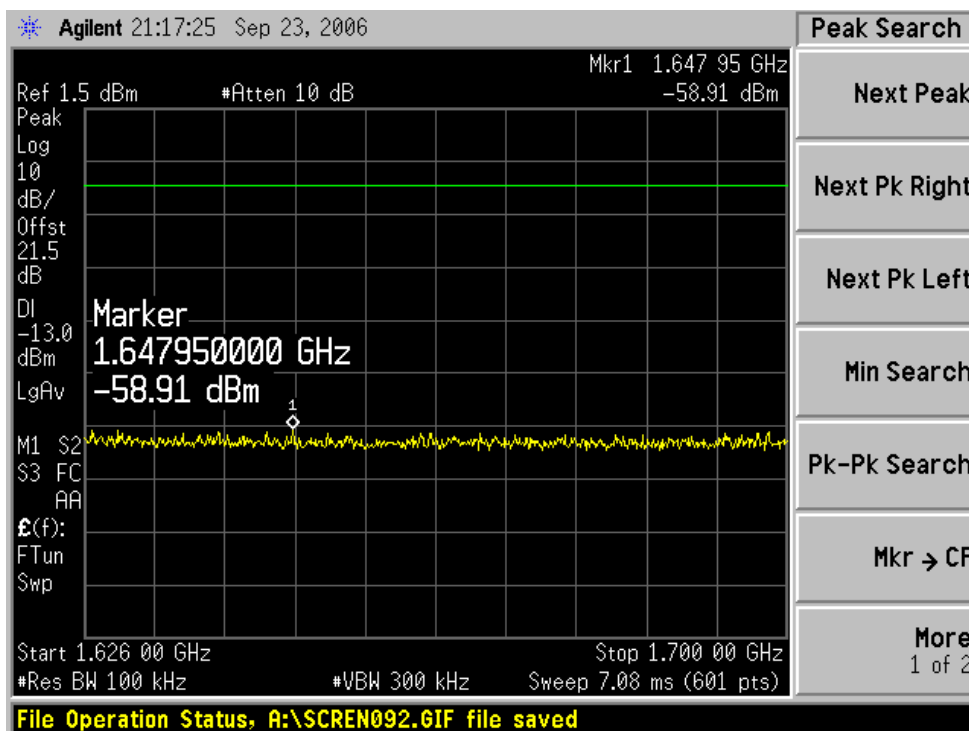
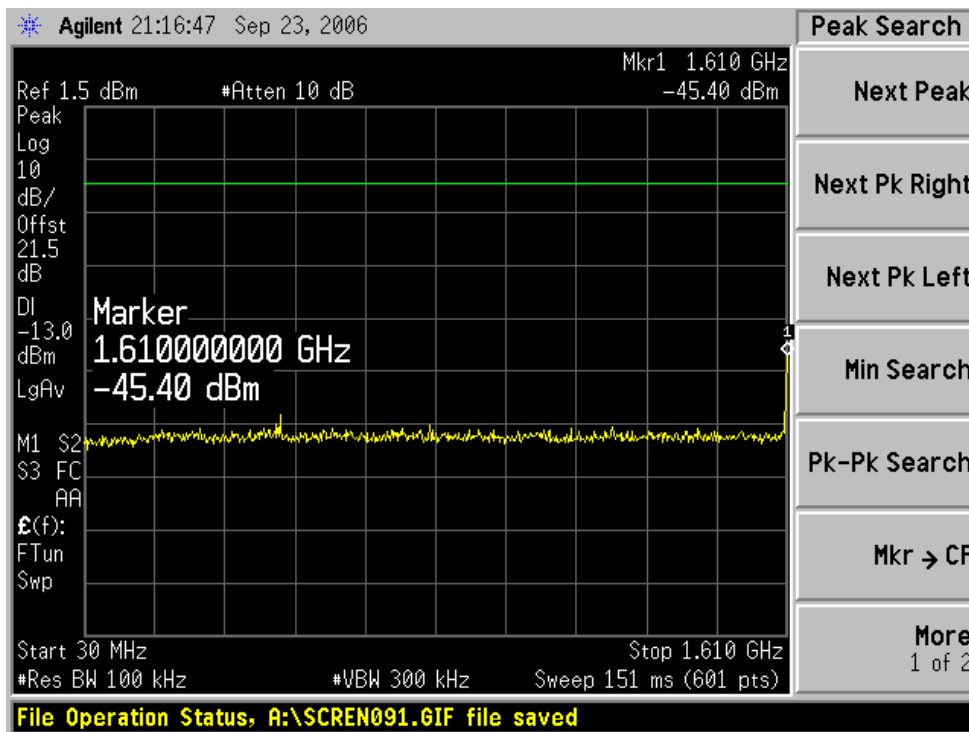


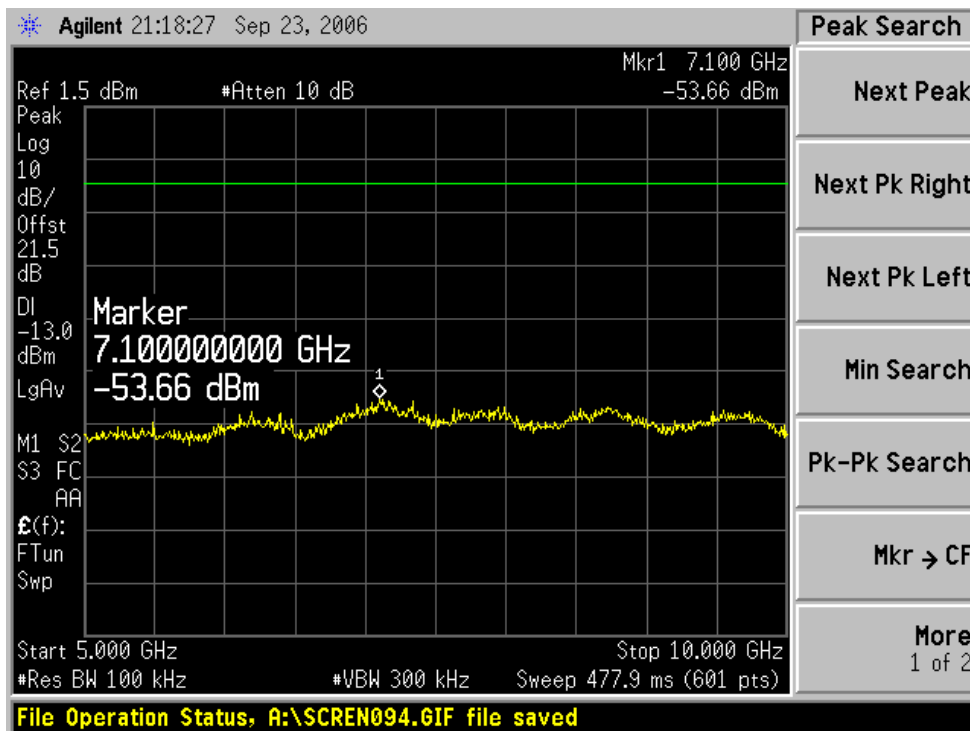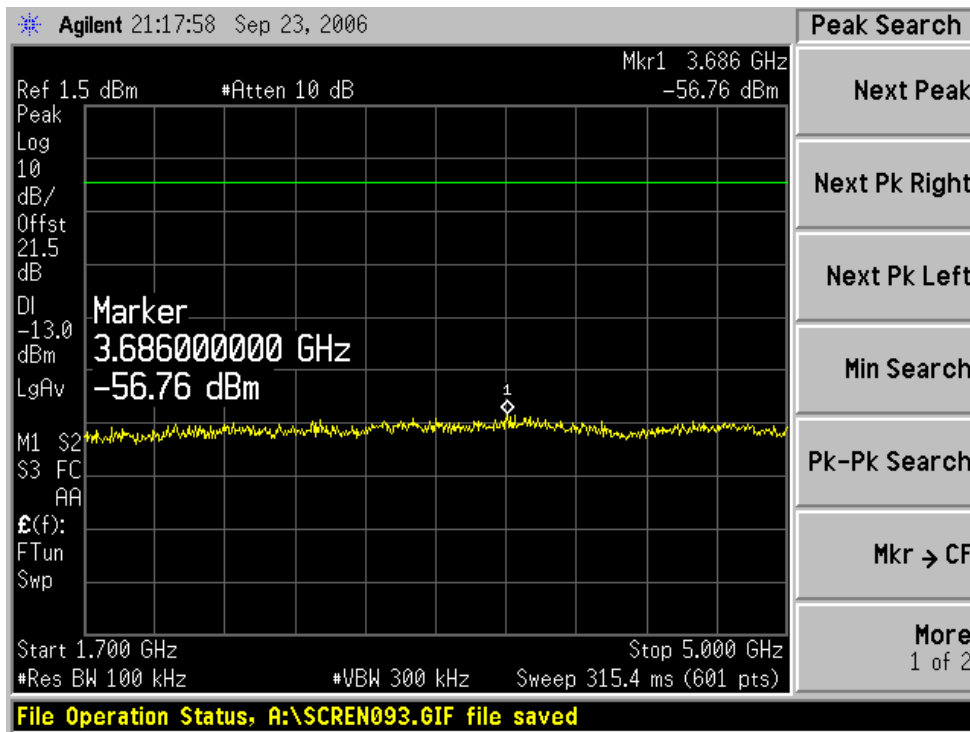

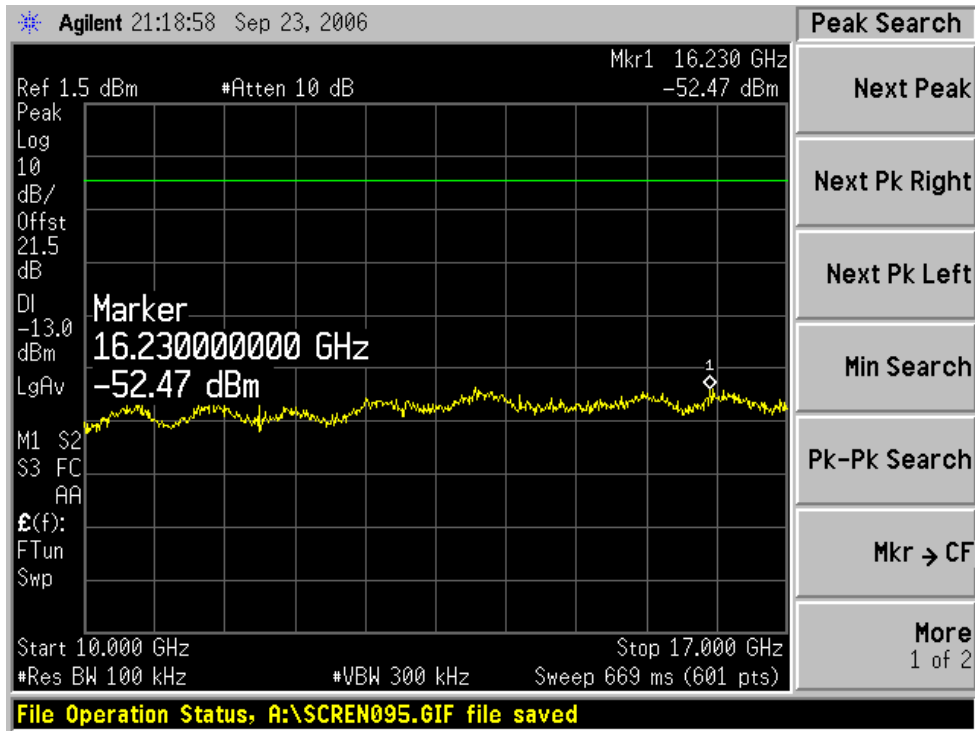


Intermodulation Port Emission Channel 1-5

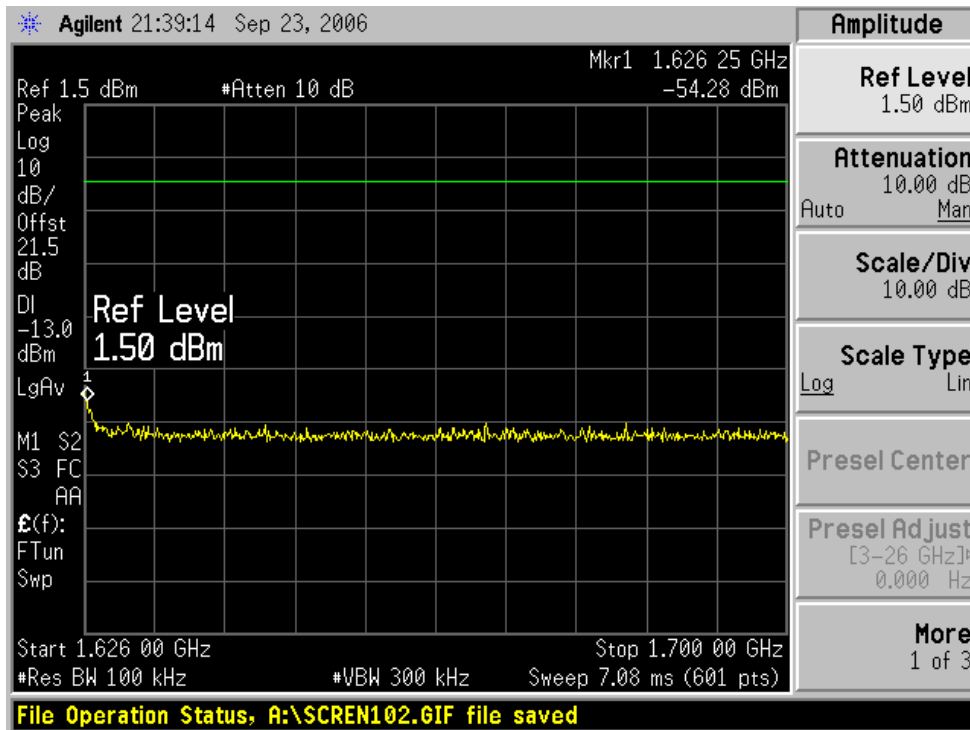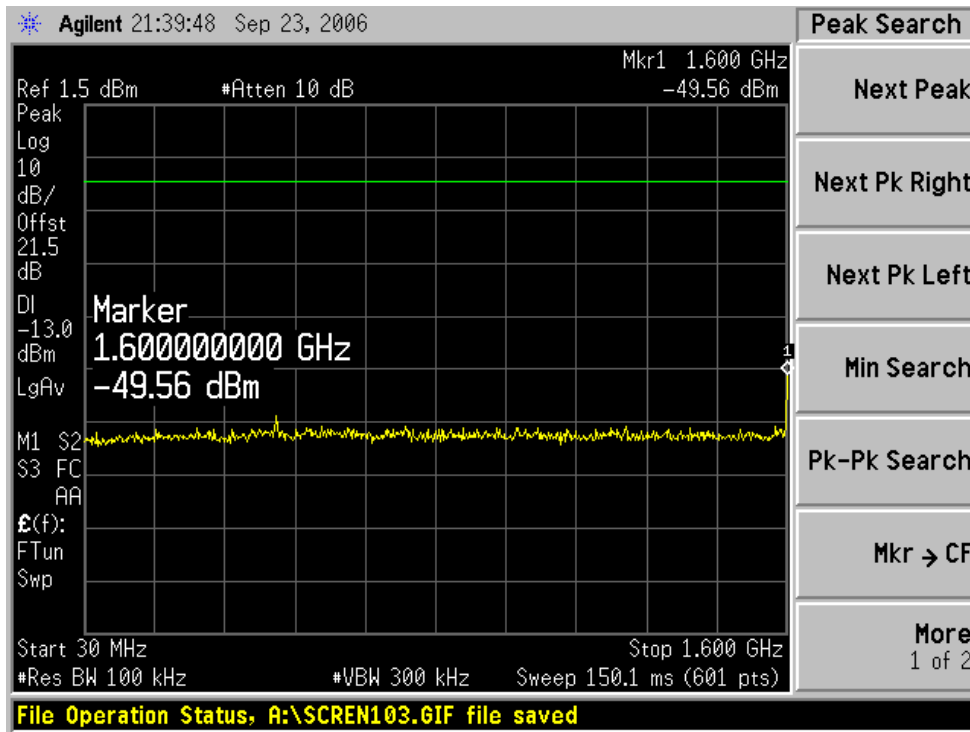

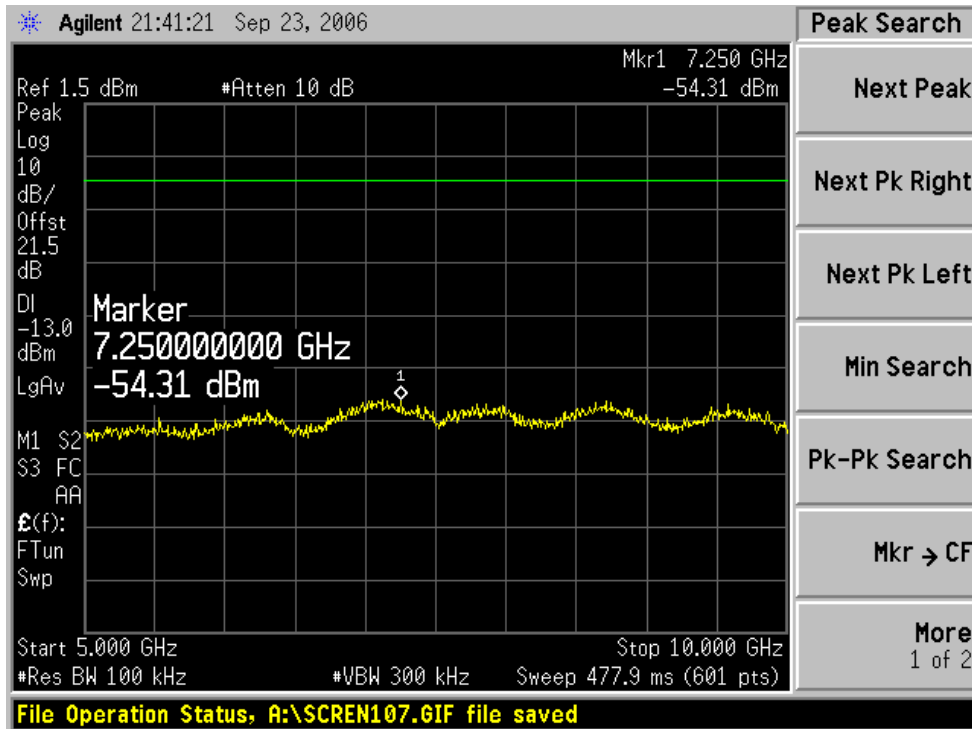
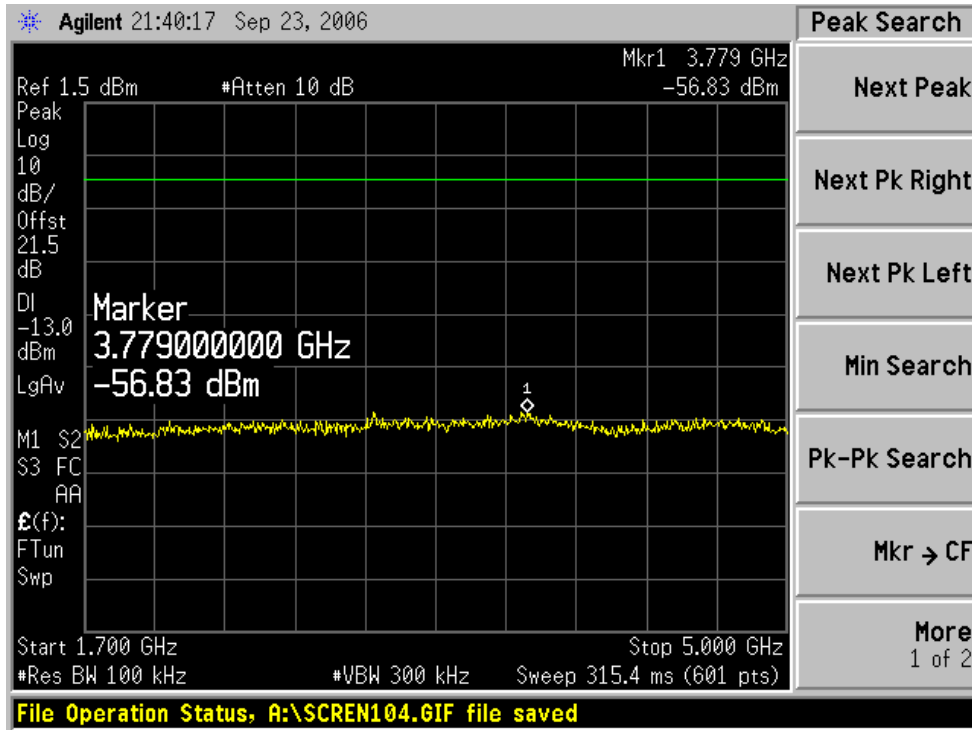






Intermodulation Port Emission Channel 5-9

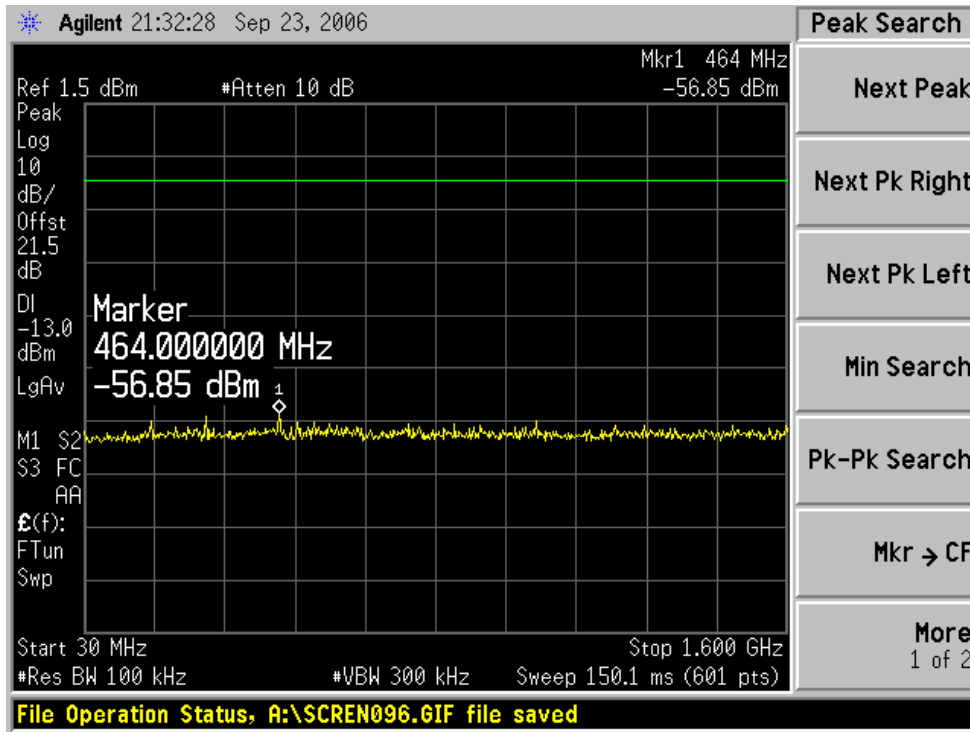



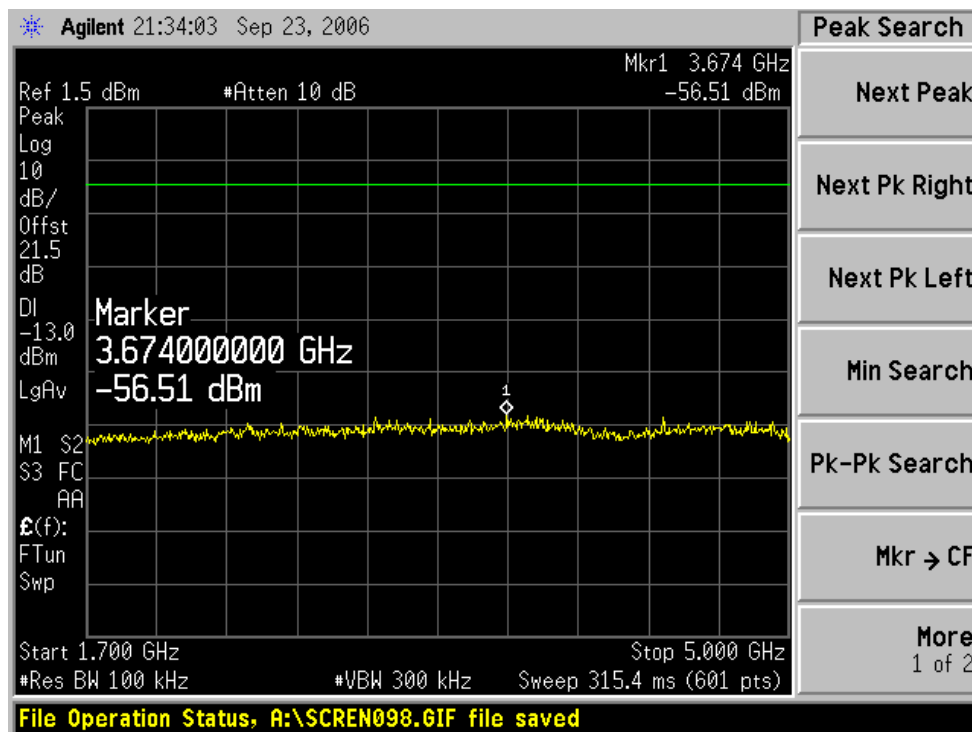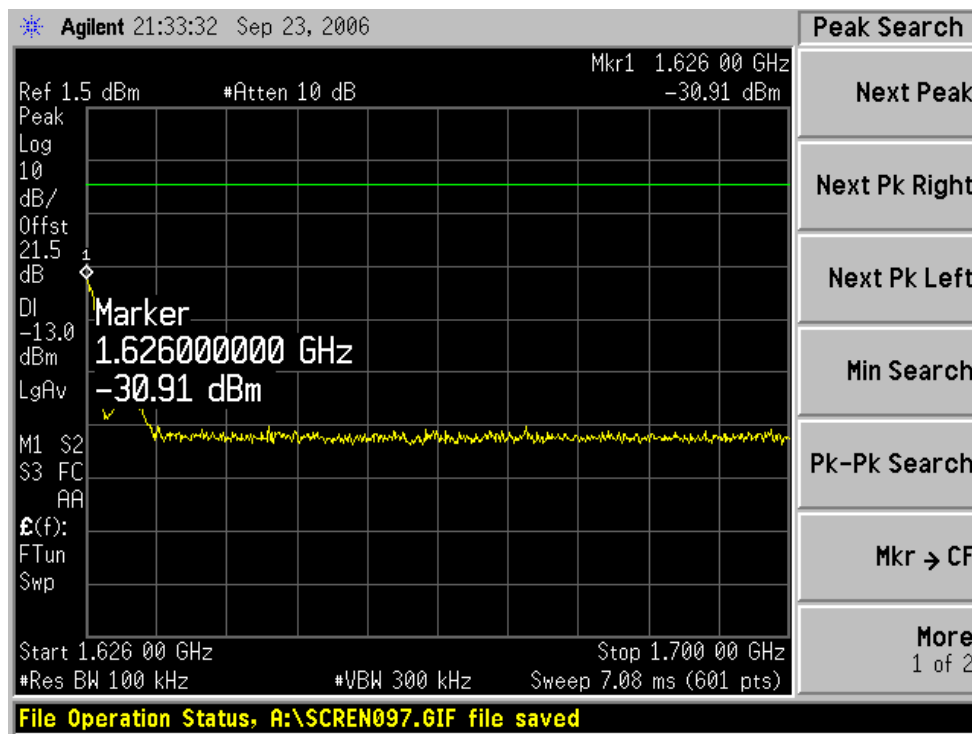

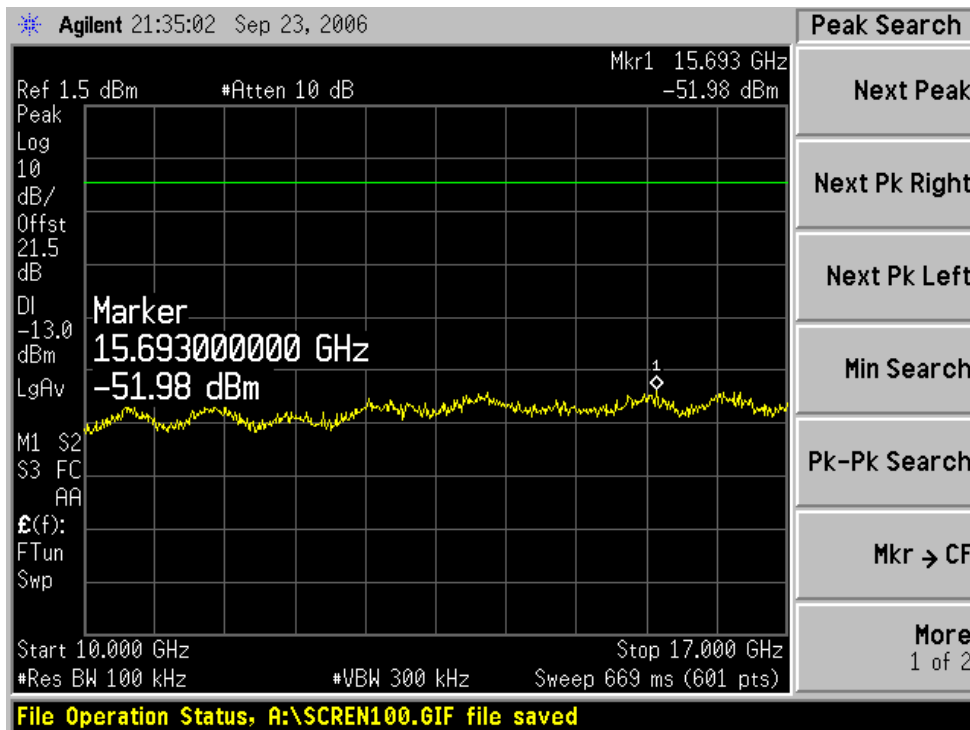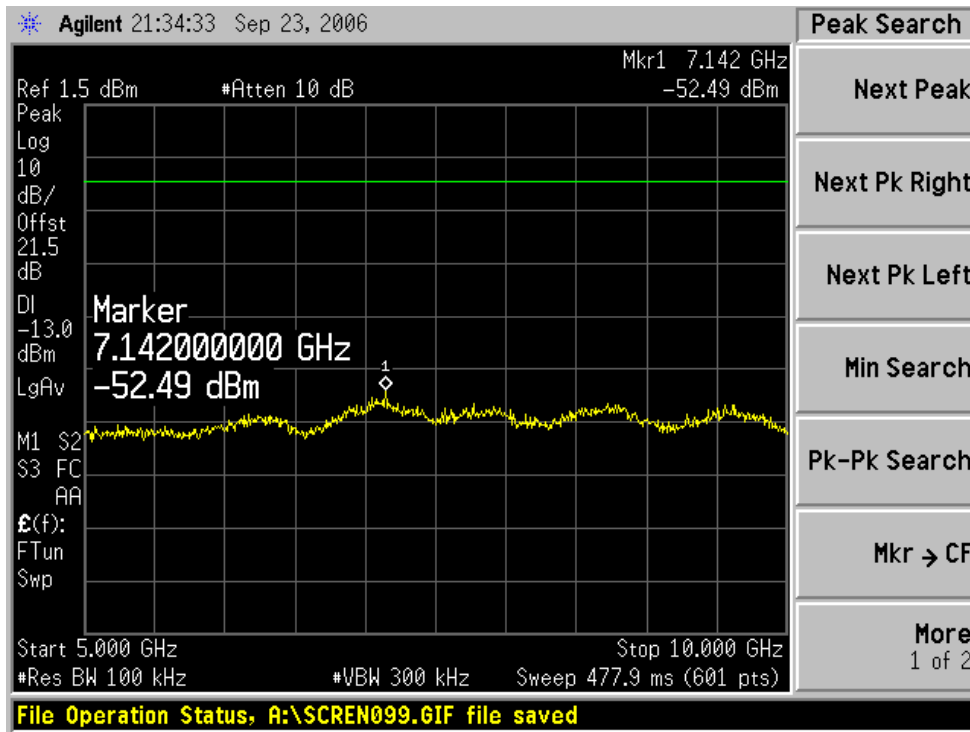

## §15.107 - CONDUCTED EMISSIONS

### EUT Setup

The measurement was performed in the shielded room, using the same setup per ANSI C63.4-2003 measurement procedure. The specification used was FCC 15 Class B limits.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and bundled as required.

The EUT was connected to 12 VDC via AC/DC adapter connected to 120VAC/60Hz power source.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
R&S	Receiver, EMI Test	ESCS30	100176	2006-03-16
R&S	LISN, Artificial Mains	ESH2-Z5	871884/039	2006-11-12

\* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

### Test Procedure

During the conducted emission test, the power cord of the EUT was connected to the mains outlet of the LISN-1, the power cord of the monitor and modem were connected to the LISN-2.

Maximizing procedure was performed on the six (6) highest provided emissions of the EUT.

All data was recorded in the quasi-peak and average detection mode. Quasi-Peak readings are distinguished with an "QP". Average readings are distinguished with an "Ave".

### Conducted Emissions Test Data

#### Environmental Conditions

Temperature:	23 °C
Relative Humidity:	65%
ATM Pressure:	1025mbar


*\*The testing was performed by James Ma on 2007-01-03.*

### Test Results Summary

According to the recorded data, the EUT complies with the FCC Conducted limits for a Class B device, with the worst margin reading of:

**-7.6 dB at 4.606010 MHz at Line mode at 150 kHz to 30 MHz**

**FCC CLASS B - Line**

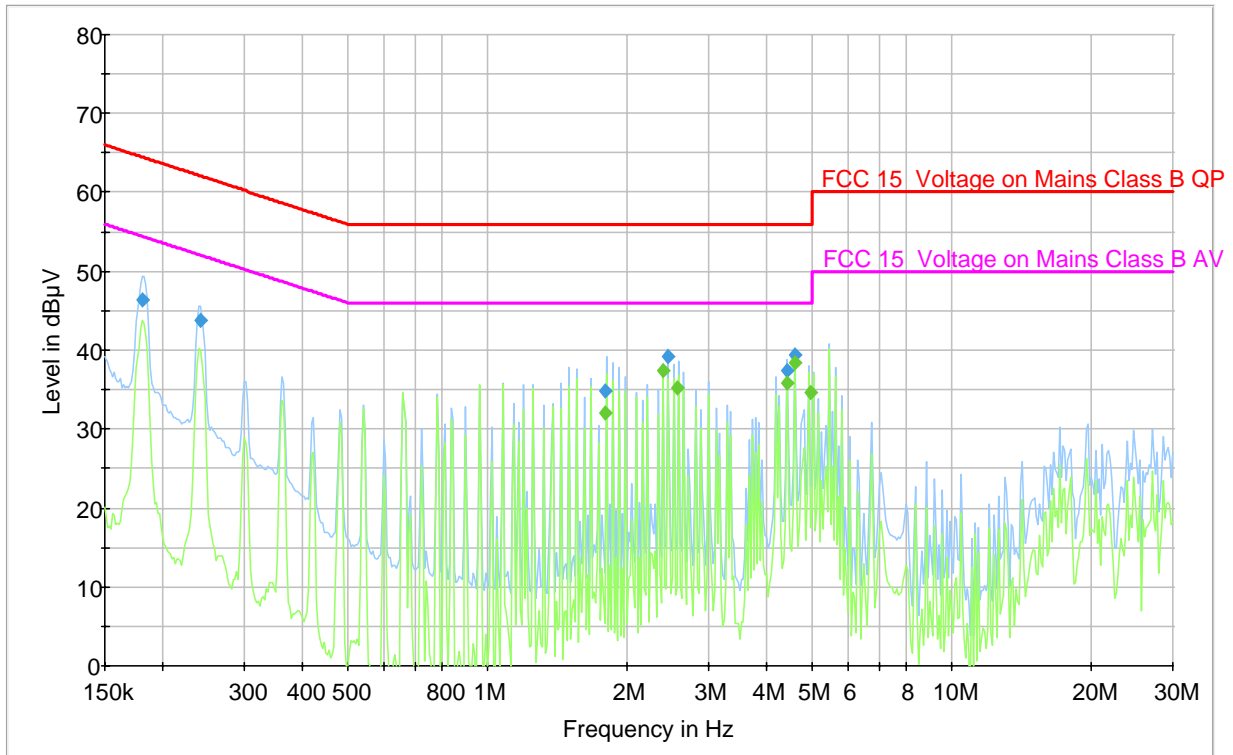


**QP Measurements**

Frequency (MHz)	QuasiPeak (dBµV)	Line	Correction Value (dB)	Limit (dBµV)	Margin (dB)
4.606010	39.4	L1	0.3	56.0	-16.6
2.452660	39.2	L1	0.3	56.0	-16.8
0.180170	46.4	L1	0.2	64.5	-18.1
0.240360	43.8	L1	0.2	62.1	-18.3
4.424330	37.4	L1	0.3	56.0	-18.6
1.799600	34.9	L1	0.3	56.0	-21.1

**Average Measurements**

Frequency (MHz)	Average (dBµV)	Line	Correction Value (dB)	Limit (dBµV)	Margin (dB)
4.606010	38.4	L1	0.3	46.0	-7.6
2.393640	37.5	L1	0.3	46.0	-8.5
4.424330	35.8	L1	0.3	46.0	-10.2
2.575010	35.3	L1	0.2	46.0	-10.7
4.963180	34.5	L1	0.3	46.0	-11.5
1.799600	32.1	L1	0.3	46.0	-14.0

**FCC CLASS B - Neutral**

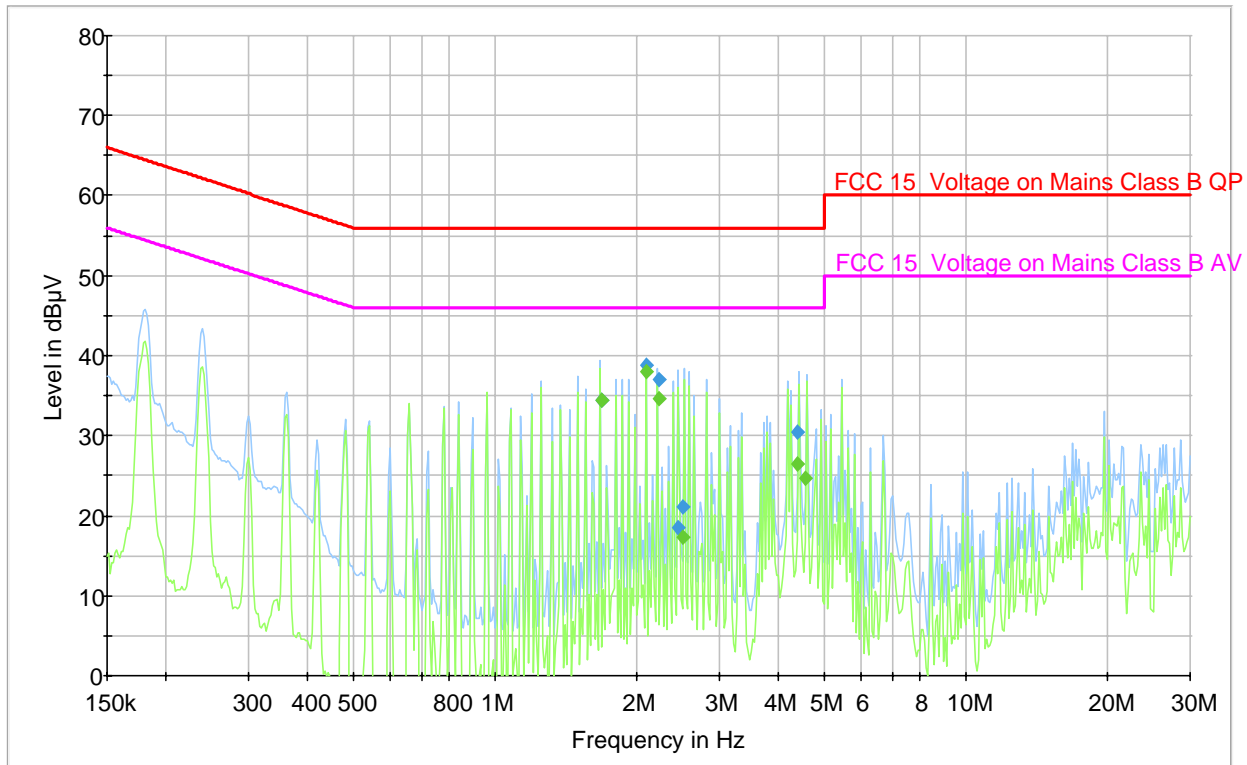

**QP Measurements**

Frequency (MHz)	QuasiPeak (dBµV)	Line	Correction Value (dB)	Limit (dBµV)	Margin (dB)
2.101290	38.7	N	0.2	56.0	-17.3
2.224470	37.1	N	0.3	56.0	-18.9
1.685250	34.4	N	0.3	56.0	-21.6
4.389220	30.5	N	0.3	56.0	-25.5
2.513100	21.1	N	0.3	56.0	-34.9
2.452660	18.6	N	0.3	56.0	-37.4

**Average Measurements**

Frequency (MHz)	Average (dBµV)	Line	Correction Value (dB)	Limit (dBµV)	Margin (dB)
2.101290	37.9	N	0.2	46.0	-8.1
2.224470	34.7	N	0.3	46.0	-11.3
1.685250	34.3	N	0.3	46.0	-11.7
4.389220	26.4	N	0.3	46.0	-19.6
4.569450	24.7	N	0.3	46.0	-21.4
2.513100	17.4	N	0.3	46.0	-28.6

## § 2.1053 & §25.202 (f) – FIELD STRENGTH OF SPURIOUS RADIATION

### Standard Applicable

Requirements: CFR 47, § 25.202(f). The mean power of emission shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 250 percent of the authorized bandwidth: An amount equal to 43 dB plus 10 times the logarithm (to the base 10) of the transmitter power in watts;

In any event, when an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in paragraphs (f) (1), (2) and (3) of this section.

### Measurement Procedure

The testing procedure was set according to TIA/EIA 603-C.

### Equipment Lists

Manufacturer	Description	Model	Serial Number	Cal. Date
Agilent	Analyzer, Spectrum	E4446A	US44300386	2006-03-06
HP	Pre, Amplifier (1 ~ 26.5 GHz)	8449B	3147A00400	2006-08-21
Sonoma Instrument	Amplifier Broadband ( 10 KHz - 2500 MHz )	317	260407	2006-03-20
Sunol Science	30Mhz ~ 3 GHz Antenna	JB3	A020106-3/S006628	2006-02-14
HP	Generator, Signal	83650B	3614A00276	2006-05-10
A.R.A	Antenna, Horn, DRG	DRG-118/A	1132	2005-08-17*

\*Two year calibration cycle

**Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

### Measurement Result

#### Environmental Conditions

Temperature:	23° C
Relative Humidity:	65%
ATM Pressure:	1025 mbar

\* The testing was performed by James Ma on 2007-01-03.

### Test Results Summary

According to the data in the following table, the EUT was found compliant with the Class B limits of FCC Standard §25.202 and §15.209, and had the worst margin reading(s) of:

- **2.3 dBi Antenna**
  - **-25.2 dB at 3221.46 MHz** at the Low Channel setting in the **Horizontal** polarization
  - **-27.1 dB at 3231.30 MHz** at the Middle Channel setting in the **Horizontal** polarization
  - **-42.0 dB at 3241.14 MHz** at the High Channel setting in the **Vertical** polarization
  
- **4.5 dBi Antenna**
  - **-24.2 dB at 3221.46 MHz** at the Low Channel setting in the **Vertical** polarization
  - **-32.7 dB at 3231.30 MHz** at the Middle Channel setting in the **Vertical** polarization
  - **-41.9 dB at 3241.14 MHz** at the High Channel setting in the **Horizontal** polarization
  
- **Unintentional Radiated Emissions**
  - **-3.1 dB at 38.201250 MHz** in the **Horizontal** polarization from 30 – 1000 MHz

**Out of Band (Carrier On)****Antenna Gain = 2.3 dBi***Final Scan 1GHz – 16.5GHz (Lowest Channel: 1610.73 MHz)*

Indicated Freq. (MHz)	Amplitude (dBuV)	Table Angle Degree	Test Antenna Height Meter	Polar H/V	Substituted					Limit (dBm)	Margin (dB)
					Freq. (MHz)	Level (dBm)	Ant. Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)		
3221.46	60.3	330	1.2	H	3221.46	-45.4	9.6	2.40	-38.2	-13	-25.2
4832.19	55.1	90	1.2	V	4832.19	-46.7	11.8	5.07	-40.0	-13	-27.0
4832.19	53.6	45	1.4	H	4832.19	-48.8	11.8	5.07	-42.1	-13	-29.1
3221.46	57.3	180	1.4	V	3221.46	-49.4	9.6	2.40	-42.2	-13	-29.2

*Final Scan 1GHz – 16.5GHz (Middle Channel: 1615.65 MHz)*

Indicated Freq. (MHz)	Amplitude (dBuV)	Table Angle Degree	Test Antenna Height Meter	Polar H/V	Substituted					Limit (dBm)	Margin (dB)
					Freq. (MHz)	Level (dBm)	Ant. Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)		
3231.30	58.4	330	3.1	H	3231.30	-47.3	9.6	2.40	-40.1	-13	-27.1
3231.30	50.4	180	3.1	V	3231.30	-56.2	9.6	2.40	-49.0	-13	-36.0
4846.95	42.3	90	1.2	V	4846.95	-59.5	11.8	5.07	-52.8	-13	-39.8
4846.95	42.1	90	1.4	H	4846.95	-60.3	11.8	5.07	-53.6	-13	-40.6

*Final Scan 1GHz – 16.5GHz (Highest Channel: 1620.57 MHz)*

Indicated Freq. (MHz)	Amplitude (dBuV)	Table Angle Degree	Test Antenna Height Meter	Polar H/V	Substituted					Limit (dBm)	Margin (dB)
					Freq. (MHz)	Level (dBm)	Ant. Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)		
3241.14	43.5	180	1.4	V	3241.14	-63.1	9.6	2.40	-55.9	-13	-42.9
3241.14	42.0	330	1.2	H	3241.14	-63.7	9.6	2.40	-56.5	-13	-43.5
4861.71	36.6	90	1.2	V	4861.71	-65.2	11.8	5.07	-58.5	-13	-45.5
4861.71	35.8	0	1.4	H	4861.71	-66.6	11.8	5.07	-59.9	-13	-46.9

**Antenna Gain = 4.5 dBi***Final Scan 1GHz – 16.5GHz (Lowest Channel: 1610.73 MHz)*

Indicated Freq. (MHz)	Amplitude (dBuV)	Table Angle Degree	Test Antenna Height Meter	Polar H/V	Substituted					Limit (dBm)	Margin (dB)
					Freq. (MHz)	Level (dBm)	Ant. Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)		
3221.46	62.2	180	2.6	V	3221.46	-44.4	9.6	2.40	-37.2	-13	-24.2
4832.19	57.3	90	2.5	V	4832.19	-44.5	11.8	5.07	-37.8	-13	-24.8
3221.46	58.5	330	2.7	H	3221.46	-47.2	9.6	2.40	-40.0	-13	-27.0
4832.19	52.4	230	2.5	H	4832.19	-50.0	11.8	5.07	-43.3	-13	-30.3




*Final Scan 1GHz – 16.5GHz (Middle Channel: 1615.65 MHz)*

Indicated Freq. (MHz)	Amplitude (dBuV)	Table Angle Degree	Test Antenna Height Meter	Polar H/V	Substituted					Limit (dBm)	Margin (dB)
					Freq. (MHz)	Level (dBm)	Ant. Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)		
3231.30	53.7	180	1.4	V	3231.30	-52.9	9.6	2.40	-45.7	-13	-32.7
3231.30	50.7	330	1.2	H	3231.30	-55.0	9.6	2.40	-47.8	-13	-34.8
4846.95	41.2	180	1.2	V	4846.95	-60.6	11.8	5.07	-53.9	-13	-40.9
4846.95	36.4	180	1.4	H	4846.95	-66.0	11.8	5.07	-59.3	-13	-46.3

*Final Scan 1GHz – 16.5GHz (Highest Channel: 1620.57 MHz)*

Indicated Freq. (MHz)	Amplitude (dBuV)	Table Angle Degree	Test Antenna Height Meter	Polar H/V	Substituted					Limit (dBm)	Margin (dB)
					Freq. (MHz)	Level (dBm)	Ant. Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)		
3241.14	44.5	180	1.4	V	3241.14	-62.1	9.6	2.40	-54.9	-13	-41.9
3241.14	40.6	330	1.2	H	3241.14	-65.1	9.6	2.40	-57.9	-13	-44.9
4861.71	37.2	90	1.2	V	4861.71	-64.6	11.8	5.07	-57.9	-13	-44.9
4861.71	35.4	180	1.4	H	4861.71	-67.0	11.8	5.07	-60.3	-13	-47.3

## Final Scan 30 MHz – 1000 MHz

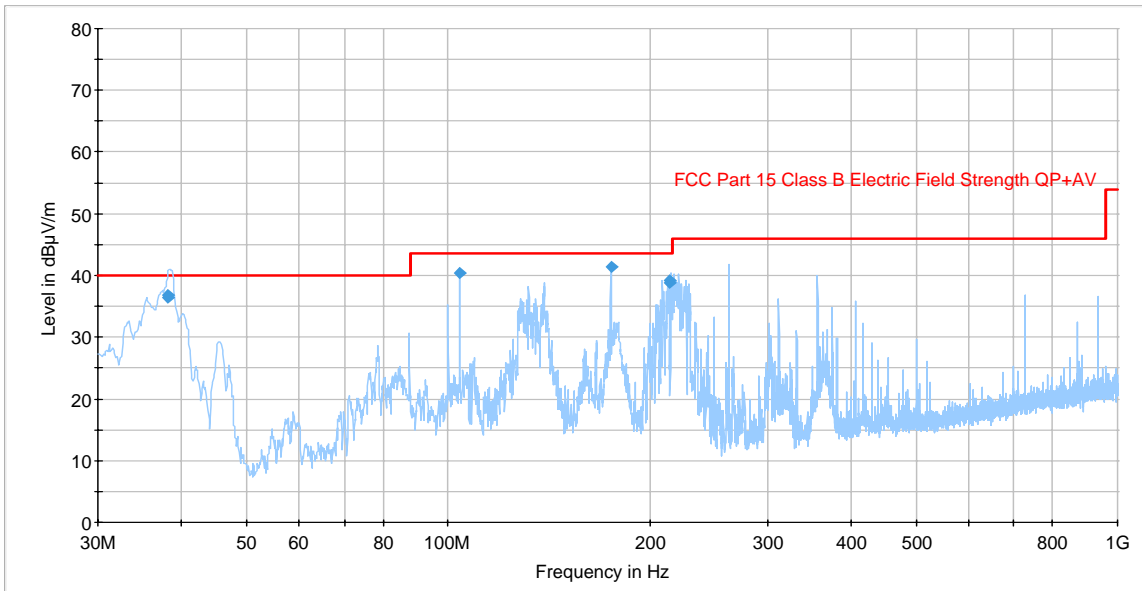

Frequency (MHz)	Quasi Peak (dBµV)	Antenna height (cm)	Polarity	Turntable position (deg)	Limit (dBµV/m)	Margin (dB)
38.201250	36.9	99.0	V	-3.0	40.0	-3.1
38.246250	36.5	99.0	V	-2.0	40.0	-3.5
104.002500	40.3	99.0	V	164.0	43.5	-3.2
175.015000	41.5	99.0	V	0.0	43.5	-2.0
214.266250	39.3	153.0	H	321.0	43.5	-4.2
214.395000	38.8	188.0	H	346.0	43.5	-4.7

## §25.202 (f) (1)..(3) – EMISSION LIMITATIONS

### Standard Applicable

According to CFR 47, § 25.202 (f) (1) through (3), the mean power of emission shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (1) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: 25 dB;
- (2) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 100 percent up to and include 250 percent of the authorized bandwidth: 35 dB;
- (3) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 250 percent of the authorized bandwidth: An amount equal to 43 dB plus 10 times the logarithm (to the base 10) of the transmitter power in watts

### Measurement Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 4 kHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

### Equipment Lists

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Analyzer, Spectrum	E4446A	US44300386	2006-03-06

\* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.


### Measurement Result

#### Environmental Conditions


Temperature:	23° C
Relative Humidity:	65%
ATM Pressure:	1025 mbar

\* *The testing was performed by James Ma on 2007-01-04.*


Low Channel

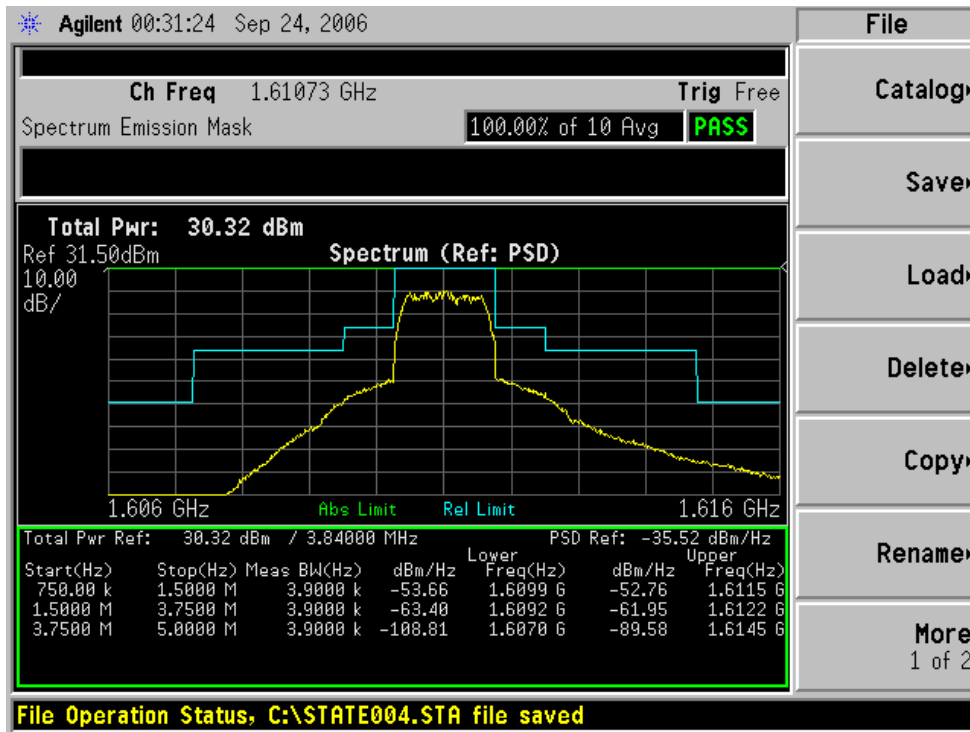


Middle Channel

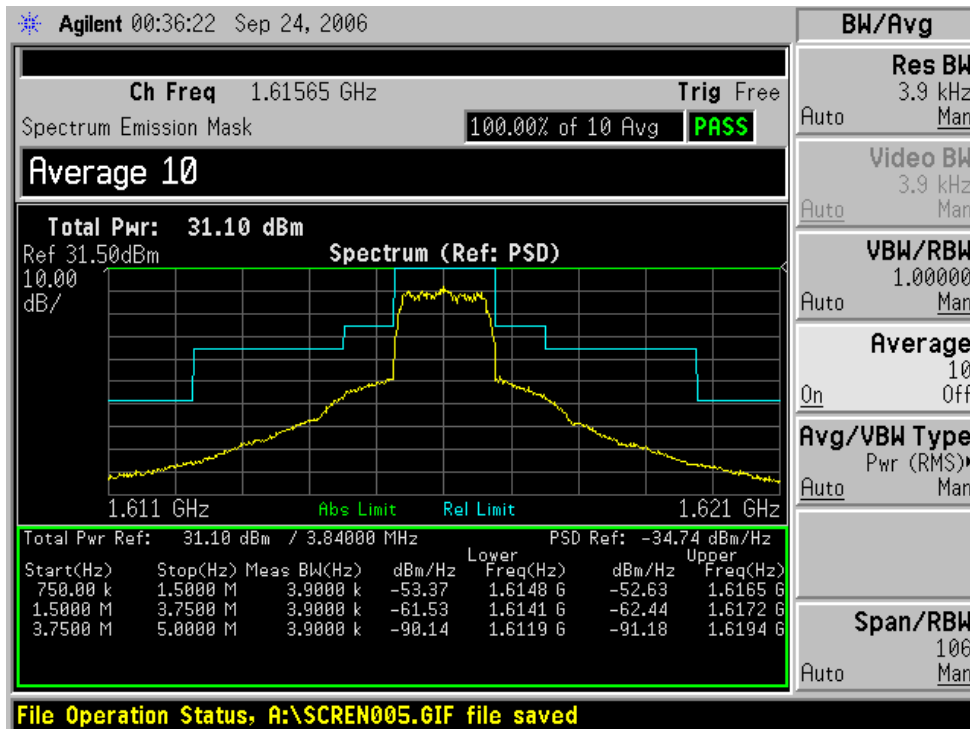

High Channel

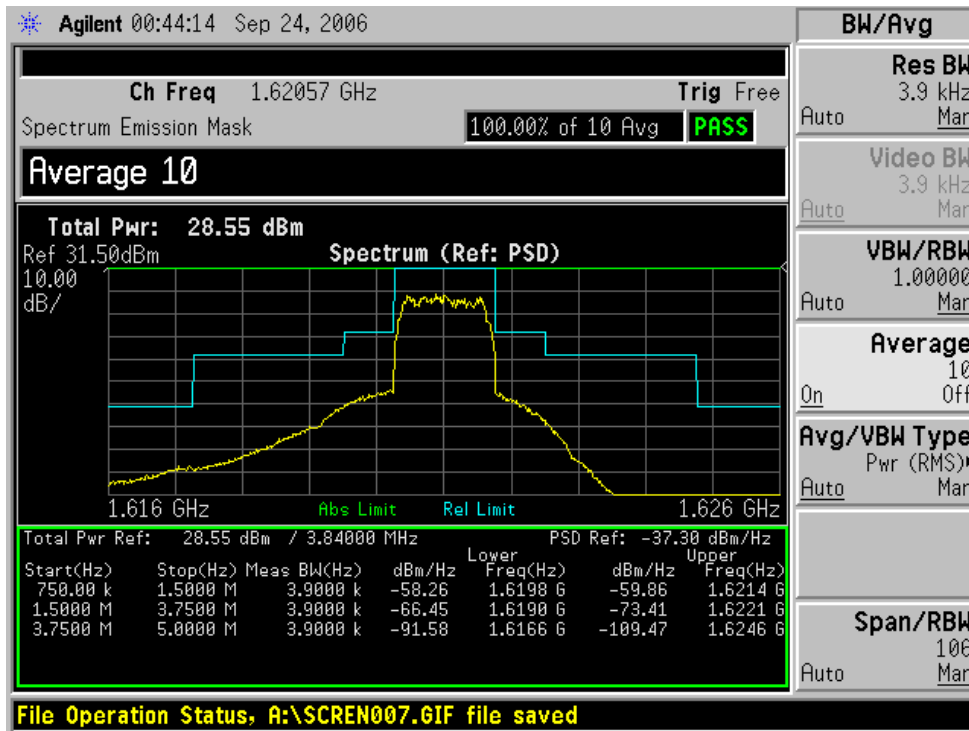

26 dB & Occupied Bandwidth

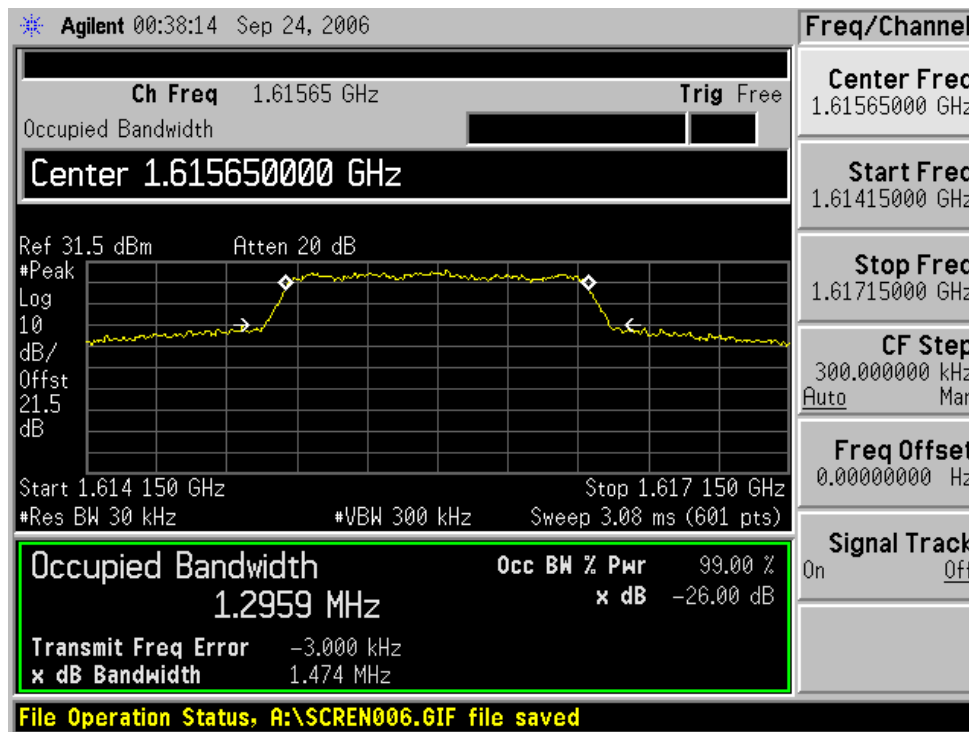

## §2.1046 & §25.204 – POWER OUTPUT

### Standard Applicable

According to §25.204 (a): in bands shared coequally with terrestrial radio communication services, the equivalent isotropically radiated power transmitted in any direction towards the horizon by an earth station, other than an ESV, operating in frequency bands between 1 and 15 GHz, shall not exceed the following limits except as provided for in paragraph (c) of this section:

+40 dBW in any 4 kHz band for  $\Theta \leq 0^\circ$

+40 + 3 $\Theta$  dBW in any 4 kHz band for  $0^\circ < \Theta \leq 5^\circ$

where  $\Theta$  is the angle of elevation of the horizon viewed from the center of radiation of the antenna of the earth station and measured in degrees as positive above the horizontal plane and negative below it.

### Measurement Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a spectrum analyzer.



### Equipment Lists

Manufacturer	Description	Model	Serial Number	Cal. Date
Agilent	Analyzer, Spectrum	E4446A	US44300386	2006-03-06

\* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

### Measurement Result

#### Environmental Conditions

Temperature:	23° C
Relative Humidity:	65%
ATM Pressure:	1025 mbar

\* *The testing was performed by James Ma on 2007-01-04.*


**Antenna Gain = 2.3 dBi**

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Antenna Gain (dBi)	e.i.r.p (dBm)	Limit (dBW)
Low	1610.73	31.65	2.30	33.95	40
Mid	1615.65	32.53	2.30	34.83	
High	1620.57	30.95	2.30	33.25	


**Antenna Gain = 4.5 dBi**

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Antenna Gain (dBi)	e.i.r.p (dBm)	Limit (dBW)
Low	1610.73	31.65	4.50	36.15	40
Mid	1615.65	32.53	4.50	37.03	
High	1620.57	30.95	4.50	35.45	

Low Channel

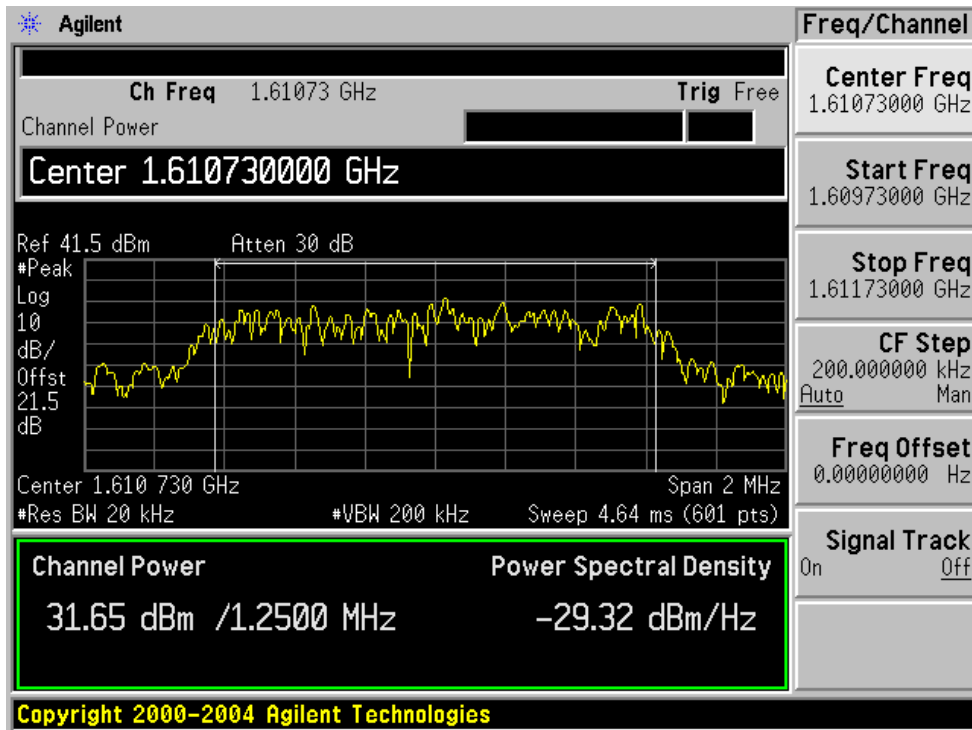


Middle Channel

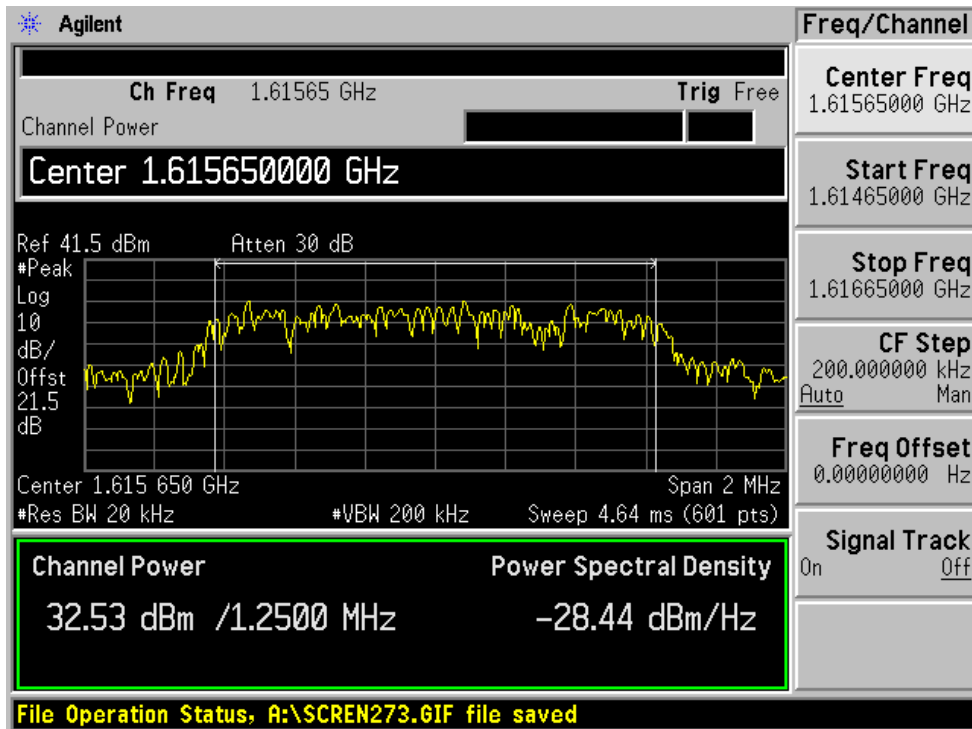



High Channel

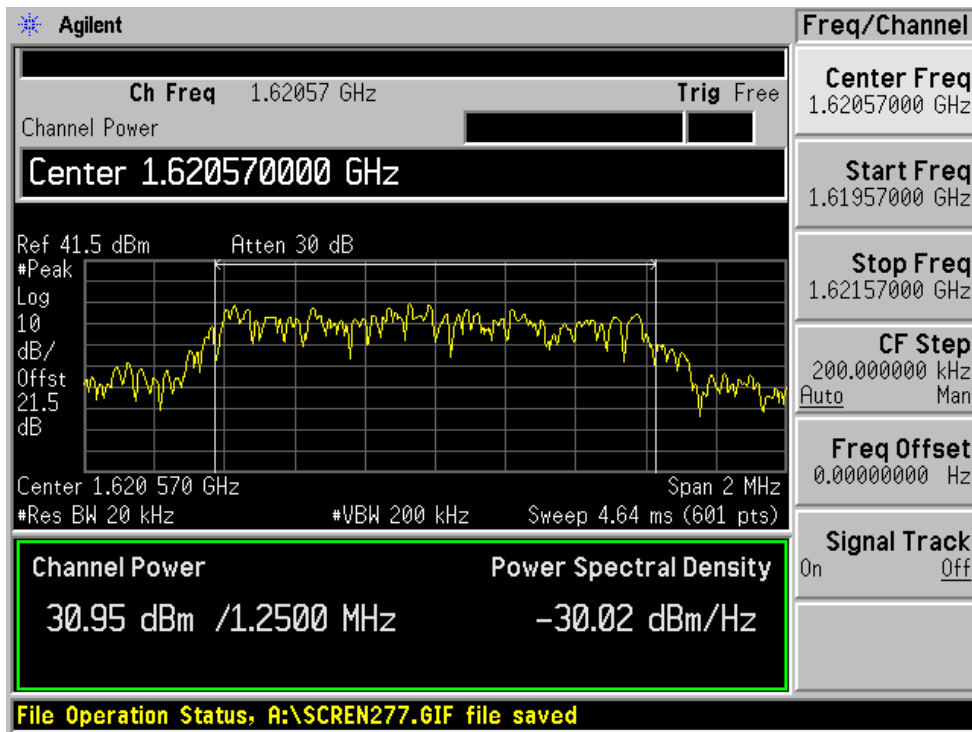

## §25.216(b) & §25.216(g) – EMISSIONS FROM MOBILE EARTH STATIONS FOR PROTECTION OF AERONAUTICAL RADIONAVIGATION-SATELLITE SERVICE

### Applicable Standard

According to §25.216(b), the e.i.r.p. density of emissions from mobile earth stations placed in service on or before July 21, 2002 with assigned uplink frequencies between 1610 MHz and 1626.5 MHz shall not exceed  $-64$  dBW/MHz, averaged over any 2 millisecond active transmission interval, in the band 1587.42–1605 MHz. The e.i.r.p. of discrete emissions of less than 700 Hz bandwidth generated by such stations shall not exceed  $-74$  dBW, averaged over any 2 millisecond active transmission interval, in the 1587.42–1605 MHz band.

According to §25.216(g), mobile earth stations manufactured more than six months after Federal Register publication of the rule changes adopted in FCC 03–283 with assigned uplink frequencies in the 1610–1626.5 MHz band shall suppress the power density of emissions in the 1605–1610 MHz band-segment to an extent determined by linear interpolation from  $-70$  dBW/MHz at 1605 MHz to  $-10$  dBW/MHz at 1610 MHz averaged over any 2 millisecond active transmission interval. The e.i.r.p. of discrete emissions of less than 700 Hz bandwidth from such stations shall not exceed a level determined by linear interpolation from  $-80$  dBW at 1605 MHz to  $-20$  dBW at 1610 MHz, averaged over any 2 millisecond active transmission interval.

### Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.

### Equipment Lists

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Analyzer, Spectrum	E4446A	US44300386	2006-03-06

\* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.


### Measurement Result

#### Environmental Conditions


Temperature:	23° C
Relative Humidity:	65%
ATM Pressure:	1025 mbar

\* *The testing was performed by James Ma on 2007-01-04.*

1559 MHz-1605 MHz

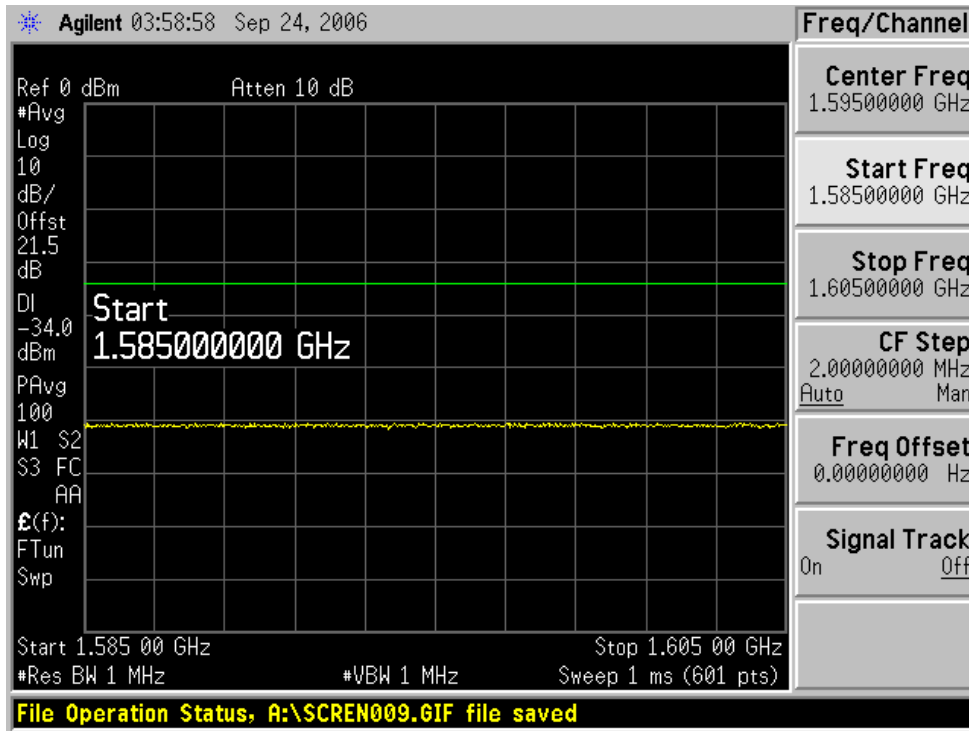

1605MHz-1610 MHz

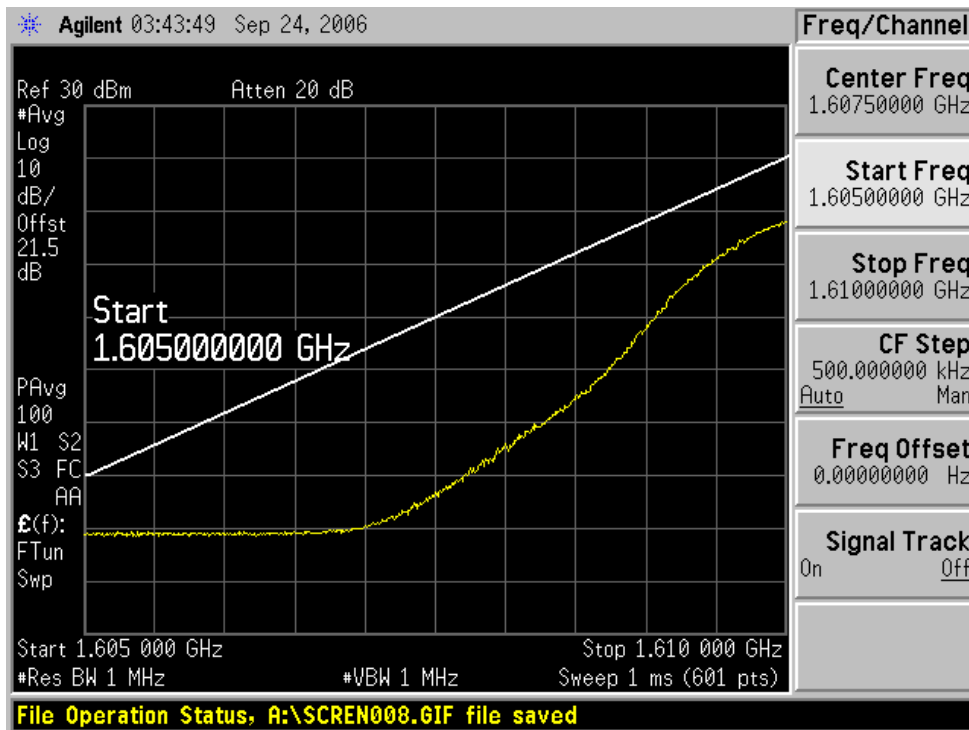

## §2.1055 – FREQUENCY STABILITY & §25.202(d) – FREQUENCY TOLERANCE

### Standard Applicable

According to §25.202(d) *Frequency tolerance, Earth stations*. The carrier frequency of each earth station transmitter authorized in these services shall be maintained within 0.001 percent of the reference frequency.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
HP	Microwave Frequency Counter	5342A	2232A06380	2006-09-07
Tenney	Oven, Temperature	VersaTenn	12.222-193	2006-06-21

\* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

### Measurement Result

#### Environmental Conditions

Temperature:	23° C
Relative Humidity:	65%
ATM Pressure:	1025 mbar

\* *The testing was performed by James Ma on 2007-01-04.*

**Measurement Result****Frequency Stability vs. Temperature**

Reference Frequency: 1615.65 MHz, Limit: 0.001%

<b>Environment Temp (C)</b>	<b>Power Supply (V)</b>	<b>Measured Freq (MHz)</b>	<b>Error (%)</b>	<b>Limit (%)</b>
50	120	1615.651350	0.00008	0.001
40	120	1615.651150	0.00007	0.001
30	120	1615.651150	0.00007	0.001
20	120	1615.650850	0.00005	0.001
10	120	1615.650800	0.00005	0.001
0	120	1615.650325	0.00002	0.001
-10	120	1615.650465	0.00003	0.001
-20	120	1615.650750	0.00005	0.001
-30	120	1615.650892	0.00006	0.001

**Frequency Stability vs. Extreme Voltage**

Reference Frequency: 1615.65 MHz, Limit: 0.001%

<b>Environment</b>		<b>Measured Freq. (MHz)</b>	<b>Error (%)</b>	<b>Limit (%)</b>
<b>Power Supply (V)</b>	<b>Temperature (C)</b>			
138	20	1615.650950	0.00006	0.001
120	20	1615.650850	0.00005	0.001
102	20	1615.651050	0.00006	0.001