


Temperature Sensor Components

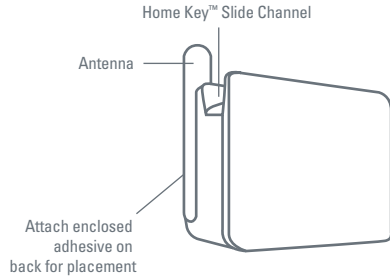

Temperature Sensor Uses:

- Bedroom
- Kitchen
- Attic
- Cellar
- Basement
- Bathroom
- Living Room
- Tool Shed
- Office
- Loft
- Garage
- Storage Area

FCC Statement

(Compliance Statement, Part 15.19): This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING (Part 15.21): Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

To comply with FCC's RF exposure limits for general population/uncontrolled exposure, the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

Industry Canada Statement

The term "IC" before the certification/registration number only signifies that the Industry Canada technical specifications were met.

Interference

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, then the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into a power source on different circuit than the receiver.

Sensor Maintenance and Battery Replacement

Cleaning the sensor

Clean with a soft, dry cloth.

To check sensor battery level

Using the Home Key, highlight the sensor icon. Click the thumbwheel once and note the battery status on the bottom line of the screen.

To check if sensor battery is low or depleted

When sensor battery is low, a flashing low battery icon appears on the Home Key above the sensor icon, and the screen is amber in color. When a battery is depleted, a question mark will appear above sensor icon.

Replacing a depleted battery

Remove the depleted battery and replace with one lithium CR123A 3V battery, available through the Internet and anywhere camera and camcorder supplies are sold.

IM00416015E
Part No.: 68B5040H11
© 2008 Eaton Corporation

EATON

EATON

HOMEheartbeat™
Temperature Sensor