

Friday, July 07, 2006

## Appendix B – Frequency Stability V's Temperature

EXLT02-A5 EX-5i

### Object:

To ensure that system emissions are maintained within the band of interest when exposed to extremes of temperature and voltage. Testing of the system's frequency stability was performed over the manufacturer's guaranteed extremes of temperature and voltage.

Test results and plots for Frequency Stability are reported within this Appendix.

### Test Configuration

Variant tested was 7.5 MHz QPSK on the two band edge channels 5,260 MHz and 5,332 MHz. To measure the carrier a software script was written to expose the carrier using the Single Side Band signature.

### Test Conditions

Variant was tested at;

- Ambient temperature and nominal voltage (48Vdc)
- Temperature -20°C, voltage variation 20 Vdc, 60Vdc
- Temperature +65°C, voltage variation 20 Vdc, 60Vdc

NOTE: Voltage variation was on the dc input to the EUT and not the ac mains.

Limit  $\pm 10\text{ppm}$  @ 5,260 MHz = 52.6 KHz


### Summary

The intentional radiator stays within the band of interest, (maximum deviation 6.2 KHz) over temperature and voltage extremes thus maintaining compliance irrespective of environmental conditions. Voltage variation did not effect frequency variation.


**EX-5i Frequency Stability Test over Temperature and Supply Voltage (DC)**

**Tuned to 5260MHz, 7.5MHz BW**

Temperature	Voltage	Measured Frequency	ppm
Ambient	48V	5260.0098	+1.86
-20C	20V	5260.0055	+1.05
-20C	60V	5260.0055	+1.05
+65C	20V	5260.0117	+2.22
+65C	60V	5260.0117	+2.22

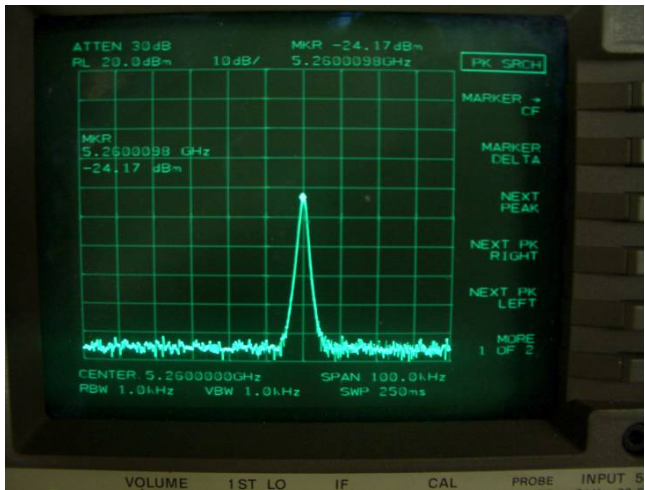

Ambient 48Vdc

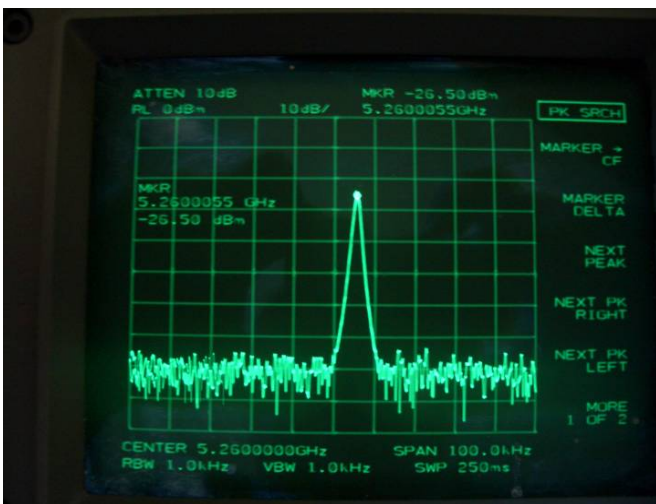


Cold -20°C, 60Vdc



Cold -20°C, 20Vdc




Hot +65°C, 60Vdc

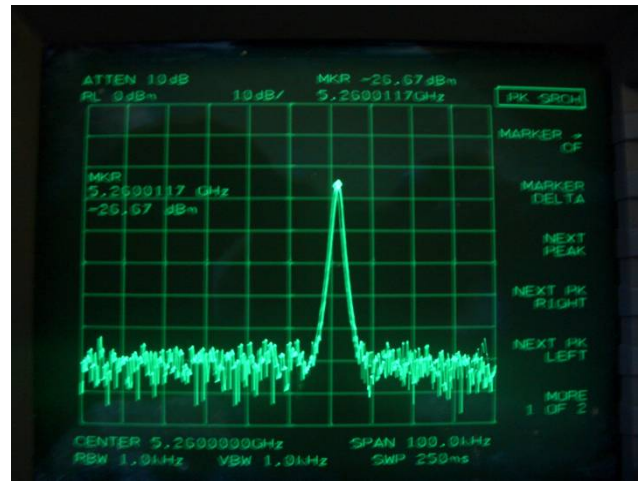

Hot +65°C, 20Vdc

**Tuned to 5332MHz, 7.5MHz BW**

Temperature	Voltage	Measured Frequency	ppm
Ambient	48V	5332.0105	+1.97
-20C	20V	5332.0073	+1.37
-20C	60V	5332.0073	+1.37
+65C	20V	5332.0117	+2.19
+65C	60V	5332.0117	+2.19

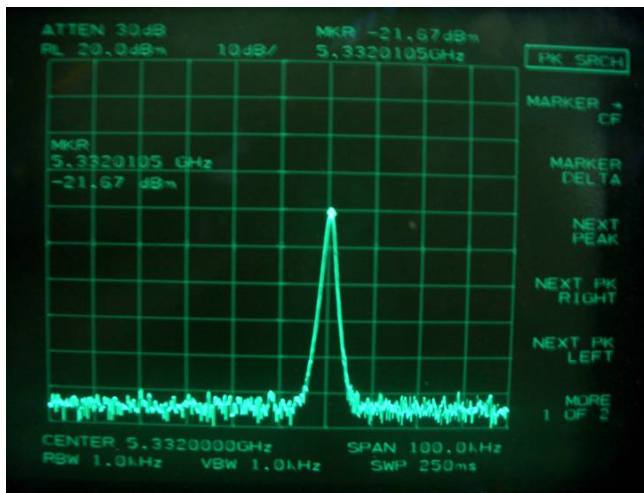

Ambient 48Vdc



Cold -20°C, 60Vdc



Cold -20°C, 20Vdc



Hot +65°C, 60Vdc



Hot +65°C, 20Vdc