

Report on the Radio Testing of: BEOREMOTE HALO WALL

Item No.: 3055

In accordance with
47 CFR FCC Part 15C

Prepared for:
Bang & Olufsen a/s
Bang og Olufsen Allé 1, Struer, 7600 Denmark

COMMERCIAL-IN-CONFIDENCE

Document Number: 7191217919-EEC19/22 | Issue: 01
FCC ID: TTU-HALOWALL



PSB Singapore

**Add value.
Inspire trust.**

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Foo Kai Maun	20 Dec 2019	
Authorised Signatory	Quek Keng Huat	19 Dec 2019	

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD PSB document control rules.

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with the mentioned standard(s).



LA-2007-0380-A LA-2007-0385-E
LA-2007-0381-F LA-2007-0386-C
LA-2007-0382-B LA-2010-0464-D
LA-2007-0383-G LA-2018-0702-B
LA-2007-0384-G LA-2018-0703-G

The results reported herein have been performed in accordance with the terms of accreditation under the Singapore Accreditation Council. Inspections/Calibrations/Tests marked "Not SAC-SINGLAS Accredited" in this Report are not included in the SAC-SINGLAS Accreditation Schedule for our inspection body/laboratory.

Laboratory:
TÜV SÜD PSB Pte. Ltd.
No.1 Science Park Drive
Singapore 118221


Phone : +65-6885 1333
Fax : +65-6776 8670
E-mail: enquiries@tuv-sud-psb.sg
www.tuv-sud-psb.sg
Co. Reg: 199002667R

Regional Head Office:
TÜV SÜD Asia Pacific Pte. Ltd.
1 Science Park Drive, #02-01
Singapore 118221
TUV

Page 1 of 40

Contents

1	Report Summary	3
1.1	Report Modification Record	3
1.2	Introduction	4
1.3	Brief Summary of Results	5
1.4	Product Information	7
1.5	Deviations from the Standard	8
1.6	EUT Modification Record	8
1.7	Test Location(s)	9
1.8	Test Facilities Registrations	9
1.9	Supporting Equipment	10
2	Test Details	11
2.1	Conducted Emissions	11
2.2	Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement)	14
2.3	Band Edge Compliance (Radiated)	19
2.4	Maximum Permissible Exposure (MPE)	24
3	Photographs	27
4	Test Equipment	36
5	Measurement Uncertainty	37
6	Annex A – FCC Label and Position	38
	End of the Test Report	40

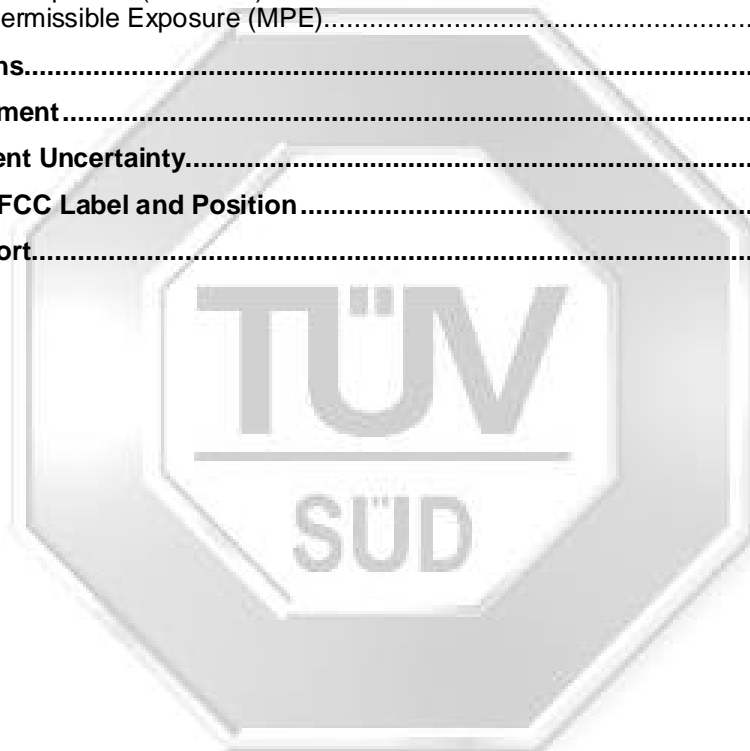

1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	20 Dec 2019



1.2 Introduction

Applicant	:	Bang & Olufsen a/s Bang og Olufsen Allé 1, Struer, 7600 Denmark
Manufacturer	:	Same as applicant
Factory	:	PCI Kunshan Electronics Company Limited
Item Number(s)	:	3055
Serial Number(s)	:	32587260
Number of Samples Tested	:	1
Test Sample(s) Condition	:	Good
Quotation Reference	:	5231291
Test Specification/Issue/Date	:	FCC 47 CFR Part 15C
Test Sample(s) Received Date	:	20 Aug 2019
Start of Test	:	20 Aug 2019
Finish of Test	:	02 Oct 2019

1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with specifications as shown below.

Specification Clause	Test Description	Result	Comments/Base Standard
47 CFR FCC Part 15			
15.107(a), 15.207	Conducted Emissions	Pass	ANSI C63.4: 2014 ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05R02: 2018
15.109(a), 15.205, 15.209	Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement)	Pass	ANSI C63.4: 2014 ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05R02: 2019
15.247(a)(2)	Spectrum Bandwidth (6dB Bandwidth Measurement)	Not Tested *See Note 3	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05R02: 2019
15.247(b)(3)	Maximum Peak Power	Not Tested *See Note 3	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05R02: 2019
15.247(d)	RF Conducted Spurious Emissions (Non-Restricted Bands)	Not Tested *See Note 3	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05R02: 2019
15.247(d)	RF Conducted Spurious Emissions (Restricted Bands)	Not Tested *See Note 3	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05R02: 2019
15.247(d)	Band Edge Compliance (Conducted)	Not Tested *See Note 3	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05R02: 2019
15.247(d)	Band Edge Compliance (Radiated)	Pass	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05R02: 2019
15.247(e)	Peak Power Spectral Density	Not Tested *See Note 3	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05R02: 2019
15.35(c)	Duty Cycle Factor Computation	Not Tested *See Note 4	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05R02: 2019
2.1091	Maximum Permissible Exposure	Pass	

Notes

1. All the measurements in section 15.247 were done based on conducted measurements except Band Edge Compliance (Radiated) test.
2. The EUT is a Class B device when in non-transmitting state and meets the 47 CFR FCC Part15B Class B requirements.
3. The BLE module of the Equipment Under Test (EUT) is a FCC certified module. The module was integrated into the main board without modifications in hardware nor firmware. Refer to FCC Grant VPYLBEE59B1LV for details.
4. The EUT was operated in continuous transmission, ie 100% duty cycle.



1.4 Product Information

1.4.1 Technical Description

Description	:	The Equipment Under Test(s) (EUT(s)) is a BEOREMOTE HALO WALL.
Microprocessor	:	STMicroelectronics STM32I4S9All
Operating Frequency	:	Microcontroller: 120MHz Bluetooth Low Energy: 2402MHz – 2480MHz 802.11b/g/n: 2412MHz – 2462MHz 802.11a/n: 5180MHz – 5240MHz, 5260MHz – 5320MHz, 5500MHz – 5720MHz, 5745MHz – 5825MHz
Clock / Oscillator Frequency	:	16MHz
Modulation	:	Bluetooth Low Energy: Gaussian Frequency Shift Keying (GFSK) 802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g: Orthogonal Frequency Division Multiplexing (OFDM) 802.11a: Orthogonal Frequency Division Multiplexing (OFDM) 802.11n: Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Gain	:	1.66dBi (BLE) 1.66dBi (2.4GHz WLAN) 4.79dBi (5GHz WLAN)
Port / Connectors	:	1 x USB-C Port (USB SHIELDED I/O RECP TYPE C)
Rated Power	:	DC 12 – 30V 0.5A
Accessories	:	Nil

1.4.2 Test Configuration and Modes of Operation

Mode(s)	Description								
Maximum RF power transmission	The EUT was exercised in the mode, transmitting at lower, middle and upper channels as shown below one at a time with all supported modulation schemes were evaluated. For Band Edge Compliance, only lower and upper channels were evaluated.								
	<table><tr><th><u>Transmit Channel</u></th><th><u>Frequency (GHz)</u></th></tr><tr><td>Channel 0 (Lower Channel)</td><td>2.402</td></tr><tr><td>Channel 19 (Middle Channel)</td><td>2.440</td></tr><tr><td>Channel 39 (upper Channel)</td><td>2.480</td></tr></table>	<u>Transmit Channel</u>	<u>Frequency (GHz)</u>	Channel 0 (Lower Channel)	2.402	Channel 19 (Middle Channel)	2.440	Channel 39 (upper Channel)	2.480
	<u>Transmit Channel</u>	<u>Frequency (GHz)</u>							
	Channel 0 (Lower Channel)	2.402							
	Channel 19 (Middle Channel)	2.440							
Channel 39 (upper Channel)	2.480								

1.5 Deviations from the Standard

Nil.

1.6 EUT Modification Record

No modifications were made.

1.7 Test Location(s)

TÜV SÜD PSB Pte Ltd
Electrical & Electronics Centre (EEC), Product Services,
No. 1 Science Park Drive, Singapore 118221

1.8 Test Facilities Registrations

Requirements	Registration Numbers
FCC	994109 (Test Firm Registration Number) SG0002 (Designation Number)
ISED	SGAP01 (CAB Identifier) <u>Science Park</u> 2932I-1 (3m and 10m Semi-Anechoic Chamber) <u>International Business Park</u> 2932N-1 (10m Semi-Anechoic Chamber)
VCCI	<u>Science Park</u> R-1335 (10m ANC) C-2306 (C.E @ Lab 3) T-1471 (Telecom Ports @ Lab 3) <u>International Business Park</u> R-3324 (10m ANC), G-10203 (10mANC) C-4933 (C.E @ CEIBP) T-2403 (Telecom Ports @ CEIBP)
BSMI	SL2-IS-E-6001R [CNS-13803 (ISM Equipment)] SL2-IN-E-6001R [CNS-13438 (IT Equipment)] SL2-R1/R2-E-6001R [CNS-13439 (Broadcast Receivers)] SL2-A1-E-6001R [CNS-13783-1 (Household Appliances)] SL2-L1-E-6001R [CNS-14115 (Lighting Equipment)]
SABS	SABS/A-LAB/0029/2018



1.9 Supporting Equipment

Equipment Description (Including Brand Name)	Model, Serial & FCC ID Number	Cable Description (List Length, Type & Purpose)
Dell Vostro 3300	M/N: P09S S/N: JV8X6N1 FCC ID: DoC	Nil
Dell AC Adaptor	M/N: DA65NM111-00 S/N: CN-0N6M8J-48661-07P- 2022-A00 FCC ID: DoC	1.80m unshielded power cable



2 Test Details

2.1 Conducted Emissions

2.1.1 Test Limits

Frequency Range (MHz)	Limit Values (dB μ V)	
	Quasi-peak (Q-P)	Average (AV)
0.15 - 0.5	66 – 56 *	56 – 46 *
0.5 - 5.0	56	46
5.0 - 30.0	60	50

* Decreasing linearly with the logarithm of the frequency



2.1.2 Test Setup

- 2.1.2.1 The EUT and supporting equipment were set up in accordance with the requirements of the standard as shown in the setup photos.
- 2.1.2.2 The power supply for the EUT was fed through a $50\Omega/50\mu\text{H}$ EUT LISN, connected to filtered mains.
- 2.1.2.3 The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
- 2.1.2.4 All other supporting equipment were powered separately from another LISN.

2.1.3 Test Method

- 2.1.3.1 The EUT was switched on and allowed to warm up to its normal operating condition.
- 2.1.3.2 A scan was made on the NEUTRAL line over the required frequency range using an EMI test receiver.
- 2.1.3.3 High peaks, relative to the limit line, were then selected.
- 2.1.3.4 The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 9kHz. Both Quasi-peak and Average measurements were made.
- 2.1.3.5 The measurements were then repeated for the LIVE line .

Sample Calculation Example

At 20 MHz

Q-P limit = 60.0 dB μV

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.2 dB

Q-P reading obtained directly from EMI Receiver = 40.0 dB μV

(Calibrated for system losses)

Therefore, Q-P margin = 60.0 - 40.0 = 20.0

i.e. 20.0 dB below Q-P limit



2.1.4 Test Results

Test Input Power	120V 60Hz	Temperature	24°C
Line Under Test	AC Mains	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit
		Test Date	04 Sep 2019

Frequency (MHz)	Q-P Value (dBμV)	Q-P Limit (dBμV)	Q-P Margin (dB)	AV Value (dBμV)	AV Limit (dBμV)	AV Margin (dB)	Line	Channel (Worst)
0.1518	45.1	65.9	20.8	35.2	55.9	20.7	Neutral	39
0.1702	44.3	65.0	20.7	34.4	55.0	20.6	Live	39
0.2051	44.4	63.4	19.0	34.5	53.4	18.9	Live	39
0.2400	41.6	62.1	20.5	31.7	52.1	20.4	Live	39
0.4868	35.5	56.2	20.7	25.6	46.2	20.6	Live	39
0.5119	35.2	56.0	20.8	25.3	46.0	20.7	Live	39

Notes

1.	All possible modes of operation were investigated from 150kHz to 30MHz. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2.	A "positive margin" indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a "negative margin" indicates a FAIL.
3.	EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings: <u>9kHz - 30MHz</u> RBW: 9kHz VBW: 30kHz

2.2 Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement)

2.2.1 Test Limits

Frequency Range (MHz)	Quasi-Peak Limit Values (dBμV/m)
0.009 - 0.490 *	20 log [2400 / F (kHz)] @ 300m
0.490 - 1.705	20 log [24000 / F (kHz)] @ 30m
1.705 - 30.0	30.0 @ 30m
30 – 88	40.0 @ 3m
88 – 216	43.5 @ 3m
216 – 960	46.0 @ 3m
Above 960 *	54.0 @ 3m

* For frequency bands 9kHz – 90kHz, 110kHz – 490kHz and above 1GHz, average detector was used. A peak limit of 20dB above the average limit does apply.

Restricted Bands

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	Above 38.6
13.36 - 13.41			

2.2.2 Test Setup

- 2.2.2.1 The EUT and supporting equipment were set up in accordance with the requirements of the standard as shown in the setup photos.
- 2.2.2.2 The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
- 2.2.2.3 The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

2.2.3 Test Method

- 2.2.3.1 The EUT was switched on and allowed to warm up to its normal operating condition.
- 2.2.3.2 A prescan was carried out to pick the worst emission frequencies from the EUT. For EUT which is a portable device, the prescan was carried out by rotating the EUT through three orthogonal axes to determine which altitude and equipment arrangement produces such emissions.
- 2.2.3.3 The test was carried out at the selected frequency points obtained from the pre-scan. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission
- 2.2.3.4 A Quasi-peak measurement was made for that frequency point if it was less than or equal to 1GHz. For frequency point in range of 9kHz – 90kHz, 110kHz – 490kHz and above 1GHz, both Peak and Average measurements were carried out.
- 2.2.3.5 The measurements were repeated for the next frequency point, until all selected frequency points were measured.
- 2.2.3.6 The frequency range covered was from the lowest radio frequency signal generated from the EUT, without going below 9kHz to 10th harmonics of the EUT fundamental frequency, using the loop antenna for frequency below 30MHz, Bi-log antenna for frequencies from 30MHz up to 1GHz, and the Horn antenna above 1GHz.

Sample Calculation Example

At 300 MHz

Q-P limit = 46.0 dB μ V/m

Log-periodic antenna factor & cable loss at 300 MHz = 18.5 dB

Q-P reading obtained directly from EMI Receiver = 40.0 dB μ V/m

(Calibrated level including antenna factors & cable losses)

Therefore, Q-P margin = 46.0 - 40.0 = 6.0

i.e. 6.0 dB below Q-P limit

2.2.5 Test Results

Test Input Power	120V 60Hz	Temperature	22°C
Test Distance	3m (<30MHz) 3m (<30MHz) 3m (≥30MHz – 25GHz)	Relative Humidity	55%
Mode	Transmit	Atmospheric Pressure	1030mbar
		Tested By	Dylan Lin
		Test Date	03 Sep 2019

Spurious Emissions ranging from 9kHz – 30MHz (for 9kHz – 90kHz, 110kHz – 490kHz) *See Note 2 & 3

Freq (GHz)	Peak Value (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

Spurious Emissions ranging from 9kHz – 30MHz *See Note 2 & 3

Frequency (MHz)	Q-P Value (dBμV/m)	Q-P Limit (dBμV/m)	Q-P Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Channel
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

Spurious Emissions ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dBμV/m)	Q-P Limit (dBμV/m)	Q-P Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Channel
30.9310	23.1	40.0	16.9	100	302	V	39
94.9050	22.1	43.5	21.4	102	171	H	39
594.5030	30.0	46.0	16.0	102	343	H	39
599.7940	29.6	46.0	16.4	102	208	H	39
602.2430	30.0	46.0	16.0	102	208	H	39
605.9170	30.6	46.0	15.4	102	208	H	39

Spurious Emissions above 1GHz – 25GHz

Freq (GHz)	Peak Value (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
1.3333	47.5	74.0	26.5	32.5	54.0	21.5	200	128	H	0
1.3798	45.4	74.0	28.6	31.2	54.0	22.8	102	262	V	0
1.4997	43.2	74.0	30.8	33.2	54.0	20.8	300	289	V	0
1.6666	46.0	74.0	28.0	33.2	54.0	20.8	200	282	V	0
2.0015	42.7	74.0	31.3	37.1	54.0	16.9	398	20	V	0
7.4696	50.4	74.0	23.6	35.0	54.0	19.0	300	7	V	0

Spurious Emissions above 1GHz – 25GHz

Freq (GHz)	Peak Value (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
1.3333	43.5	74.0	30.5	32.0	54.0	22.0	102	152	H	19
1.4953	42.6	74.0	31.4	34.2	54.0	19.8	102	104	V	19
1.4953	42.6	74.0	31.4	34.2	54.0	19.8	102	104	V	19
1.6666	40.1	74.0	33.9	33.3	54.0	20.7	200	282	V	19
4.1973	43.1	74.0	30.9	31.5	54.0	22.5	398	142	V	19
7.4975	51.0	74.0	23.0	35.1	54.0	18.9	300	8	V	19

Spurious Emissions above 1GHz – 25GHz

Freq (GHz)	Peak Value (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
1.3329	42.7	74.0	31.3	32.2	54.0	21.8	102	78	V	39
1.4848	41.8	74.0	32.2	32.5	54.0	21.5	102	98	V	39
1.5268	41.0	74.0	33.0	31.4	54.0	22.6	102	98	V	39
2.0665	42.1	74.0	31.9	37.6	54.0	16.4	300	14	V	39
4.1976	44.2	74.0	29.8	36.7	54.0	17.3	398	251	V	39
7.4951	50.7	74.0	23.3	35.1	54.0	18.9	300	8	V	39

Notes

1.	All possible modes of operation were investigated. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2.	“--” indicates no emissions were found and shows compliance to the limits
3.	The measurement was done at 3m. The measured results were extrapolated to the specified test limits as specified in § 15.209 (a) based on 40dB/decade.
4.	Quasi-peak measurement was used for frequency measurement up to 1GHz. Average and peak measurements were used for emissions above 1GHz. The average measurement was done by averaging over a complete cycle of the pulse train, including the blanking interval as the pulse train duration does not exceed 0.1 second.
5.	A “positive margin” indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a “negative margin” indicates a FAIL.
6.	EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings: <u>30MHz - 1GHz</u> RBW: 120kHz VBW: 1MHz <u>>1GHz</u> RBW: 1MHz VBW: 3MHz
7.	The upper frequency of radiated emission investigations was according to requirements stated in Section 15.33 (a) for intentional radiators & Section 15.33 (b) for unintentional radiators.
8.	The channel in the table refers to the transmit channel of the EUT.

2.3 Band Edge Compliance (Radiated)

2.3.1 Test Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands shall comply to the radiated emission limits specified in 15.209.

2.3.2 Test Setup

2.3.2.1 The EUT and supporting equipment were set up as shown in the setup photo.

2.3.2.2 The power supply for the EUT was connected to a filtered mains.

2.3.2.3 The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz to show compliance of spurious at band edges are at least 20dB below the carriers. For restricted band spurious at band edges, peak and average measurement plots were taken using the following setting:

- a. Peak Plot:
RBW = 1MHz, VBW = 3RBW
- b. Average Plot
RBW = 1MHz, VBW = 10Hz

2.3.2.4 All other supporting equipment were powered separately from another filtered mains.

2.3.3 Test Method

2.3.3.1 The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode.

2.3.3.2 The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the transmission band, 2.400GHz and any spurious emissions at the band edge.

2.3.3.3 The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.

2.3.3.4 The measurements were repeated if the EUT supports more than one modulation and data rate.

2.3.3.5 The measurements were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the transmission band, 2.4835GHz and the any spurious emissions at the band-edge.


2.3.4 Test Results

Test Input Power	120V 60Hz	Temperature	22°C
Attached Plots	1 – 6	Relative Humidity	55%
		Atmospheric Pressure	1030mbar
		Tested By	Dylan Lin
		Test Date	03 Sep 2019


No significant signal was found and they were below the specified limit.




Band Edge Compliance (Radiated) Plots (20dB Delta from Carrier at Band Edge)

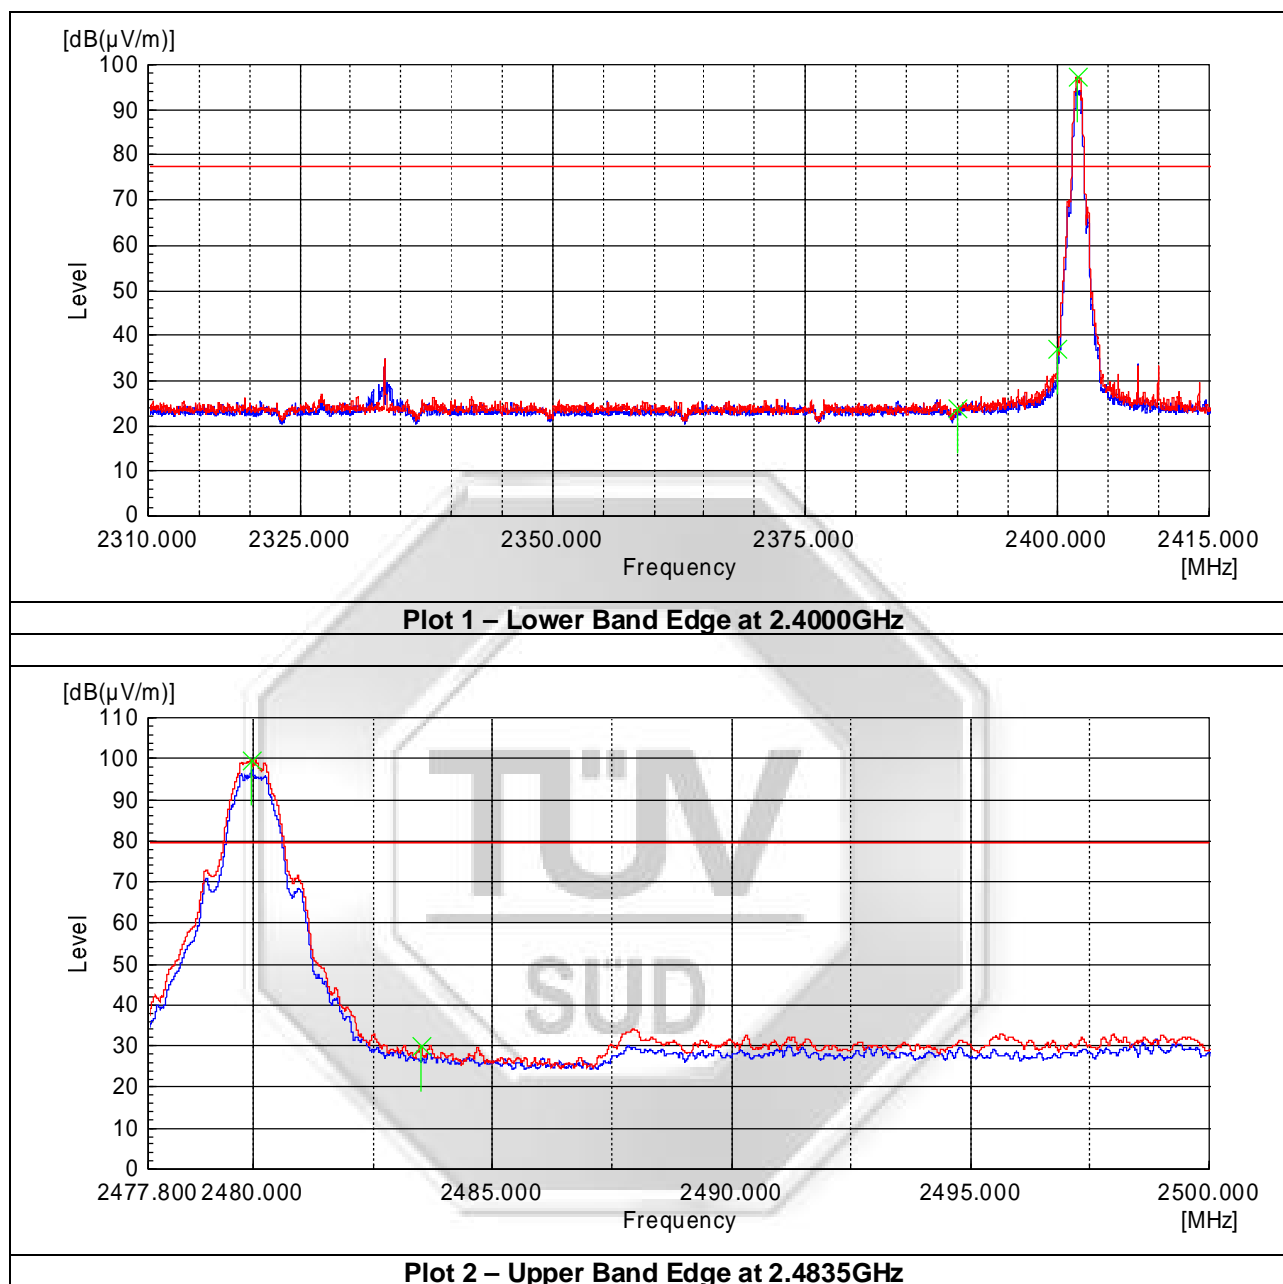

Band Edge Compliance (Radiated) Plots (Restricted Band)

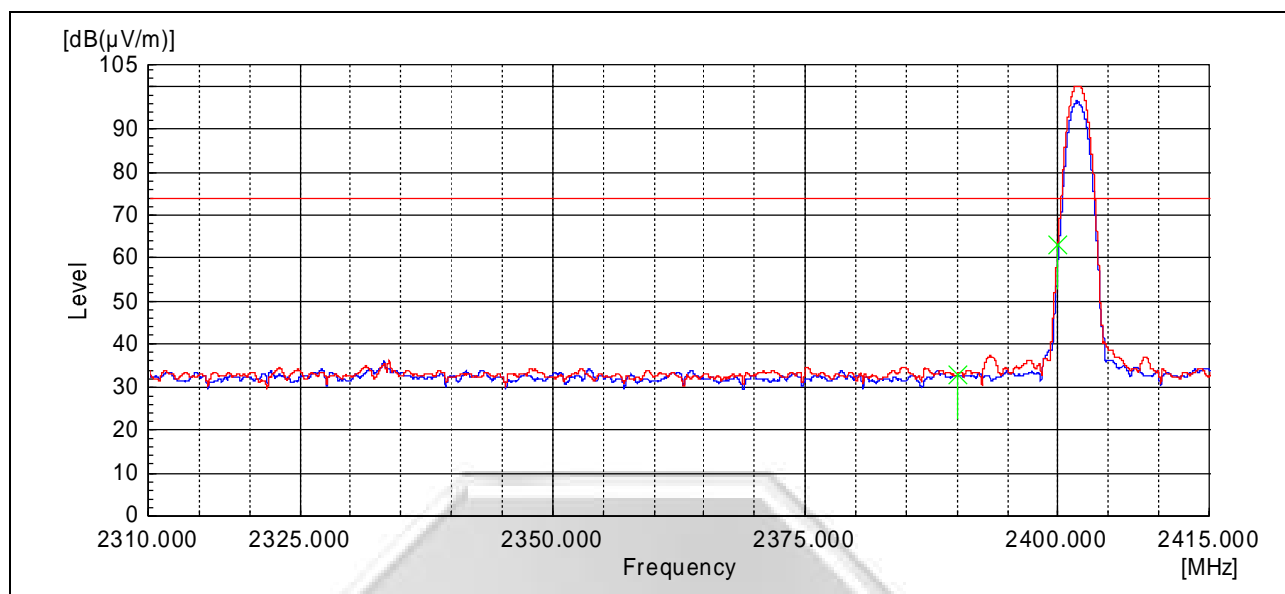


Plot 3 – Peak Plot at Lower Band Edge at 2.4000GHz

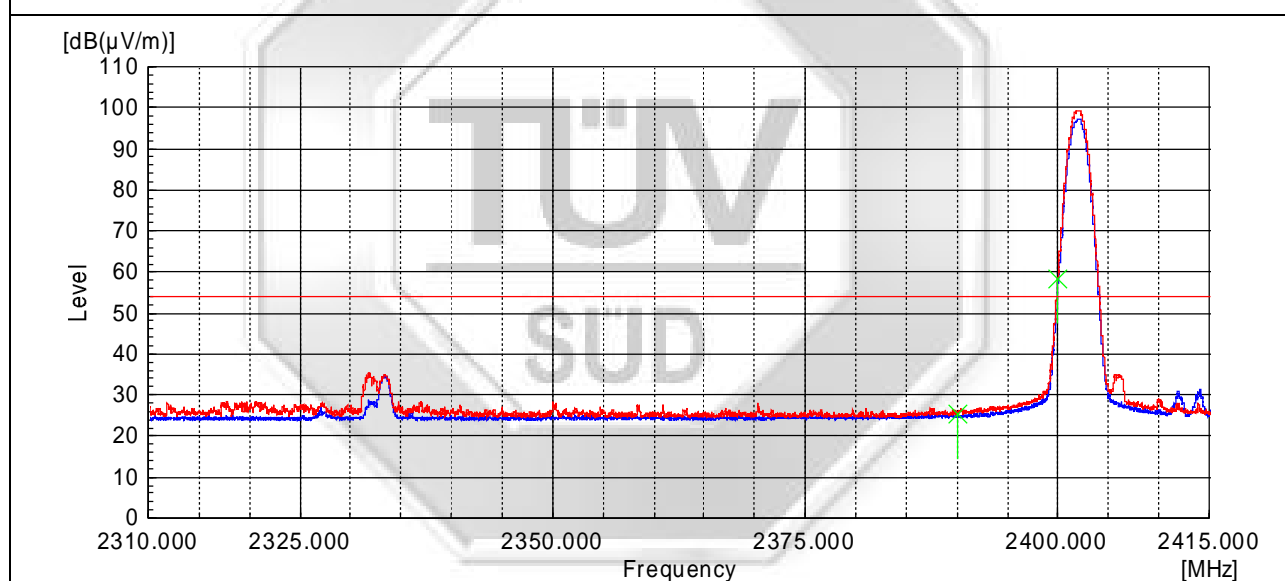


Plot 4 – Average Plot at Lower Band Edge at 2.4000GHz

Band Edge Compliance (Radiated) Plots (Restricted Band)

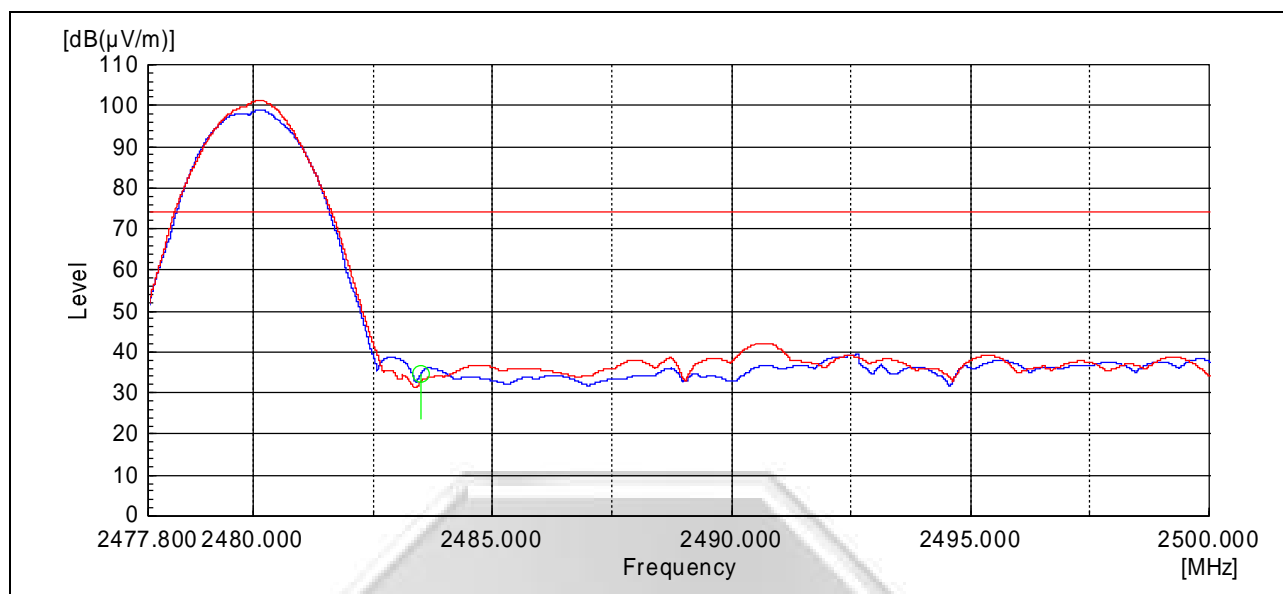

Plot 5 – Peak Plot at Upper Band Edge at 2.4835GHz

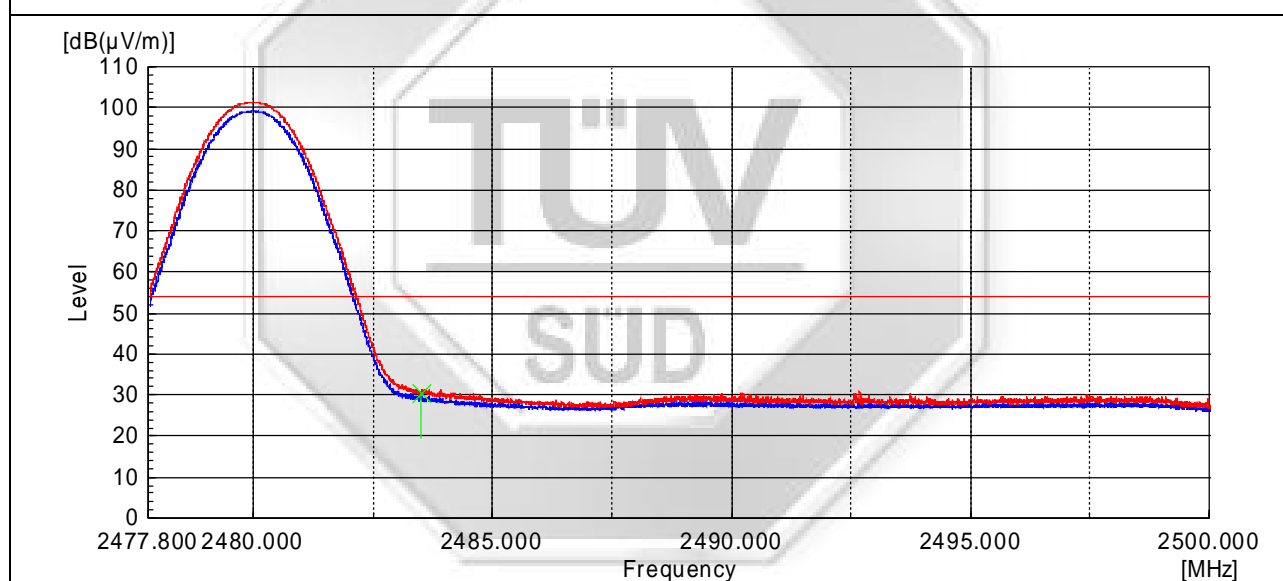


Plot 6 – Average Plot at Upper Band Edge at 2.4835GHz

2.4 Maximum Permissible Exposure (MPE)

2.4.1 Test Limits

The EUT shows compliance to the requirements of this section, which states the MPE limits for general population / uncontrolled exposure are as shown below:

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (min)
0.3 - 1.34	614	1.63	100 ^{Note 2}	30
1.34 - 30	824 / f	2.19 / f	180 / f ² ^{Note 2}	30
30 - 300	27.5	0.073	0.2	30
300 - 1500	-	-	f / 1500	30
1500 - 100000	-	-	1.0	30
Notes				
1. f = frequency in MHz				
2. Plane wave equivalent power density				

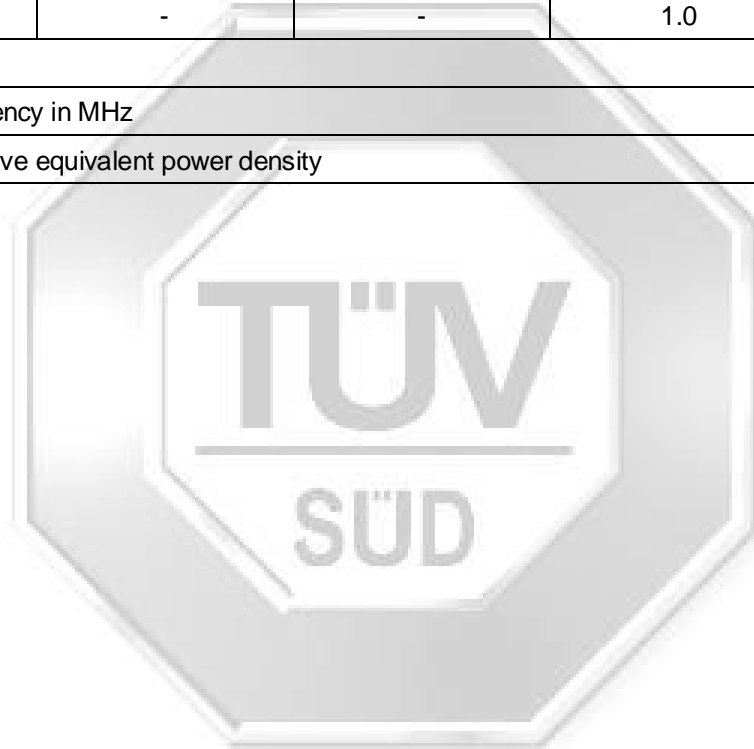

2.4.2 Test Setup

- 2.4.2.1 The EUT and supporting equipment were set up as shown on the setup photo.
- 2.4.2.2 The relevant field probe was positioned at least 20cm away from the EUT and supporting equipment boundary.

2.4.3 Test Method

- 2.4.3.1 . The EUT was switched on and allowed to warm up to its normal operating condition.
- 2.4.3.2 The test was first carried out at one of the positions / sides of the EUT.
- 2.4.3.3 Power density measurement (mW/cm^2) was made using the field meter set to the required averaging time.
- 2.4.3.4 Measurements were repeated for the next position and its associate EUT operating mode, until all possible positions and modes were measured.

Sample Calculation Example

At 2400 MHz, limit = $1.0 \text{ mW}/\text{cm}^2$

Power density reading obtained directly from field meter = $0.3 \text{ mW}/\text{cm}^2$ averaged over the required 30 minutes.

Therefore, margin = $0.3 - 1.0 = -0.7 \text{ mW}/\text{cm}^2$ i.e. $0.7 \text{ mW}/\text{cm}^2$ below limit



2.4.4 Test Results

Test Input Power	120V 60Hz	Temperature	24°C
Test Distance	20cm	Relative Humidity	60%
		Atmospheric Pressure	1030mbar
		Tested By	Anthony Toh
		Test Date	18 Sep 2019

Channel	Channel Frequency (GHz)	Power Density Value (mW/cm ²)	Margin (mW/cm ²)	Averaging Time (min)	Limit (mW/cm ²)
Lower	2.402	0.44	0.56	30	1.0
Middle	2.440	0.43	0.57	30	1.0
Upper	2.480	0.42	0.58	30	1.0

Notes

1.	All possible modes of operation were investigated. Only the worst case highest radiation levels were measured. Measurements were taken at the required averaging time. All other radiation levels were relatively insignificant.
2.	A "positive margin" indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a "negative margin" indicates a FAIL.

4 Test Equipment

Instrument	Model	S/No	Cal Due Date
<i>Conducted Emissions</i>			
Schaffner EMI Receiver	SMR4503	40	24 Jul 2020
Agilent EMC Analyzer	E7403A	US41160166	17 Jun 2020
Schaffner LISN (EUT)	NNB42	04/10055	04 Jan 2020
EMCO LISN (for supporting)	3825/2	9309-2127	06 Jan 2020
<i>Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement)</i>			
R&S EMI Test Receiver	ESR26	101671	14 Mar 2020
EMCO Loop Antenna	6502	9108-2673	13 Nov 2019
Schaffner Bilog Antenna (30MHz-2GHz)	CBL6112B	2597	27 Mar 2020
Com-Power Preamplifier (1MHz-1GHz)	PAM-103	441096	18 Jul 2020
TDK-RF Horn Antenna	HRN-0118	130256	20 Mar 2020
R&S Preamplifier (1GHz -18GHz)	SCU18	102191	15 Jan 2020
ETS Horn Antenna (18GHz-40GHz)	3116	0004-2474	07 Jan 2020
Agilent Preamplifier (1GHz-26.5GHz)	8449D	3008A02305	28 Dec 2019
Micro-Tronics Bandstop Filter (2.4-2.5 GHz)	BRM50701	017	13 Nov 2019
<i>Band Edge Compliance (Radiated)</i>			
R&S EMI Test Receiver	ESW44	101661	30 May 2020
TDK-RF Horn Antenna	HRN-0118	130256	20 Mar 2020
R&S Preamplifier (1GHz -18GHz)	SCU18	102191	15 Jan 2020
<i>Maximum Permissible Exposure</i>			
PMM Portable Field Meter	PMM8053	0220J10308	07 Mar 2021
PMM Electric Field Probe	EP183	0000J10206	07 Mar 2021

5 Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2.


Test Name	Measurement Uncertainty
Conducted Emissions	9kHz to 30MHz, ± 2.4 dB
Radiated Emissions	9kHz to 30MHz @ 10m, ± 2.3 dB 30MHz to 1GHz @ 10m, ± 4.0 dB 30MHz to 1GHz @ 3m, ± 5.6 dB >1GHz to 40GHz @ 3m, ± 5.0 dB
Maximum Permissible Exposure	0.1MHz – 3GHz is $\pm 15.0\%$



6 Annex A – FCC Label and Position

Labelling requirements per Section 2.925 & 15.19

The label shown will be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.

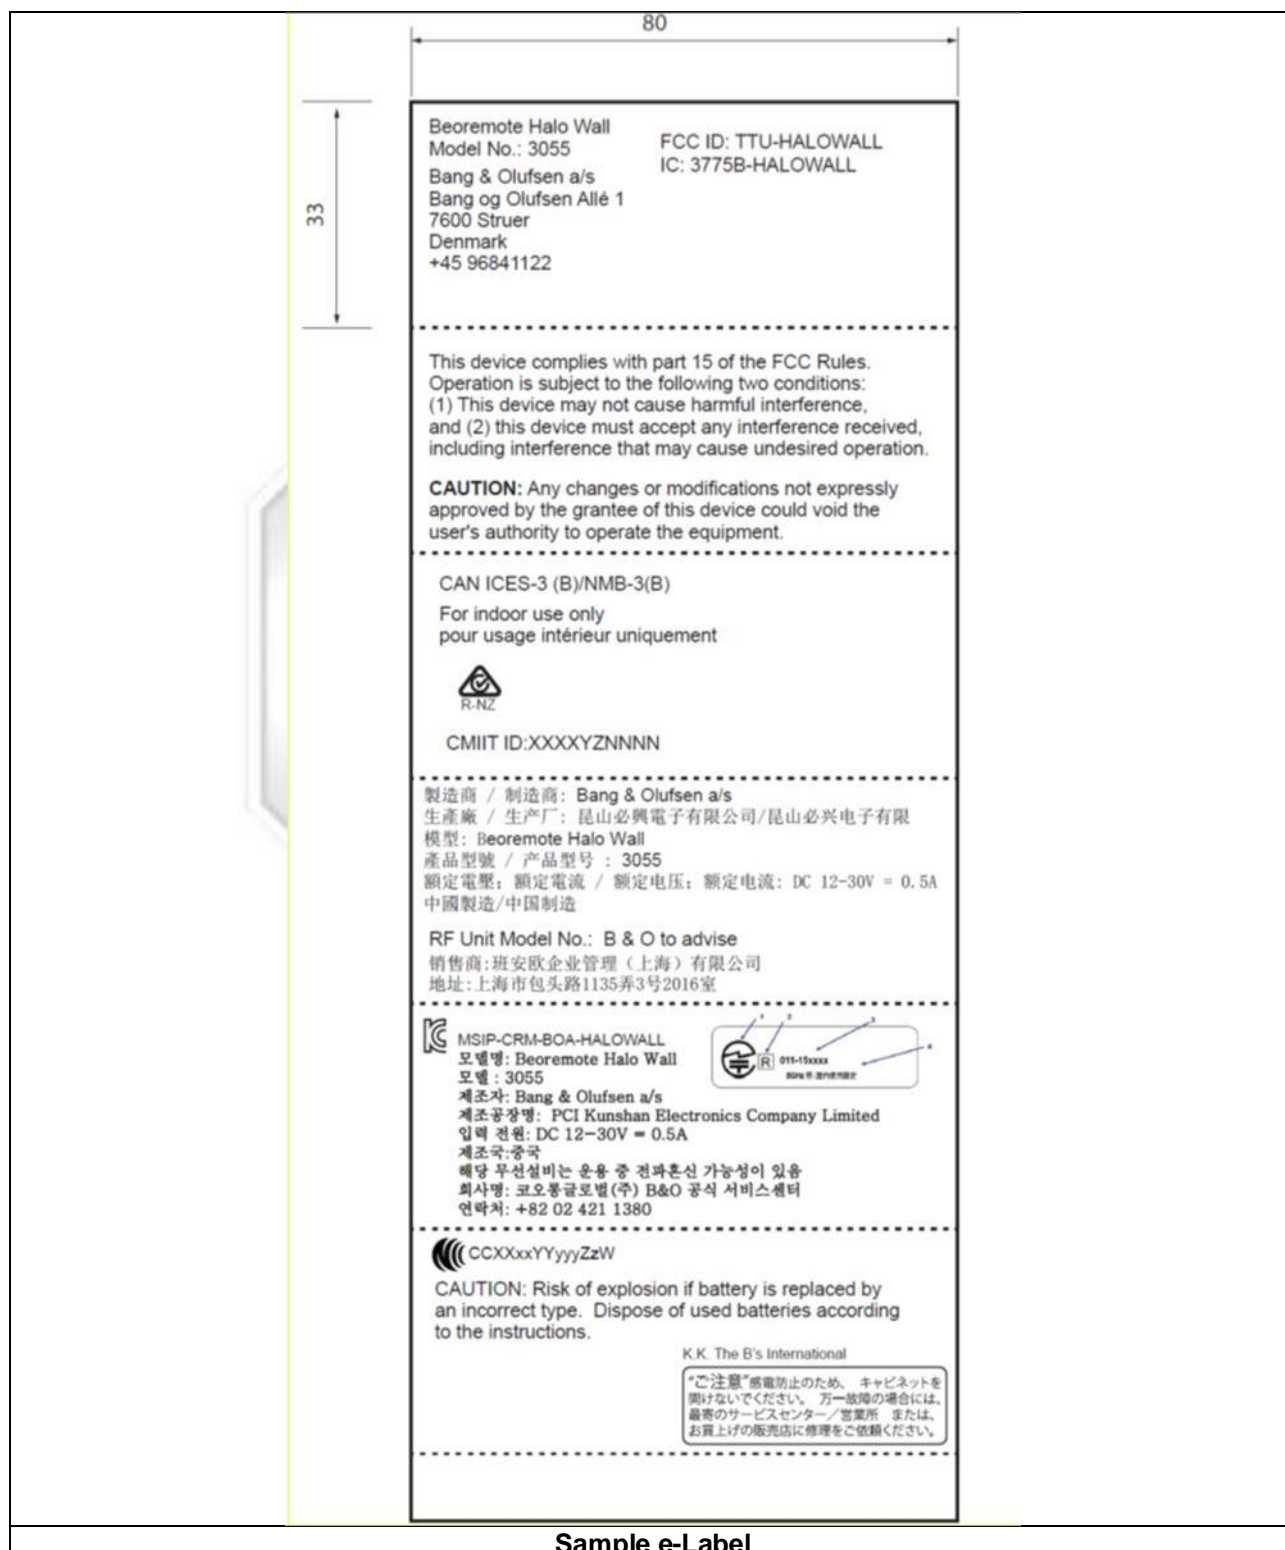



PSB Singapore

Please note that this Report is issued under the following terms :

1. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that TÜV SÜD PSB approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that TÜV SÜD PSB in any way "guarantees" the later performance of the product/equipment. Unless otherwise stated in this report, no tests were conducted to determine long term effects of using the specific product/equipment.
2. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. TÜV SÜD PSB therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
3. Nothing in this report shall be interpreted to mean that TÜV SÜD PSB has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
4. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to TÜV SÜD PSB or to the report or results furnished by TÜV SÜD PSB in any advertisements or sales promotion.
5. Unless otherwise stated, the tests were carried out in TÜV SÜD PSB Pte Ltd, No.1 Science Park Drive Singapore 118221.

July 2011

