

RF EXPOSURE REPORT FOR CERTIFICATION
On Behalf of

Bang & Olufsen a/s

Bluetooth Speaker

Model Number: Beolit 20

FCC ID: TTUBEOLIT20

Prepared for:	Bang & Olufsen a/s
	Bang og Olufsen Alle 1, 7600 Struer, Denmark
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808




Report Number:	ESTE-R2008054
Date of Test:	Jul. 23~Aug. 12, 2020
Date of Report:	Aug. 14, 2020

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
TEST REPORT VERIFICATION.....	3
1. SUMMARY OF TEST	4
1.1. Summary of test result.....	4
1.2. Test Mode.....	4
1.3. Test Equipment List	4
2. MAXIMUM PERMISSIBLE EXPOSURE	5
2.1. Limit	5
2.2. Test Setup	5
2.3. Test Procedure	6
2.4. Equipment Approval Considerations	7
Battery :	8
2.5. Test Result for Test setup A:	8
2.6. Test Result for Test setup B:	9



EST Technology Co., Ltd.

Applicant:	Bang & Olufsen a/s		
Address:	Bang og Olufsen Alle 1, 7600 Struer, Denmark		
Manufacturer:	Bang & Olufsen a/s		
Address:	Bang og Olufsen Alle 1, 7600 Struer, Denmark		
E.U.T:	Bluetooth Speaker		
Model Number:	Beolit 20		
Power Supply:	DC 15V From Adapter Input AC 100-240V~ 50/60Hz DC 7.4V From Battery		
Trade Name:	Bang & Olufsen	Serial No.:	-----
Date of Receipt:	Jul. 22, 2020	Date of Test:	Jul. 23~Aug. 12, 2020
Test Specification:	FCC CFR 47 Part 1.1307(b)&1.1310 KDB 680106 D01 RF Exposure Wireless Charging Apps v03		
Test Result:	<p>The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC CFR 47 Part 1.1307(b)&1.1310 requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.</p>		
		Date: Aug 14, 2020	
Prepared by:	Reviewed by:	Approved by:	
			
Ring Wang / Assistant	Seven Wang / Engineer	Iceman Hu / Manager	
Other Aspects:	None.		
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.</i>			



1. SUMMARY OF TEST

1.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	Maximum Permissible Exposure	Part 1.1307(b)&1.1310	PASS

1.2. Test Mode

Test Item	Test Mode
Maximum Permissible Exposure	Wireless Charging with Empty Load
	Wireless Charging with Half Load
	Wireless Charging with Full Load

1.3. Test Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Electric and Magnetic Field Probe-Analyzer	Narda S.T.S./PMM	EHP-200A	EST-E106	Feb.14,20	1 Year
Simulated load(Full)	/	/	EST-306	N/A	N/A
Simulated load(Half)	/	/	EST-307	N/A	N/A
Test Software	Narda	EHP200-TS	Rel 1.92	N/A	N/A

2. MAXIMUM PERMISSIBLE EXPOSURE

2.1. Limit


Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

Note:

- f = frequency in MHz * = Plane-wave equivalent power density.
- For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

2.2. Test Setup

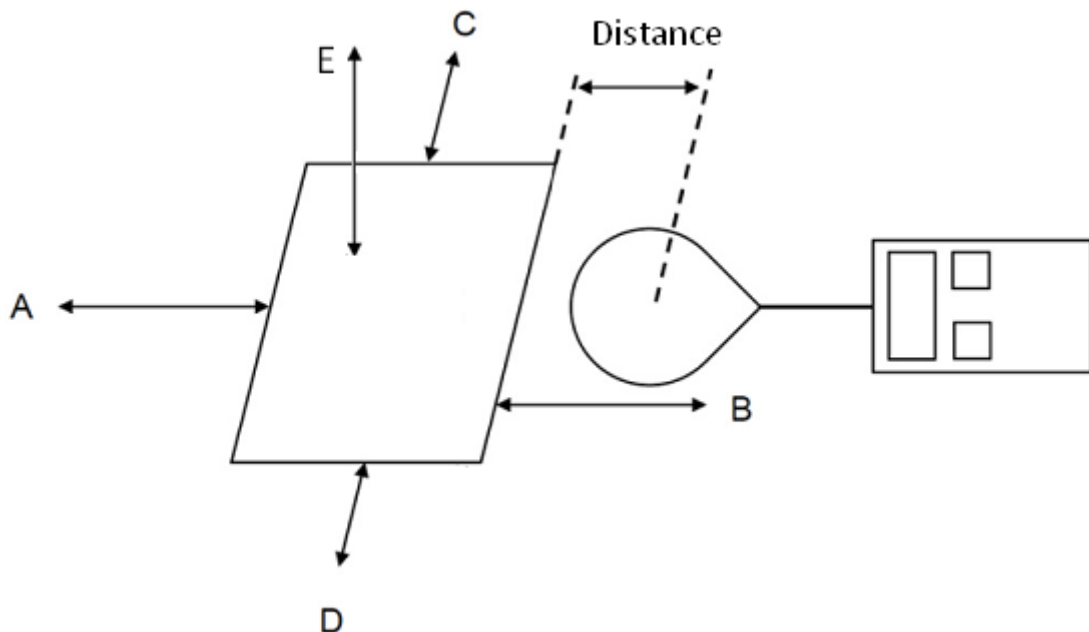

2.3. Test Procedure

- a. The test was performed on turn table in anechoic chamber with a dummy load.
- b. The dummy load must be placed horizontal of the EUT at the top (Parallel to the coil).
- c. The probe was placed at 15 cm surrounding the device and 20 cm above the top of the charger and the geometric centre of the probe.
- d. The highest emission level was recorded and compared with limit as soon as measurement of each point; A, B, C, D, E were completed.

2.4. Equipment Approval Considerations

Inductive wireless power transfer applications with supporting field strength results and meeting all of the following requirements are not required to submit a KDB inquiry for devices approved using SDoC or a PAG for equipment approved using certification to address RF exposure compliance.

1.	Power transfer frequency is less than 1 MHz
	YES; the device operated in the frequency range from 110.5-205KHz.
2.	Output power from each primary coil is less than or equal to 15 watts.
	YES; the maximum output power of the primary coil is 5W.
3.	The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
	YES; the transfer system includes only single primary and secondary coils.
4.	Client device is placed directly in contact with the transmitter.
	YES; Client device is placed directly in contact with the transmitter.
5.	Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
	No
6.	The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
	YES; The EUT field strength levels are 50% x MPE limits.

Battery :

2.5. Test Result for Test setup A:

E-field strength			
Frequency range (KHz)	110.5 to 205		
Test Mode	Full Load	Half Load	Empty Load
Position A(V/m)	0.419	0.218	0.192
Position B(V/m)	0.301	0.150	0.079
Position C(V/m)	0.360	0.249	0.151
Position D(V/m)	0.373	0.237	0.162
Position E(V/m)	1.030	0.579	0.328
Limits (V/m)	614		
50% Limits(V/m)	307		

H-field strength			
Frequency range (KHz)	110.5 to 205		
Test Mode	Full Load	Half Load	Empty Load
Position A(A/m)	0.065	0.058	0.042
Position B(A/m)	0.046	0.035	0.030
Position C(A/m)	0.043	0.033	0.027
Position D(A/m)	0.055	0.047	0.043
Position E(A/m)	0.078	0.037	0.023
Limits (A/m)	1.630		
50% Limits (A/m)	0.815		

2.6. Test Result for Test setup B:

Empty , Half , Full load all have been tested ,only worse case Max load (Full) is reported.

E-Filed Strength at (distance 10cm to 1cm at 1cm iteration, i.e. at a distance of 10cm, 9cm, 8cm, 1cm, Which is between the edge of the charger and the edge of of probe,) surrounding the EUT (V/m)

Test distance (cm)	Position A (V/m)	Position B (V/m)	Position C (V/m)	Position D (V/m)	Position E (V/m)	Limits (V/m)
1	2.513	1.853	1.547	1.754	22.957	614
2	2.394	1.667	1.476	1.685	21.156	614
3	1.905	1.478	1.233	1.616	19.247	614
4	1.716	1.382	0.987	1.587	17.858	614
5	1.527	1.104	0.868	1.473	15.110	614
6	1.380	0.916	0.753	1.347	13.964	614
7	0.921	0.794	0.687	1.293	12.355	614
8	0.732	0.605	0.645	1.254	9.464	614
9	0.578	0.566	0.601	1.184	7.546	614
10	0.489	0.404	0.577	1.121	3.334	614

H-Filed Strength at (distance 10cm to 1cm at 1cm iteration, i.e. at a distance of 10cm, 9cm, 8cm, 1cm, Which is between the edge of the charger and the edge of of probe,) surrounding the EUT (A/m)

Test distance (cm)	Position A (A/m)	Position B (A/m)	Position C (A/m)	Position D (A/m)	Position E (A/m)	Limits (A/m)
1	1.243	0.914	0.883	1.072	1.154	1.63
2	0.956	0.806	0.724	0.918	1.096	1.63
3	0.884	0.798	0.673	0.841	1.013	1.63
4	0.795	0.707	0.610	0.772	0.987	1.63
5	0.728	0.652	0.559	0.703	0.928	1.63
6	0.623	0.576	.0433	0.571	0.816	1.63
7	0.532	0.404	0.275	0.430	0.757	1.63
8	0.345	0.346	0.186	0.245	0.708	1.63
9	0.165	0.154	0.134	0.183	0.672	1.63
10	0.104	0.095	0.091	0.112	0.630	1.63

DSA-45PDH:

Test Result for Test setup A:

E-field strength			
Frequency range (KHz)	110.5 to 205		
Test Mode	Full Load	Half Load	Empty Load
Position A(V/m)	0.675	0.332	0.141
Position B(V/m)	0.437	0.214	0.110
Position C(V/m)	0.550	0.347	0.235
Position D(V/m)	0.812	0.523	0.331
Position E(V/m)	2.195	1.834	1.136
Limits (V/m)	614		
50% Limits(V/m)	307		

H-field strength			
Frequency range (KHz)	110.5 to 205		
Test Mode	Full Load	Half Load	Empty Load
Position A(A/m)	0.117	0.064	0.028
Position B(A/m)	0.089	0.043	0.032
Position C(A/m)	0.072	0.038	0.024
Position D(A/m)	0.109	0.073	0.041
Position E(A/m)	0.366	0.153	0.082
Limits (A/m)	1.630		
50% Limits (A/m)	0.815		

Test Result for Test setup B:

Empty , Half , Full load all have been tested ,only worse case Max load (Full) is reported.

E-Filed Strength at (distance 10cm to 1cm at 1cm iteration, i.e. at a distance of 10cm, 9cm, 8cm, 1cm, Which is between the edge of the charger and the edge of of probe,) surrounding the EUT (V/m)

Test distance (cm)	Position A (V/m)	Position B (V/m)	Position C (V/m)	Position D (V/m)	Position E (V/m)	Limits (V/m)
1	2.112	0.673	1.102	2.836	20.148	614
2	1.943	0.657	1.066	2.584	18.433	614
3	1.856	0.640	1.021	2.411	16.945	614
4	1.774	0.624	0.962	2.210	15.112	614
5	1.689	0.596	0.931	2.109	13.511	614
6	1.504	0.581	0.902	1.822	11.304	614
7	1.394	0.572	0.824	1.647	9.024	614
8	1.208	0.544	0.792	1.508	7.923	614
9	1.143	0.534	0.754	1.324	6.767	614
10	1.039	0.521	0.706	1.206	4.594	614

H-Filed Strength at (distance 10cm to 1cm at 1cm iteration, i.e. at a distance of 10cm, 9cm, 8cm, 1cm, Which is between the edge of the charger and the edge of of probe,) surrounding the EUT (A/m)

Test distance (cm)	Position A (A/m)	Position B (A/m)	Position C (A/m)	Position D (A/m)	Position E (A/m)	Limits (A/m)
1	1.113	0.943	0.334	1.142	1.185	1.63
2	1.042	0.814	0.284	1.033	1.097	1.63
3	0.926	0.698	0.265	0.954	1.062	1.63
4	0.873	0.632	0.234	0.892	1.034	1.63
5	0.790	0.517	0.206	0.820	0.986	1.63
6	0.651	0.425	.0187	0.743	0.853	1.63
7	0.596	0.315	0.159	0.607	0.786	1.63
8	0.508	0.242	0.141	0.544	0.724	1.63
9	0.440	0.207	0.126	0.374	0.685	1.63
10	0.323	0.168	0.101	0.211	0.613	1.63

DST450-303:

Test Result for Test setup A:

E-field strength			
Frequency range (KHz)	110.5 to 205		
Test Mode	Full Load	Half Load	Empty Load
Position A(V/m)	0.474	0.263	0.132
Position B(V/m)	0.319	0.207	0.125
Position C(V/m)	0.311	0.150	0.104
Position D(V/m)	0.469	0.245	0.114
Position E(V/m)	1.359	0.748	0.287
Limits (V/m)	614		
50% Limits(V/m)	307		

H-field strength			
Frequency range (KHz)	110.5 to 205		
Test Mode	Full Load	Half Load	Empty Load
Position A(A/m)	0.081	0.043	0.021
Position B(A/m)	0.044	0.024	0.018
Position C(A/m)	0.053	0.031	0.026
Position D(A/m)	0.066	0.024	0.020
Position E(A/m)	0.185	0.098	0.077
Limits (A/m)	1.630		
50% Limits (A/m)	0.815		

Test Result for Test setup B:

Empty , Half , Full load all have been tested ,only worse case Max load (Full) is reported.

E-Filed Strength at (distance 10cm to 1cm at 1cm iteration, i.e. at a distance of 10cm, 9cm, 8cm, 1cm, Which is between the edge of the charger and the edge of of probe,) surrounding the EUT (V/m)

Test distance (cm)	Position A (V/m)	Position B (V/m)	Position C (V/m)	Position D (V/m)	Position E (V/m)	Limits (V/m)
1	2.531	1.344	1.215	2.836	23.356	614
2	2.242	1.132	1.153	2.456	21.243	614
3	2.133	0.946	1.102	2.301	20.104	614
4	1.944	0.815	1.068	2.195	18.085	614
5	1.860	0.776	1.019	2.013	16.196	614
6	1.602	0.638	0.943	1.820	13.731	614
7	1.445	0.553	0.884	1.733	10.966	614
8	1.386	0.467	0.841	1.574	9.139	614
9	1.307	0.401	0.782	1.431	6.204	614
10	1.116	0.348	0.741	1.268	4.715	614

H-Filed Strength at (distance 10cm to 1cm at 1cm iteration, i.e. at a distance of 10cm, 9cm, 8cm, 1cm, Which is between the edge of the charger and the edge of of probe,) surrounding the EUT (A/m)

Test distance (cm)	Position A (A/m)	Position B (A/m)	Position C (A/m)	Position D (A/m)	Position E (A/m)	Limits (A/m)
1	0.940	0.615	0.696	0.982	1.326	1.63
2	0.866	0.553	0.628	0.894	1.284	1.63
3	0.791	0.481	0.593	0.805	1.213	1.63
4	0.723	0.404	0.512	0.726	1.197	1.63
5	0.631	0.339	0.470	0.662	1.118	1.63
6	0.522	0.283	.0.380	0.489	1.072	1.63
7	0.385	0.219	0.295	0.347	0.984	1.63
8	0.303	0.197	0.206	0.288	0.911	1.63
9	0.274	0.128	0.157	0.215	0.879	1.63
10	0.123	0.057	0.098	0.176	0.746	1.63

End of Test Report