

FCC PART 15C REPORT FOR CERTIFICATION
On Behalf of

Bang & Olufsen a/s

Sound Bar

Model Number: Beosound Theatre

FCC ID: TTUBSTHEATRE

Prepared for:	Bang & Olufsen a/s
	Bang og Olufsen Alle 1, 7600 Struer, Denmark
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R2204264
Date of Test:	Feb. 24~Apr. 22, 2022
Date of Report:	Apr. 25, 2022



TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT).....	5
1.2. Antenna Information.....	6
1.3. Information of RF Cable.....	6
2. SUMMARY OF TEST.....	7
2.1. Summary of test result.....	7
2.2. Test Facilities.....	8
2.3. Measurement uncertainty.....	9
2.4. Assistant equipment used for test.....	9
2.5. Block Diagram.....	9
2.6. Test Mode.....	10
2.7. Power Setting of Test Software.....	12
2.8. Duty Cycle.....	12
2.9. Channel List.....	16
2.10. Test Equipment List.....	17
7. 6DB BANDWIDTH.....	18
7.1. Limit.....	18
7.2. Test Setup.....	18
7.3. Spectrum Analyzer Setting.....	18
7.4. Test Procedure.....	18
7.5. Test Result.....	19
8. MAXIMUM PEAK OUTPUT POWER.....	38
8.1. Limit.....	38
8.2. Test Setup.....	38
8.3. Spectrum Analyzer Setting.....	38
8.4. Test Procedure.....	38
8.5. Test Result.....	39
9. POWER SPECTRAL DENSITY.....	58
9.1. Limit.....	58
9.2. Test Setup.....	58
9.3. Spectrum Analyzer Setting.....	58
9.4. Test Procedure.....	58
9.5. Test Result.....	59
10. CONDUCTED BAND EDGE.....	78
10.1. Limit.....	78
10.2. Test Setup.....	78
10.3. Spectrum Analyzer Setting.....	78
10.4. Test Procedure.....	78
10.5. Test Result.....	79
11. CONDUCTED SPURIOUS EMISSIONS.....	91
11.1. Limit.....	91
11.2. Test Setup.....	91
11.3. Spectrum Analyzer Setting.....	91



- 11.4. Test Procedure 91
- 11.5. Test Result 92
- 12. RADIATED SPURIOUS EMISSIONS AND BAND EDGE 110
 - 12.1. Limit 110
 - 12.2. Test Setup 111
 - 12.3. Spectrum Analyzer Setting 112
 - 12.4. Test Procedure 113
 - 12.5. Test Result 114
- 13. AC POWER LINE CONDUCTED EMISSIONS 126
 - 13.1. Limit 126
 - 13.2. Test Setup 126
 - 13.3. Spectrum Analyzer Setting 126
 - 13.4. Test Procedure 126
 - 13.5. Test Result 127
- 14. ANTENNA REQUIREMENTS 131
 - 14.1. Limit 131
 - 14.2. Test Result 131

EST Technology Co., Ltd.

Applicant:	Bang & Olufsen a/s		
Address:	Bang og Olufsen Alle 1, 7600 Struer, Denmark		
Manufacturer:	Bang & Olufsen a/s		
Address:	Bang og Olufsen Alle 1, 7600 Struer, Denmark		
Factory1:	DONGGUAN TYMPHANY ACOUSTIC TECHNOLOGY CO.LTD		
Address:	Tymphany Building, Liuwu Section, Ke-ji Dong Road, Shijie Town, Dongguan City, Guangdong, China 523290		
Factory2:	Tymphany Acoustic Technology Europe, s.r.o.		
Address:	Prumyslovy park 305, 742 21 Koprivnice-Vlcovice, Czech republic		
E.U.T:	Sound Bar		
Model Number:	Beosound Theatre		
Power Supply:	100-240V~50/60Hz		
Trade Name:	Bang & Olufsen	Serial No.:	-----
Date of Receipt:	Feb. 24, 2022	Date of Test:	Feb. 24~Apr. 22, 2022
Test Specification:	FCC Part 15 Subpart C (15.247) ANSI C63.10:2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02 FCC KDB 662911 D01 Multiple Transmitter Output v02r01		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
Prepared by:	Reviewed by:	Date: Apr. 25, 2022	
			
Emily Cai / Assistant	Seven Wang / Engineer	Iceman Hu / Manager	
Other Aspects:	None.		
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.</i>			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	Sound Bar
Model Number	:	Beosound Theatre
Software Version	:	2.2.0.13064
Hardware Version	:	f
Operation frequency	:	2412MHz~2462MHz 2422MHz~2452MHz
Number of channel	:	IEEE 802.11b: 11 Channels IEEE 802.11g: 11 Channels IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels IEEE 802.11ax HE20: 11 Channels IEEE 802.11ax HE40: 7 Channels
Max Output Power (PEAK)	:	IEEE 802.11b: 18.73dBm IEEE 802.11g: 21.09dBm IEEE 802.11n HT20: 23.08dBm IEEE 802.11n HT40: 22.68dBm IEEE 802.11ax HE20: 22.42dBm IEEE 802.11ax HE40: 22.53dBm
Modulation Type	:	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11ax mode: OFDM (BPSK/QPSK/16QAM/64QAM/ 1024QAM)
Sample Type	:	Prototype production

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

1.2. Antenna Information

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	-	Internal	-	2.79
2	-	-	Internal	-	3.43

Note:

1. The EUT has two antennas, the antennas can support SISO function in IEEE 802.11b and IEEE 802.11g, and can support MIMO function in IEEE 802.11n and IEEE 802.11ax.
2. The EUT can work as CDD mode in IEEE 802.11n HT20 and IEEE 802.11n HT40, and IEEE 802.11ax can operate with one spatial stream.
3. According to ANSI C63.10:2013 14.4.3.2.5 b):
 $Directional\ gain = 10 \times \log[(10^{2.79/20} + 10^{3.43/20})^2 / 2] = 6.13\text{dBi} > 6\text{dBi}$
 So, the output power limit and power spectral density should be reduced.
4. After pre-test all antenna configurations, the worst case configuration as list below.

TX Mode \ ANT No.	SISO Configuration	MIMO Configuration
IEEE 802.11b	ANT 1 and Ant 2	/
IEEE 802.11g	ANT 1 and Ant 2	/
IEEE 802.11n HT20	/	ANT1+ANT2
IEEE 802.11n HT40	/	ANT1+ANT2
IEEE 802.11ax HE20		ANT1+ANT2
IEEE 802.11ax HE40		ANT1+ANT2

1.3. Information of RF Cable

Cable Loss(dB)	Provided by
1.0	Bang & Olufsen a/s

Note: 1. The customer declared the loss value of the RF Cable, and the test results of this report only apply to the sample as received.
 2. This information is provided by the applicant.

2. SUMMARY OF TEST

2.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	6dB Bandwidth	15.247(a)(2)	PASS
4	Maximum Peak Output Power	15.247(b)(3)	PASS
5	Power Spectral Density	15.247(e)	PASS
6	Conducted Band Edge	15.247(d)	PASS
7	Conducted Spurious Emissions	15.247(d)	PASS
8	Radiated Spurious Emissions and Band Edge	15.205 15.209 15.247(d)	PASS
9	AC Power Line Conducted Emissions	15.207	PASS
10	Antenna Requirement	15.203	PASS

Note:

(1) "N/A" denotes test is not applicable in this test report

2.2. Test Facilities

EMC Lab : Certificated by CNAS, CHINA
Registration No.: L5288
This Certificate is valid until: November 12, 2023

Certificated by FCC, USA
Designation Number: CN1215
This Certificate is valid until: January 31, 2024

Certificated by A2LA, USA
Registration No.: 4366.01
This Certificate is valid until: January 31, 2024

Certificated by Industry Canada
CAB identifier No.: CN0035
This Certificate is valid until: January 31, 2024

Certificated by VCCI, Japan
Registration No.:C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Certificate is valid until: Apr. 19, 2023

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	±3.48dB
Uncertainty for spurious emissions test (30MHz-1GHz)	±4.60 dB(Polarize: H)
	±4.68 dB(Polarize: V)
Uncertainty for spurious emissions test (1GHz to 25GHz)	±4.96dB
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.8m	AC Cable

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was beset into 2.4G WIFI test mode by software before test.



(EUT: Sound Bar)

2.6. Test Mode

The test mode was selected for the final test as listed below.

Test Item	Mode	Date Rate	Test Channel
6dB Bandwidth	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11ax HE20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
	IEEE 802.11ax HE40	MCS0	Low/Middle/High
Maximum Peak Output Power	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11ax HE20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
	IEEE 802.11ax HE40	MCS0	Low/Middle/High
Power Spectral Density	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11ax HE20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
	IEEE 802.11ax HE40	MCS0	Low/Middle/High
Conducted Band Edge	IEEE 802.11b	1Mbps	Low/High
	IEEE 802.11g	6Mbps	Low/High
	IEEE 802.11n HT20	MCS0	Low/High
	IEEE 802.11ax HE20	MCS0	Low/High
	IEEE 802.11n HT40	MCS0	Low/High
	IEEE 802.11ax HE40	MCS0	Low/High
Conducted Spurious Emissions	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11ax HE20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
	IEEE 802.11ax HE40	MCS0	Low/Middle/High

Radiated Spurious Emissions(Below 1GHz)	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11ax HE20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
	IEEE 802.11ax HE40	MCS0	Low/Middle/High
Radiated Spurious Emissions(Above 1GHz)	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11ax HE20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
	IEEE 802.11ax HE40	MCS0	Low/Middle/High
Radiated Band Edge	IEEE 802.11b	1Mbps	Low/High
	IEEE 802.11g	6Mbps	Low/High
	IEEE 802.11n HT20	MCS0	Low/High
	IEEE 802.11ax HE20	MCS0	Low/High
	IEEE 802.11n HT40	MCS0	Low/High
	IEEE 802.11ax HE40	MCS0	Low/High
AC Power Line Conducted Emissions	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11ax HE20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
	IEEE 802.11ax HE40	MCS0	Low/Middle/High

Note:

1. The test mode was selected for the final test as listed below.
2. In radiated measurement, the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on X-plane.

2.7. Power Setting of Test Software

Software Name	DutApiMimoApApp.exe		
Frequency(MHz)	2412	2437	2462
IEEE 802.11b Setting	16	16	16
IEEE 802.11g Setting	15	15	15
IEEE 802.11n HT20 Setting	15	15	15
IEEE 802.11ax HE20 Setting	15	15	15
Frequency(MHz)	2422	2437	2452
IEEE 802.11n HT40 Setting	13	13	13
IEEE 802.11ax HE40 Setting	12	12	12


2.8. Duty Cycle

Temperature	23.6°C	Relative Humidity	56%	Test Voltage	AC 120V/60Hz
Mode	Fre(MHz)	On time(ms)	Total Time(ms)	Duty Cycle	Duty Factor
IEEE 802.11b	2437	6.5362	6.5362	100.00%	0.00
IEEE 802.11g	2437	0.1860	0.1960	94.90%	0.23
IEEE 802.11n HT20	2437	0.1760	0.1860	94.62%	0.24
IEEE 802.11ax HE20	2437	0.4140	0.4740	87.34%	0.59
IEEE 802.11n HT40	2437	0.1070	0.1170	91.45%	0.39
IEEE 802.11ax HE40	2437	0.0900	0.1020	88.24%	0.54


Note:

1. If duty cycle <98 %, the conducted average output power and average power spectral density should be add duty factor.
2. If duty cycle \geq 98 %,the EUT is consider to be transmitting continuously,the conducted average output power and average power spectral density no need to add duty factor(consider to be zero).
3. The conducted peak output power and peak power spectral density no need to consider duty factor.
4. The on-time time is transmission duration(T).


IEEE 802.11b 2437MHz

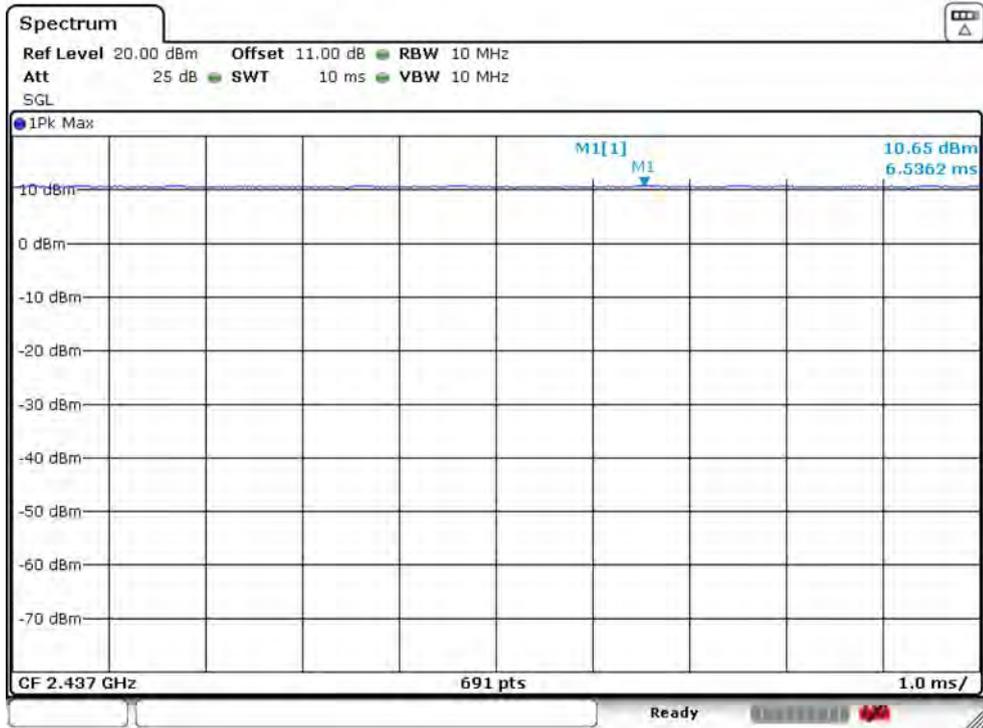


IEEE 802.11g 2437MHz

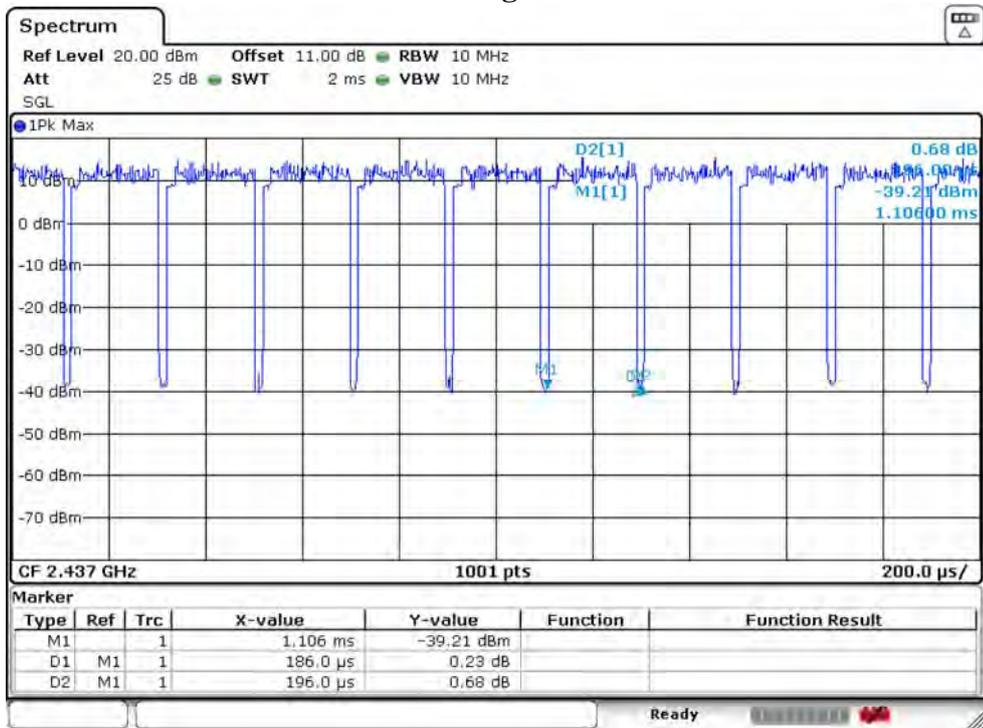


IEEE 802.11n HT20 2437MHz

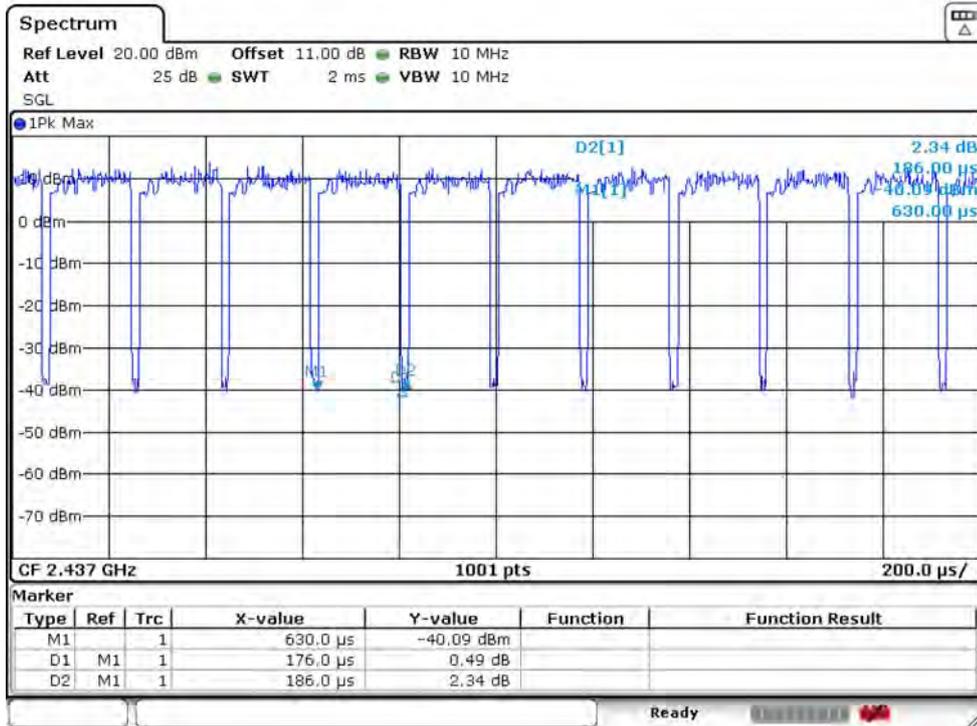


IEEE 802.11n HT40 2437MHz

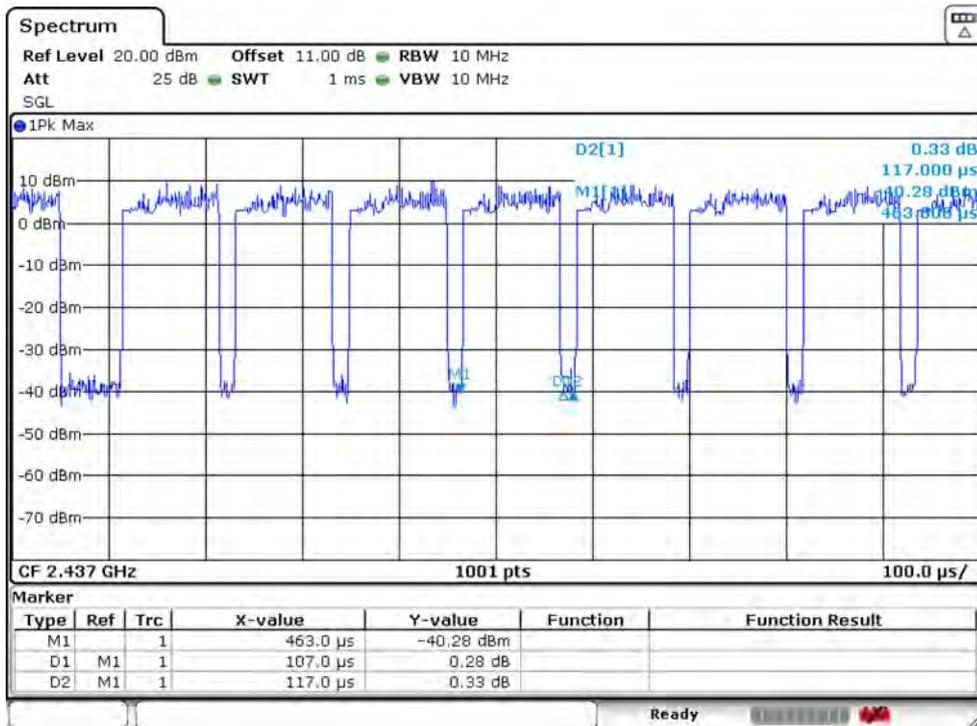

IEEE 802.11ax HE20 2437MHz

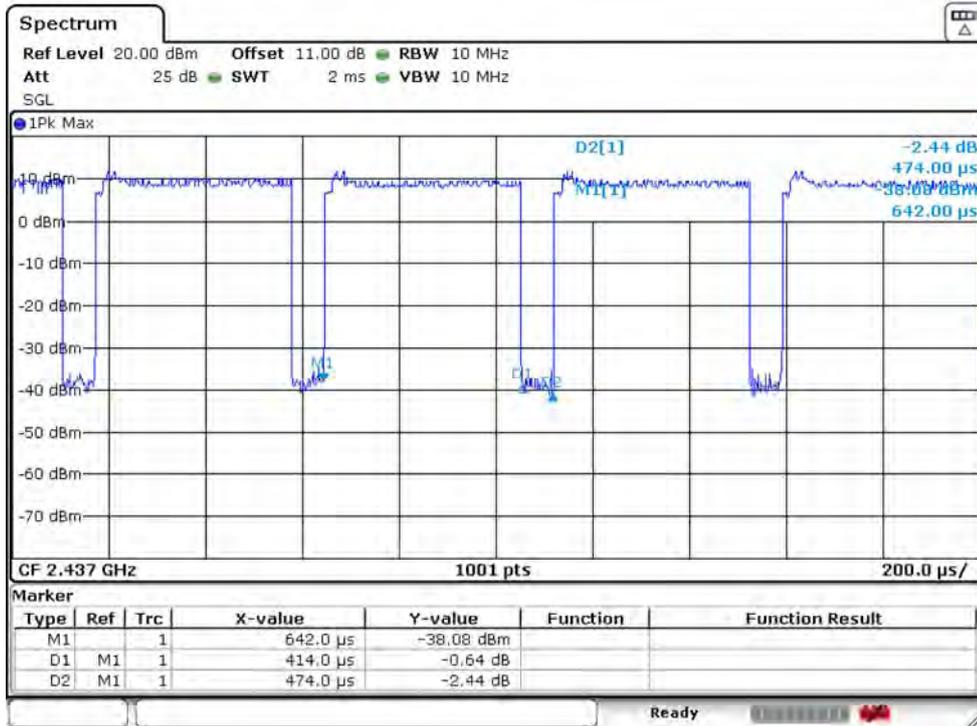

IEEE 802.11ax HE40 2437MHz

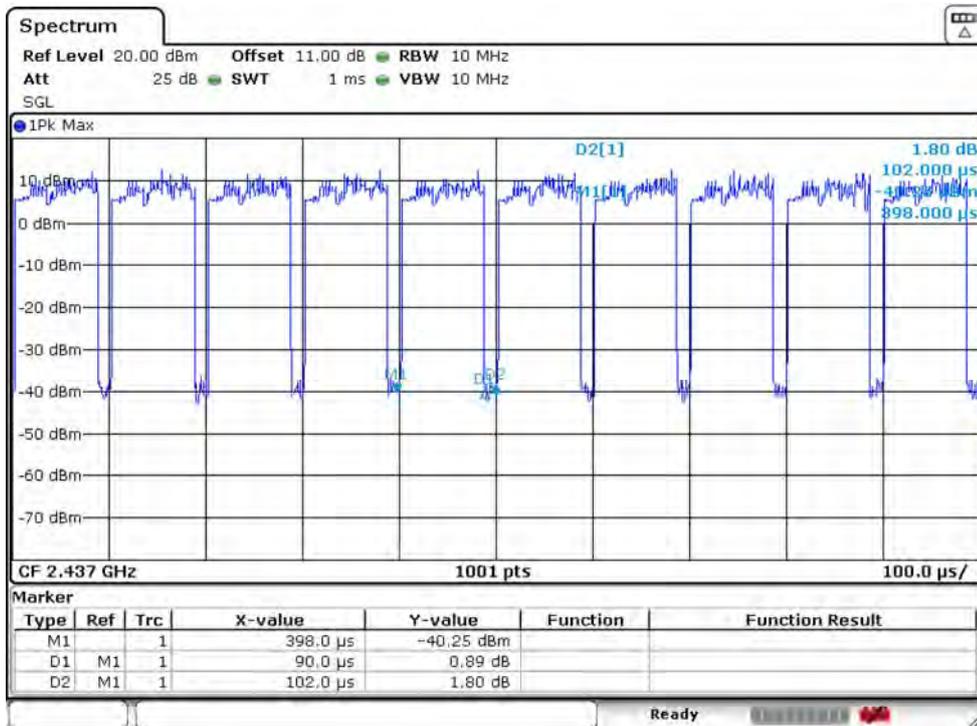

2.9. Channel List

IEEE 802.11b/802.11g/802.11n HT20/802.11ax HE20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442		
3	2422	8	2447		
4	2427	9	2452		
5	2432	10	2457		
IEEE 802.11n HT40/802.11ax HE40					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452
4	2427	7	2442		
5	2432	8	2447		

2.10. Test Equipment List

For conducted emission test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	EST-E001	LISAI	June 13,21	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 13,21	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

3.

For radiated emission test(9kHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,21	1 Year
Active Loop Antenna	SCHWARZB ECK	FMZB 1519B	EST-E054	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

4.

For radiated emissions test (30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,21	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

5.

For radiated emission test(Above 100MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA9120D	EST-E031	LISAI	June 13,21	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	EST-E032	LISAI	June 13,21	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	July 19,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A

6.

For connect EUT antenna terminal test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Spectrum Analyzer	Rohde&Schwarz	FSV40	EST-E069	LISAI	July 19,21	1 Year

7. 6dB BANDWIDTH

7.1. Limit

Systems using digital modulation techniques operate in the 2400-2483.5 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

7.2. Test Setup



7.3. Spectrum Analyzer Setting

6dB Bandwidth

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

99% Occupied Bandwidth

Spectrum Parameters	Setting
RBW	300KHz(20MHz Bandwidth mode)/1MHz(40MHz Bandwidth mode)
VBW	1MHz(20MHz Bandwidth mode)/3MHz(40MHz Bandwidth mode)
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


7.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 3.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.


7.5. Test Result

Temperature	23.6°C	Relative Humidity	56%	Test Voltage	AC 120V/60Hz
Mode	Freq (MHz)	6dB Bandwidth (MHz)		Limit (MHz)	Result
		ANT 1	ANT 2		
IEEE 802.11b	2412	10.072	10.014	≥0.5	PASS
	2437	10.072	9.995	≥0.5	PASS
	2462	10.072	10.014	≥0.5	PASS
IEEE 802.11g	2412	16.498	16.498	≥0.5	PASS
	2437	16.498	16.498	≥0.5	PASS
	2462	16.440	16.498	≥0.5	PASS
IEEE 802.11n HT20	2412	17.713	17.713	≥0.5	PASS
	2437	17.713	17.713	≥0.5	PASS
	2462	17.713	17.713	≥0.5	PASS
IEEE 802.11ax HE20	2412	16.324	16.324	≥0.5	PASS
	2437	16.324	16.324	≥0.5	PASS
	2462	16.320	16.324	≥0.5	PASS
IEEE 802.11n HT40	2422	36.470	36.470	≥0.5	PASS
	2437	36.470	36.470	≥0.5	PASS
	2452	36.470	36.470	≥0.5	PASS
IEEE 802.11ax HE40	2422	37.160	37.160	≥0.5	PASS
	2437	37.160	37.280	≥0.5	PASS
	2452	37.160	38.210	≥0.5	PASS


IEEE 802.11b 2412MHz_ANT 1

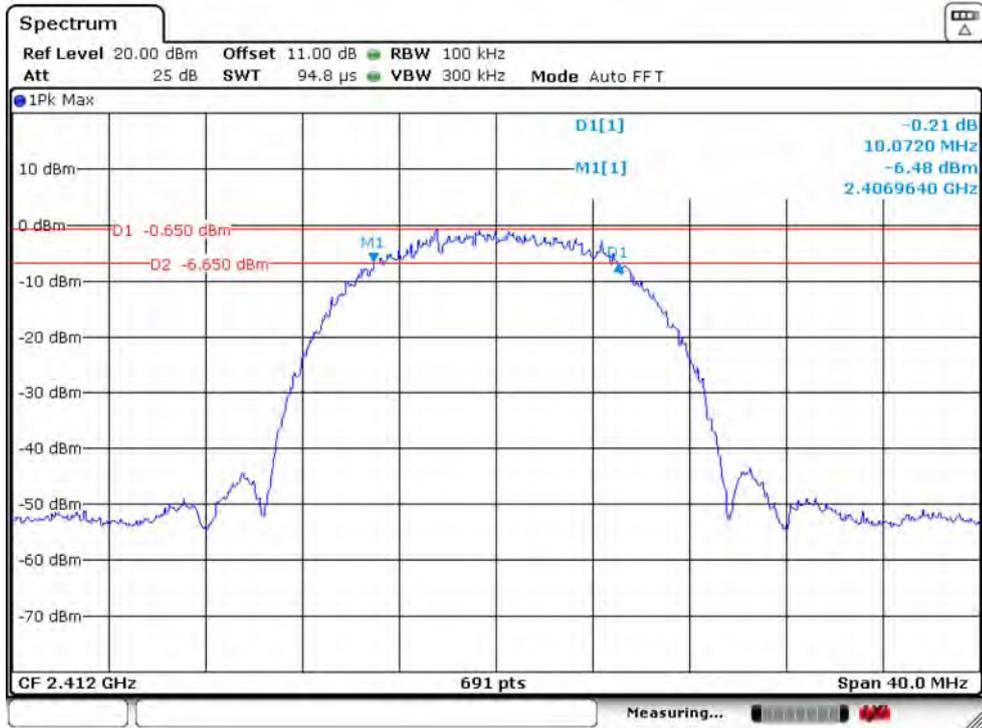


IEEE 802.11b 2412MHz_ANT 2

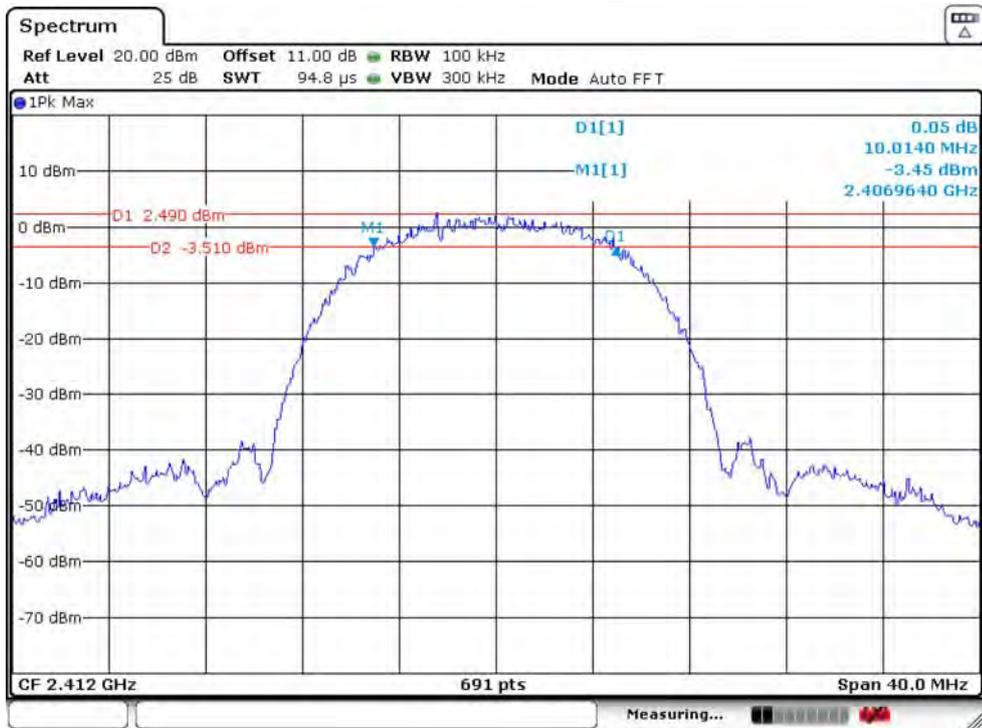


IEEE 802.11b 2437MHz_ANT 1

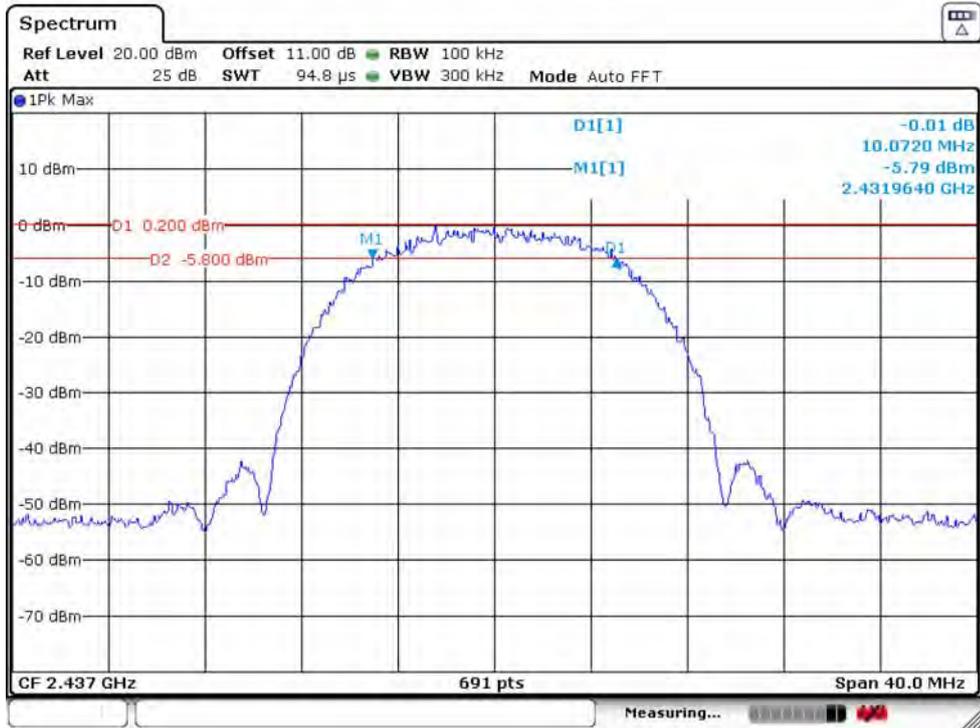


IEEE 802.11b 2437MHz_ANT 2

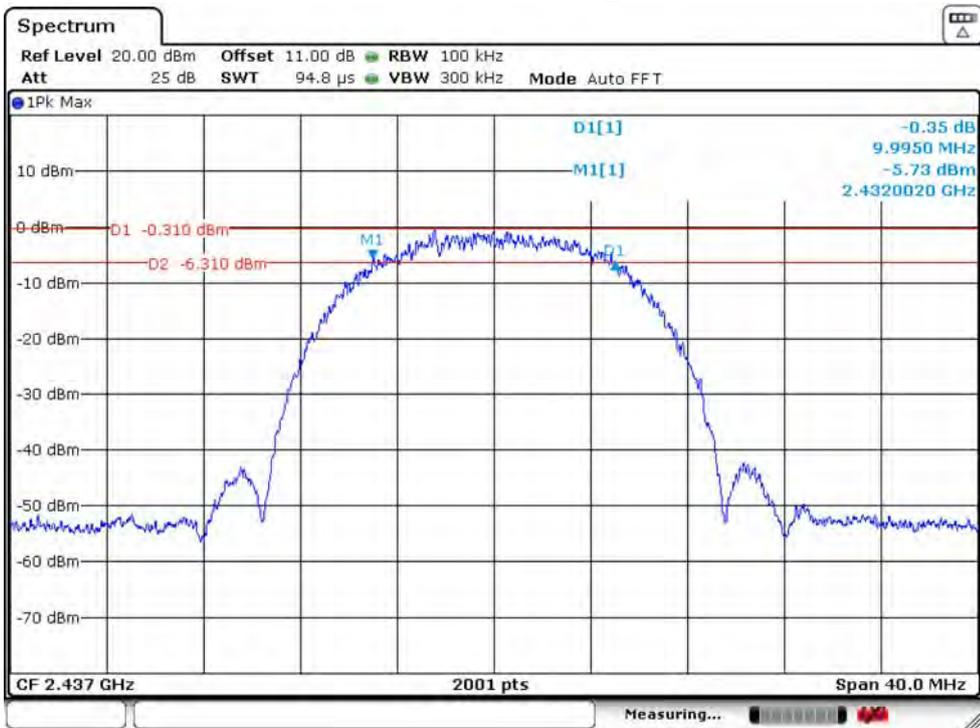


IEEE 802.11b 2462MHz_ANT 1

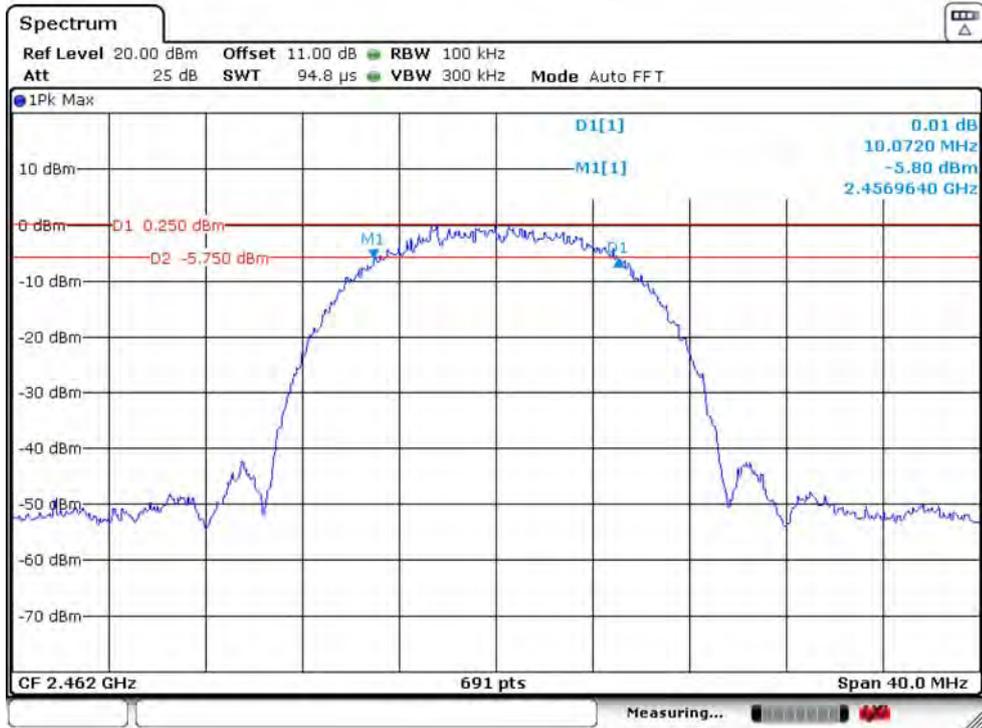


IEEE 802.11b 2462MHz_ANT 2

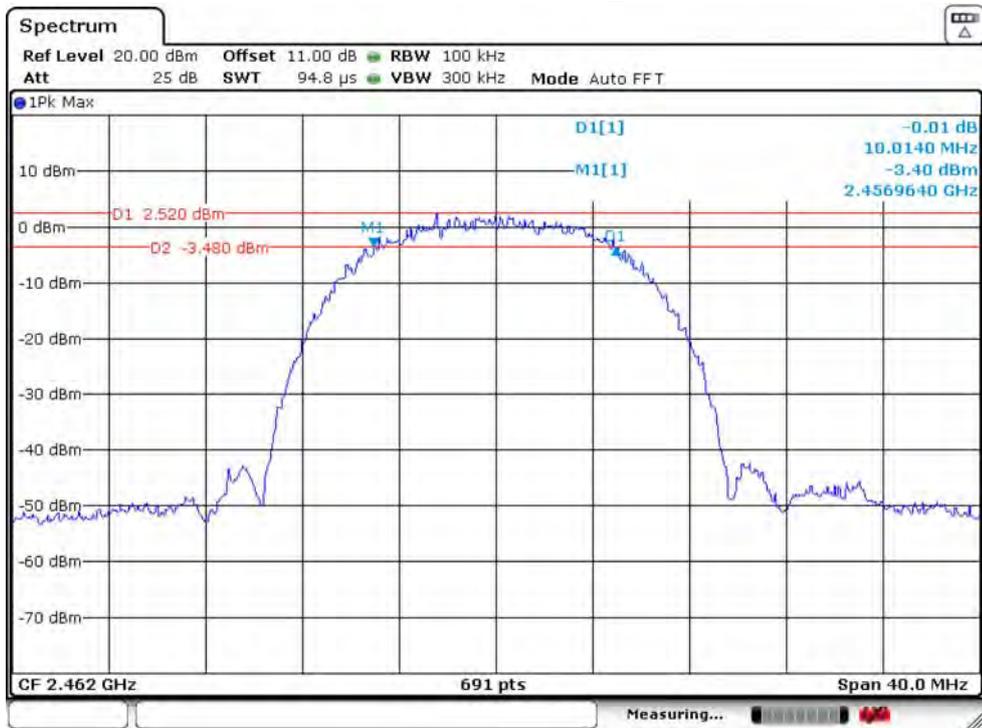


IEEE 802.11g 2412MHz_ANT 1

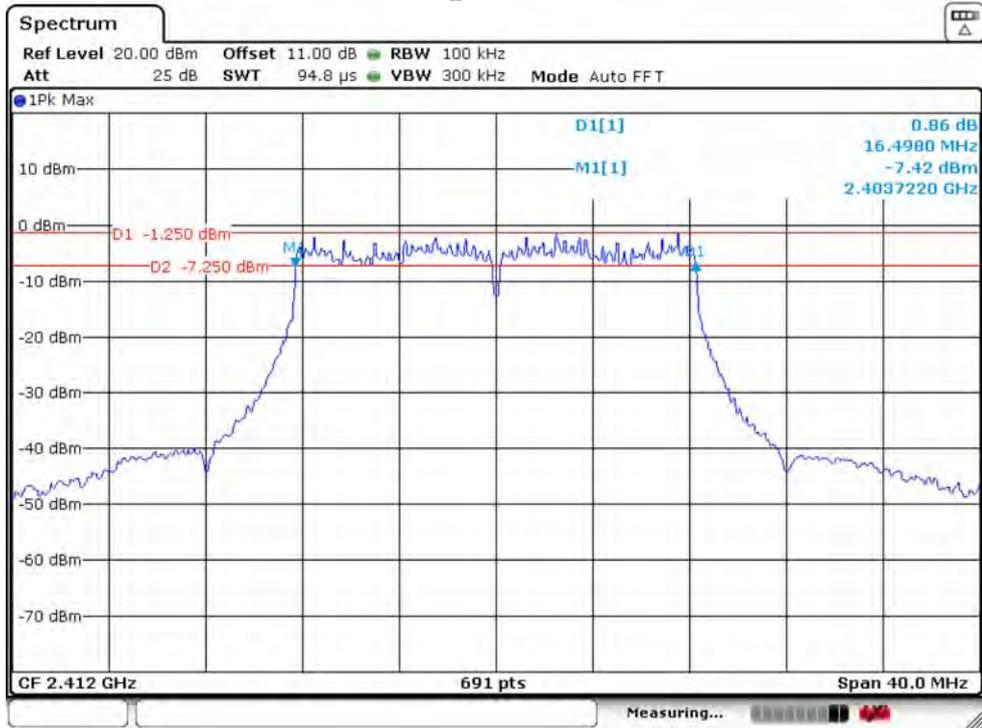


IEEE 802.11g 2412MHz_ANT 2

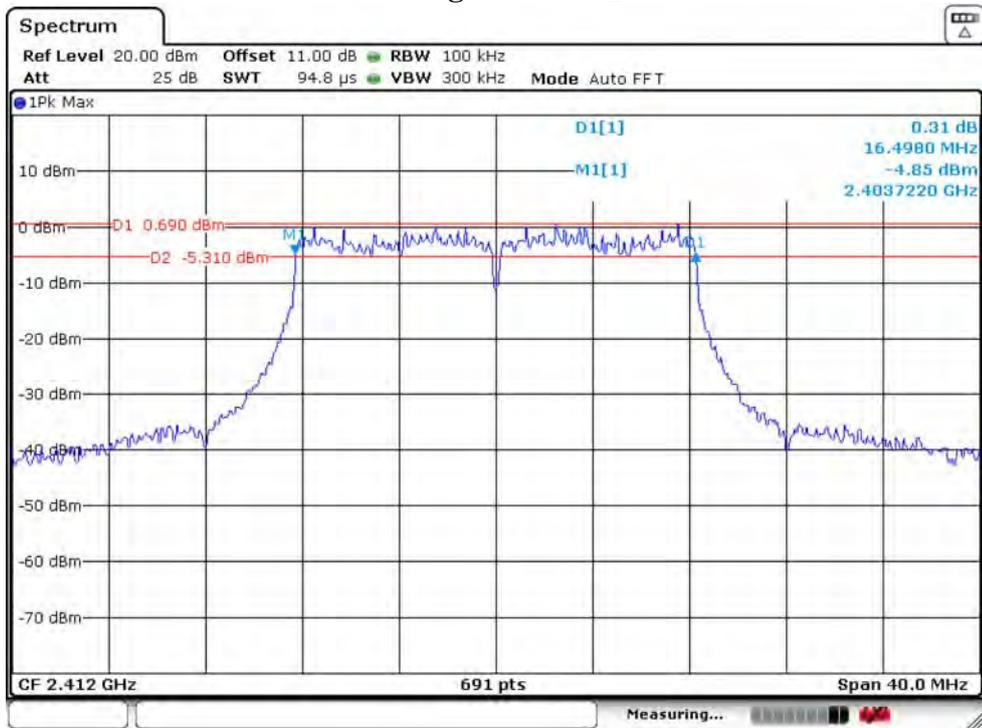


IEEE 802.11g 2437MHz_ANT 1

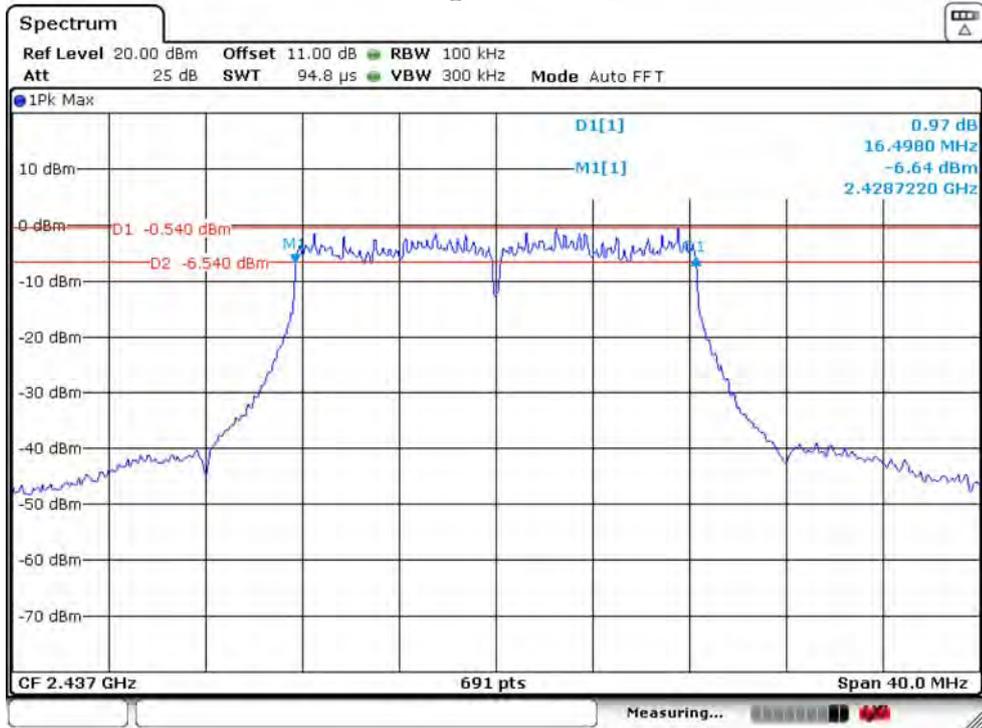


IEEE 802.11g 2437MHz_ANT 2

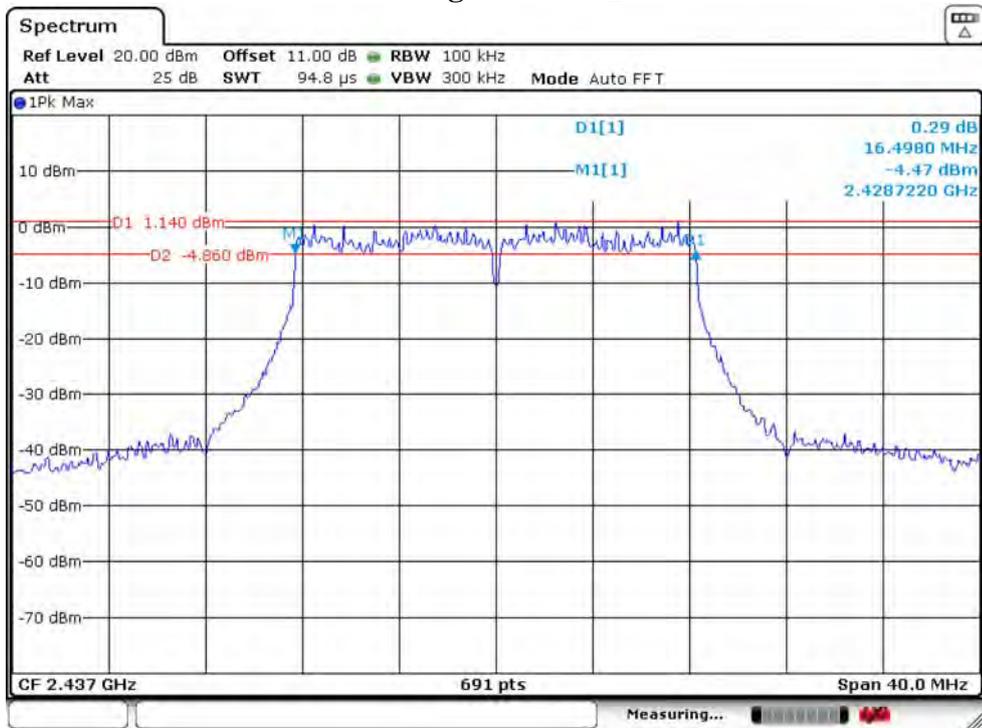


IEEE 802.11g 2462MHz_ANT 1

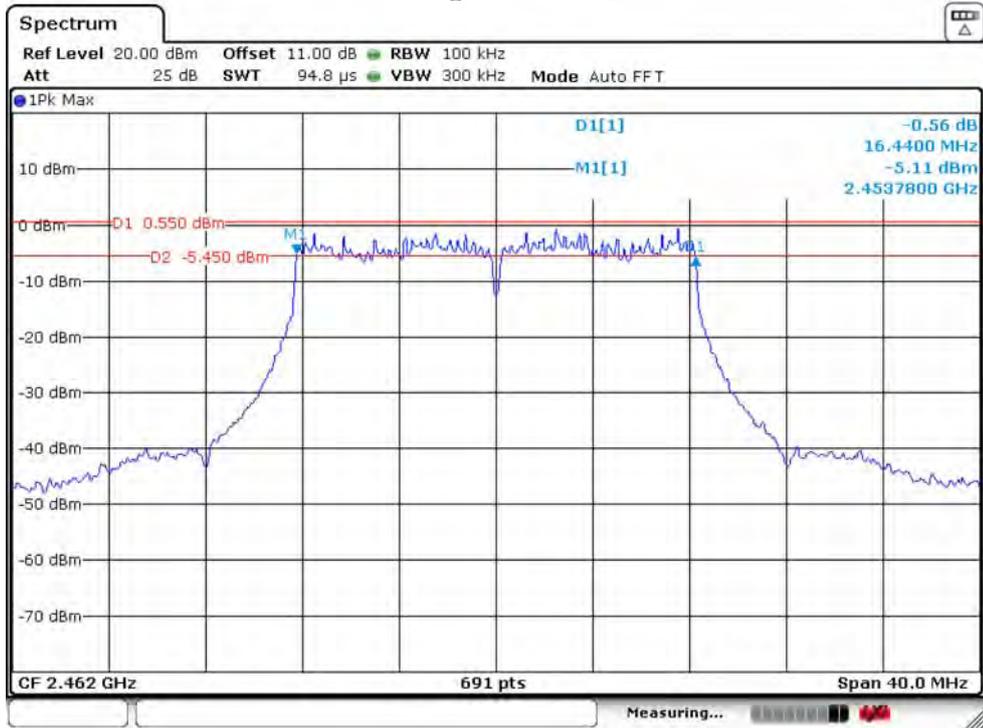


IEEE 802.11g 2462MHz_ANT 2

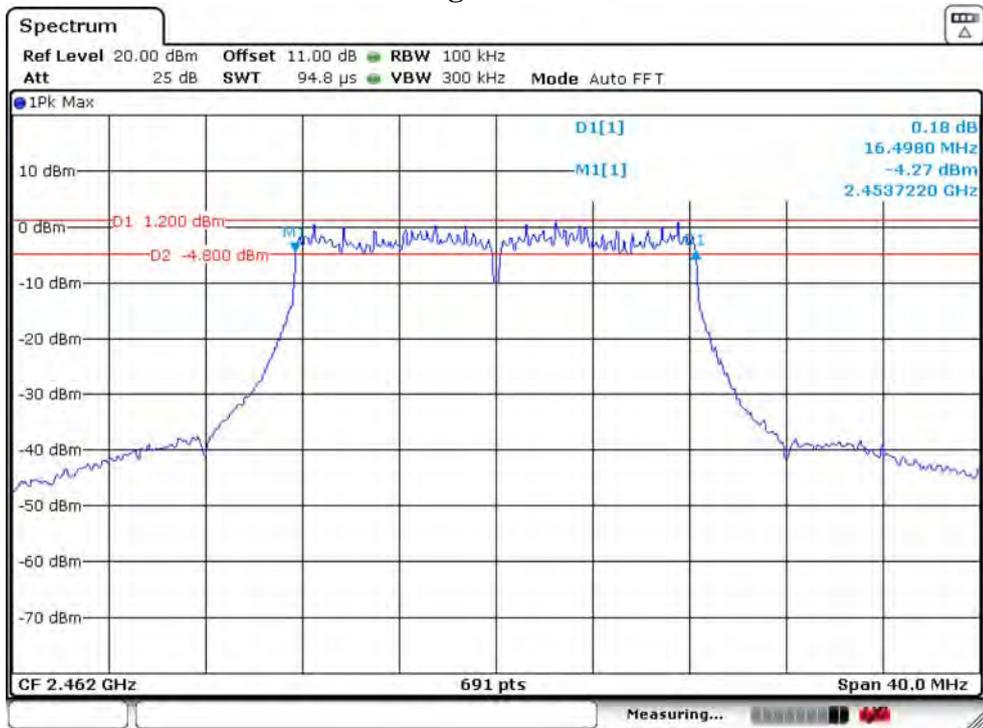


IEEE 802.11n HT20 2412MHz_ANT 1

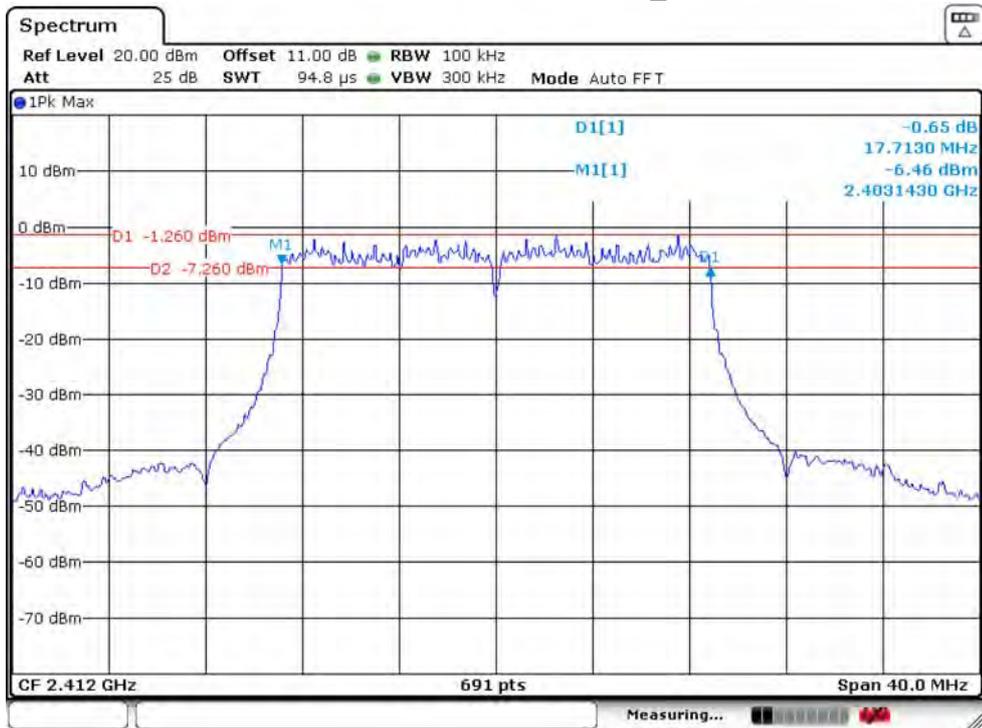


IEEE 802.11n HT20 2412MHz_ANT 2

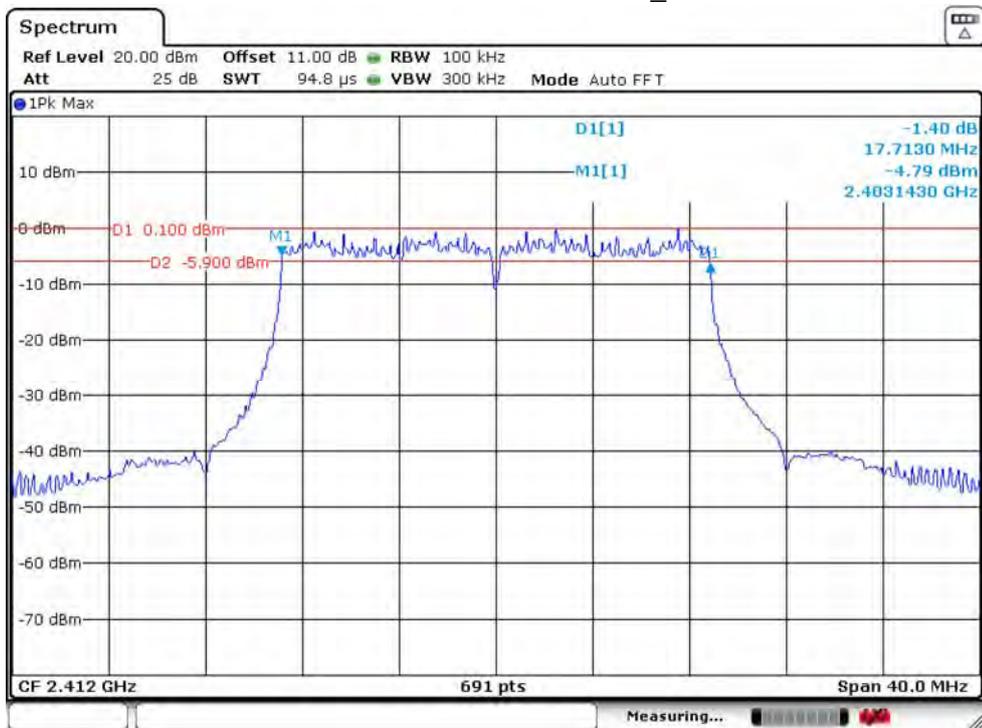


IEEE 802.11n HT20 2437MHz_ANT 1

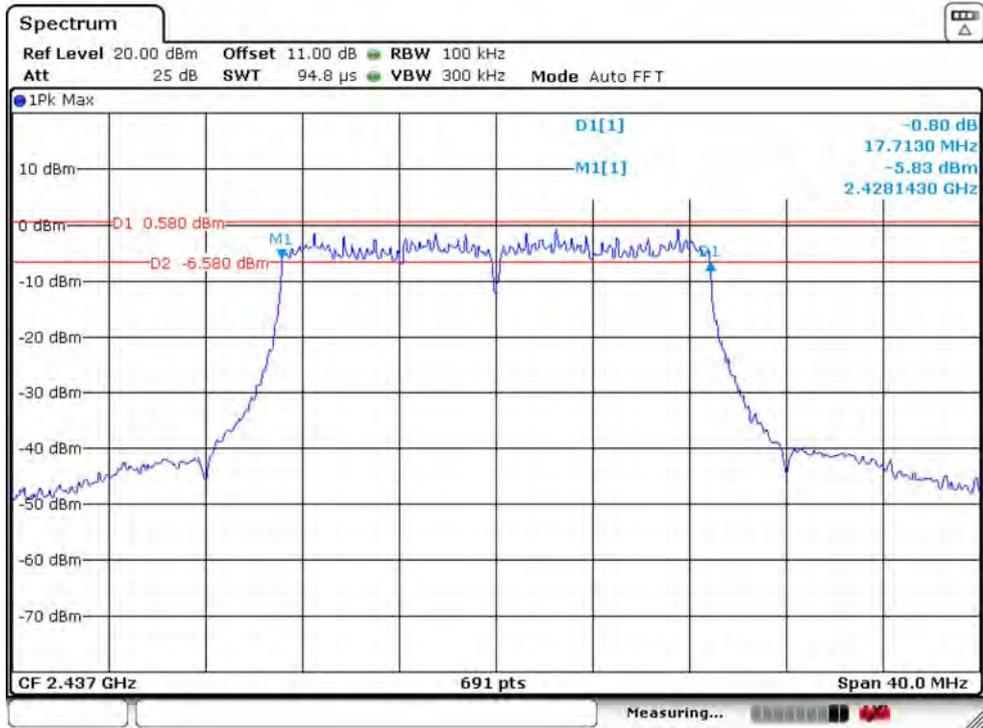


IEEE 802.11n HT20 2437MHz_ANT 2

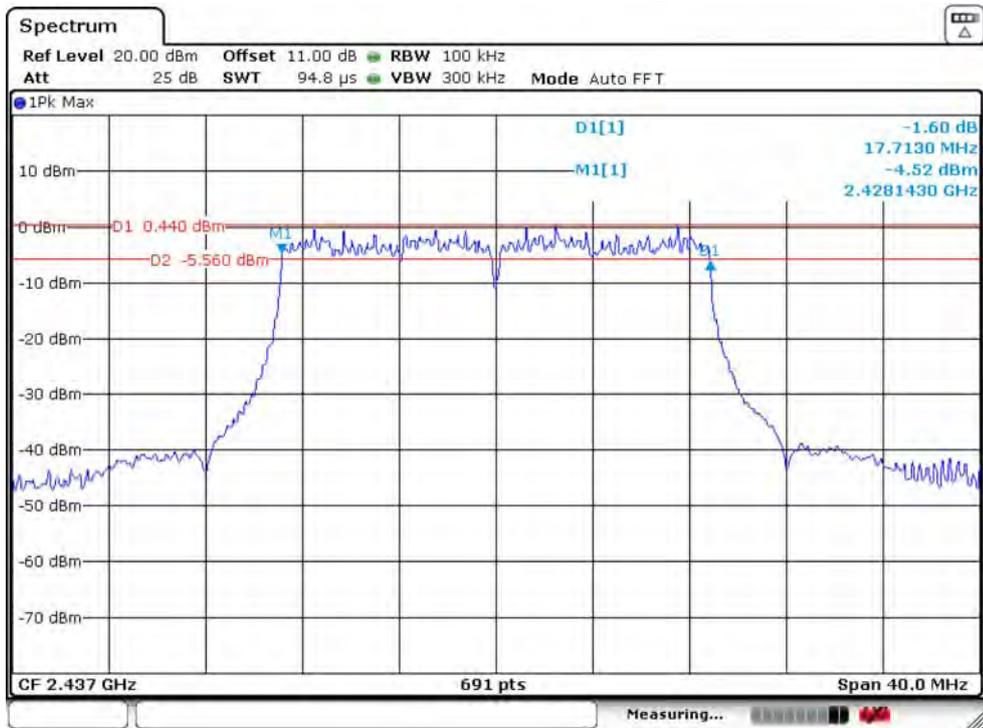


IEEE 802.11n HT20 2462MHz_ANT 1

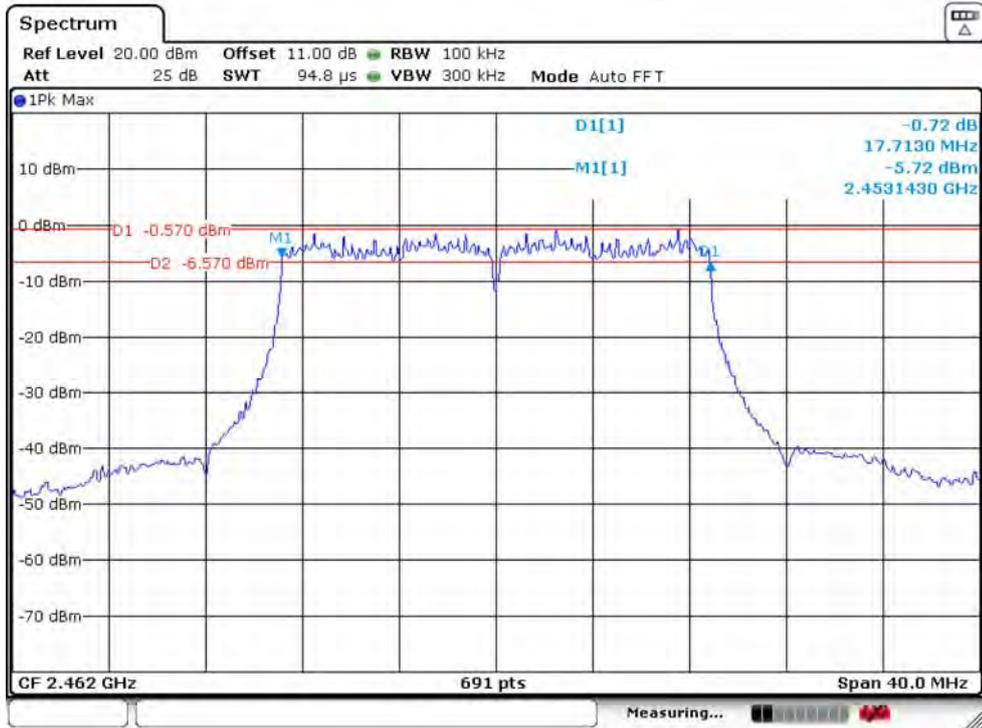


IEEE 802.11n HT20 2462MHz_ANT 2

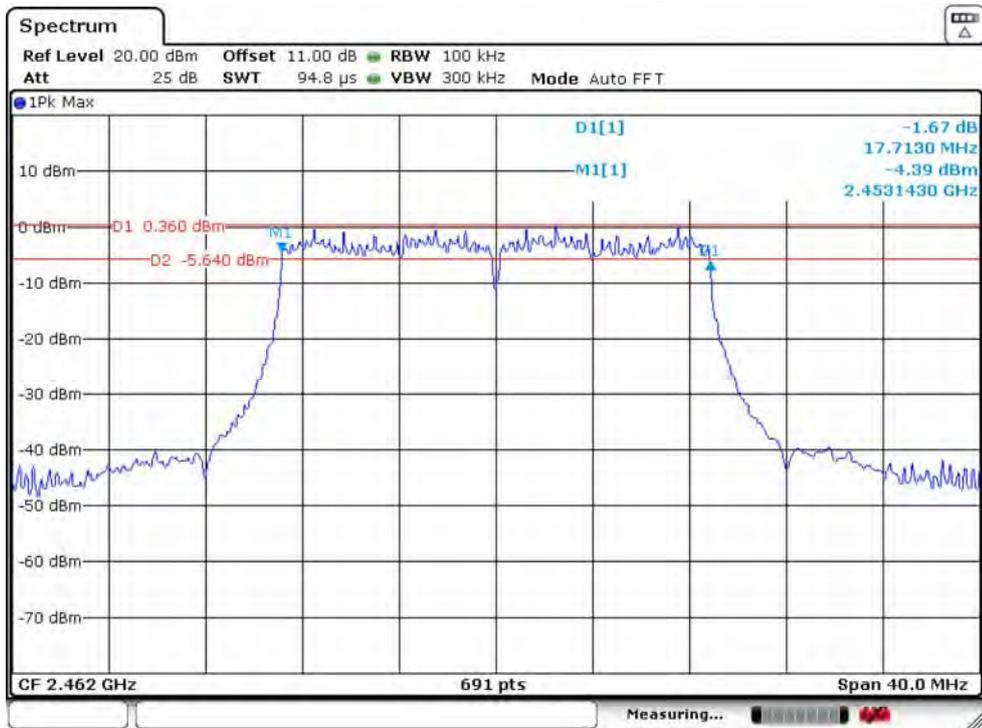


IEEE 802.11n HT40 2422MHz_ANT 1

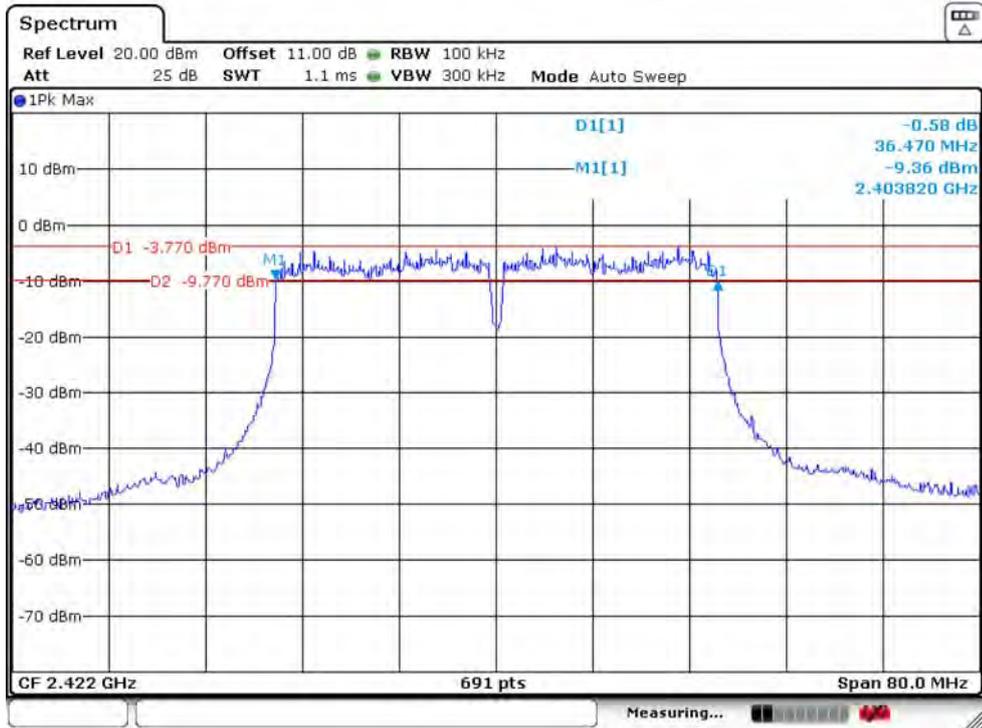


IEEE 802.11n HT40 2422MHz_ANT 2

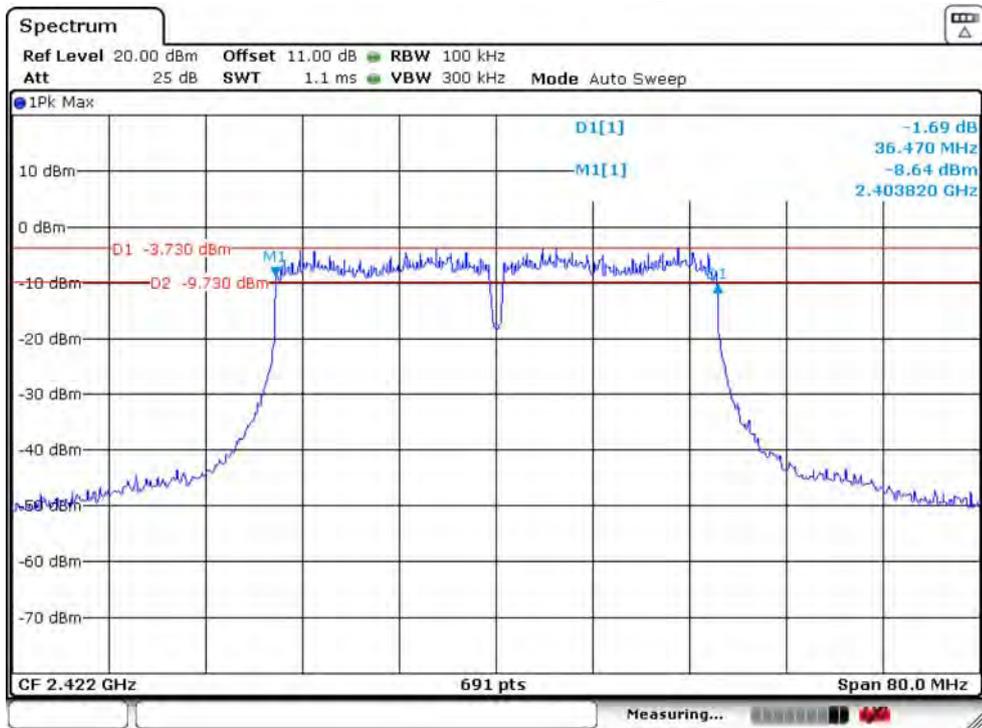


IEEE 802.11n HT40 2437MHz_ANT 1

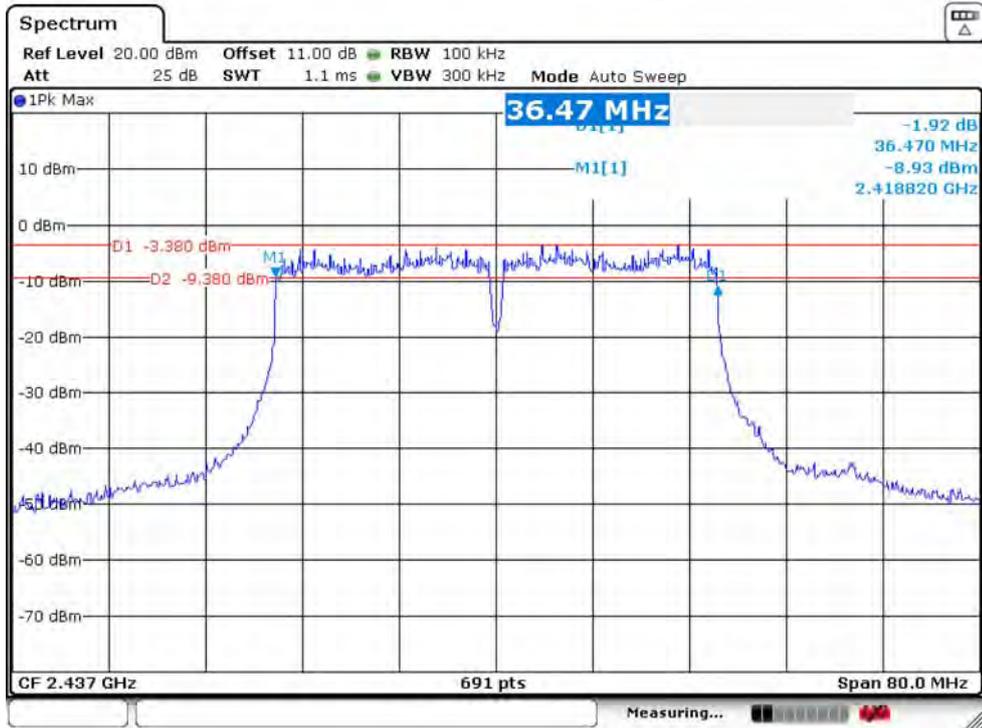


IEEE 802.11n HT40 2437MHz_ANT 2

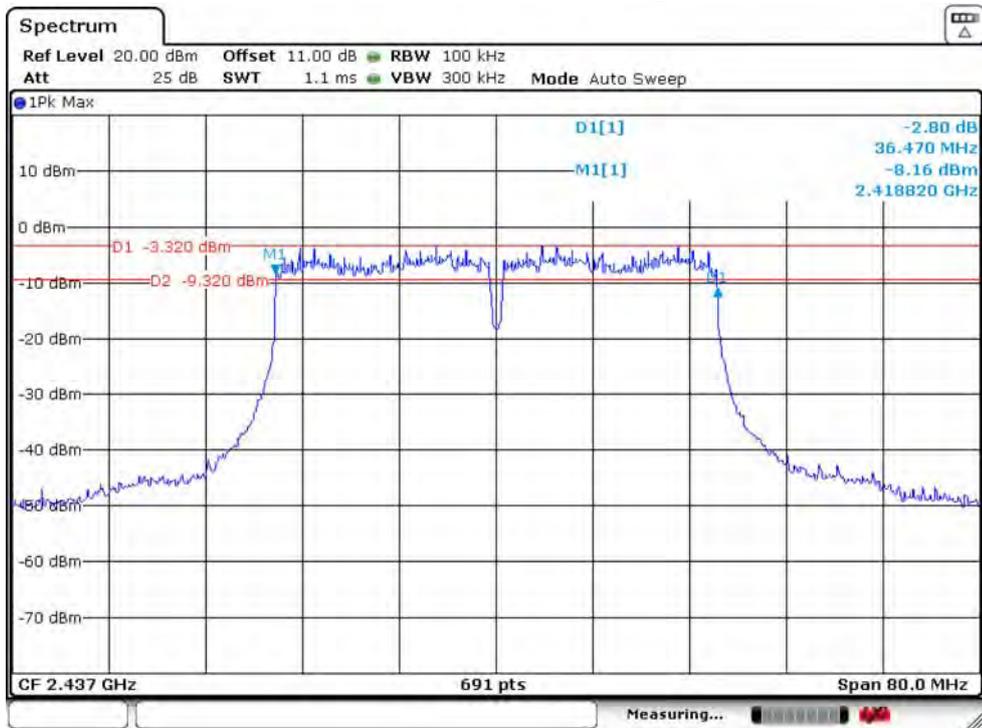


IEEE 802.11n HT40 2452MHz_ANT 1

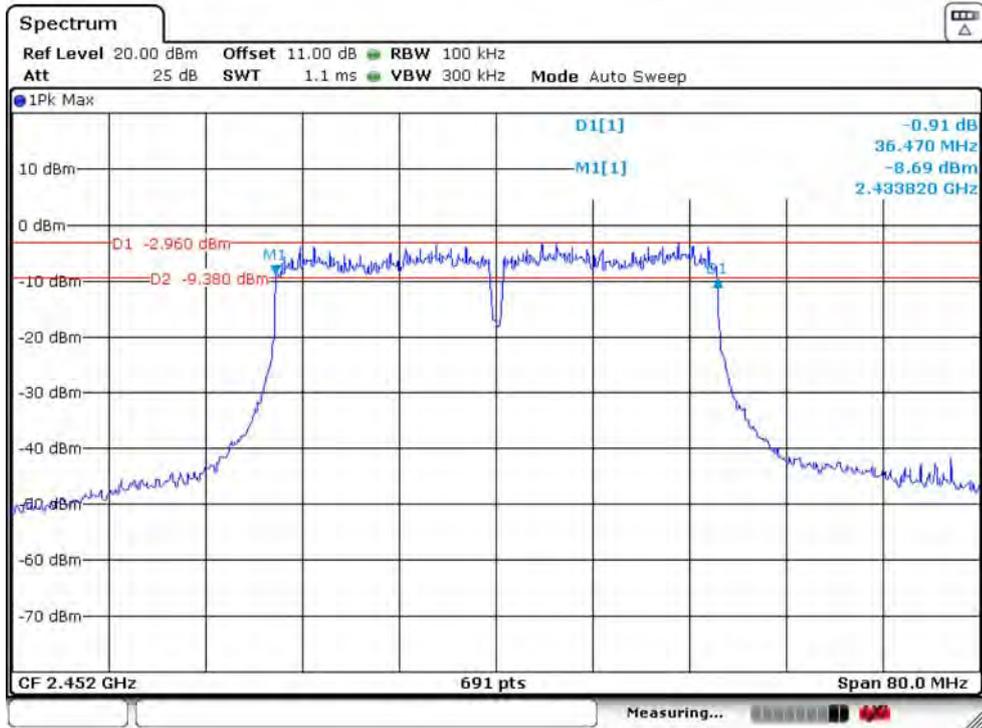


IEEE 802.11n HT40 2452MHz_ANT 2

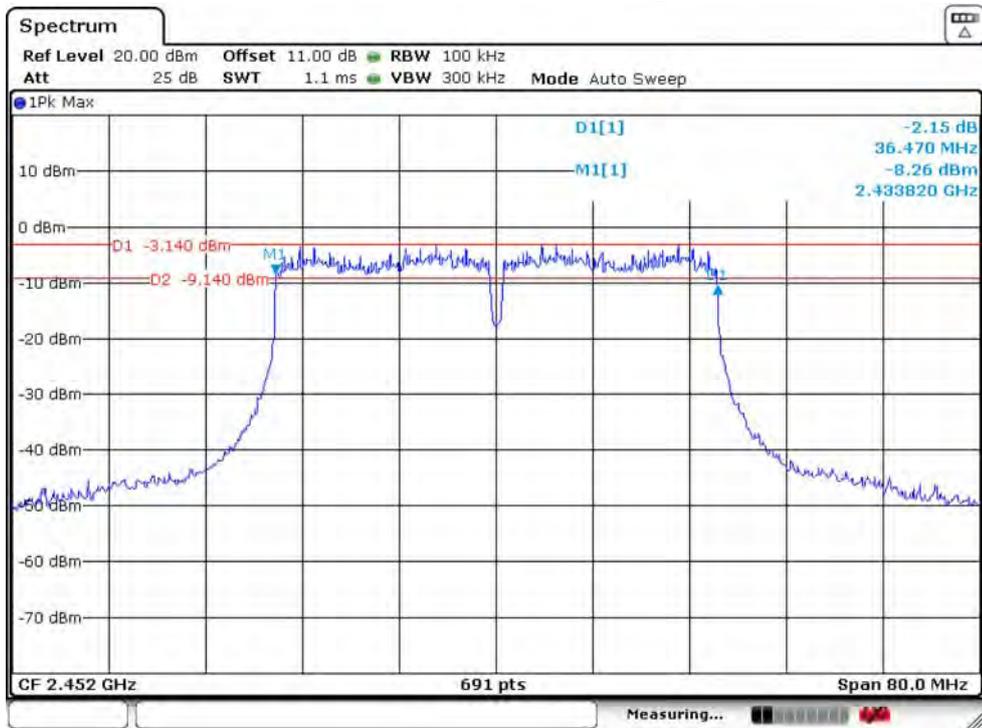


IEEE 802.11ax HE20 2412MHz_ANT 1

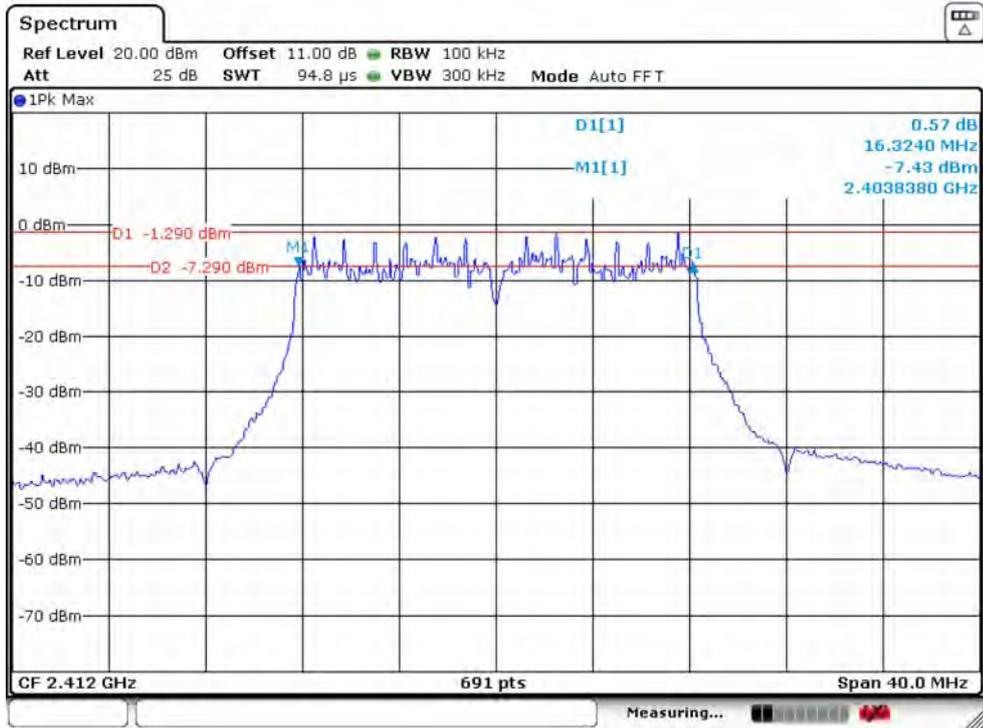


IEEE 802.11ax HE20 2412MHz_ANT 2

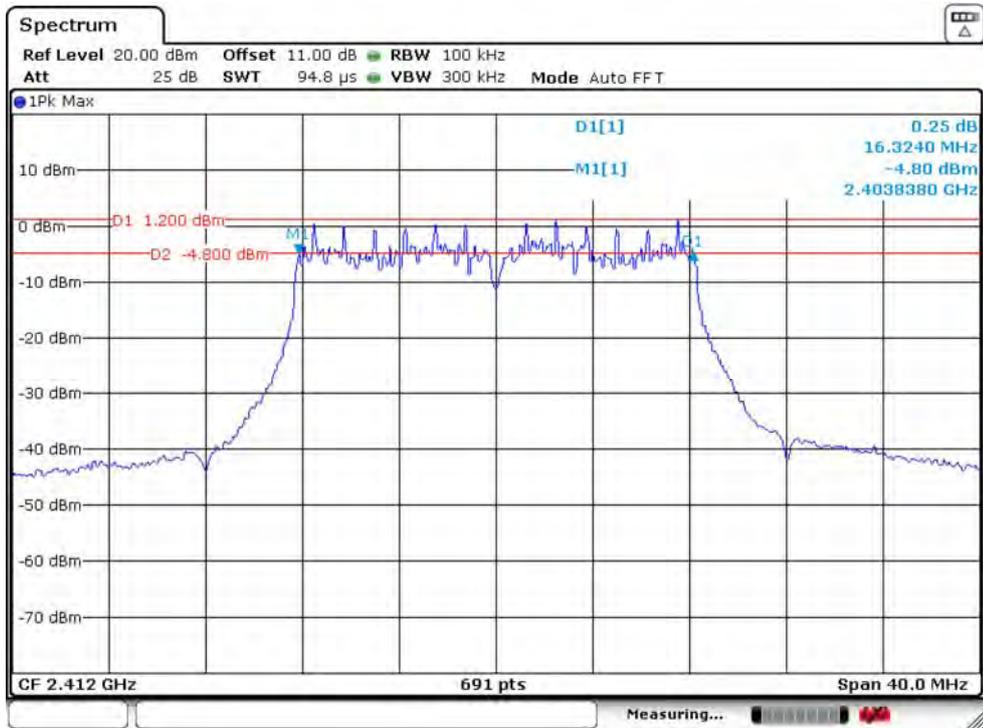


IEEE 802.11ax HE20 2437MHz_ANT 1

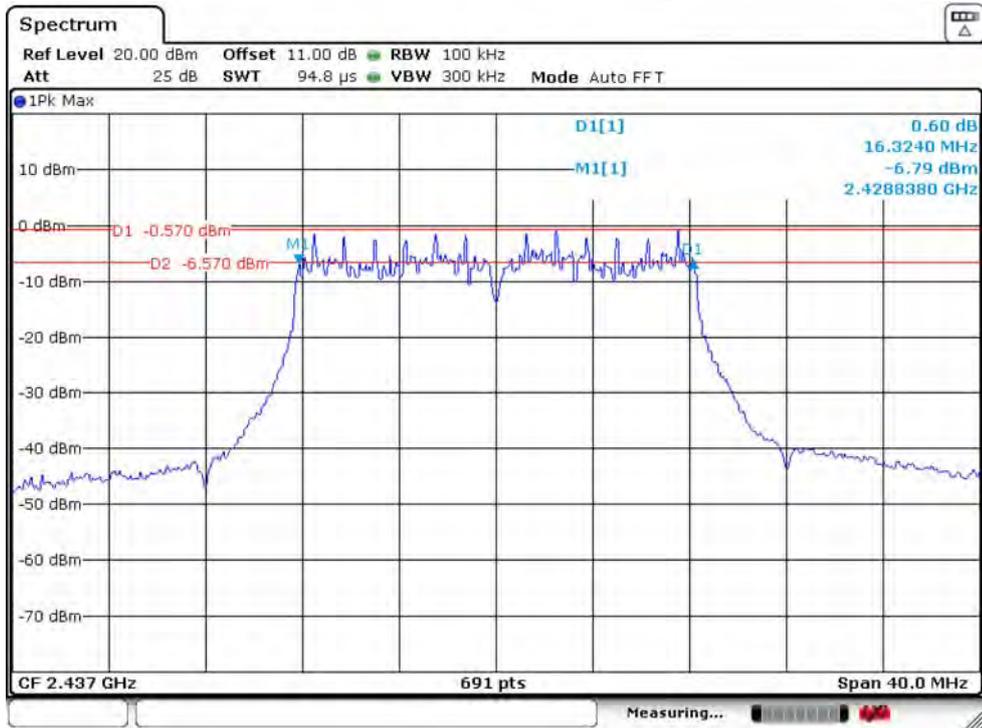


IEEE 802.11ax HE20 2437MHz_ANT 2

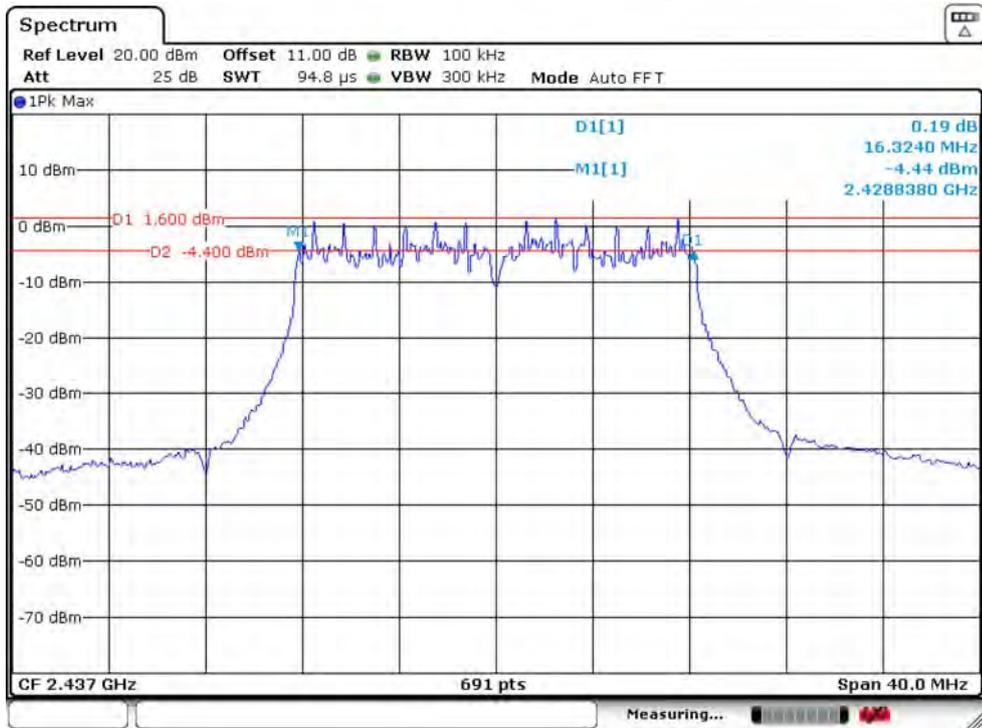


IEEE 802.11ax HE20 2462MHz_ANT 1

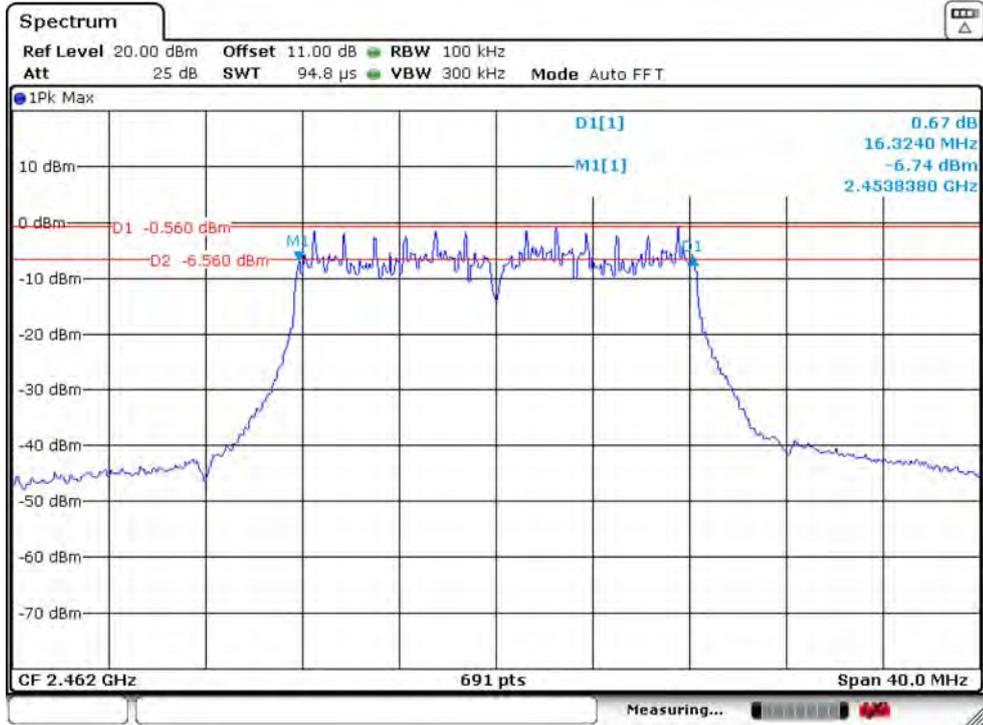


IEEE 802.11ax HE20 2462MHz_ANT 2

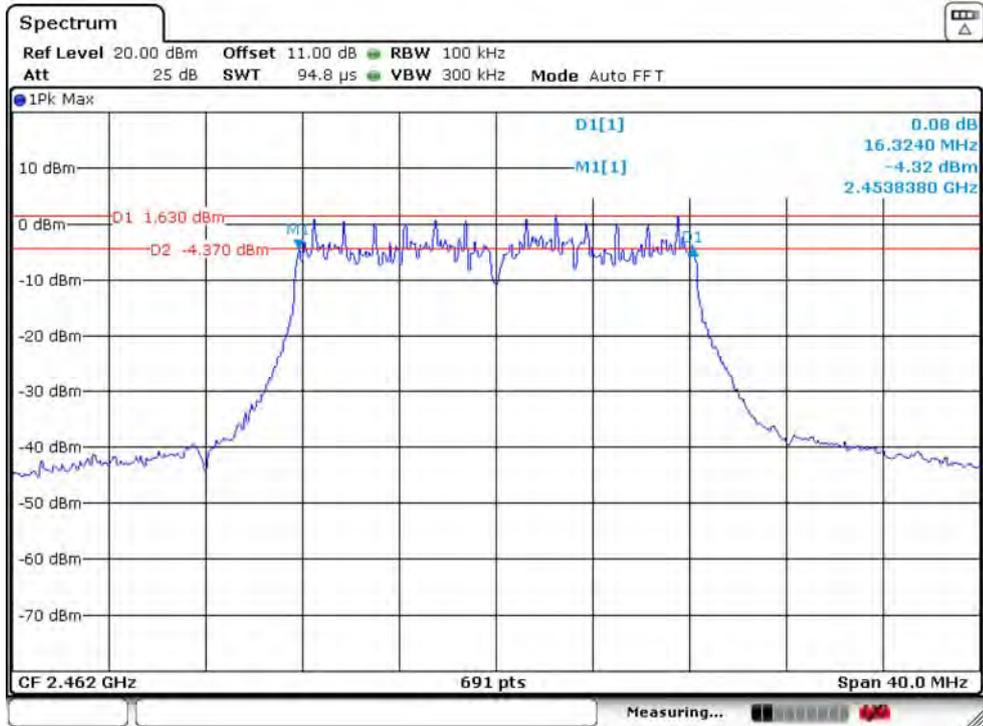


IEEE 802.11ax HE40 2422MHz_ANT 1

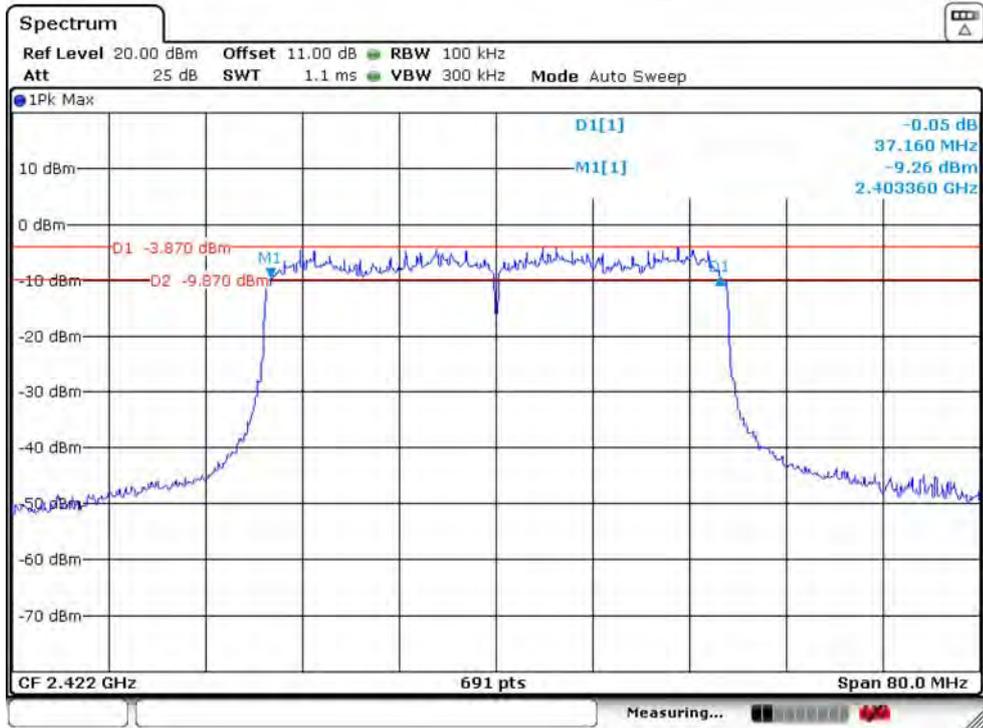


IEEE 802.11ax HE40 2422MHz_ANT 2

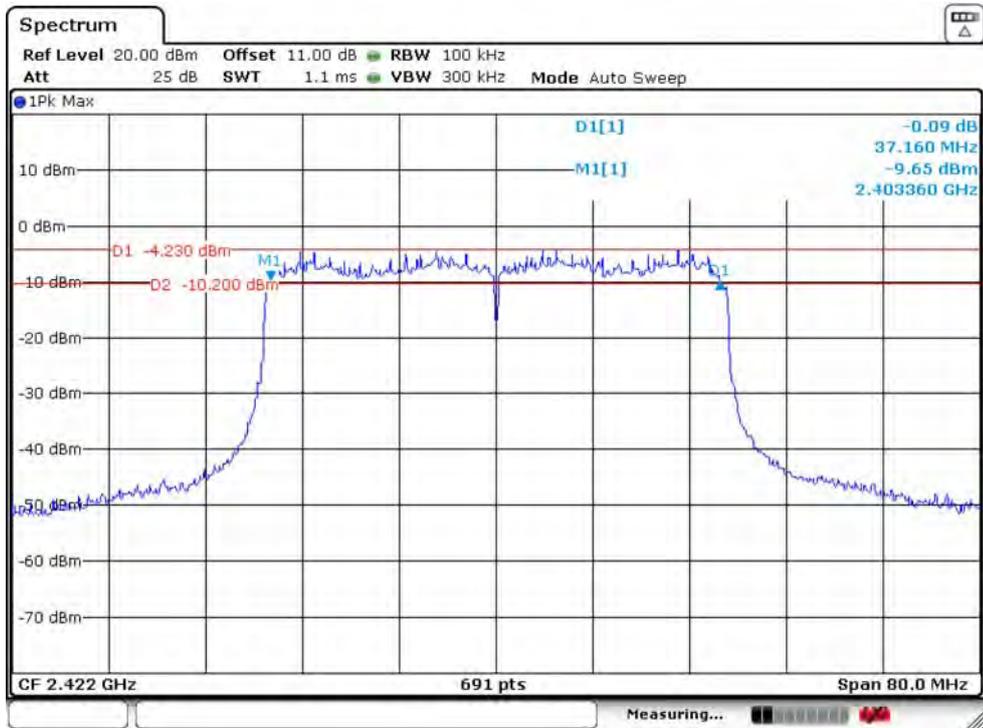


IEEE 802.11ax HE40 2437MHz_ANT 1

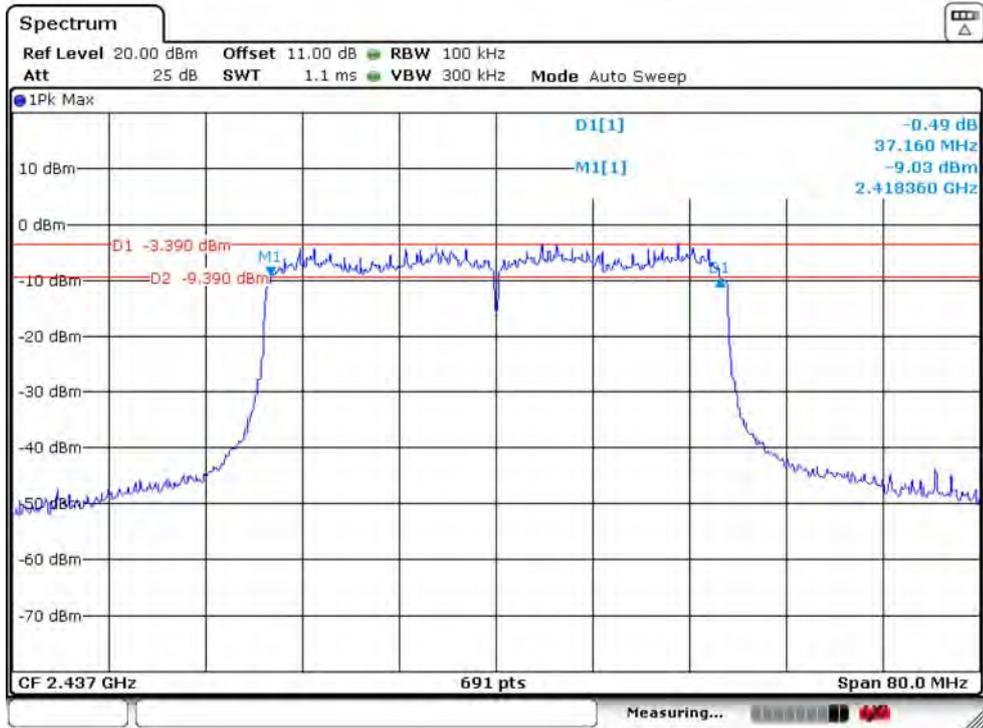


IEEE 802.11ax HE40 2437MHz_ANT 2

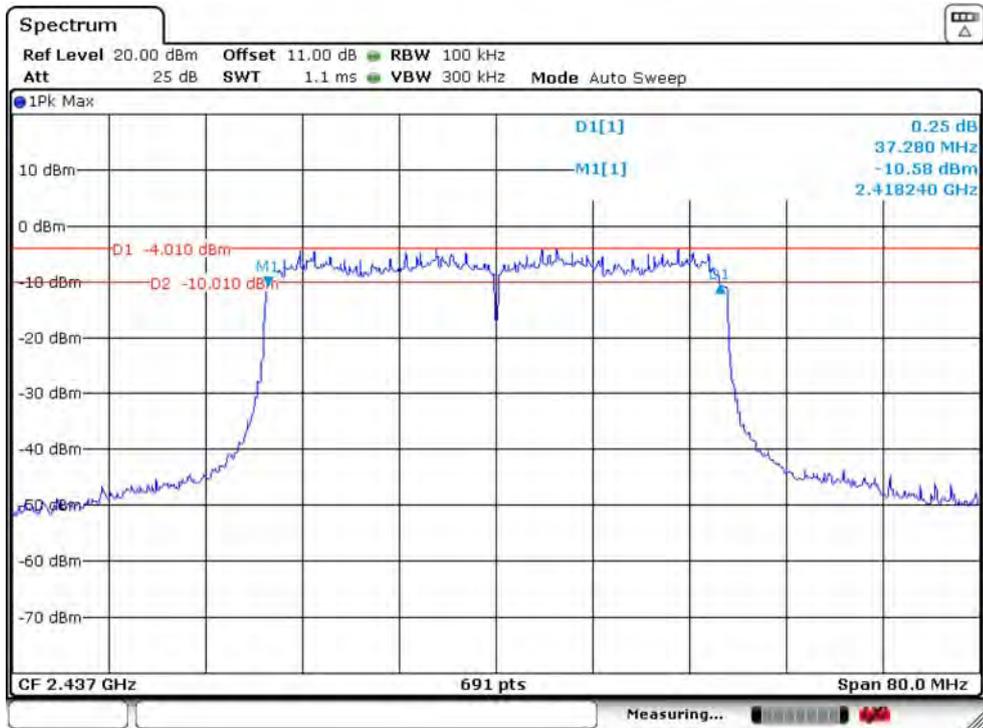

IEEE 802.11ax HE40 2452MHz_ANT 1

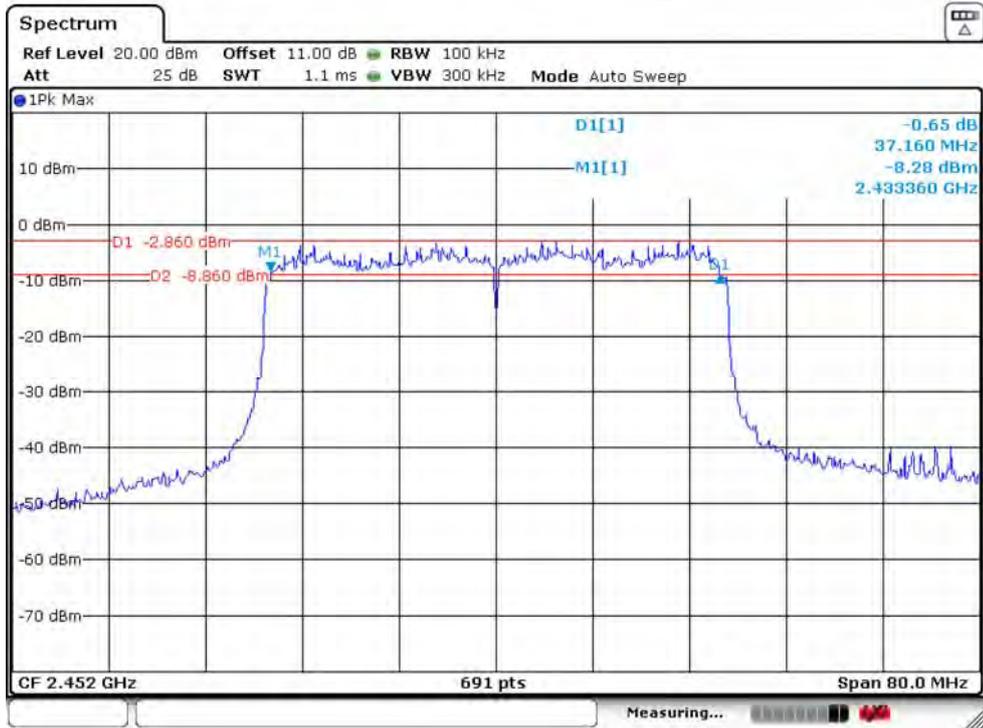

IEEE 802.11ax HE40 2452MHz_ANT 2

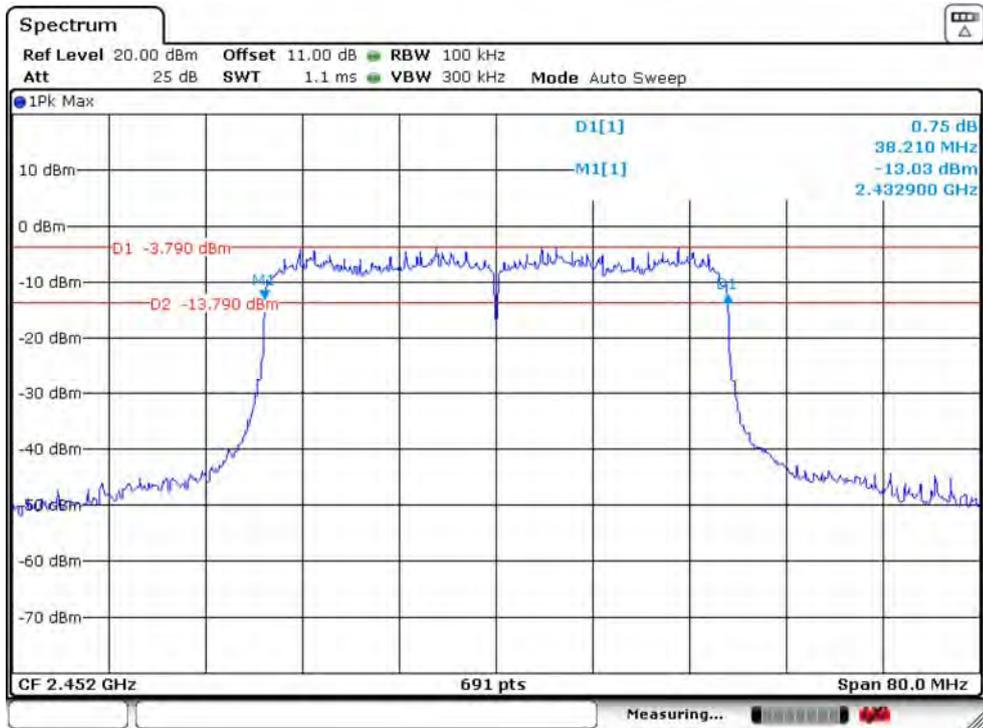

8. MAXIMUM PEAK OUTPUT POWER

8.1. Limit

For systems using digital modulation in 2400-2483.5MHz, the maximum peak output power is 1 Watt(30dBm).

8.2. Test Setup



8.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	1MHz
VBW	3MHz
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


8.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 4.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Use the channel power function to measure maximum peak output power, allow trace to stabilize, save test pictures.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.


8.5. Test Result

Temperature	23.6°C	Relative Humidity		56%				Test Voltage		AC 120V/60Hz
Mode	Freq (MHz)	Peak Output Power (dBm)		Total Peak Output Power (W)		Total Peak Output Power (dBm)		Limit		Result
		ANT 1	ANT 2	ANT 1	ANT 2	ANT 1	ANT 2	W	dBm	
IEEE 802.11b	2412	18.03	18.32	0.0635	0.0679	18.03	18.32	0.9714	29.87	PASS
	2437	18.66	18.40	0.0735	0.0692	18.66	18.40	0.9714	29.87	PASS
	2462	18.73	18.58	0.0746	0.0721	18.73	18.58	0.9714	29.87	PASS
IEEE 802.11g	2412	20.39	20.41	0.1094	0.1099	20.39	20.41	0.9714	29.87	PASS
	2437	20.86	20.45	0.1219	0.1109	20.86	20.45	0.9714	29.87	PASS
	2462	21.09	20.55	0.1285	0.1135	21.09	20.55	0.9714	29.87	PASS
IEEE 802.11n HT20	2412	19.62	19.61	0.1830		22.63		0.9714	29.87	PASS
	2437	20.18	19.94	0.2029		23.07		0.9714	29.87	PASS
	2462	20.18	19.96	0.2033		23.08		0.9714	29.87	PASS
IEEE 802.11n HT40	2422	19.66	19.23	0.1762		22.46		0.9714	29.87	PASS
	2437	19.24	19.36	0.1702		22.31		0.9714	29.87	PASS
	2452	19.83	19.50	0.1853		22.68		0.9714	29.87	PASS
IEEE 802.11ax HE20	2412	18.89	19.13	0.1593		22.02		0.9714	29.87	PASS
	2437	19.14	19.48	0.1708		22.32		0.9714	29.87	PASS
	2462	19.10	19.69	0.1744		22.42		0.9714	29.87	PASS
IEEE 802.11ax HE40	2422	19.11	19.06	0.1620		22.10		0.9714	29.87	PASS
	2437	19.20	19.40	0.1703		22.31		0.9714	29.87	PASS
	2452	19.46	19.58	0.1791		22.53		0.9714	29.87	PASS


IEEE 802.11b 2412MHz_ANT 1

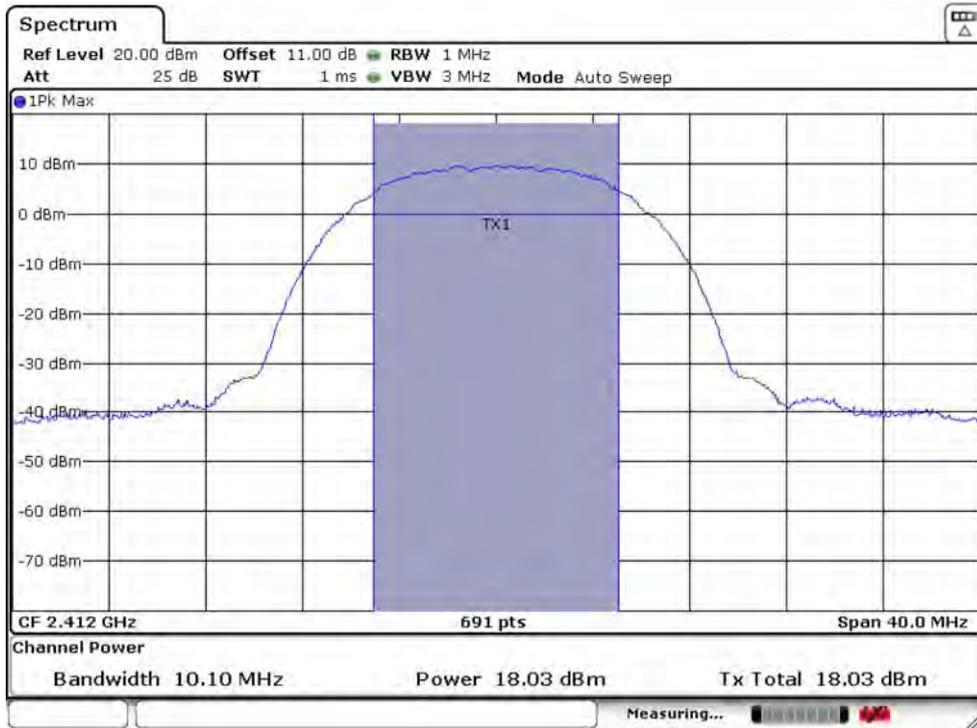


IEEE 802.11b 2412MHz_ANT 2

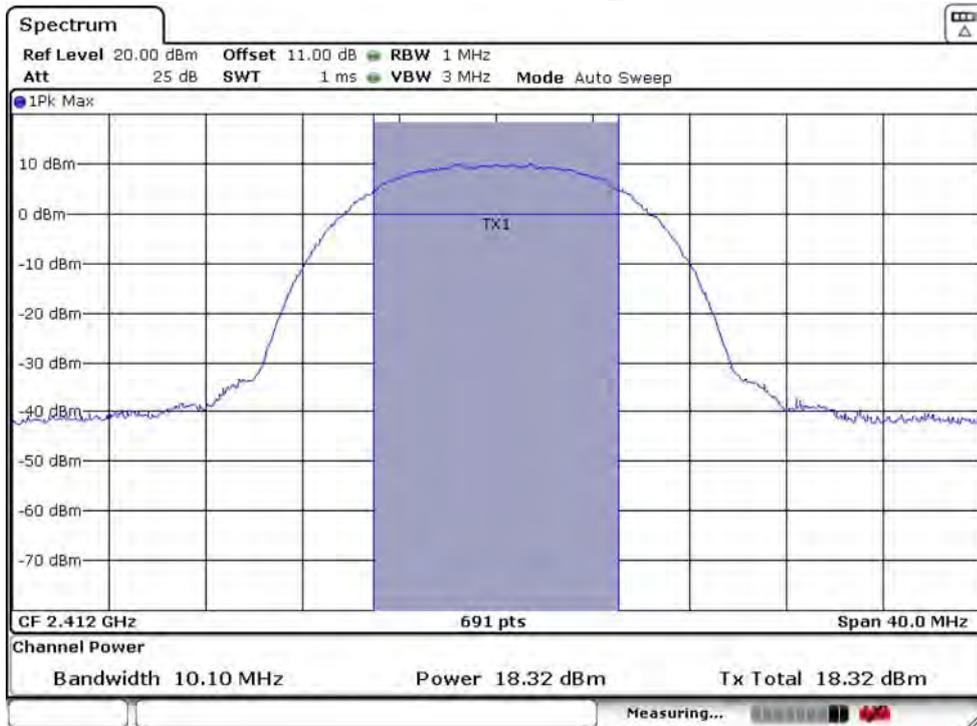


IEEE 802.11b 2437MHz_ANT 1

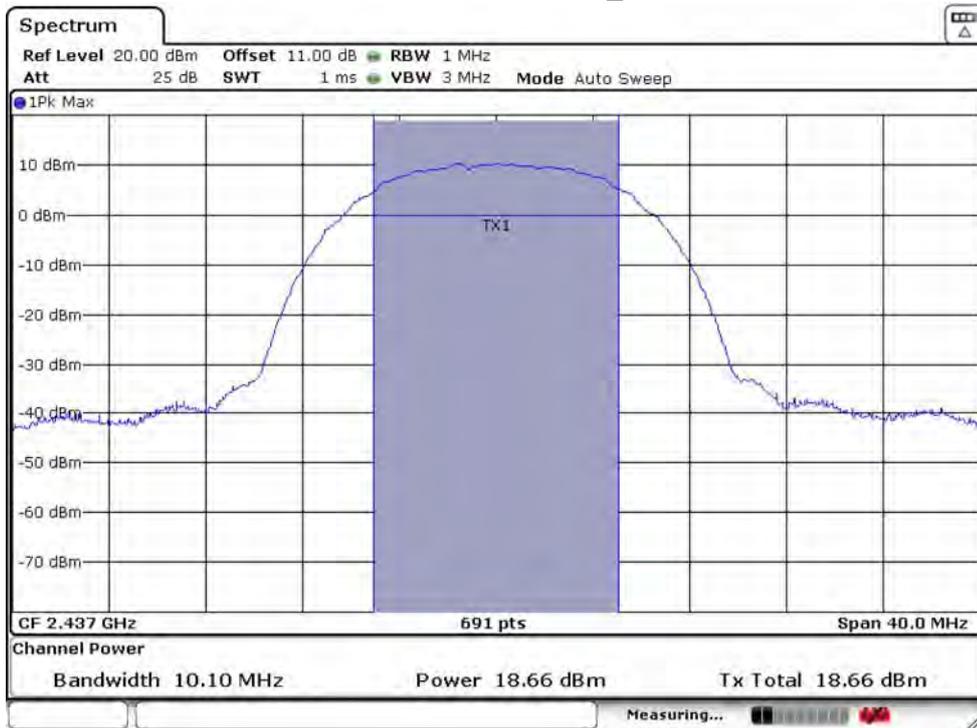


IEEE 802.11b 2437MHz_ANT 2

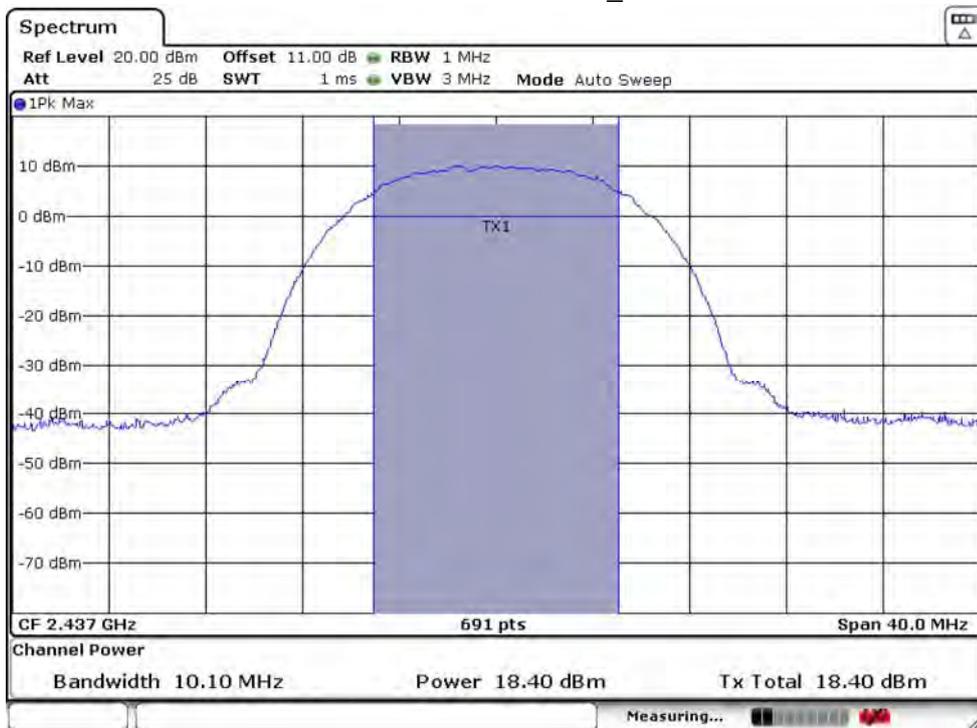


IEEE 802.11b 2462MHz_ANT 1

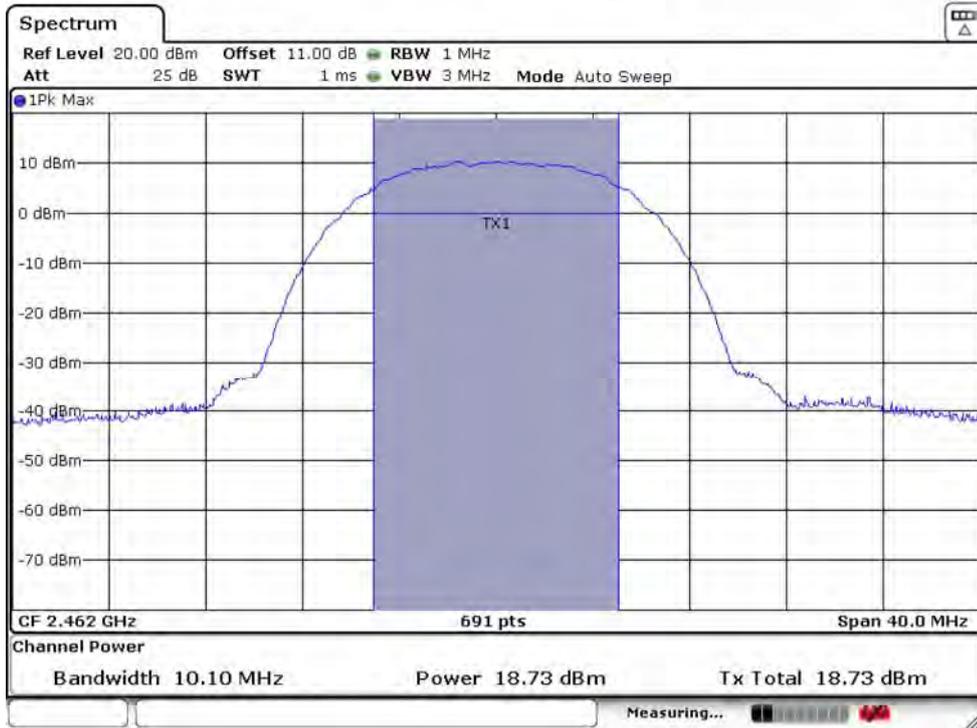


IEEE 802.11b 2462MHz_ANT 2

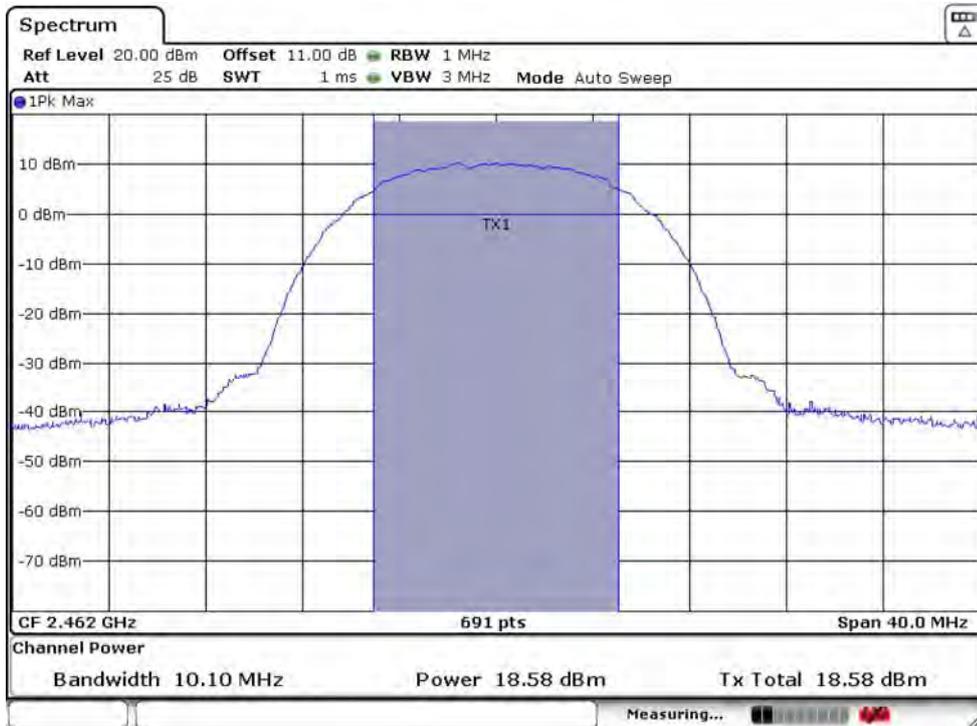


IEEE 802.11g 2412MHz_ANT 1

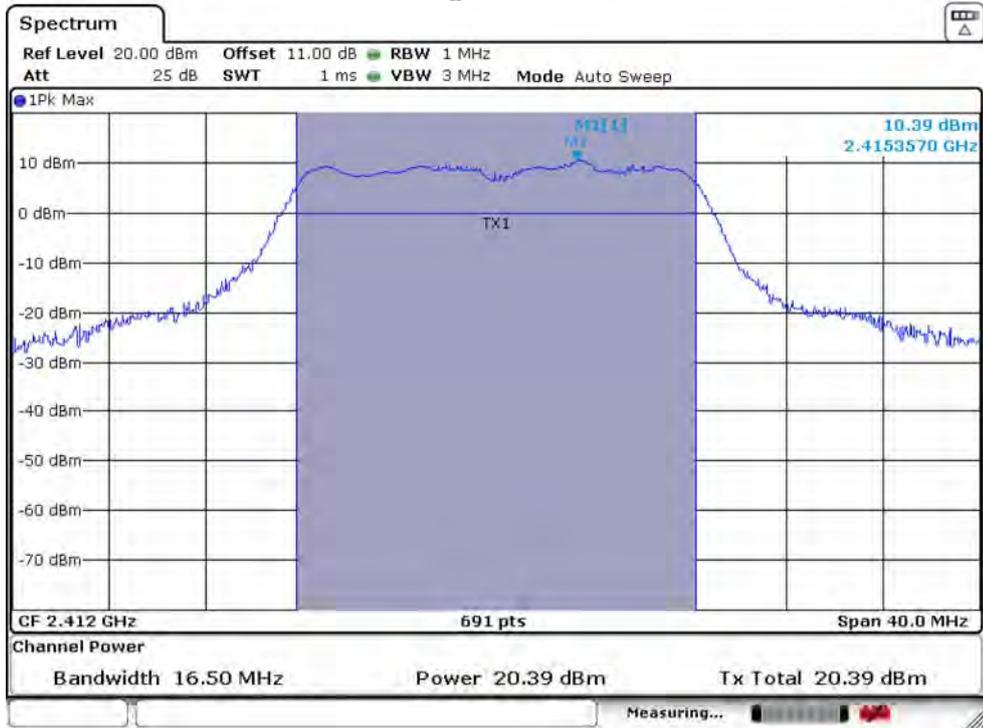


IEEE 802.11g 2412MHz_ANT 2

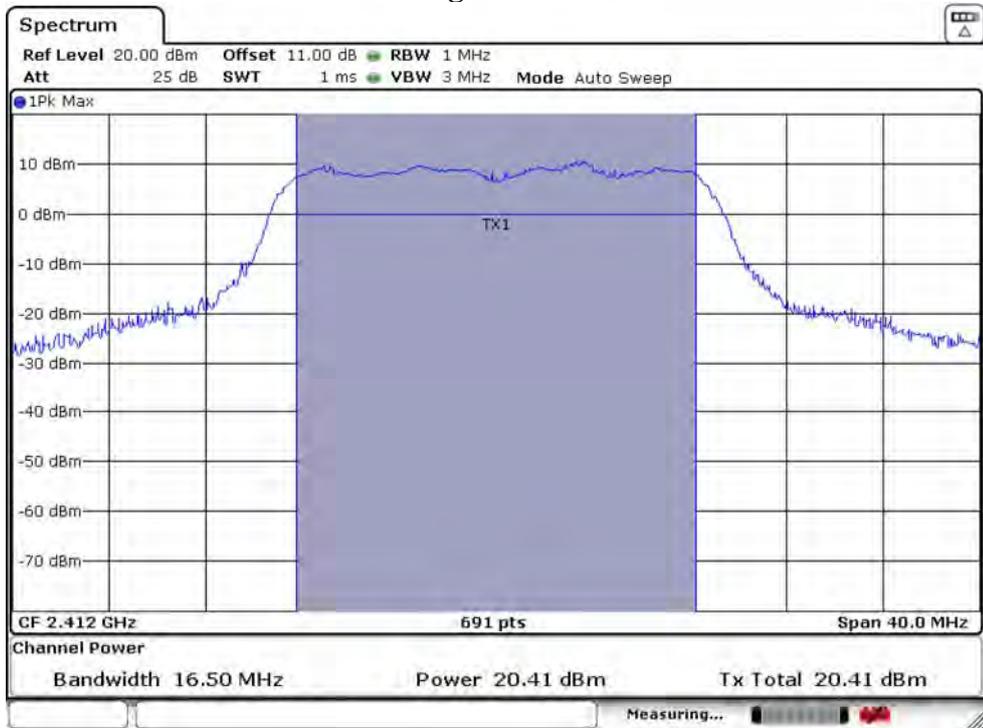


IEEE 802.11g 2437MHz_ANT 1

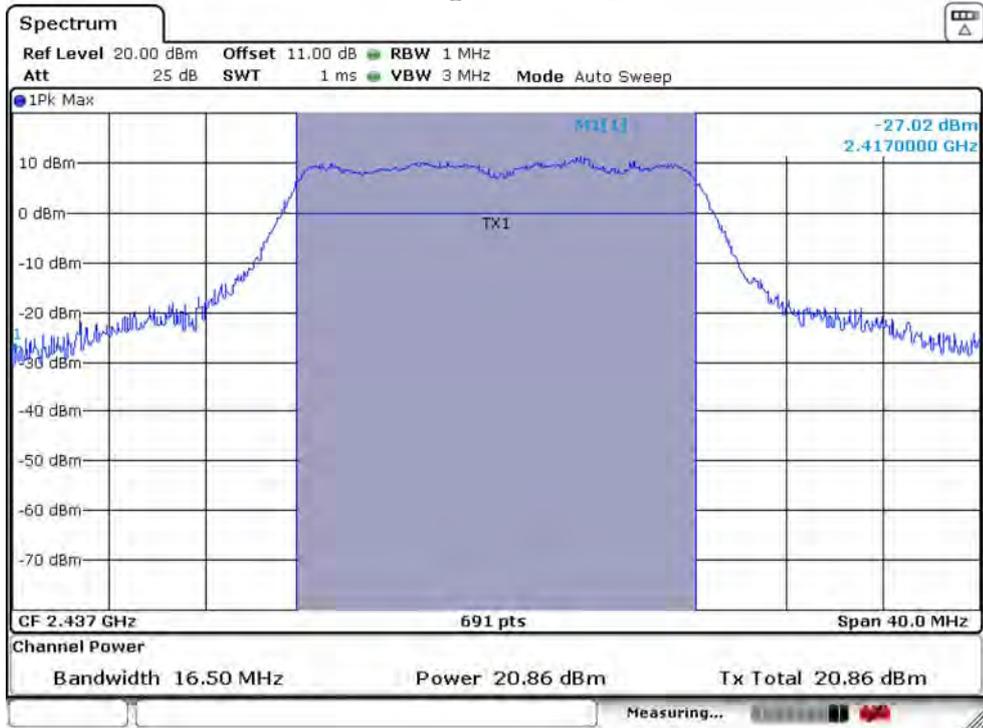


IEEE 802.11g 2437MHz_ANT 2

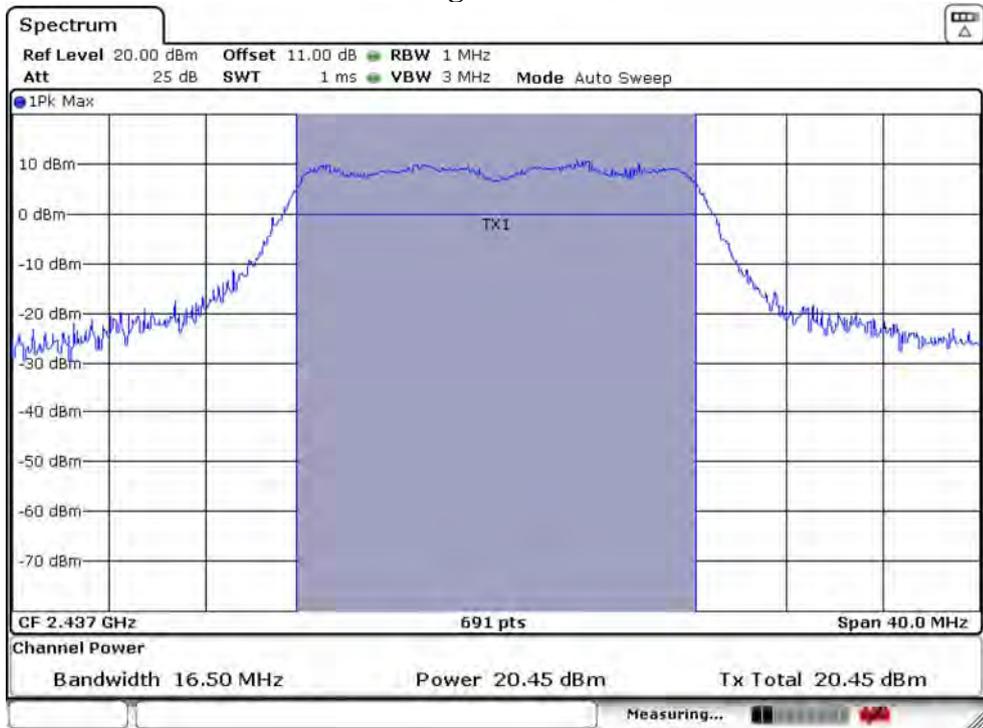


IEEE 802.11g 2462MHz_ANT 1

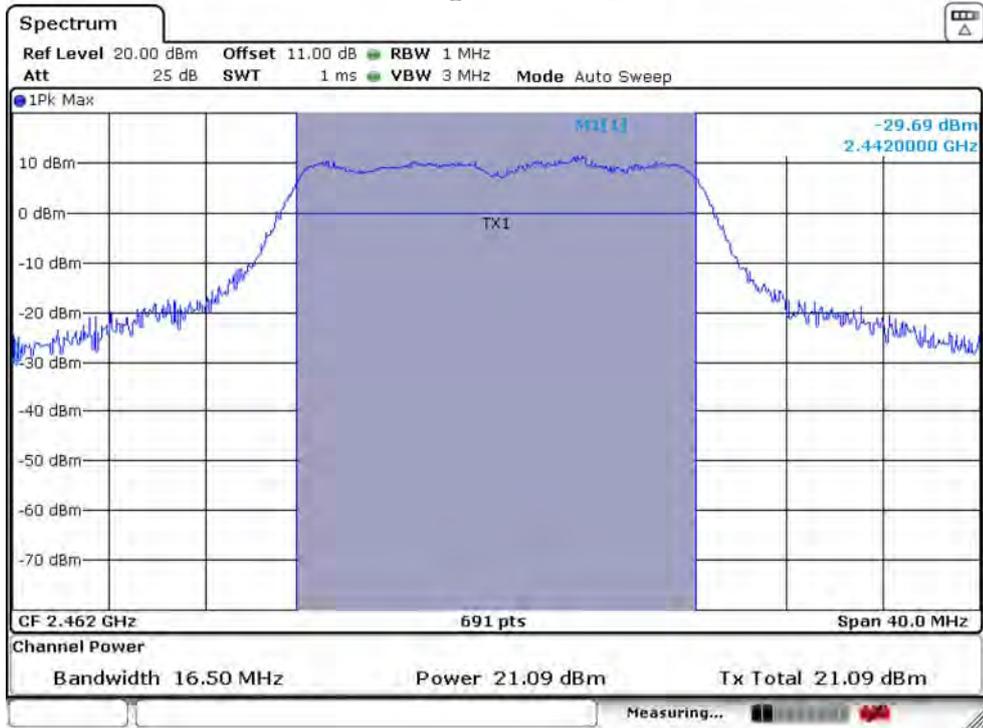


IEEE 802.11g 2462MHz_ANT 2

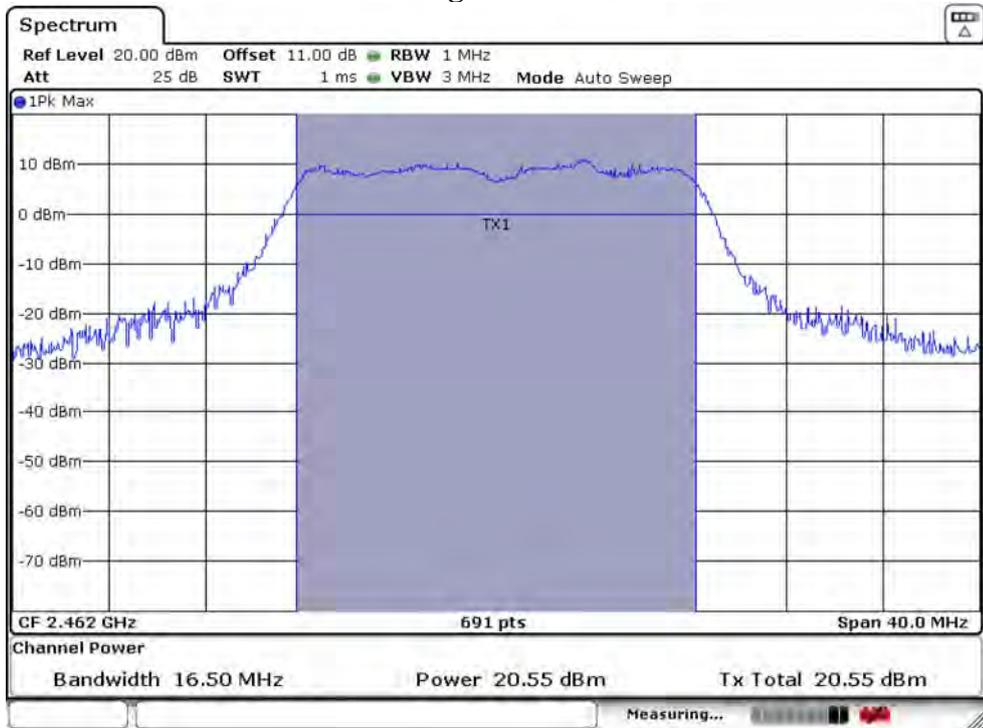


IEEE 802.11n HT20 2412MHz_ANT 1

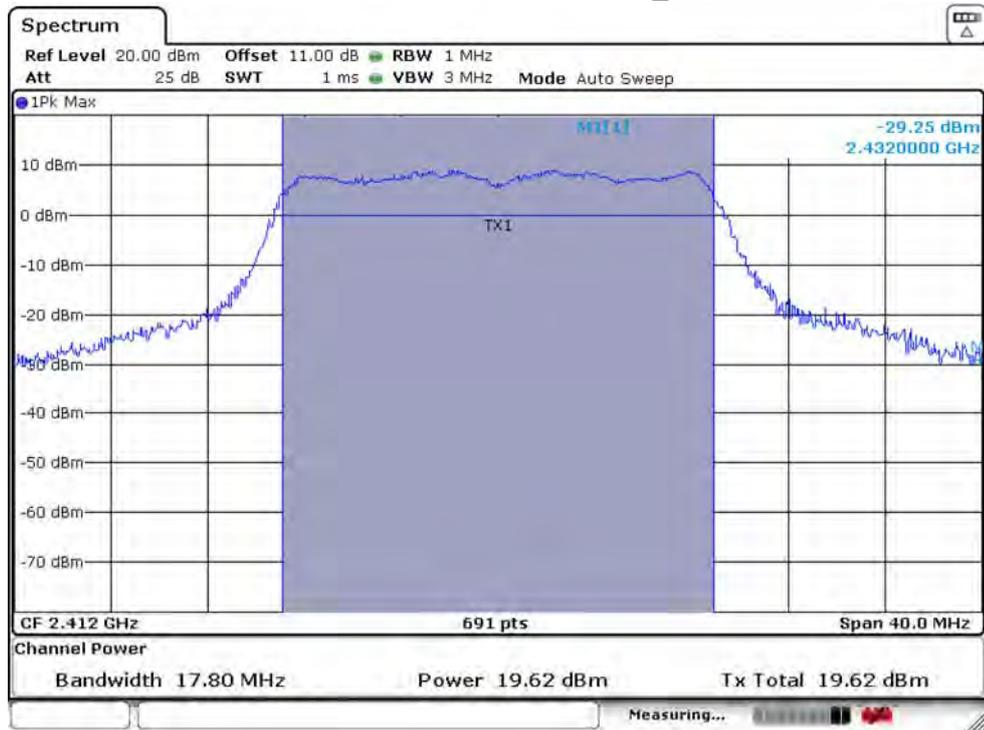


IEEE 802.11n HT20 2412MHz_ANT 2

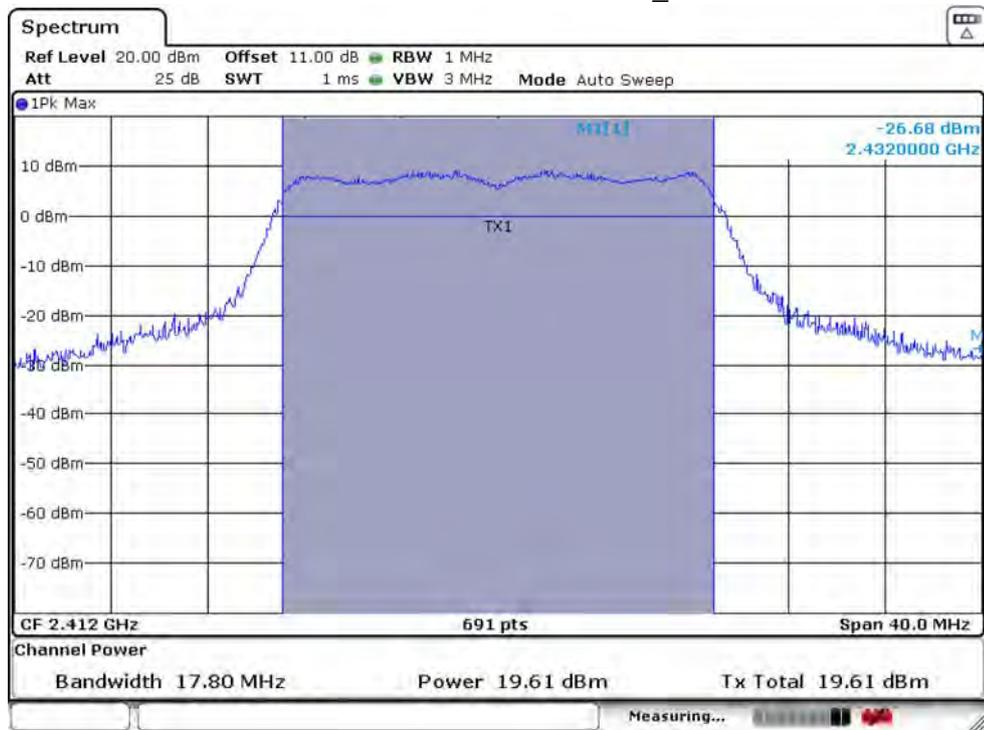


IEEE 802.11n HT20 2437MHz_ANT 1

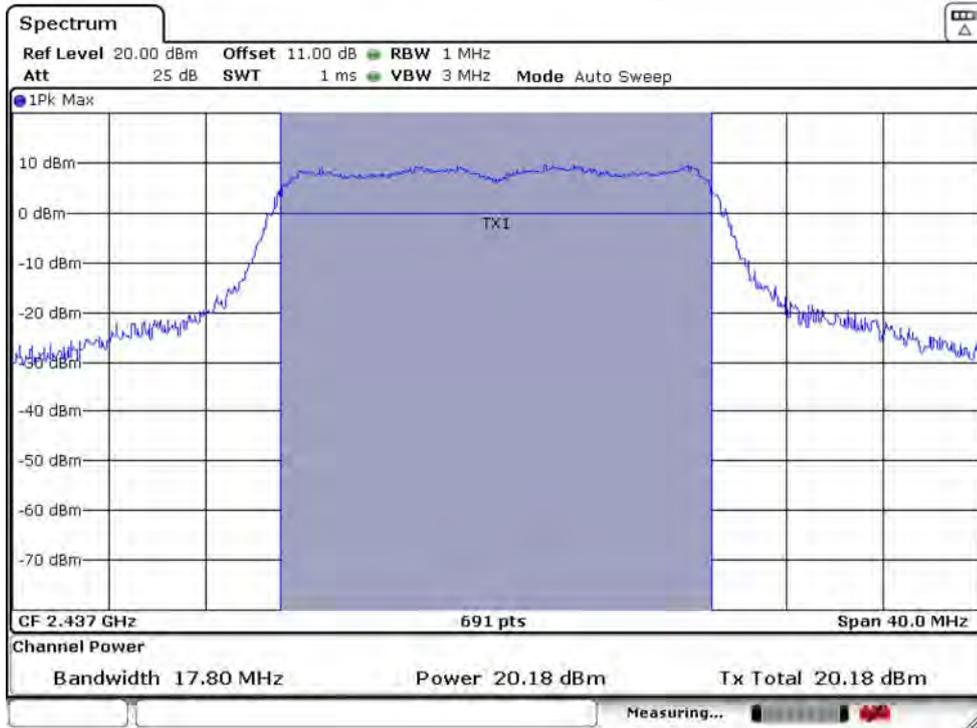


IEEE 802.11n HT20 2437MHz_ANT 2

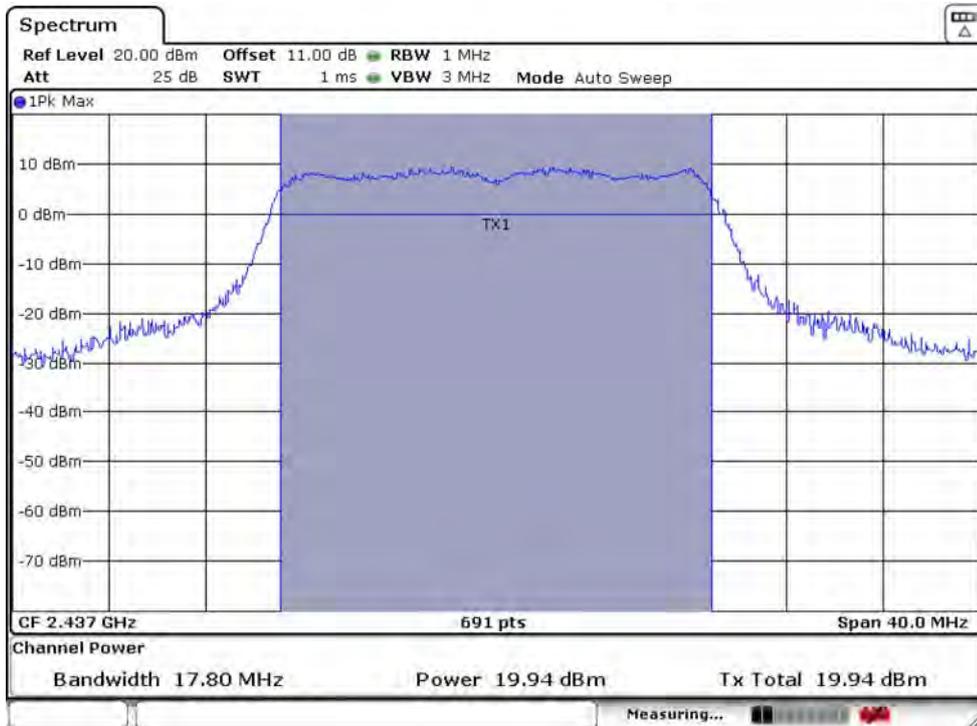


IEEE 802.11n HT20 2462MHz_ANT 1

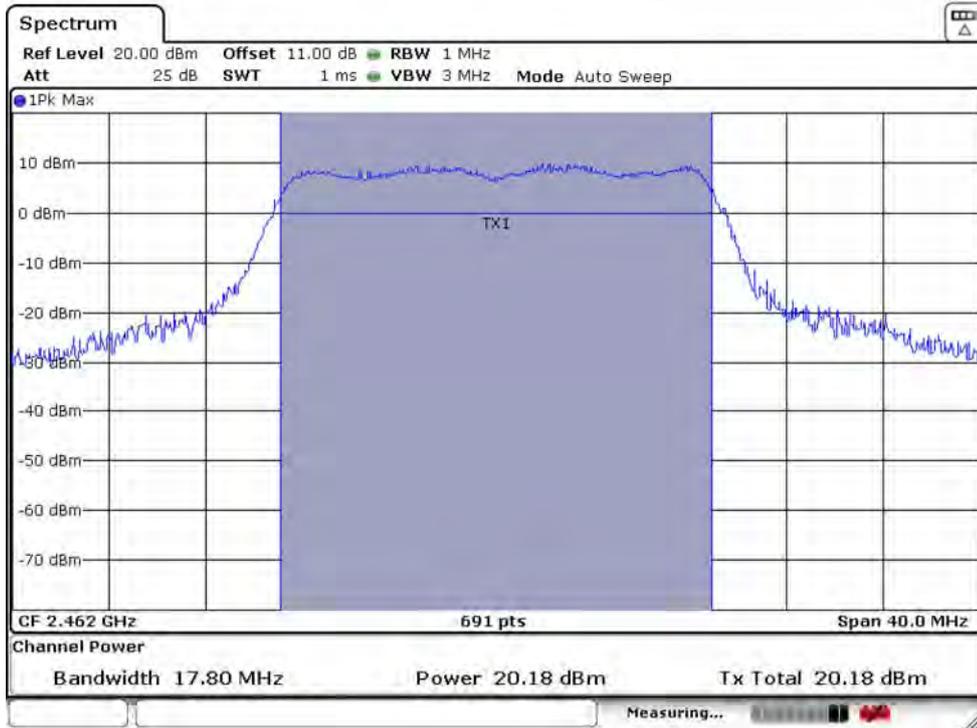


IEEE 802.11n HT20 2462MHz_ANT 2

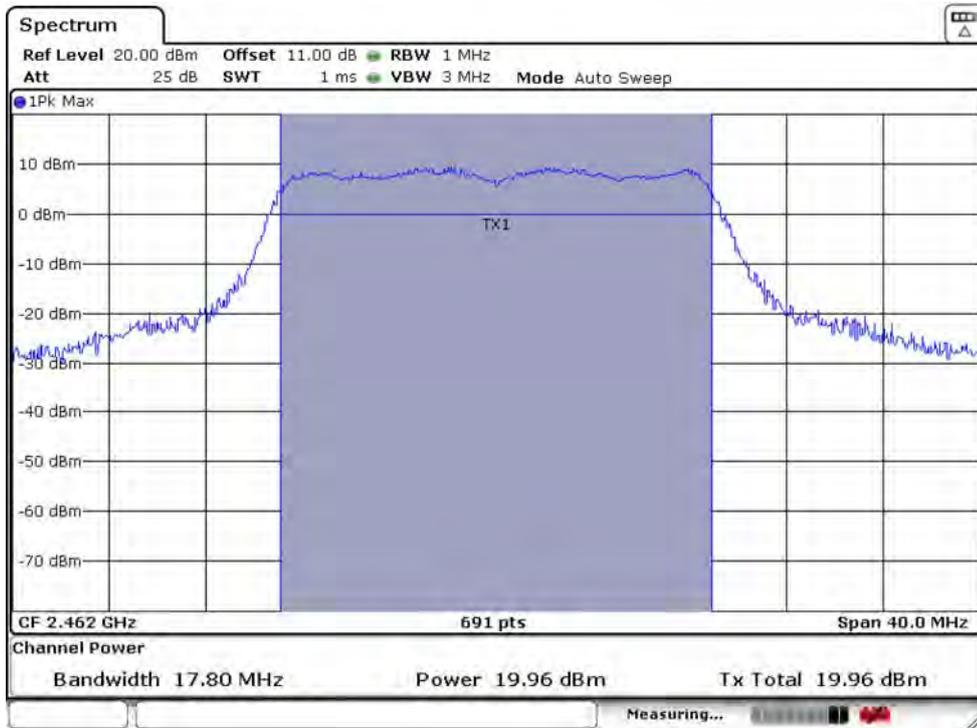


IEEE 802.11n HT40 2422MHz_ANT 1

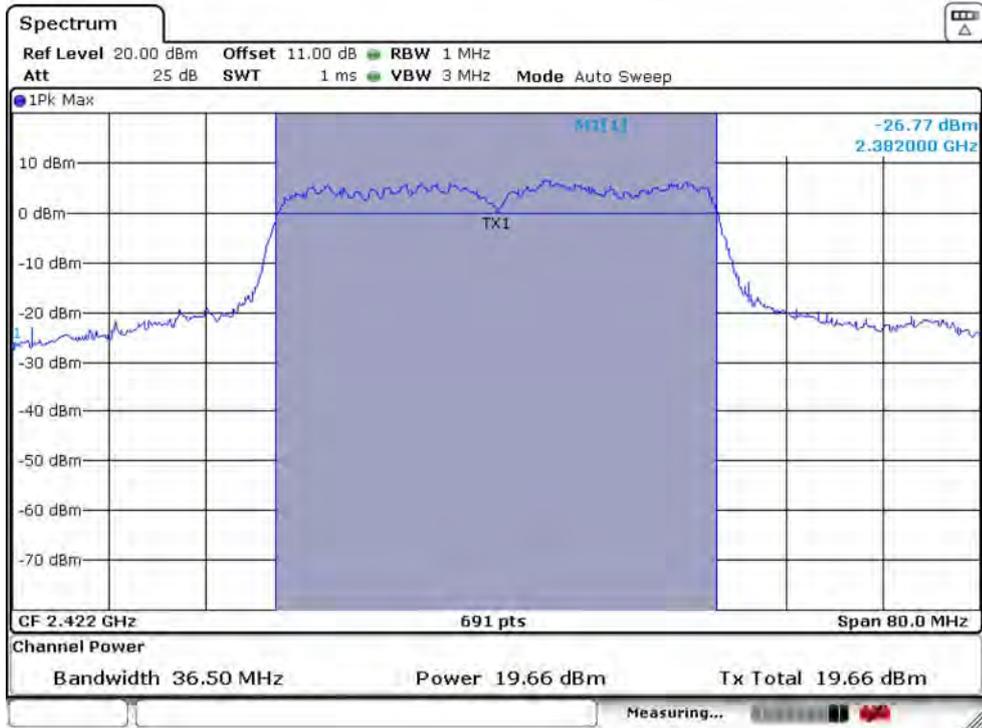


IEEE 802.11n HT40 2422MHz_ANT 2

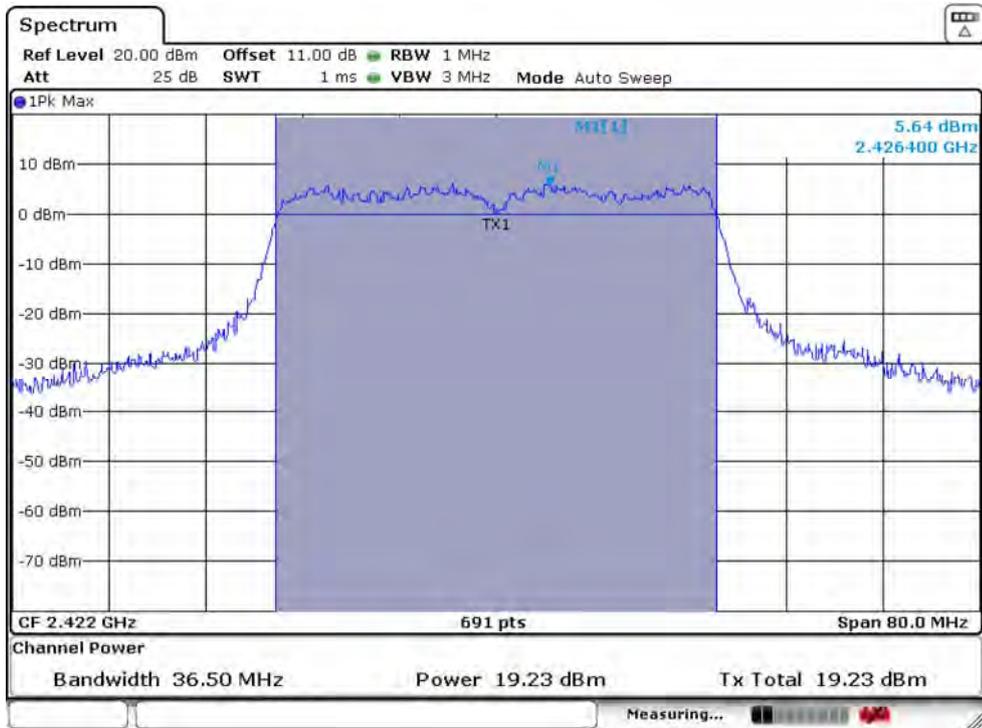


IEEE 802.11n HT40 2437MHz_ANT 1

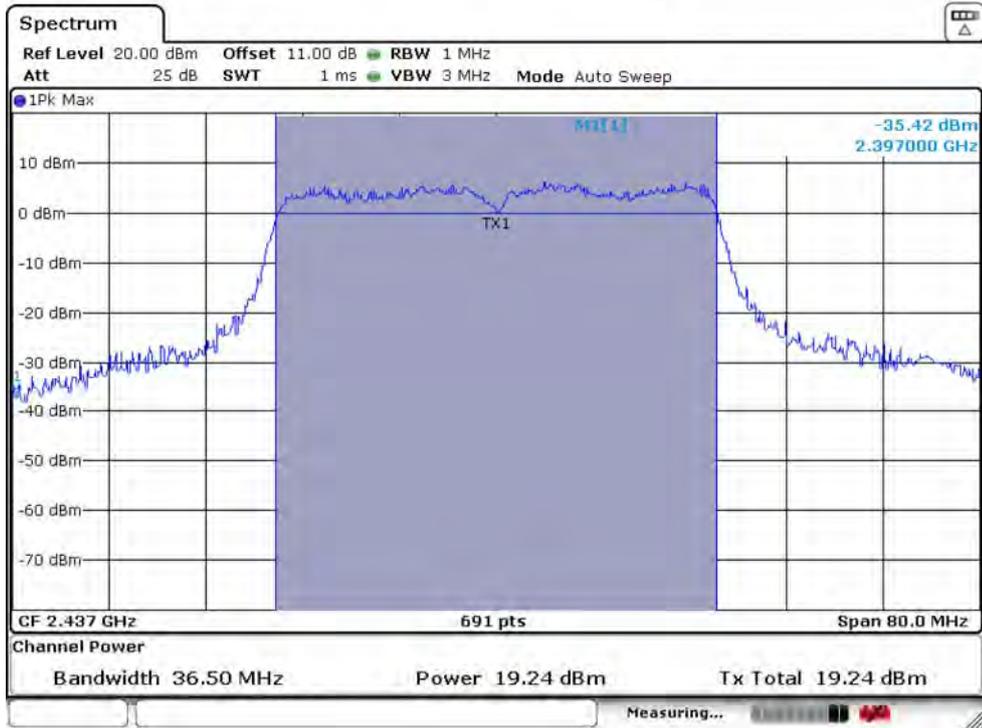


IEEE 802.11n HT40 2437MHz_ANT 2

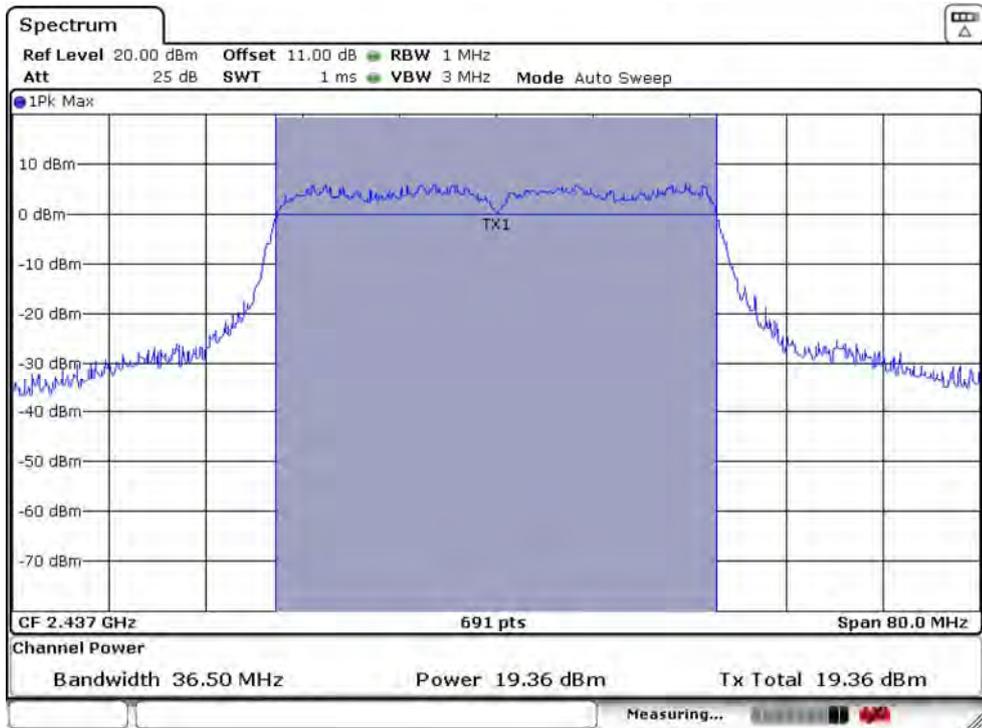


IEEE 802.11n HT40 2452MHz_ANT 1

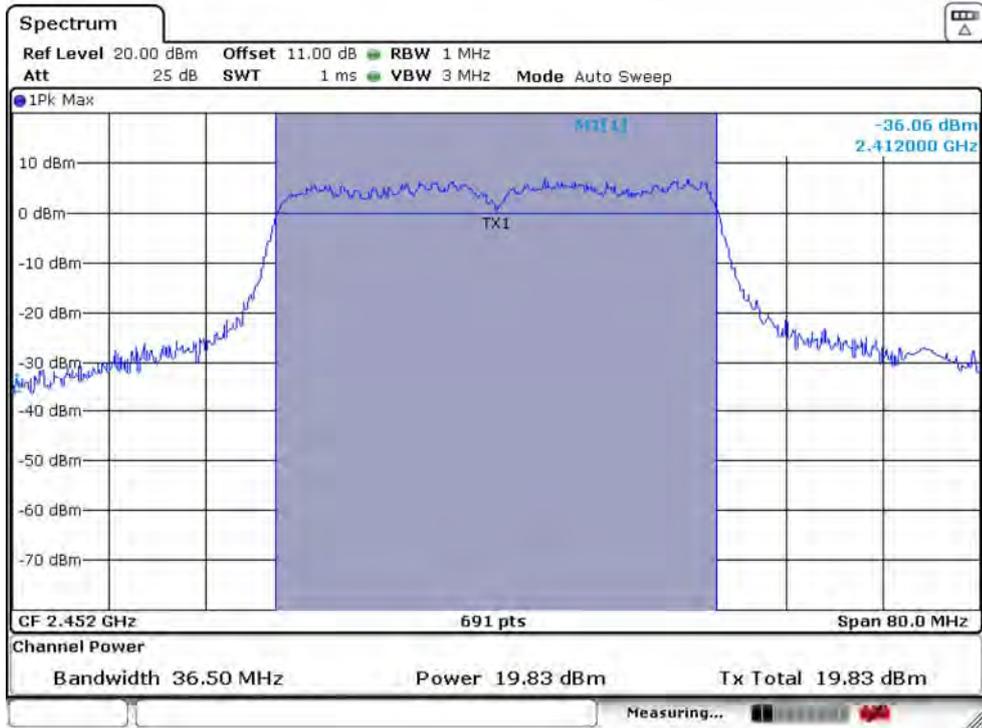


IEEE 802.11n HT40 2452MHz_ANT 2

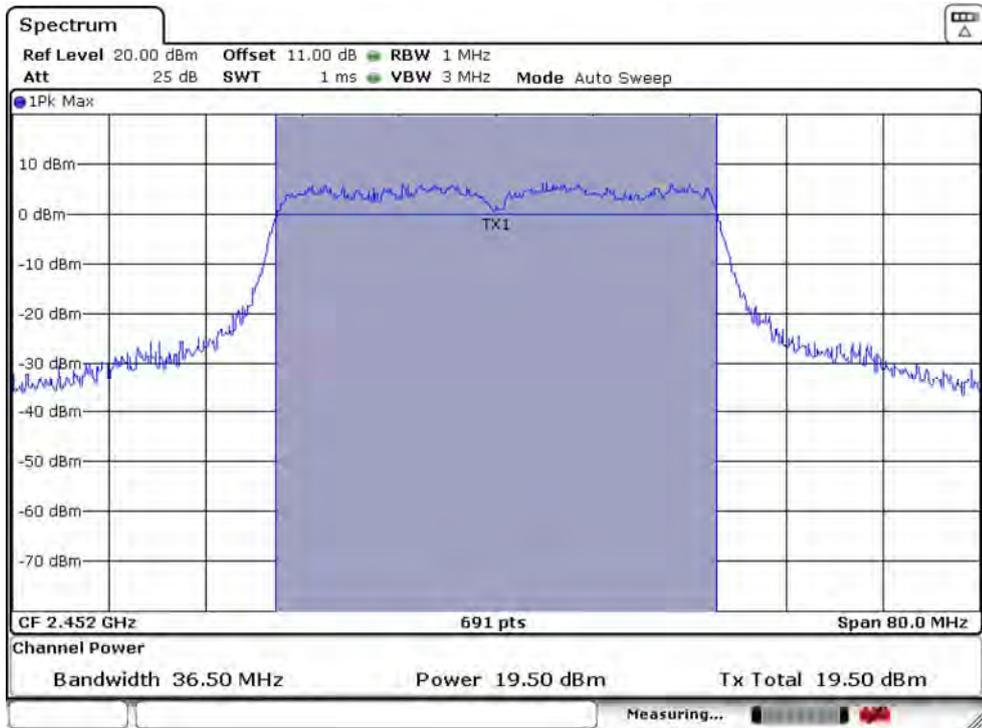


IEEE 802.11ax HE20 2412MHz_ANT 1

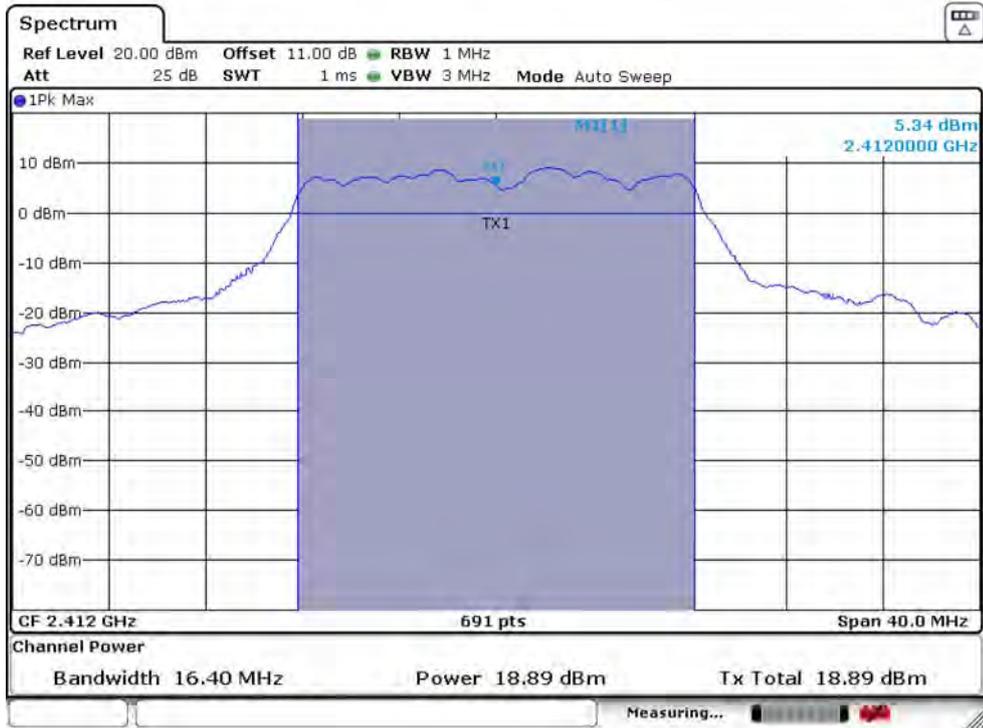


IEEE 802.11ax HE20 2412MHz_ANT 2

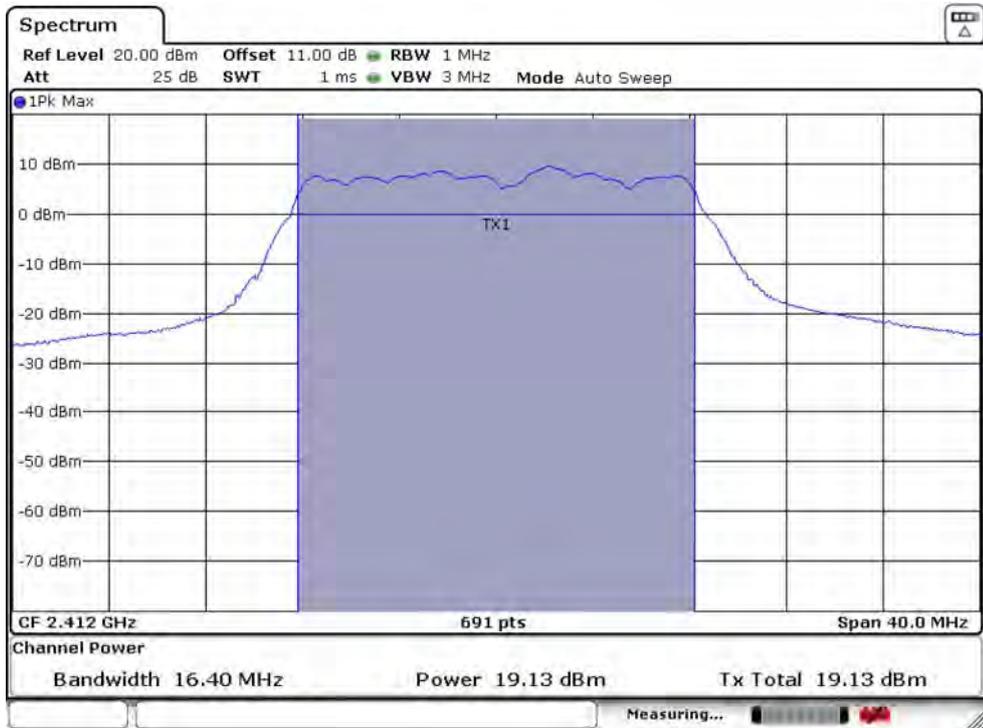


IEEE 802.11ax HE20 2437MHz_ANT 1

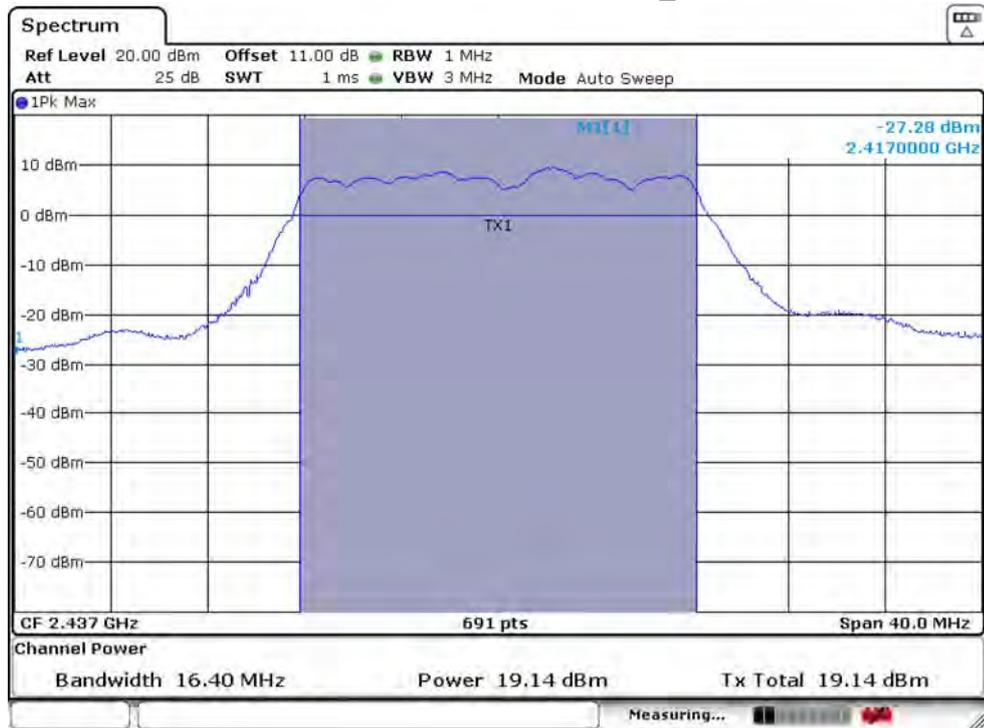


IEEE 802.11ax HE20 2437MHz_ANT 2

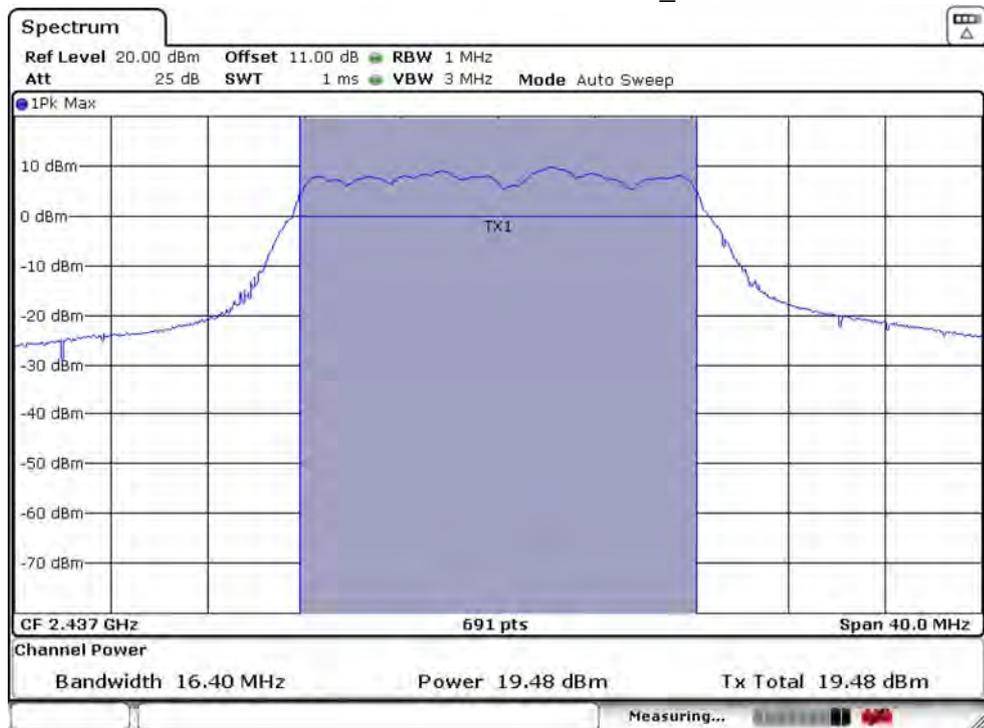


IEEE 802.11ax HE20 2462MHz_ANT 1

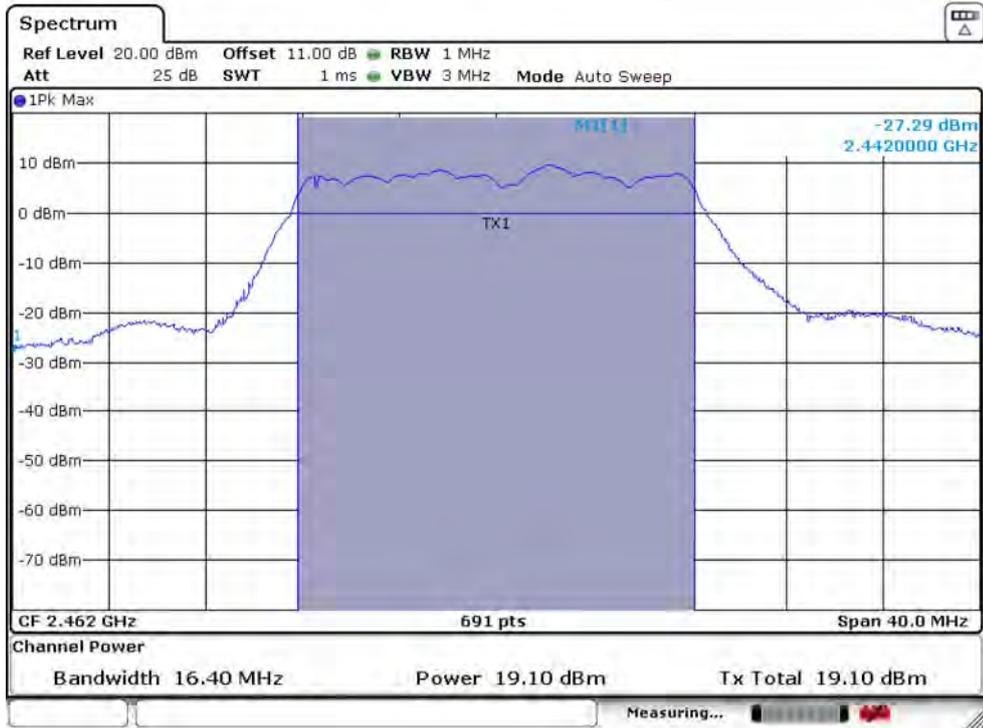


IEEE 802.11ax HE20 2462MHz_ANT 2

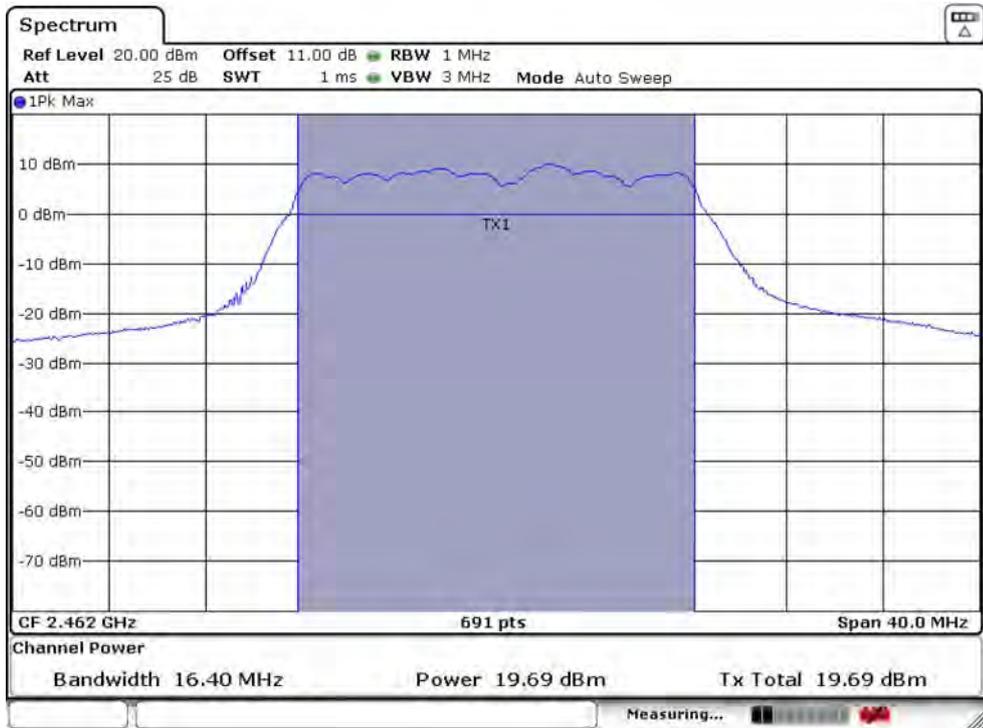


IEEE 802.11ax HE40 2422MHz_ANT 1

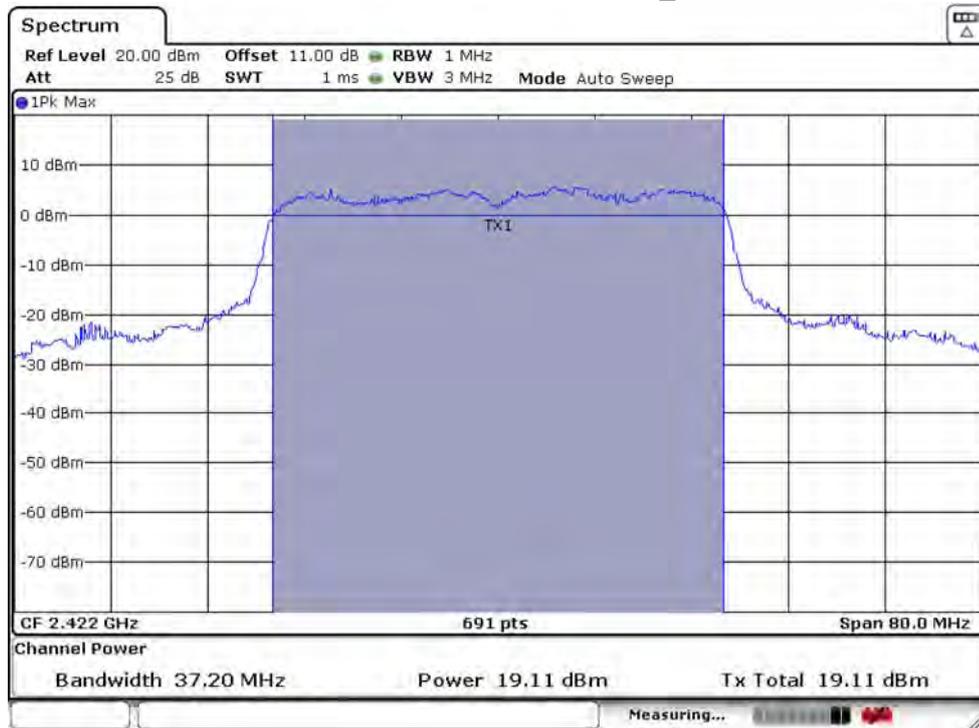


IEEE 802.11ax HE40 2422MHz_ANT 2

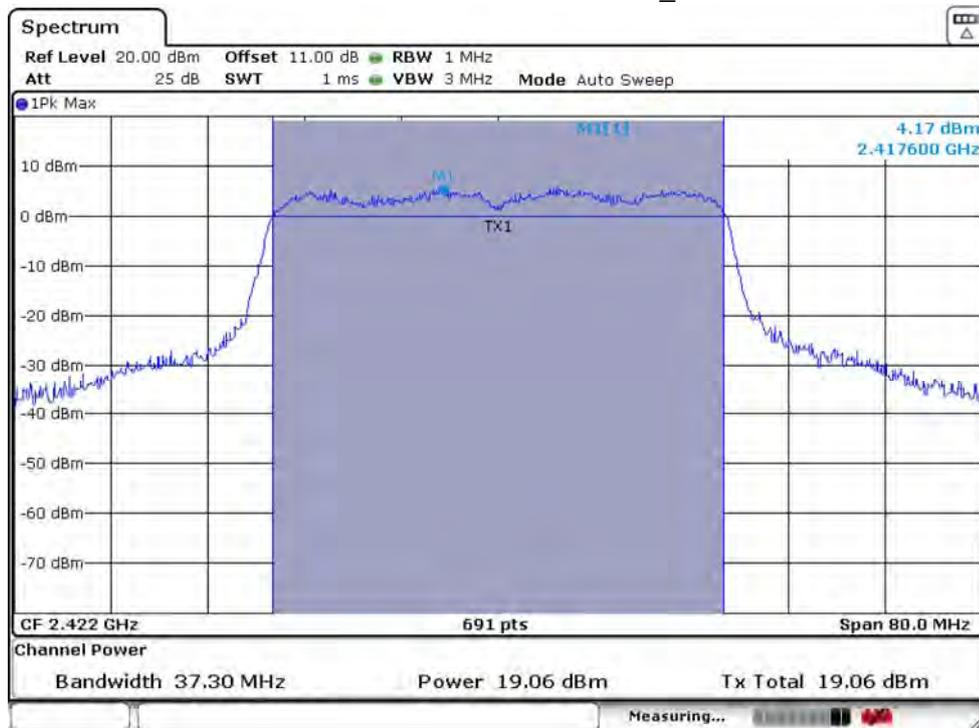


IEEE 802.11ax HE40 2437MHz_ANT 1

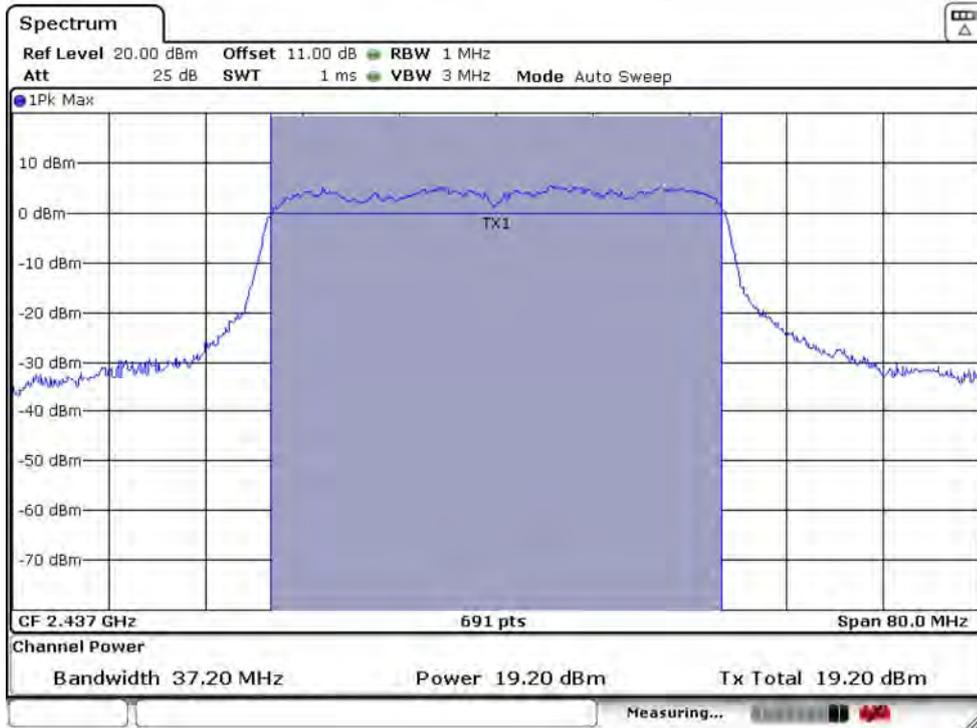


IEEE 802.11ax HE40 2437MHz_ANT 2

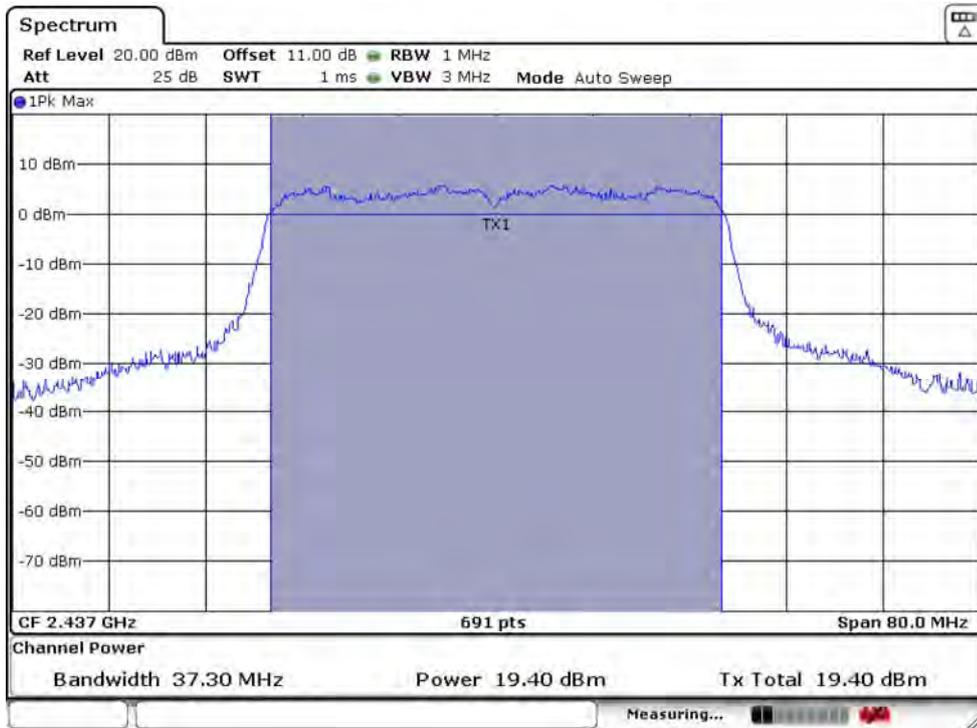

IEEE 802.11ax HE40 2452MHz_ANT 1

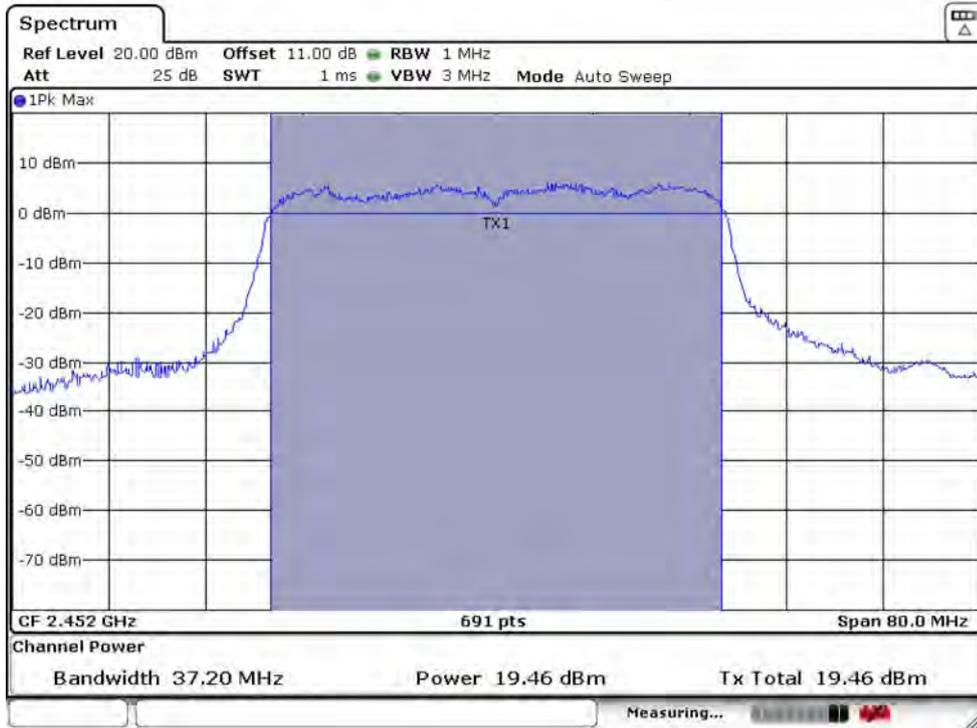

IEEE 802.11ax HE40 2452MHz_ANT 2

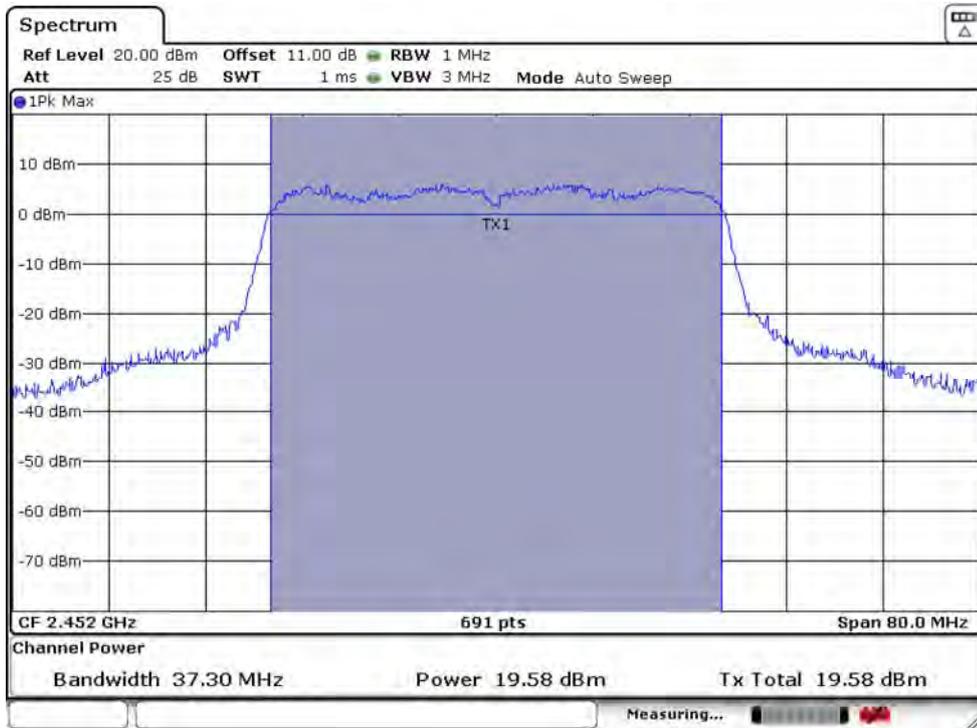


9. POWER SPECTRAL DENSITY

9.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2. Test Setup

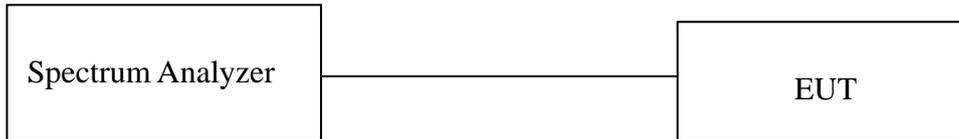

9.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	3KHz
VBW	10KHz
Span	30MHz(20MHz Bandwidth mode)/60MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


9.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 5.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.


9.5. Test Result

Temperature	23.6°C	Relative Humidity		56%	Test Voltage	AC 120V/60Hz
Mode	Freq (MHz)	Power Density (dBm/3KHz)		Total Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
		ANT 1	ANT 2			
IEEE 802.11b	2412	1.23	1.88	/	7.87	PASS
	2437	1.46	1.96	/	7.87	PASS
	2462	1.29	2.44	/	7.87	PASS
IEEE 802.11g	2412	-12.47	-12.26	/	7.87	PASS
	2437	-12.76	-11.89	/	7.87	PASS
	2462	-12.49	-12.36	/	7.87	PASS
IEEE 802.11n HT20	2412	-13.37	-12.58	-9.95	7.87	PASS
	2437	-13.50	-13.07	-10.27	7.87	PASS
	2462	-13.56	-11.68	-9.51	7.87	PASS
IEEE 802.11n HT40	2422	-16.00	-16.61	-13.28	7.87	PASS
	2437	-16.25	-15.79	-13.00	7.87	PASS
	2452	-15.59	-15.25	-12.41	7.87	PASS
IEEE 802.11ax HE20	2412	-3.59	-3.06	-0.31	7.87	PASS
	2437	-3.35	-2.75	-0.03	7.87	PASS
	2462	-3.53	-2.48	0.04	7.87	PASS
IEEE 802.11ax HE40	2422	-15.19	-13.84	-11.45	7.87	PASS
	2437	-14.78	-14.20	-11.47	7.87	PASS
	2452	-14.30	-13.84	-11.05	7.87	PASS


IEEE 802.11b 2412MHz_ANT 1

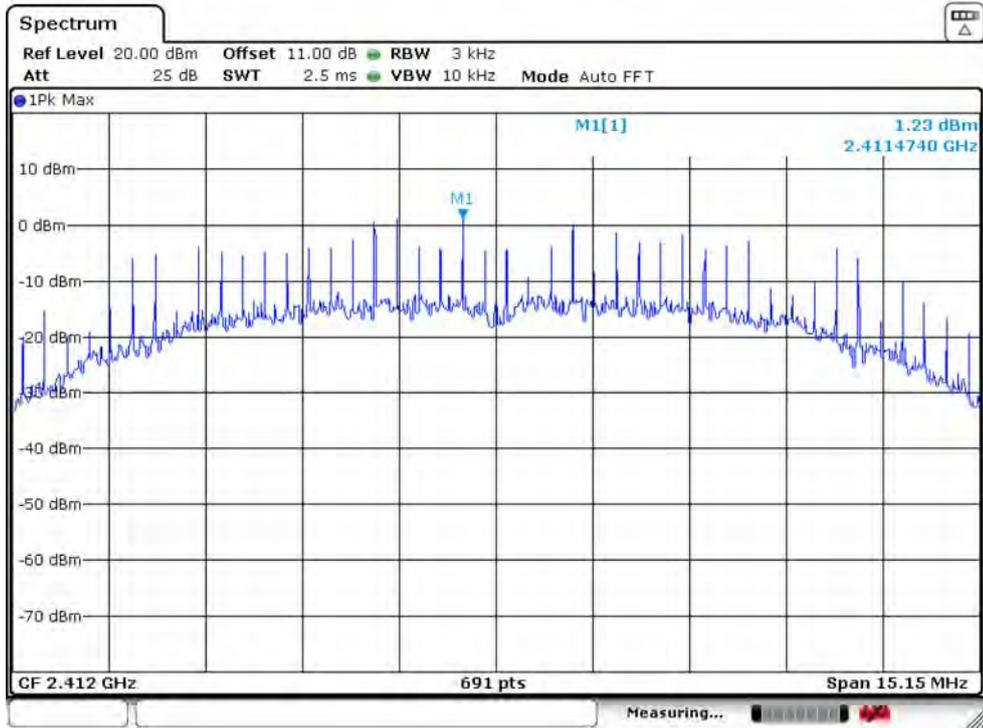


IEEE 802.11b 2412MHz_ANT 2

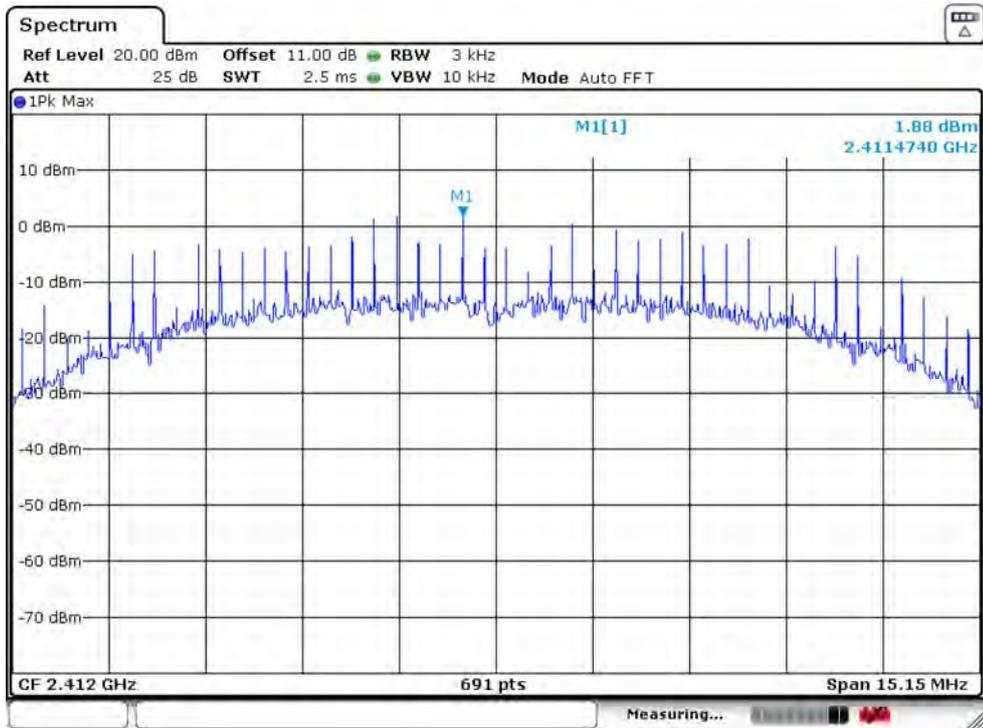


IEEE 802.11b 2437MHz_ANT 1

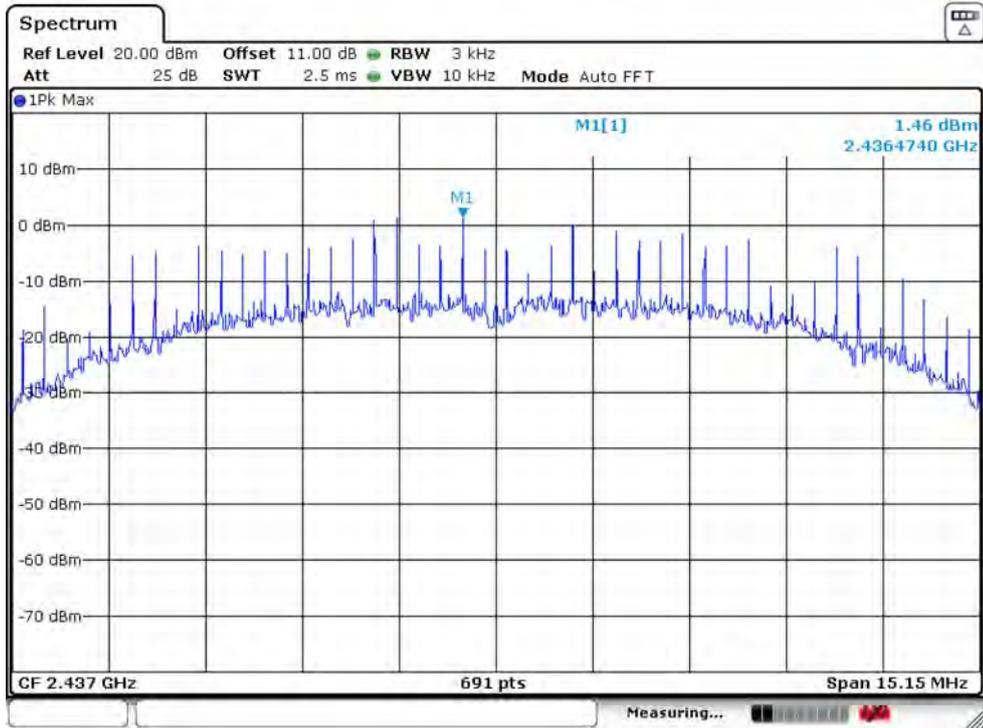


IEEE 802.11b 2437MHz_ANT 2

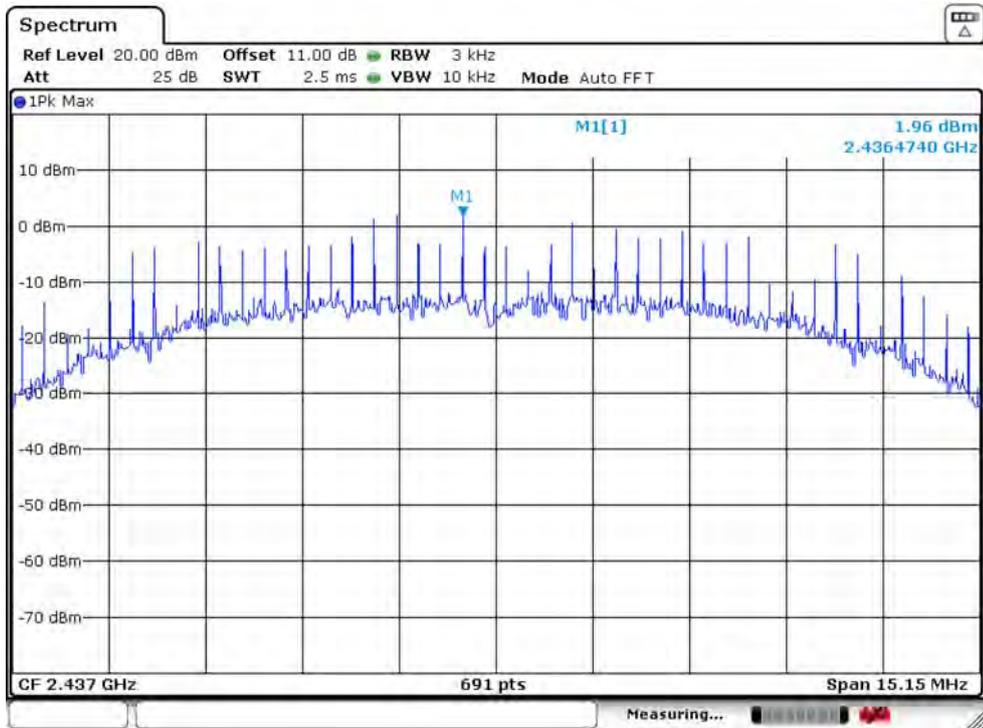


IEEE 802.11b 2462MHz_ANT 1

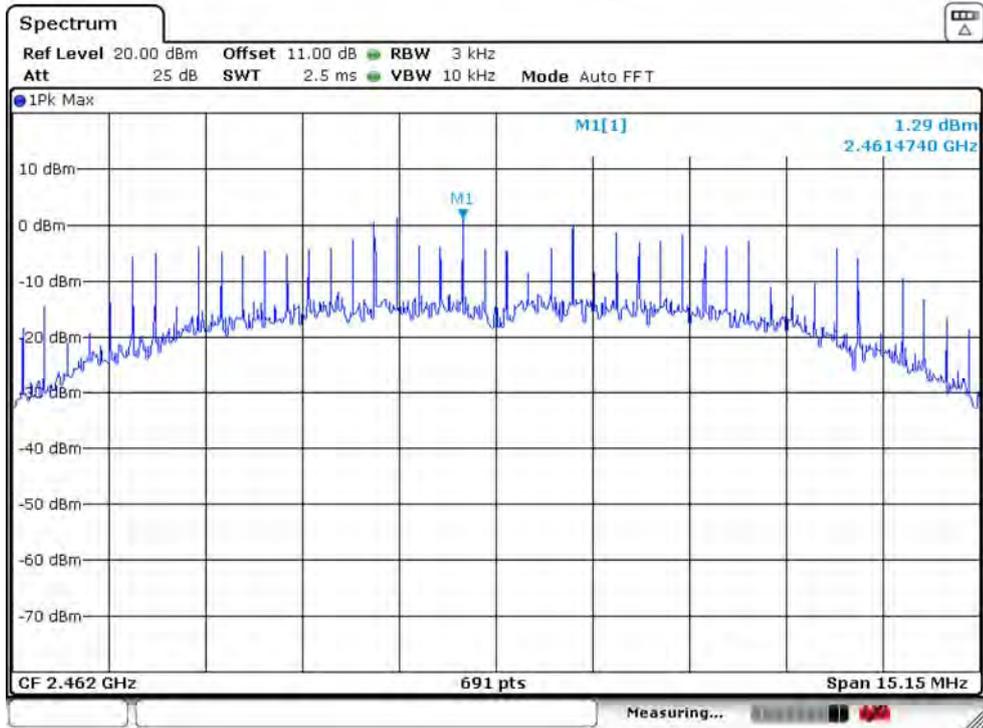


IEEE 802.11b 2462MHz_ANT 2

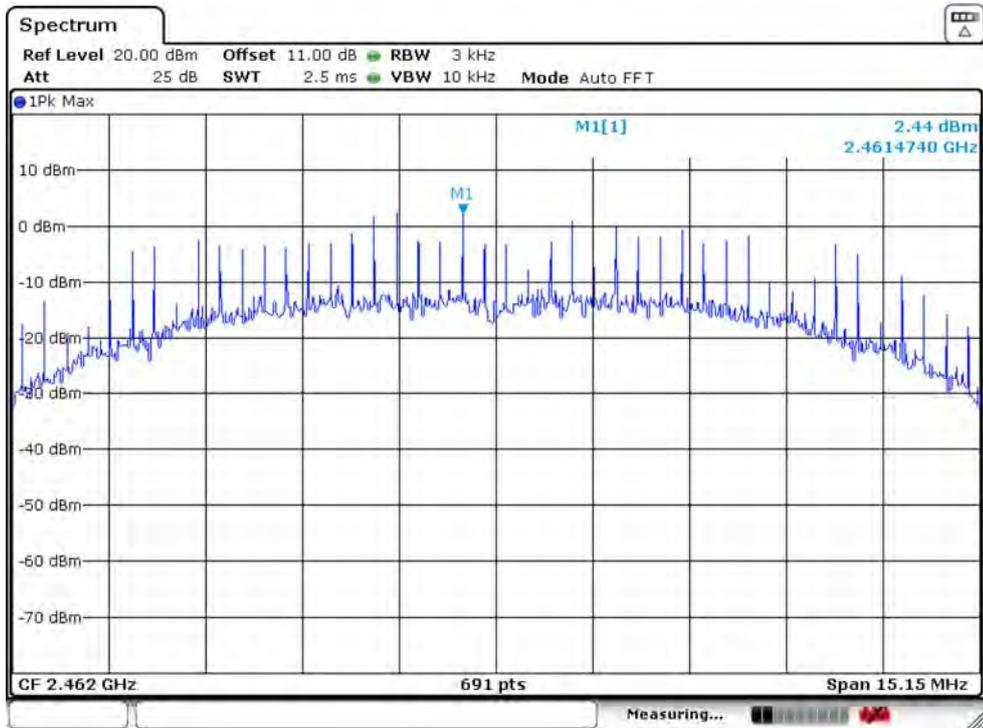


IEEE 802.11g 2412MHz_ANT 1

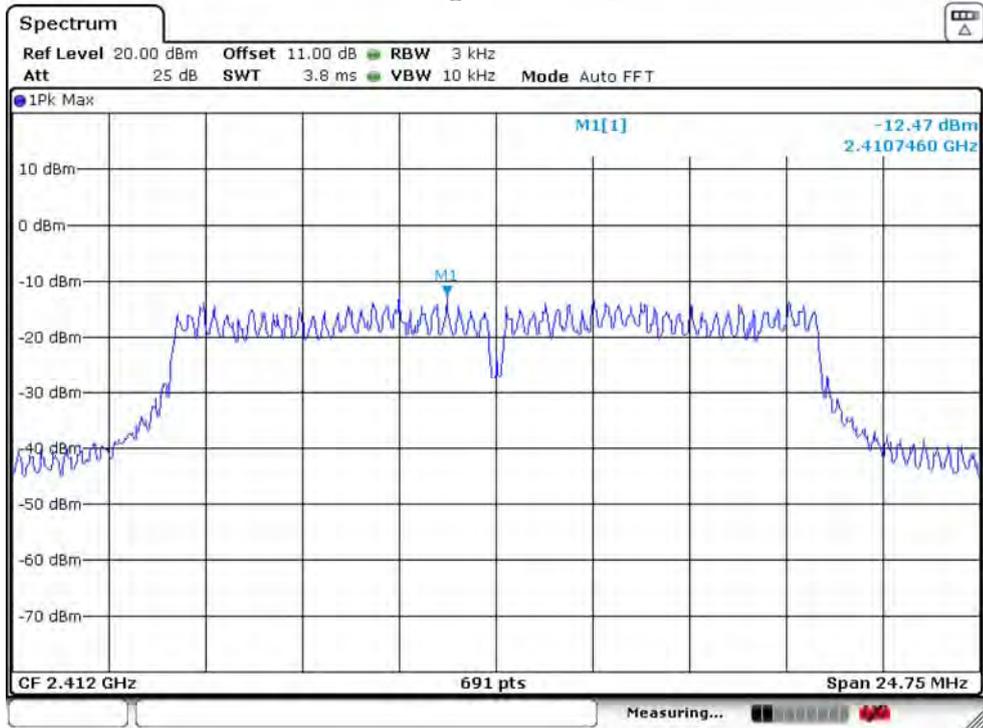


IEEE 802.11g 2412MHz_ANT 2

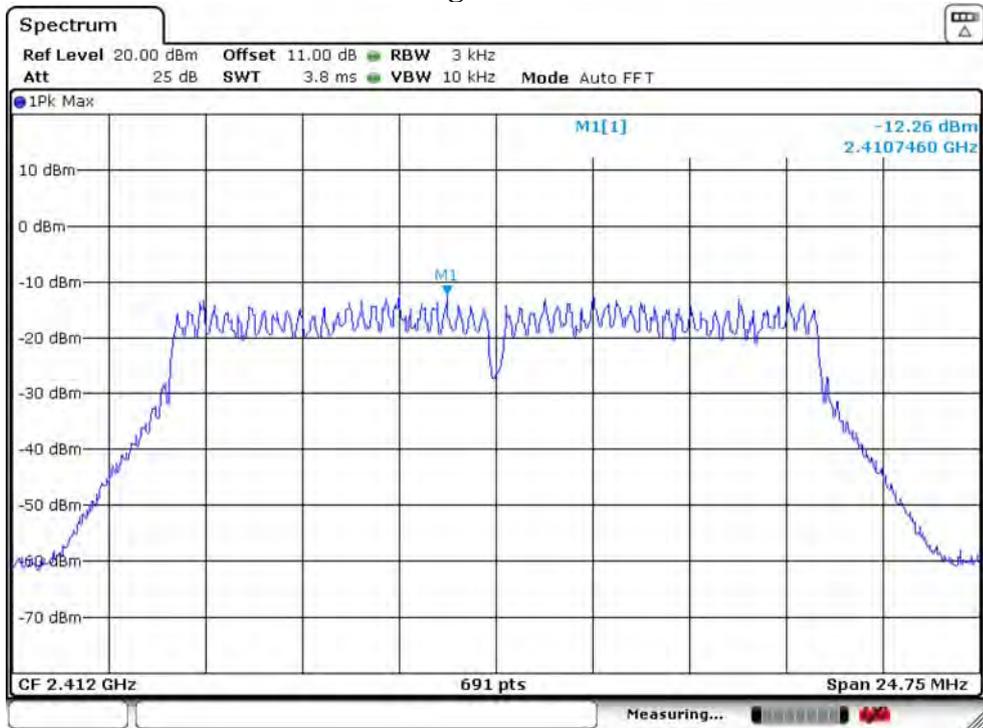


IEEE 802.11g 2437MHz_ANT 1

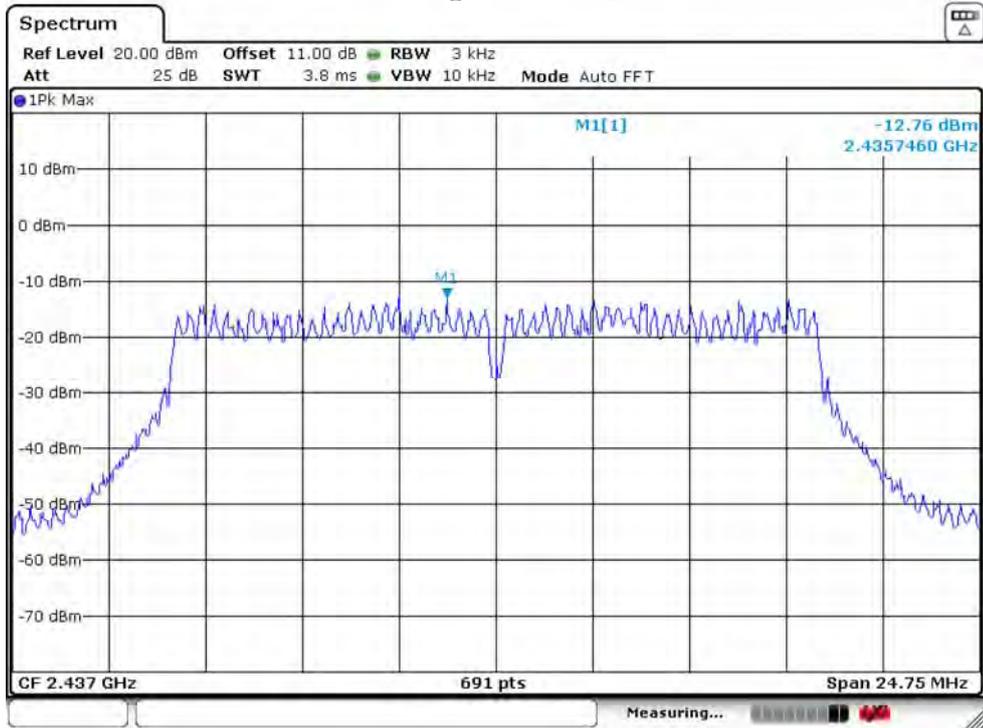


IEEE 802.11g 2437MHz_ANT 2

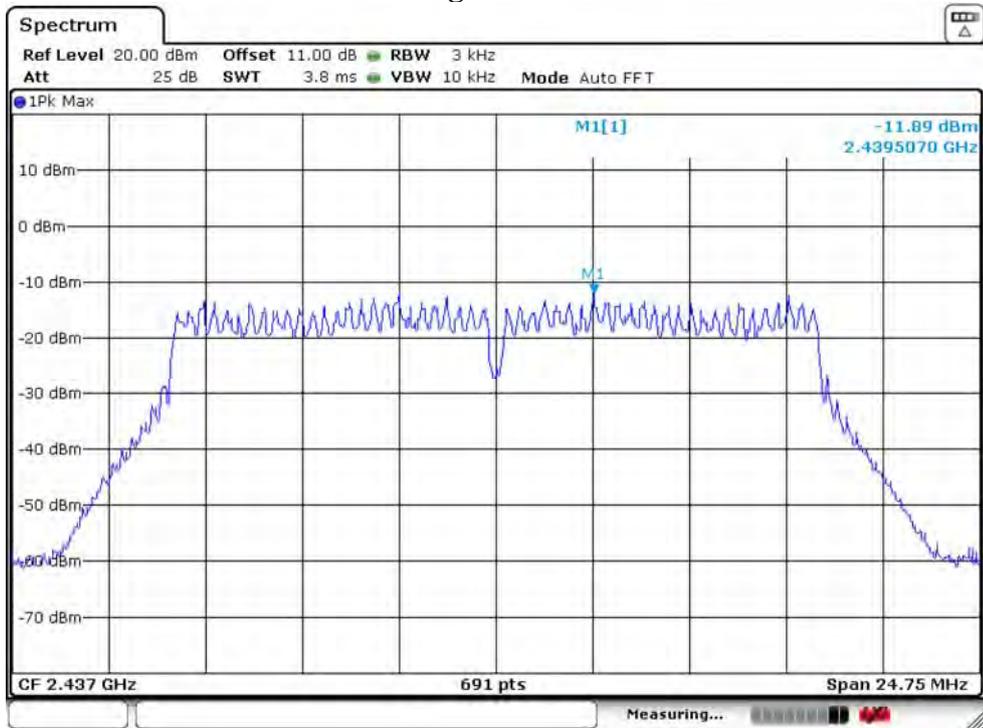


IEEE 802.11g 2462MHz_ANT 1

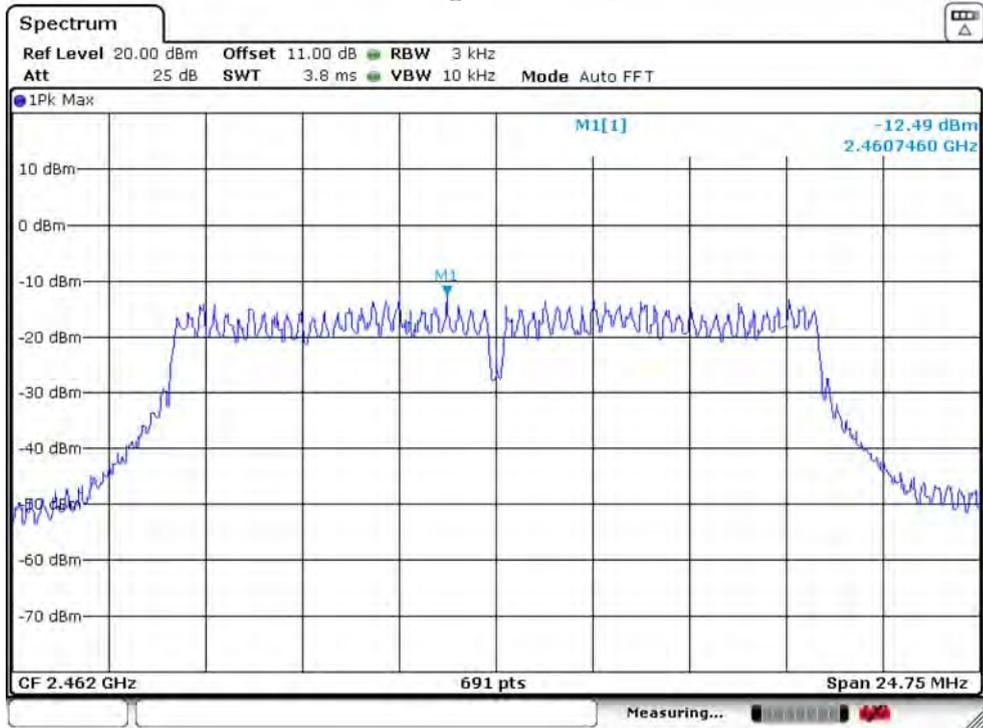


IEEE 802.11g 2462MHz_ANT 2

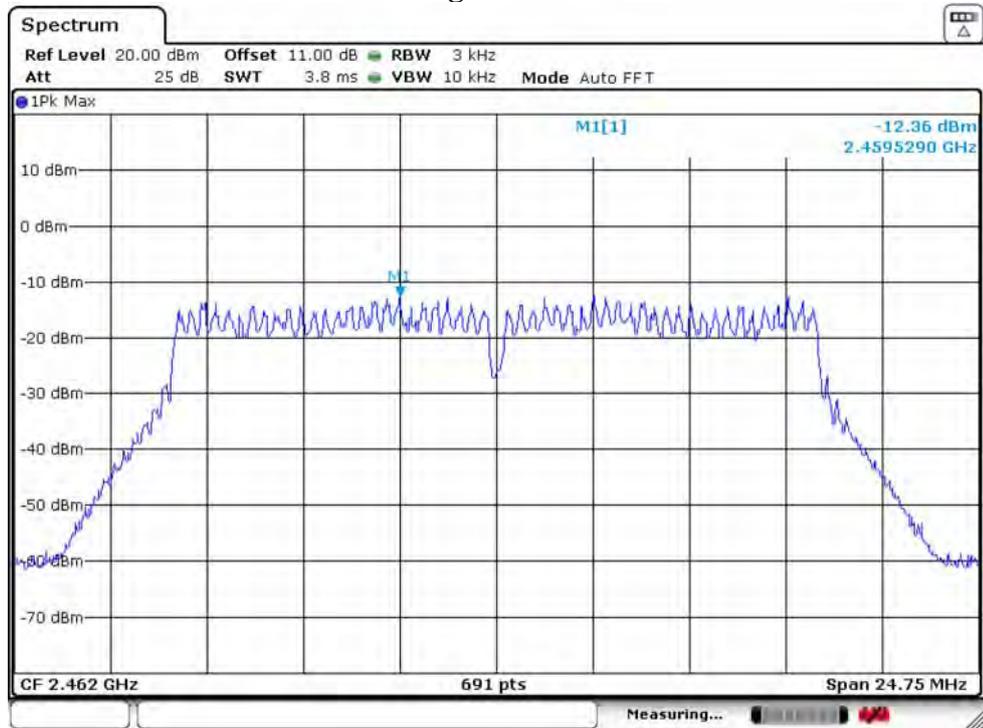


IEEE 802.11n HT20 2412MHz_ANT 1

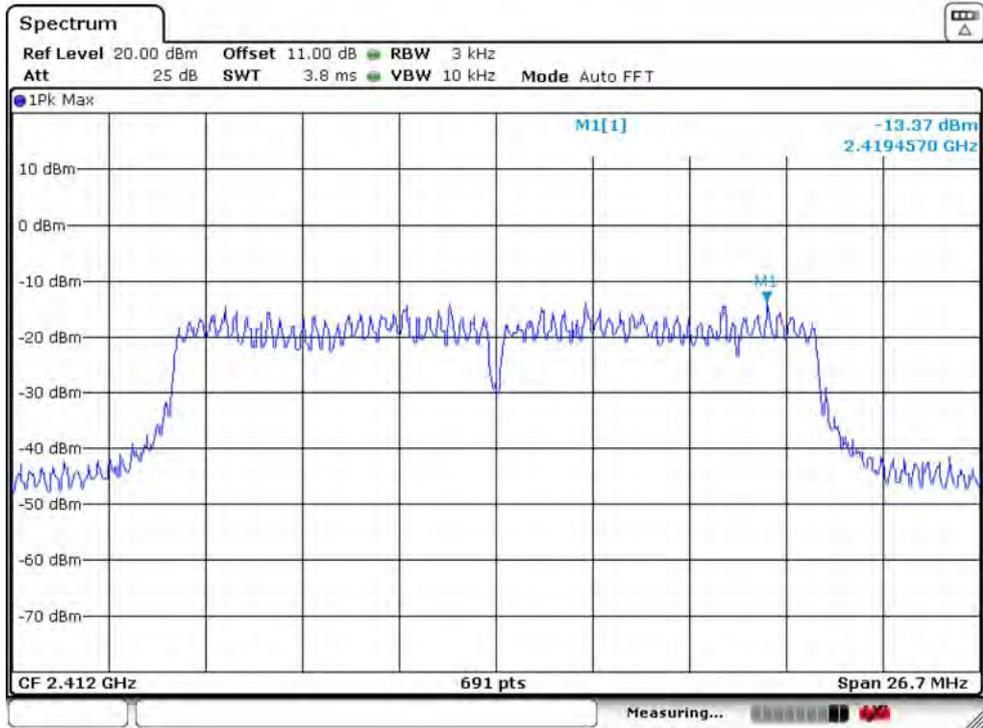


IEEE 802.11n HT20 2412MHz_ANT 2

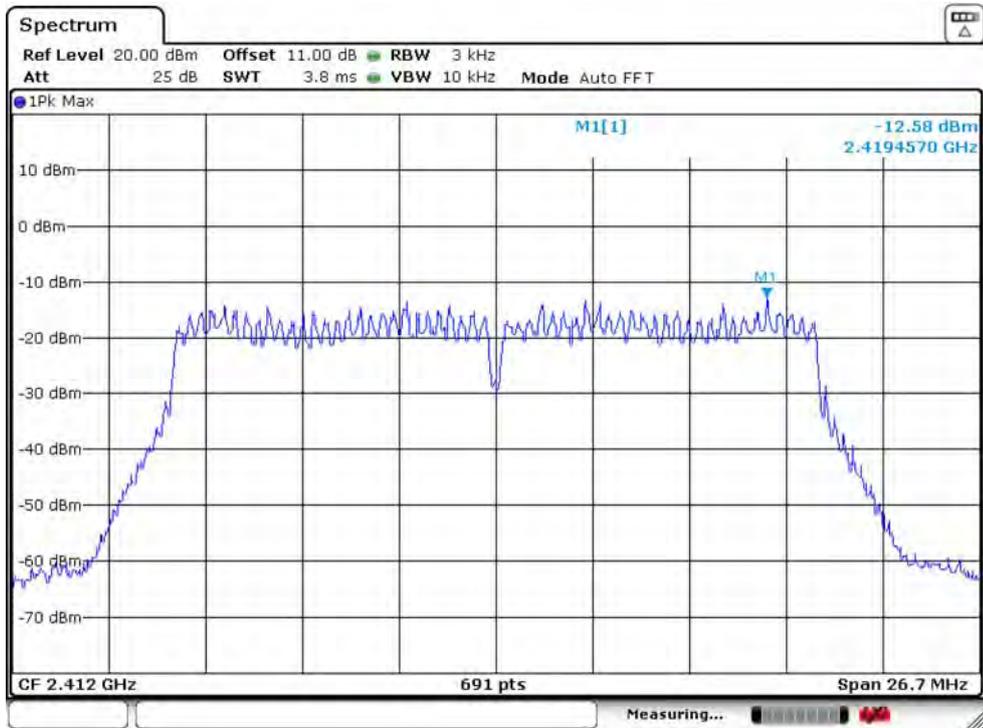


IEEE 802.11n HT20 2437MHz_ANT 1

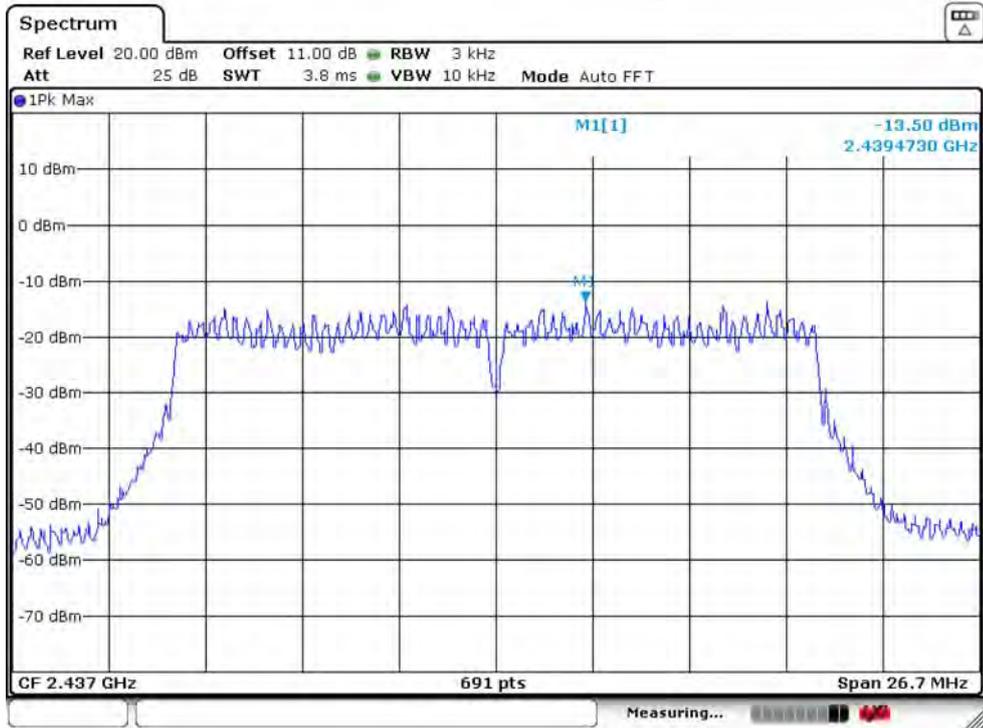


IEEE 802.11n HT20 2437MHz_ANT 2

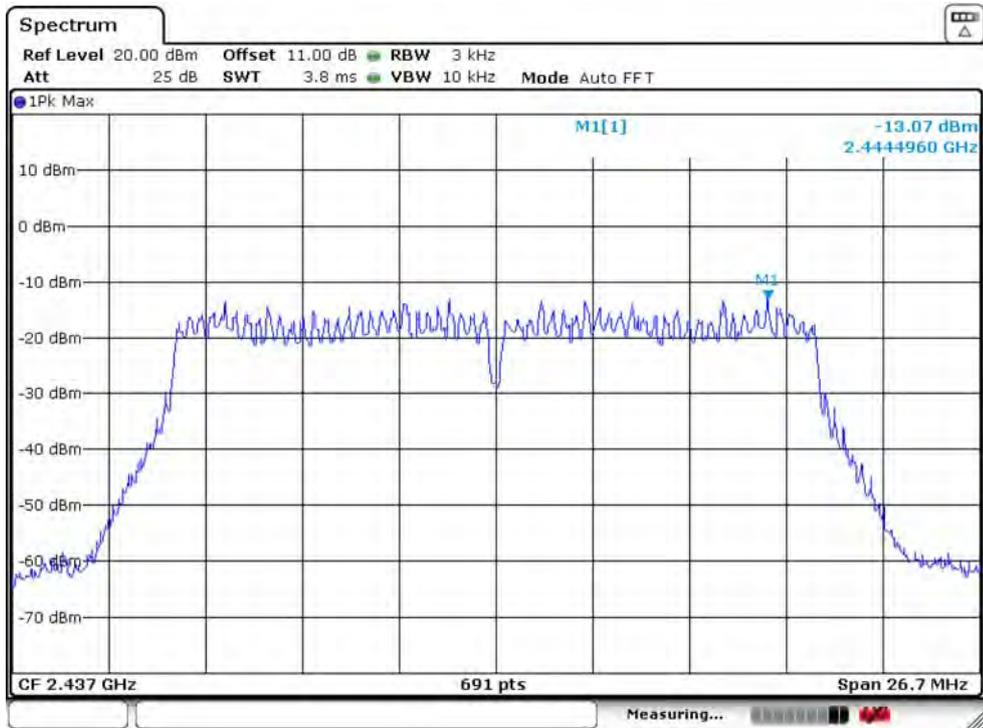


IEEE 802.11n HT20 2462MHz_ANT 1

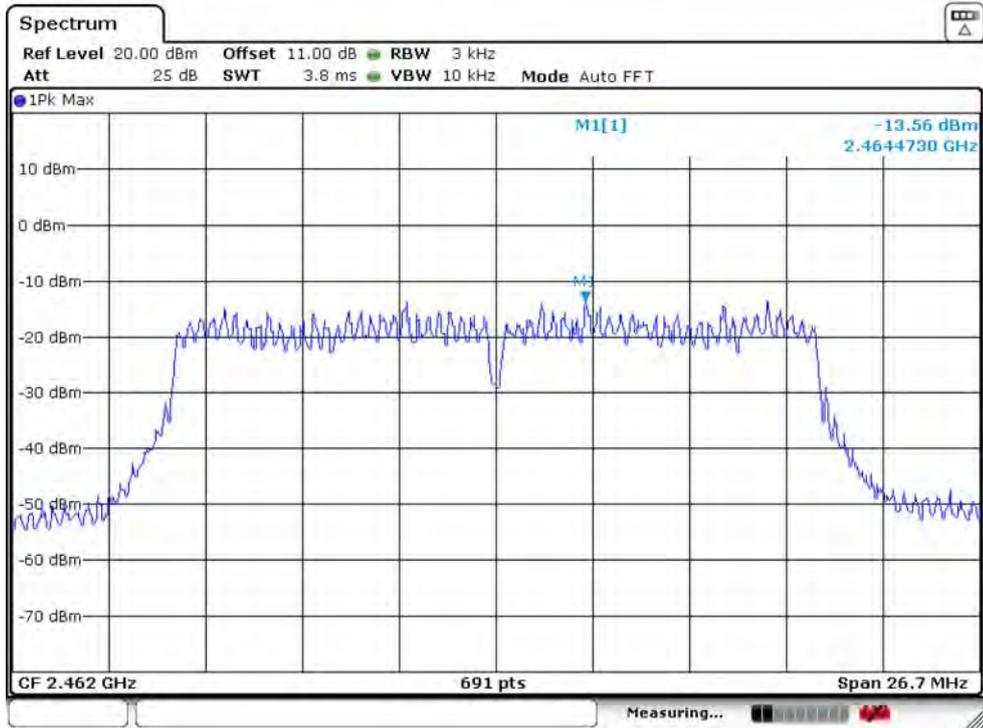


IEEE 802.11n HT20 2462MHz_ANT 2

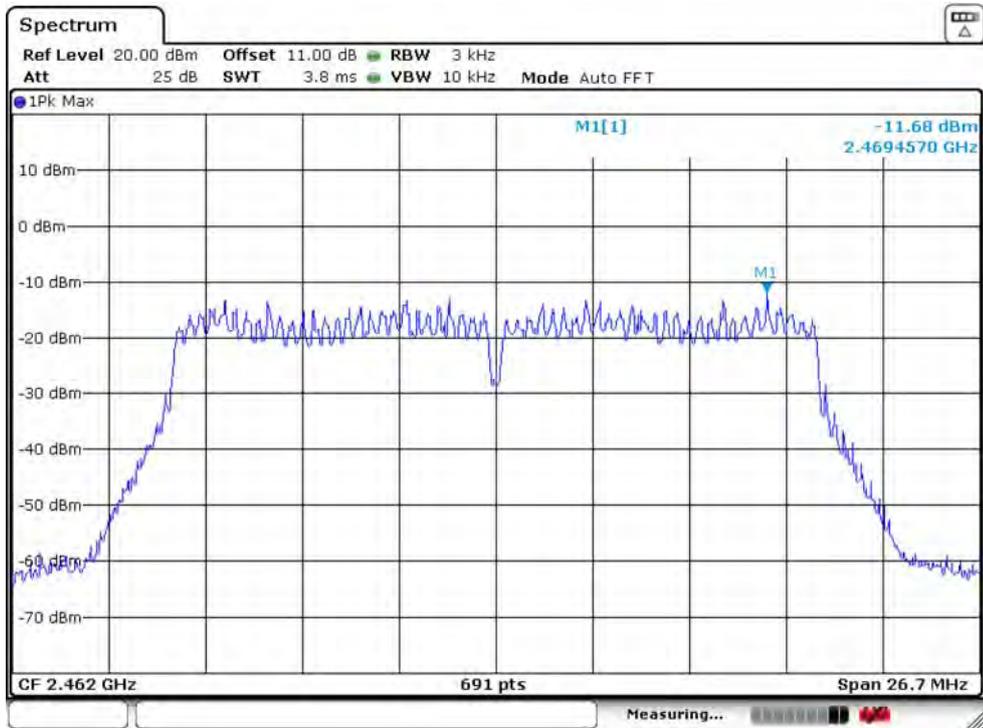


IEEE 802.11n HT40 2422MHz_ANT 1

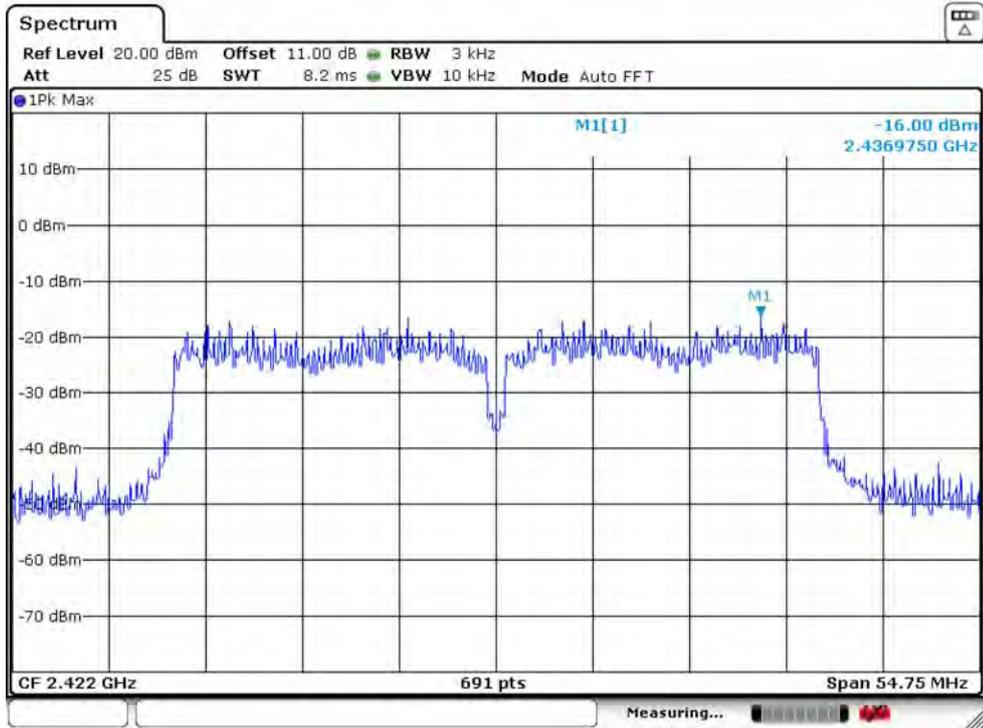


IEEE 802.11n HT40 2422MHz_ANT 2

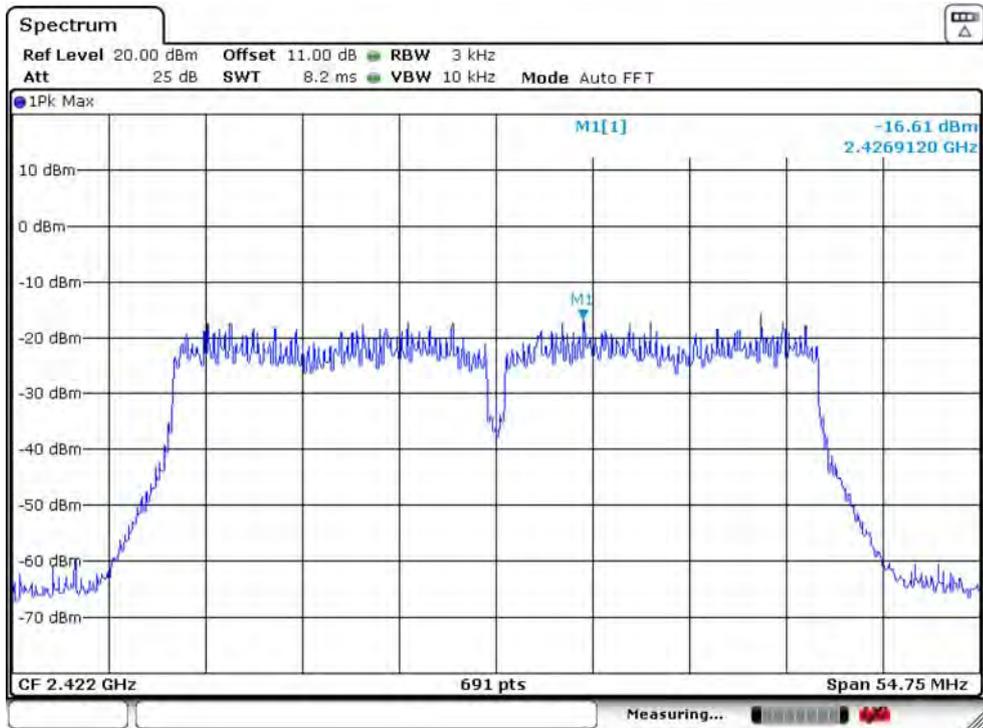


IEEE 802.11n HT40 2437MHz_ANT 1

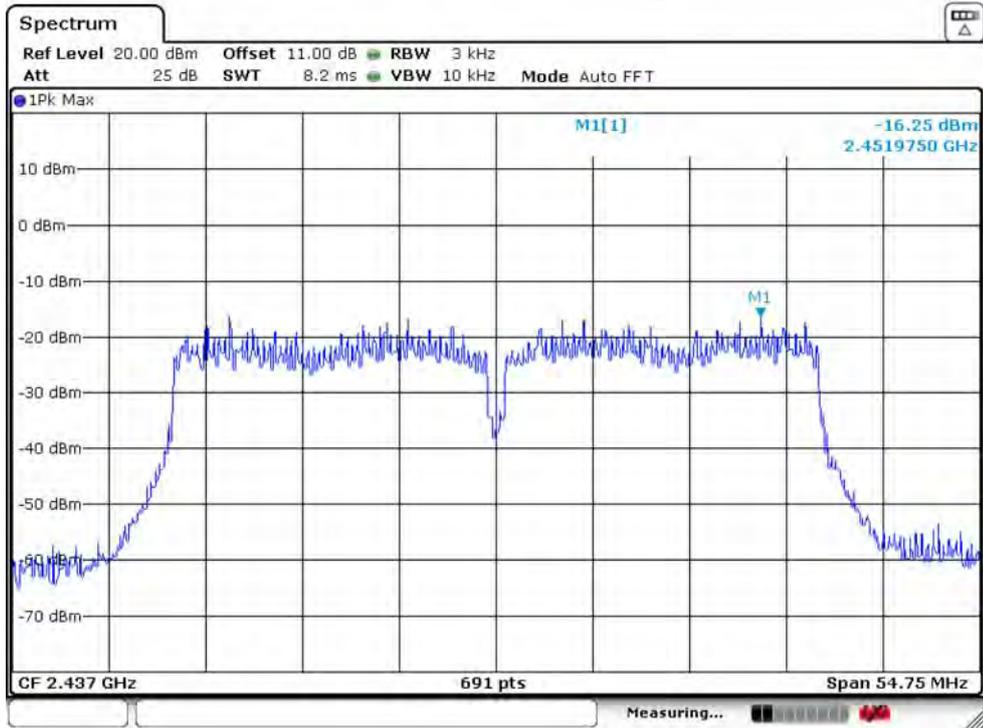


IEEE 802.11n HT40 2437MHz_ANT 2

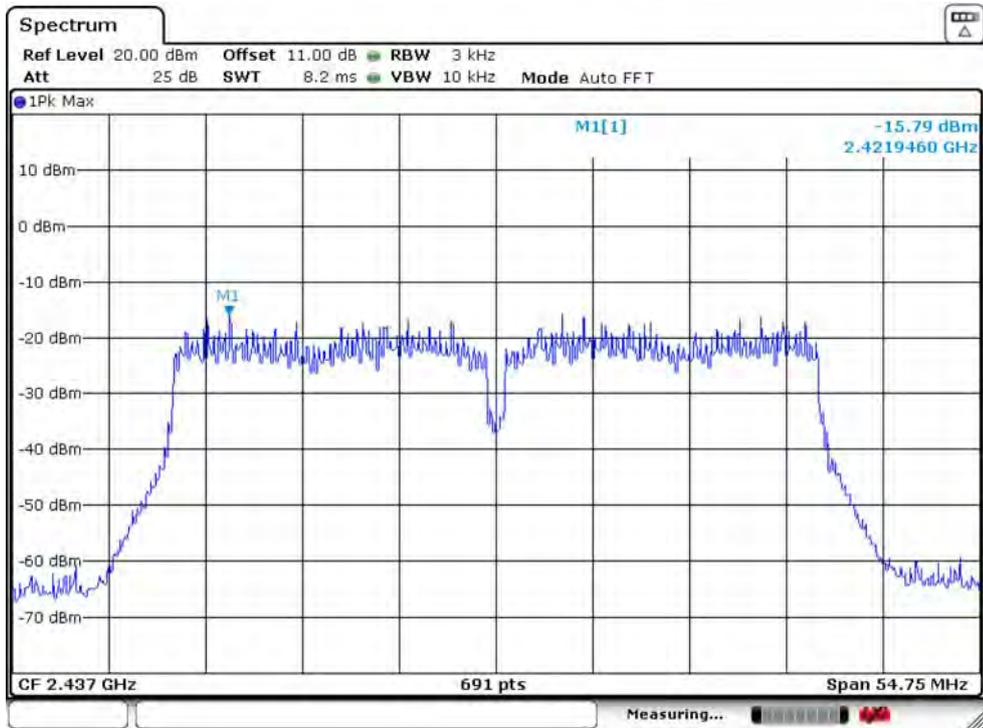


IEEE 802.11n HT40 2452MHz_ANT 1

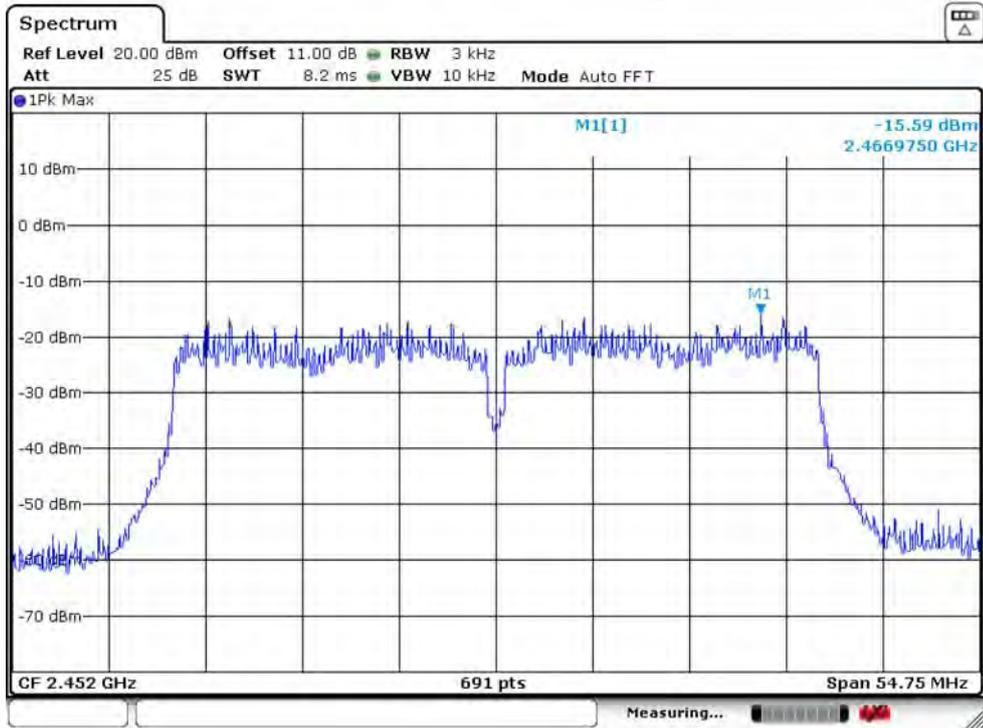


IEEE 802.11n HT40 2452MHz_ANT 2

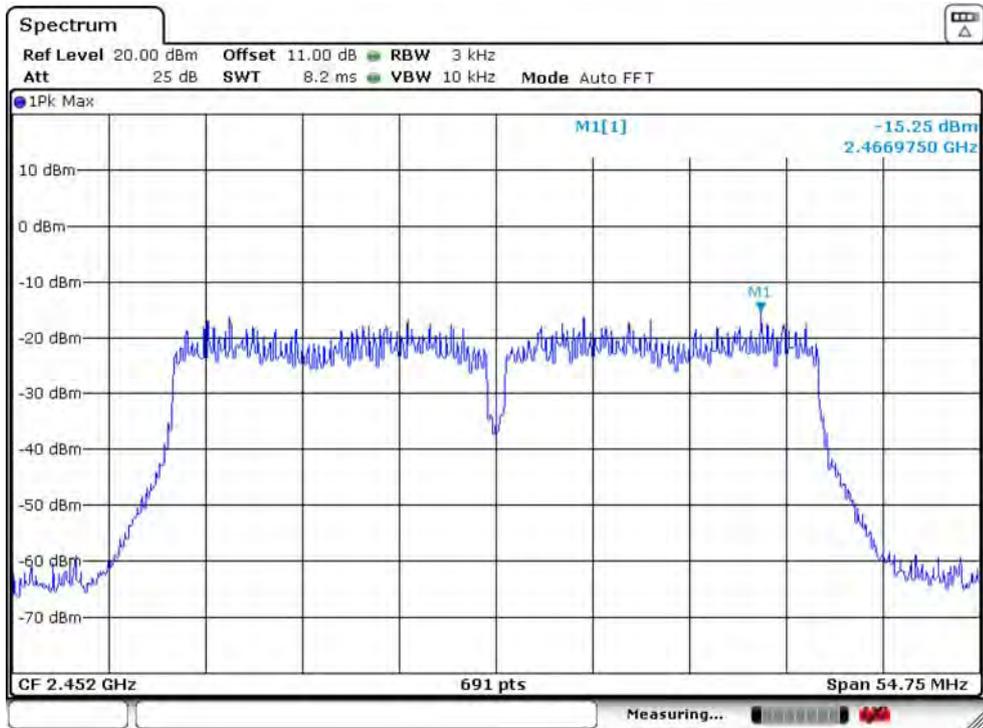


IEEE 802.11ax HE20 2412MHz_ANT 1

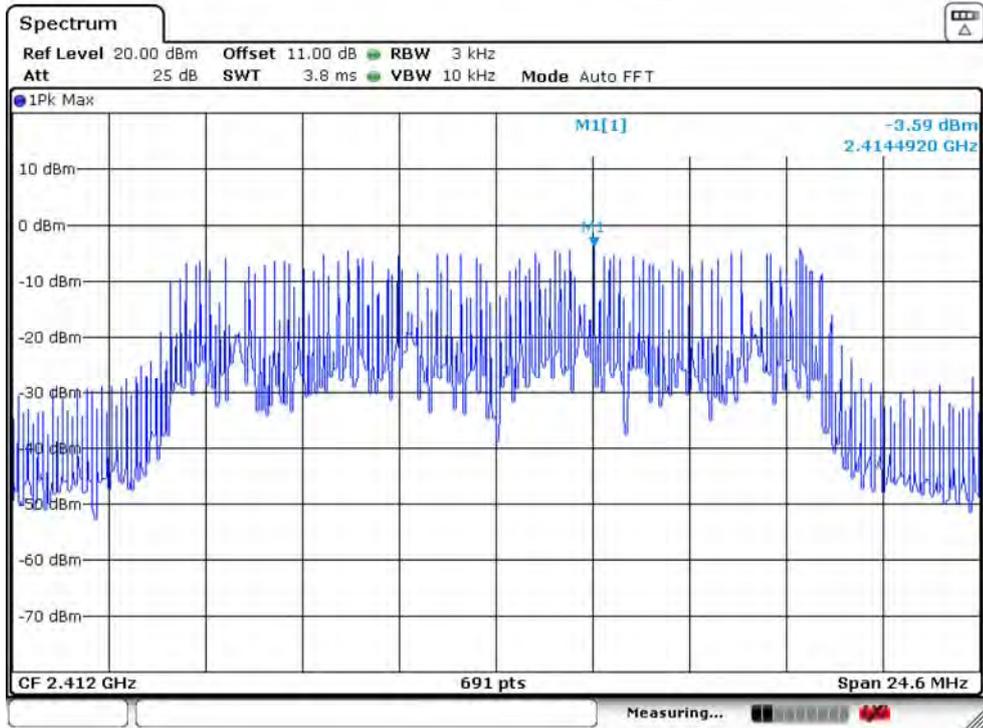


IEEE 802.11ax HE20 2412MHz_ANT 2

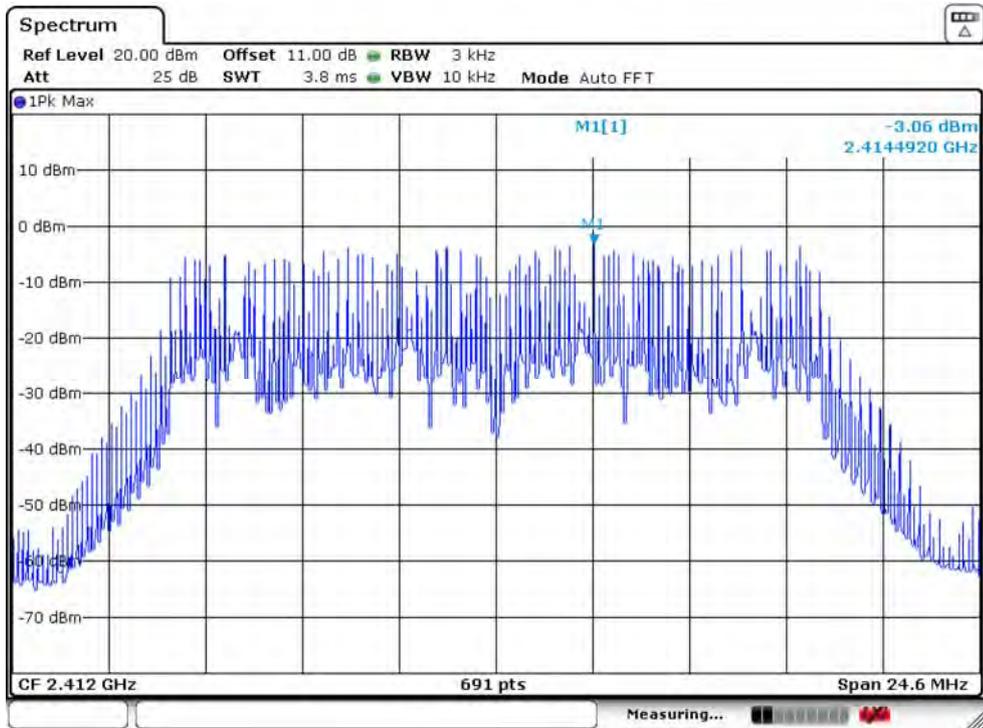


IEEE 802.11ax HE20 2437MHz_ANT 1

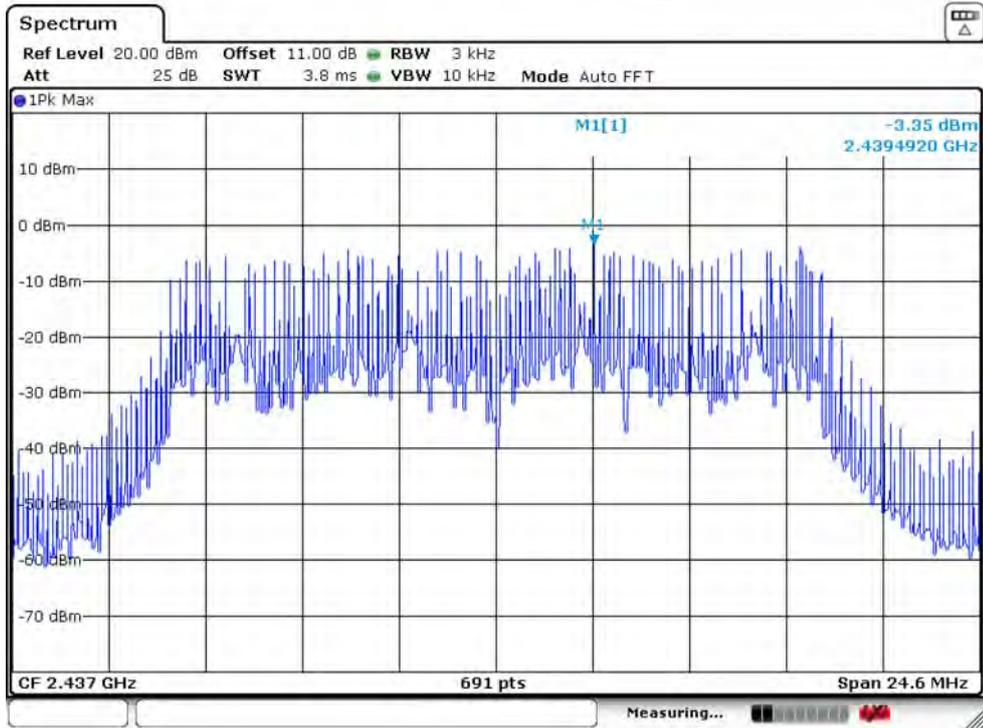


IEEE 802.11ax HE20 2437MHz_ANT 2

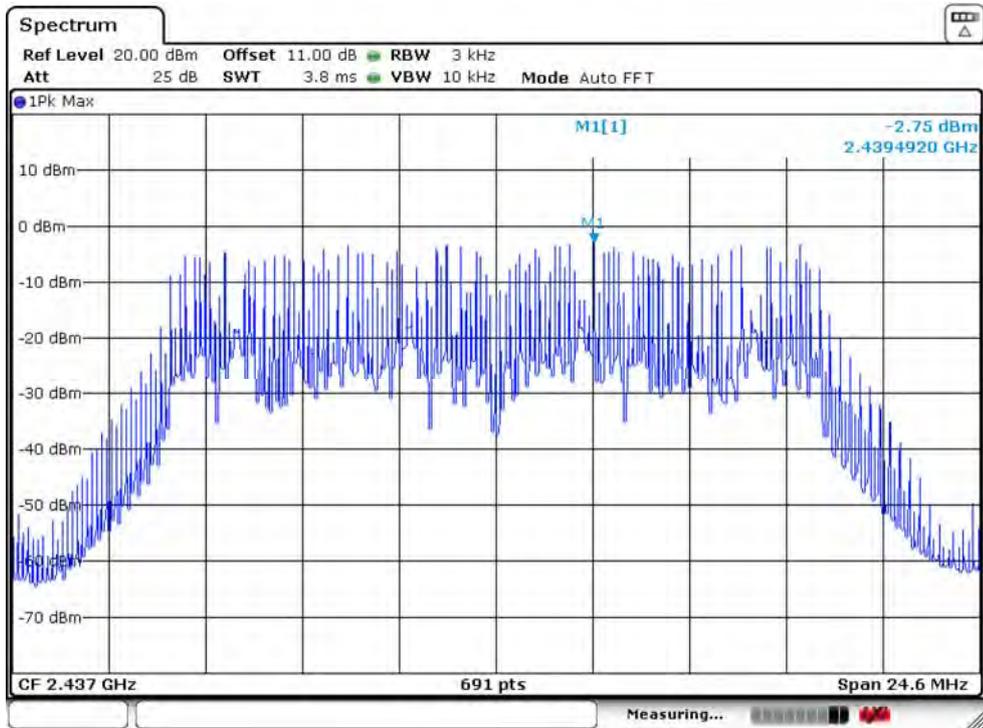


IEEE 802.11ax HE20 2462MHz_ANT 1

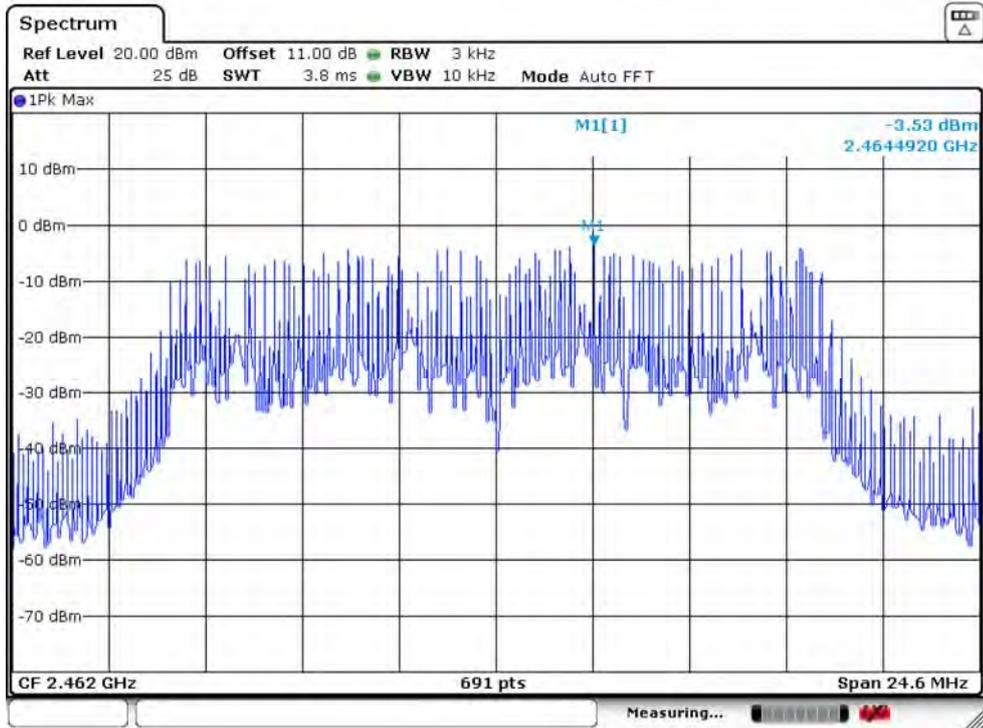


IEEE 802.11ax HE20 2462MHz_ANT 2

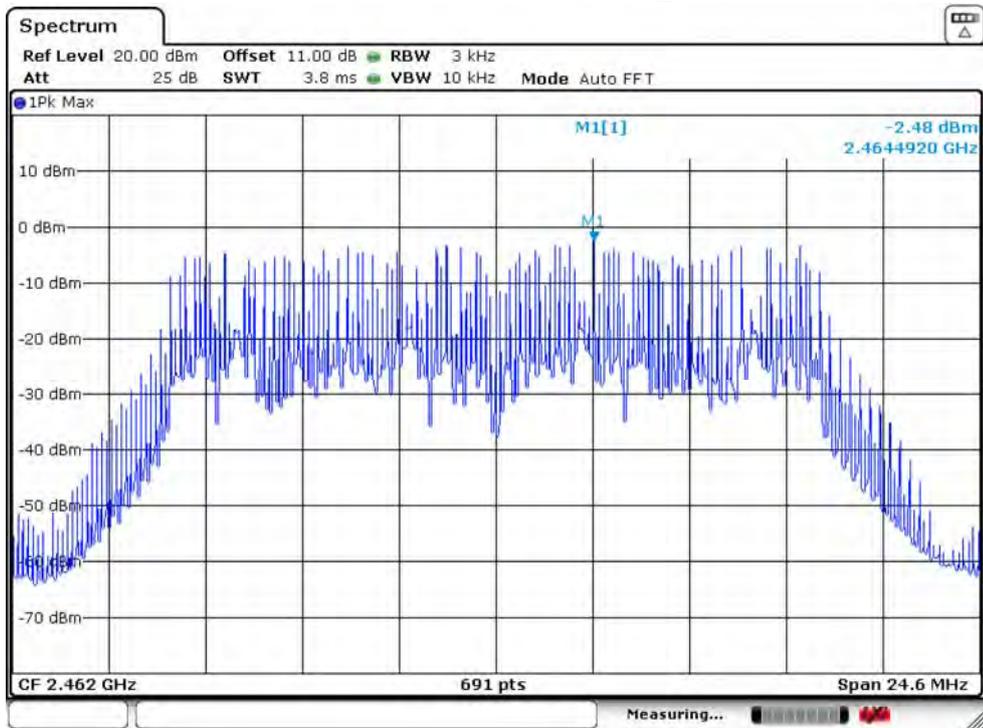


IEEE 802.11ax HE40 2422MHz_ANT 1

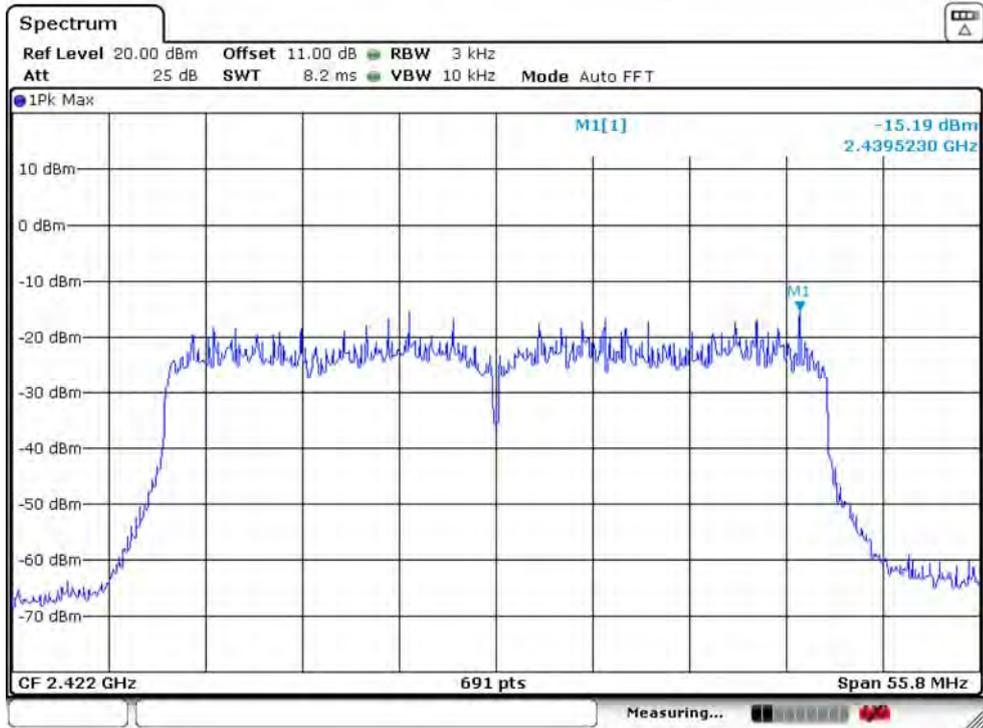


IEEE 802.11ax HE40 2422MHz_ANT 2

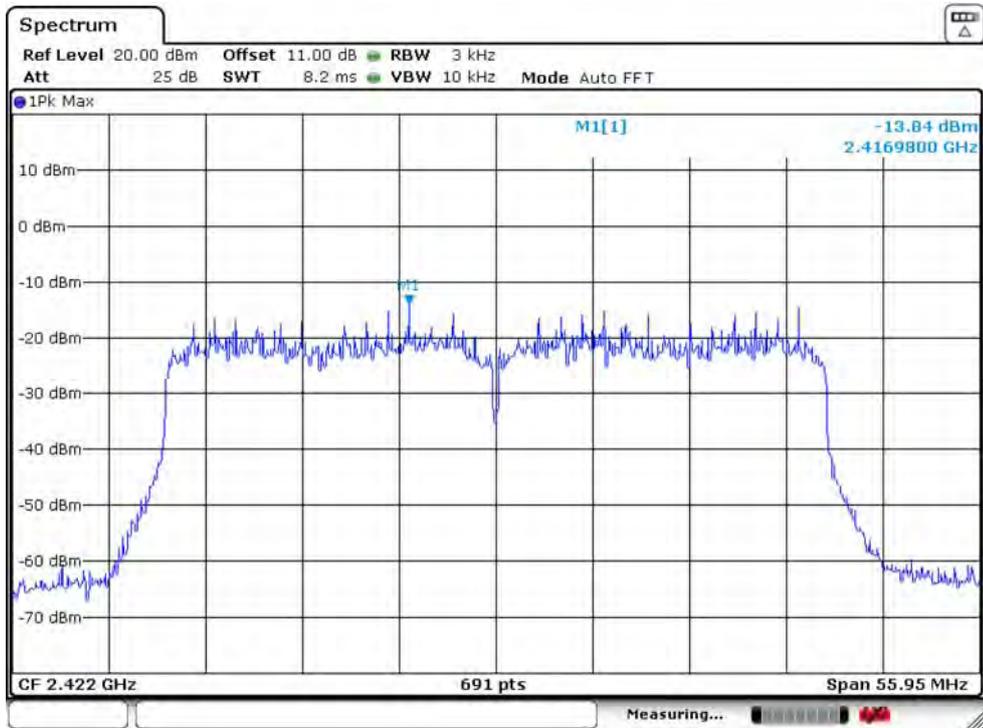


IEEE 802.11ax HE40 2437MHz_ANT 1

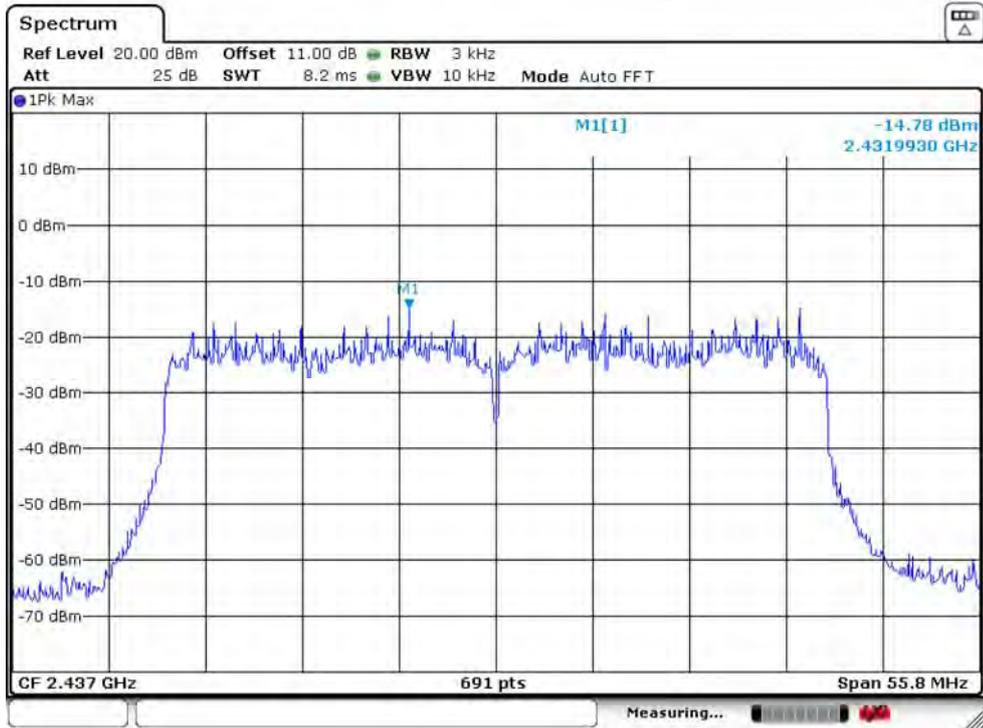


IEEE 802.11ax HE40 2437MHz_ANT 2

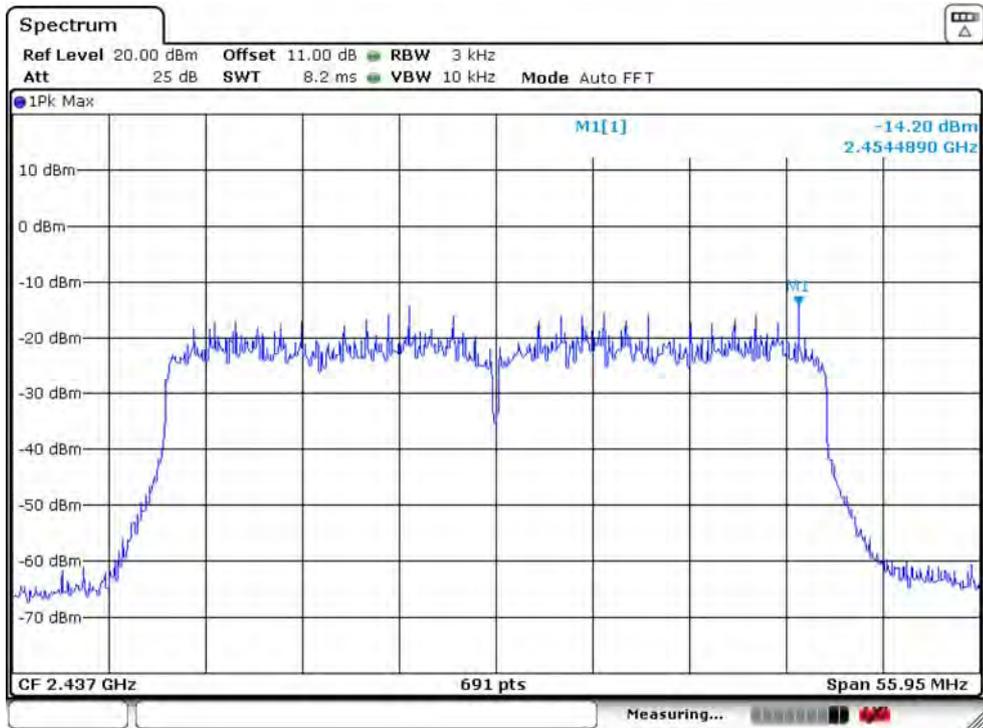

IEEE 802.11ax HE40 2452MHz_ANT 1

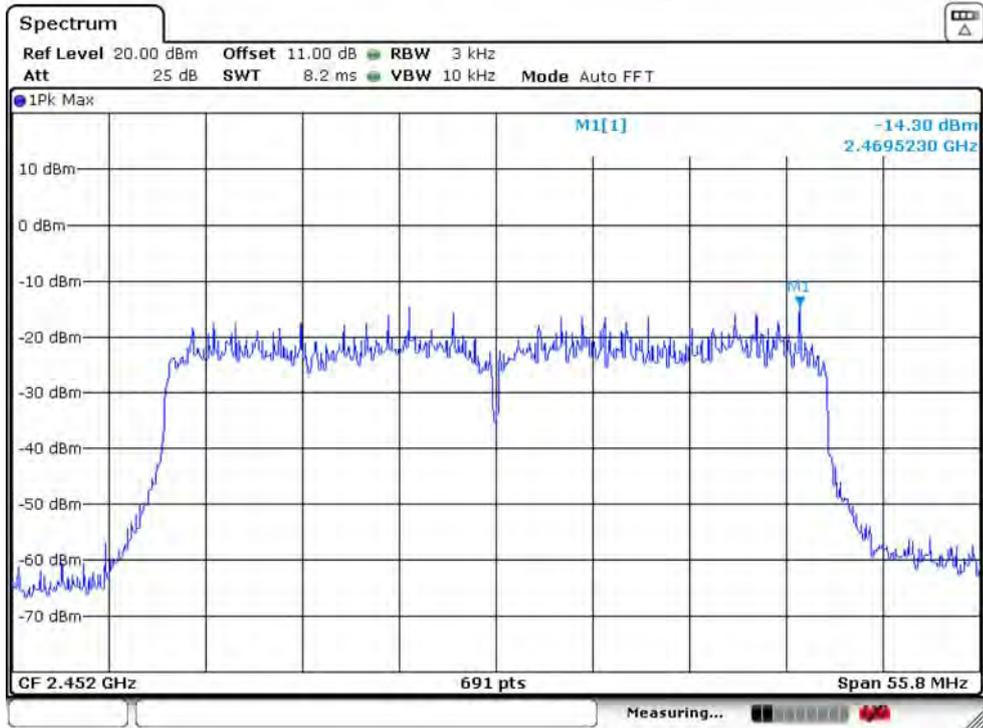

IEEE 802.11ax HE40 2452MHz_ANT 2

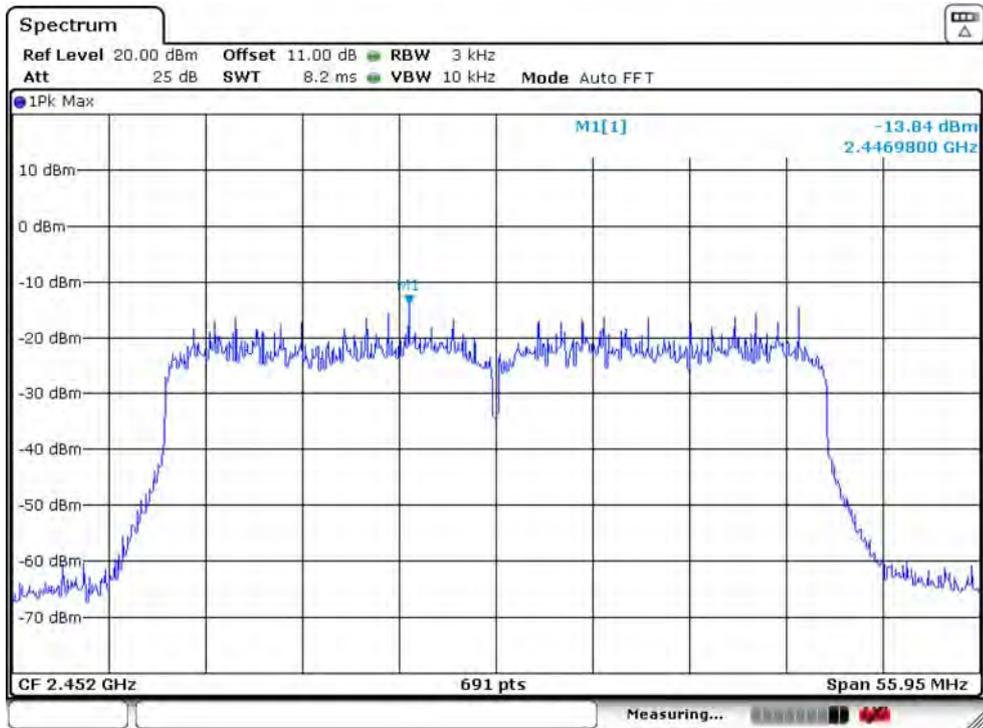

10. CONDUCTED BAND EDGE

10.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

10.2. Test Setup



10.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	100MHz(20MHz Bandwidth mode)/200MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


10.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 6.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.


10.5.Test Result

Temperature	23.6°C	Relative Humidity	56%	Test Voltage	AC 120V/60Hz
Result	PASS				


IEEE 802.11b 2412MHz_ANT 1

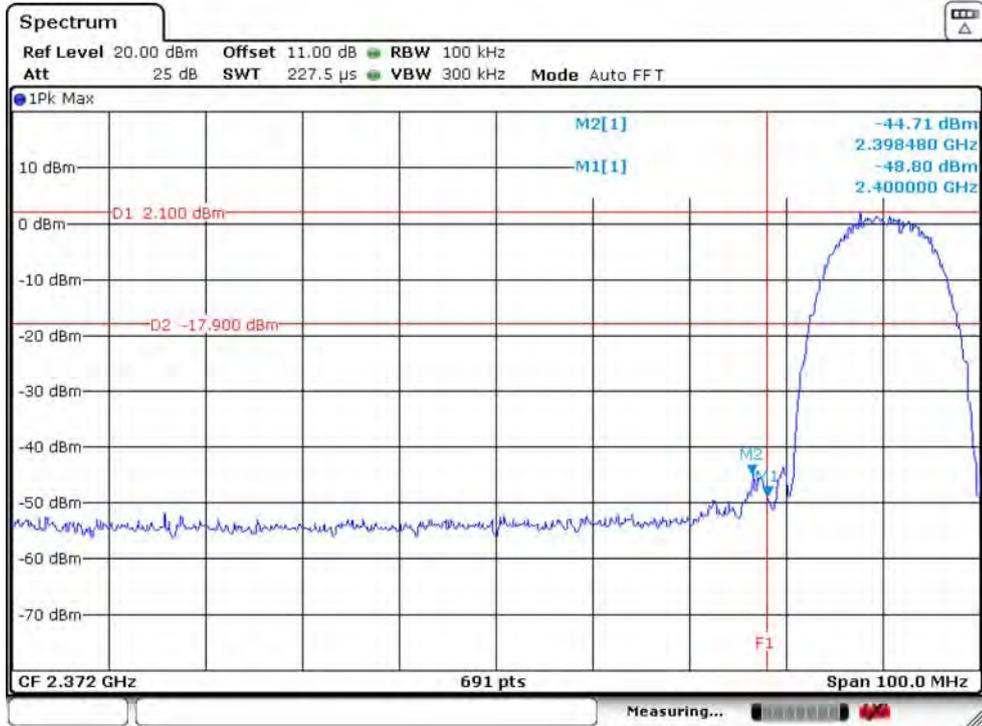


IEEE 802.11b 2412MHz_ANT 2

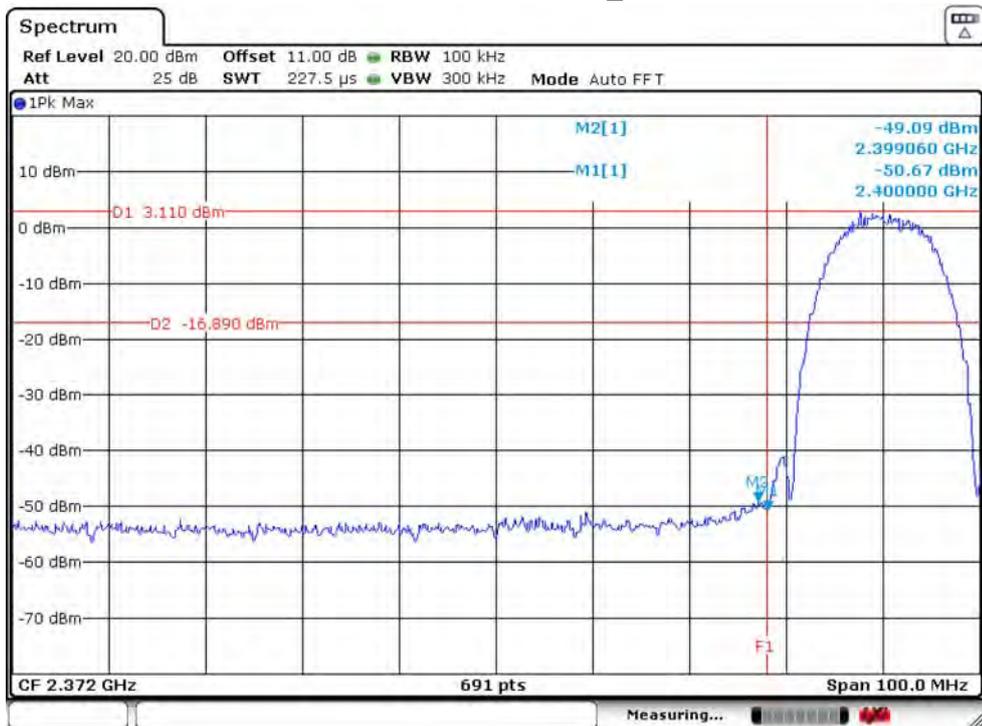


IEEE 802.11b 2462MHz_ANT 1

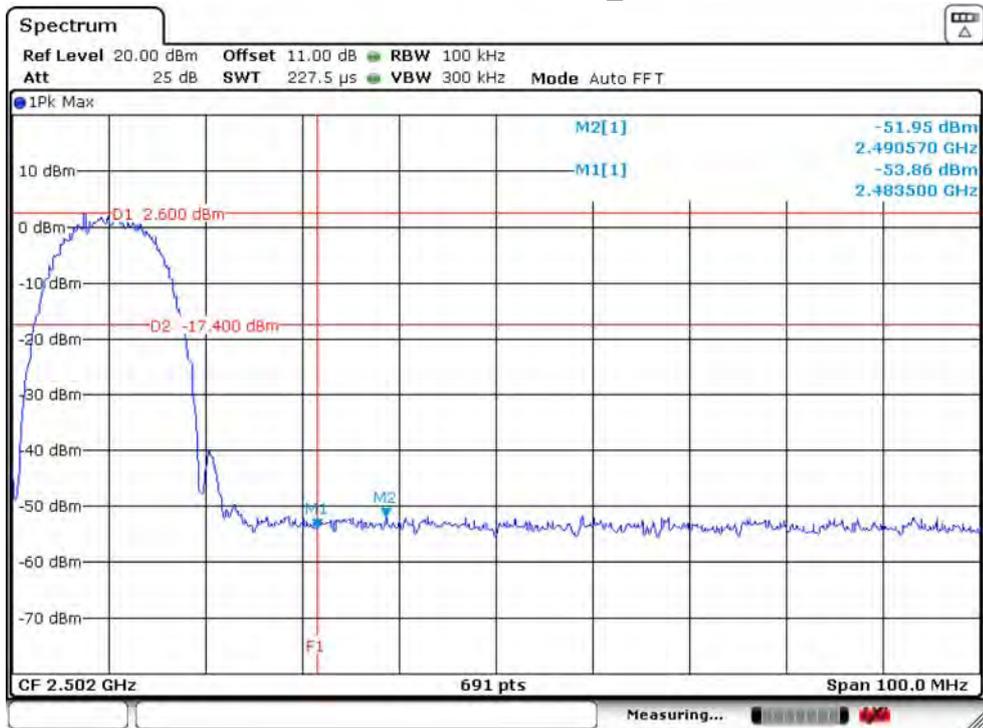


IEEE 802.11b 2462MHz_ANT 2

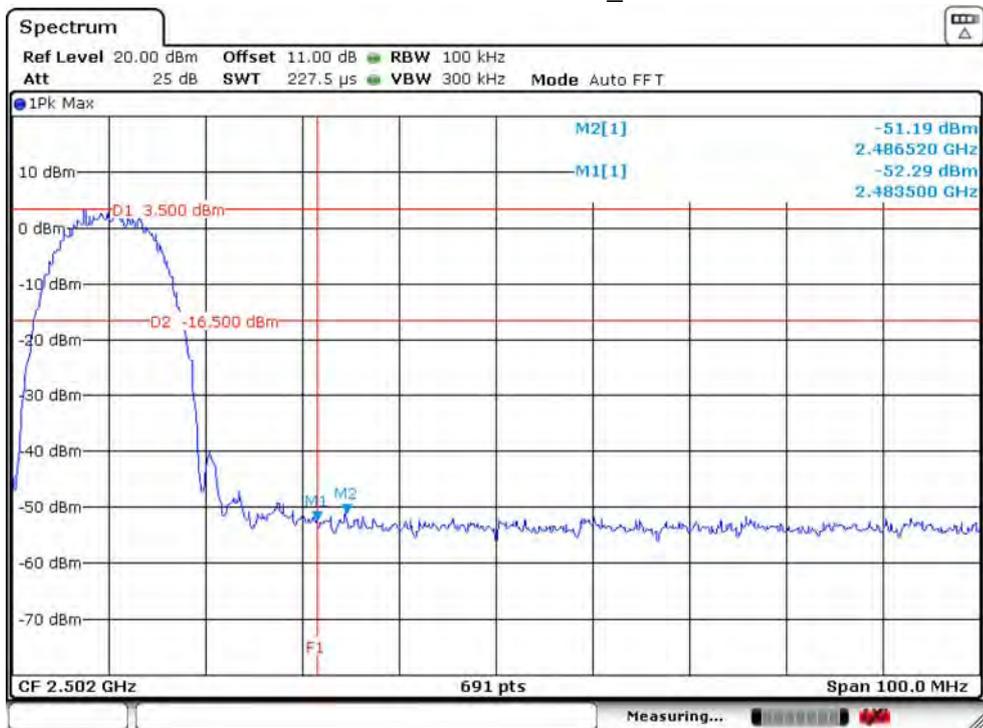


IEEE 802.11g 2412MHz_ANT 1

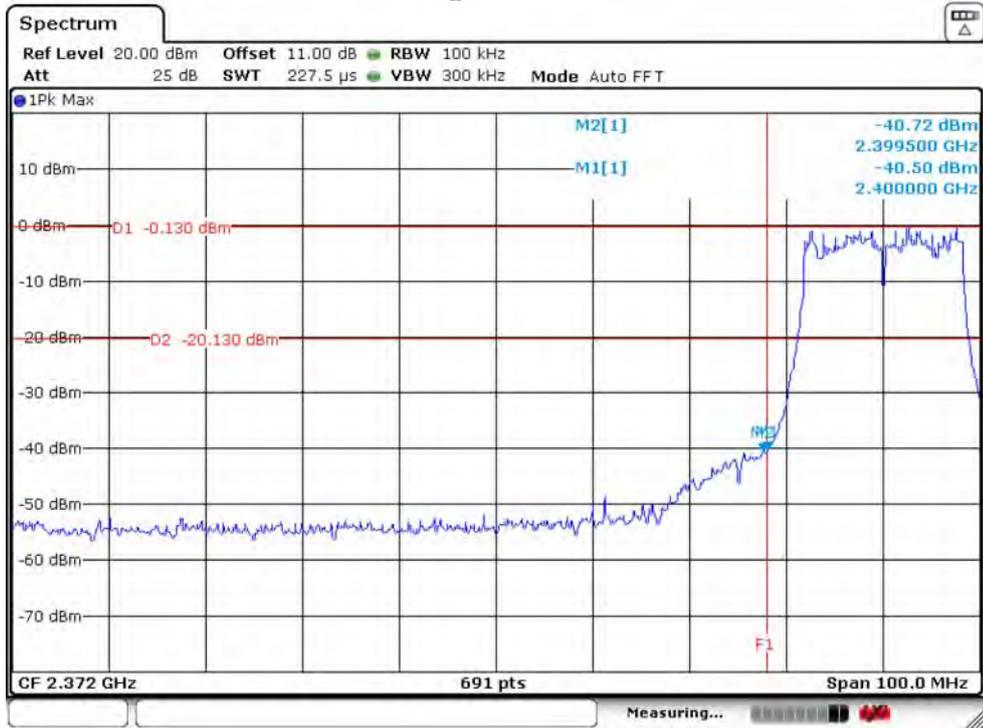


IEEE 802.11g 2412MHz_ANT 2

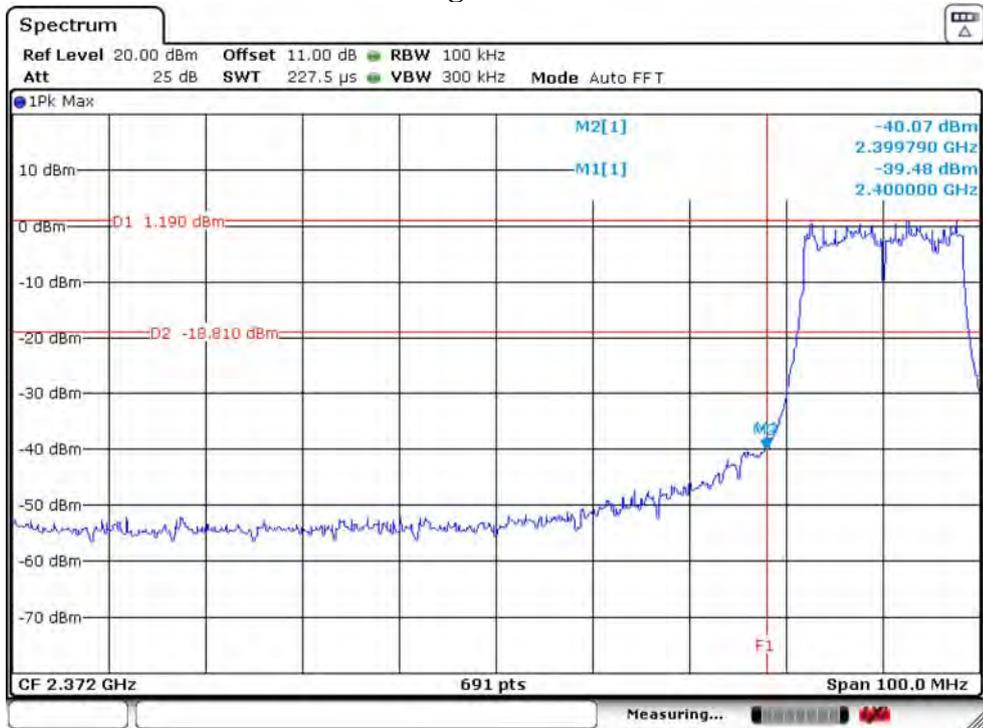


IEEE 802.11g 2462MHz_ANT 1

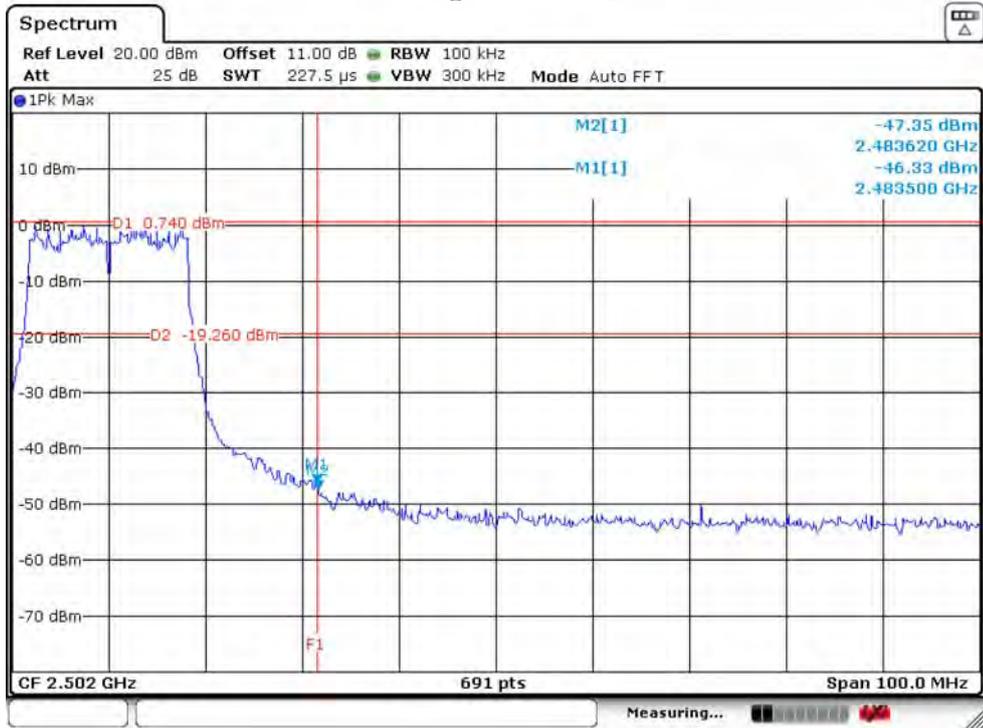


IEEE 802.11g 2462MHz_ANT 2

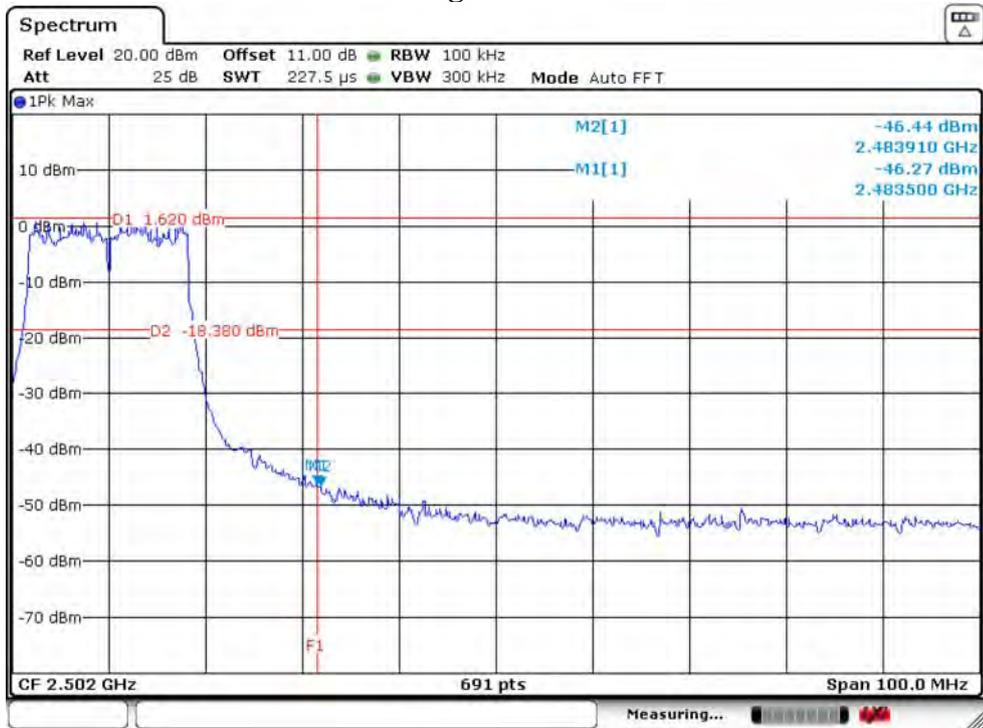


IEEE 802.11n HT20 2412MHz_ANT 1

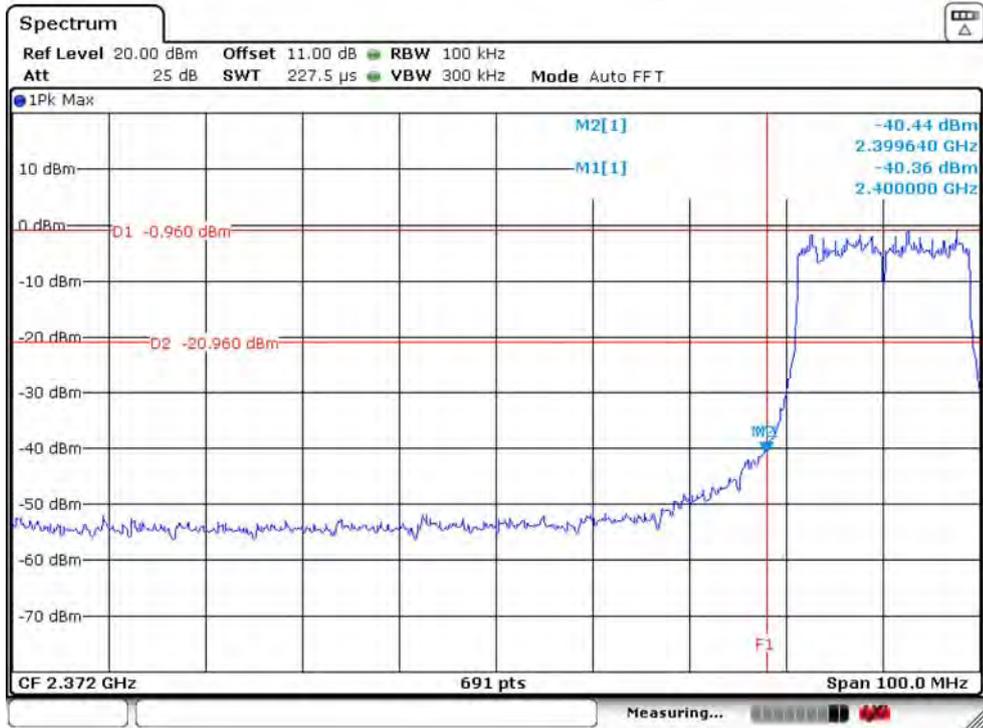


IEEE 802.11n HT20 2412MHz_ANT 2

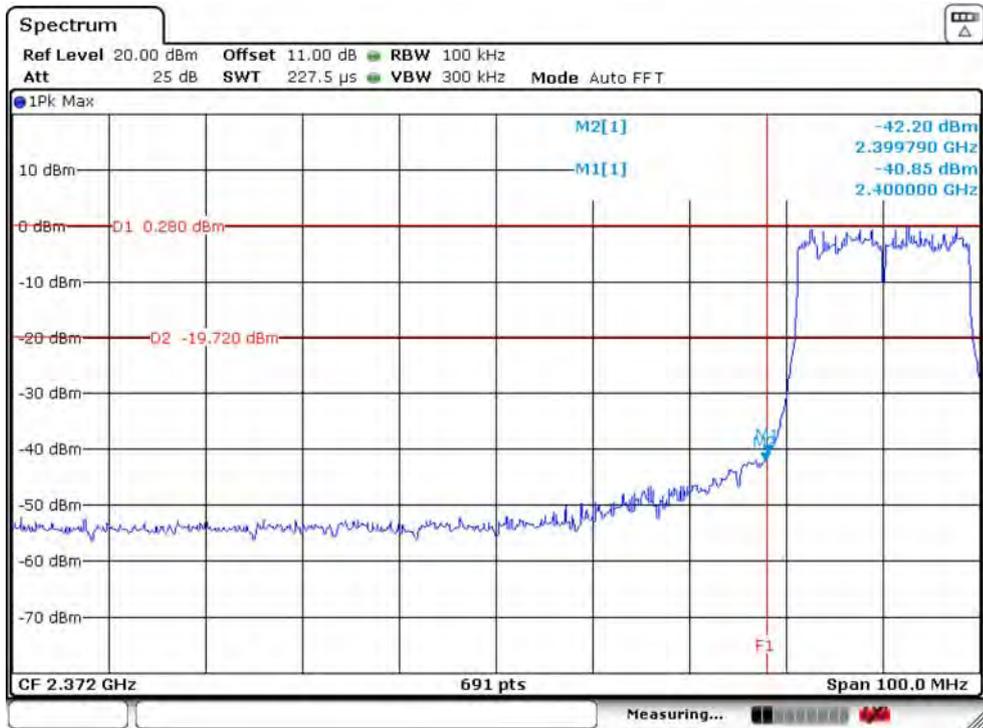


IEEE 802.11n HT20 2462MHz_ANT 1

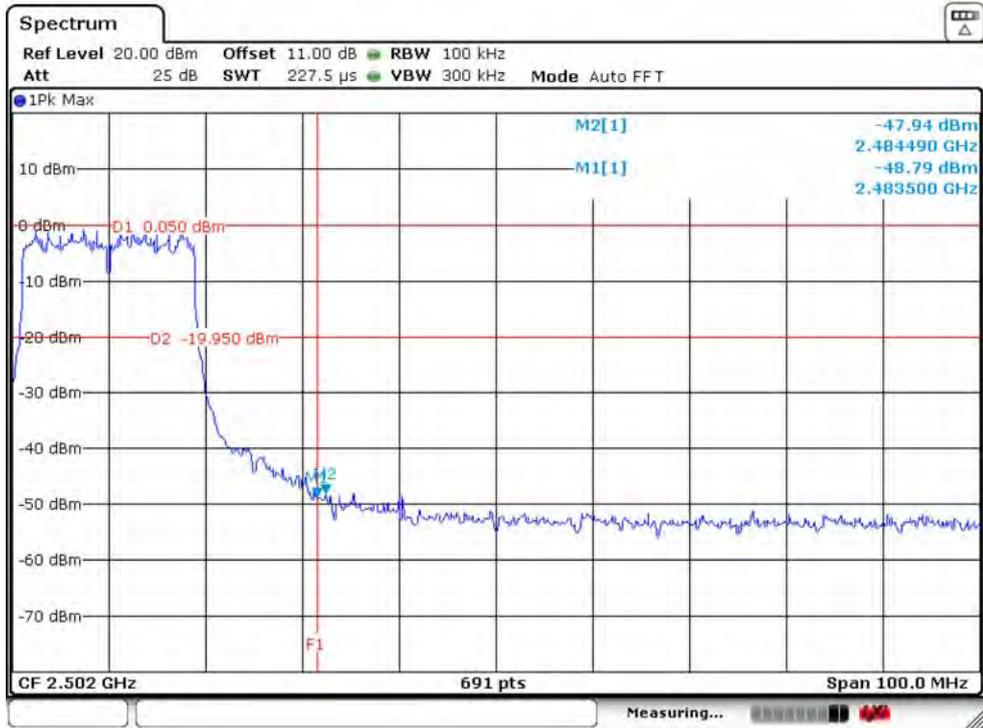


IEEE 802.11n HT20 2462MHz_ANT 2

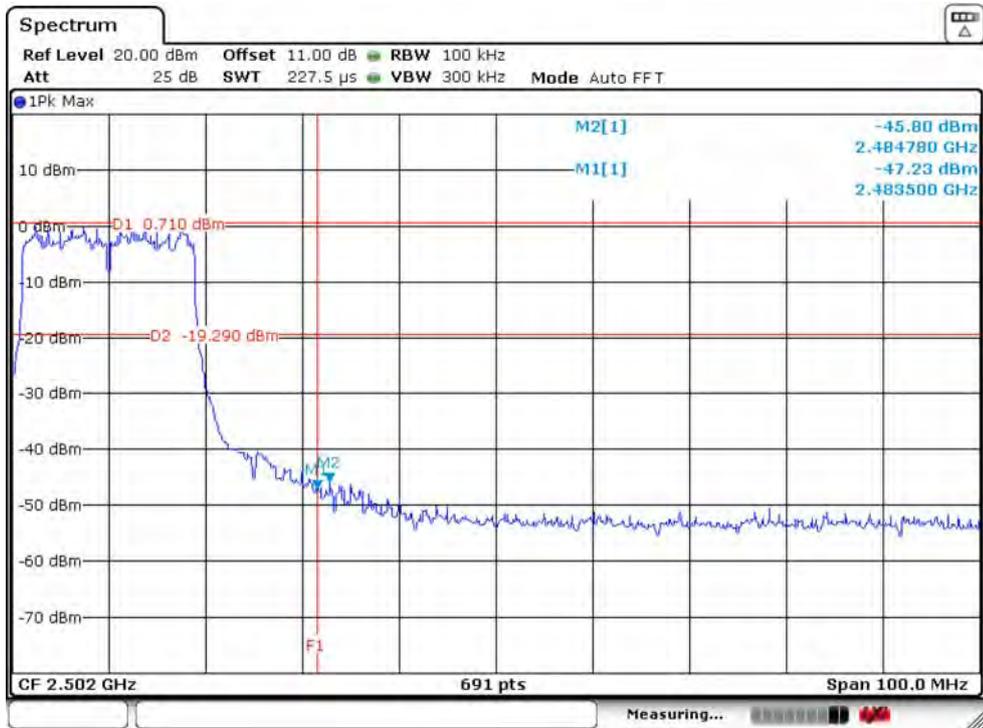


IEEE 802.11n HT40 2422MHz_ANT 1

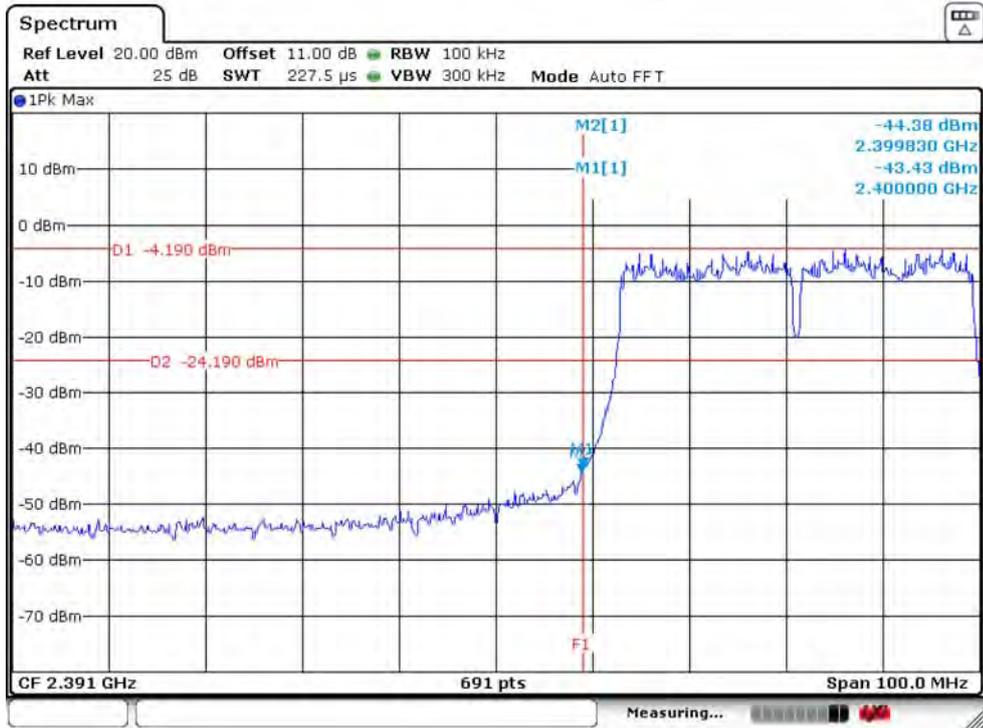


IEEE 802.11n HT40 2422MHz_ANT 2

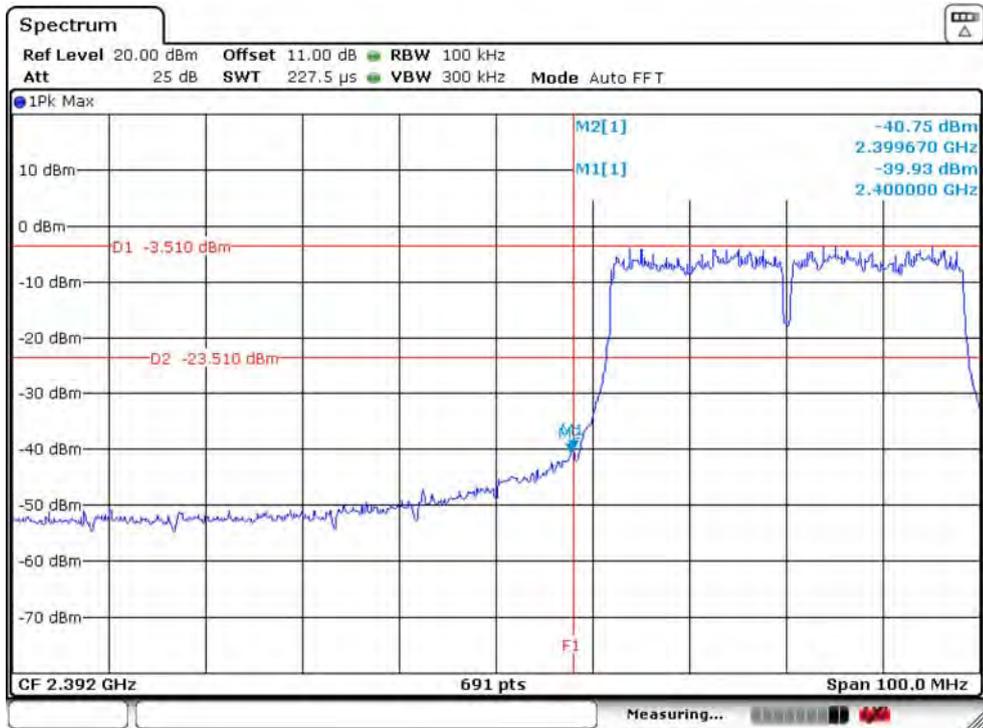


IEEE 802.11n HT40 2452MHz_ANT 1

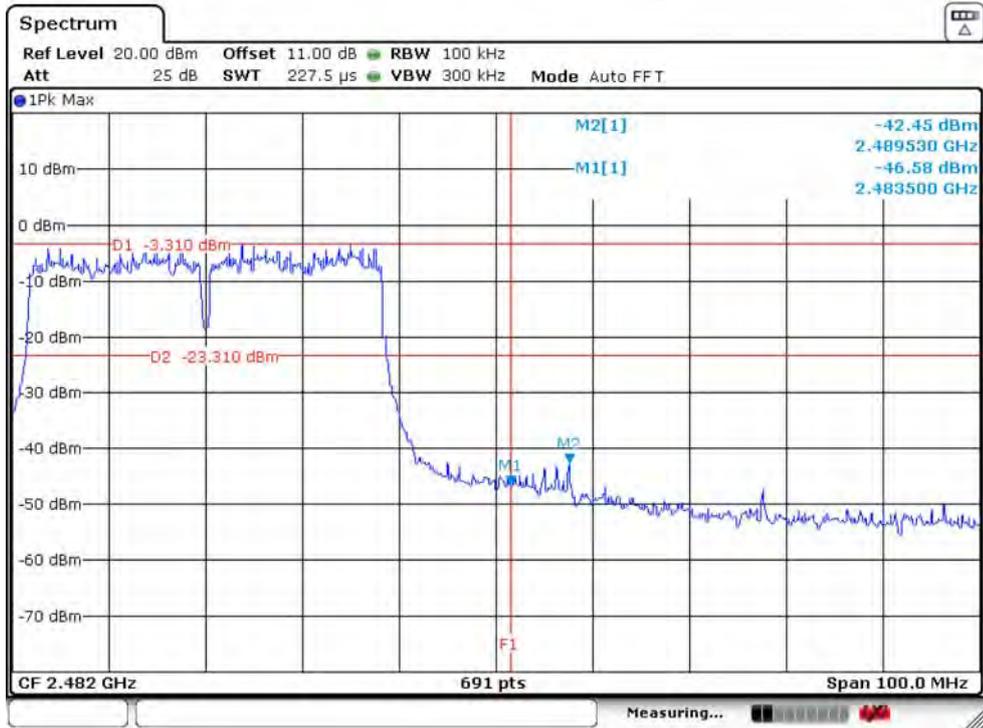


IEEE 802.11n HT40 2452MHz_ANT 2

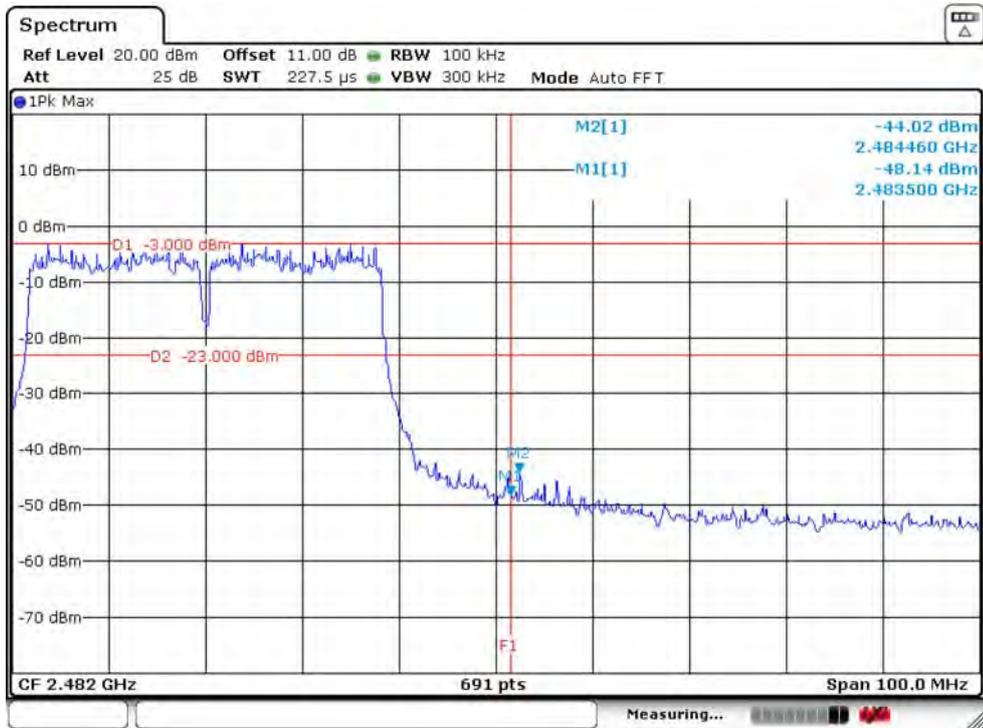


IEEE 802.11ax HE20 2412MHz_ANT 1

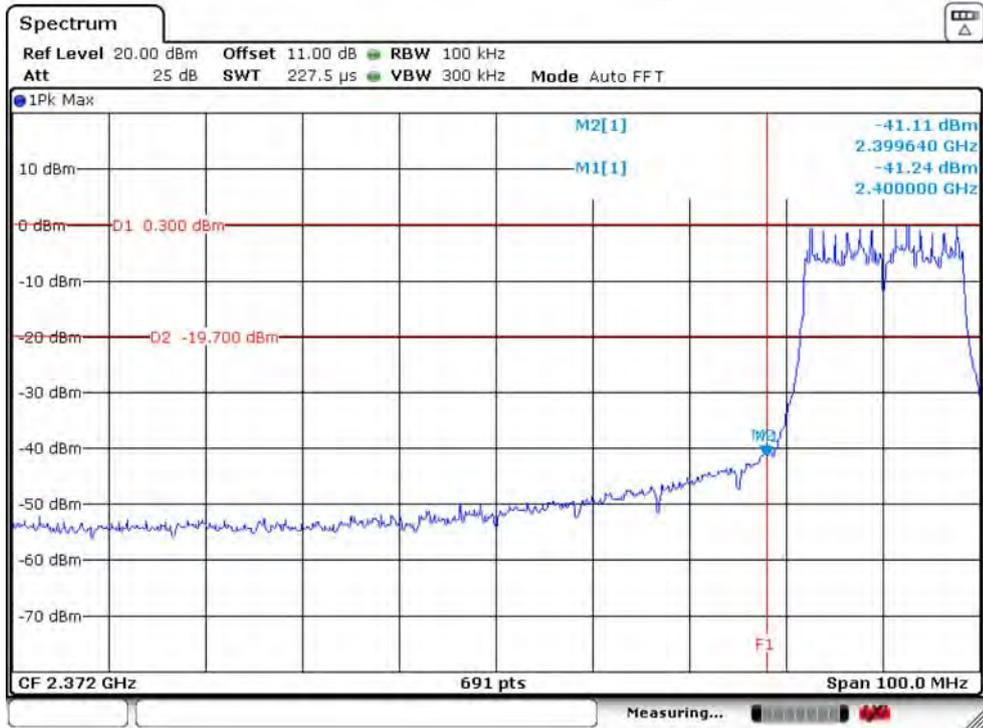


IEEE 802.11ax HE20 2412MHz_ANT 2

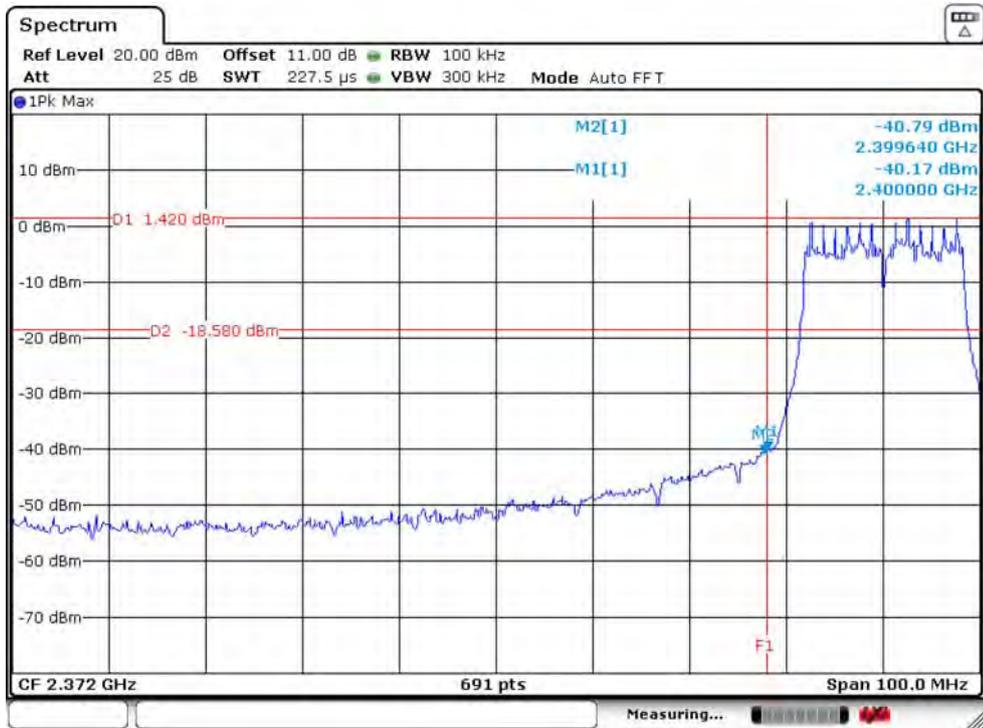


IEEE 802.11ax HE20 2462MHz_ANT 1

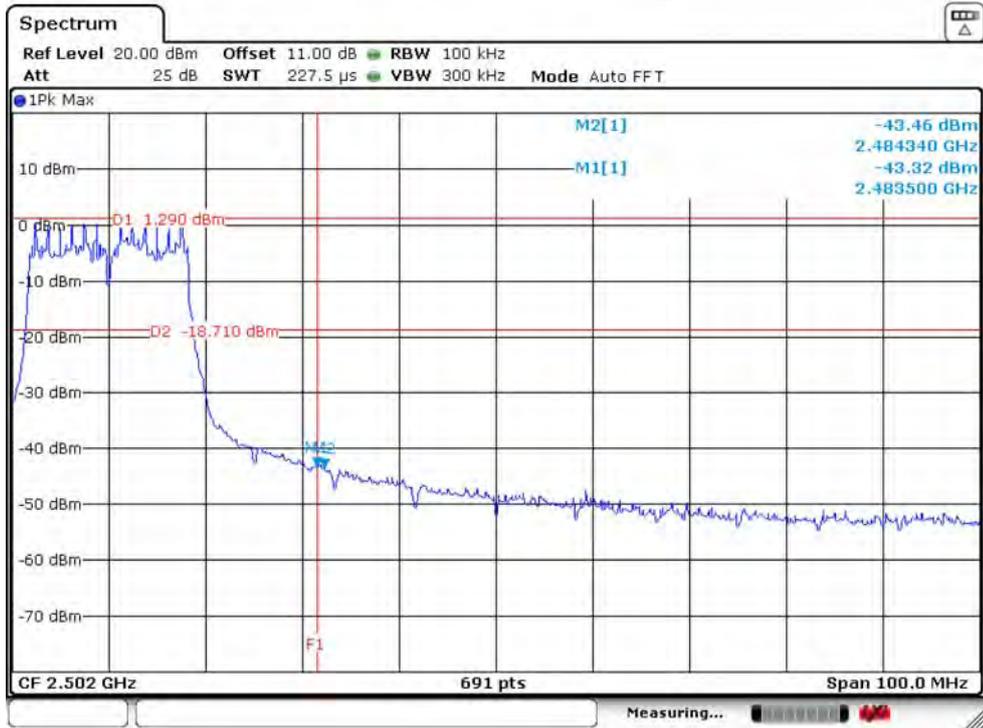


IEEE 802.11ax HE20 2462MHz_ANT 2

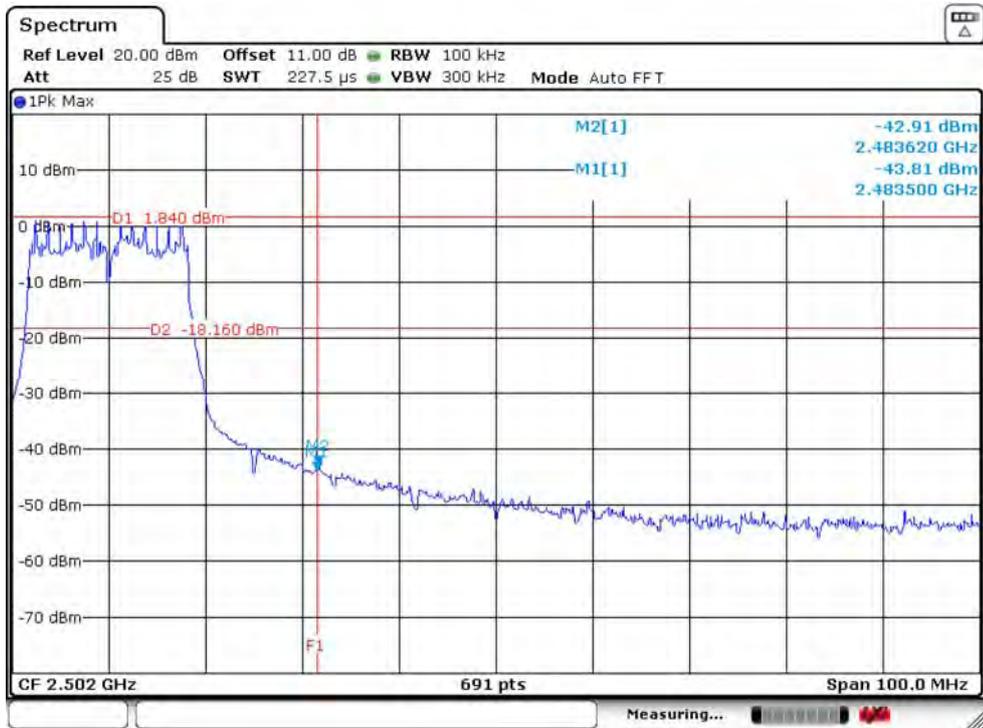


IEEE 802.11ax HE40 2422MHz_ANT 1

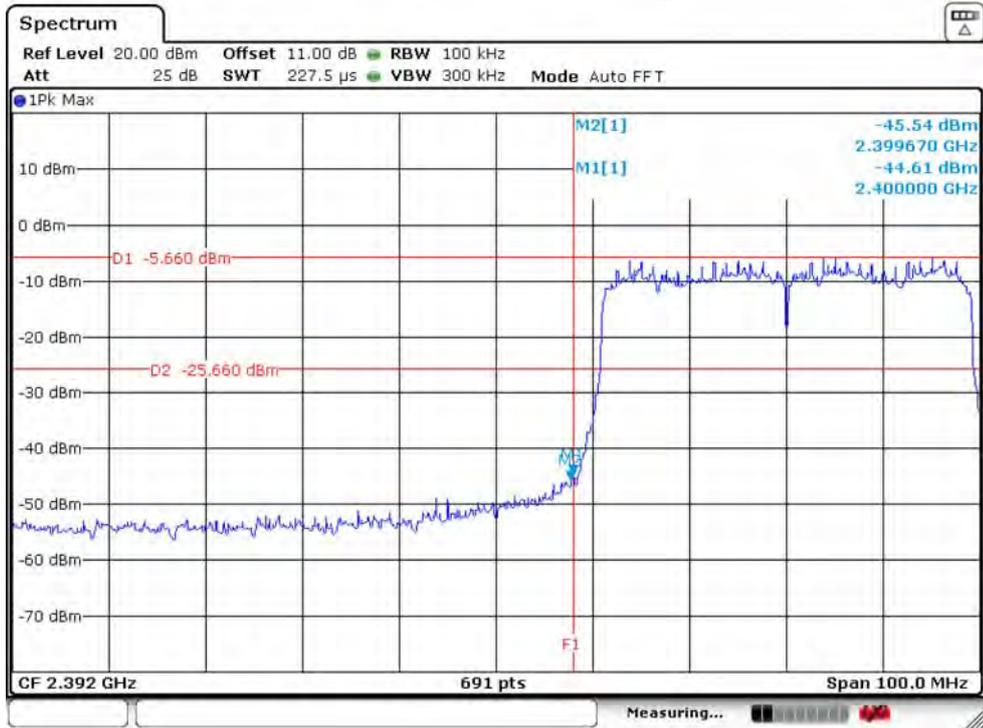


IEEE 802.11ax HE40 2422MHz_ANT 2

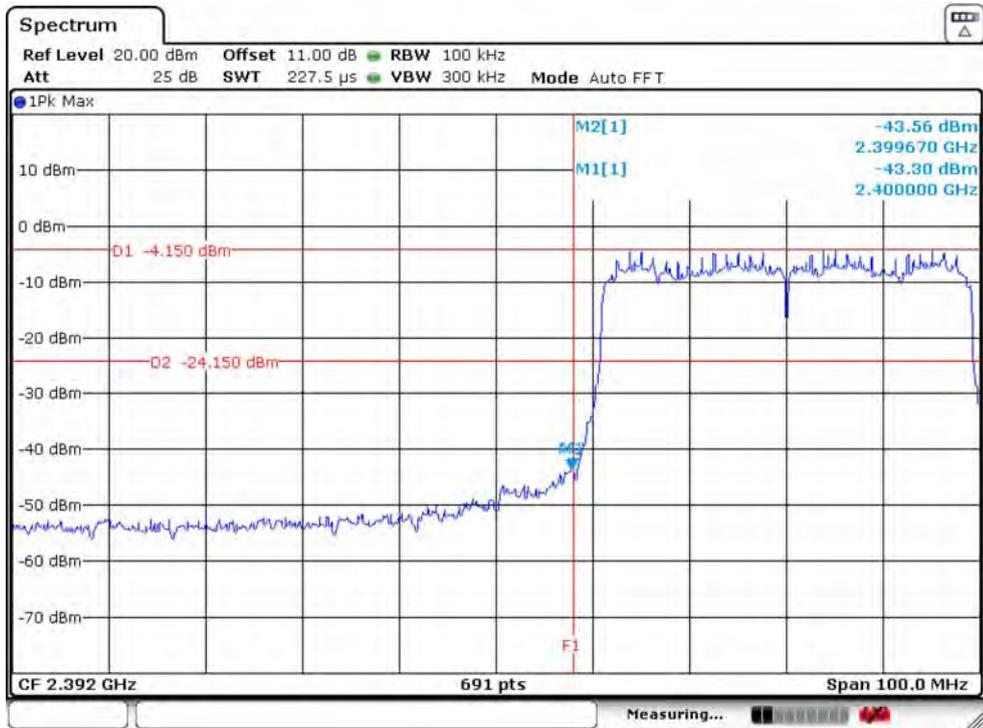

IEEE 802.11ax HE40 2452MHz_ANT 1

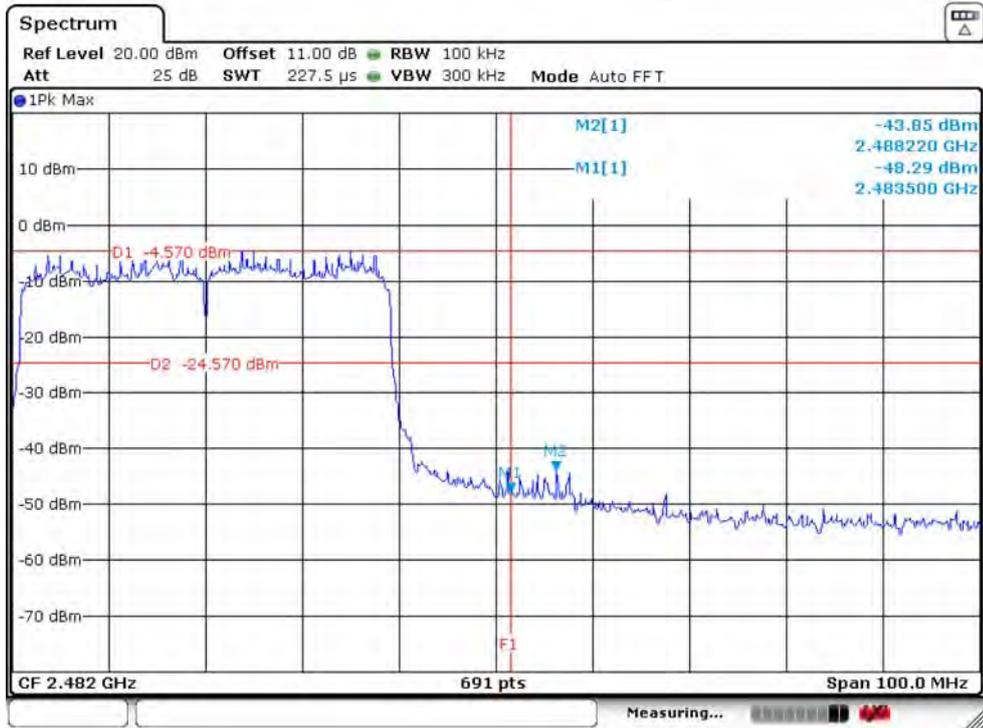

IEEE 802.11ax HE40 2452MHz_ANT 2

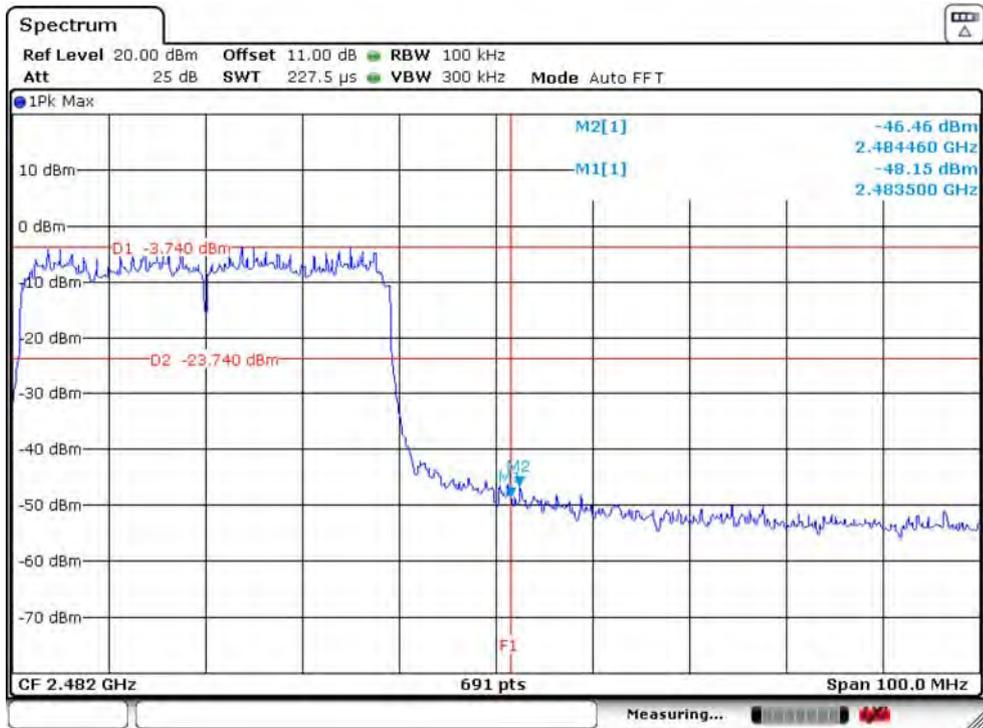


11. CONDUCTED SPURIOUS EMISSIONS

11.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

11.2. Test Setup

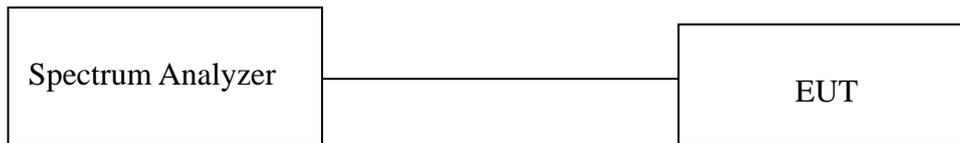

11.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	25GHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


11.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 7.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.


11.5. Test Result

Temperature	23.6°C	Relative Humidity	56%	Test Voltage	AC 120V/60Hz
Result	PASS				


IEEE 802.11b 2412MHz_ANT 1

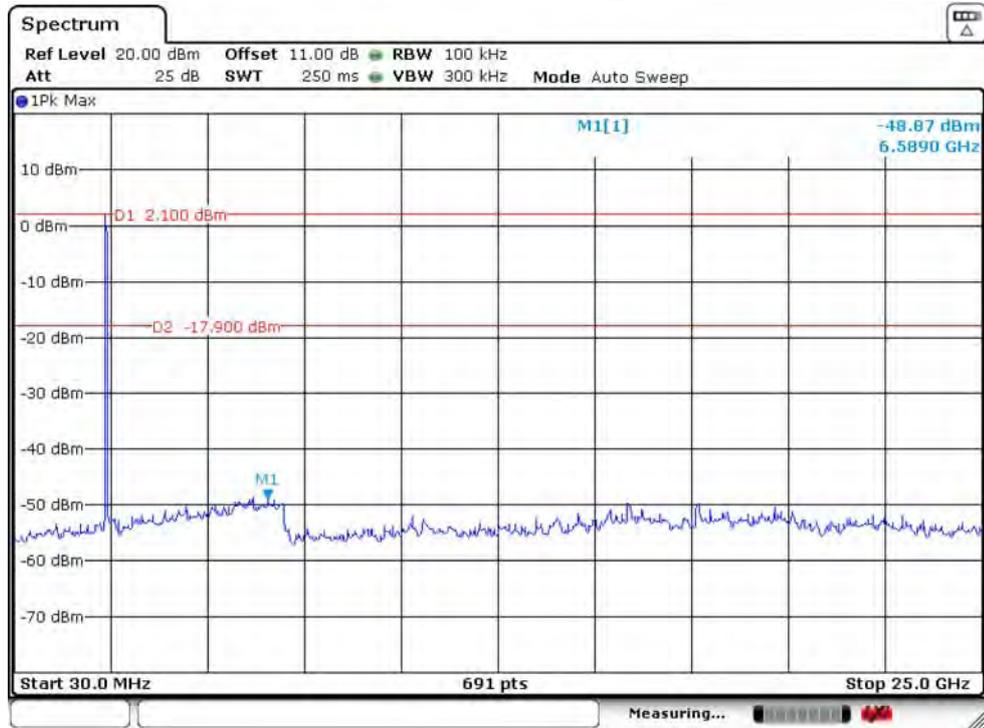


IEEE 802.11b 2412MHz_ANT 2

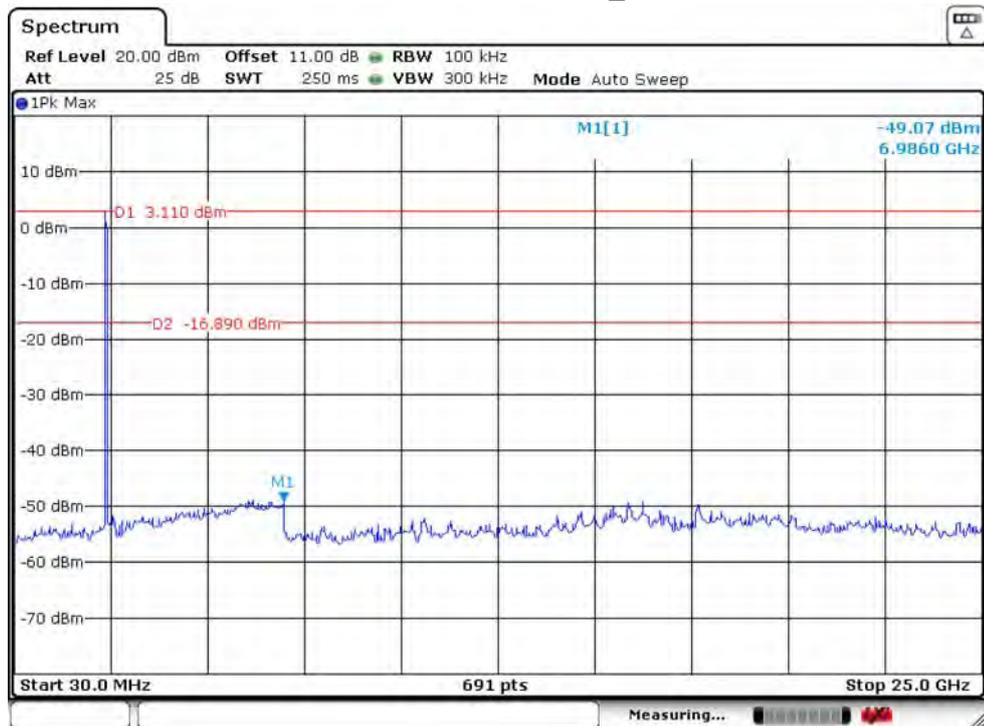


IEEE 802.11b 2437MHz_ANT 1

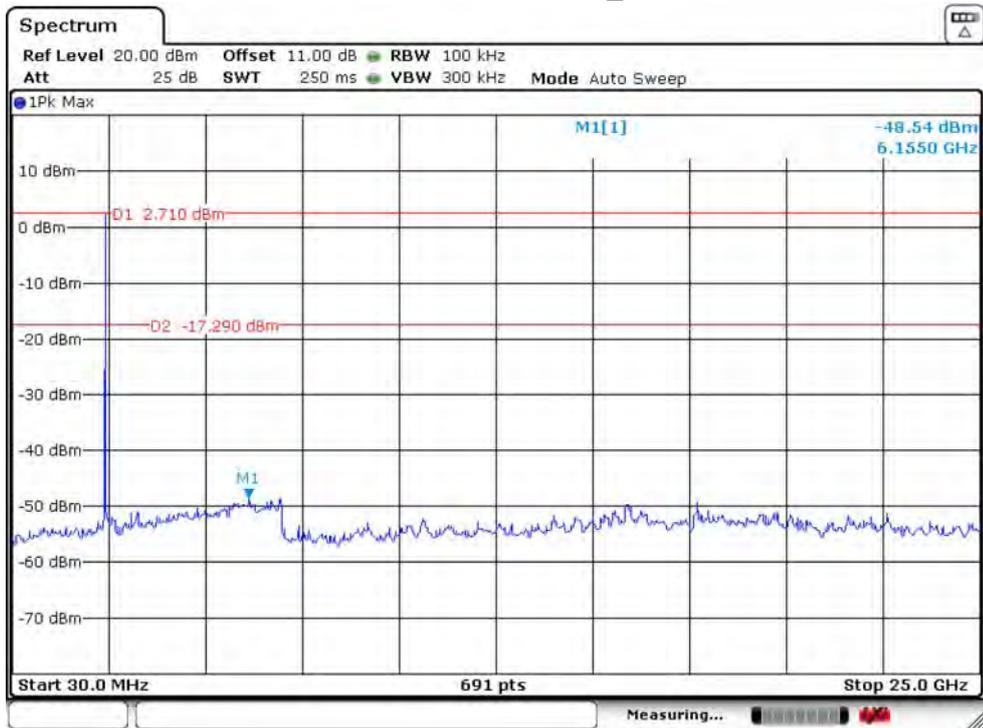


IEEE 802.11b 2437MHz_ANT 2

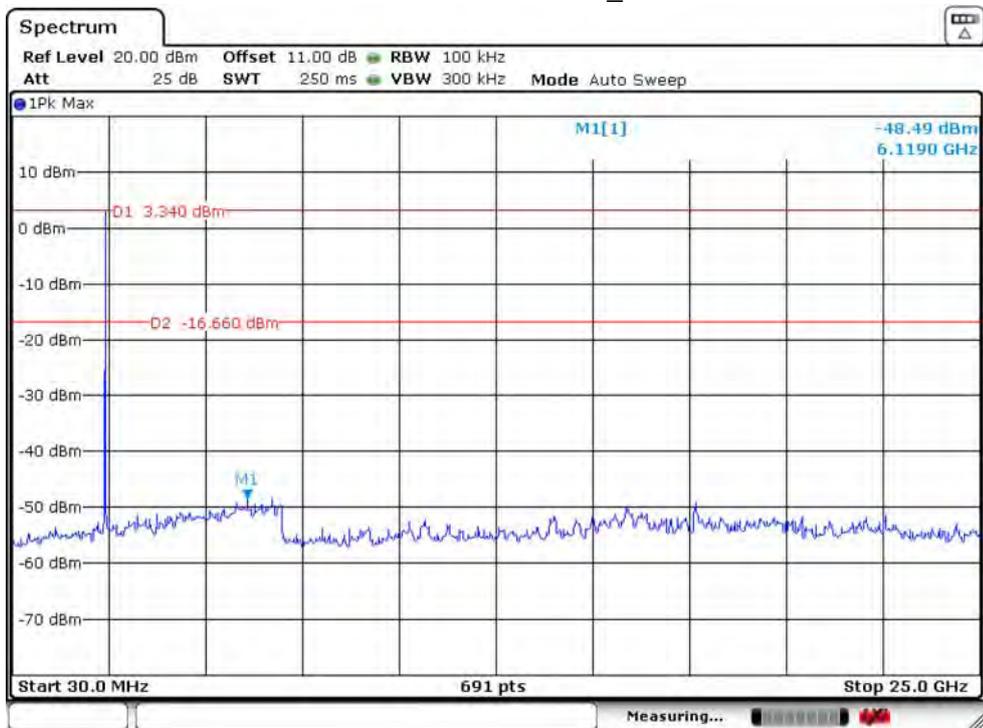


IEEE 802.11b 2462MHz_ANT 1

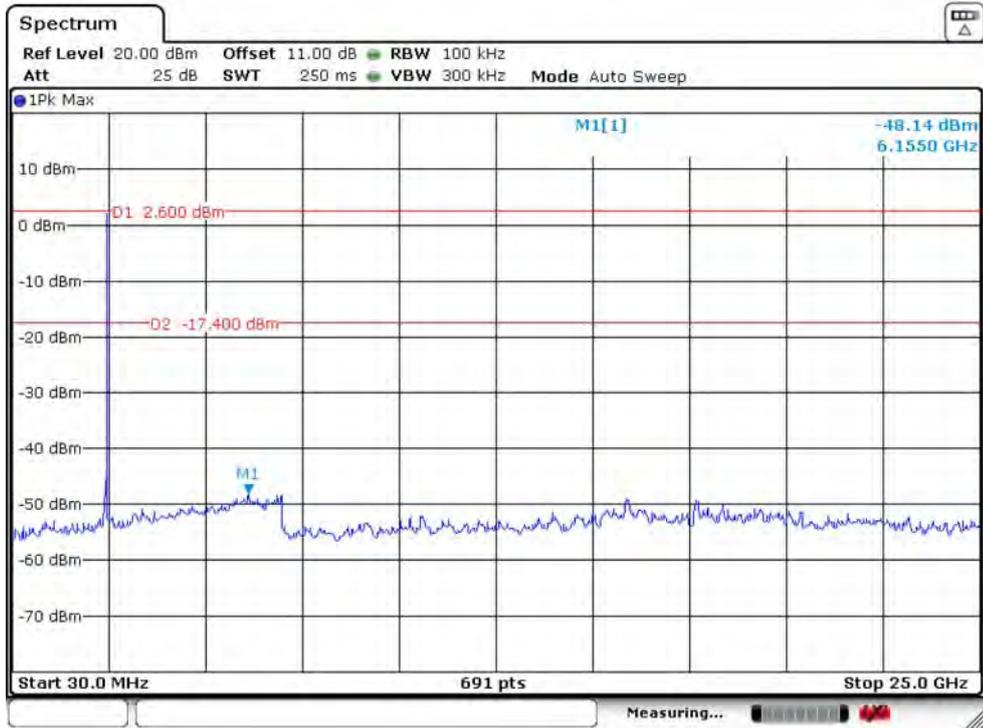


IEEE 802.11b 2462MHz_ANT 2

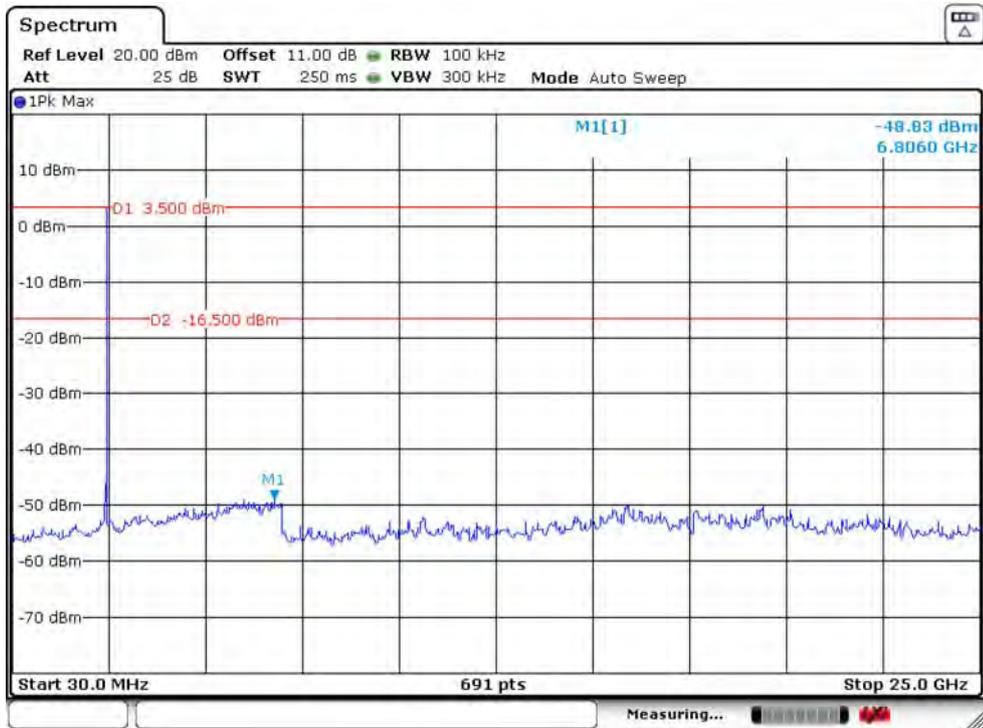


IEEE 802.11g 2412MHz_ANT 1

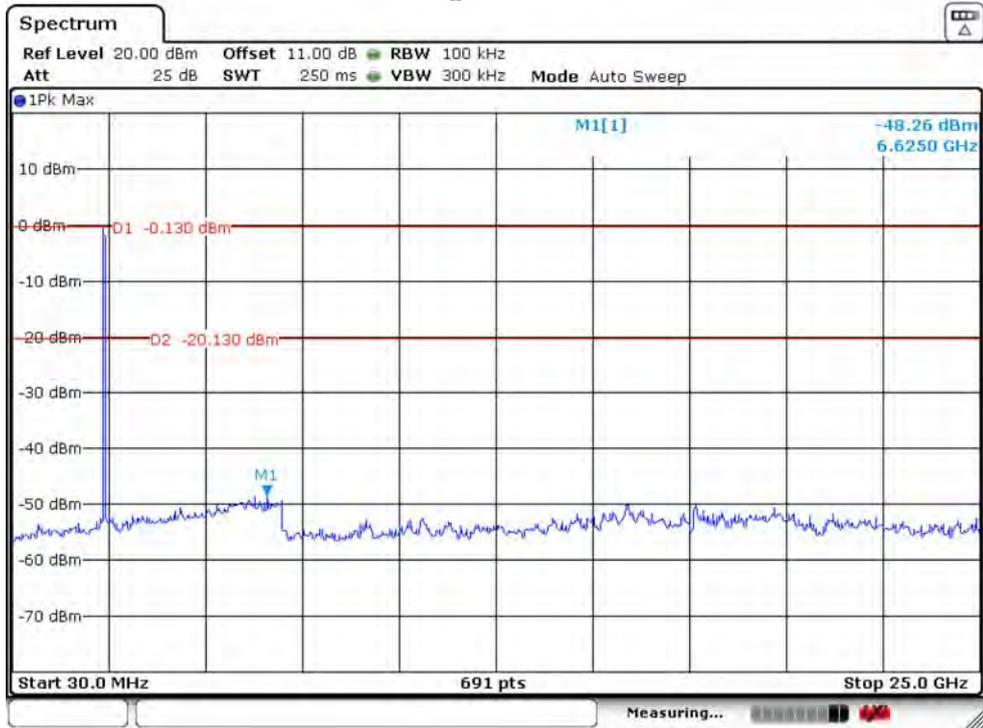


IEEE 802.11g 2412MHz_ANT 2

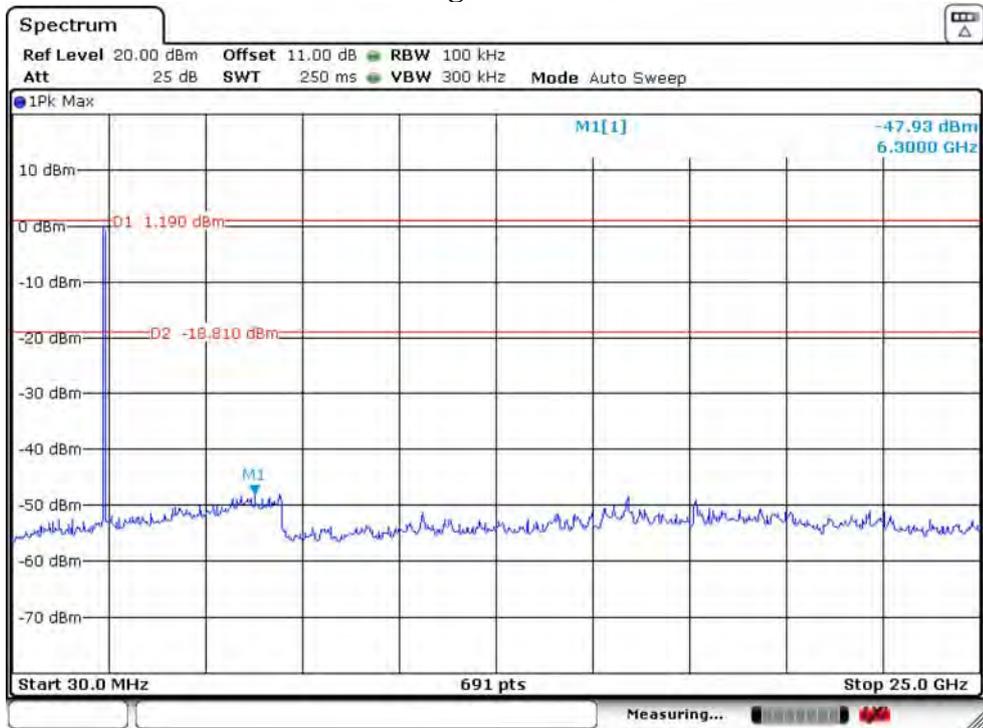


IEEE 802.11g 2437MHz_ANT 1

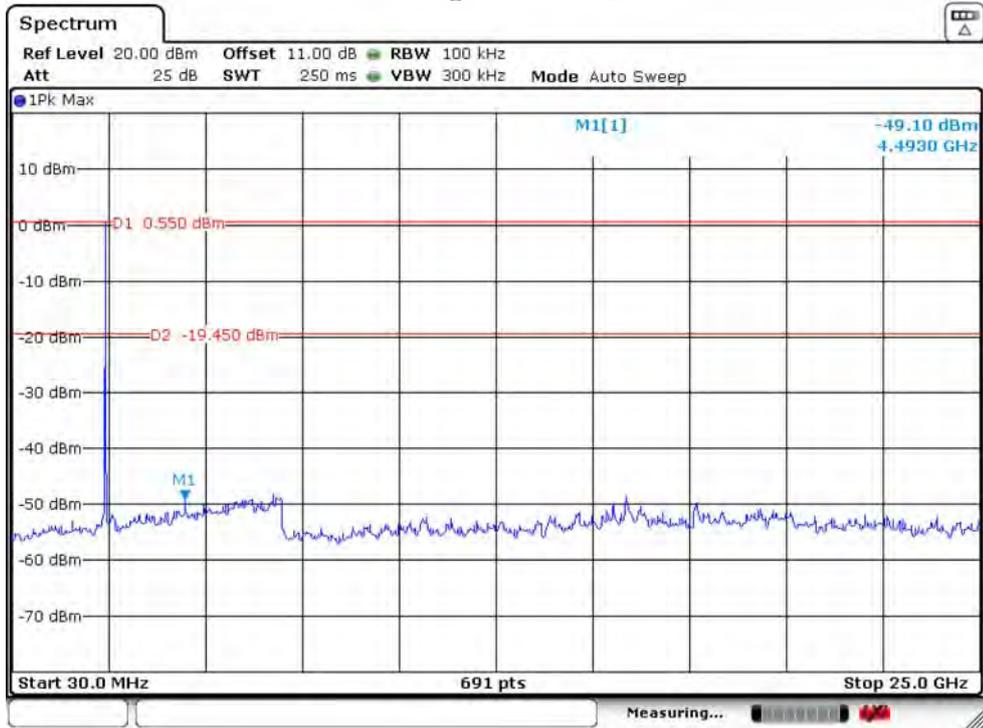


IEEE 802.11g 2437MHz_ANT 2

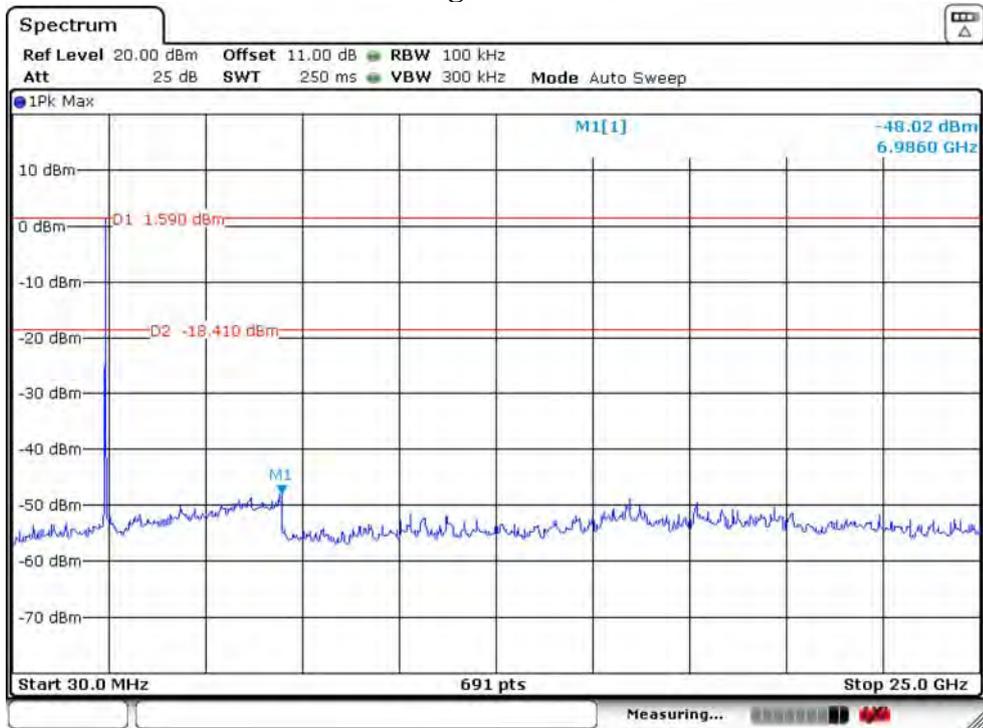


IEEE 802.11g 2462MHz_ANT 1

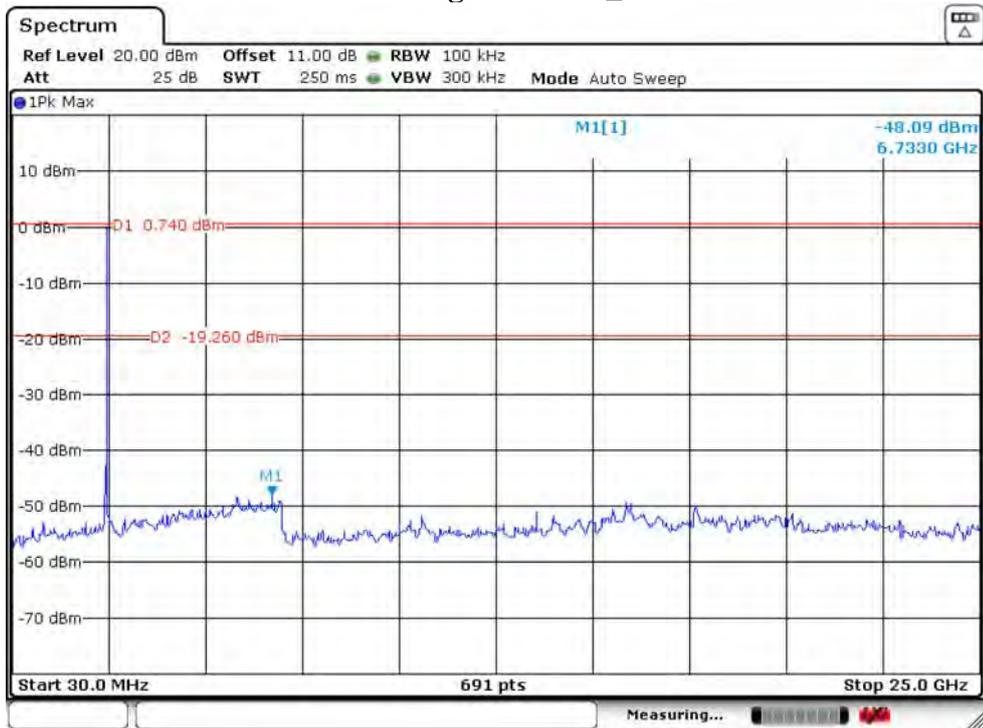


IEEE 802.11g 2462MHz_ANT 2

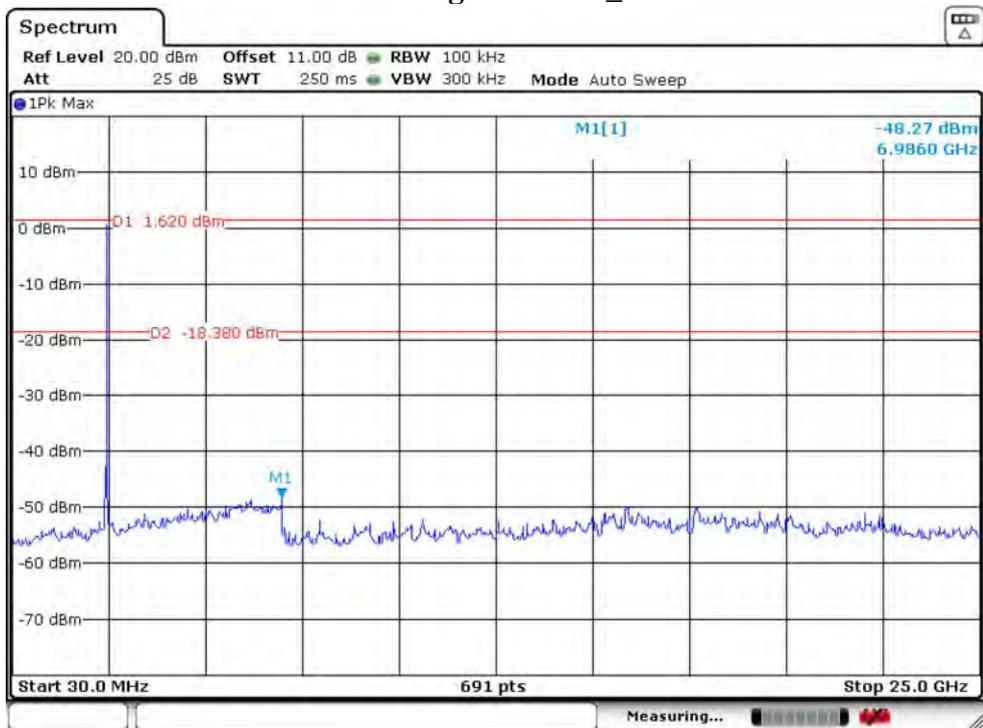


IEEE 802.11n HT20 2412MHz_ANT 1

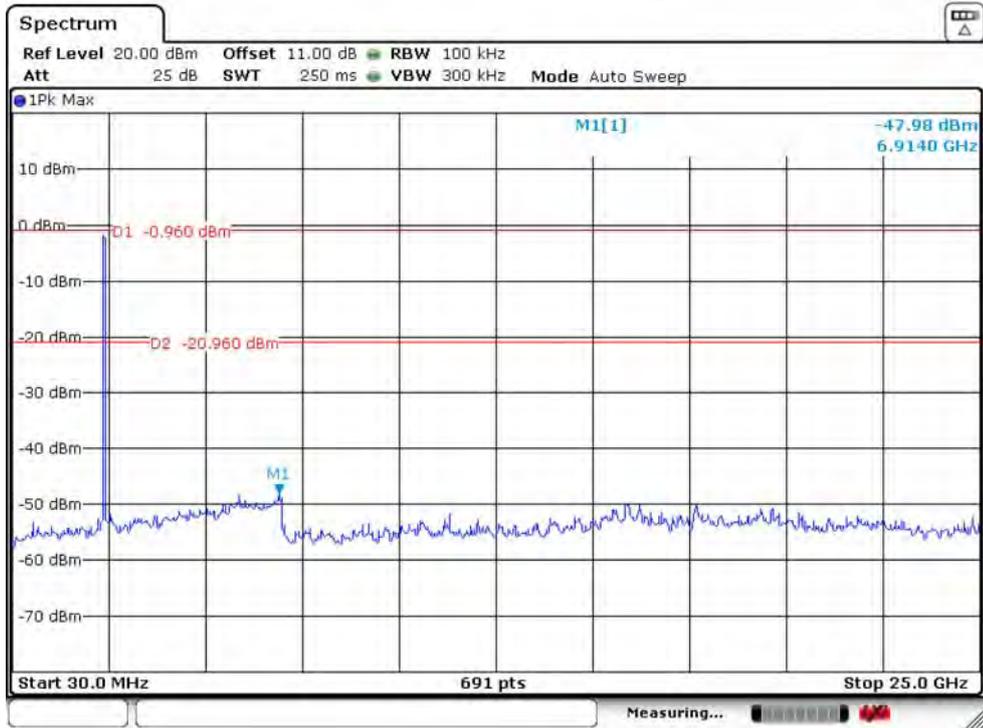


IEEE 802.11n HT20 2412MHz_ANT 2

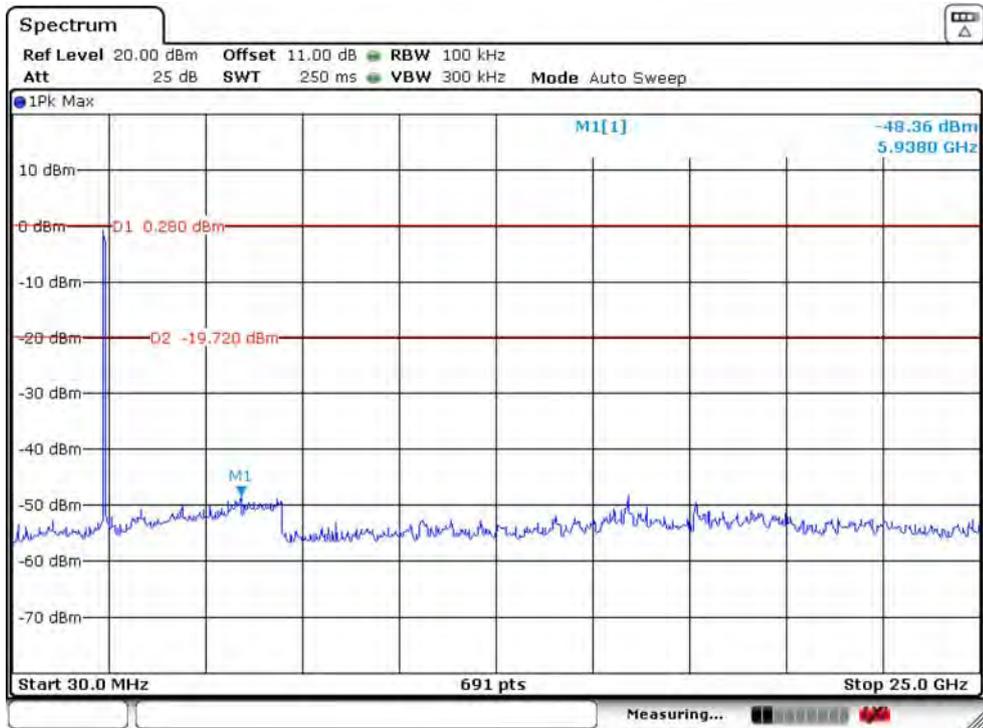


IEEE 802.11n HT20 2437MHz_ANT 1

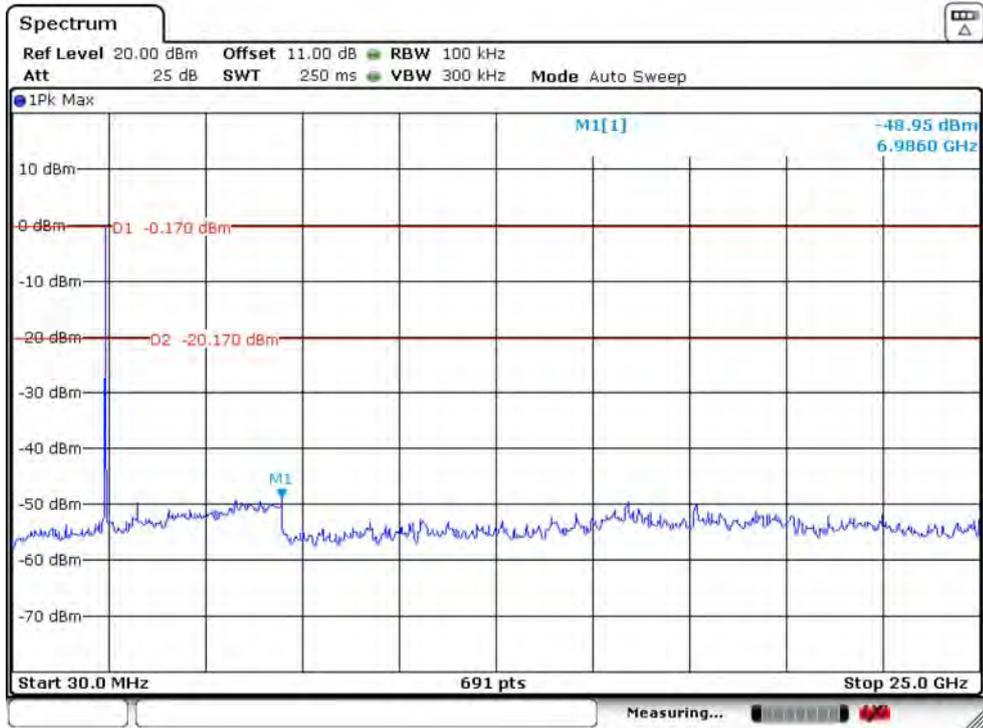


IEEE 802.11n HT20 2437MHz_ANT 2

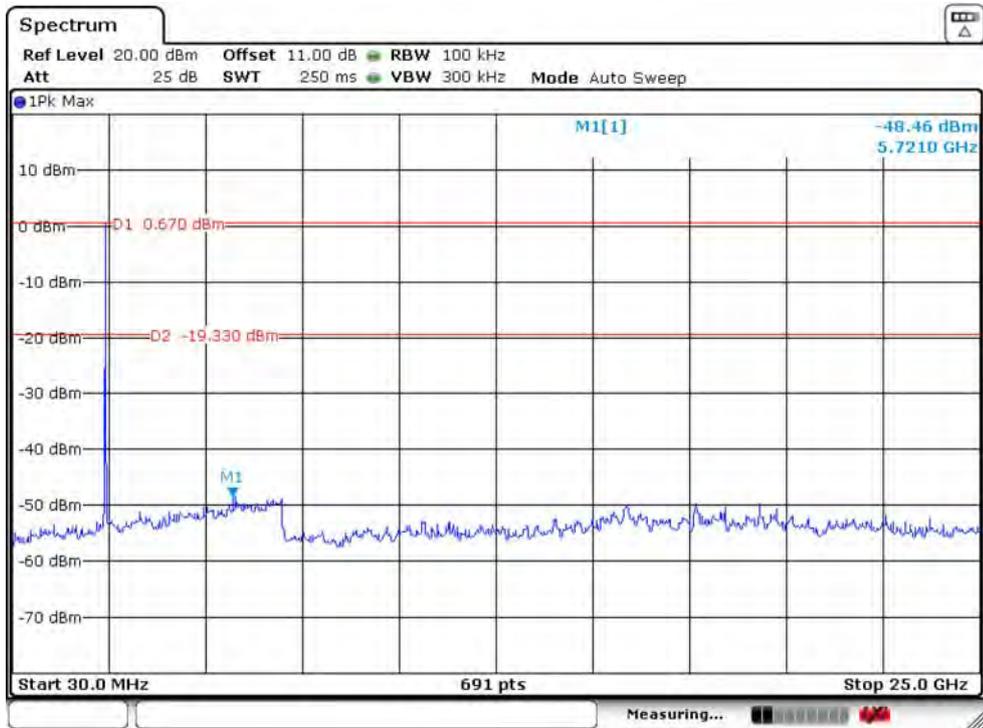


IEEE 802.11n HT20 2462MHz_ANT 1

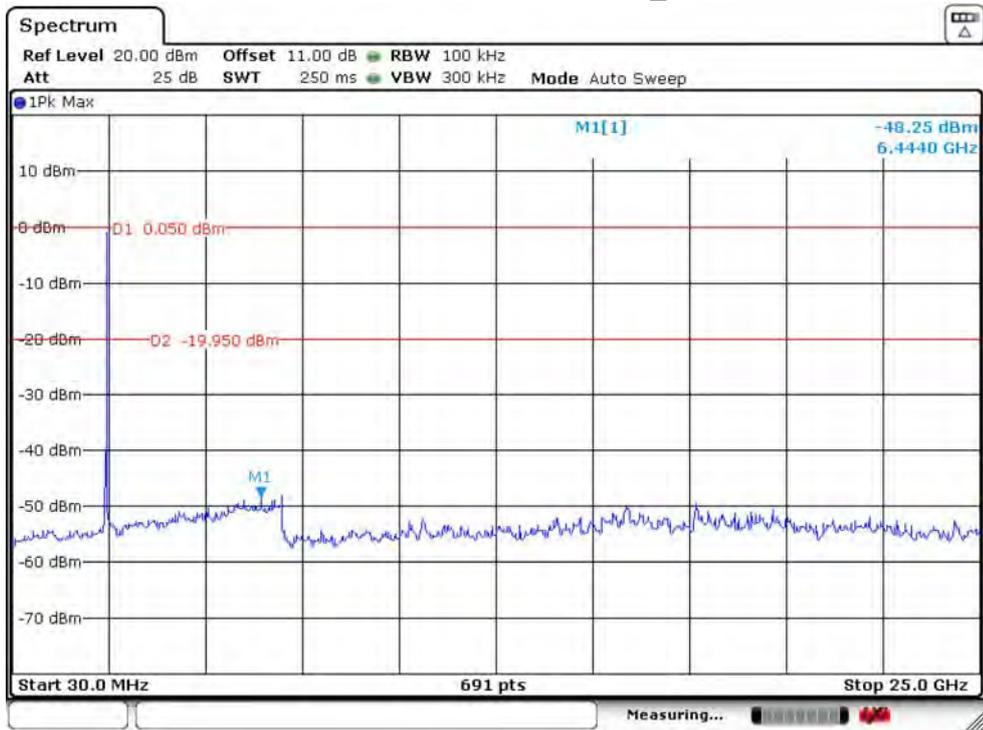


IEEE 802.11n HT20 2462MHz_ANT 2

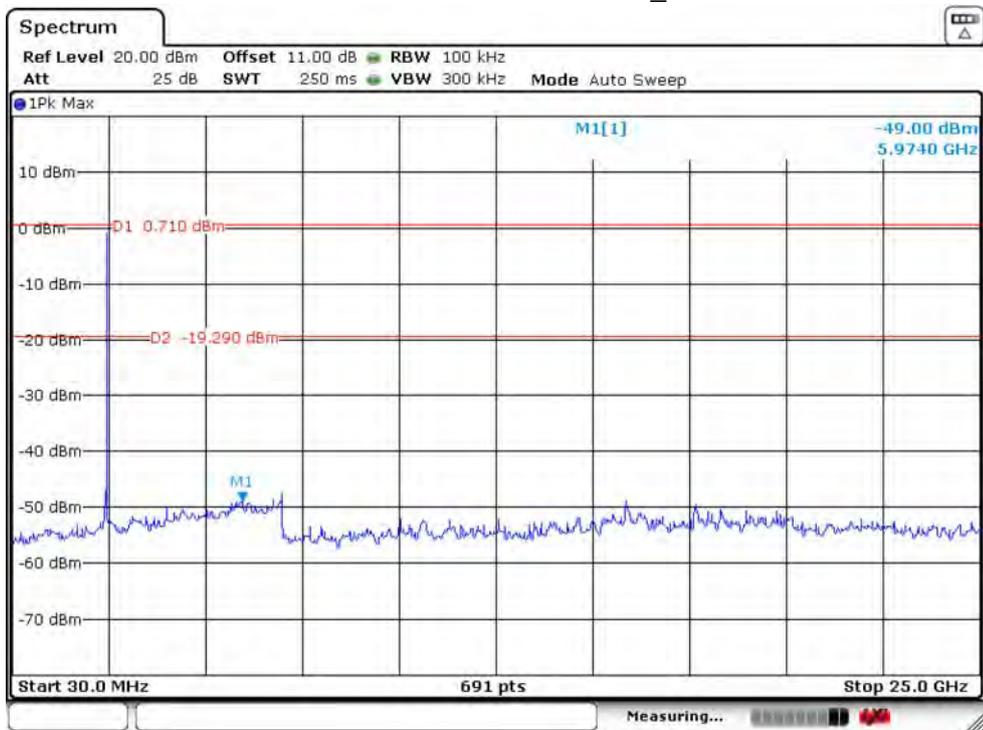


IEEE 802.11n HT40 2422MHz_ANT 1

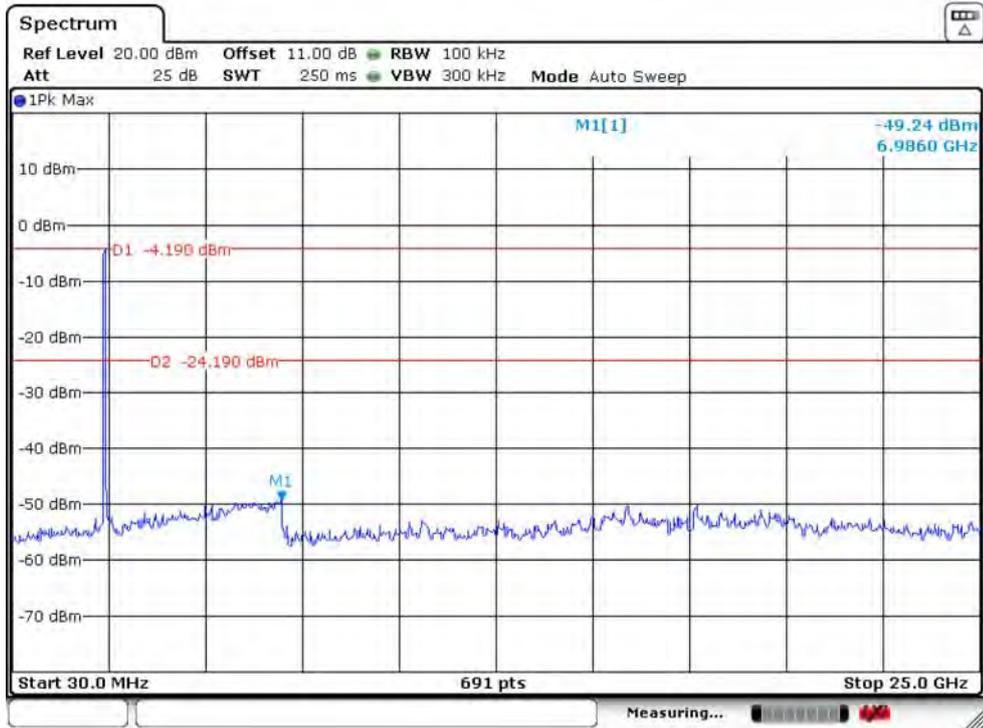


IEEE 802.11n HT40 2422MHz_ANT 2

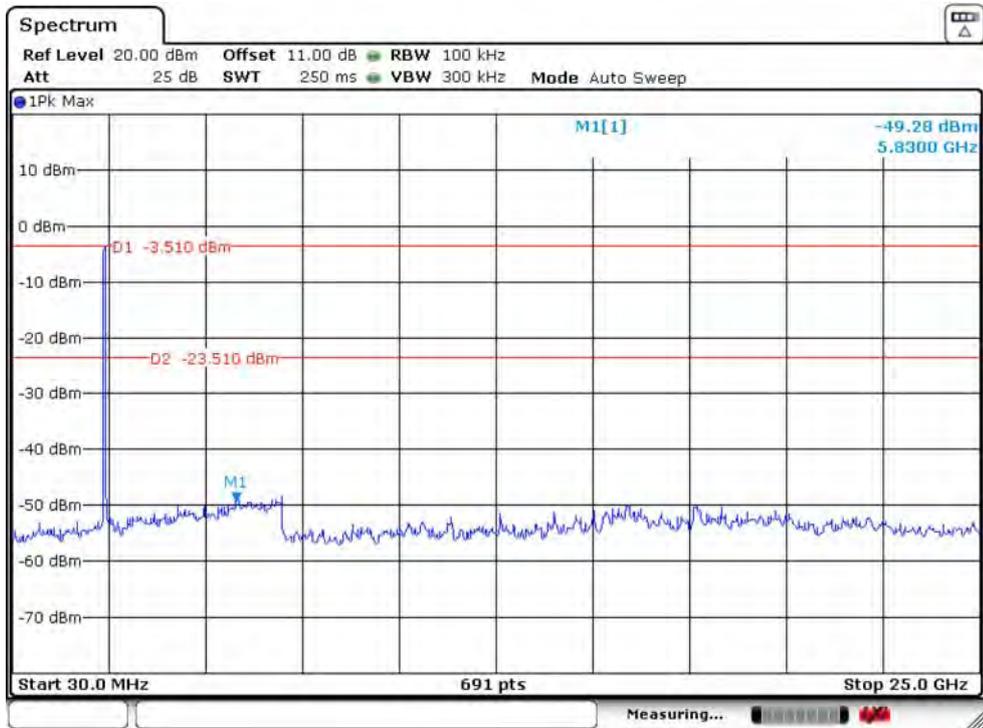


IEEE 802.11n HT40 2437MHz_ANT 1

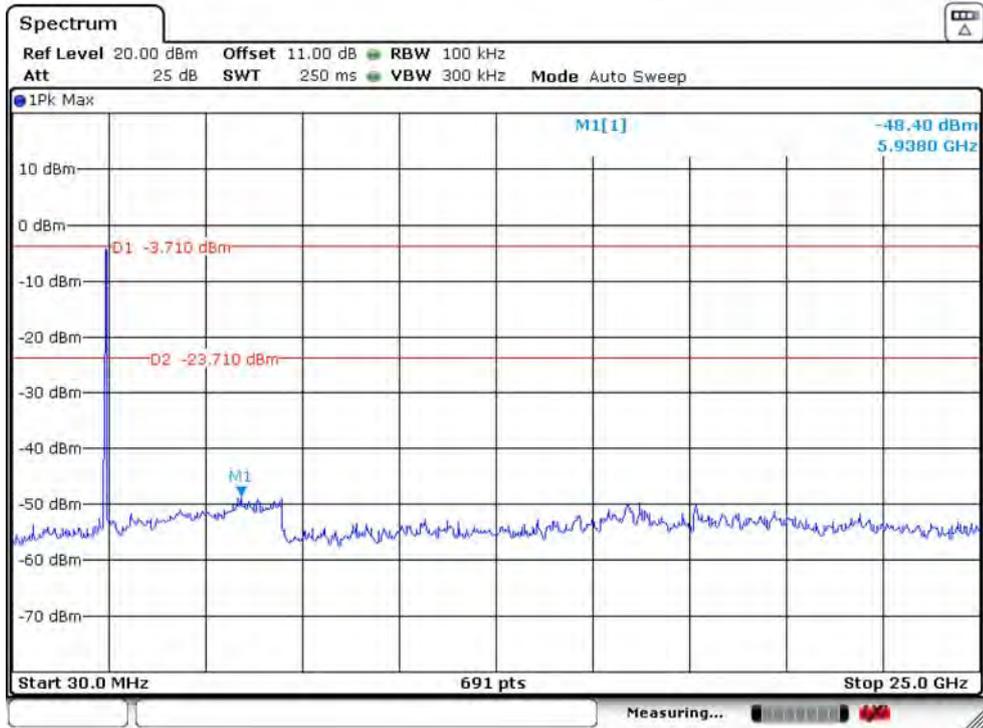


IEEE 802.11n HT40 2437MHz_ANT 2

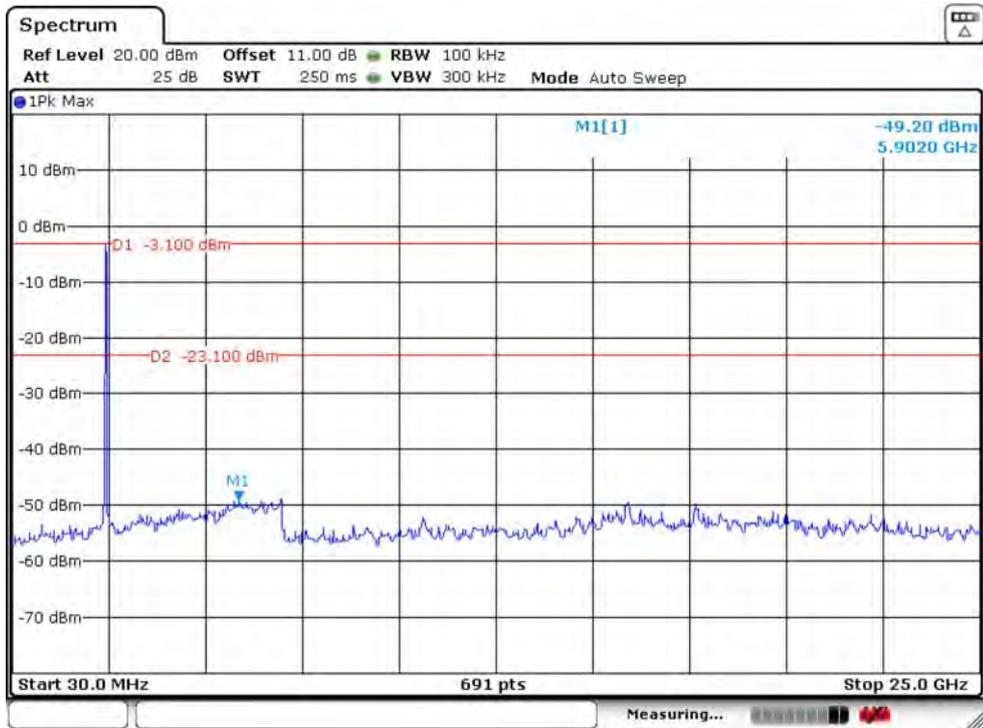


IEEE 802.11n HT40 2452MHz_ANT 1

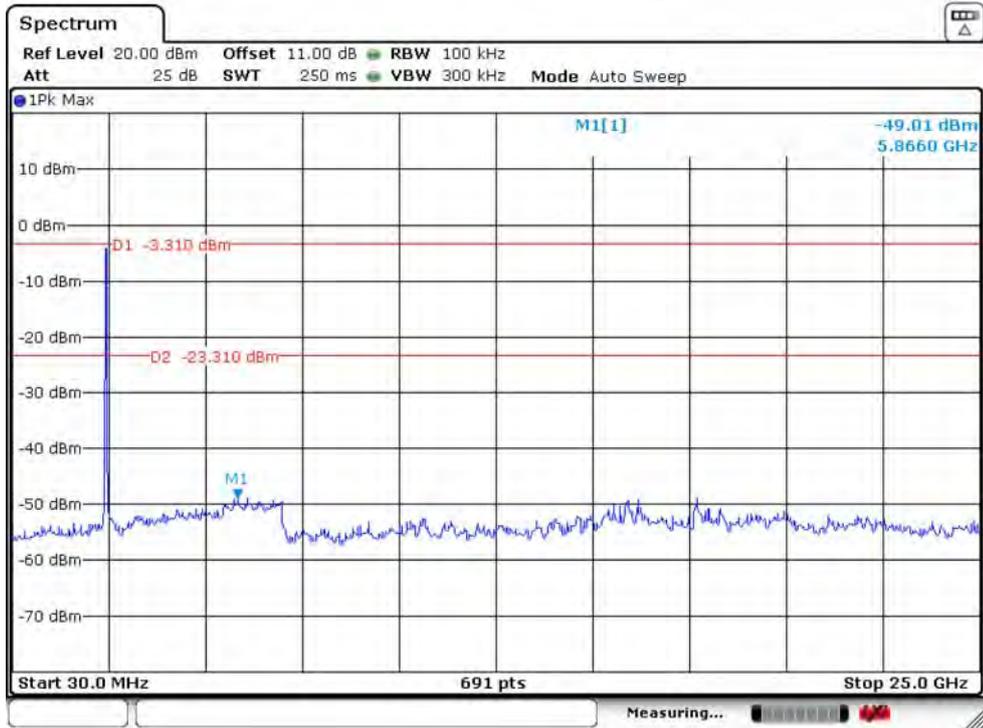


IEEE 802.11n HT40 2452MHz_ANT 2

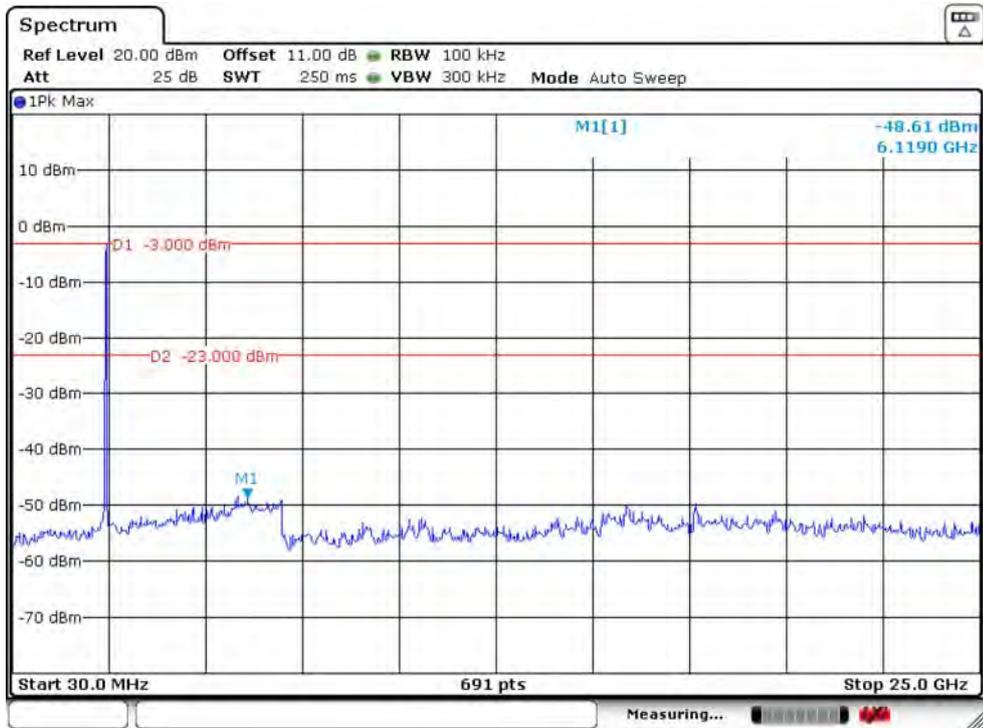


IEEE 802.11ax HE20 2412MHz_ANT 1

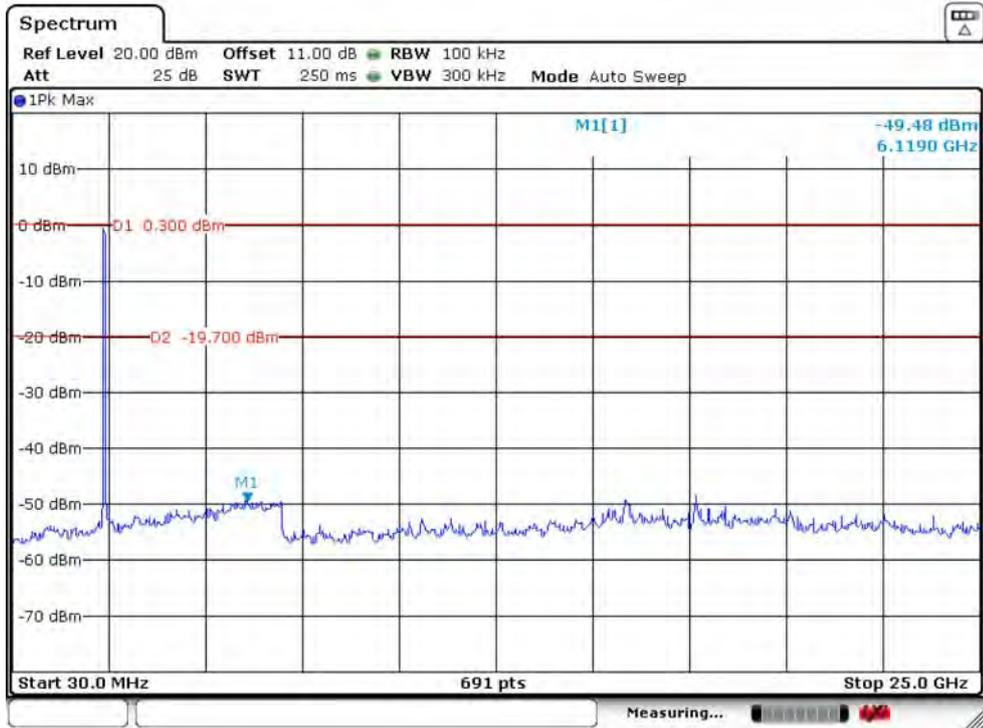


IEEE 802.11ax HE20 2412MHz_ANT 2

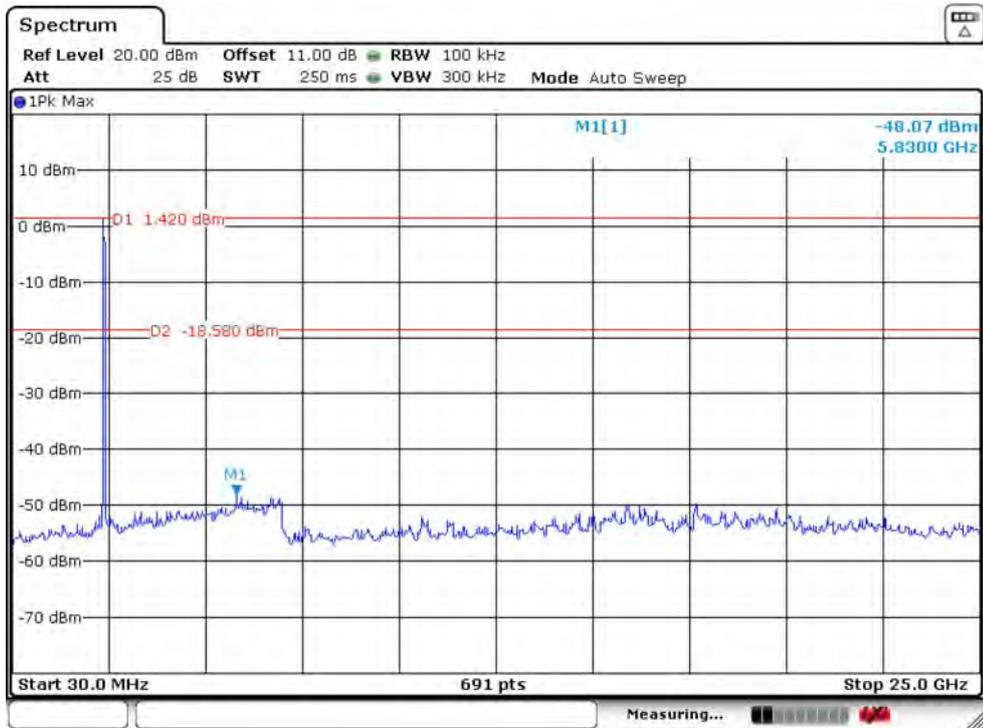


IEEE 802.11ax HE20 2437MHz_ANT 1

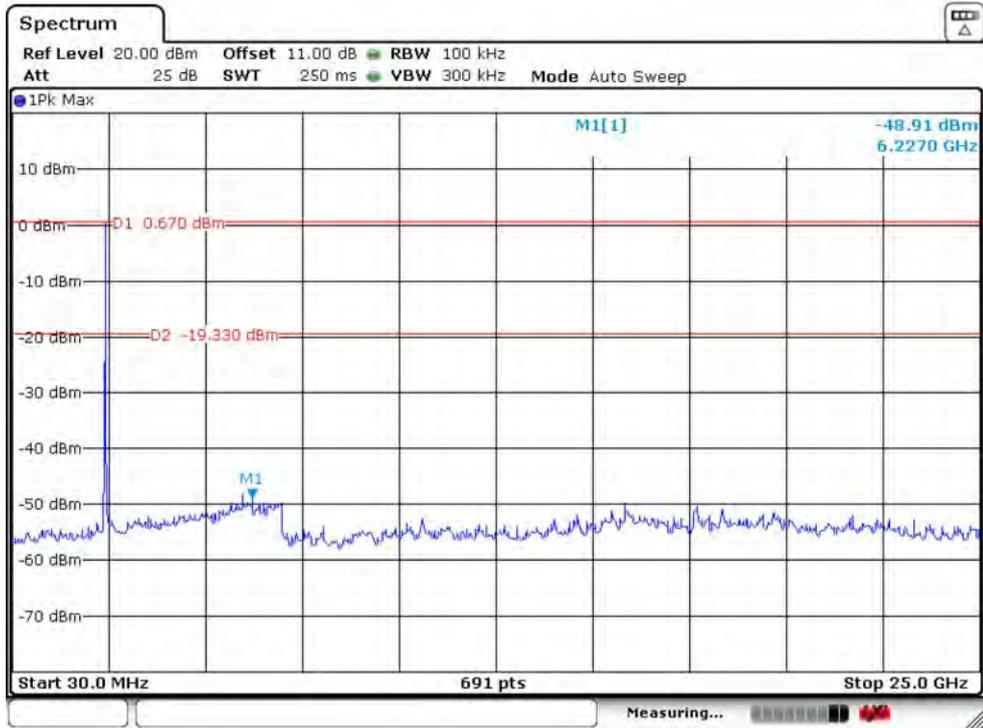


IEEE 802.11ax HE20 2437MHz_ANT 2

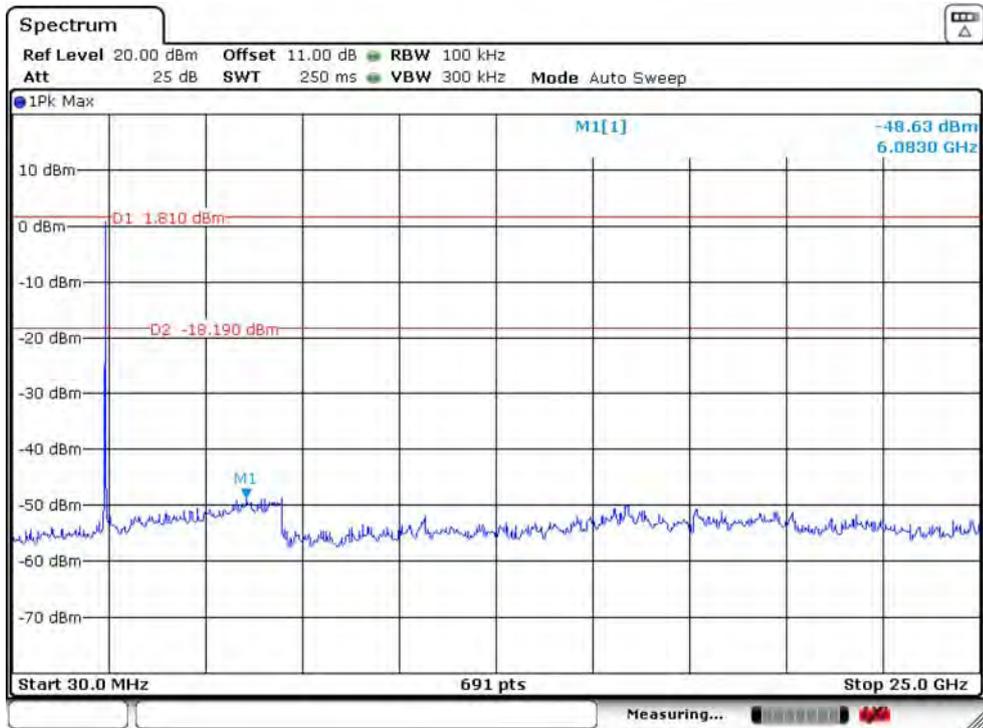


IEEE 802.11ax HE20 2462MHz_ANT 1

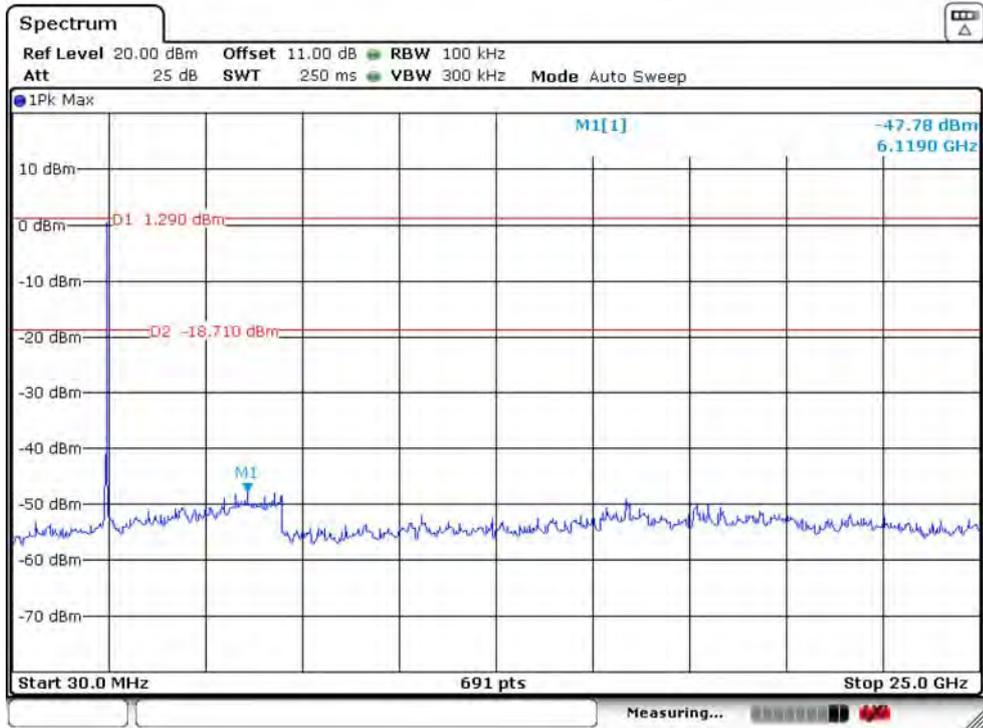


IEEE 802.11ax HE20 2462MHz_ANT 2

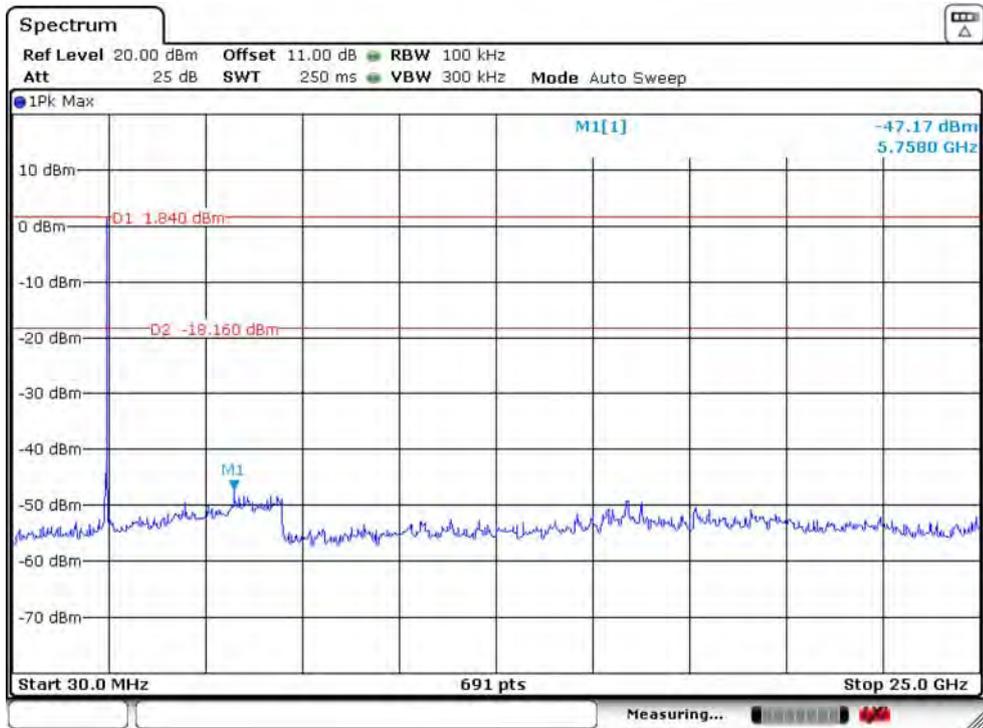


IEEE 802.11ax HE40 2422MHz_ANT 1

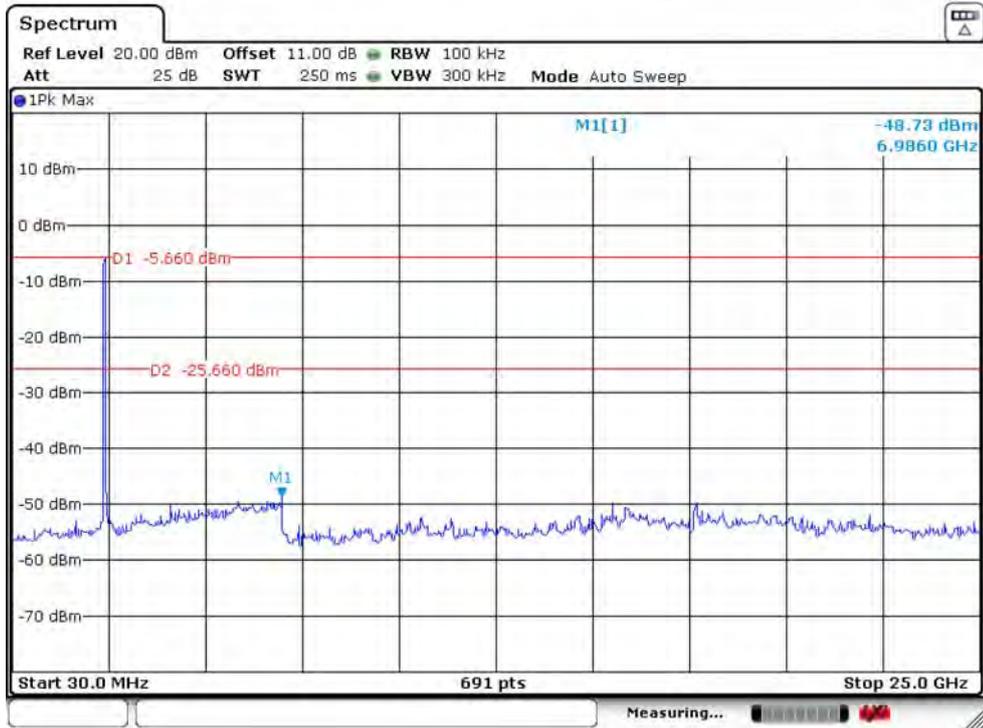


IEEE 802.11ax HE40 2422MHz_ANT 2

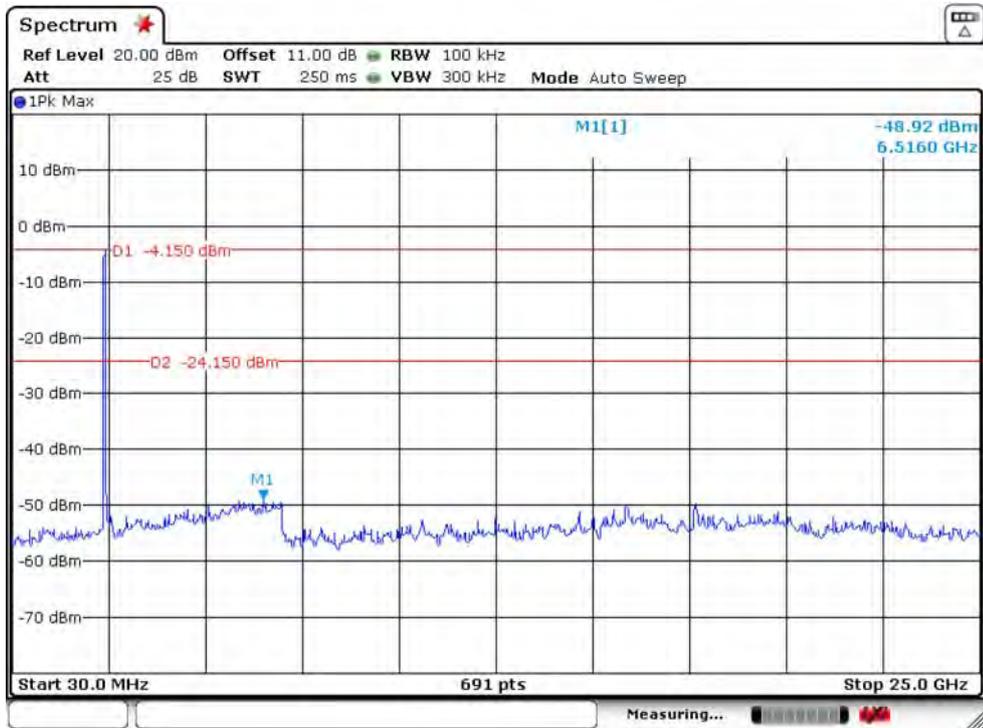


IEEE 802.11ax HE40 2437MHz_ANT 1

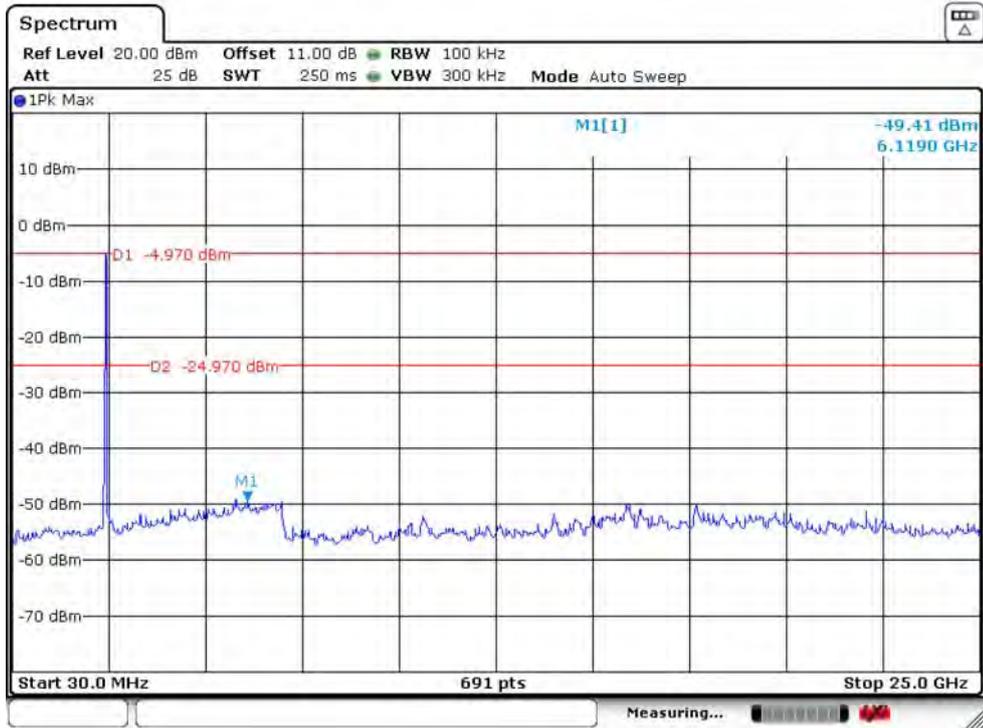


IEEE 802.11ax HE40 2437MHz_ANT 2

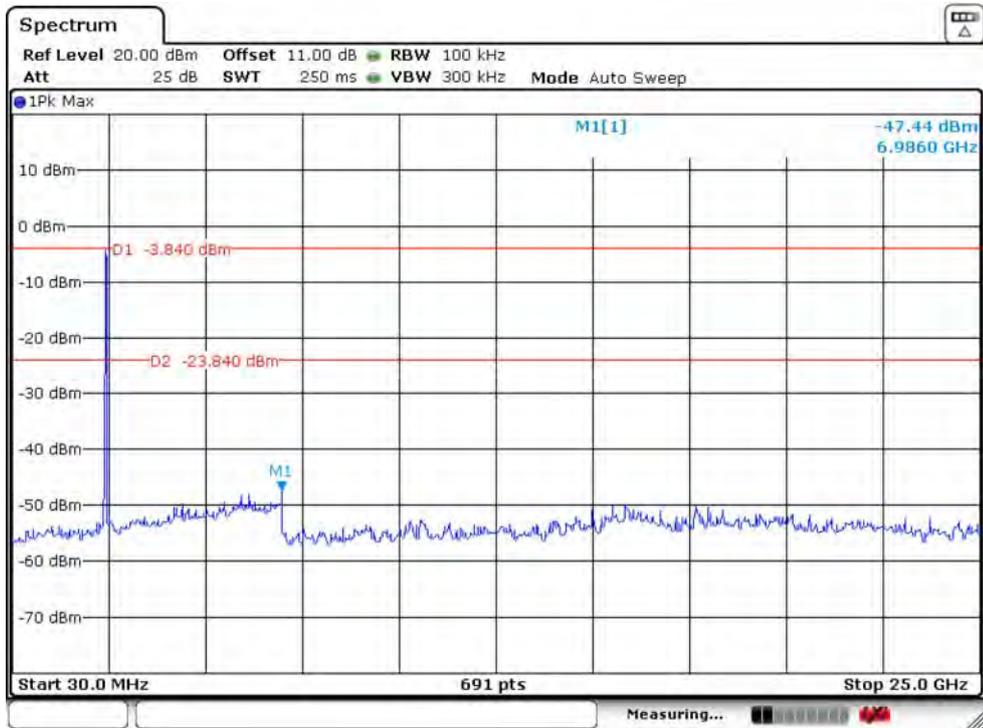

IEEE 802.11ax HE40 2452MHz_ANT 1

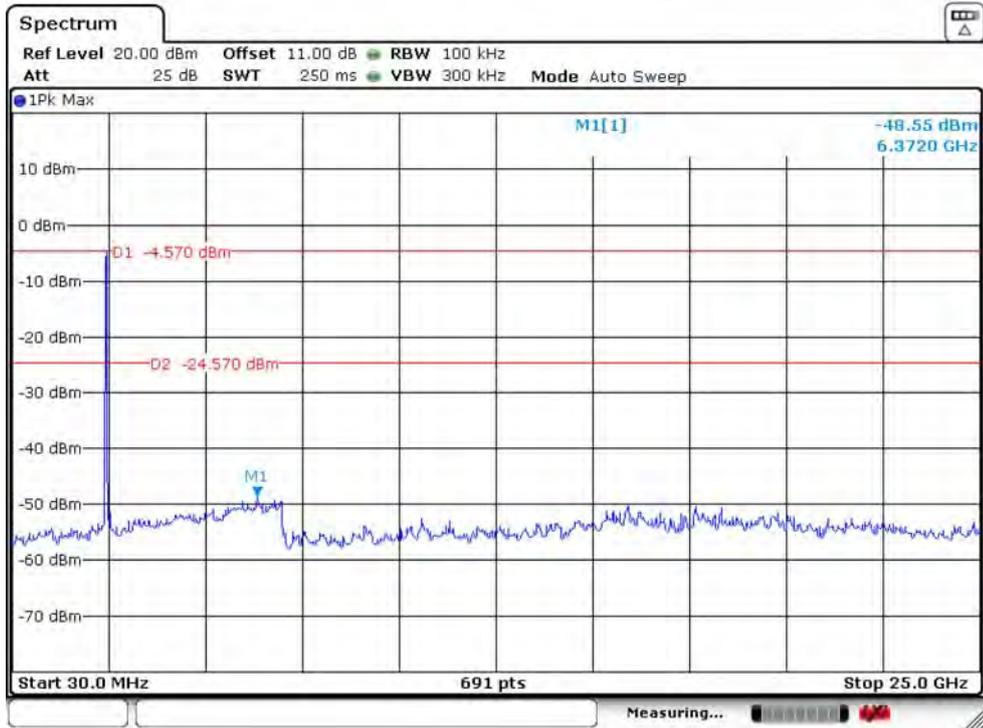

IEEE 802.11ax HE40 2452MHz_ANT 2

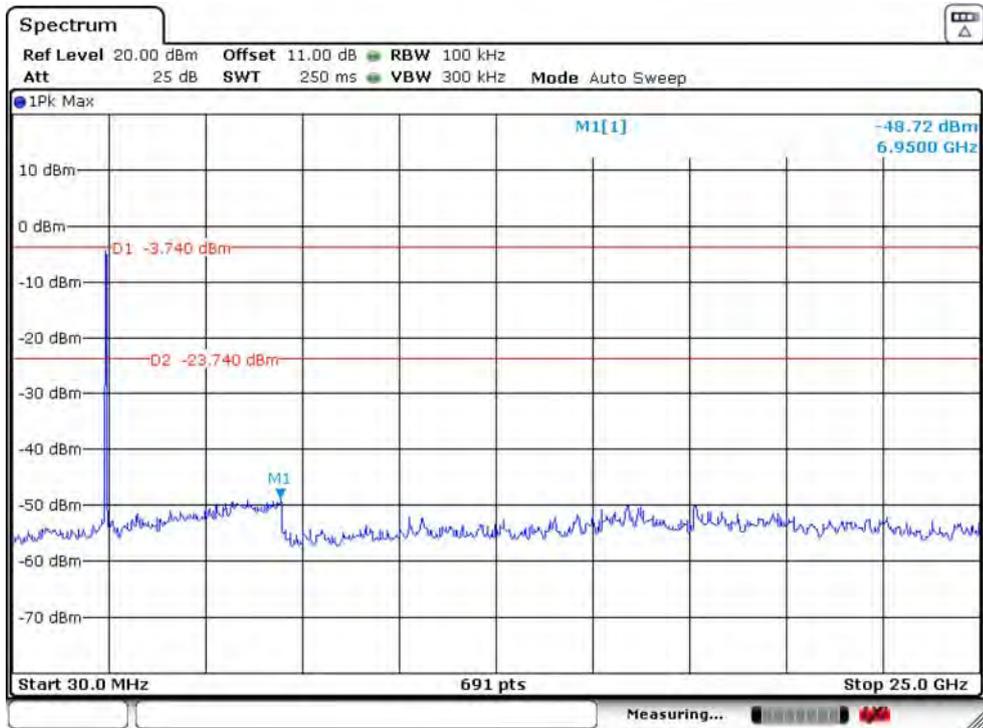

12. RADIATED SPURIOUS EMISSIONS AND BAND EDGE

12.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


Frequency (MHz)	Field Strength(μV/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:


- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$.
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

12.2. Test Setup


9kHz~30MHz

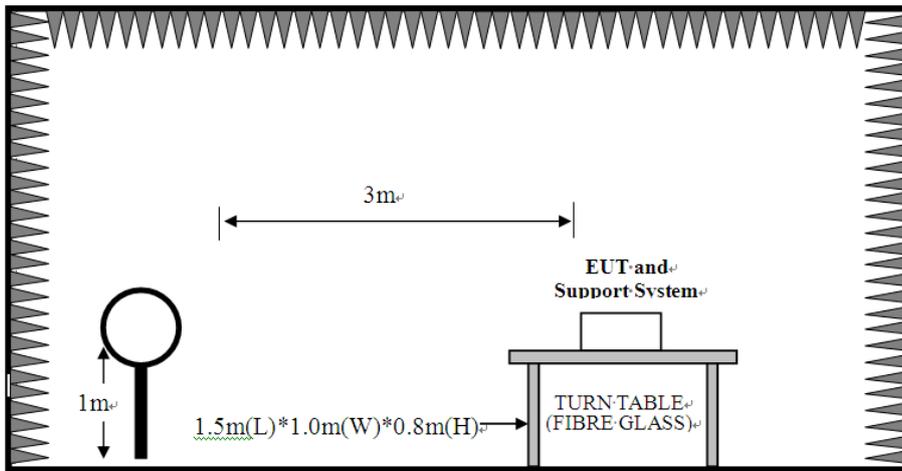

30~1000MHz

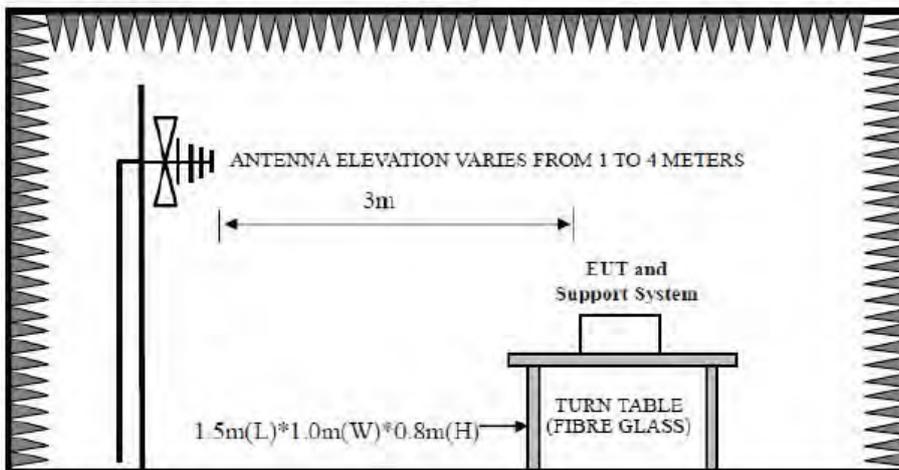

Above 1GHz

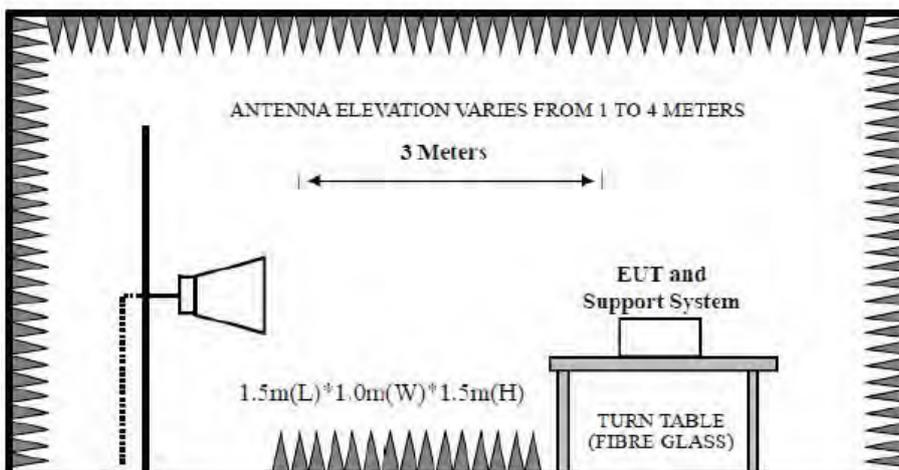

12.3.Spectrum Analyzer Setting

For 9KHz-150KHz

Spectrum Parameters	Setting
RBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
VBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
Start frequency	9KHz
Stop frequency	150KHz
Sweep Time	Auto
Detector	PEAK/QP/AVG
Trace Mode	Max Hold

For 150KHz-30MHz

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For 30MHz-1GHz

Spectrum Parameters	Setting
RBW	120KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	1GHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For Above 1GHz

Spectrum Parameters	Setting	
RBW	1MHz	
VBW	PEAK Measurement	
	3MHz	AVG Measurement
		Duty cycle $\geq 98\%$, VBW=10Hz
	Duty cycle $< 98\%$, VBW $\geq 1/T$	
Start frequency	1GHz	
Stop frequency	25GHz	
Sweep Time	Auto	
Detector	PEAK	
Trace Mode	Max Hold	

Note :

1. T is the on-time time of the duty cycle,when EUT transmit continuously with maximum output power,unit is seconds. reference section 2.8 for the on-time time.

12.4. Test Procedure

- a. EUT was placed on a turn table, which is 0.8 meter high above ground for below 1GHz test, and which is 1.5 meter high above ground for above 1GHz test.
- b. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower.
- c. Set the EUT transmit continuously with maximum output power.
- d. The turn table can rotate 360 degrees to determine the position of the maximum emission level.
- e. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.
- f. Spectrum analyzer setting parameters in accordance with section 8.3.
- g. Repeat above procedures until all channels were measured.
- h. Record the results in the test report.

Note:

1. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
2. The frequency 2412MHz/2422MHz/2437MHz/2452MHz/2462MHz are fundamental frequency, which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.
3. IEEE 802.11b, IEEE 802.11g, IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ax HE20, IEEE 802.11ax HE40 all have been tested, only worst case 802.11ax HE20 is recorded.


12.5.Test Result

Radiated Emissions Below 1GHz

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan,Guangdong,China
Tel:+86-769-83081888
Fax:+86-769-83081878

Data: 3 File: \\EMC-966-2\test data\2022\RFIC\Chao Cheng\Chao Sheng-1.EM6 (14) Date: 2022-03-16

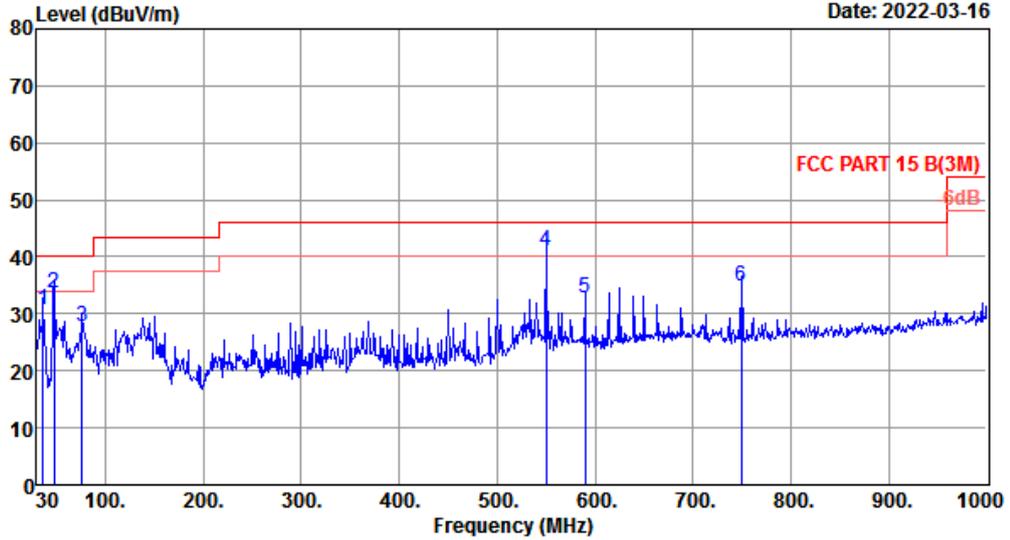

Site no. : 2# 966 chamber Data no. : 3
 Dis. / Ant. : 3m 47018 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:21.6°C;Humi:52%;Press:101.52kPa
 Engineer : XJ
 EUT : Sound Bar
 Power : AC 120V/60Hz
 M/N : Beosound Theatre
 Test Mode : TX Mode


	ANT	Cable	Emission		Limit	Margin	Remark	
Freq. (MHz)	Factor (dB/m)	Loss (dB)	Reading (dBuV)	Level (dBuV/m)	(dBuV/m)	(dB)		
1	36.790	13.75	0.22	16.78	30.75	40.00	9.25	QP
2	47.460	9.67	0.27	23.70	33.64	40.00	6.36	QP
3	76.560	7.00	0.58	20.27	27.85	40.00	12.15	QP
4	549.920	19.60	2.43	19.00	41.03	46.00	4.97	QP
5	589.690	20.10	2.52	10.28	32.90	46.00	13.10	QP
6	749.740	22.10	3.15	9.44	34.69	46.00	11.31	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 4 File: \\EMC-966-2\test data\2022\RFIC\Chao Cheng\Chao Sheng-1.EM6 (14) Date: 2022-03-16

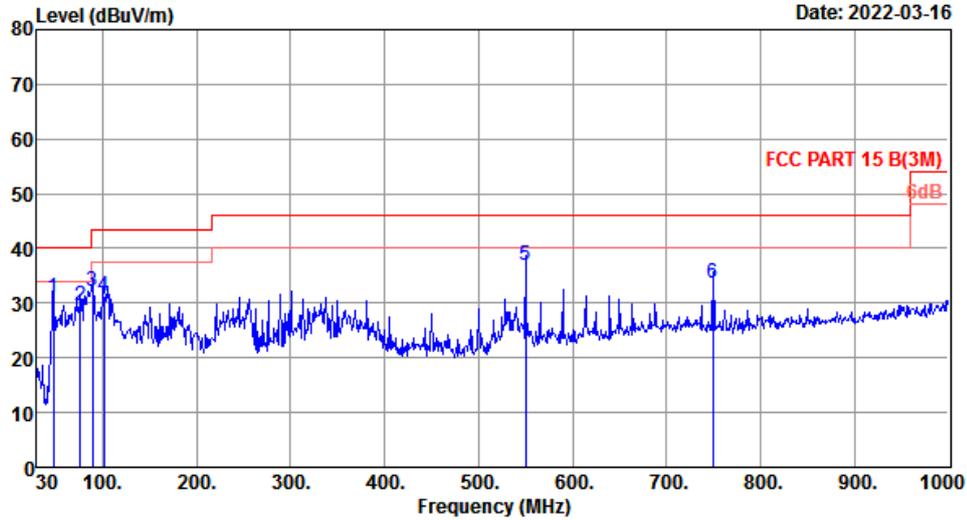

Site no. : 2# 966 chamber Data no. : 4
 Dis. / Ant. : 3m 47018 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:21.6°C;Humi:52%;Press:101.52kPa
 Engineer : XJ
 EUT : Sound Bar
 Power : AC 120V/60Hz
 M/N : Beosound Theatre
 Test Mode : TX Mode

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	47.460	9.67	0.27	20.93	30.87	40.00	9.13	QP
2	76.560	7.00	0.58	22.03	29.61	40.00	10.39	QP
3	89.170	9.26	0.70	22.26	32.22	43.50	11.28	QP
4	101.780	10.10	0.81	20.28	31.19	43.50	12.31	QP
5	549.920	19.60	2.43	14.73	36.76	46.00	9.24	QP
6	749.740	22.10	3.15	8.48	33.73	46.00	12.27	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. All channels had been pre-test, only the worst case was reported.




Radiated Emissions Above 1G

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 1 File: \\EMC-966-1\test data\2022\RFIC\Chao Sheng\Beosound Theatre (FCC IC).EM6 (88) Date: 2022-03-25

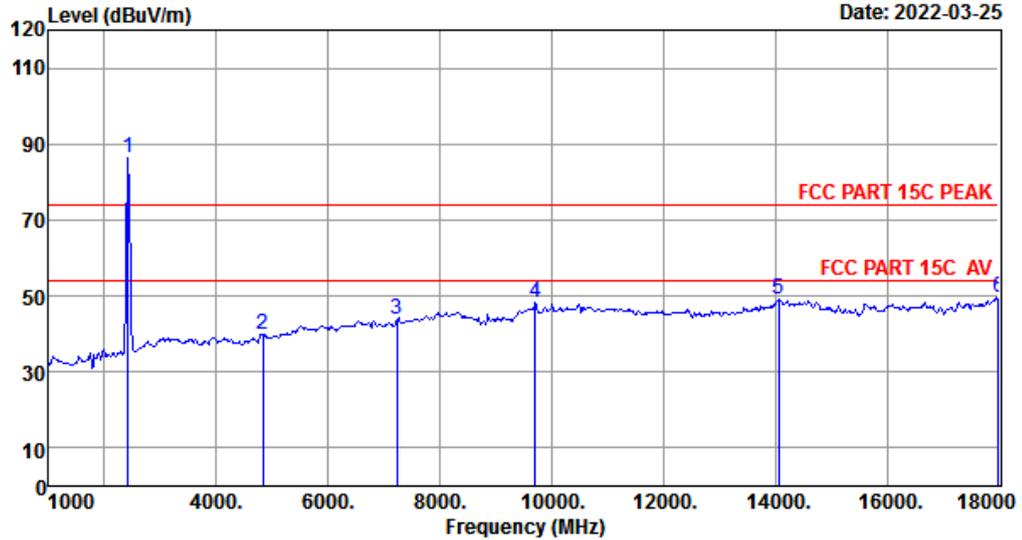


Site no. : 1# 966 Chamber Data no. : 1
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:21.8';Humi:51%;Press:101.52kPa
 Engineer : JBR
 EUT : Sound Bar
 Power : AC 120V/60Hz
 M/N : Beosound Theatre
 Test Mode : IEEE 802.11ax HE20 TX 2412MHz
 ANT1+ANT2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.000	27.28	1.46	34.64	92.24	86.34	74.00	-12.34	Peak
2	4824.000	31.18	3.26	34.67	39.87	39.64	74.00	34.36	Peak
3	7236.000	36.28	5.20	34.82	37.04	43.70	74.00	30.30	Peak
4	9704.000	38.31	5.66	34.26	38.73	48.44	74.00	25.56	Peak
5	14056.000	41.09	6.57	34.32	35.78	49.12	74.00	24.88	Peak
6	18000.000	48.90	8.24	34.30	26.86	49.70	74.00	24.30	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.



Data: 2 File: \\EMC-966-1\test data\2022\RFIC\Chao Sheng\Beosound Theatre (FCC IC).EM6 (88)

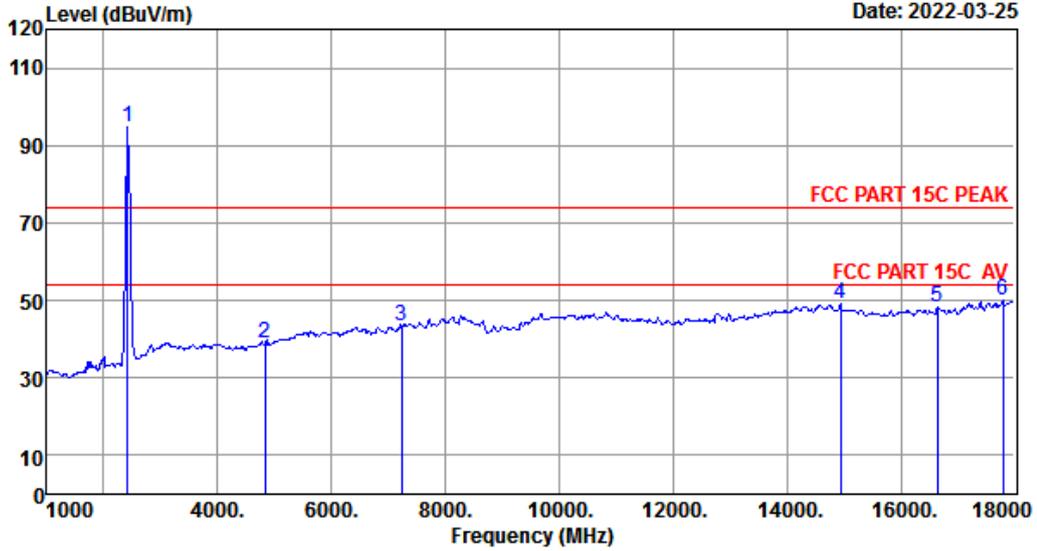

Date: 2022-03-25


Site no. : 1# 966 Chamber Data no. : 2
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:21.8';Humi:51%;Press:101.52kPa
 Engineer : JBR
 EUT : Sound Bar
 Power : AC 120V/60Hz
 M/N : Beosound Theatre
 Test Mode : IEEE 802.11ax HE20 TX 2412MHz
 ANT1+ANT2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.000	27.28	1.46	34.64	100.52	94.62	74.00	-20.62	Peak
2	4824.000	31.18	3.26	34.67	39.03	38.80	74.00	35.20	Peak
3	7236.000	36.28	5.20	34.82	36.85	43.51	74.00	30.49	Peak
4	14940.000	40.91	6.82	34.58	35.80	48.95	74.00	25.05	Peak
5	16640.000	40.51	7.20	34.33	34.99	48.37	74.00	25.63	Peak
6	17796.000	47.27	8.11	34.32	28.94	50.00	74.00	24.00	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Data: 3 File: \\EMC-966-1\test data\2022\RFIC\Chao Sheng\Beosound Theatre (FCC IC).EM6 (88)

Date: 2022-03-25

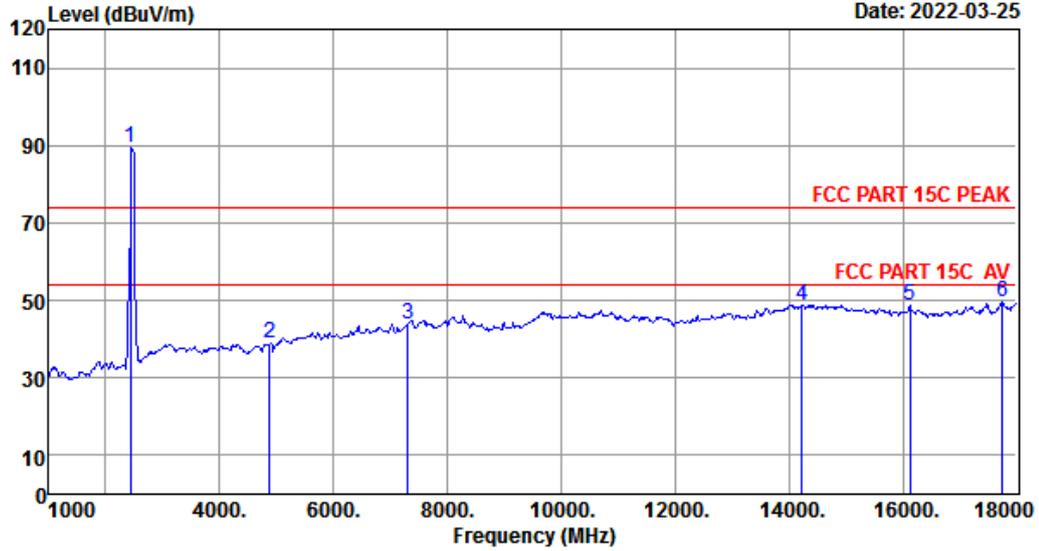


Site no. : 1# 966 Chamber Data no. : 3
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:21.8';Humi:51%;Press:101.52kPa
 Engineer : JBR
 EUT : Sound Bar
 Power : AC 120V/60Hz
 M/N : Beosound Theatre
 Test Mode : IEEE 802.11ax HE20 TX 2437MHz
 ANT1+ANT2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.000	27.33	1.47	34.62	95.41	89.59	74.00	-15.59	Peak
2	4874.000	31.37	3.31	34.68	38.87	38.87	74.00	35.13	Peak
3	7311.000	36.42	5.22	34.83	37.10	43.91	74.00	30.09	Peak
4	14226.000	41.06	6.70	34.37	35.50	48.89	74.00	25.11	Peak
5	16130.000	39.95	6.97	34.23	35.85	48.54	74.00	25.46	Peak
6	17745.000	46.87	8.07	34.33	28.81	49.42	74.00	24.58	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Data: 4 File: \\EMC-966-1\test data\2022\RFIC\Chao Sheng\Beosound Theatre (FCC IC).EM6 (88)

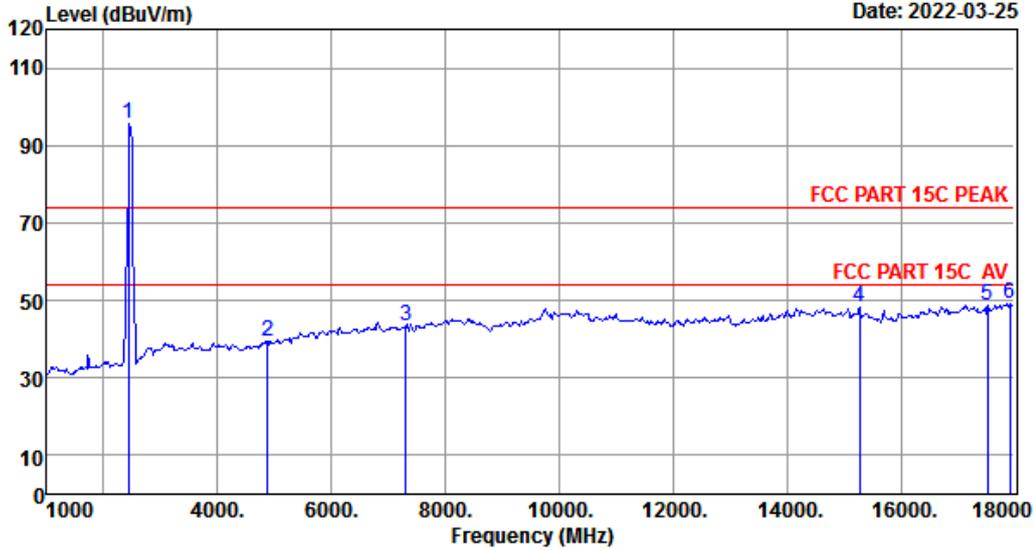


Site no. : 1# 966 Chamber Data no. : 4
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:21.8';Humi:51%;Press:101.52kPa
 Engineer : JBR
 EUT : Sound Bar
 Power : AC 120V/60Hz
 M/N : Beosound Theatre
 Test Mode : IEEE 802.11ax HE20 TX 2437MHz
 ANT1+ANT2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.000	27.33	1.47	34.62	101.29	95.47	74.00	-21.47	Peak
2	4874.000	31.37	3.31	34.68	39.41	39.41	74.00	34.59	Peak
3	7311.000	36.42	5.22	34.83	36.74	43.55	74.00	30.45	Peak
4	15280.000	40.60	6.60	34.49	35.68	48.39	74.00	25.61	Peak
5	17524.000	45.10	7.93	34.35	30.07	48.75	74.00	25.25	Peak
6	17915.000	48.22	8.18	34.31	26.99	49.08	74.00	24.92	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Data: 5 File: \\EMC-966-1\test data\2022\RFIC\Chao Sheng\Beosound Theatre (FCC IC).EM6 (88)

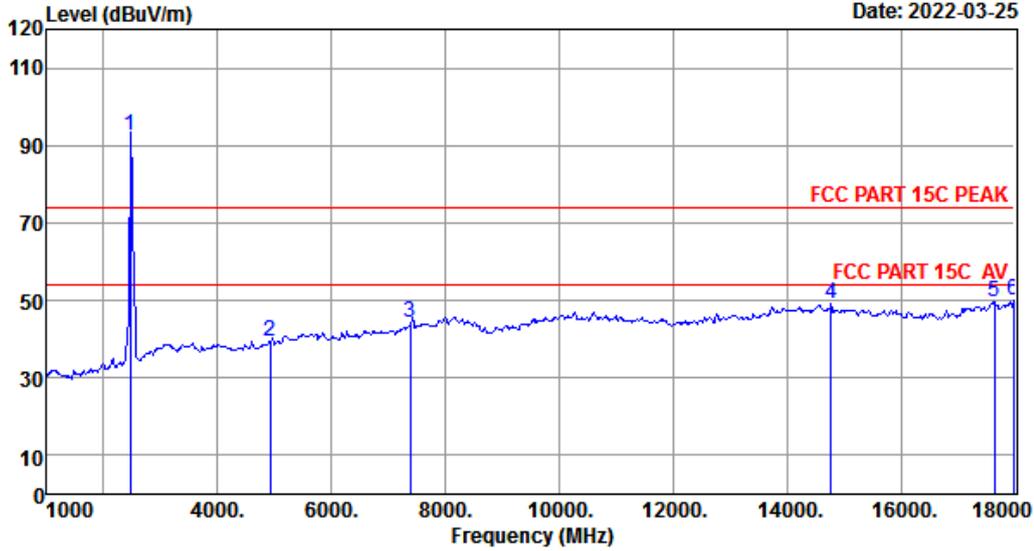

Site no. : 1# 966 Chamber Data no. : 5
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:21.8';Humi:51%;Press:101.52kPa
 Engineer : JBR
 EUT : Sound Bar
 Power : AC 120V/60Hz
 M/N : Beosound Theatre
 Test Mode : IEEE 802.11ax HE20 TX 2462MHz
 ANT1+ANT2


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2462.000	27.35	1.48	34.62	98.22	92.43	74.00	-18.43	Peak
2	4924.000	31.55	3.35	34.69	39.30	39.51	74.00	34.49	Peak
3	7386.000	36.59	5.24	34.84	37.11	44.10	74.00	29.90	Peak
4	14770.000	40.95	6.85	34.53	35.68	48.95	74.00	25.05	Peak
5	17643.000	46.05	8.01	34.34	29.90	49.62	74.00	24.38	Peak
6	17983.000	48.76	8.23	34.30	27.19	49.88	74.00	24.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 6 File: \\EMC-966-1\test data\2022\RFIC\Chao Sheng\Beosound Theatre (FCC IC).EM6 (88) Date: 2022-03-25

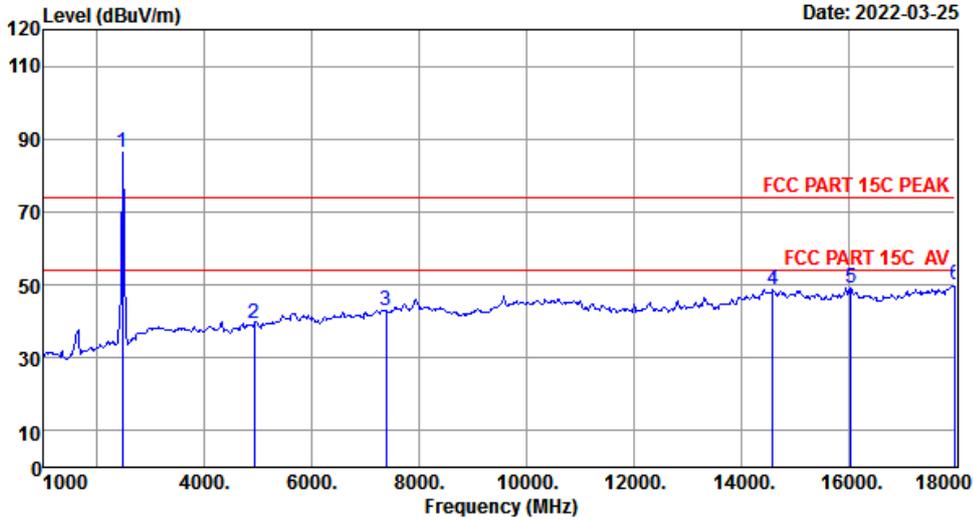

Site no. : 1# 966 Chamber Data no. : 6
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:21.8%; Humi:51%; Press:101.52kPa
 Engineer : JBR
 EUT : Sound Bar
 Power : AC 120V/60Hz
 M/N : Beosound Theatre
 Test Mode : IEEE 802.11ax HE20 TX 2462MHz
 ANT1+ANT2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.000	27.35	1.48	34.62	92.10	86.31	74.00	-12.31	Peak
2	4924.000	31.55	3.35	34.69	39.11	39.32	74.00	34.68	Peak
3	7386.000	36.59	5.24	34.84	35.86	42.85	74.00	31.15	Peak
4	14600.000	40.98	6.88	34.48	35.35	48.73	74.00	25.27	Peak
5	16045.000	39.86	6.93	34.21	36.60	49.18	74.00	24.82	Peak
6	18000.000	48.90	8.24	34.30	27.04	49.88	74.00	24.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. The amplitude of 18GHz to 25GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.




Radiated Band Edge

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 7 File: \\EMC-966-1\test data\2022\RFIC\Chao Sheng\Beosound Theatre (FCC IC).EM6 (88)

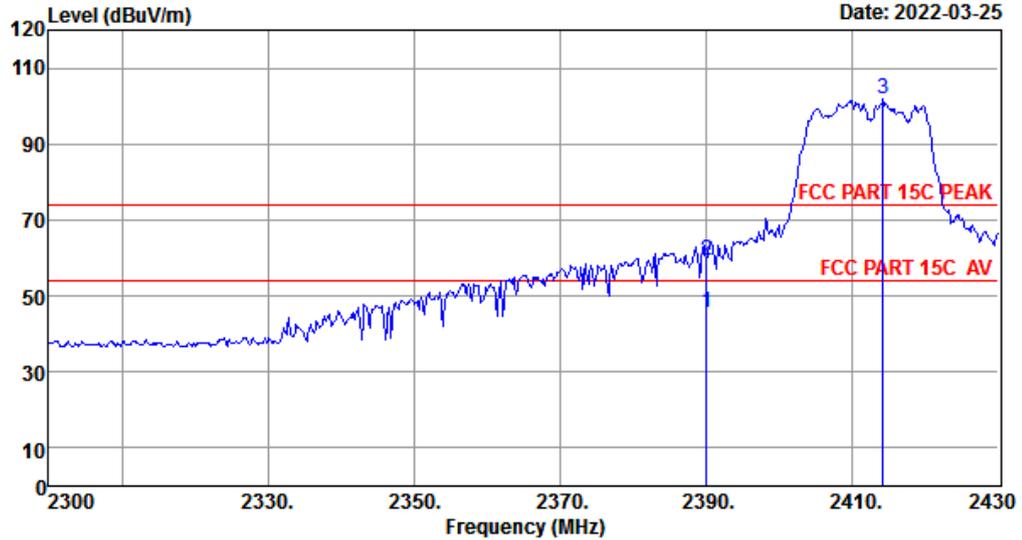

Site no. : 1# 966 Chamber Data no. : 7
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:21.8';Humi:51%;Press:101.52kPa
 Engineer : JBR
 EUT : Sound Bar
 Power : AC 120V/60Hz
 M/N : Beosound Theatre
 Test Mode : IEEE 802.11ax HE20 TX 2412MHz
 ANT1+ANT2


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.26	1.45	34.64	51.55	45.62	54.00	8.38	Average
2	2390.000	27.26	1.45	34.64	65.34	59.41	74.00	14.59	Peak
3	2414.140	27.28	1.46	34.64	107.54	101.64	74.00	-27.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.



Data: 8 File: \\EMC-966-1\test data\2022\RF\IC\Chao Sheng\Beosound Theatre (FCC IC).EM6 (88)

Date: 2022-03-25

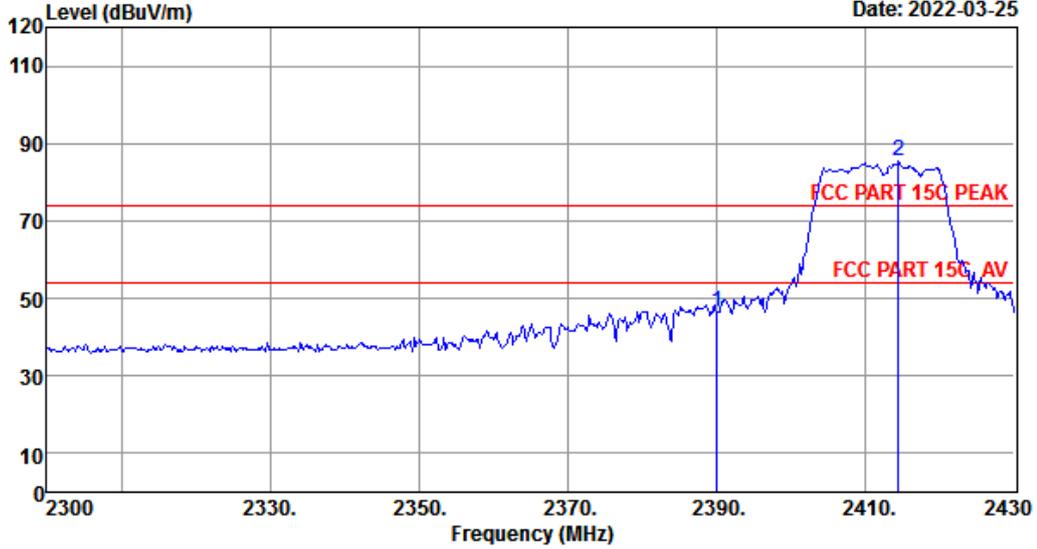

Site no. : 1# 966 Chamber Data no. : 8
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:21.8';Humi:51%;Press:101.52kPa
 Engineer : JBR
 EUT : Sound Bar
 Power : AC 120V/60Hz
 M/N : Beosound Theatre
 Test Mode : IEEE 802.11ax HE20 TX 2412MHz
 ANT1+ANT2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.26	1.45	34.64	52.61	46.68	74.00	27.32	Peak
2	2414.400	27.28	1.46	34.64	91.22	85.32	74.00	-11.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 9 File: \\EMC-966-1\test data\2022\RFIC\Chao Sheng\Beosound Theatre (FCC IC).EM6 (88)

Date: 2022-03-25

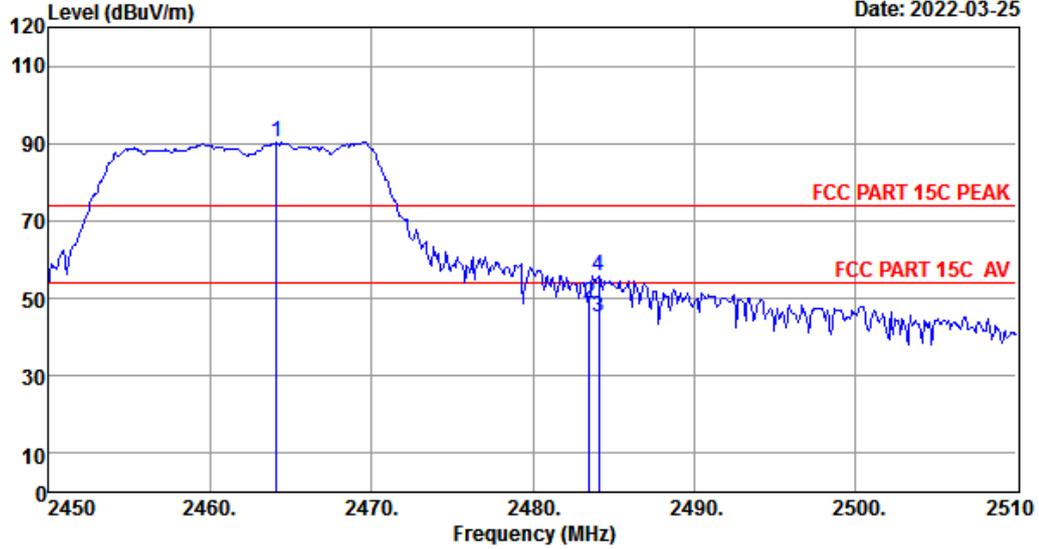

Site no. : 1# 966 Chamber Data no. : 9
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:21.8';Humi:51%;Press:101.52kPa
 Engineer : JBR
 EUT : Sound Bar
 Power : AC 120V/60Hz
 M/N : Beosound Theatre
 Test Mode : IEEE 802.11ax HE20 TX 2462MHz
 ANT1+ANT2


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.100	27.35	1.48	34.62	96.00	90.21	74.00	-16.21	Peak
2	2483.500	27.38	1.48	34.61	54.25	48.50	74.00	25.50	Peak
3	2484.080	27.38	1.48	34.61	51.00	45.25	54.00	8.75	Average
4	2484.080	27.38	1.48	34.61	61.67	55.92	74.00	18.08	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 10 File: \\EMC-966-1\test data\2022\RFIC\Chao Sheng\Beosound Theatre (FCC IC).EM6 (88) Date: 2022-03-25

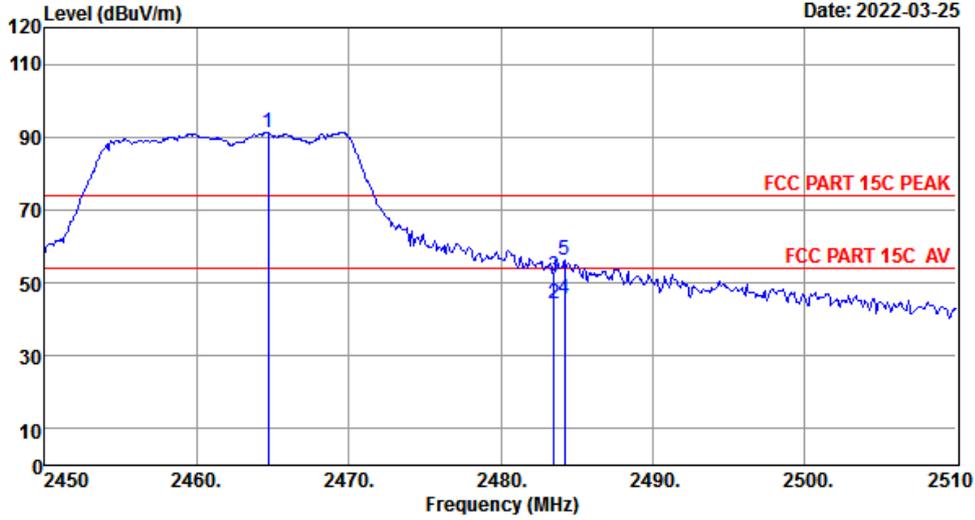

Site no. : 1# 966 Chamber Data no. : 10
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:21.8%;Humi:51%;Press:101.52kPa
 Engineer : JBR
 EUT : Sound Bar
 Power : AC 120V/60Hz
 M/N : Beosound Theatre
 Test Mode : IEEE 802.11ax HE20 TX 2462MHz
 ANT1+ANT2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.700	27.35	1.48	34.62	96.97	91.18	74.00	-17.18	Peak
2	2483.500	27.38	1.48	34.61	50.11	44.36	54.00	9.64	Average
3	2483.500	27.38	1.48	34.61	57.69	51.94	74.00	22.06	Peak
4	2484.200	27.38	1.48	34.61	51.56	45.81	54.00	8.19	Average
5	2484.200	27.38	1.48	34.61	61.90	56.15	74.00	17.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. All channels had been pre-test, only of the worst case channels were reported.



13.AC POWER LINE CONDUCTED EMISSIONS


13.1.Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note:

1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

13.2.Test Setup

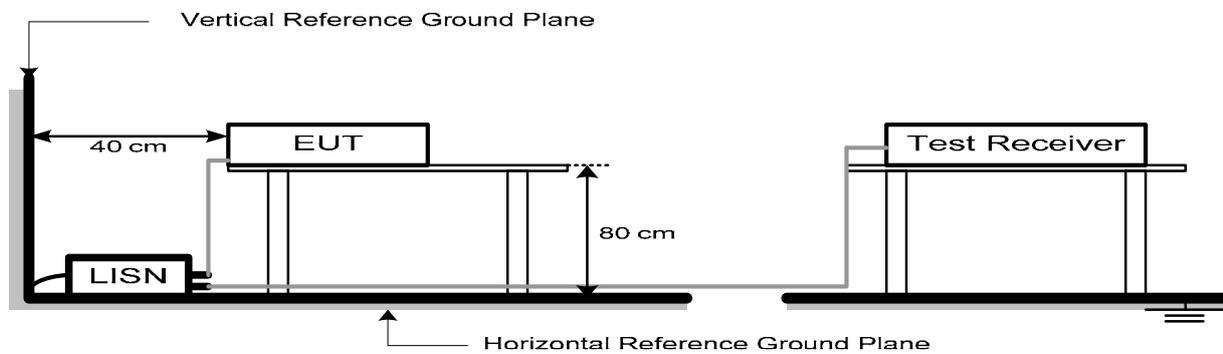

13.3.Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP/AVG
Trace Mode	Max Hold


13.4.Test Procedure

- a. The EUT was placed on a non-metallic table, 80cm above the ground plane.
- b. The EUT Power connected to the power mains through a line impedance stabilization network.
- c. Provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs).
- d. Set the EUT transmit continuously with maximum output power.
- e. Spectrum analyzer setting parameters in accordance with section 9.3.
- f. The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.
- g. Record the results in the test report.

13.5. Test Result

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

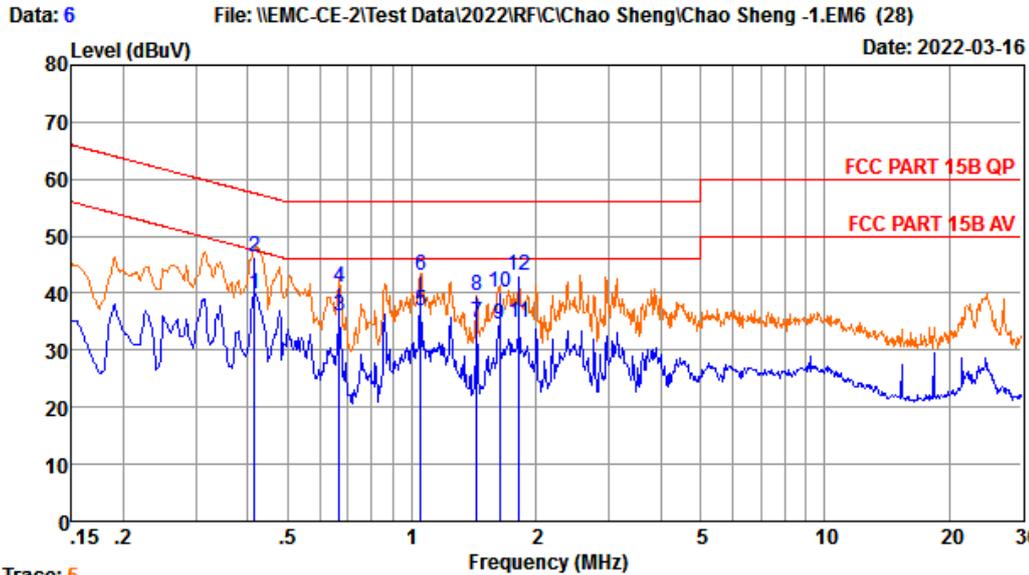


Trace: 5
 Site no : 2#CE Shield Room Data no. : 6
 Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : Sound Bar
 Power : AC 240V/60Hz
 M/N : Beosound Theatre
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBUV	Emission Level (dBUV)	Limits (dBUV)	Margin (dB)	Remark
1	0.415	9.73	9.92	20.18	39.83	47.55	7.72	Average
2	0.415	9.73	9.92	26.60	46.25	57.55	11.30	QP
3	0.668	9.76	9.92	16.45	36.13	46.00	9.87	Average
4	0.668	9.76	9.92	21.50	41.18	56.00	14.82	QP
5	1.049	9.82	9.94	17.14	36.90	46.00	9.10	Average
6	1.049	9.82	9.94	23.25	43.01	56.00	12.99	QP
7	1.433	9.85	9.95	15.18	34.98	46.00	11.02	Average
8	1.433	9.85	9.95	19.78	39.58	56.00	16.42	QP
9	1.628	9.89	9.95	14.59	34.43	46.00	11.57	Average
10	1.628	9.89	9.95	20.33	40.17	56.00	15.83	QP
11	1.819	9.92	9.95	15.05	34.92	46.00	11.08	Average
12	1.819	9.92	9.95	23.23	43.10	56.00	12.90	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Data: 8 File: \\EMC-CE-2\Test Data\2022\RF\C\Chao Sheng\Chao Sheng -1.EM6 (28) Date: 2022-03-16

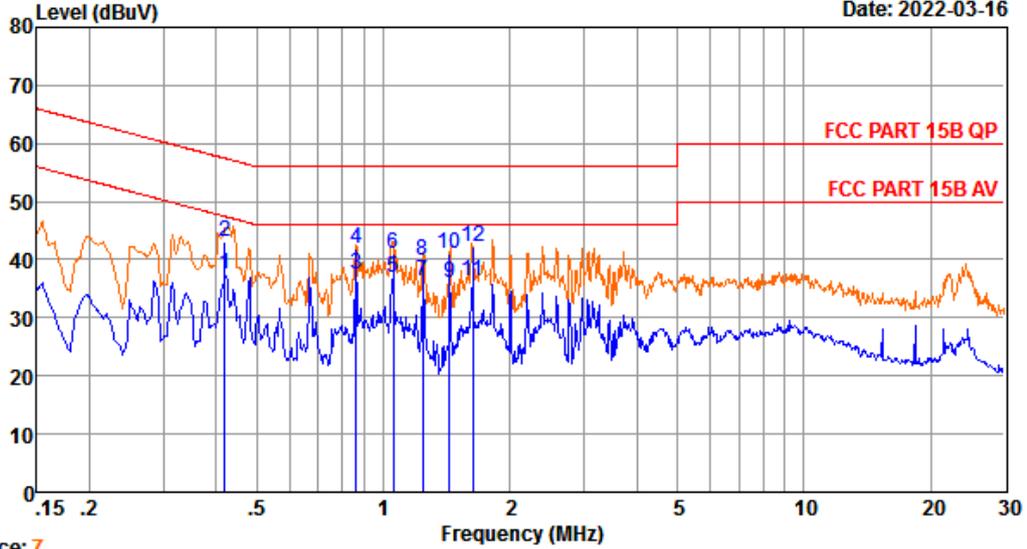


Trace: 7
 Site no : 2#CE Shield Room Data no. : 8
 Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : Sound Bar
 Power : AC 240V/60Hz
 M/N : Beosound Theatre
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBUV	Emission Level (dBUV)	Limits (dBUV)	Margin (dB)	Remark
1	0.419	9.85	9.92	17.73	37.50	47.46	9.96	Average
2	0.419	9.85	9.92	23.40	43.17	57.46	14.29	QP
3	0.862	9.87	9.93	17.75	37.55	46.00	8.45	Average
4	0.862	9.87	9.93	22.10	41.90	56.00	14.10	QP
5	1.054	9.93	9.94	17.14	37.01	46.00	8.99	Average
6	1.054	9.93	9.94	21.20	41.07	56.00	14.93	QP
7	1.242	9.91	9.94	16.37	36.22	46.00	9.78	Average
8	1.242	9.91	9.94	20.12	39.97	56.00	16.03	QP
9	1.433	9.87	9.95	16.34	36.16	46.00	9.84	Average
10	1.433	9.87	9.95	21.22	41.04	56.00	14.96	QP
11	1.628	9.91	9.95	16.39	36.25	46.00	9.75	Average
12	1.628	9.91	9.95	22.33	42.19	56.00	13.81	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Data: 10 File: \\EMC-CE-2\Test Data\2022\RF\C\Chao Sheng\Chao Sheng -1.EM6 (28) Date: 2022-03-16

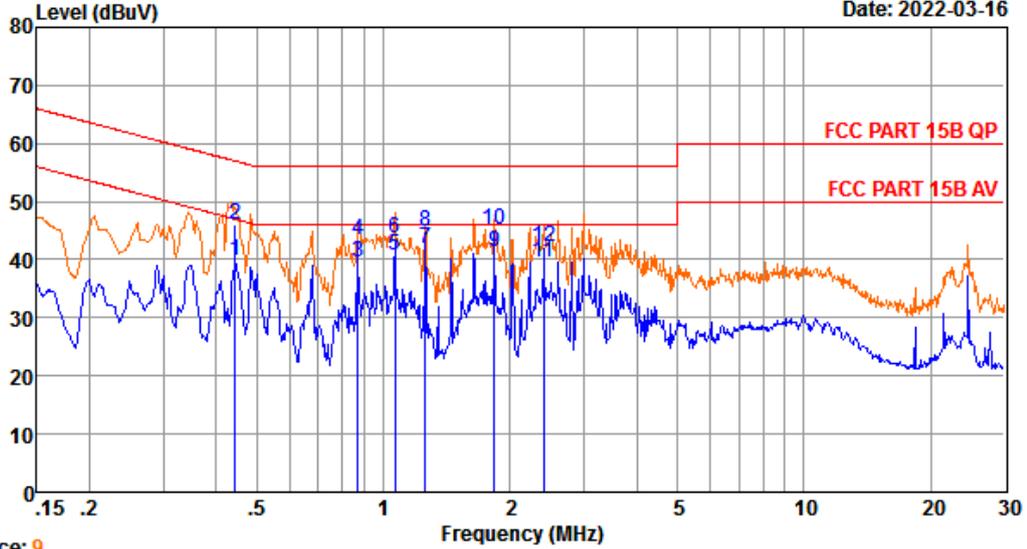


Trace: 9
 Site no : 2#CE Shield Room Data no. : 10
 Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : Sound Bar
 Power : AC 120V/60Hz
 M/N : Beosound Theatre
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.444	9.84	9.92	20.14	39.90	46.98	7.08	Average
2	0.444	9.84	9.92	26.25	46.01	56.98	10.97	QP
3	0.871	9.86	9.93	19.83	39.62	46.00	6.38	Average
4	0.871	9.86	9.93	23.70	43.49	56.00	12.51	QP
5	1.065	9.93	9.94	20.95	40.82	46.00	5.18	Average
6	1.065	9.93	9.94	23.80	43.67	56.00	12.33	QP
7	1.255	9.91	9.94	22.10	41.95	46.00	4.05	Average
8	1.255	9.91	9.94	25.10	44.95	56.00	11.05	QP
9	1.839	10.02	9.95	21.25	41.22	46.00	4.78	Average
10	1.839	10.02	9.95	25.10	45.07	56.00	10.93	QP
11	2.409	9.98	9.96	19.62	39.56	46.00	6.44	Average
12	2.409	9.98	9.96	22.40	42.34	56.00	13.66	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Data: 12 File: \\EMC-CE-2\Test Data\2022\RF\C\Chao Sheng\Chao Sheng -1.EM6 (28) Date: 2022-03-16

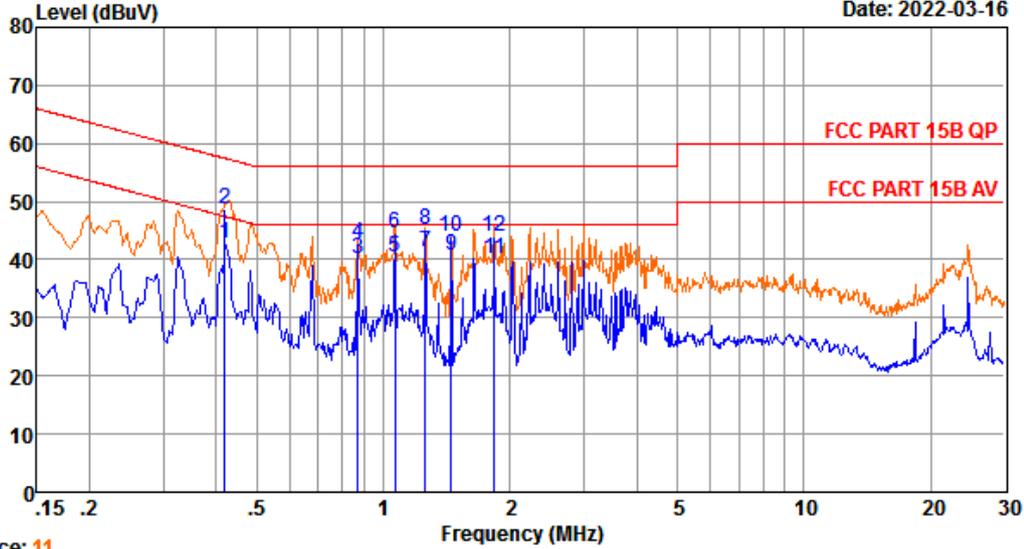

Trace: 11
 Site no : 2#CE Shield Room Data no. : 12
 Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : Sound Bar
 Power : AC 120V/60Hz
 M/N : Beosound Theatre
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBuV	Emission Level (dBuv)	Limits (dBuv)	Margin (dB)	Remark
1	0.419	9.73	9.92	23.14	42.79	47.46	4.67	Average
2	0.419	9.73	9.92	29.20	48.85	57.46	8.61	QP
3	0.871	9.85	9.93	20.38	40.16	46.00	5.84	Average
4	0.871	9.85	9.93	23.11	42.89	56.00	13.11	QP
5	1.065	9.82	9.94	20.81	40.57	46.00	5.43	Average
6	1.065	9.82	9.94	24.70	44.46	56.00	11.54	QP
7	1.255	9.83	9.94	21.57	41.34	46.00	4.66	Average
8	1.255	9.83	9.94	25.40	45.17	56.00	10.83	QP
9	1.449	9.85	9.95	21.06	40.86	46.00	5.14	Average
10	1.449	9.85	9.95	24.20	44.00	56.00	12.00	QP
11	1.839	9.93	9.95	20.28	40.16	46.00	5.84	Average
12	1.839	9.93	9.95	24.10	43.98	56.00	12.02	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

14. ANTENNA REQUIREMENTS

14.1. Limit

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

14.2. Test Result

The antennas used for this product is Internal antenna, so compliance with antenna requirements.
(Please refer to the EUT photo for details)

End of Test Report