



Test Report

Product Name	JukeBlox Networked Media Module
Model No	CR870-2Q
FCC ID.	TTUCR870-2Q

Applicant	Bang & Olufsen A/S
Address	Peter-Bangs-Vej 15, DK-7600 Struer, Denmark

Date of Receipt	Feb. 01, 2010
Issue Date	Oct. 26, 2011
Report No.	119172R-RFUSP42V01
Report Version	V1.0

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Issue Date: Oct. 26, 2011

Report No.: 119172R-RFUSP42V01



Accredited by NIST (NVLAP)
NVLAP Lab Code: 200533-0

Product Name	JukeBlox Networked Media Module
Applicant	Bang & Olufsen A/S
Address	Peter-Bangs-Vej 15, DK-7600 Struer, Denmark
Manufacturer	BridgeCo, Inc
Model No.	CR870-2Q
FCC ID.	TTUCR870-2Q
EUT Rated Voltage	DC 3.3V
EUT Test Voltage	AC 120V/60Hz
Trade Name	Bang & Olufsen
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2010 ANSI C63.4: 2009
Test Result	Complied



The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By : Rita Huang
(Senior Adm. Specialist / Rita Huang)



Tested By : Vincent chu
(Engineer / Vincent Chu)



Approved By : [Signature]
(Manager / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	9
2. Conducted Emission.....	10
2.1. Test Equipment.....	10
2.2. Test Setup	10
2.3. Limits	11
2.4. Test Procedure	11
2.5. Uncertainty	11
2.6. Test Result of Conducted Emission.....	12
3. Peak Power Output	14
3.1. Test Equipment.....	14
3.2. Test Setup	14
3.3. Limits	14
3.4. Test Procedure	14
3.5. Uncertainty	14
3.6. Test Result of Peak Power Output.....	15
4. Radiated Emission.....	17
4.1. Test Equipment.....	17
4.2. Test Setup	18
4.3. Limits	19
4.4. Test Procedure	20
4.5. Uncertainty	20
4.6. Test Result of Radiated Emission.....	21
5. RF antenna conducted test.....	29
5.1. Test Equipment.....	29
5.2. Test Setup	29
5.3. Limits	29
5.4. Test Procedure	29
5.5. Uncertainty	30
5.6. Test Result of RF antenna conducted test.....	31
6. Band Edge	35
6.1. Test Equipment.....	35
6.2. Test Setup	36
6.3. Limits	36
6.4. Test Procedure	37
6.5. Uncertainty	37
6.6. Test Result of Band Edge	38

7.	Occupied Bandwidth	46
7.1.	Test Equipment.....	46
7.2.	Test Setup.....	46
7.3.	Limits.....	46
7.4.	Test Procedure.....	46
7.5.	Uncertainty.....	46
7.6.	Test Result of Occupied Bandwidth.....	47
8.	Power Density	53
8.1.	Test Equipment.....	53
8.2.	Test Setup.....	53
8.3.	Limits.....	53
8.4.	Test Procedure.....	53
8.5.	Uncertainty.....	53
8.6.	Test Result of Power Density.....	54
9.	EMI Reduction Method During Compliance Testing	60

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	JukeBlox Networked Media Module
Trade Name	Bang & Olufsen
Model No.	CR870-2Q
FCC ID.	TTUCR870-2Q
Frequency Range	2412-2462MHz for 802.11b/g
Number of Channels	802.11b/g: 11
Data Speed	802.11b: 1-11Mbps, 802.11g: 6-54Mbps
Type of Modulation	802.11b:DSSS (DBPSK, DQPSK, CCK) 802.11g:OFDM (BPSK, QPSK, 16QAM, 64QAM)
Antenna Type	Inverted-F
Antenna Gain	Refer to the table "Antenna List"
Channel Control	Auto

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	NISSEI	544116	Inverted-F	1.92 dBi for 2.4 GHz

Note: The antenna of EUT is conform to FCC 15.203.

802.11b/g Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01:	2412 MHz	Channel 02:	2417 MHz	Channel 03:	2422 MHz	Channel 04:	2427 MHz
Channel 05:	2432 MHz	Channel 06:	2437 MHz	Channel 07:	2442 MHz	Channel 08:	2447 MHz
Channel 09:	2452 MHz	Channel 10:	2457 MHz	Channel 11:	2462 MHz		

Note:

1. The EUT is a JukeBlox Networked Media Module with a built-in 2.4GHz WLAN transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report. (802.11b is 1Mbps 、 802.11g is 6Mbps)
4. These tests are conducted on a sample for the purpose of demonstrating compliance of 802.11b/g transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices.
5. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Notebook PC	DELL	PP18L	42649348672	Non-Shielded, 0.8m
2 Test Fixture	LITEON	N/A	N/A	N/A

Signal Cable Type	Signal cable Description
A RS-232 Cable	Shielded, 1.5m

1.4. Configuration of Tested System

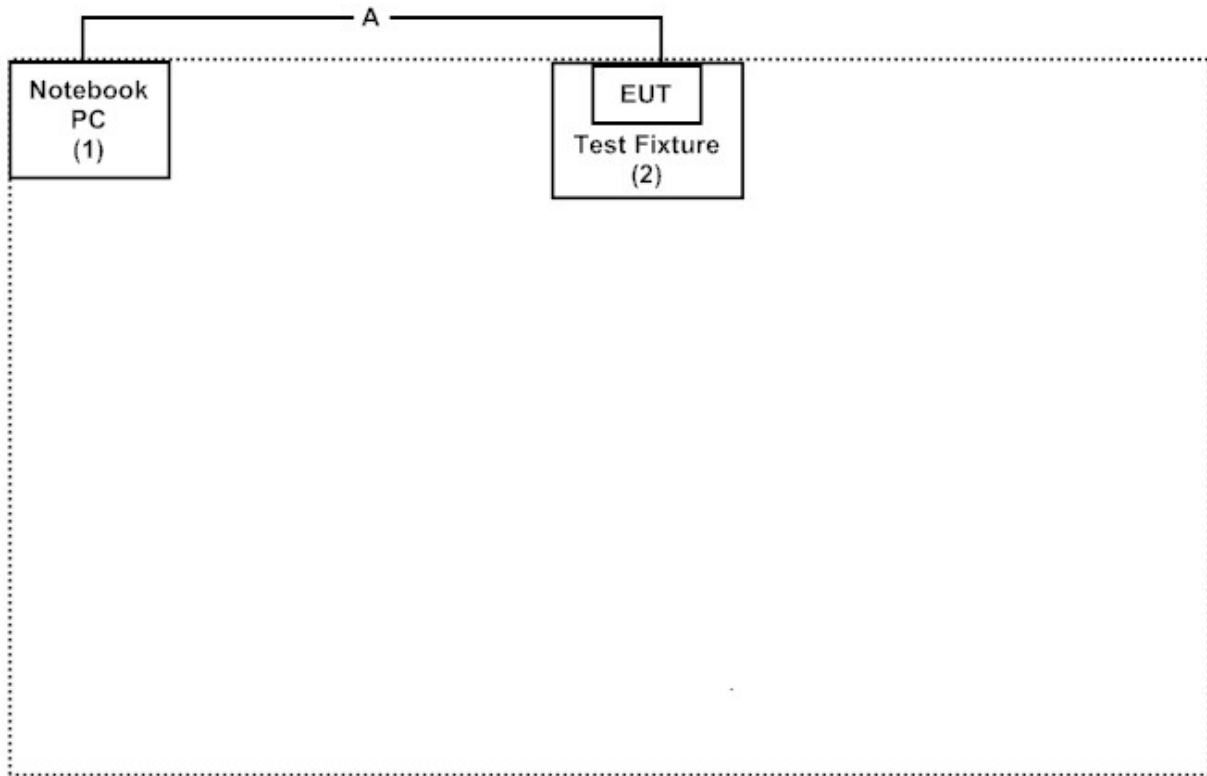

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in section 1.4
- (2) Execute command on the notebook.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Start the continuous transmission.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from

Quietek Corporation's Web Site: <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site:

<http://www.quietek.com/>

Site Description: File on
 Federal Communications Commission
 FCC Engineering Laboratory
 7435 Oakland Mills Road
 Columbia, MD 21046
 Registration Number: 92195



Accreditation on NVLAP
 NVLAP Lab Code: 200533-0



Site Name: Quietek Corporation
 Site Address: No.5-22, Ruishukeng,
 Linkou Dist. New Taipei City 24451,
 Taiwan, R.O.C.
 TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
 E-Mail : service@quietek.com

FCC Accreditation Number: TW1014



2. Conducted Emission


2.1. Test Equipment

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 2011	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 2011	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 2011	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	May, 2011	
5	No.1 Shielded Room			N/A	

Note: All instruments are calibrated every one year.

2.2. Test Setup

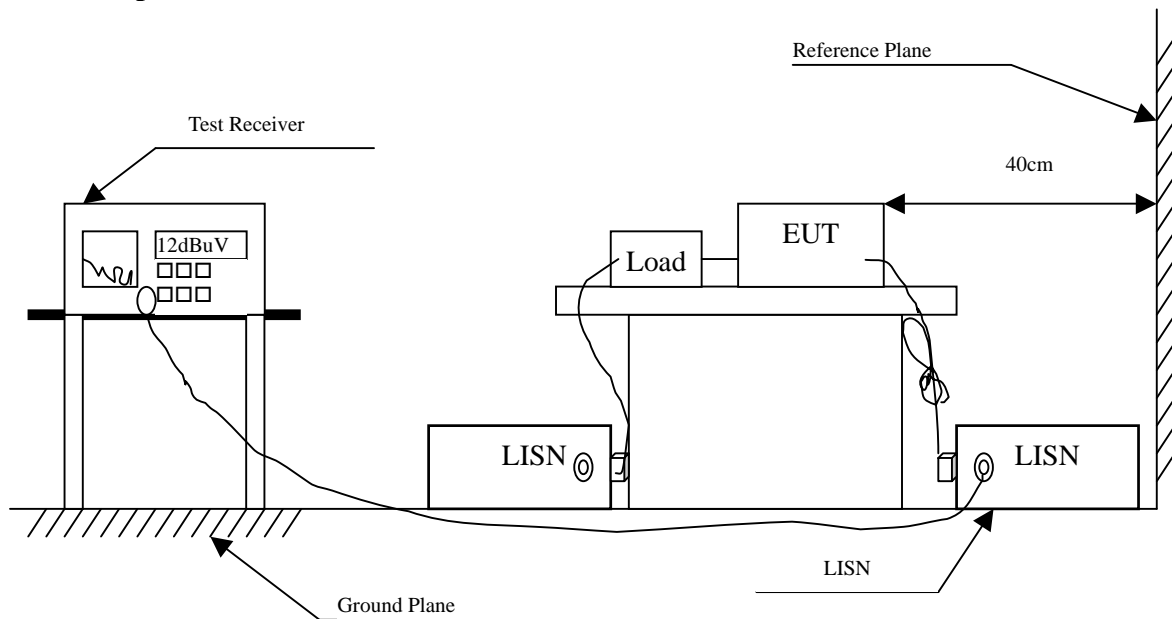

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AVG
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2009 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : JukeBlox Networked Media Module
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Line 1					
Quasi-Peak					
0.209	9.701	19.420	29.121	-35.193	64.314
0.603	9.632	22.700	32.332	-23.668	56.000
0.939	9.670	17.720	27.390	-28.610	56.000
1.580	9.680	20.630	30.310	-25.690	56.000
19.709	9.930	26.980	36.910	-23.090	60.000
24.521	10.110	26.650	36.760	-23.240	60.000
Average					
0.209	9.701	-0.850	8.851	-45.463	54.314
0.603	9.632	15.940	25.572	-20.428	46.000
0.939	9.670	4.710	14.380	-31.620	46.000
1.580	9.680	14.730	24.410	-21.590	46.000
19.709	9.930	20.940	30.870	-19.130	50.000
24.521	10.110	18.290	28.400	-21.600	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : JukeBlox Networked Media Module
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Line 2					
Quasi-Peak					
0.306	9.660	28.020	37.680	-23.863	61.543
0.603	9.648	22.680	32.328	-23.672	56.000
0.892	9.670	18.120	27.790	-28.210	56.000
1.314	9.670	18.480	28.150	-27.850	56.000
19.302	10.040	27.120	37.160	-22.840	60.000
24.334	10.090	26.180	36.270	-23.730	60.000
Average					
0.306	9.660	18.000	27.660	-23.883	51.543
0.603	9.648	16.110	25.758	-20.242	46.000
0.892	9.670	4.410	14.080	-31.920	46.000
1.314	9.670	4.990	14.660	-31.340	46.000
19.302	10.040	21.010	31.050	-18.950	50.000
24.334	10.090	17.790	27.880	-22.120	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Peak Power Output

3.1. Test Equipment


	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Power Meter	Anritsu	ML2495A/6K00003357	May, 2011
X	Power Sensor	Anritsu	MA2411B/0738448	Jun, 2011

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

3.2. Test Setup

Conducted Measurement

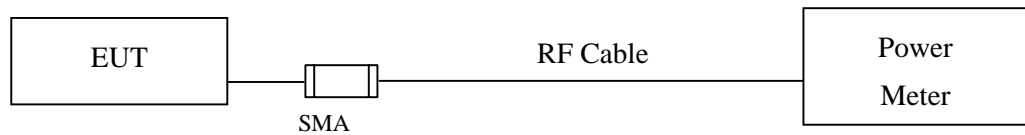

3.3. Limits

The maximum peak power shall be less 1 Watt.

3.4. Test Procedure

The EUT was tested according to DTS test procedure of Mar. 2005 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

3.5. Uncertainty

± 1.27 dB

3.6. Test Result of Peak Power Output

Product : JukeBlox Networked Media Module
 Test Item : Peak Power Output Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Peak Power	Required Limit	Result
		1	2	5.5	11	1		
		Measurement Level (dBm)						
01	2412	12.65	--	--	--	14.95	<30dBm	Pass
06	2437	13.02	12.86	12.67	12.52	15.59	<30dBm	Pass
11	2462	13.11	--	--	--	15.78	<30dBm	Pass

Note: Peak Power Output Value = Reading value on peak power meter + cable loss

Product : JukeBlox Networked Media Module
 Test Item : Peak Power Output Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		6	9	12	18	24	36	48	54			
		Measurement Level (dBm)										
01	2412	11.21	--	--	--	--	--	--	--	21.51	<30dBm	Pass
06	2437	11.38	10.69	10.11	9.87	9.13	8.74	8.12	7.98	21.7	<30dBm	Pass
11	2462	11.41	--	--	--	--	--	--	--	21.43	<30dBm	Pass

Note: Peak Power Output Value = Reading value on peak power meter + cable loss

4. Radiated Emission

4.1. Test Equipment


The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2011
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2011
	X	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2011
	X	Pre-Amplifier	Agilent	8447D/2944A09549	Sep., 2011
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2011
	X	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2011
	X	Coaxial Cable	Quietek	QTK-CABLE/ CAB5	Feb., 2011
	X	Controller	Quietek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with “X” are used to measure the final test results.

4.2. Test Setup

Radiated Emission Below 1GHz

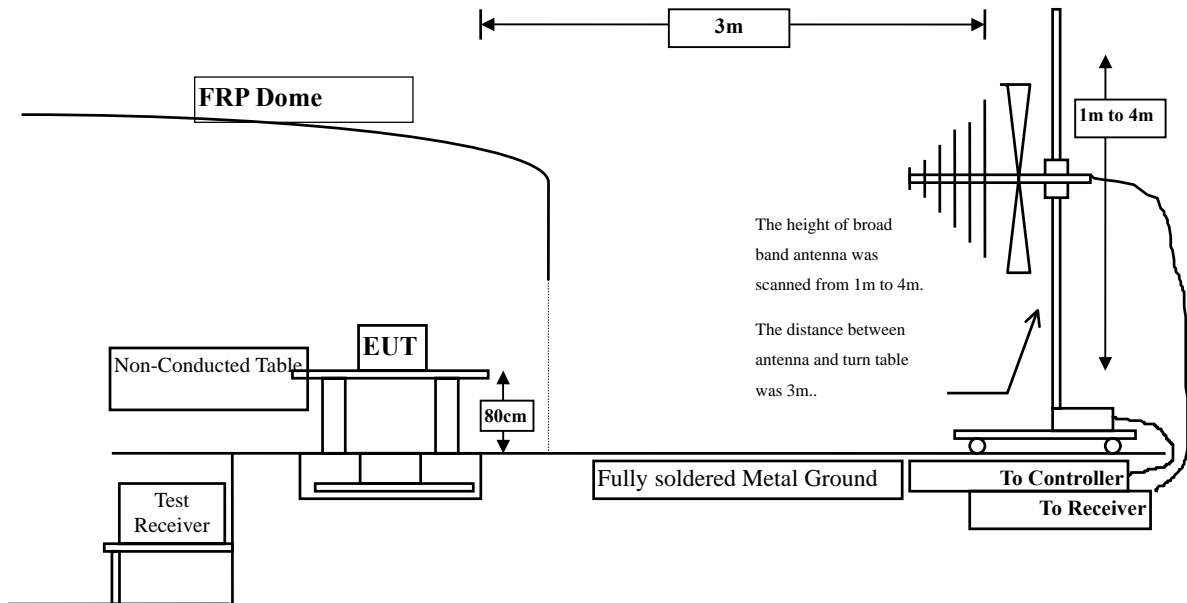

Radiated Emission Above 1GHz

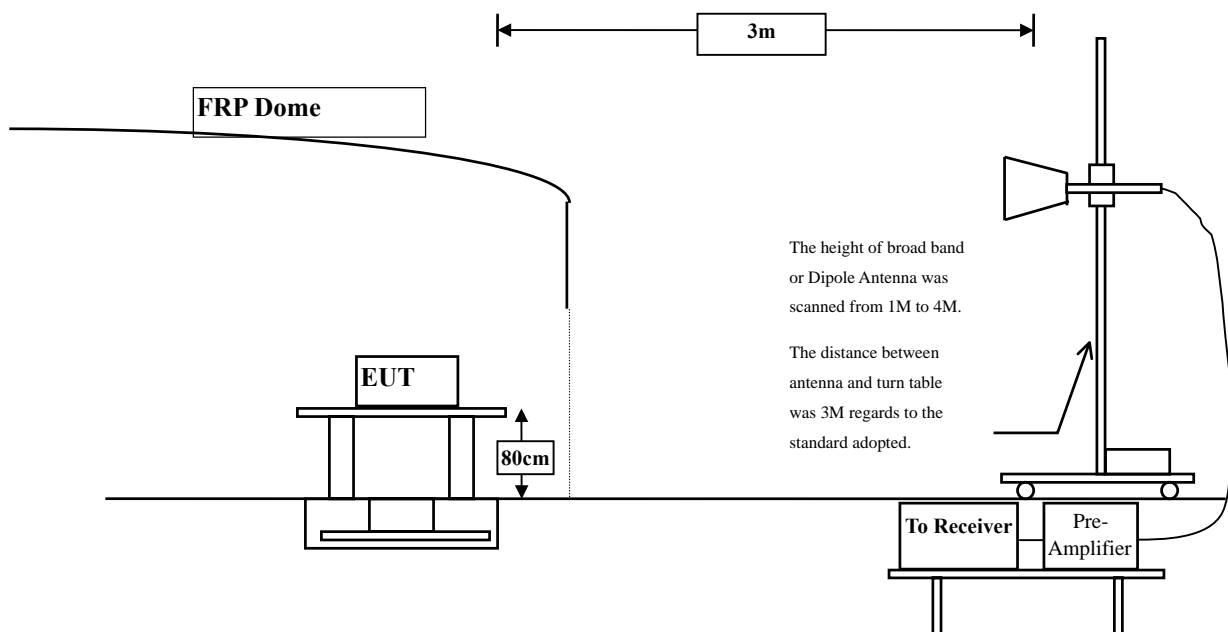

4.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

4.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to DTS test procedure of Mar. 2005 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2009 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

Radiated emission measurements below 1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The frequency range from 30MHz to 10th harmonics is checked.

4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

4.6. Test Result of Radiated Emission

Product : JukeBlox Networked Media Module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4824.000	3.261	38.150	41.411	-32.589	74.000
7236.000	10.650	36.490	47.140	-26.860	74.000
9648.000	13.337	36.570	49.906	-24.094	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4824.000	6.421	37.500	43.921	-30.079	74.000
7236.000	11.495	36.620	48.115	-25.885	74.000
9648.000	13.807	36.380	50.186	-23.814	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : JukeBlox Networked Media Module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437 MHz)

Frequency MHz	Correct Factor Db	Reading Level dBuV	Measurement Level dBuV/m	Margin Db	Limit dBuV/m
Horizontal					
Peak Detector:					
4874.000	3.038	37.910	40.947	-33.053	74.000
7311.000	11.795	35.930	47.724	-26.276	74.000
9748.000	12.635	36.870	49.505	-24.495	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4874.000	5.812	37.410	43.221	-30.779	74.000
7311.000	12.630	35.980	48.609	-25.391	74.000
9748.000	13.126	36.980	50.106	-23.894	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : JukeBlox Networked Media Module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462 MHz)

Frequency MHz	Correct Factor Db	Reading Level dBuV	Measurement Level dBuV/m	Margin Db	Limit dBuV/m
Horizontal					
Peak Detector:					
4924.000	2.858	37.100	39.957	-34.043	74.000
7386.000	12.127	35.460	47.588	-26.412	74.000
9848.000	12.852	36.160	49.013	-24.987	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4924.000	5.521	37.390	42.910	-31.090	74.000
7386.000	13.254	34.500	47.754	-26.246	74.000
9848.000	13.367	36.140	49.507	-24.493	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : JukeBlox Networked Media Module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Frequency MHz	Correct Factor Db	Reading Level dBuV	Measurement Level dBuV/m	Margin Db	Limit dBuV/m
Horizontal					
Peak Detector:					
4824.000	3.261	37.710	40.971	-33.029	74.000
7236.000	10.650	36.470	47.120	-26.880	74.000
9648.000	13.337	36.600	49.936	-24.064	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4824.000	6.421	38.880	45.301	-28.699	74.000
7236.000	11.495	36.450	47.945	-26.055	74.000
9648.000	13.807	37.000	50.806	-23.194	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : JukeBlox Networked Media Module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437 MHz)

Frequency MHz	Correct Factor Db	Reading Level dBuV	Measurement Level dBuV/m	Margin Db	Limit dBuV/m
Horizontal					
Peak Detector:					
4874.000	3.038	37.260	40.297	-33.703	74.000
7311.000	11.795	35.360	47.154	-26.846	74.000
9748.000	12.635	37.280	49.915	-24.085	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4874.000	5.812	37.100	42.911	-31.089	74.000
7311.000	12.630	36.020	48.649	-25.351	74.000
9748.000	13.126	36.790	49.916	-24.084	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : JukeBlox Networked Media Module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462 MHz)

Frequency MHz	Correct Factor Db	Reading Level dBuV	Measurement Level dBuV/m	Margin Db	Limit dBuV/m
Horizontal					
Peak Detector:					
4924.000	2.858	36.910	39.767	-34.233	74.000
7386.000	12.127	35.010	47.138	-26.862	74.000
9848.000	12.852	36.510	49.363	-24.637	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4924.000	5.521	37.270	42.790	-31.210	74.000
7386.000	13.254	35.450	48.704	-25.296	74.000
9848.000	13.367	36.550	49.917	-24.083	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : JukeBlox Networked Media Module
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
167.740	-10.799	44.833	34.034	-9.466	43.500
338.460	-3.925	41.720	37.795	-8.205	46.000
480.080	-0.329	41.205	40.876	-5.124	46.000
641.100	1.348	36.748	38.096	-7.904	46.000
763.320	4.301	31.968	36.270	-9.730	46.000
831.220	6.121	27.530	33.651	-12.349	46.000
Vertical					
154.160	-6.221	44.136	37.915	-5.585	43.500
410.240	-6.616	39.809	33.193	-12.807	46.000
567.380	-5.426	37.706	32.280	-13.720	46.000
687.660	2.444	29.714	32.158	-13.842	46.000
800.180	2.801	33.387	36.188	-9.812	46.000
961.200	7.260	30.370	37.630	-16.370	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : JukeBlox Networked Media Module
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
159.980	-11.775	48.823	37.048	-6.452	43.500
291.900	-4.174	41.725	37.550	-8.450	46.000
536.340	2.195	38.939	41.134	-4.866	46.000
625.580	1.770	38.499	40.269	-5.731	46.000
800.180	5.141	34.423	39.564	-6.436	46.000
996.120	7.669	36.707	44.376	-9.624	54.000
Vertical					
138.640	-5.795	38.698	32.903	-10.597	43.500
416.060	-8.415	43.306	34.891	-11.109	46.000
542.160	-0.269	35.147	34.878	-11.122	46.000
720.640	-0.099	34.812	34.713	-11.287	46.000
800.180	2.801	35.126	37.927	-8.073	46.000
961.200	7.260	28.884	36.144	-17.856	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

5. RF antenna conducted test


5.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2011
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2011
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2011

- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with “X” are used to measure the final test results.

5.2. Test Setup

RF antenna Conducted Measurement:

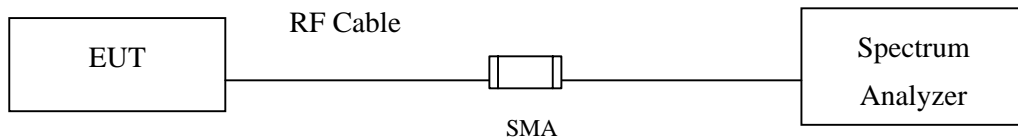

5.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.4. Test Procedure

The EUT was tested according to DTS test procedure of Mar. 2005 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.5. Uncertainty


The measurement uncertainty

Conducted is defined as $\pm 1.27\text{dB}$

5.6. Test Result of RF antenna conducted test

Product : JukeBlox Networked Media Module
 Test Item : RF antenna conducted test
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)


Channel 01 (2412MHz) 30-25GHz

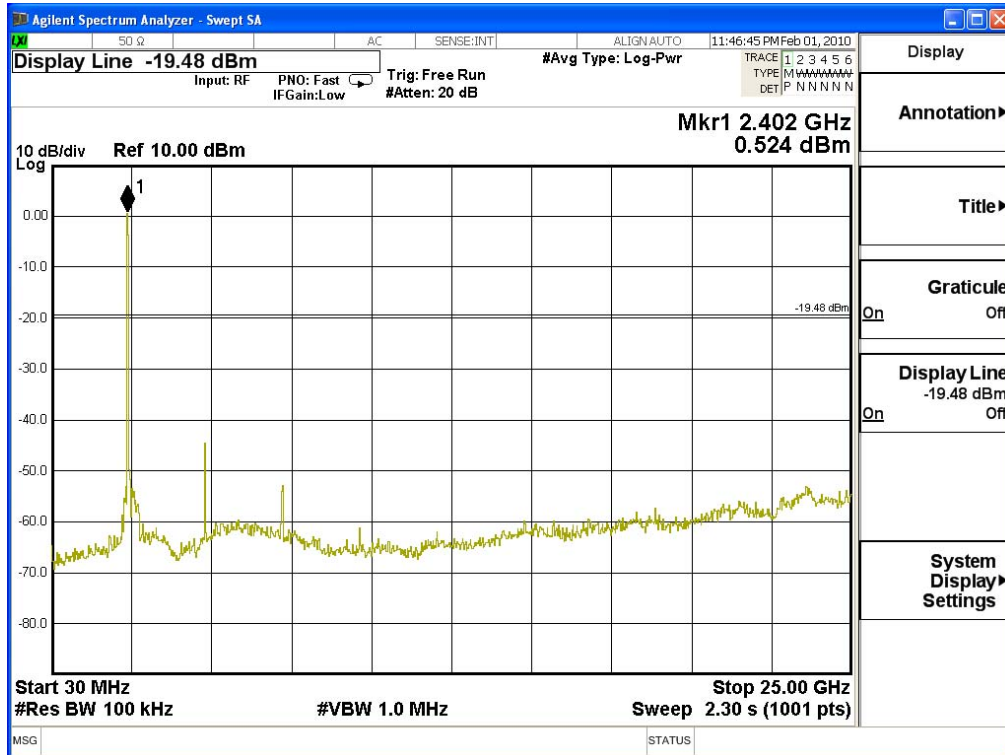

Channel 06 (2437MHz) 30-25GHz




Channel 11 (2462MHz) 30-25GHz

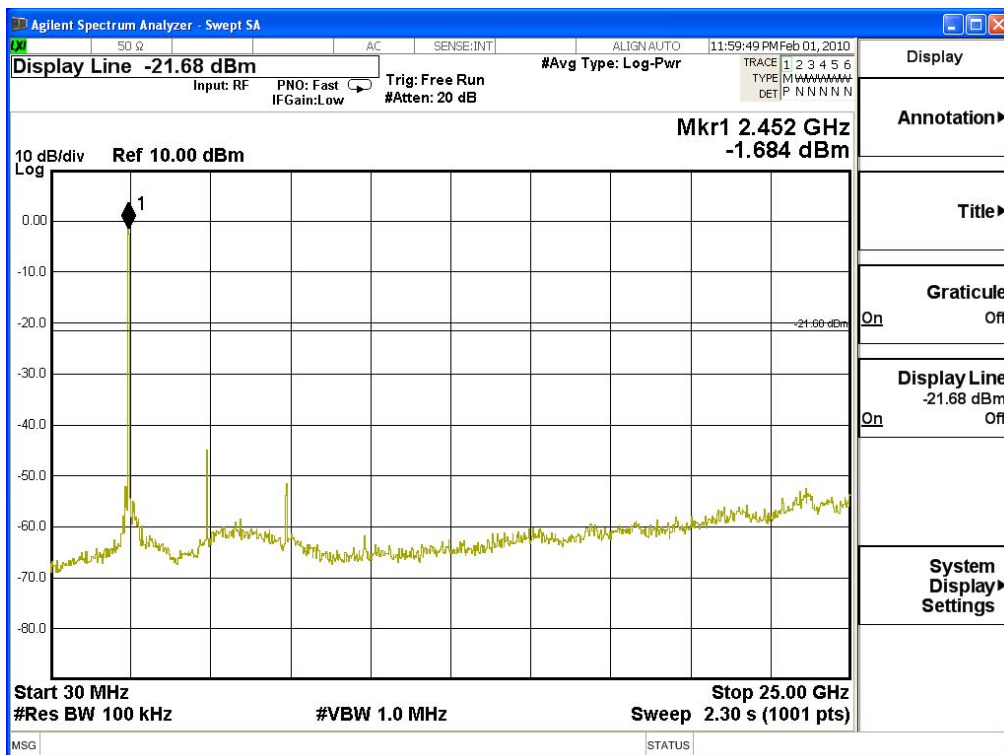


Product : JukeBlox Networked Media Module
 Test Item : RF Antenna Conducted Spurious
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)


Channel 01 (2412MHz) 30-25GHz

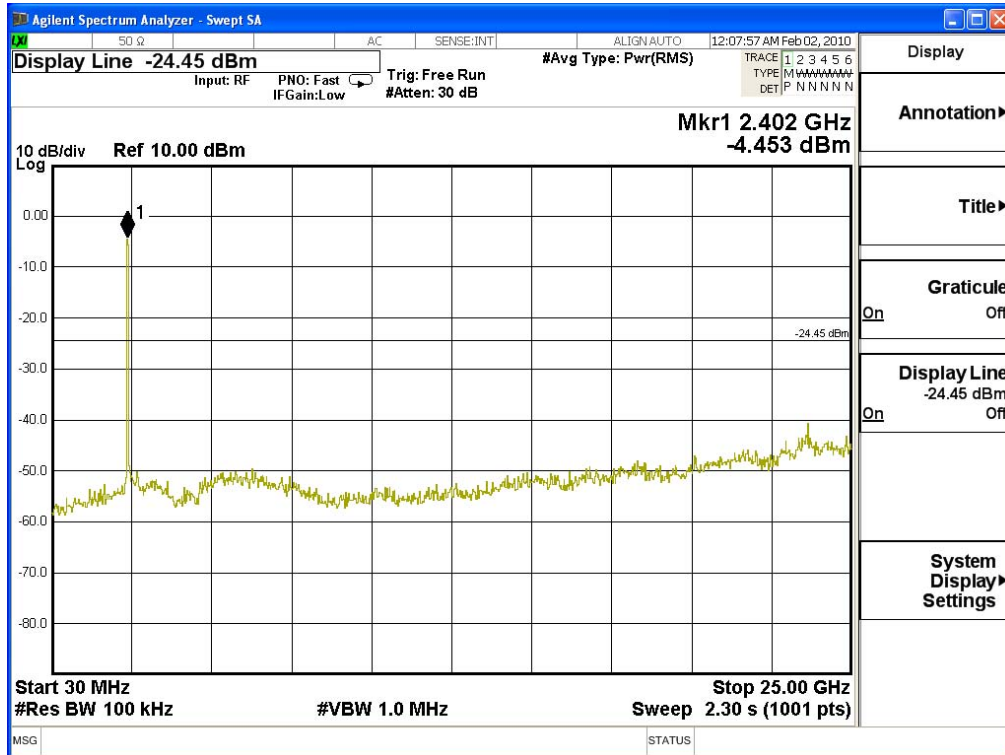

Channel 06 (2437MHz) 30-25GHz

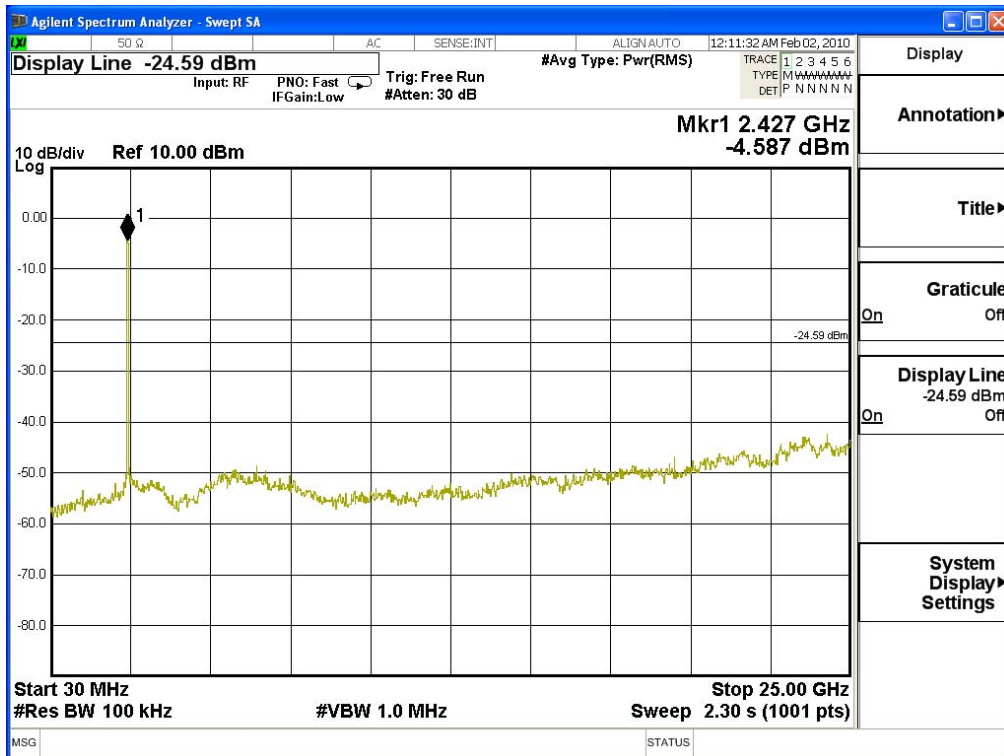

Channel 11 (2462MHz) 30-25GHz

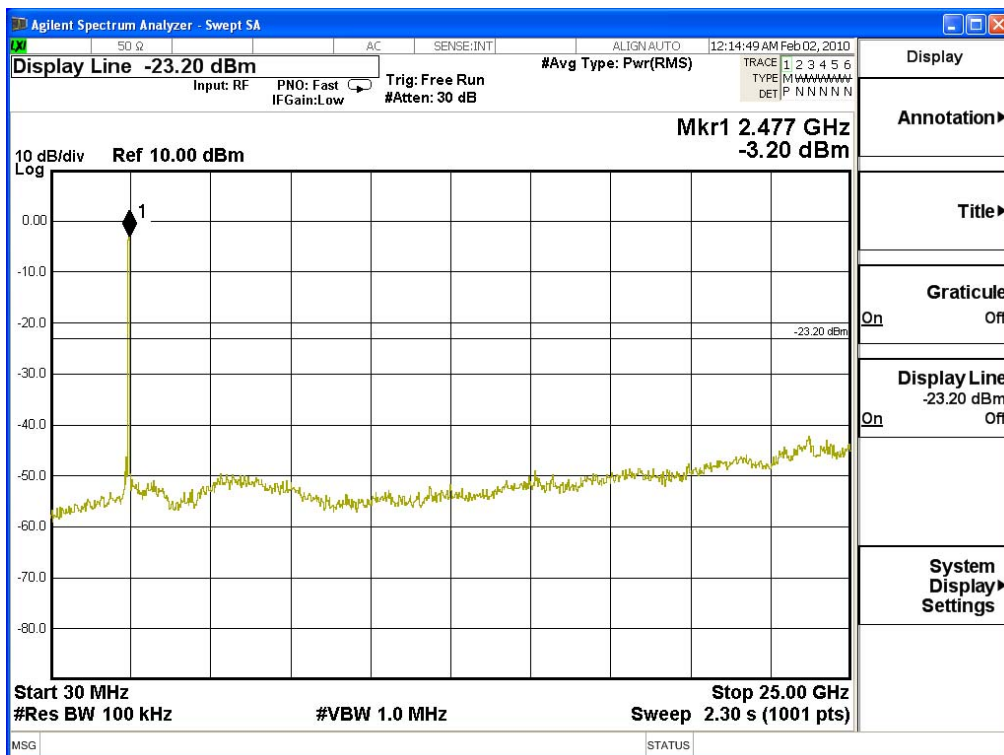

6. Band Edge

6.1. Test Equipment

RF Conducted Measurement

The following test equipments are used during the band edge tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2011
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2011
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2011

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with "X" are used to measure the final test results.

RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.	
☒ Site # 3		Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2011
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2011
		Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2011
	X	Pre-Amplifier	Agilent	8447D/2944A09549	Sep., 2011
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2011
		Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2011
	X	Coaxial Cable	Quietek	QTK-CABLE/ CAB5	Feb., 2011
	X	Controller	Quietek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A


- Note:
1. All instruments are calibrated every one year.
 2. The test instruments marked by "X" are used to measure the final test results.

6.2. Test Setup

RF Conducted Measurement

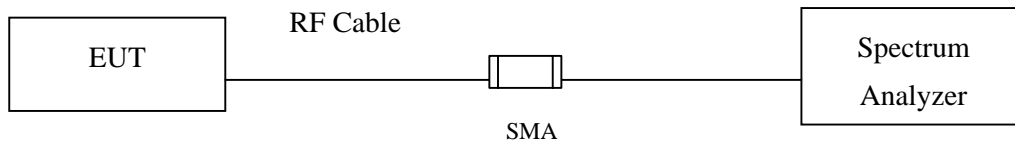

RF Radiated Measurement:

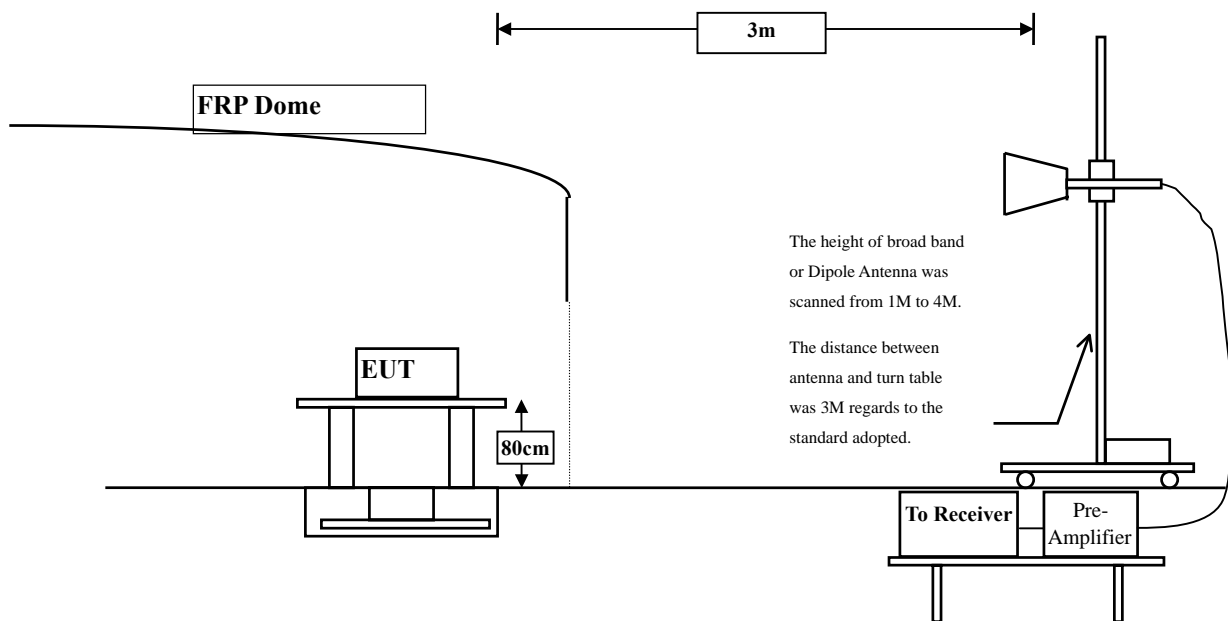

6.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

6.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to DTS test procedure of Mar. 2005 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2009 on radiated measurement.

6.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

6.6. Test Result of Band Edge

Product : JukeBlox Networked Media Module
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Fundamental Filed Strength

Antenna Pole	Frequency [MHz]	Correction Factor [dB/m]	Reading Level [dBuV]	Emission Level [dBuV/m]	Detector
Horizontal	2412	31.639	68.89	100.528	Peak
Horizontal	2412	31.639	64.41	96.048	Average
Vertical	2412	30.95	59.05	89.999	Peak
Vertical	2412	30.95	55.2	86.149	Average

Note: 1:Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Average detector: RBW=1MHz, VBW=10Hz

Band Edge Test Data

Antenna Pole	Test Frequency (MHz)	Fundamental (dBuV/m)	Δ (dB)	Band Edge Field Strength (dBuV/m)	Detector
Horizontal	2347.5	100.528	45.732	54.796	Peak
Horizontal	2344.8	96.048	52.592	43.456	Average
Vertical	2347.5	89.999	45.732	44.267	Peak
Vertical	2344.8	86.149	52.592	33.557	Average

Note:


The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

Band Edge field Strength = F - Δ


F = Fundamental field Strength (Peak or Average)

Δ = Conducted Band Edge Delta (Peak or Average)

Peak Detector of conducted Band Edge Delta

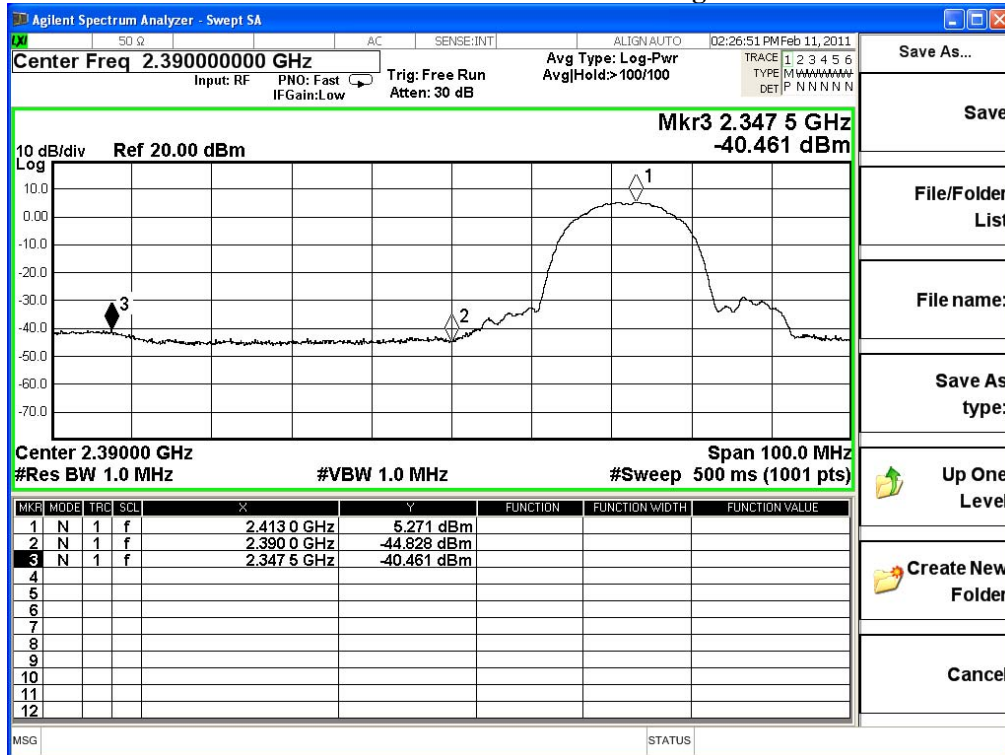

Average Detector of conducted Band Edge Delta

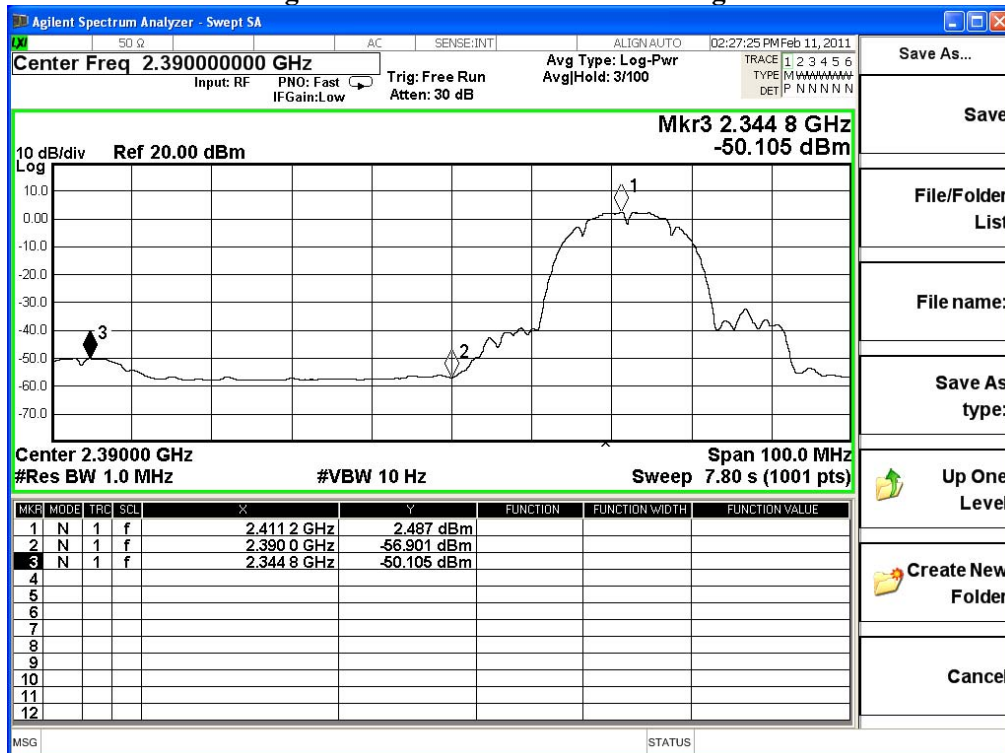

Product : JukeBlox Networked Media Module
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

Fundamental Filed Strength

Antenna Pole	Frequency [MHz]	Correction Factor [dB/m]	Reading Level [dBuV]	Emission Level [dBuV/m]	Detector
Horizontal	2462	32.019	70.93	102.949	Peak
Horizontal	2462	32.019	66.88	98.899	Average
Vertical	2462	31.29	61.41	92.7	Peak
Vertical	2462	31.29	57.5	88.79	Average

Note: 1:Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Average detector: RBW=1MHz, VBW=10Hz

Band Edge Test Data

Antenna Pole	Test Frequency (MHz)	Fundamental (dBuV/m)	Δ (dB)	Band Edge Field Strength (dBuV/m)	Detector
Horizontal	2484.8	102.949	48.227	54.722	Peak
Horizontal	2484.6	98.899	56.363	42.536	Average
Vertical	2484.8	92.7	48.227	44.473	Peak
Vertical	2484.6	88.79	56.363	32.427	Average

Note:


The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

Band Edge field Strength = F - Δ


F = Fundamental field Strength (Peak or Average)

Δ = Conducted Band Edge Delta (Peak or Average)

Peak Detector of conducted Band Edge Delta

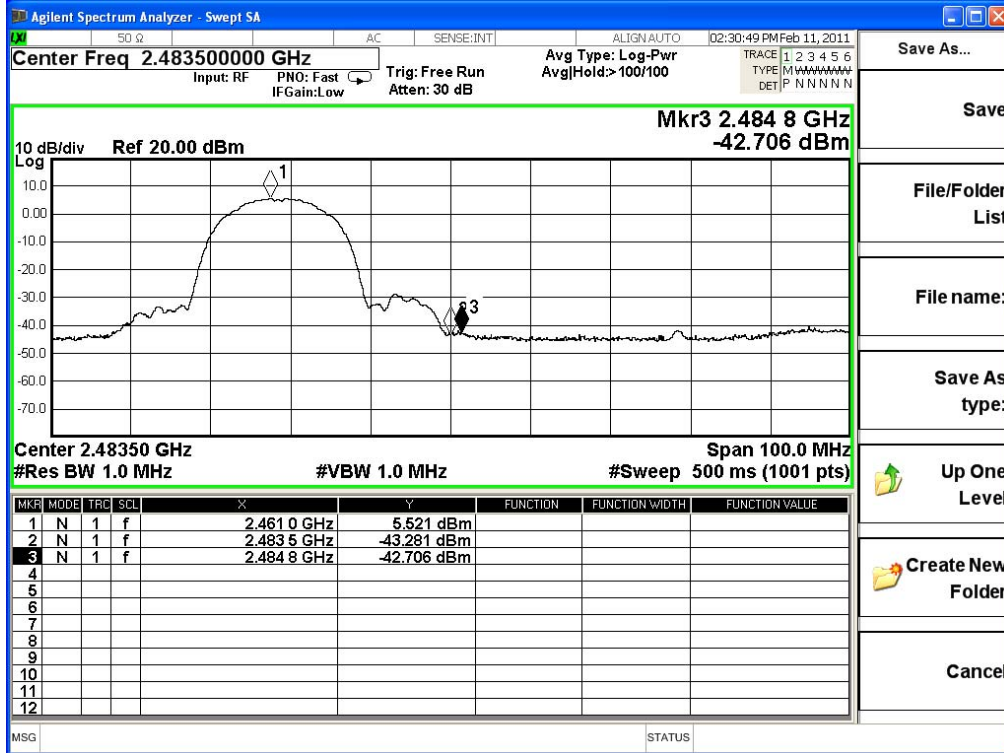

Average Detector of conducted Band Edge Delta

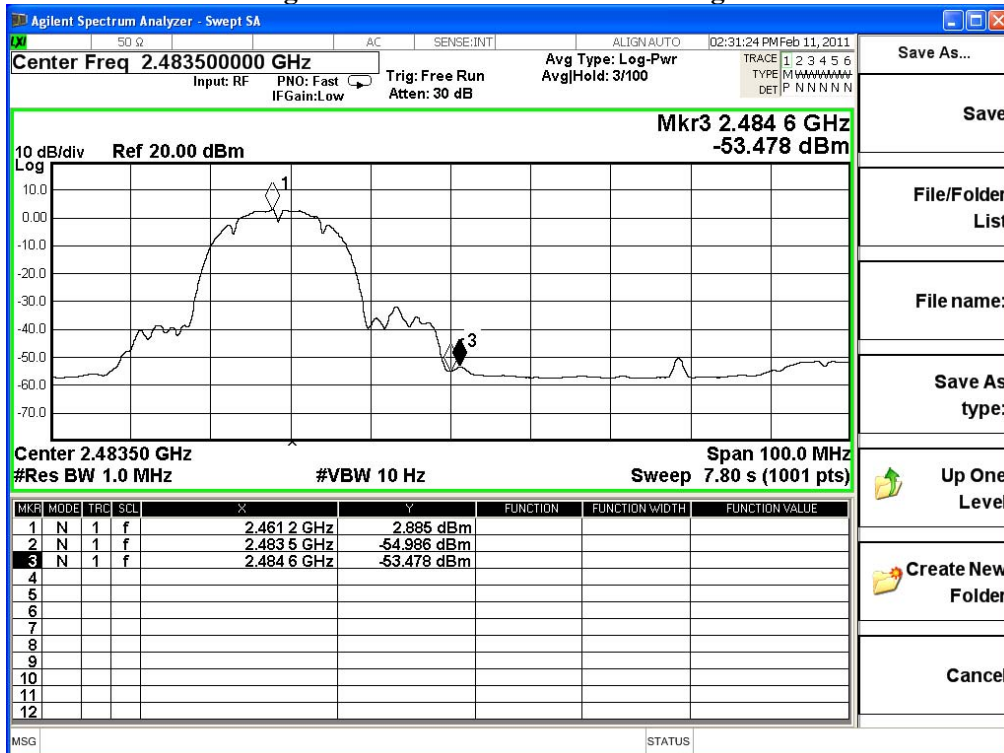

Product : JukeBlox Networked Media Module
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Fundamental Filed Strength

Antenna Pole	Frequency [MHz]	Correction Factor [dB/m]	Reading Level [dBuV]	Emission Level [dBuV/m]	Detector
Horizontal	2412	31.639	74.92	106.558	Peak
Horizontal	2412	31.639	58.91	90.548	Average
Vertical	2412	30.95	65.46	96.409	Peak
Vertical	2412	30.95	49.09	80.039	Average

Note: 1: Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Average detector: RBW=1MHz, VBW=10Hz

Band Edge Test Data

Antenna Pole	Test Frequency (MHz)	Fundamental (dBuV/m)	Δ (dB)	Band Edge Field Strength (dBuV/m)	Detector
Horizontal	2388.7	106.558	42.062	64.496	Peak
Horizontal	2390	90.548	43.107	47.441	Average
Vertical	2388.7	96.409	42.062	54.347	Peak
Vertical	2390	80.039	43.107	36.932	Average

Note:


The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

Band Edge field Strength = $F - \Delta$


F = Fundamental field Strength (Peak or Average)

Δ = Conducted Band Edge Delta (Peak or Average)

Peak Detector of conducted Band Edge Delta

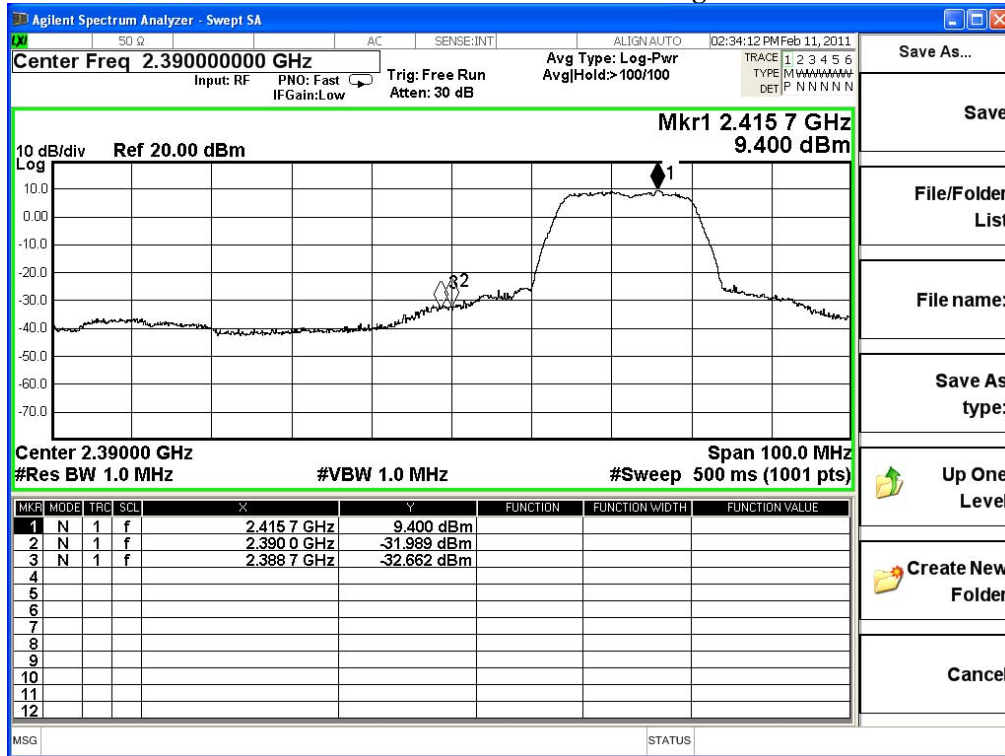

Average Detector of conducted Band Edge Delta

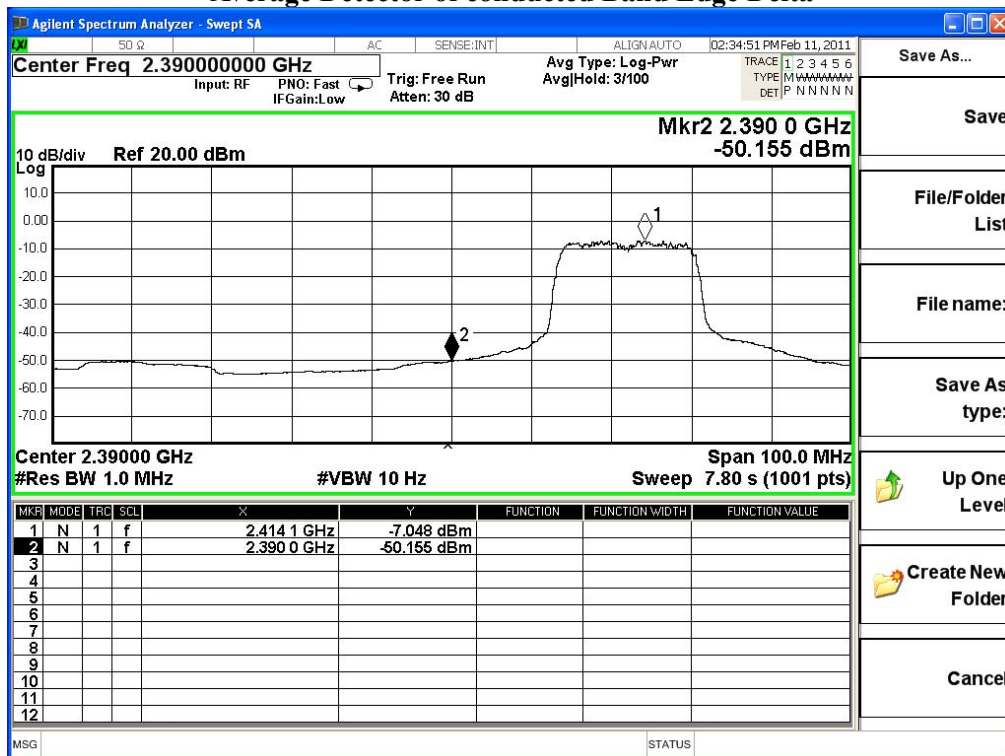

Product : JukeBlox Networked Media Module
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

Fundamental Filed Strength

Antenna Pole	Frequency [MHz]	Correction Factor [dB/m]	Reading Level [dBuV]	Emission Level [dBuV/m]	Detector
Horizontal	2462	32.019	76.71	108.729	Peak
Horizontal	2462	32.019	59.83	91.849	Average
Vertical	2462	31.29	67.08	98.37	Peak
Vertical	2462	31.29	50.75	82.04	Average

Note: 1:Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Average detector: RBW=1MHz, VBW=10Hz

Band Edge Test Data

Antenna Pole	Test Frequency (MHz)	Fundamental (dBuV/m)	Δ (dB)	Band Edge Field Strength (dBuV/m)	Detector
Horizontal	2483.5	108.729	40.222	68.507	Peak
Horizontal	2483.5	91.849	41.787	50.062	Average
Vertical	2483.5	98.37	40.222	58.148	Peak
Vertical	2483.5	82.04	41.787	40.253	Average

Note:


The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

Band Edge field Strength = F - Δ


F = Fundamental field Strength (Peak or Average)

Δ = Conducted Band Edge Delta (Peak or Average)

Peak Detector of conducted Band Edge Delta

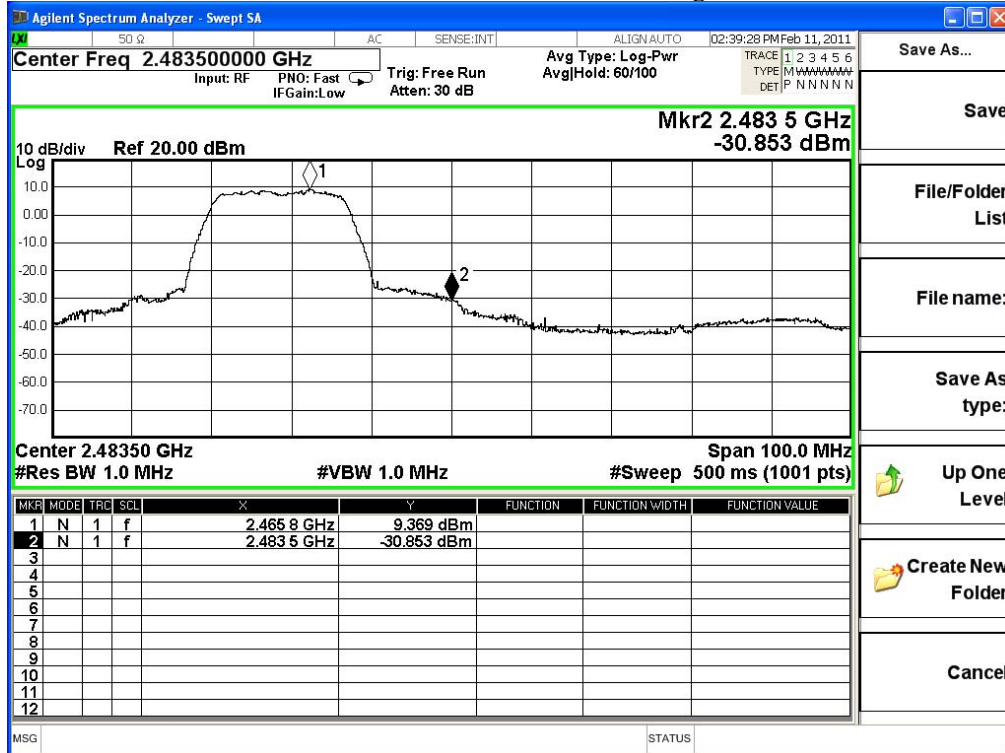

Average Detector of conducted Band Edge Delta

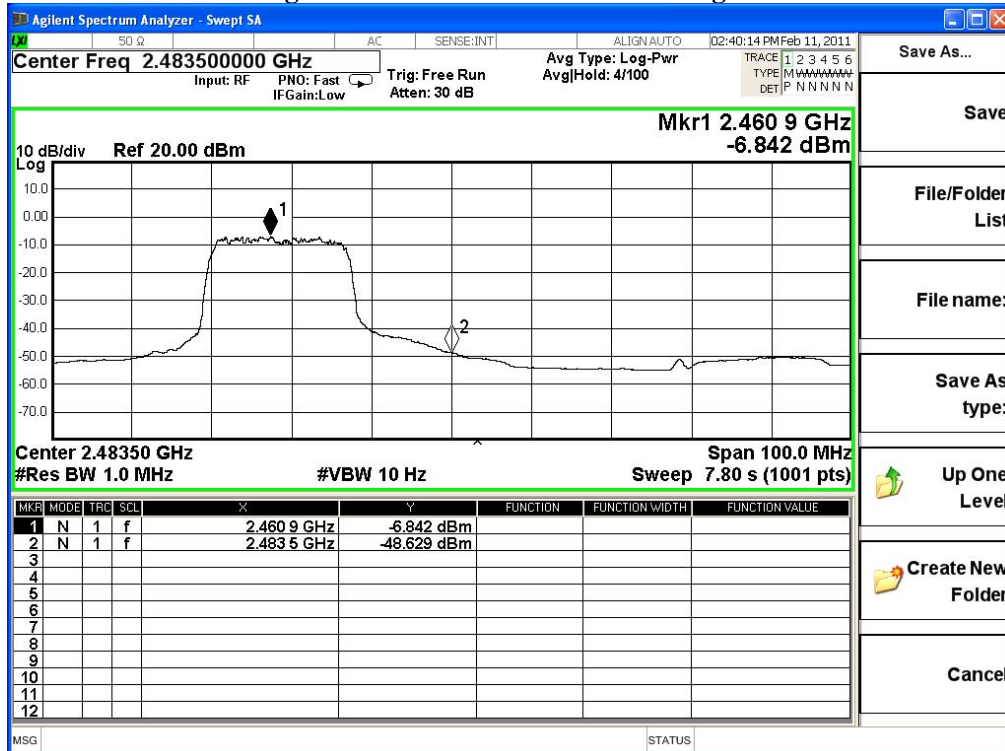

7. Occupied Bandwidth


7.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2011
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2011
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2011

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

7.2. Test Setup

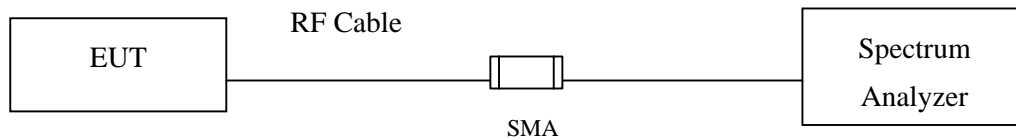

7.3. Limits

The minimum bandwidth shall be at least 500 kHz.

7.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2009; tested according to DTS test procedure of Mar. 2005 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Span greater than RBW.

7.5. Uncertainty


± 150Hz

7.6. Test Result of Occupied Bandwidth

Product : JukeBlox Networked Media Module
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	12450	>500	Pass


Figure Channel 1:

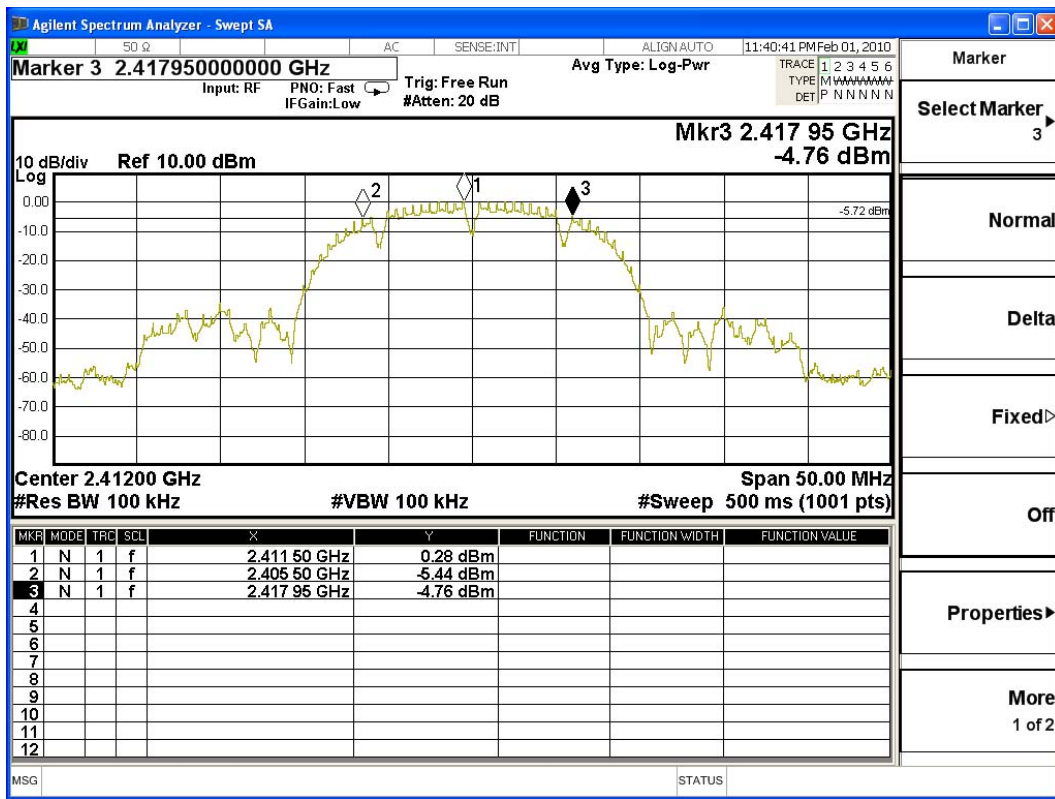

Product : JukeBlox Networked Media Module
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	11550	>500	Pass


Figure Channel 6:

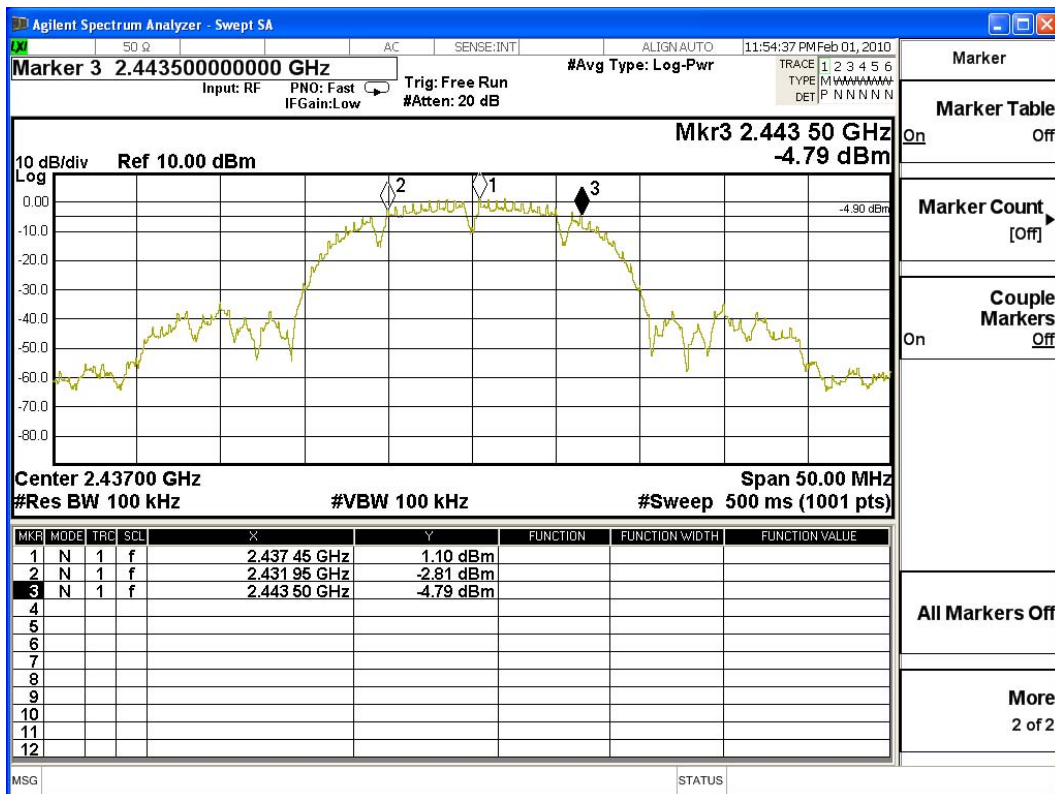

Product : JukeBlox Networked Media Module
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	12000	>500	Pass


Figure Channel 11:

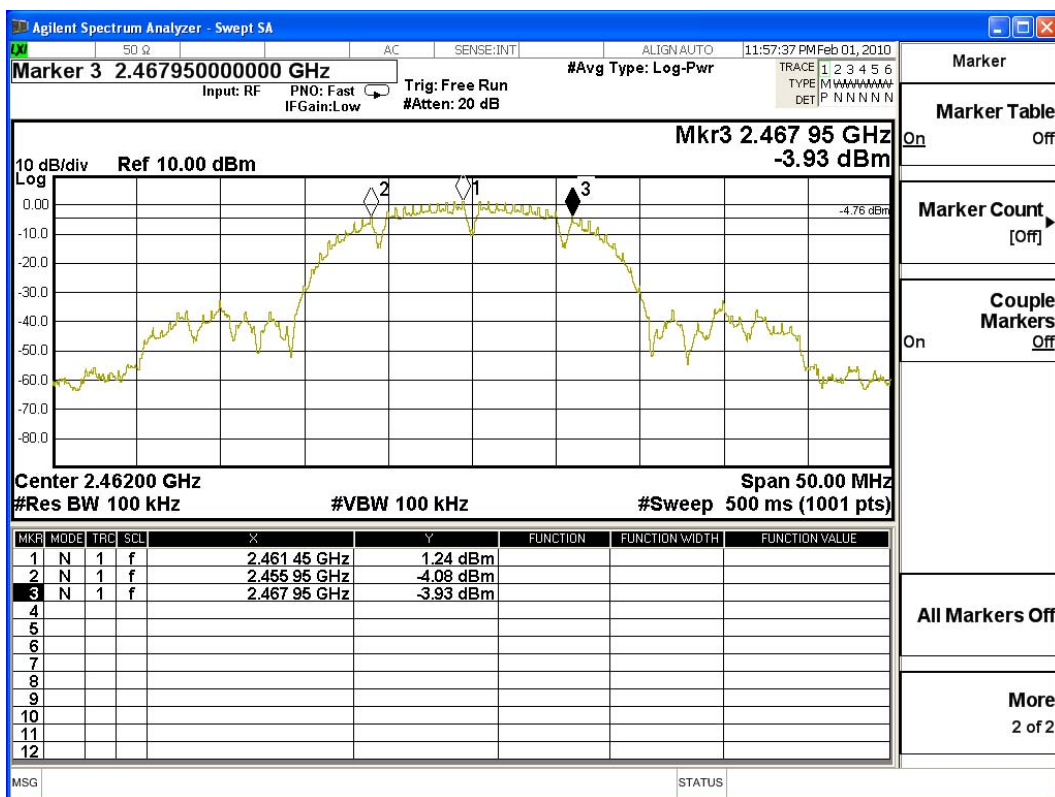

Product : JukeBlox Networked Media Module
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	16100	>500	Pass


Figure Channel 1:

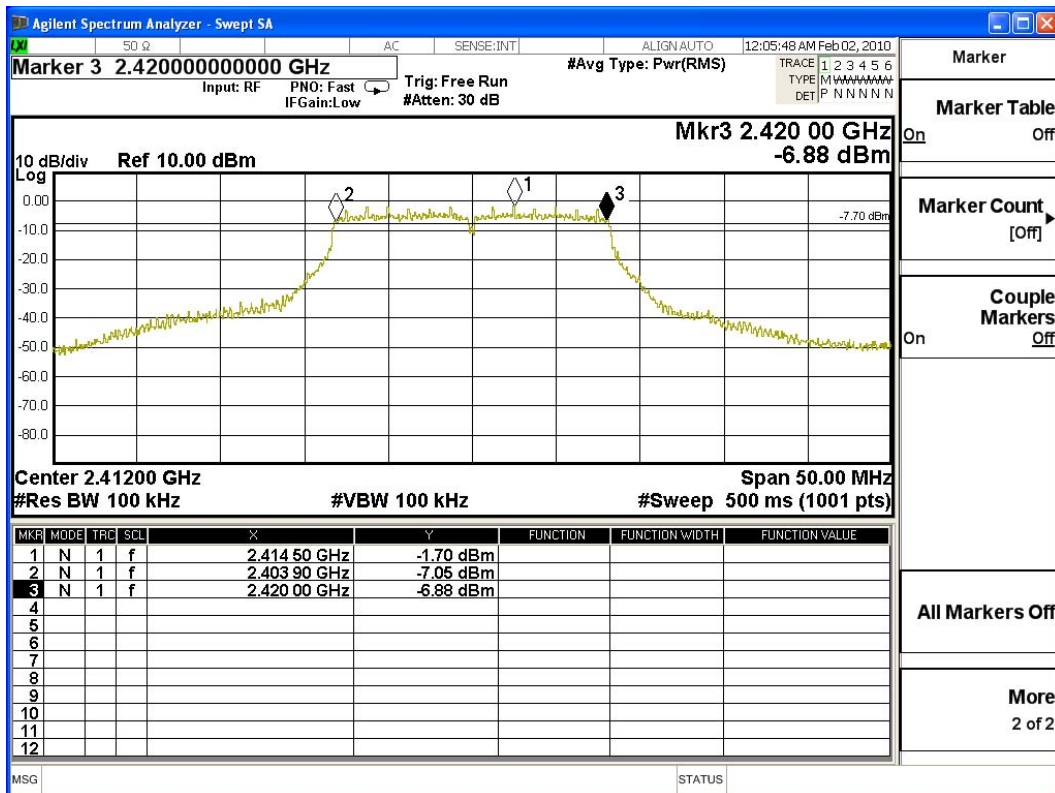

Product : JukeBlox Networked Media Module
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	16250	>500	Pass


Figure Channel 6:

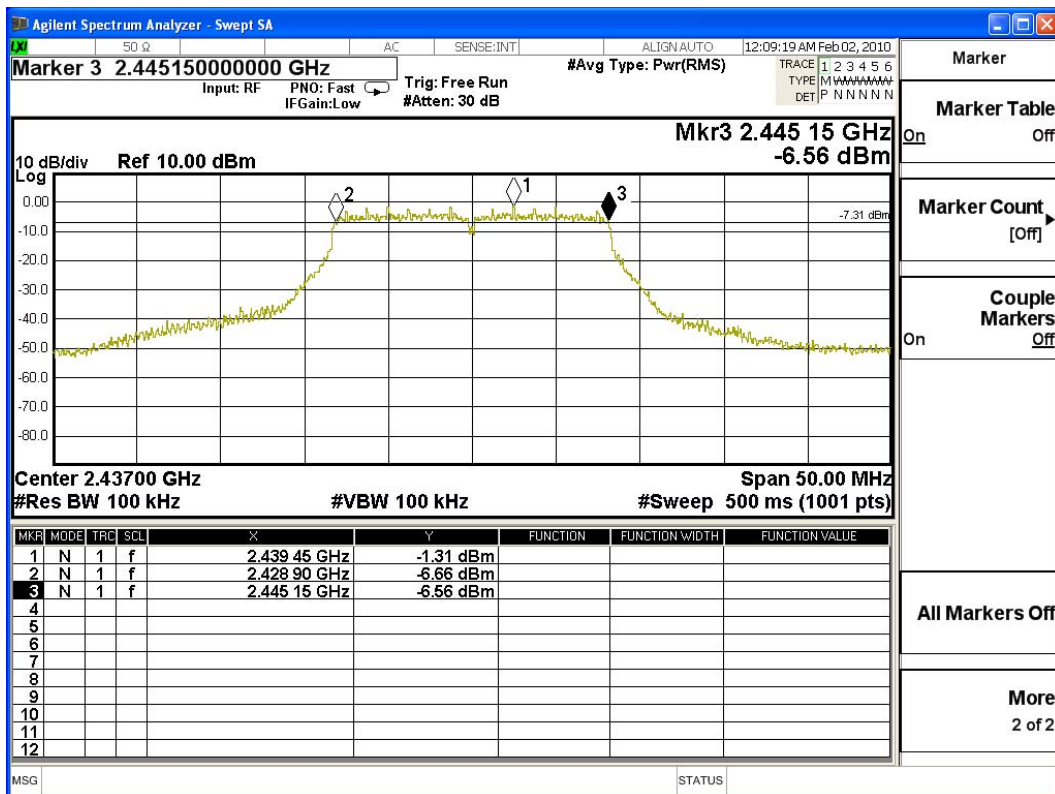

Product : JukeBlox Networked Media Module
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	16200	>500	Pass

Figure Channel 11:

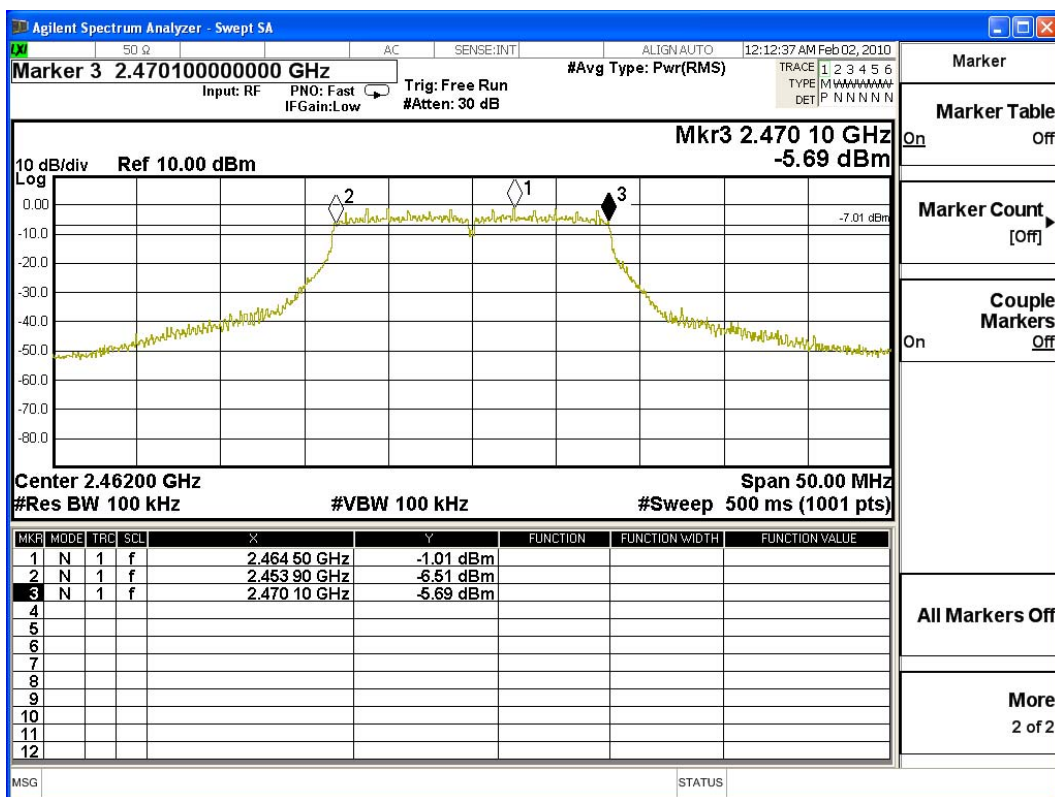

8. Power Density


8.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2011
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2011
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2011

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

8.2. Test Setup

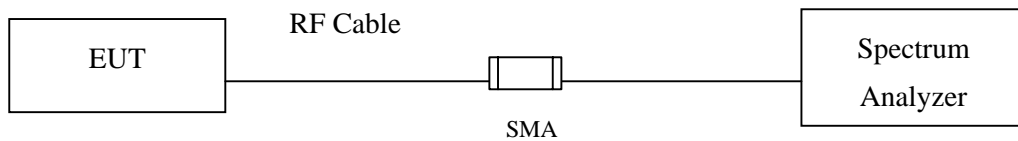

8.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2009; tested according to DTS test procedure of Mar. 2005 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW= 3 kHz, VBW=10KHz, Sweep time=(SPAN/3KHz), detector=Peak detector

8.5. Uncertainty


± 1.27 dB

8.6. Test Result of Power Density

Product : JukeBlox Networked Media Module
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412.00	-12.463	< 8dBm	Pass


Figure Channel 1:

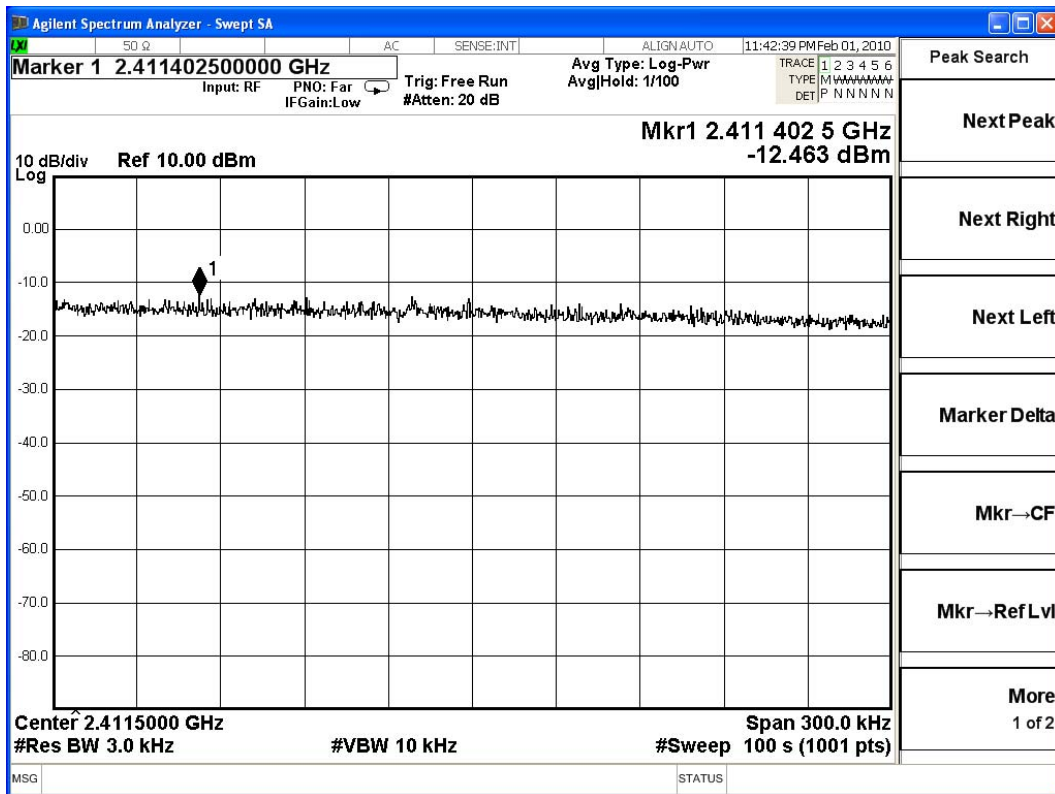

Product : JukeBlox Networked Media Module
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6	2437.000	-11.940	< 8dBm	Pass


Figure Channel 6:

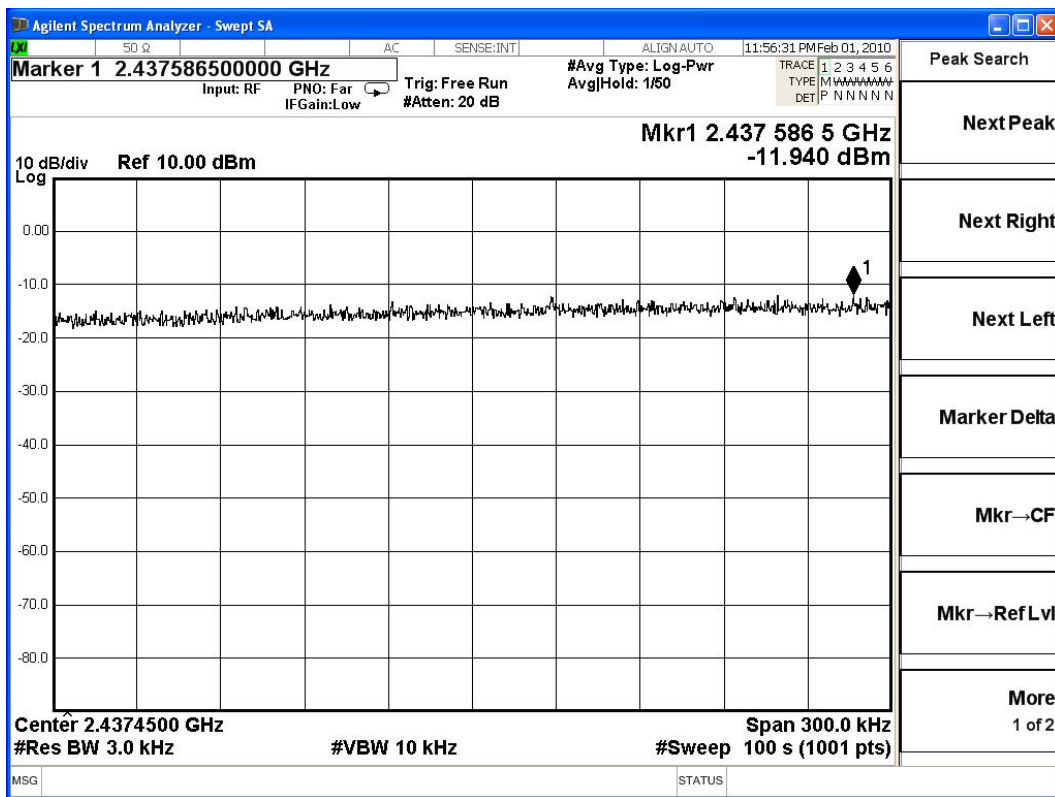

Product : JukeBlox Networked Media Module
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11	2462.00	-11.042	< 8dBm	Pass


Figure Channel 11:

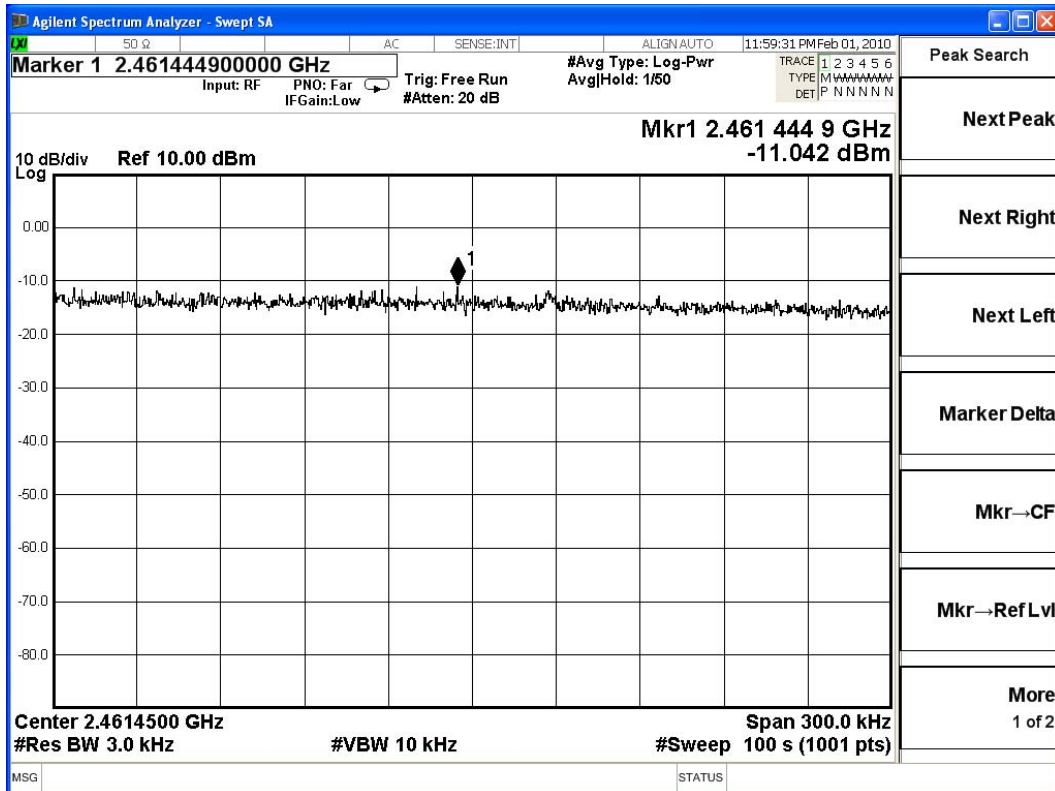

Product : JukeBlox Networked Media Module
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412.00	-13.872	< 8dBm	Pass


Figure Channel 1:

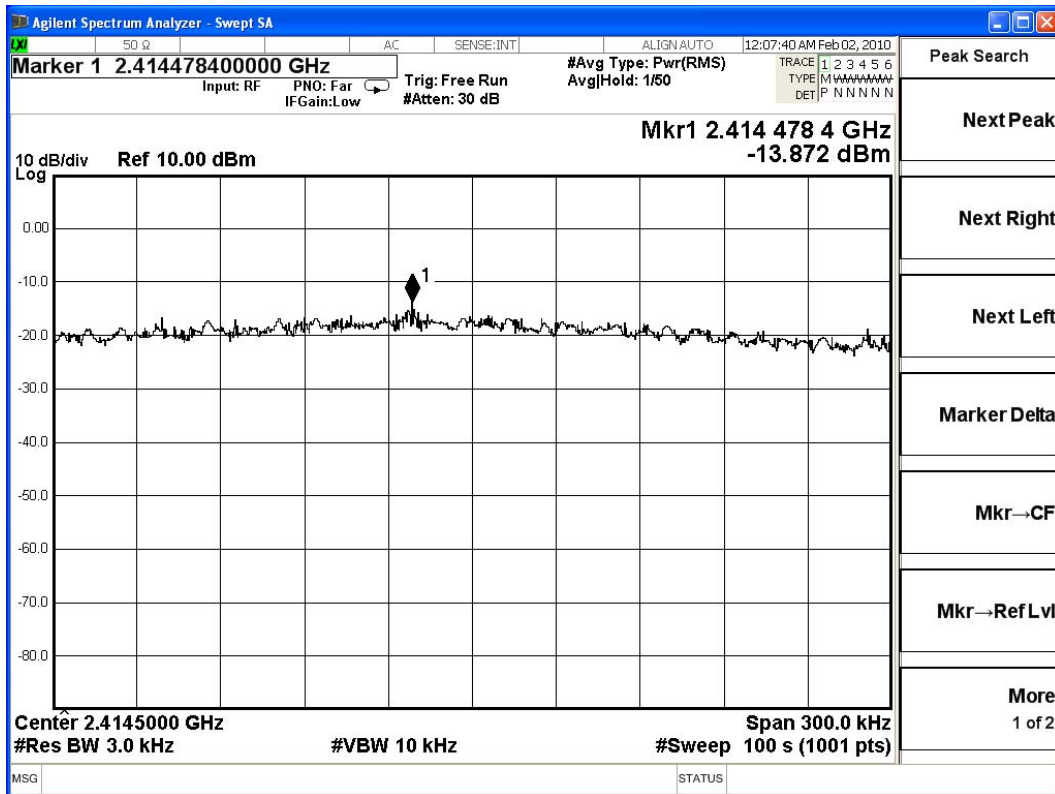

Product : JukeBlox Networked Media Module
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6	2437.000	-15.166	< 8dBm	Pass


Figure Channel 6:

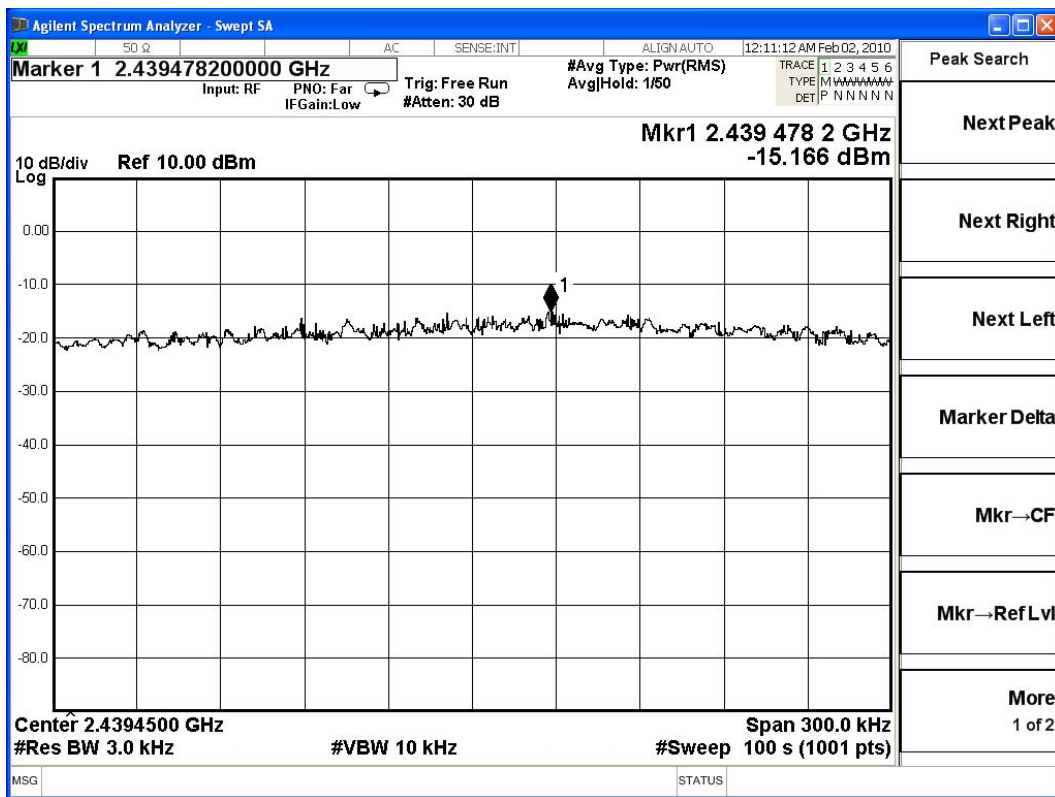

Product : JukeBlox Networked Media Module
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11	2462.00	-14.392	< 8dBm	Pass

Figure Channel 11:

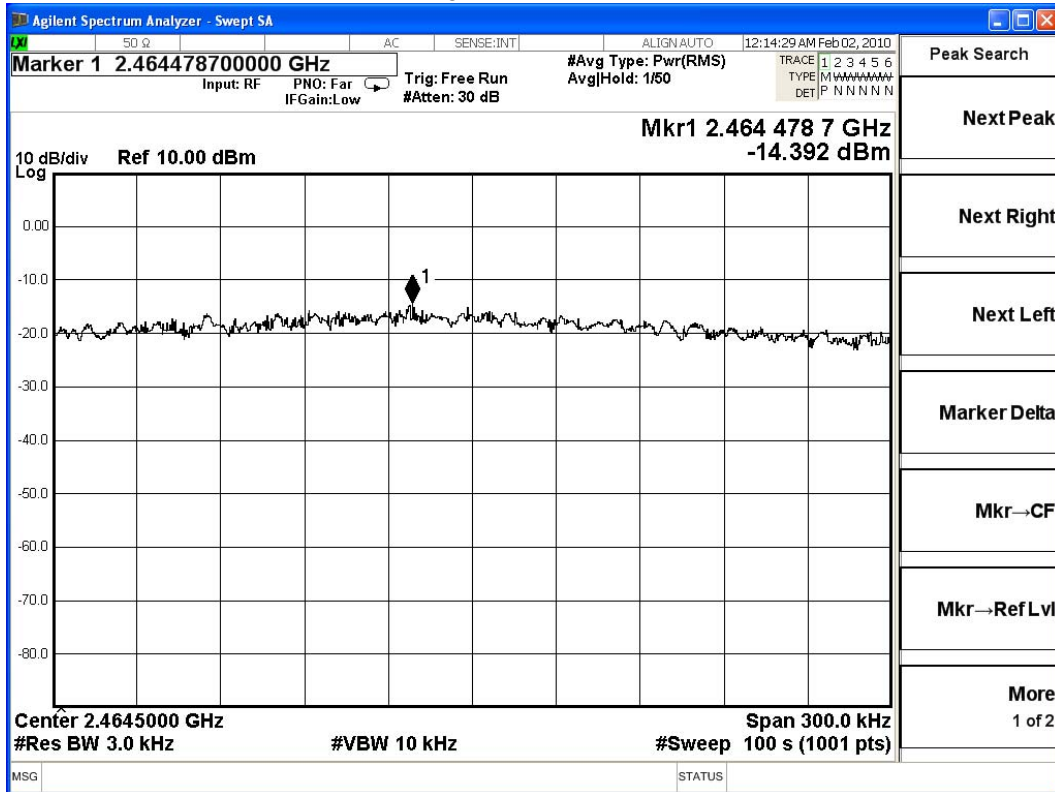

9. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs