



TEST REPORT

Test Report No. : UL-RPT-RP89056JD13C V2.0

Manufacturer : Bang & Olufsen a/s
Model No. : BeoVision 11-40
FCC ID : TTULBWA1ZZPD
IC Certification No. : 3775B-LBWA1ZZPD
Test Standard(s) : FCC Parts 15.407(b), 15.209(a), Industry Canada Parts RSS-210
Issue 8 December 2010 A9.2(1),(2),(3)&(4), RSS-Gen Issue 3
December 2010 4.9

1. This test report shall not be reproduced in full or partial, without the written approval of RFI Global Services Ltd trading as UL.
2. The results in this report apply only to the sample(s) tested.
3. This sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 2.0 supersedes all previous versions.

Date of Issue: 25 January 2013

Checked by:

Sarah Williams
WiSE Laboratory Engineer

Issued by :

pp

John Newell
Group Quality Manager, WiSE
Basingstoke,
UL Verification Services



This laboratory is accredited by UKAS.
The tests reported herein have been
performed in accordance with its' terms
of accreditation.

RFI Global Services Ltd trading as UL

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

Table of Contents

1. Customer Information.....	4
2. Summary of Testing.....	5
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	6
2.4. Deviations from the Test Specification	6
3. Equipment Under Test (EUT)	7
3.1. Identification of Equipment Under Test (EUT)	7
3.2. Description of EUT	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	8
3.5. Support Equipment	10
3.6. Antenna	11
4. Operation and Monitoring of the EUT during Testing	12
4.1. Operating Modes	12
4.2. Configuration and Peripherals	12
5. Measurements, Examinations and Derived Results	13
5.1. General Comments	13
5.2. Test Results	14
5.2.1. Transmitter Out of Band Radiated Emissions	14
5.2.2. Transmitter Band Edge Radiated Emissions	36
6. Measurement Uncertainty	66
7. Report Revision History	67

1. Customer Information





Company Name:	Bang & Olufsen a/s
Address:	Peter Bangs Vej 15 7600 Struer Denmark

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR15.407
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2012: Part 15 Subpart E (Unlicensed National Information Infrastructure Devices) – Section 15.407
Specification Reference:	47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2012: Part 15 Subpart C (Intentional Radiators) - Sections 15.209
Specification Reference:	RSS-Gen Issue 3 December 2010
Specification Title:	General Requirements and Information for the Certification of Radio Apparatus
Specification Reference:	RSS-210 Issue 8 December 2010
Specification Title:	Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment.
Site Registration:	FCC: 209735; Industry Canada: 3245B-2
Location of Testing:	RFI Global Services Ltd trading as UL, Wade Road, Basingstoke, Hampshire, RG24 8AH.
Test Dates:	29 October 2012 to 24 January 2013

2.2. Summary of Test Results

FCC Reference (47CFR)	IC Reference	Measurement	Result
Part 15.407(b) / 15.209(a)	RSS-Gen 4.9 / RSS-210 9.2 (1),(2),(3)&(4)	Transmitter Out of Band Radiated Emissions	
Part 15.407(b)/ 15.209(a)	RSS-Gen 4.9 / RSS-210 9.2 (1),(2),(3)&(4)	Transmitter Band Edge Radiated Emissions	
Key to Results  = Complied  = Did not comply			

2.3. Methods and Procedures

Reference:	ANSI C63.4 (2009)
Title:	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
Reference:	ANSI C63.10 (2009)
Title:	American National Standard for Testing Unlicensed Wireless Devices
Reference:	FCC KDB 789033 D01 v01r02 9/26/2012
Title:	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E
Reference:	FCC KDB 662911 D01 v01r02 9/26/2012
Title:	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
Reference:	FCC Response to Inquiry
Title:	Tracking Number 969369 Date: 21 February 2012

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specifications identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Bang & Olufsen
Model Name or Number:	BeoVision 11-40
Serial Number:	22975498
Software Version:	1.0.1.27488
FCC ID:	TTULBWA1ZZPD
Industry Canada Certification Number:	3775B-LBWA1ZZPD

3.2. Description of EUT

The equipment under test was an IEEE 802.11a,b,g,n WLAN module operating in the 2.4 GHz and 5 GHz bands. The module is incorporated into a 40" television.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Technology Tested:	IEEE 802.11 / Unlicensed National Information Infrastructure Devices (U-NII)		
Type of Unit:	Transceiver		
Modulation:	CCK, BPSK, QPSK, 16QAM, 64QAM		
Data rates:	802.11a	6, 9, 12, 18, 24, 36 ,48 & 54 Mbps	
	802.11n	6.5, 13, 19.5, 26, 39, 52, 58.5, 65, 78, 104, 117 & 130 Mbps	
Power Supply Requirement(s):	Nominal	120 VAC 60 Hz	
Channel Spacing:	20 MHz		
Transmit Frequency Band:	5150 MHz to 5250 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	36	5180
	Middle	40	5200
	Top	48	5240
Transmit Frequency Band:	5250 MHz to 5350 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	52	5260
	Middle	56	5280
	Top	64	5320
Transmit Frequency Band:	5470 MHz to 5725 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	100	5500
	Middle	116	5580
	Top	140	5700
Transmit Frequency Band:	5725 MHz to 5825 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	149	5745
	Middle	153	5765
	Top	161	5805

Additional Information Related to Testing (continued)

Channel Spacing:	40 MHz		
Transmit Frequency Band:	5150 MHz to 5250 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	38	5190
	Top	46	5230
Transmit Frequency Band:	5250 MHz to 5350 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	54	5270
	Top	62	5310
Transmit Frequency Band:	5470 MHz to 5725 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	102	5510
	Middle	110	5550
	Top	134	5670
Transmit Frequency Band:	5725 MHz to 5825 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	151	5755
	Top	159	5795

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Laptop
Brand Name:	Dell
Model Name or Number:	D610
Serial Number:	RFI Asset No. PC343NT

Description:	Internal Antenna
Brand Name:	TE Connectivity Ltd
Model Name or Number:	PUCK

Description:	Internal Antenna
Brand Name:	TE Connectivity Ltd
Model Name or Number:	UAM

Description:	Ethernet cable
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	HDMI Cables / 2 metres length
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	HDMI Monitor
Brand Name:	Philips
Model Name or Number:	MUT1121T
Serial Number:	AU1A1017002190

Description:	USB dongle
Brand Name:	Integral
Model Name or Number:	8 GB
Serial Number:	Not marked or stated

Support Equipment (continued)

Description:	Scart cable
Brand Name:	Not Stated
Model Name or Number:	Not Stated
Serial Number:	Not Stated

Description:	Ethernet hub
Brand Name:	Netgear
Model Name or Number:	GS605
Serial Number:	1YG194390218E

3.6. Antenna

The table below lists the antennas used with this product:

Type	Stated Gain (dBi)	Model	Part No.
Dual-band	4.0	PUCK	1551868-1
Dual-band	3.0	UAM	1513472-7

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Continuously transmitting with a modulated carrier at maximum power on the bottom, middle and top channels as required using the supported data rate/modulation type.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- Transmitting in test mode with 100% duty cycle and controlled using a bespoke application on a laptop PC. The application was used to enable continuous transmission and to select the test channels, data rate and modulation scheme as required. The Customer supplied instructions on how to configure the EUT for test purposes.
- Transmitter spurious emissions were performed with the EUT transmitting with a data rate of 13 Mbps (MCS8) with a channel bandwidth of 20 MHz, as this was found to have the highest power level and therefore deemed to be worst case.

Please refer to RFI-RPT-RP89056JD13F for details of these measurements.

- Radiated emissions tests were performed with all unused ports terminated.
- The 3 internal antennas are connected to the WLAN module ports within the television as follows:

Module Port	Antenna Type	TX	RX
ANT0	PUCK	Yes	Yes
ANT1	UAM	Yes	Yes
ANT2	PUCK	No	Yes

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6 Measurement Uncertainty* for details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

5.2. Test Results

5.2.1. Transmitter Out of Band Radiated Emissions

Test Summary:

Test Engineer:	Nick Steele	Test Date:	02 November 2012
Test Sample Serial Number:	22975498		

FCC Reference:	Parts 15.407(b)(3),(6),(7) & 15.209(a)
Industry Canada Reference:	RSS-Gen 4.9 / RSS-210 A9.2(3)
Test Method Used:	FCC KDB 789033 G) & ANSI C63.10 Sections 6.3 and 6.5
Frequency Range:	30 MHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	28
Relative Humidity (%):	28

Note(s):


1. Measurements below 1 GHz were limited to the 5.47-5.725 GHz band, 802.11n HT20 / MCS8 /13 Mbps as it produced the highest conducted output power and was therefore deemed worst case.
2. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
3. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore final radiated emissions measurements were performed with the EUT set to the top channel only.
4. All other emissions were at least 20 dB below the appropriate limit or below the noise floor of the measurement system.
5. Measurements below 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Transmitter Out of Band Radiated Emissions (continued)**Results: Top Channel / Field Strength**

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
110.589	Vertical	31.0	43.5	12.5	Complied
126.911	Horizontal	31.4	43.5	12.1	Complied
170.494	Horizontal	32.3	43.5	11.2	Complied
250.000	Vertical	29.6	46.0	16.4	Complied

Results: Top Channel / EIRP

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
522.193	Vertical	-52.9	-27.0	25.9	Complied

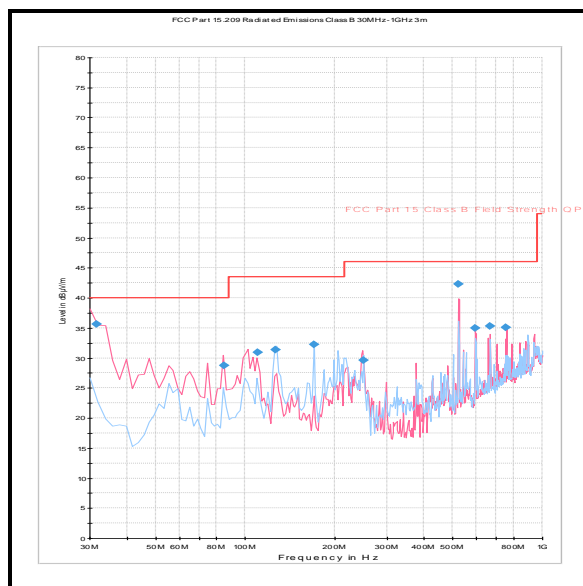

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Test Equipment Used:

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A1834	Attenuator	Hewlett Packard	8491B	10444	29 Jan 2013	12
A553	Antenna	Chase	CBL6111A	1593	15 Feb 2013	12
G0543	Amplifier	Sonoma	310N	230801	02 Jan 2013	12
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	24 Oct 2013	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	03 Feb 2013	12

Transmitter Out of Band Radiated Emissions (5.15-5.25 GHz band operation)**Test Summary:**

Test Engineers:	David Doyle & Mark Percival	Test Date:	30 October 2012
Test Sample Serial Number:	22975498		

FCC Reference:	Parts 15.407(b)(1),(7) & 15.209(a)
Industry Canada Reference:	RSS-Gen 4.9 / RSS-210 A9.2(1)
Test Method Used:	FCC KDB 789033 G) & ANSI C63.10 Sections 6.3 and 6.6
Frequency Range:	1 GHz to 40 GHz

Environmental Conditions:

Temperature (°C):	22
Relative Humidity (%):	37 to 40

Note(s):

1. FCC Part 15.407(b)(1) states for devices operating in the 5.15 to 5.25 GHz band, all emissions outside the 5.15-5.35 GHz band shall not exceed and EIRP of -27 dBm/MHz. Part 15.407(b)(7) states the provisions of 15.205 apply, e.g. restricted bands of operation.
2. Industry Canada RSS-210 A9.2(1) states emissions outside the band 5150 to 5250 MHz shall not exceed -27 dBm/MHz e.i.r.p.
3. Pre-scans above 1 GHz were performed with the EUT transmitting in the 5.47-5.725 GHz band as it produced the highest conducted output power in this band. However, final measurements were performed on any emission seen for each band as stated in FCC Response to Inquiry (Tracking Number 917954 / Date: 14th February 2012).
4. Measurements were performed with the EUT transmitting 13 Mbps / MCS8 / 20 MHz channel bandwidth as all configurations were previously measured and this combination produced the highest output power. Pre-scans were performed with the EUT transmitting on the top channel.
5. The second harmonic emission visible on the pre-scan in the 5.47-5.725 GHz band was measured. Due to the lower power setting in this band the emission was not present.
6. All other emissions were at least 20 dB below the appropriate limit or below the noise floor of the measurement system.
7. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
8. Final measurements above 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Transmitter Out of Band Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: Bottom Channel / EIRP**

Frequency (MHz)	Antenna Polarity	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1665.106	Vertical	-37.7	-27.0	10.7	Complied
1998.372	Vertical	-40.1	-27.0	13.1	Complied
2330.987	Vertical	-40.3	-27.0	13.3	Complied
2663.757	Vertical	-43.6	-27.0	16.6	Complied
4113.226	Horizontal	-45.6	-27.0	18.6	Complied

Results: Bottom Channel / Field strength / Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1665.106	Vertical	59.6	74.0	14.4	Complied
2330.987	Vertical	57.1	74.0	16.9	Complied
4113.226	Horizontal	49.6	74.0	24.4	Complied

Results: Bottom Channel / Field strength / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1665.106	Vertical	46.8	54.0	7.2	Complied
2330.987	Vertical	45.3	54.0	8.7	Complied
4113.226	Horizontal	41.0	54.0	13.0	Complied

Transmitter Out of Band Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: Middle Channel / EIRP**

Frequency (MHz)	Antenna Polarity	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1665.306	Vertical	-37.5	-27.0	10.5	Complied
1998.221	Vertical	-39.5	-27.0	12.5	Complied
2330.536	Vertical	-40.8	-27.0	13.8	Complied
2664.107	Vertical	-43.7	-27.0	16.7	Complied
4162.004	Horizontal	-46.1	-27.0	19.1	Complied

Results: Middle Channel / Field strength / Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1665.306	Vertical	59.9	74.0	14.1	Complied
2330.536	Vertical	56.6	74.0	17.4	Complied
4162.004	Horizontal	49.1	74.0	24.9	Complied

Results: Middle Channel / Field strength / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1665.306	Vertical	46.3	54.0	7.7	Complied
2330.536	Vertical	45.1	54.0	8.9	Complied
4162.004	Horizontal	40.1	54.0	13.9	Complied

Transmitter Out of Band Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: Top Channel / EIRP**

Frequency (MHz)	Antenna Polarity	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1664.655	Vertical	-36.8	-27.0	9.8	Complied
1997.570	Vertical	-40.5	-27.0	13.5	Complied
2331.337	Vertical	-39.9	-27.0	12.9	Complied
2663.707	Vertical	-42.6	-27.0	15.6	Complied
4184.369	Horizontal	-45.8	-27.0	18.8	Complied

Results: Top Channel / Field strength / Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1664.655	Vertical	60.6	74.0	13.4	Complied
2331.337	Vertical	57.5	74.0	16.5	Complied
4184.369	Horizontal	49.4	74.0	24.6	Complied

Results: Top Channel / Field strength / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1664.655	Vertical	45.8	54.0	8.2	Complied
2331.337	Vertical	44.7	54.0	9.3	Complied
4184.369	Horizontal	40.2	54.0	13.8	Complied

Transmitter Out of Band Radiated Emissions (5.25-5.35 GHz band operation)**Test Summary:**

Test Engineers:	David Doyle & Mark Percival	Test Date:	30 October 2012
Test Sample Serial Number:	22975498		

FCC Reference:	Parts 15.407(b)(2),(7) & 15.209(a)
Industry Canada Reference:	RSS-Gen 4.9 / RSS-210 A9.2(2)
Test Method Used:	FCC KDB 789033 G) & ANSI C63.10 Sections 6.3 and 6.6
Frequency Range:	1 GHz to 40 GHz

Environmental Conditions:

Temperature (°C):	22
Relative Humidity (%):	37 to 40

Note(s):

1. FCC Part 15.407(b)(2) states for devices operating in the 5.25 to 5.35 GHz band that generate emissions in the 5.15 to 5.25 GHz band must meet all applicable technical requirements for operation in the 5.15 to 5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15 to 5.25 GHz band. Part 15.407(b)(7) states the provisions of 15.205 apply e.g. restricted bands of operation.
2. Industry Canada RSS-210 A9.2(2) states emissions outside the band 5250 to 5350 MHz shall not exceed -27 dBm/MHz EIRP.
3. Pre-scans above 1 GHz were performed with the EUT transmitting in the 5.47-5.725 GHz band as it produced the highest conducted output power. However, final measurements were performed on any emission seen for each band as stated in FCC Response to Inquiry (Tracking Number 917954 / Date: 14th February 2012).
4. Measurements were performed with the EUT transmitting 13 Mbps / MCS8 / 20 MHz channel bandwidth as all configurations were previously measured and this combination produced the highest output power. Pre-scans were performed with the EUT transmitting on the top channel.
5. The second harmonic emission visible on the pre-scan in the 5.47-5.725 GHz band was measured. Due to the lower power setting in this band the emission was not present.
6. The final measured value, for the given emission, in the table above incorporates the calibrated antenna factor and cable loss.
7. All other emissions were at least 20 dB below the appropriate limit or below the noise floor of the measurement system.
8. Final measurements above 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Transmitter Out of Band Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: Bottom Channel / EIRP**

Frequency (MHz)	Antenna Polarity	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1665.005	Vertical	-38.2	-27.0	11.2	Complied
1997.871	Vertical	-41.6	-27.0	14.6	Complied
2330.830	Vertical	-39.8	-27.0	12.8	Complied
2663.957	Vertical	-43.6	-27.0	16.6	Complied
4180.360	Horizontal	-45.3	-27.0	18.3	Complied

Results: Bottom Channel / Field strength / Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1665.005	Vertical	59.2	74.0	14.8	Complied
2330.830	Vertical	57.6	74.0	16.4	Complied
4180.360	Horizontal	49.9	74.0	24.1	Complied

Results: Bottom Channel / Field strength / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1665.005	Vertical	43.1	54.0	10.9	Complied
2330.830	Vertical	46.5	54.0	7.5	Complied
4180.360	Horizontal	40.6	54.0	13.4	Complied

Transmitter Out of Band Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: Middle Channel / EIRP**

Frequency (MHz)	Antenna Polarity	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1664.705	Vertical	-37.7	-27.0	10.7	Complied
1997.570	Vertical	-41.0	-27.0	14.0	Complied
2331.387	Vertical	-39.6	-27.0	12.6	Complied
2664.057	Vertical	-43.4	-27.0	16.4	Complied
4225.020	Horizontal	-45.5	-27.0	18.5	Complied

Results: Middle Channel / Field strength / Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1664.705	Vertical	59.7	74.0	14.3	Complied
2331.387	Vertical	57.8	74.0	16.2	Complied
4225.020	Horizontal	49.7	74.0	24.3	Complied

Results: Middle Channel / Field strength / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1664.705	Vertical	46.2	54.0	7.8	Complied
2331.387	Vertical	45.9	54.0	8.1	Complied
4225.020	Horizontal	40.4	54.0	13.6	Complied

Transmitter Out of Band Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: Top Channel / EIRP**

Frequency (MHz)	Antenna Polarity	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1664.855	Vertical	-39.4	-27.0	12.4	Complied
1997.921	Vertical	-40.1	-27.0	13.1	Complied
2330.880	Vertical	-40.5	-27.0	13.5	Complied
2664.158	Vertical	-42.5	-27.0	15.5	Complied
4256.503	Horizontal	-44.9	-27.0	17.9	Complied

Results: Top Channel / Field strength / Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1664.855	Vertical	57.9	74.0	16.1	Complied
2330.880	Vertical	56.8	74.0	17.2	Complied
4256.503	Horizontal	50.3	74.0	23.7	Complied

Results: Top Channel / Field strength / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1664.855	Vertical	45.1	54.0	8.9	Complied
2330.880	Vertical	44.0	54.0	10.0	Complied
4256.503	Horizontal	41.9	54.0	12.1	Complied

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation)**Test Summary:**

Test Engineers:	Nick Steele, Mark Percival & Andrew Edwards	Test Dates:	29 October 2012, 30 October 2012 & 01 November 2012
Test Sample Serial Number:	22975498		

FCC Part:	15.407(b)(3),(7) & 15.209(a)
Industry Canada Reference:	RSS-Gen 4.9 / RSS-210 A9.2(3)
Test Method Used:	FCC KDB 789033 G) & ANSI C63.10 Sections 6.3 and 6.6
Frequency Range:	1 GHz to 40 GHz

Environmental Conditions:

Temperature (°C):	22 to 23
Relative Humidity (%):	37 to 40

Note(s):

1. FCC Part 15.407(b)(3) states for transmitters operating in the band 5.47 to 5.725 GHz: all emissions outside of the band will not exceed -27 dBm/MHz. Part(b)(7) states the provisions of 15.205 apply e.g. restricted bands of operation.
2. Industry Canada RSS-210 A9.2(3) states emissions outside the band 5470 to 5725 MHz shall not exceed -27 dBm/MHz EIRP.
3. Pre-scans were performed on the 5.47-5.725 GHz band as it produced the highest conducted output power. However, final measurements were performed on any emission seen for each band as stated in FCC Response to Inquiry (Tracking Number 917954 / Date: 14th February 2012).
4. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
5. All other emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the applicable limit or below the measurement system noise floor.
6. The emission shown on the 4 GHz to 6 GHz plot is the EUT fundamental.
7. Measurements were performed across the two restricted bands closest to the bands of operation with the EUT transmitting on the top channel in the 5.47 to 5.725 GHz band. Plots are included in this section of the test report. Peak and average measurements were made.
8. In accordance with FCC KDB 789033 G) Para 1) c) if the peak measurement is below the average limit, then average measurements are not required.
9. Pre-scans above 1 GHz were performed in a fully anechoic chamber (RFI Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: Bottom Channel / EIRP**

Frequency (MHz)	Antenna Polarity	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1664.855	Vertical	-37.2	-27.0	10.2	Complied
1997.871	Vertical	-41.4	-27.0	14.4	Complied
2330.880	Vertical	-40.2	-27.0	13.2	Complied
2663.606	Vertical	-44.0	-27.0	17.0	Complied
4400.079	Horizontal	-48.0	-27.0	21.0	Complied
11001.383	Horizontal	-42.5	-27.0	15.5	Complied

Results: Bottom Channel / Field strength / Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1664.855	Vertical	60.1	74.0	13.9	Complied
2330.880	Vertical	57.1	74.0	16.9	Complied
11001.383	Horizontal	52.7	74.0	21.3	Complied

Results: Bottom Channel / Field strength / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1664.855	Vertical	44.1	54.0	9.9	Complied
2330.880	Vertical	44.2	54.0	9.8	Complied

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: Middle Channel / EIRP**

Frequency (MHz)	Antenna Polarity	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1665.156	Vertical	-37.0	-27.0	10.0	Complied
1997.871	Vertical	-41.0	-27.0	14.0	Complied
2330.880	Vertical	-41.2	-27.0	14.2	Complied
2663.953	Vertical	-43.9	-27.0	16.9	Complied
4464.001	Horizontal	-43.7	-27.0	16.7	Complied
11164.349	Horizontal	-42.5	-27.0	15.5	Complied

Results: Middle Channel / Field strength / Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1665.156	Vertical	60.4	74.0	13.6	Complied
2330.880	Vertical	56.2	74.0	17.8	Complied
11164.349	Horizontal	52.7	74.0	21.3	Complied

Results: Middle Channel / Field strength / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1665.156	Vertical	43.1	54.0	10.9	Complied
2330.880	Vertical	42.3	54.0	11.7	Complied

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: Top Channel / EIRP**

Frequency (MHz)	Antenna Polarity	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1664.754	Vertical	-35.6	-27.0	8.6	Complied
1997.971	Vertical	-40.7	-27.0	13.7	Complied
2330.680	Vertical	-40.4	-27.0	13.4	Complied
2663.903	Vertical	-40.2	-27.0	13.2	Complied
4559.893	Horizontal	-38.7	-27.0	11.7	Complied
11400.741	Horizontal	-41.6	-27.0	14.6	Complied



Results: Top Channel / Field strength / Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1664.754	Vertical	61.8	74.0	12.2	Complied
2330.680	Vertical	57.0	74.0	17.0	Complied
4559.893	Horizontal	56.5	74.0	17.5	Complied
11400.741	Horizontal	53.6	74.0	20.4	Complied



Results: Top Channel / Field strength / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1664.754	Vertical	41.9	54.0	12.1	Complied
2330.680	Vertical	45.3	54.0	8.7	Complied
4559.893	Horizontal	53.3	54.0	0.7	Complied

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)



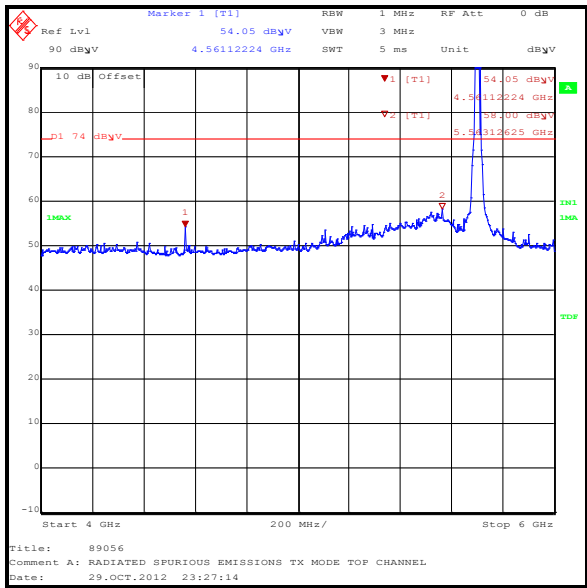
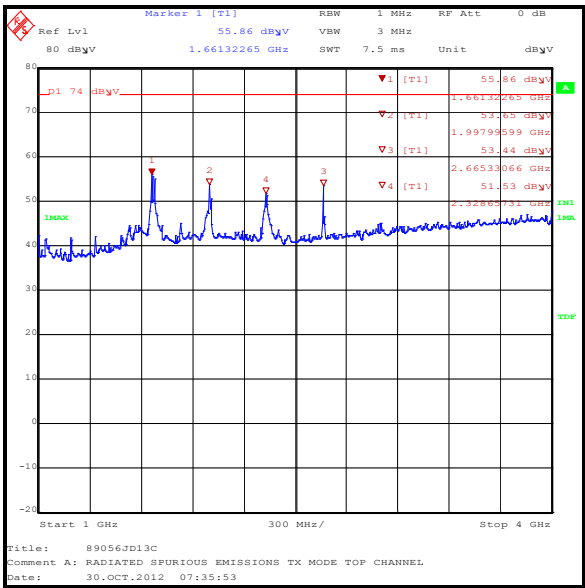


Peak Detector

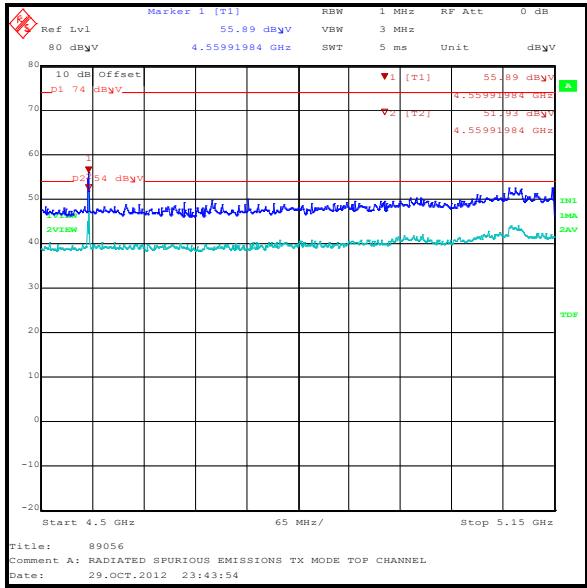
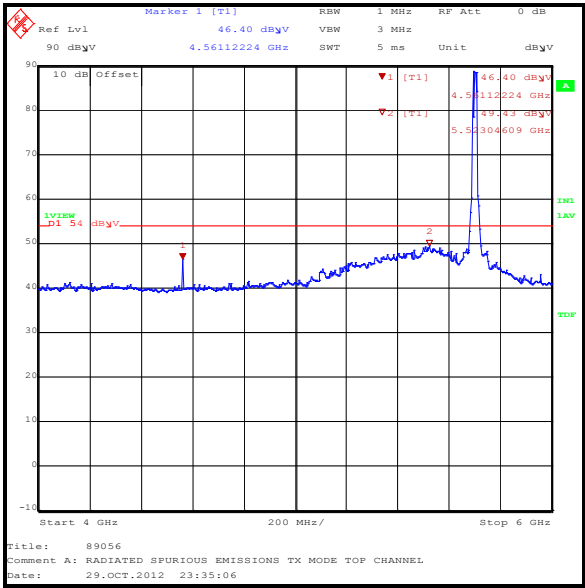


Average Detector

Restricted Band 4.5 GHz to 5.15 GHz

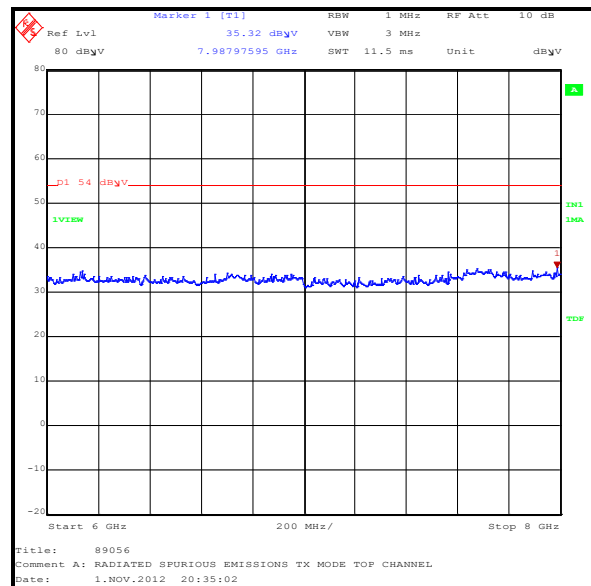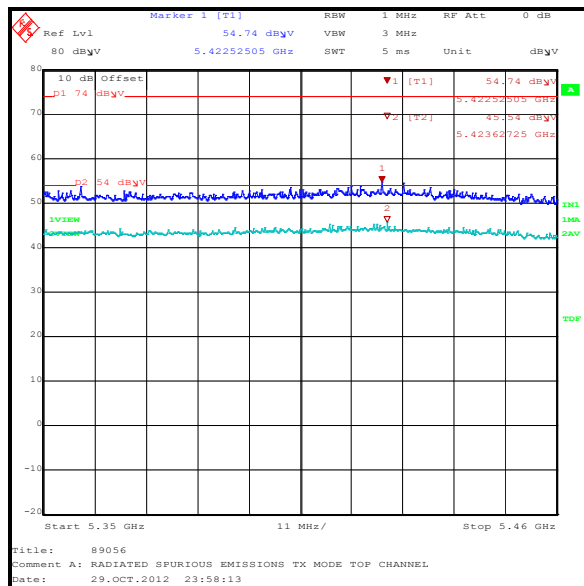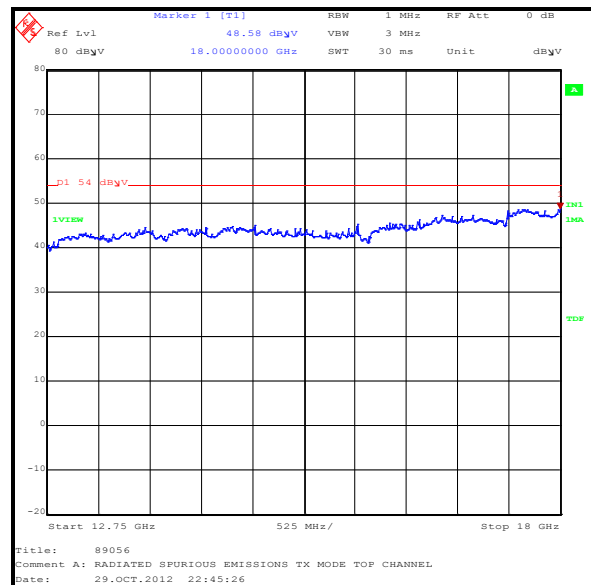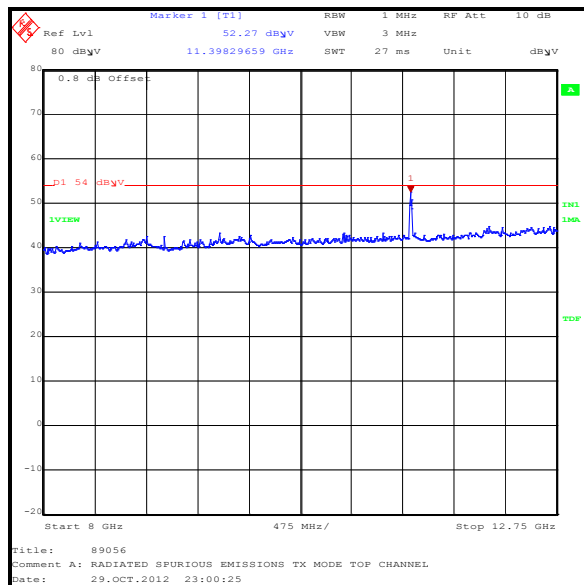Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Restricted Band 5.35 GHz to 5.46 GHz**

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)

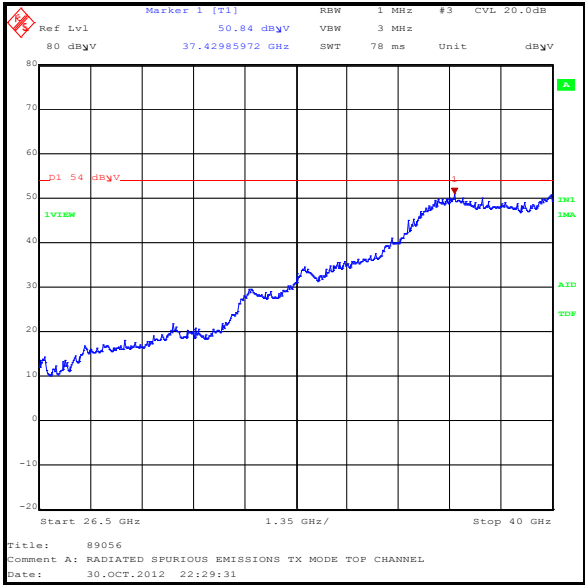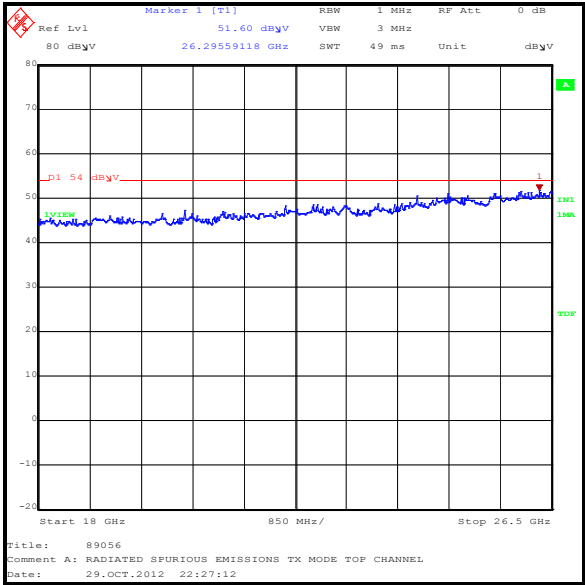

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Transmitter Out of Band Radiated Emissions (5.725-5.825 GHz band operation)**Test Summary:**

Test Engineers:	Nick Steele & David Doyle	Test Date:	30 October 2012
Test Sample Serial Number:	22975498		

FCC Reference:	Parts 15.407(b)(4),(7) & 15.209(a)
Industry Canada Reference:	RSS-Gen 4.9 / RSS-210 A9.2(4)
Test Method Used:	FCC KDB 789033 G) & ANSI C63.10 Sections 6.3 and 6.6
Frequency Range:	1 GHz to 40 GHz

Environmental Conditions:

Temperature (°C):	22 to 23
Relative Humidity (%):	39 to 40

Note(s):

1. FCC Part 15.407(b)(4) states for devices operating in the 5.725 to 5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions will not exceed -27 dBm/MHz. Part 15.407(b)(7) states the provisions of 15.205 apply e.g. restricted bands of operation.
2. Industry Canada RSS-210 A9.2(4) states for the band 5725 to 5825 MHz, emissions within the frequency range from the band edges to 10 MHz above or below the band edges shall not exceed -17 dBm/MHz EIRP. For frequencies more than 10 MHz above or below the band edges, emissions shall not exceed -27 dBm/MHz EIRP.
3. Pre-scans above 1 GHz were performed with the EUT transmitting in the 5.47-5.725 GHz band as it produced the highest conducted output power. However, final measurements were performed on any emission seen for each band as stated in FCC Response to Inquiry (Tracking Number 917954 / Date: 14th February 2012).
4. Measurements were performed with the EUT transmitting 13 Mbps / MCS8 / 20 MHz channel bandwidth as all configurations were previously measured and this combination produced the highest output power. Pre-scans were performed with the EUT transmitting on the top channel.
5. The final measured value, for the given emission, in the table above incorporates the calibrated antenna factor and cable loss.
6. All other emissions were at least 20 dB below the appropriate limit or below the noise floor of the measurement system.
7. Final measurements above 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Transmitter Out of Band Radiated Emissions (5.725-5.825 GHz band operation) (continued)**Results: Bottom Channel / EIRP**

Frequency (MHz)	Antenna Polarity	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1665.030	Vertical	-35.0	-27.0	8.0	Complied
1998.221	Vertical	-35.6	-27.0	8.6	Complied
2331.137	Vertical	-38.4	-27.0	11.4	Complied
2663.703	Vertical	-38.8	-27.0	11.8	Complied
4595.968	Horizontal	-40.0	-27.0	13.0	Complied
11487.715	Horizontal	-39.4	-27.0	12.4	Complied

Results: Bottom Channel / Field strength / Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1665.030	Vertical	60.2	74.0	13.8	Complied
2331.137	Vertical	56.8	74.0	17.2	Complied
4595.968	Horizontal	55.2	74.0	18.8	Complied
11487.715	Horizontal	55.8	74.0	18.2	Complied

Results: Bottom Channel / Field strength / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1665.030	Vertical	43.8	54.0	10.2	Complied
2331.137	Vertical	44.9	54.0	9.1	Complied
4595.968	Horizontal	53.7	54.0	0.3	Complied
11487.715	Horizontal	41.8	54.0	12.2	Complied

Transmitter Out of Band Radiated Emissions (5.725-5.825 GHz band operation) (continued)**Results: Middle Channel / EIRP**

Frequency (MHz)	Antenna Polarity	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1664.630	Vertical	-36.1	-27.0	9.1	Complied
1997.921	Vertical	-37.7	-27.0	10.7	Complied
2331.236	Vertical	-36.5	-27.0	9.5	Complied
2663.803	Vertical	-38.7	-27.0	11.7	Complied
4643.998	Horizontal	-40.4	-27.0	13.4	Complied
11535.651	Horizontal	-40.3	-27.0	13.3	Complied

Results: Middle Channel / Field strength / Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1664.630	Vertical	59.1	74.0	14.9	Complied
2331.236	Vertical	58.7	74.0	15.3	Complied
4643.998	Horizontal	54.8	74.0	19.2	Complied
11535.651	Horizontal	54.9	74.0	19.1	Complied

Results: Middle Channel / Field strength / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1664.630	Vertical	45.8	54.0	8.2	Complied
2331.236	Vertical	45.7	54.0	8.3	Complied
4643.998	Horizontal	53.4	54.0	0.6	Complied
11535.651	Horizontal	41.0	54.0	13.0	Complied

Transmitter Out of Band Radiated Emissions (5.725-5.825 GHz band operation) (continued)**Results: Top Channel / EIRP**

Frequency (MHz)	Antenna Polarity	Level (dBm)	Limit (dBm)	Margin (dB)	Result
1665.406	Vertical	-32.6	-27.0	5.6	Complied
1996.096	Vertical	-38.5	-27.0	11.5	Complied
2330.761	Vertical	-38.3	-27.0	11.3	Complied
2664.028	Vertical	-38.3	-27.0	11.3	Complied
4659.991	Horizontal	-39.9	-27.0	12.9	Complied
11612.204	Horizontal	-39.4	-27.0	12.4	Complied

Results: Top Channel / Field strength / Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1665.406	Vertical	62.6	74.0	11.4	Complied
2330.761	Vertical	56.9	74.0	17.1	Complied
4659.991	Horizontal	55.3	74.0	18.7	Complied
11612.204	Horizontal	55.8	74.0	18.2	Complied

Results: Top Channel / Field strength / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1665.406	Vertical	46.2	54.0	7.8	Complied
2330.761	Vertical	44.2	54.0	9.8	Complied
4659.991	Horizontal	53.9	54.0	0.1	Complied
11612.204	Horizontal	37.6	54.0	16.4	Complied

Transmitter Out of Band Radiated Emissions (continued)**Test Equipment Used:**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	06 Jul 2013	12
A1534	Pre-Amplifier	Hewlett Packard	8449B	3008A00405	04 Nov 2013	12
A1785	Pre-Amplifier	Farran Technology	FLNA-28-30	FTL 6483	Calibrated before use	-
A1818	Antenna	EMCO	3115	00075692	04 Nov 2013	12
A203	Antenna	Flann Microwave	22240-20	343	11 May 2013	36
A253	Antenna	Flann Microwave	12240-20	128	04 Nov 2013	12
A254	Antenna	Flann Microwave	14240-20	139	04 Nov 2013	12
A255	Antenna	Flann Microwave	16240-20	519	04 Nov 2013	12
A256	Antenna	Flann Microwave	18240-20	400	04 Nov 2013	12
A2176	High Pass Filter	Atlan TecRF	AFH-07000	800980	25 May 2013	12
A366	Isolator	MRI	FRR-400	169	Calibrated before use	-
A436	Antenna	Flann	20240-20	330	04 Nov 2013	12
G088	Power Supply Unit	Thurlby Thandar	CPX200	100700	Calibrated before use	-
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	04 Nov 2013	12
M1124	Test Receiver	Rohde & Schwarz	ESIB 26	100046K	14 Aug 2013	12
M1390	Harmonic Mixer	Farran Technology	WHMP 28	FTL1677B	Calibrated before use	-

5.2.2.Transmitter Band Edge Radiated Emissions**Test Summary:**

Test Engineer:	Nick Steele	Test Dates:	14 January 2013 & 15 January 2013
Test Sample Serial Number:	22975498		

FCC Reference:	Parts 15.407(b)(1),(7), 15.205 & 15.209(a)
Industry Canada Reference:	RSS-210 A 9.2(1)
Test Method Used:	FCC KDB 789033 G) & ANSI C63.10 Section 6.9.2

Environmental Conditions:

Temperature (°C):	22
Relative Humidity (%):	23 to 29

Note(s):





1. FCC Response to Inquiry (Tracking Number 917954 / Date: 14th February 2012) confirmed band edge measurements need only be performed in the EUT modes that produce the highest power and the widest bandwidths. Transmitter power in all modes was previously measured and BPSK / MCS8 was found to have the highest power output. Occupied bandwidth in all modes was previously measured and 64QAM / MCS15 was found to have the widest bandwidth. Band edge testing was performed in both modes on both supported channel widths.
2. Lower band edge measurements were performed with the EUT transmitting on the bottom channel. Upper band edge measurements were performed with the EUT transmitting on the top channel.
3. For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. However, there are restricted bands of operation below the lower band edge at 4.5-5.15 GHz and also above the upper band edge at 5.35-5.46 GHz therefore the provisions of FCC Part 15.205 apply.
4. Field strength measurements using peak and average detectors were performed in the restricted bands below 5.15 GHz and above 5.35 GHz. Field strength and EIRP results were found to be compliant with the restricted band limits and Part 15.407 out-of-band limits.

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: 20 MHz Channel / BPSK / MCS8 / Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5146.543	54.4	74.0	19.6	Complied
5150	52.5	74.0	21.5	Complied
5350	55.1	74.0	18.9	Complied
5380.190	57.0	74.0	17.0	Complied

Results: 20 MHz Channel / BPSK / MCS8 / Average

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5145.741	42.9	54.0	11.1	Complied
5150	42.4	54.0	11.6	Complied
5350	44.8	54.0	9.2	Complied
5383.878	45.6	54.0	8.4	Complied

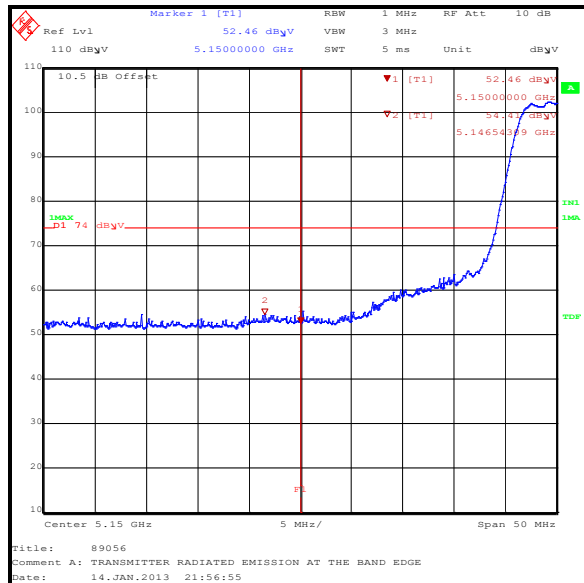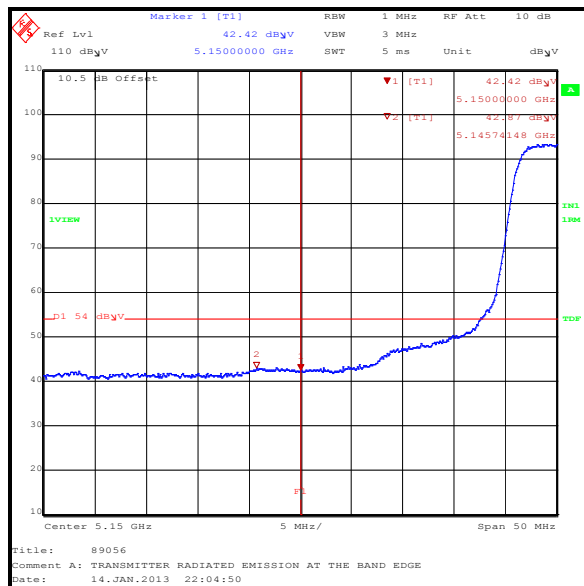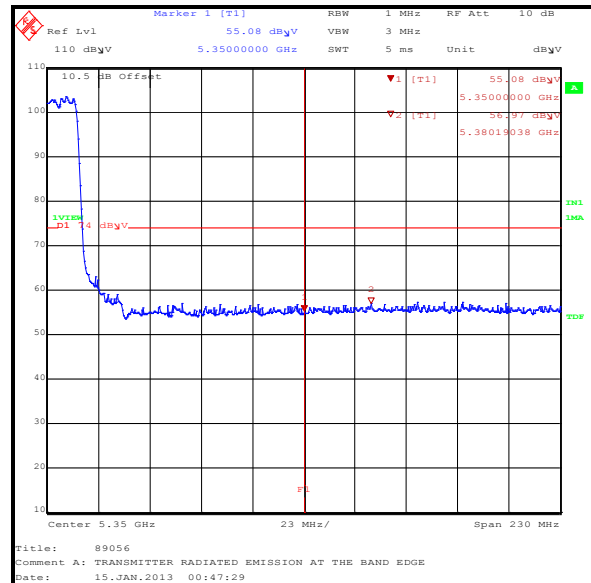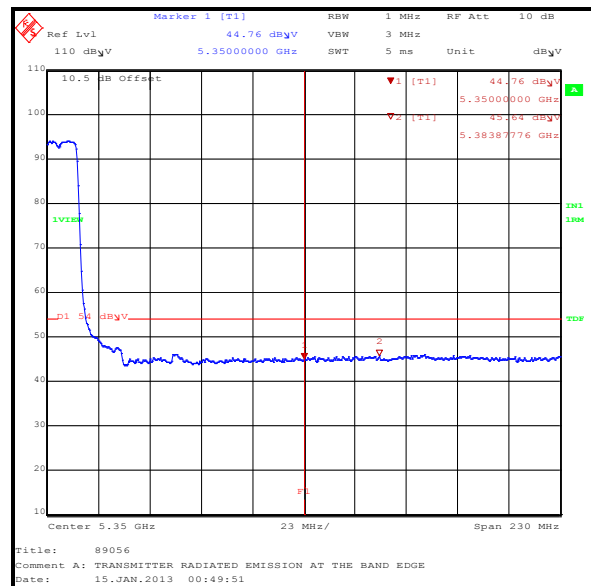Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: 20 MHz Channel / BPSK / MCS8****Lower Band Edge Peak****Lower Band Edge Average****Upper Band Edge Peak****Upper Band Edge Average**

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: 20 MHz Channel / 64QAM / MCS15 / Peak**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5146.042	54.5	74.0	19.5	Complied
5150	53.2	74.0	20.8	Complied
5350	55.4	74.0	18.6	Complied
5402.315	57.3	74.0	16.7	Complied

Results: 20 MHz Channel / 64QAM / MCS15 / Average


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5147.745	47.1	54.0	6.9	Complied
5150	46.6	54.0	7.4	Complied
5350	44.8	54.0	9.2	Complied
5394.940	45.8	54.0	8.2	Complied

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)


Results: 20 MHz Channel / 64QAM / MCS15

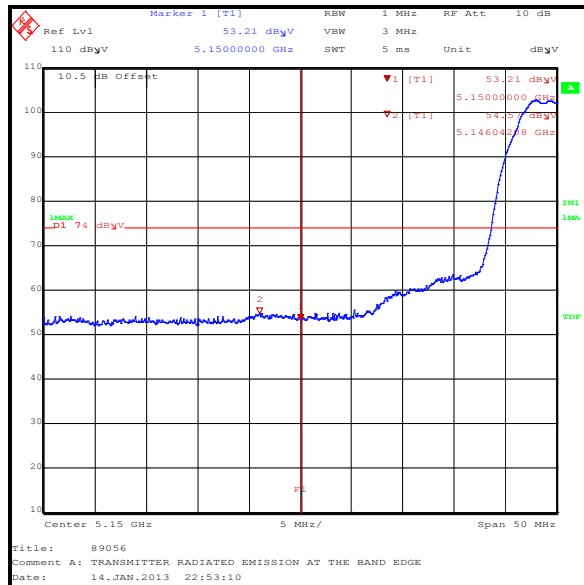


Lower Band Edge Peak

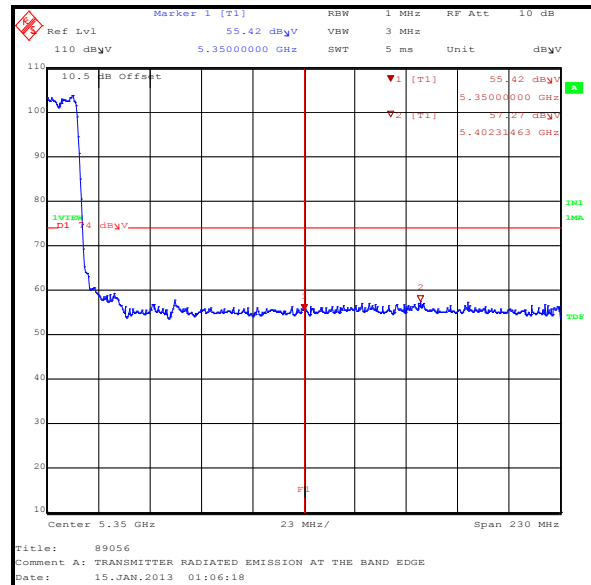

Upper Band Edge Peak

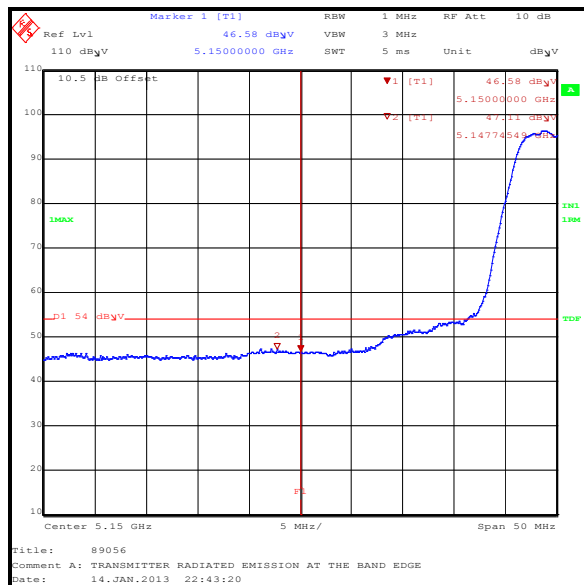

Lower Band Edge Average

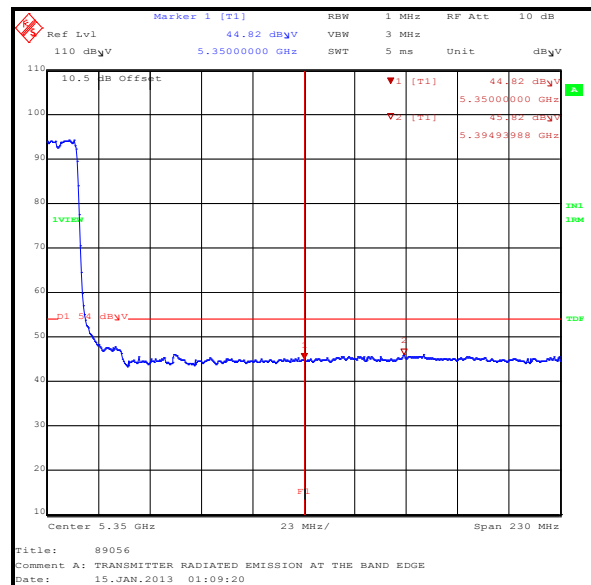

Upper Band Edge Average

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: 40 MHz Channel / BPSK / MCS8 / Peak**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5145.842	56.6	74.0	17.4	Complied
5150	54.8	74.0	19.2	Complied
5350	55.3	74.0	18.7	Complied
5381.112	57.6	74.0	16.4	Complied

Results: 40 MHz Channel / BPSK / MCS8 / Average


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5149.649	43.6	54.0	10.4	Complied
5150	43.1	54.0	10.9	Complied
5350	44.7	54.0	9.3	Complied
5401.393	46.0	54.0	8.0	Complied

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)


Results: 40 MHz Channel / BPSK / MCS 8

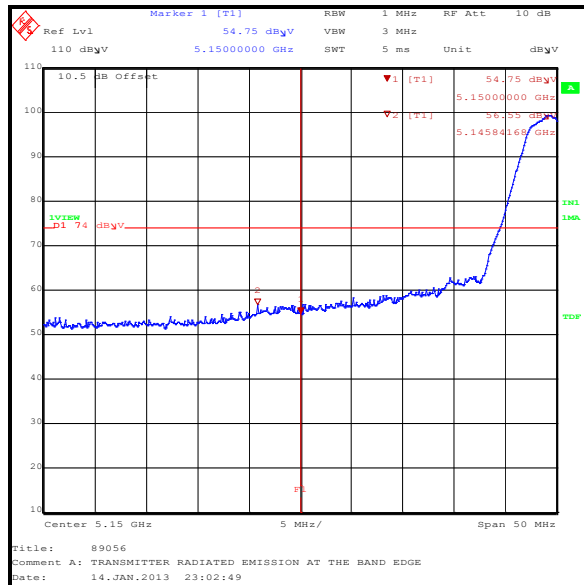


Lower Band Edge Peak

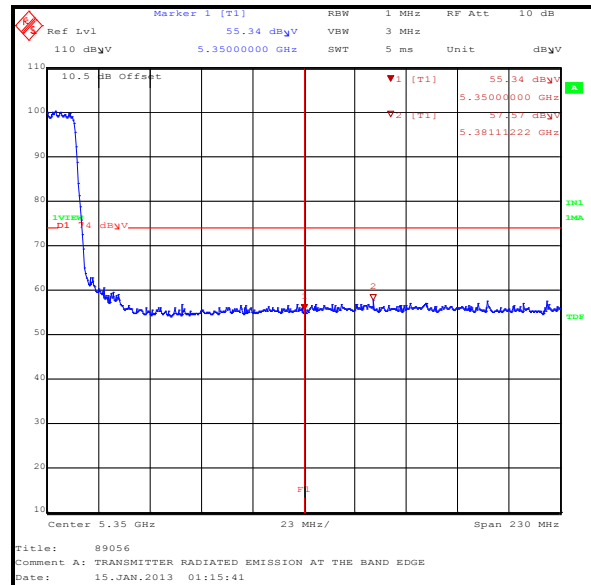

Upper Band Edge Peak

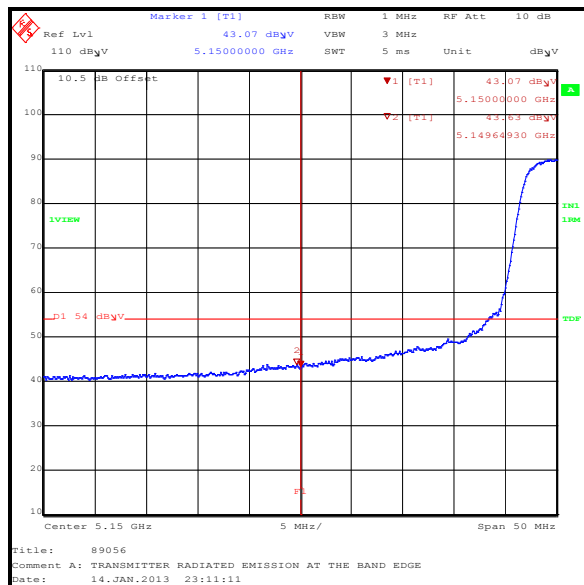

Lower Band Edge Average

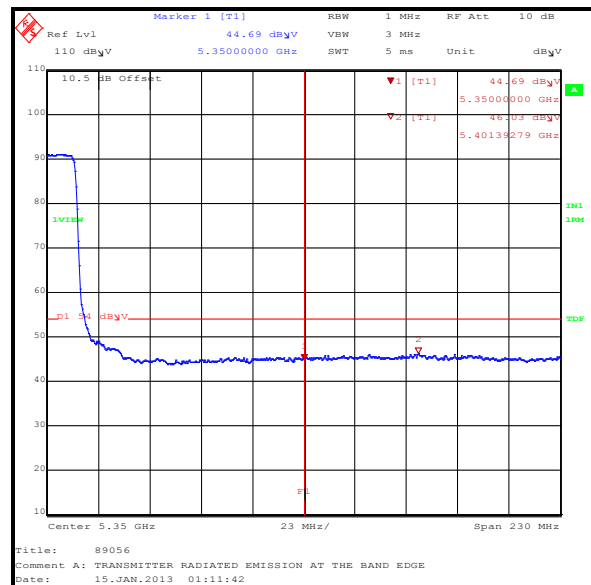

Upper Band Edge Average

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: 40 MHz Channel / 64QAM / MCS15 / Peak**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5147.946	56.1	74.0	17.9	Complied
5150	55.9	74.0	18.1	Complied
5350	55.5	74.0	18.5	Complied
5400.932	57.4	74.0	16.6	Complied

Results: 40 MHz Channel / 64QAM / MCS15 / Average


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	46.9	54.0	7.1	Complied
5350	44.7	54.0	9.3	Complied
5394.018	45.3	54.0	8.7	Complied

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)


Results: 40 MHz Channel / 64QAM / MCS15

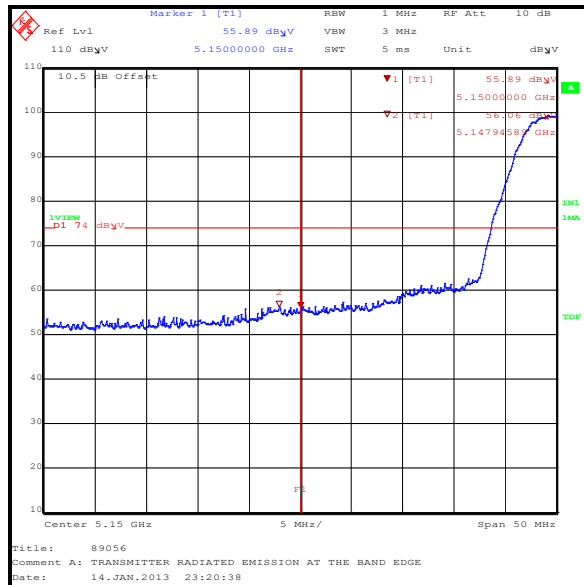


Lower Band Edge Peak

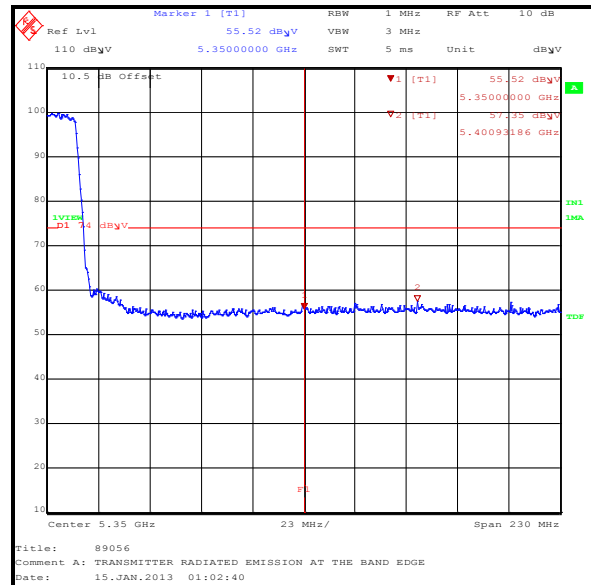

Upper Band Edge Peak

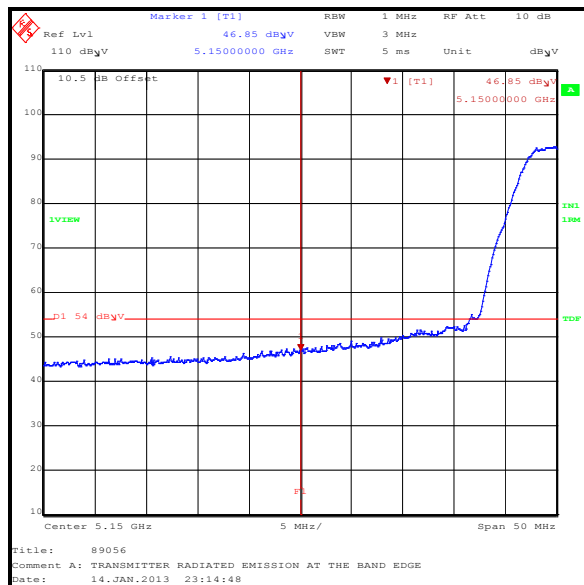

Lower Band Edge Average

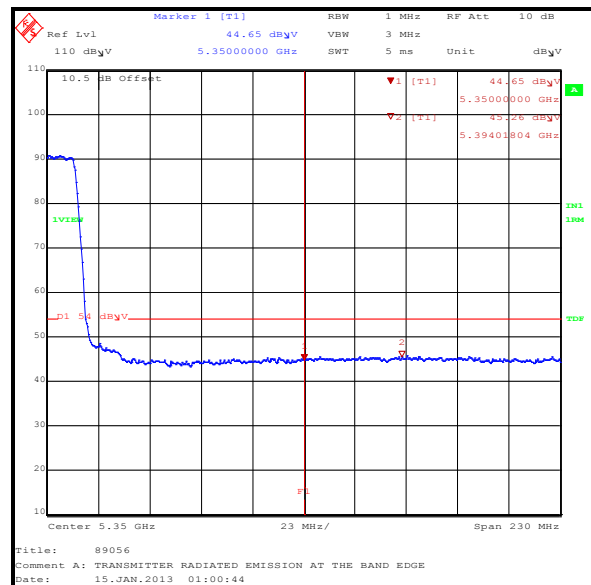

Upper Band Edge Average

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band)**Test Summary:**

Test Engineer:	Nick Steele	Test Dates:	14 January 2013 & 15 January 2013
Test Sample Serial Number:	22975498		

FCC Reference:	Parts 15.407(b)(2),(7), 15.205 & 15.209(a)
Industry Canada Reference:	RSS-210 A9.2(2)
Test Method Used:	FCC KDB 789033 G) & ANSI C63.10 Section 6.9.2

Environmental Conditions:

Temperature (°C):	22
Relative Humidity (%):	23 to 29

Note(s):

1. FCC Response to Inquiry (Tracking Number 917954 / Date: 14th February 2012) confirmed band edge measurements need only be performed in the EUT modes that produce the highest power and the widest bandwidths. Transmitter power in all modes was previously measured and BPSK / MCS8 was found to have the highest power output. Occupied bandwidth in all modes was previously measured and 64QAM / MCS15 was found to have the widest bandwidth. Band edge testing was performed in both modes on both supported channel widths.
2. Lower band edge measurements were performed with the EUT transmitting on the bottom channel. Upper band edge measurements were performed with the EUT transmitting on the top channel.
3. The measurement span was increased to 250 MHz when measuring the bottom channel in order to show the carrier and lower band edge on the same plot.
4. For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. However, there are restricted bands of operation below the lower band edge at 4.5-5.15 GHz and also above the upper band edge at 5.35-5.46 GHz therefore the provisions of FCC Part 15.205 apply.
5. Field strength measurements using peak and average detectors were performed in the restricted bands below 5.15 GHz and above 5.35 GHz. Field strength and EIRP results were found to be compliant with the restricted band limits and Part 15.407 out-of-band limits.

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 20 MHz Channel / BPSK / MCS8 / Peak**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5076.603	58.1	74.0	15.9	Complied
5150	57.0	74.0	17.0	Complied
5350	59.8	74.0	14.2	Complied
5355.261	62.5	74.0	11.5	Complied

Results: 20 MHz Channel / BPSK / MCS8 / Average


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5134.218	42.3	54.0	11.7	Complied
5150	41.5	54.0	12.5	Complied
5350	49.3	54.0	4.7	Complied
5353.457	51.4	54.0	2.6	Complied

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)


Results: 20 MHz Channel / BPSK / MCS8

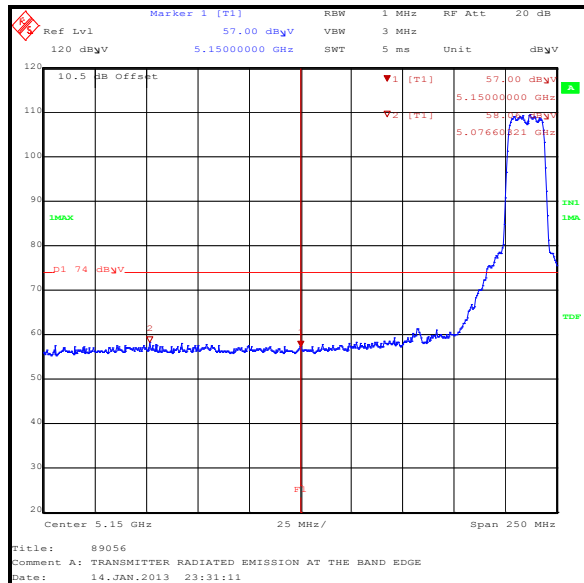


Lower Band Edge Peak

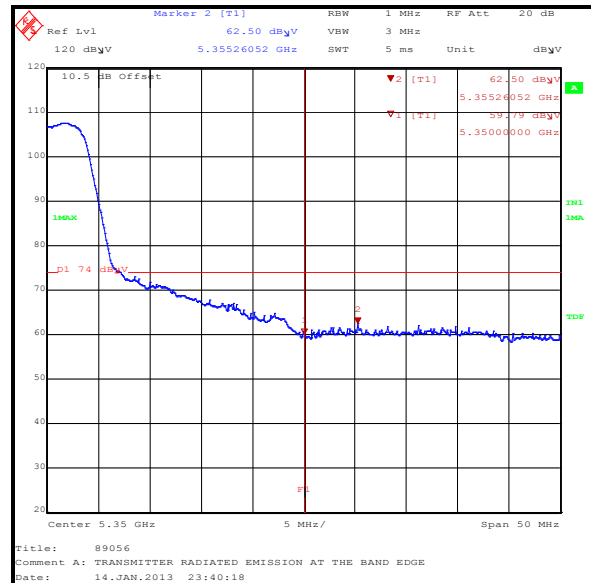

Upper Band Edge Peak

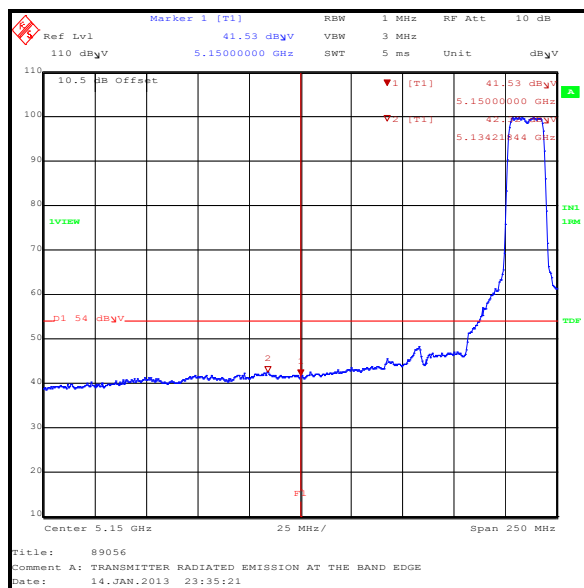

Lower Band Edge Average

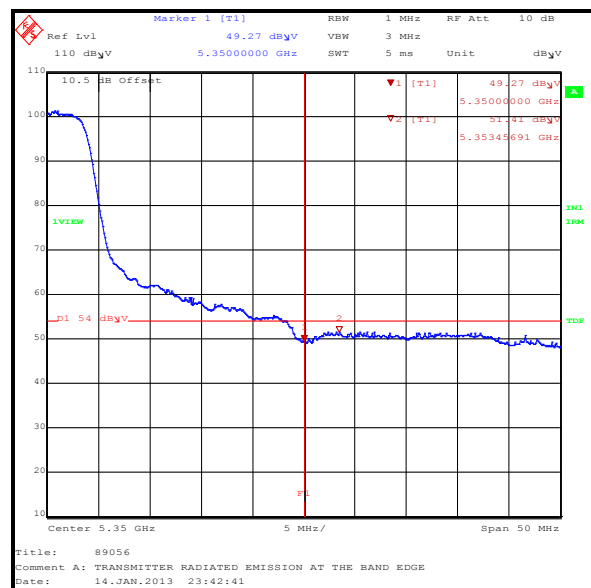





Upper Band Edge Average

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 20 MHz Channel / 64QAM / MCS15 / Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5089.128	57.5	74.0	16.5	Complied
5150	56.3	74.0	17.7	Complied
5350	59.1	74.0	14.9	Complied
5352.856	61.2	74.0	12.8	Complied

Results: 20 MHz Channel / 64QAM / MCS15 / Average

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	42.2	54.0	11.8	Complied
5350	46.3	54.0	7.7	Complied
5352.756	46.9	54.0	7.1	Complied

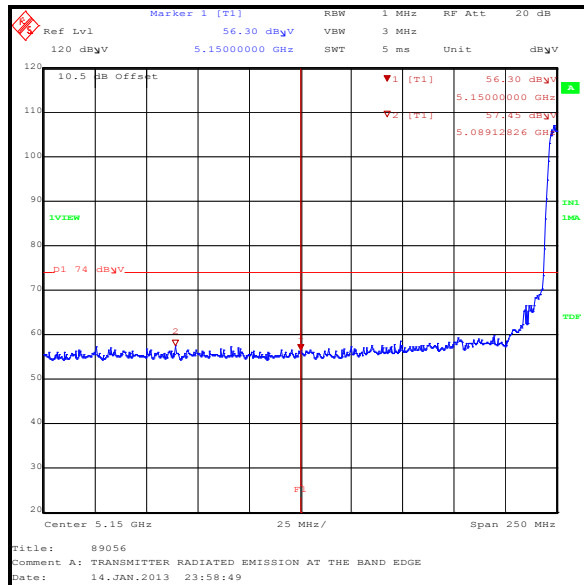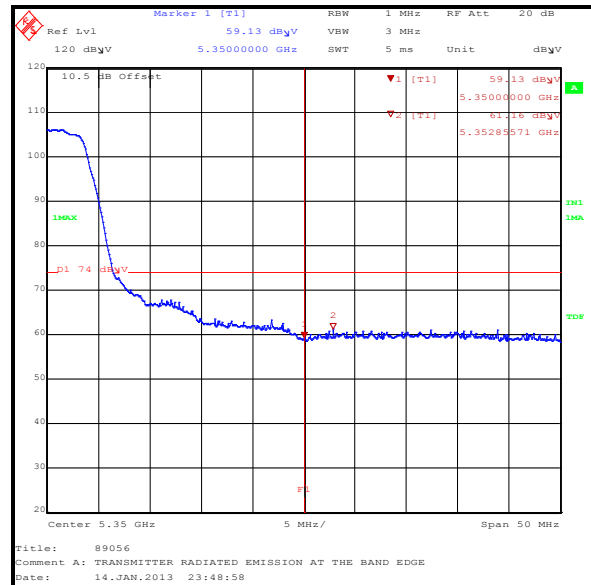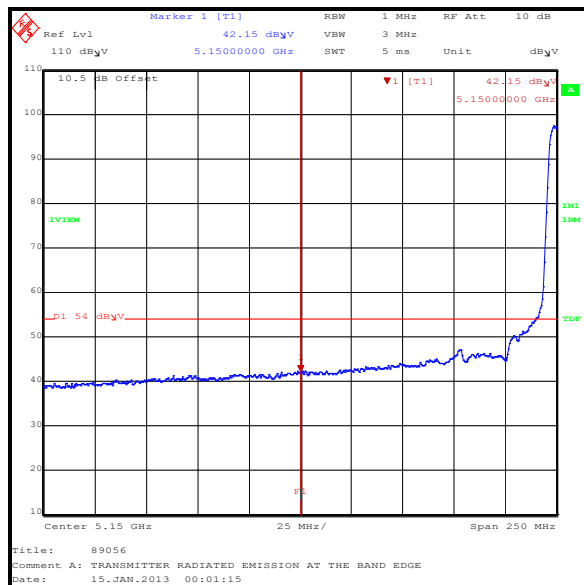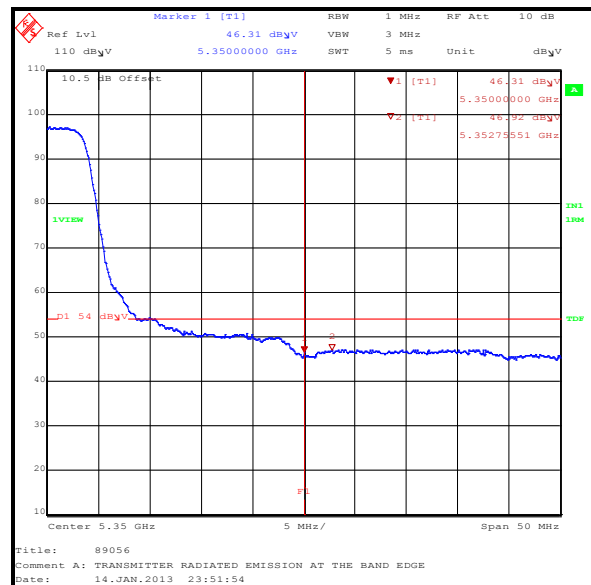Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 20 MHz Channel / 64QAM / MCS15****Lower Band Edge Peak****Upper Band Edge Peak****Lower Band Edge Average****Upper Band Edge Average**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 40 MHz Channel / BPSK / MCS8 / Peak**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5108.667	58.1	74.0	15.9	Complied
5150	55.7	74.0	18.3	Complied
5350	64.9	74.0	9.1	Complied
5352.154	67.9	74.0	6.1	Complied

Results: 40 MHz Channel / BPSK / MCS8 / Average


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5149.249	42.3	54.0	11.7	Complied
5150	42.0	54.0	12.0	Complied
5350	50.8	54.0	3.2	Complied
5350.351	51.4	54.0	2.6	Complied

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)


Results: 40 MHz Channel / BPSK / MCS8

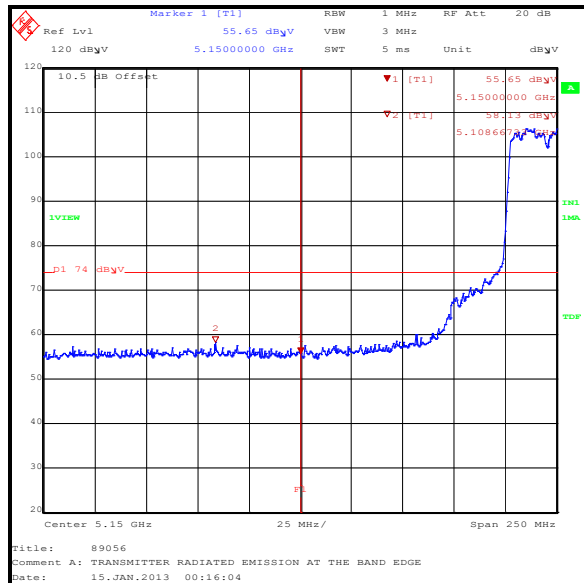


Lower Band Edge Peak

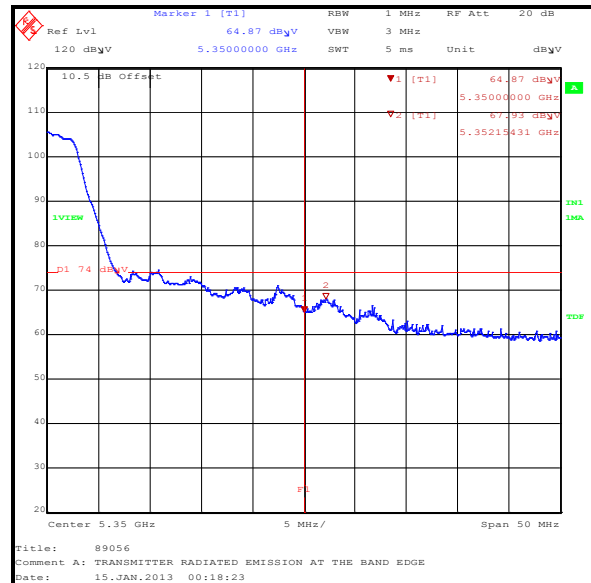

Upper Band Edge Peak

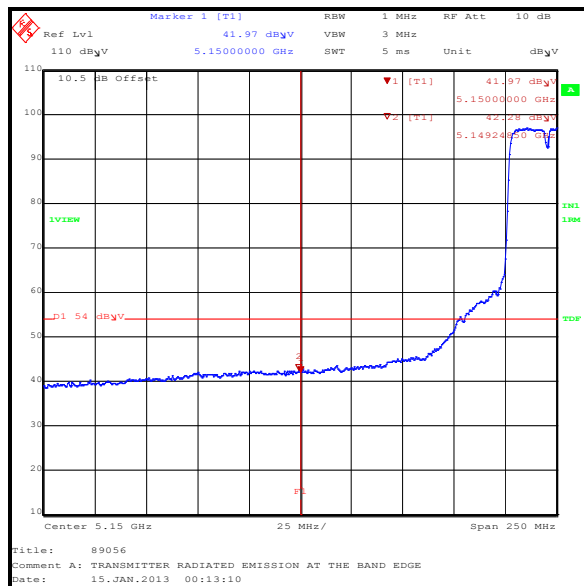

Lower Band Edge Average

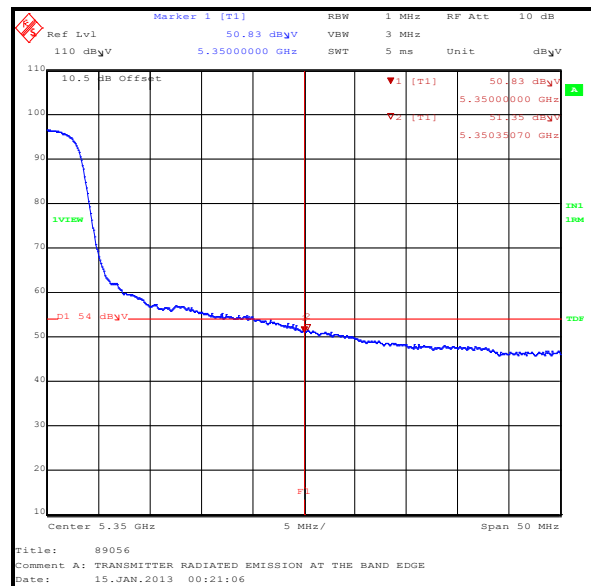

Upper Band Edge Average

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 40 MHz Channel / 64QAM / MCS15 / Peak**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5148.246	57.5	74.0	16.5	Complied
5150	54.9	74.0	19.1	Complied
5350	62.4	74.0	11.6	Complied
5352.956	64.8	74.0	9.2	Complied

Results: 40 MHz Channel / 64QAM / MCS15 / Average


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	41.8	54.0	12.2	Complied
5350	48.3	54.0	5.7	Complied

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)


Results: 40 MHz Channel / 64QAM / MCS15

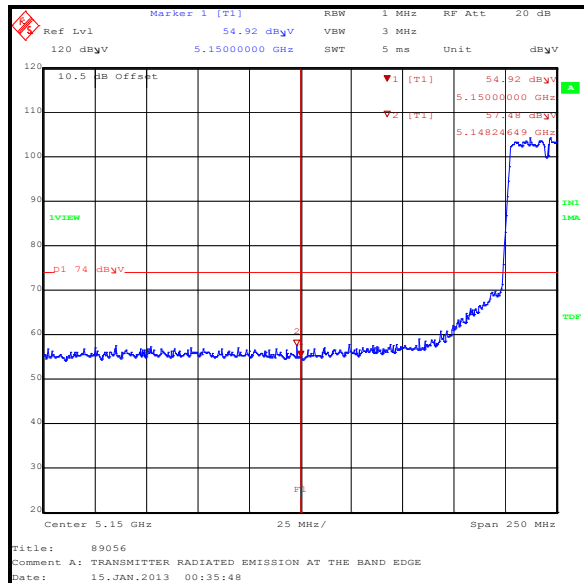


Lower Band Edge Peak

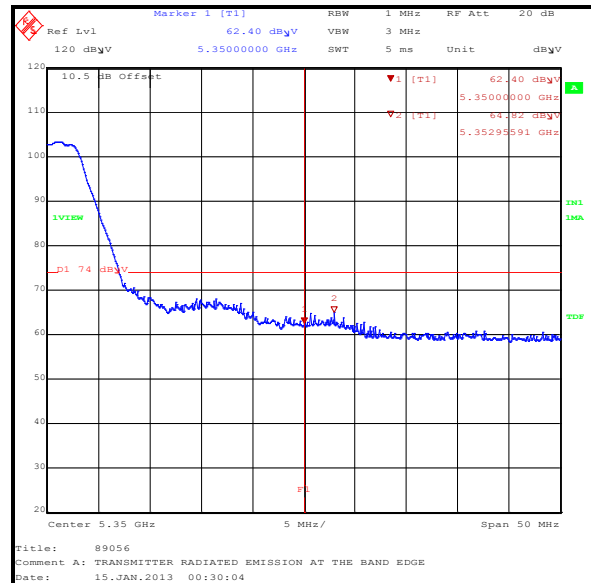

Upper Band Edge Peak

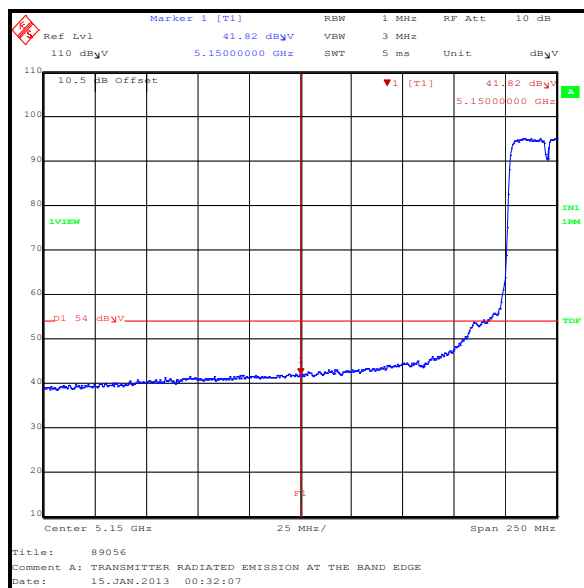

Lower Band Edge Average

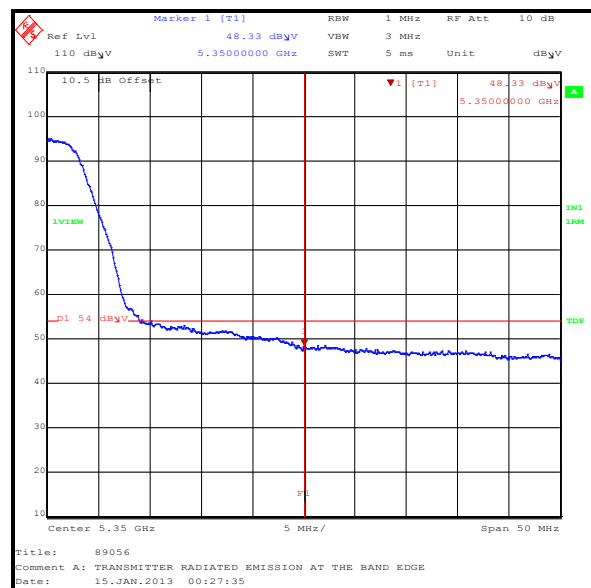

Upper Band Edge Average

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band)**Test Summary:**

Test Engineer:	Nick Steele	Test Date:	22 January 2013
Test Sample Serial Number:	22975498		

FCC Reference:	Parts 15.407(b)(3),(7), 15.205 & 15.209(a)
Industry Canada Reference:	RSS-210 A9.2(3)
Test Method Used:	FCC KDB 789033 G) & ANSI C63.10 Section 6.9.2

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	28



Note(s):

1. FCC Response to Inquiry (Tracking Number 917954 / Date: 14th February 2012) confirmed band edge measurements need only be performed in the EUT modes that produce the highest power and the widest bandwidths. Transmitter power in all modes was previously measured and BPSK / MCS8 was found to have the highest power output. Occupied bandwidth in all modes was previously measured and 64QAM / MCS15 was found to have the widest bandwidth. Band edge testing was performed in both modes on both supported channel widths.
2. Lower band edge measurements were performed with the EUT transmitting on the bottom channel. Upper band edge measurements were performed with the EUT transmitting on the top channel.
3. For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz. However, there are restricted bands of operation below the lower band edge at 4.5-5.15 GHz and also at 5.35-5.46 GHz therefore the provisions of FCC Part 15.205 apply. Tests were performed in these restricted bands of operation with the EUT transmitting on the bottom and top channels within 5.47-5.725 GHz band, the results are included in the transmitter 5.47-5.725 GHz band radiated spurious emissions section of this test report.
4. Field strength measurements using peak and average detectors were performed in the restricted bands below 5.15 GHz and above 5.35 GHz. Field strength and EIRP results were found to be compliant with the restricted band limits and Part 15.407 out-of-band limits.
5. For completeness, results are also shown as EIRP measured at a distance of 3 metres in dBm and also as field strength in dBµV/m. Measured field strength was converted to EIRP in accordance with FCC KDB 789033G)3)d)(iii) using a conversion factor of 95.2.

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 20 MHz Channel / BPSK / MCS8 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5464.840	-30.7	-27.0	3.7	Complied
5470	-32.7	-27.0	5.7	Complied
5725	-31.7	-27.0	4.7	Complied
5727.154	-31.4	-27.0	4.4	Complied



Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5464.840	64.5	68.2	3.7	Complied
5470	62.5	68.2	5.7	Complied
5725	63.5	68.2	4.7	Complied
5727.154	63.8	68.2	4.4	Complied

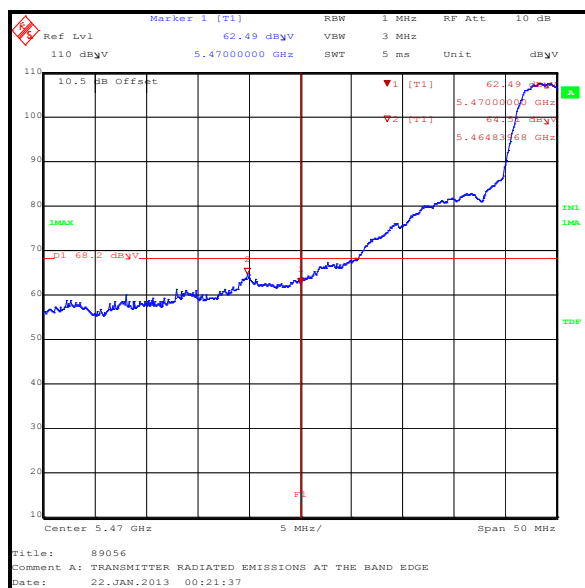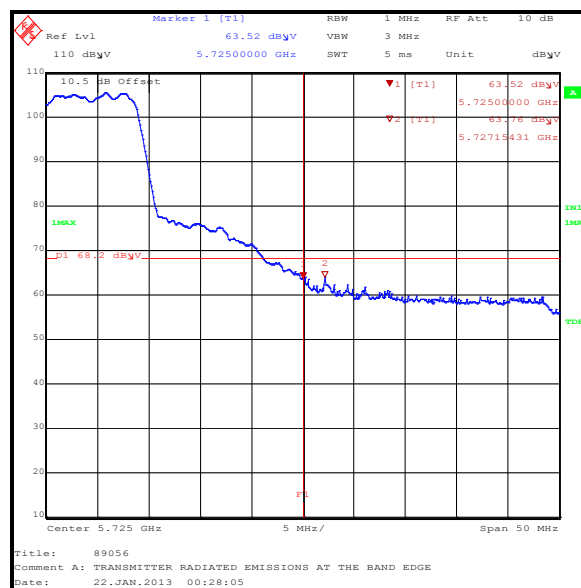**Lower Band Edge Peak Measurement****Upper Band Edge Peak Measurement**

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 20 MHz Channel / 64QAM / MCS15 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5467.545	-32.8	-27.0	5.8	Complied
5470	-35.9	-27.0	8.9	Complied
5725	-35.9	-27.0	8.9	Complied

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5467.545	62.4	68.2	5.8	Complied
5470	59.3	68.2	8.9	Complied
5725	59.3	68.2	8.9	Complied

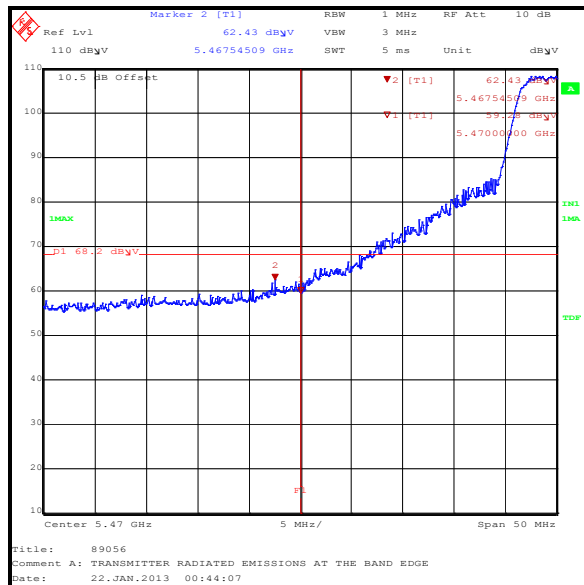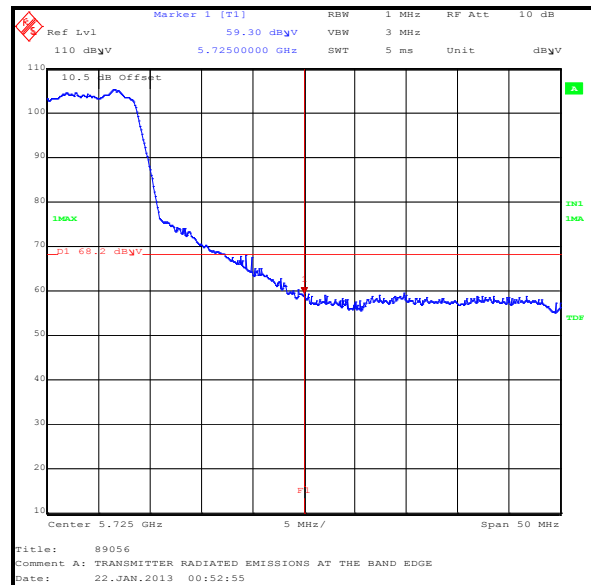
**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)


Results: 40 MHz Channel / BPSK / MCS8 / Peak

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5468.246	-27.5	-27.0	0.5	Complied
5470	-29.6	-27.0	2.6	Complied
5725	-35.8	-27.0	8.8	Complied
5725.902	-35.3	-27.0	8.3	Complied

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5468.948	67.7	68.2	0.5	Complied
5470	65.6	68.2	2.6	Complied
5725	59.4	68.2	8.8	Complied
5725.902	59.9	68.2	8.3	Complied

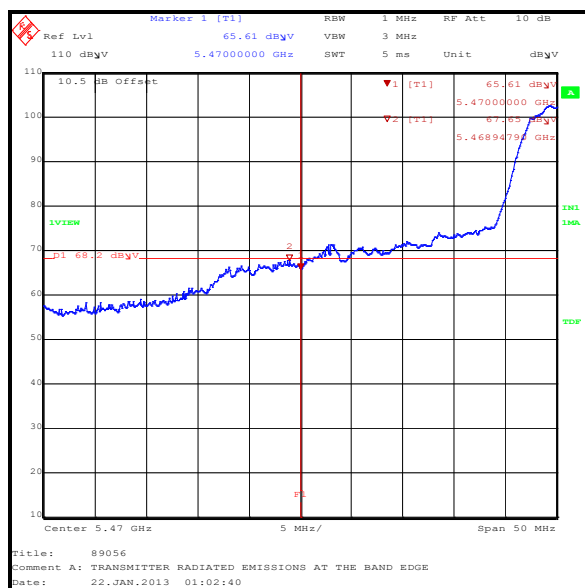

Lower Band Edge


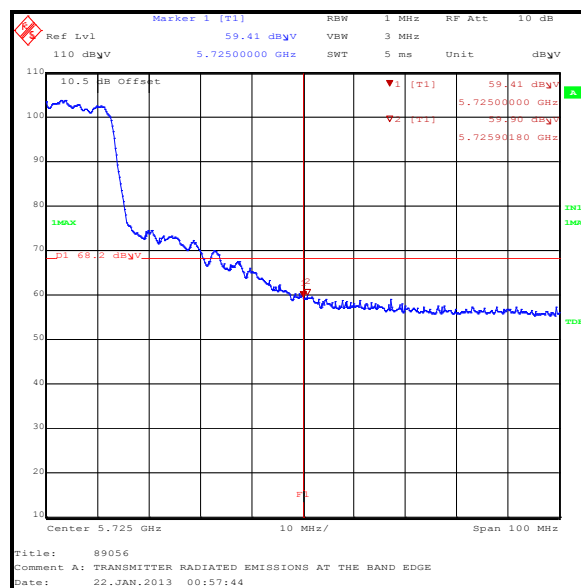


Upper Band Edge

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 40 MHz Channel / 64QAM / MCS15 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5470	-29.1	-27.0	2.1	Complied
5725	-38.4	-27.0	11.4	Complied
5726.152	-37.6	-27.0	10.6	Complied

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5470	66.1	68.2	2.1	Complied
5725	56.8	68.2	11.4	Complied
5726.152	57.6	68.2	10.6	Complied

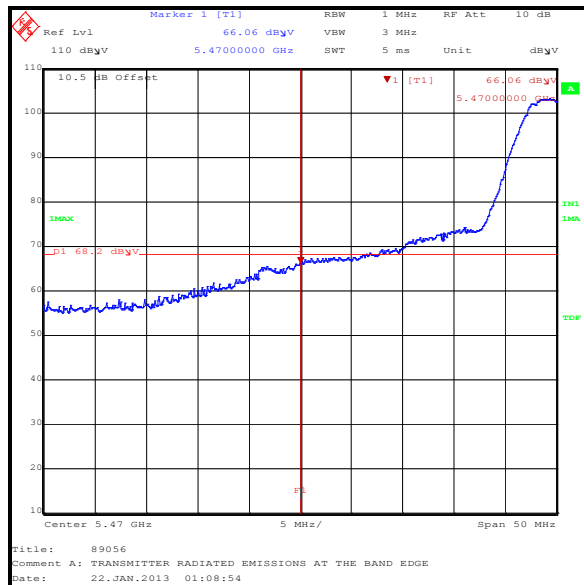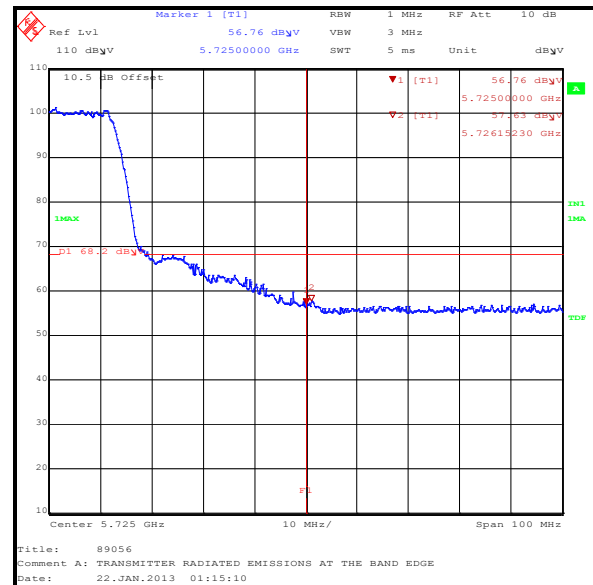**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.725-5.825 GHz band)**Test Summary:**

Test Engineer:	Nick Steele	Test Dates:	22 January 2013 & 24 January 2013
Test Sample Serial Number:	22975498		

FCC Reference:	Parts 15.407(b)(4),(5),(7) & 15.209(a)
Industry Canada Reference:	RSS-210 A9.2(4)
Test Method Used:	FCC KDB 789033 G) & ANSI C63.10 Section 6.9.2

Environmental Conditions:

Temperature (°C):	20 to 22
Relative Humidity (%):	28 to 30

Note(s):


1. FCC Response to Inquiry (Tracking Number 917954 / Date: 14th February 2012) confirmed band edge measurements need only be performed in the EUT modes that produce the highest power and the widest bandwidths. Transmitter power in all modes was previously measured and BPSK / MCS8 was found to have the highest power output. Occupied bandwidth in all modes was previously measured and 64QAM / MCS15 was found to have the widest bandwidth. Band edge testing was performed in both modes on both supported channel widths.
2. Lower band edge measurements were performed with the EUT transmitting on the bottom channel. Upper band edge measurements were performed with the EUT transmitting on the top channel.
3. For completeness, results are also shown as EIRP measured at a distance of 3 metres in dBm and also as field strength in dBµV/m. Measured field strength was converted to EIRP in accordance with FCC KDB 789033G)3)d)(iii) using a conversion factor of 95.2.

Transmitter Band Edge Radiated Emissions (5.725-5.825 GHz band operation) (continued)


Results: 20 MHz Channel / BPSK / MCS8

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5700.210	-33.4	-27.0	6.4	Complied
5715	-36.8	-27.0	9.8	Complied
5724.760	-23.9	-17.0	6.9	Complied
5725	-24.4	-17.0	7.4	Complied
5825	-18.4	-17.0	1.4	Complied
5835	-33.1	-27.0	6.1	Complied

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5700.210	61.8	68.2	6.4	Complied
5715	58.4	68.2	9.8	Complied
5724.760	71.3	78.2	6.9	Complied
5725	70.8	78.2	7.4	Complied
5825	76.8	78.2	1.4	Complied
5835	62.1	68.2	6.1	Complied

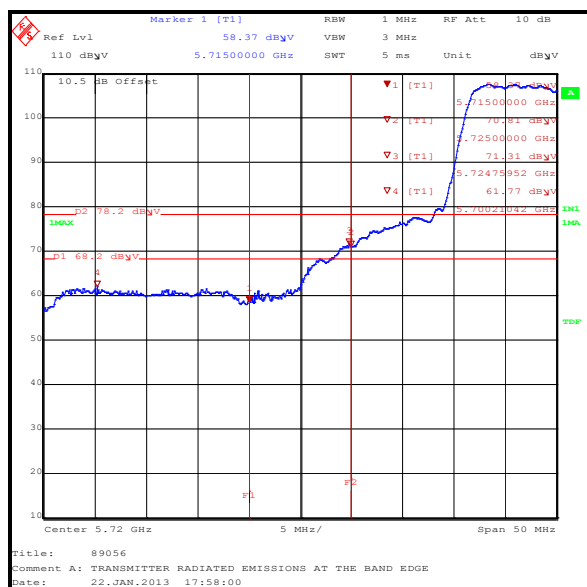

Lower Band Edge


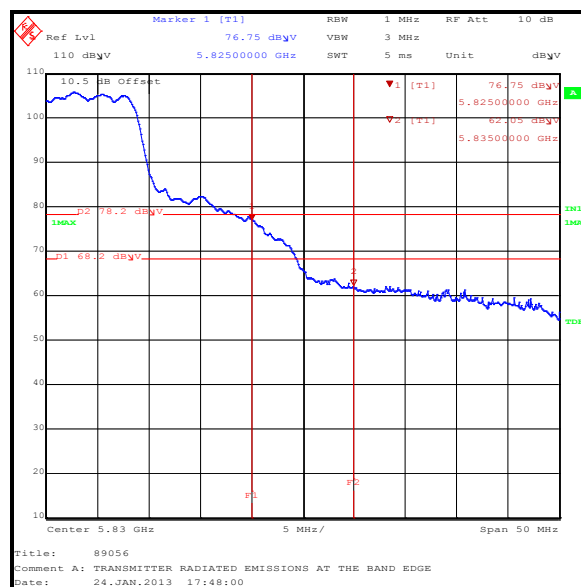


Upper Band Edge

Transmitter Band Edge Radiated Emissions (5.725-5.825 GHz band operation) (continued)**Results: 20 MHz Channel / 64QAM / MCS15**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5700.311	-34.6	-27.0	7.6	Complied
5715	-39.8	-27.0	12.8	Complied
5725	-29.4	-17.0	12.4	Complied
5825	-21.2	-17.0	4.2	Complied
5835	-34.0	-27.0	7.0	Complied





Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5700.311	60.6	68.2	7.6	Complied
5715	55.4	68.2	12.8	Complied
5725	65.8	78.2	12.4	Complied
5825	74.0	78.2	4.2	Complied
5835	61.2	68.2	7.0	Complied

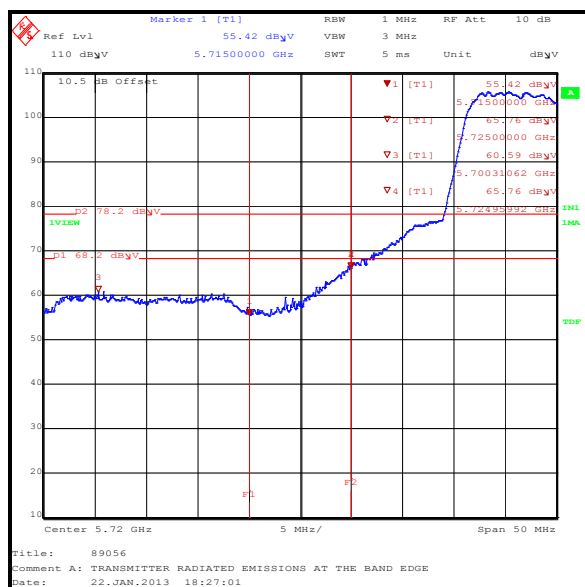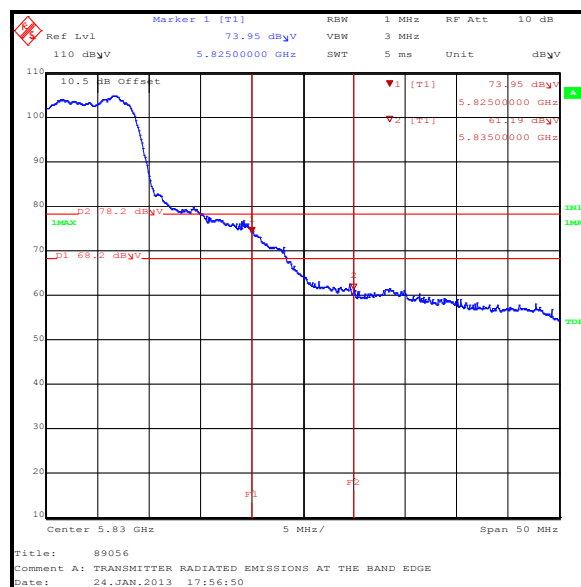**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.725-5.825 GHz band operation) (continued)**Results: 40 MHz Channel / BPSK / MCS 8**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5715	-37.6	-27.0	10.6	Complied
5725	-35.2	-17.0	18.2	Complied
5825	-22.9	-17.0	5.9	Complied
5835	-27.9	-27.0	0.9	Complied





Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5715	57.6	68.2	10.6	Complied
5725	60.0	78.2	18.2	Complied
5825	72.3	78.2	5.9	Complied
5835	67.3	68.2	0.9	Complied

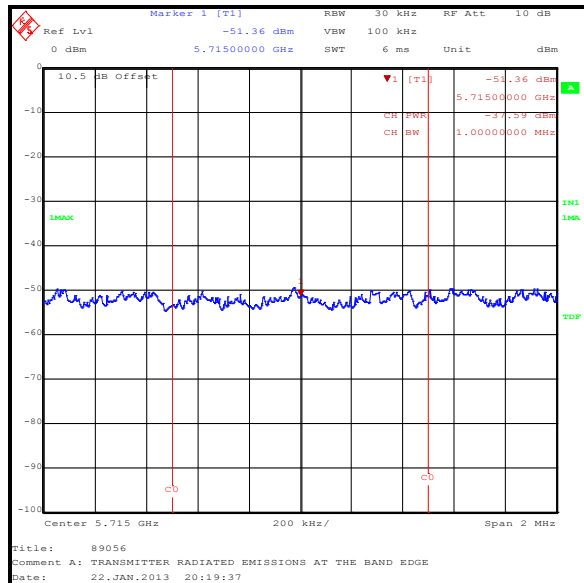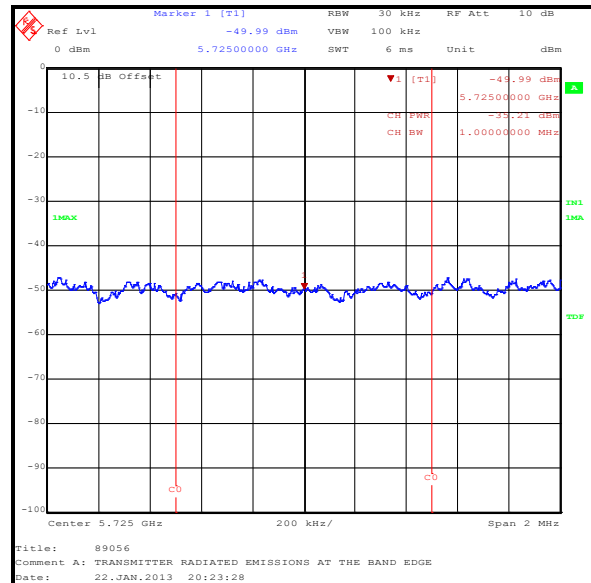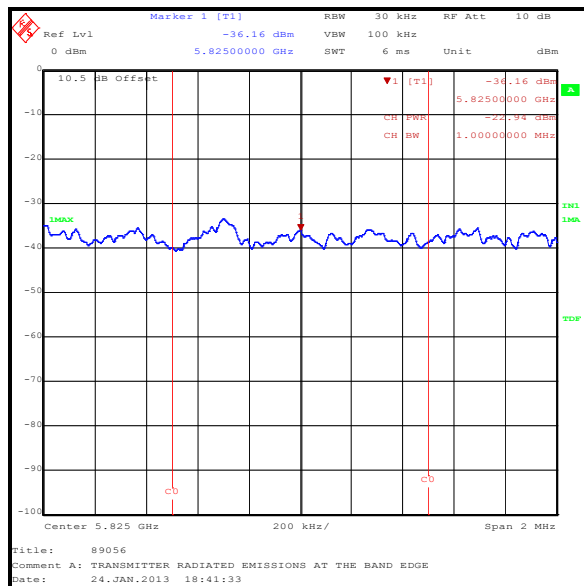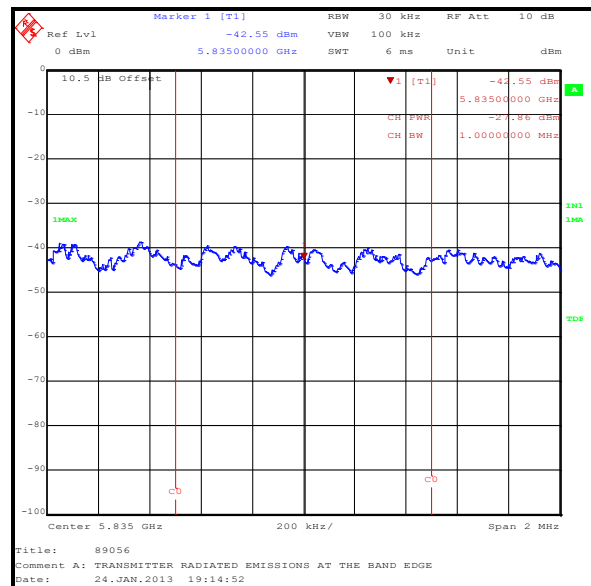Transmitter Band Edge Radiated Emissions (5.725-5.825 GHz band operation) (continued)**Results: 40 MHz Channel / BPSK / MCS8 / Peak****Lower Band Edge -10 MHz (5715 MHz)****Lower Band Edge (5725 MHz)****Upper Band Edge (5825 MHz)****Upper Band Edge +10 MHz (5835 MHz)**

Transmitter Band Edge Radiated Emissions (5.725-5.825 GHz band operation) (continued)**Results: 40 MHz Channel / 64QAM / MCS 15**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5715	-38.2	-27.0	11.2	Complied
5725	-35.4	-17.0	18.4	Complied
5825	-28.0	-17.0	11.0	Complied
5835	-32.1	-27.0	5.1	Complied

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5715	57.0	68.2	11.2	Complied
5725	59.8	78.2	18.4	Complied
5825	67.2	78.2	11.0	Complied
5835	63.1	68.2	5.1	Complied

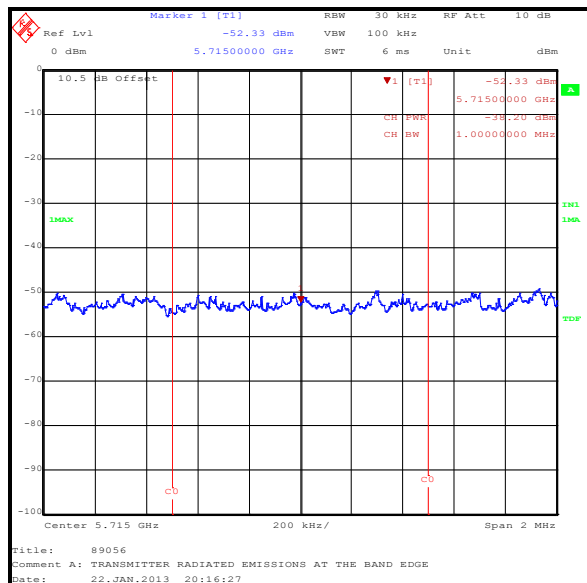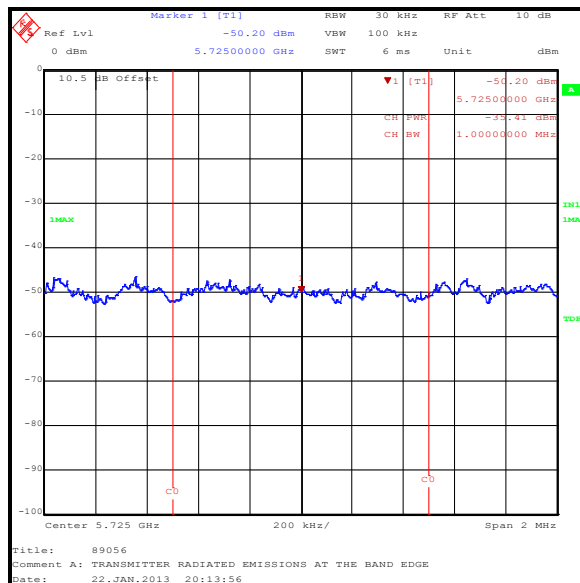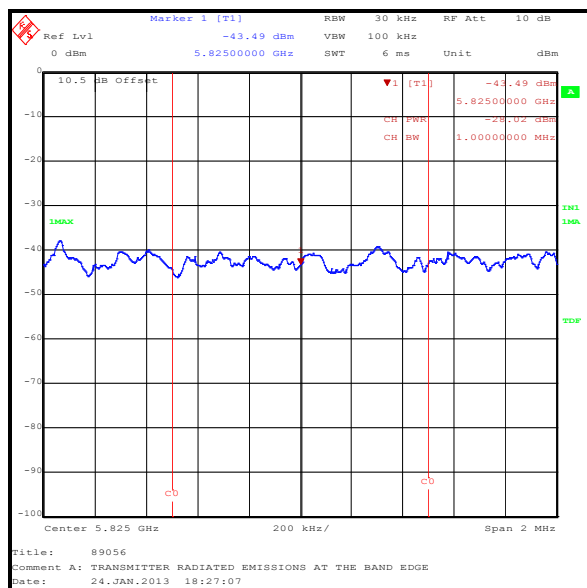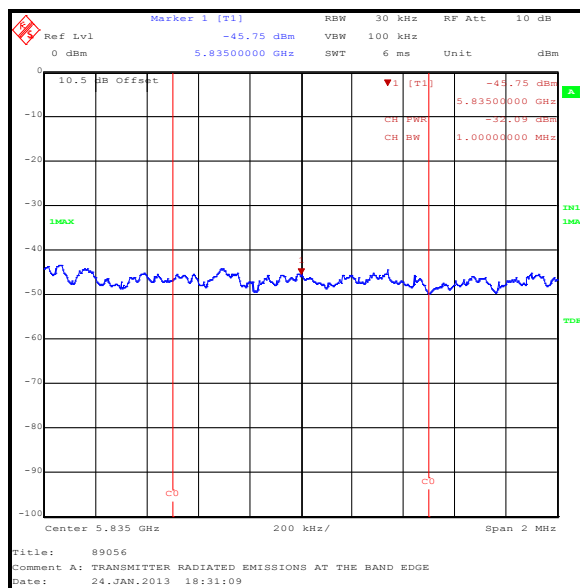Transmitter Band Edge Radiated Emissions (5.725-5.850 GHz band operation) (continued)**Results: 40 MHz Channel / 64QAM / MCS15 / Peak****Lower Band Edge -10 MHz (5715 MHz)****Lower Band Edge (5725 MHz)****Upper Band Edge (5825 MHz)****Upper Band Edge +10 MHz (5835 MHz)****Test Equipment Used:**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	06 Jul 2013	12
A1534	Pre-Amplifier	Hewlett Packard	8449B	3008A00405	04 Nov 2013	12
A253	Antenna	Flann Microwave	12240-20	128	04 Nov 2013	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	04 Nov 2013	12
M1124	Test Receiver	Rohde & Schwarz	ESIB 26	100046K	14 Aug 2013	12

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Radiated Spurious Emissions	30 MHz to 40 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

7. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version
2.0	-	-	Radiated Band Edge Measurements and Antenna information added