



Figure ii Test Setup




Test Setup Photograph(s)

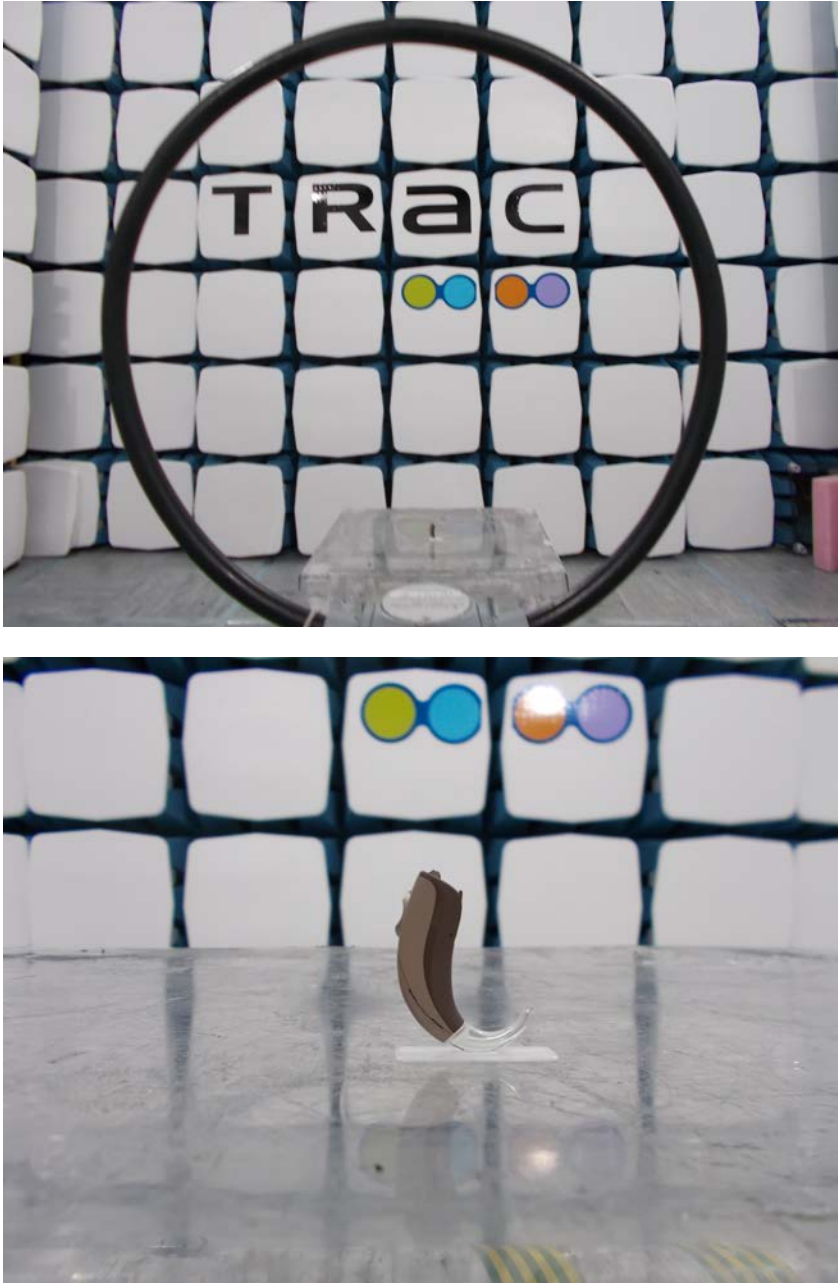

14.3 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure viii, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver. The EUT was rotated in three orthogonal planes and the measurement antenna height scanned (below 1GHz, from 1 to 4 m; above 1GHz as necessary) in order to maximise emissions. The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration at each frequency. Pre-scan plots are shown with a peak detector and 100 kHz RBW.

Figure viii Test Setup

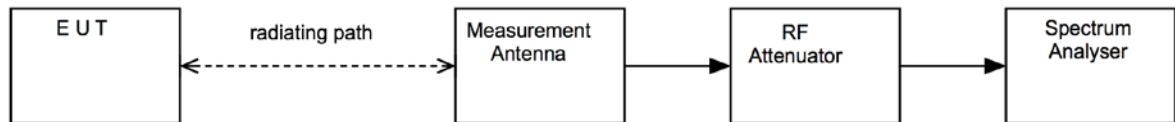

Test Setup Photograph(s)

