

TEST REPORT

Test Report Reference: F101336E4

Equipment under Test / model name: cB-OBC001i

FCC ID: TTY092802

IC: 5676B-092802

Serial Number: None

Applicant: connectBlue AB

Manufacturer: connectBlue AB

**Test Laboratory
(CAB)
accredited by
Deutsche Gesellschaft für Akkreditierung mbH
in compliance with DIN EN ISO/IEC 17025
under the
Reg. No. DGA-PL-105/99-22,
FCC Test site registration number 90877
and
Industry Canada Test site registration IC3469A-1 and
FCC Test site registration number 90877**

TEST REPORT REFERENCE: F101336E4

Contents:	Page
1 IDENTIFICATION	3
1.1 APPLICANT	3
1.2 MANUFACTURER	3
1.3 DATES	3
1.4 TEST LABORATORY	4
1.5 RESERVATION	4
1.6 NORMATIVE REFERENCES	4
1.7 TEST RESULTS	4
2 TECHNICAL DATA OF EQUIPMENT	5
2.1 PERIPHERY DEVICES	5
3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES	6
4 LIST OF MEASUREMENTS	8
5 TEST RESULTS	9
5.1 20 dB BANDWIDTH	9
5.1.1 METHOD OF MEASUREMENT (20 dB BANDWIDTH)	9
5.1.2 TEST RESULTS (20 dB BANDWIDTH)	10
5.2 CARRIER FREQUENCY SEPARATION	12
5.2.1 METHOD OF MEASUREMENT (CARRIER FREQUENCY SEPARATION)	12
5.2.2 TEST RESULTS (CARRIER FREQUENCY SEPARATION)	13
5.3 NUMBER OF HOPPING FREQUENCIES	15
5.3.1 METHOD OF MEASUREMENT (NUMBER OF HOPPING FREQUENCIES)	15
5.3.2 TEST RESULTS (NUMBER OF HOPPING FREQUENCIES)	16
5.4 DWELL TIME	17
5.4.1 METHOD OF MEASUREMENT (DWELL TIME)	17
5.4.2 TEST RESULTS (DWELL TIME)	18
5.5 MAXIMUM PEAK OUTPUT POWER	21
5.5.1 METHOD OF MEASUREMENT (MAXIMUM PEAK OUTPUT POWER)	21
5.5.2 TEST RESULTS (MAXIMUM PEAK OUTPUT POWER)	22
5.6 BAND-EDGE COMPLIANCE	24
5.6.1 METHOD OF MEASUREMENT (BAND-EDGE COMPLIANCE (RADIATED))	24
5.6.2 TEST RESULT (BAND-EDGE COMPLIANCE (RADIATED))	25
5.7 RADIATED EMISSIONS	29
5.7.1 METHOD OF MEASUREMENT (RADIATED EMISSIONS)	29
5.7.2 TEST RESULTS (RADIATED EMISSIONS)	34
5.7.2.1 PRELIMINARY MEASUREMENT (9 kHz to 1 GHz)	34
5.7.2.2 FINAL MEASUREMENT (9 kHz to 30 MHz)	37
5.7.2.3 PRELIMINARY MEASUREMENT (1 GHz to 25 GHz)	38
5.7.2.4 FINAL MEASUREMENT (1 GHz to 25 GHz)	45
5.8 CONDUCTED EMISSIONS ON POWER SUPPLY LINES (150 kHz to 30 MHz)	48
5.8.1 METHOD OF MEASUREMENT	48
5.8.2 TEST RESULTS (CONDUCTED EMISSIONS ON POWER SUPPLY LINES)	49
6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	51
7 LIST OF ANNEXES	53

TEST REPORT REFERENCE: F101336E4

1 IDENTIFICATION

1.1 APPLICANT

Name:	connectBlue AB
Address:	Norra Vallgatan 64 3V
	Malmö SE-211 19
Country:	Sweden
Name for contact purposes:	Mr. Martin Engdahl
Tel:	+ 46 40 63 07 100
Fax:	+ 46 40 23 71 37
e-mail address:	martin.engdahl@connectblue.se

1.2 MANUFACTURER

Name:	connectBlue AB
Address:	Norra Vallgatan 64 3V
	Malmö SE-211 19
Country:	Sweden
Name for contact purposes:	Mr. Martin Engdahl
Tel:	+ 46 40 63 07 100
Fax:	+ 46 40 23 71 37
e-mail address:	martin.engdahl@connectblue.se

1.3 DATES

Date of receipt of test sample:	05 May 2010
Start of test:	06 May 2010
End of test:	27 May 2010

TEST REPORT REFERENCE: F101336E4

1.4 TEST LABORATORY

The tests were carried out at: **PHOENIX TESTLAB GmbH**
Königswinkel 10
D-32825 Blomberg Phone: **+49 (0) 52 35 / 95 00-0**
Germany Fax: **+49 (0) 52 35 / 95 00-10**

accredited by Deutsche Gesellschaft für Akkreditierung mbH in compliance with DIN EN ISO/IEC 17025 under Reg. No. DGA-PL-105/99-22, Industry Canada Test site registration IC3469A-1 and FCC Test site registration number 90877.

Test engineer: Thomas KÜHN
Name




Signature

09 June 2010

Date

Test report checked: Bernd STEINER
Name



Signature

09 June 2010

Date

PHOENIX TESTLAB GmbH
Königswinkel 10
32825 Blomberg
Tel. 0 52 35 / 95 00-0
Fax 0 52 35 / 95 00-10

Stamp

1.5 RESERVATION

This test report is only valid in its original form.

Any reproduction of its contents without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT REFERENCE.

1.6 NORMATIVE REFERENCES

- [1] **ANSI C63.4-2009** American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- [2] **FCC CFR 47 Part 15 (October 2009)** Radio Frequency Devices
- [3] **FCC Public Notice DA 00-705 (March 2000)**
- [4] **RSS-210 Issue 7 (June 2007)** Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment
- [5] **RSS-Gen Issue 2 (June 2007)** General Requirements and Information for the Certification of Radiocommunication Equipment
- [6] **Publication Number 913591 (March 2007)** Measurement of radiated emissions at the edge of the band for a Part 15 RF Device

1.7 TEST RESULTS

The requirements of this test document are fulfilled by the equipment under test. The complete test results are presented in the following.

TEST REPORT REFERENCE: F101336E4

2 TECHNICAL DATA OF EQUIPMENT

Equipment under test / model name: *	cB-OBC001i					
Type of equipment: *	Bluetooth module					
FCC ID: *	TTY092802					
IC: *	5676B-092802					
Fulfills Bluetooth specification: *	V2.1 +EDR					
Antenna type: *	Fractus FR05-S1-N-0-001 (Integral)					
Antenna gain: *	1.1 dBi					
Rated output power: *	3.0 dBm					
Antenna connector: *	None (Hirose U.FL temporary installed for conducted tests)					
Power supply: *	U _{nom} =	3.7 V DC	U _{min} =	2.7 V DC	U _{max} =	4.2 V DC
Type of modulation: *	FHSS: GFSK (1 Mbps), $\pi/4$ -DPQSK (2 Mbps) or 8DPSK (3 Mbps)					
Operating frequency range: *	2402 MHz to 2480 MHz					
Number of channels: *	79					
Temperature range: *	-30 °C to +85 °C					
Hardware / software version: *	cB-0928-02 / CSR UnifiedStack2.1EDR 23I					

*: declared by the applicant

Bluetooth operates in the unlicensed ISM band at 2.4 GHz. In North America (USA and Canada) a band with a width of 83.5 MHz is available. In this band 79 RF channels spaced 1 MHz apart are defined. The channel is represented by a pseudo random hopping sequence through the 79 channels. The normally occupancy time of one frequency will be 625 μ s. The ordinary hopping rate will be 1600 hops/s. All frequencies will be used equally.

The following external I/O cables were used:

Identification	Connector		Lenght
	EUT	Ancillary	
Power supply	5.5 mm jack plug	-	2 m
-	-	-	-
-	-	-	-

*: Length during the test if no other specified.

2.1 PERIPHERY DEVICES

The following equipment was used as control unit and ancillary equipment:

- A personal computer with a test software was used, connected temporary to the EUT, for setting the equipment into the necessary operation mode. During the measurements the personal computer was disconnected.
- For measurements on the power supply line an AC/DC adaptor type Monacor PSS-2500SV was used.

TEST REPORT REFERENCE: F101336E4

3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES

The cB-OBC001i is a Bluetooth module intended for audio purposes. The module provides a wireless communication link using the Bluetooth HCI-layer. Because the cB-OBC001i is a module, which will be implemented in a final application, it was mounted on a carrier board (cB-0942) to change the operation modes of the EUT from a Laptop with test software and connect it to power supply. The tests were carried out with one unmodified sample with the internal antenna and one sample equipped with an temporary antenna connector.

During the tests the test sample was powered by an external power supply via the carrier board with 3.7 V DC.

For selecting an operation mode, a personal computer with a software delivered by the applicant was connected to the carrier board. After adjusting the operating mode, the personal computer was removed. To do this the test-engineer was instructed by the applicant.

If not otherwise stated, for modulating the transmitter, a pseudo random bit sequence with a length of 339 byte and with a pattern type DH5 was used. During all tests a power setting of 56 was used.

The following operation modes were used during the tests:

Operation mode	Description of the operation mode	Modulation	Data rate / Mbps
1	Continuous transmitting on 2402 MHz	GFSK	1
1a		$\pi/4$ -DQPSK	2
1b		8DPSK	3
2	Continuous transmitting on 2441 MHz	GFSK	1
2a		$\pi/4$ -DQPSK	2
2b		8DPSK	3
3	Continuous transmitting on 2480 MHz	GFSK	1
3a		$\pi/4$ -DQPSK	2
3b		8DPSK	3
4	Transmitter hopping on all channels	GFSK	1
4a		$\pi/4$ -DQPSK	2
4b		8DPSK	3
5	Continuous receiving on 2441 MHz		

Physical boundary of the EUT

Laptop at Serial
interface

3.7 V DC

Carrier board
cB-0942

cB-OBC001i

TEST REPORT REFERENCE: F101336E4

The following test modes were adjusted during the tests:

Preliminary tests were performed in different data rates and different orthogonal directions (if applicable), to find worst-case configuration and position. The data rate shown in the table below shows the found worst-case rate with respect to specific test item. The following table shows a list of the test modes used for the results, documented in this report. The radiated emission measurement was carried out in the orthogonal direction that emits the highest spurious emission levels.

Test items	Operation mode
20 dB bandwidth	1b, 2b, 3b (3 Mbps)
Carrier frequency separation	4b, 4b, 4b (3 Mbps)
Number of hopping channels	4 (1 Mbps)
Dwell time	2, 2a, 2b (1-, 2- and 3 Mbps)
Maximum peak output power	1, 1a, 1b, 2, 2a, 2b, 3, 3a and 3b (1-, 2- and 3 Mbps)
Conducted emissions (transmitter)	1, 2, 3 (1 Mbps)
Band edge compliance (radiated)	1, 3, 4 (1 Mbps)
Radiated emissions (transmitter)	1, 2, 3 (1 Mbps)
Conducted emissions on supply line	4b (3 Mbps)
Radiated emissions (receiver)	5

TEST REPORT REFERENCE: F101336E4

4 LIST OF MEASUREMENTS

Application	Frequency range [MHz]	FCC 47 CFR Part 15 section [2]	RSS 210, Issue 7 [4] or RSS-Gen, Issue 2 [5]	Status	Refer page
20 dB bandwidth	General	15.247 (a) (1)	A8.1 (b) [4]	Passed	9 et seq.
Carrier frequency separation	General	15.247 (a) (1)	A8.1 (b) [4]	Passed	12 et seq.
Number of hopping channels	2400.0 - 2483.5	15.247 (a) (1) (iii)	A8.1 (d) [4]	Passed	15 et seq.
Dwell time	2400.0 - 2483.5	15.247 (a) (1) (iii)	A8.1 (d) [4]	Passed	17 et seq.
Maximum peak output power	2400.0 - 2483.5	15.247 (b) (1)	A8.4 (2) [4]	Passed	21 et seq.
Band edge compliance	2400.0 - 2483.5	15.247 (d)	A8.5 [4]	Passed	24 et seq.
Radiated emissions (transmitter)	0.009 - 25,000	15.205 (a) 15.209 (a)	A8.5 [4] 2.6 [4]	Passed	29 et seq.
Conducted emissions on supply line	0.15 - 30	15.207 (a)	7.2.2 [5]	Passed	48 et seq.
Radiated emissions (receiver)	0.009 - 25,000	15.109 (a)	6 [5] 2.6 [4]	Passed	Annex D

TEST REPORT REFERENCE: F101336E4

5 TEST RESULTS

5.1 20 dB BANDWIDTH

5.1.1 METHOD OF MEASUREMENT (20 dB BANDWIDTH)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be disabled, the transmitter shall work with its maximum data rate.


The following spectrum analyser settings shall be used:

- Span: App. 2 to 3 times the 20 dB bandwidth, centred on the actual hopping channel.
- Resolution bandwidth: $\geq 1\%$ of the 20 dB bandwidth.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set on this value. The second display line has to be set 20 dB below the first line (or the peak marker). The frequency lines shall be set on the intersection points between the second display line and the measured curve.

The measurement will be performed at the upper, the lower end and the middle of the assigned frequency band.

Test set-up:

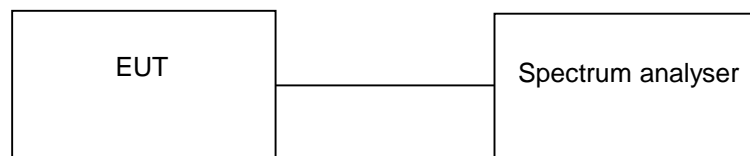


TEST REPORT REFERENCE: F101336E4


5.1.2 TEST RESULTS (20 dB BANDWIDTH)

Ambient temperature	20 °C	Relative humidity	43 %
---------------------	-------	-------------------	------

101336_46.wmf: 20 dB bandwidth at the lower end of the assigned frequency band (operation mode 1b):

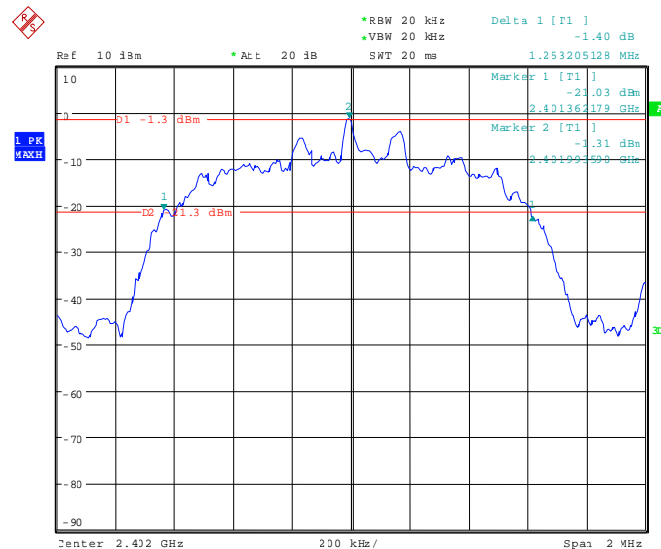


101336_47.wmf: 20 dB bandwidth at the middle of the assigned frequency band (operation mode 2b):

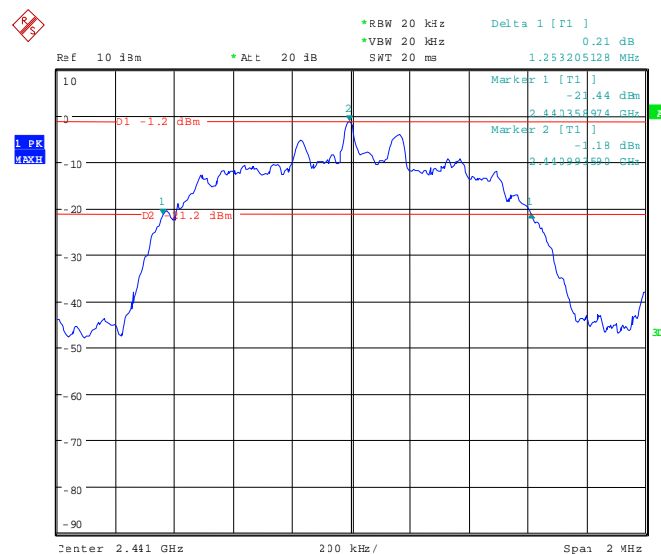

TEST REPORT REFERENCE: F101336E4

101336 48.wmf: 20 dB bandwidth at the upper end of the assigned frequency band (operation mode 3b):

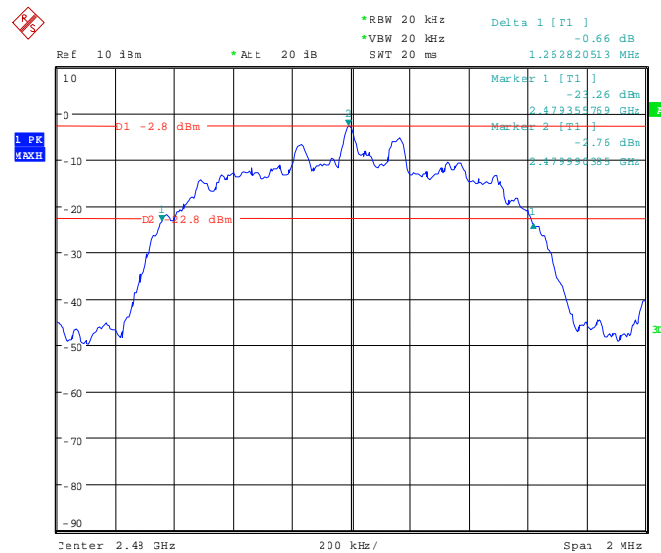

Channel number	Channel frequency [MHz]	20 dB bandwidth [kHz]
Operation mode 1b, 2b, 3b		
0	2402	1253.205
39	2441	1253.205
78	2480	1262.821
Measurement uncertainty		+0.66 dB / -0.72 dB

TEST EQUIPMENT USED FOR THE TEST:

165

TEST REPORT REFERENCE: F101336E4

5.2 CARRIER FREQUENCY SEPARATION

5.2.1 METHOD OF MEASUREMENT (CARRIER FREQUENCY SEPARATION)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.


The following spectrum analyser settings shall be used:

- Span: Wide enough to capture the peaks of two adjacent channels.
- Resolution bandwidth: $\geq 1\%$ of the span.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker and the delta marker function will be used to determine the separation between the peaks of two adjacent channel signals.

The measurement will be performed at the upper, the lower end and the middle of the assigned frequency band.

Test set-up:

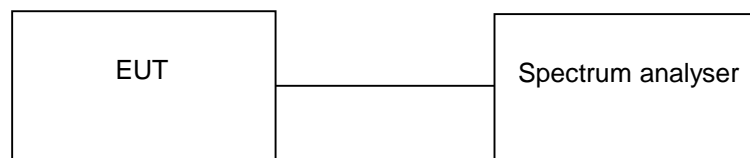


TEST REPORT REFERENCE: F101336E4


5.2.2 TEST RESULTS (CARRIER FREQUENCY SEPARATION)

Ambient temperature	20 °C	Relative humidity	43 %
---------------------	-------	-------------------	------

101336_49.wmf: Channel separation at the lower end of the assigned frequency band (operation mode 1b):

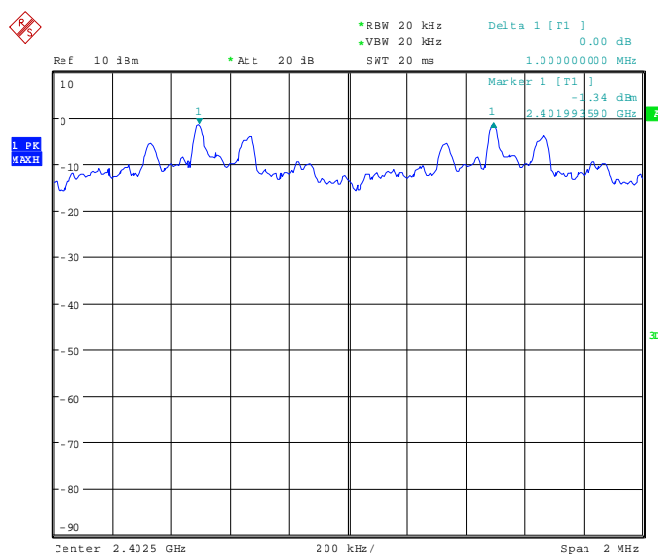


101336_50.wmf: Channel separation at the middle of the assigned frequency band (operation mode 2b):

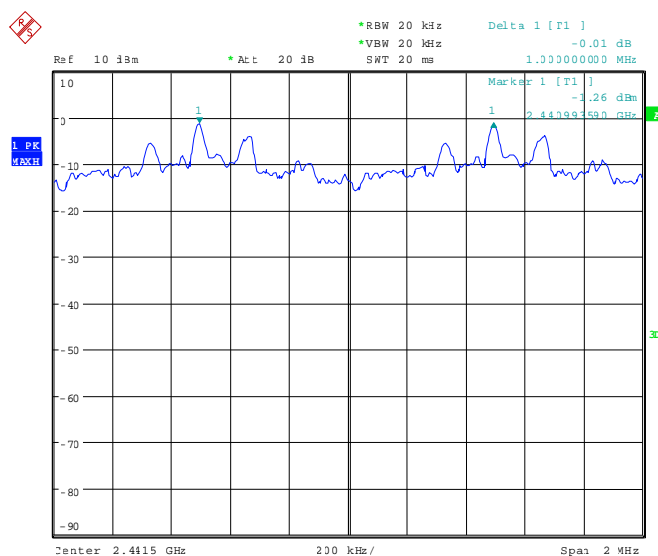

TEST REPORT REFERENCE: F101336E4

101336 51.wmf: Channel separation at the upper end of the assigned frequency band (operation mode 3b):

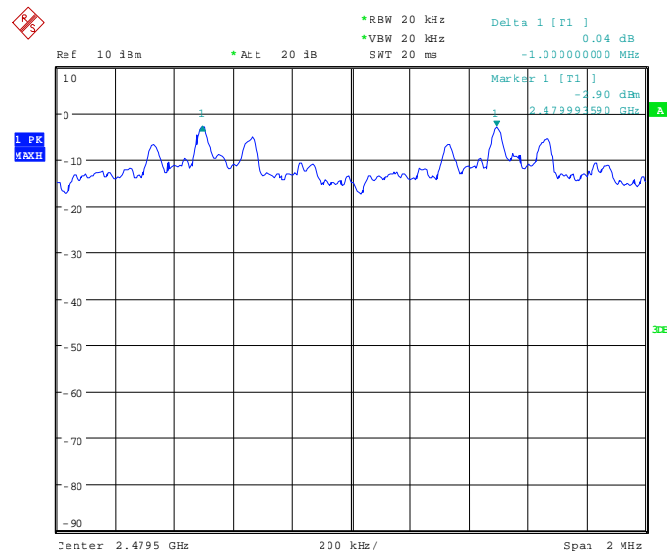

Channel number	Channel frequency [MHz]	Channel separation [kHz]	Minimum limit [kHz]
Operation mode 1b, 2b, 3b			
0	2402	1000	835.470 ($\frac{2}{3}$ of the 20 dB bandwidth)
39	2441	1000	835.470 ($\frac{2}{3}$ of the 20 dB bandwidth)
78	2480	1000	841.881 ($\frac{2}{3}$ of the 20 dB bandwidth)
Measurement uncertainty			$<10^{-7}$

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

165

TEST REPORT REFERENCE: F101336E4

5.3 NUMBER OF HOPPING FREQUENCIES

5.3.1 METHOD OF MEASUREMENT (NUMBER OF HOPPING FREQUENCIES)


The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.

The following spectrum analyser settings shall be used:

- Span: Equal to the assigned frequency band.
- Resolution bandwidth: ≥ 1 % of the span.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

After trace stabilisation the number of hopping channels could be counted. It might be possible to divide the span into some sub ranges in order to clearly show all hopping frequencies.

Test set-up:

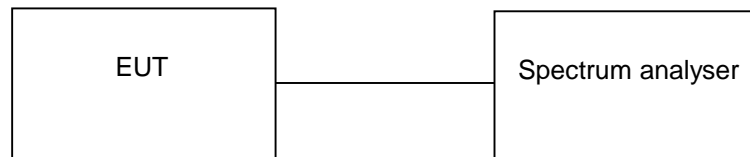


TEST REPORT REFERENCE: F101336E4

5.3.2 TEST RESULTS (NUMBER OF HOPPING FREQUENCIES)

Ambient temperature	20 °C	Relative humidity	43 %
---------------------	-------	-------------------	------

101336_52.wmf: Number of hopping channels (operation mode 4):

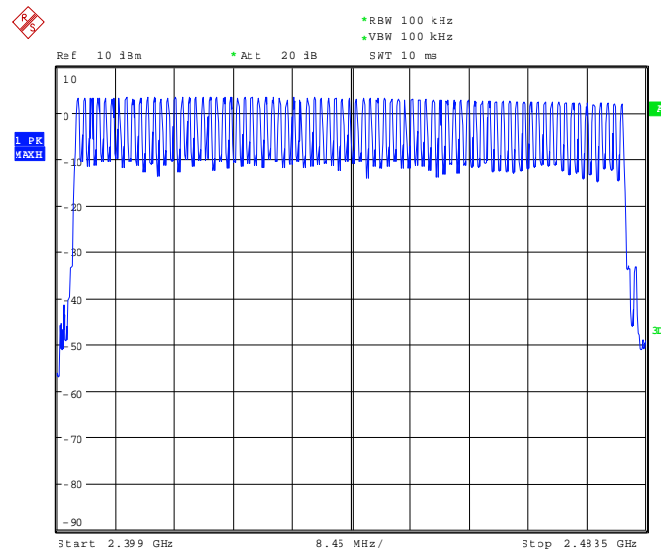

Number of hopping channels	Limit
79	At least 15

TEST EQUIPMENT USED FOR THE TEST:

165

TEST REPORT REFERENCE: F101336E4

5.4 DWELL TIME

5.4.1 METHOD OF MEASUREMENT (DWELL TIME)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.

The following spectrum analyser settings shall be used:

- Span: Zero, centred on a hopping channel.
- Resolution bandwidth: 1 MHz.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: As necessary to capture the entire dwell time per hopping channel.
- Detector function: peak.
- Trace mode: Max hold.

The marker and delta marker function of the spectrum analyser will be used to determine the dwell time.

The measurement will be performed at the upper and lower end and the middle of the assigned frequency band.

If the EUT is possible to operate with different mode of operation (data rates, modulation formats etc.) the test will be repeated with every different operation mode of the EUT.

Test set-up:




TEST REPORT REFERENCE: F101336E4


5.4.2 TEST RESULTS (DWEELL TIME)

Ambient temperature	20 °C	Relative humidity	43 %
---------------------	-------	-------------------	------

101336_53.wmf: Dwell time at the middle of the assigned frequency band (operation mode 2):

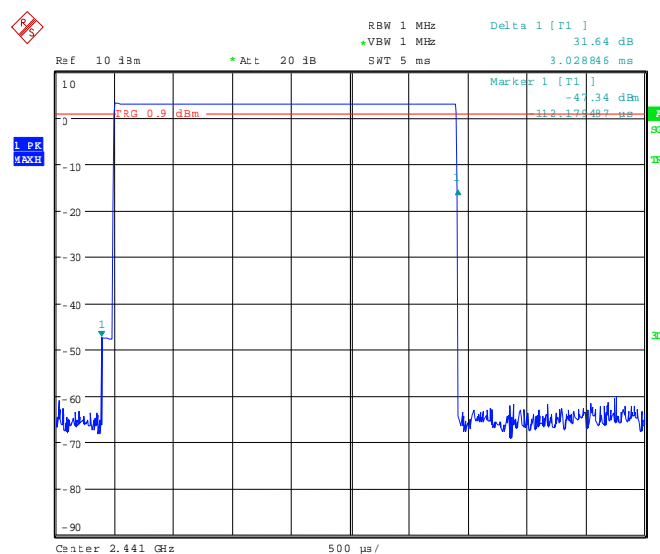


101336_55.wmf: Dwell time at the middle of the assigned frequency band (operation mode 2a):

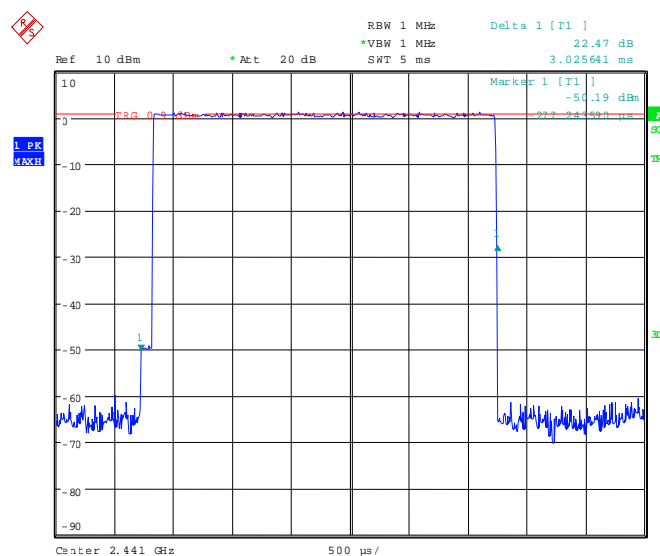

TEST REPORT REFERENCE: F101336E4

101336_54.wmf: Dwell time at the middle of the assigned frequency band (operation mode 2b):

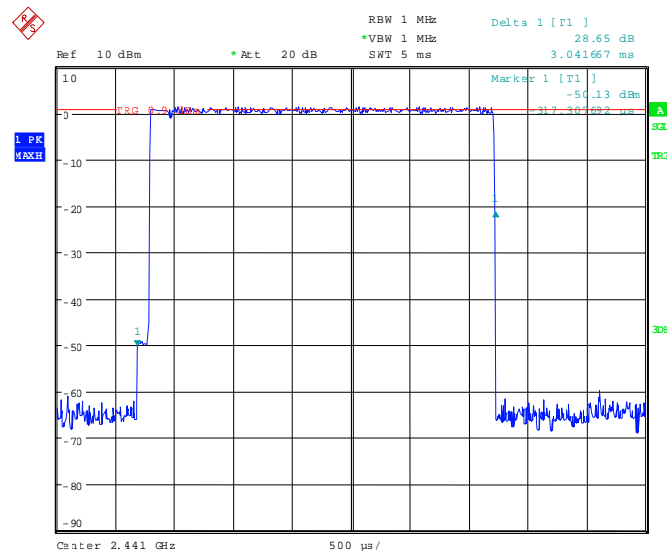

The dwell time is calculated with the following formula:

Dwell time = $t_{\text{pulse}} \times n_{\text{hops}} / \text{number of hopping channels} \times 31.6$ (equal to 0.4 s x number of hopping channels)

Where:

t_{pulse} is the measured pulse time (pls. refer the plots of the spectrum analyser above) [s],
 n_{hops} is the number of hops per second in the actual operating mode of the transmitter [1/s].

The hopping rate of the system is 1600 hops per second and the system uses 79 channels. For this reason one time slot has a length of 625 μs.

With the used hopping modes DH5, 2DH5 and 3DH5 a packet need 5 timeslots for transmitting and the next timeslot for receiving. So the system makes in worst case 267 hops per second in transmit mode ($n_{\text{hops}} = 267 \text{ 1/s}$).

TEST REPORT REFERENCE: F101336E4

Operation mode 2				
Channel number	Channel frequency [MHz]	t _{pulse} [μs]	Dwell time [ms]	Limit [ms]
39	2441	3028.846	323.481	400
Operation mode 2a				
Channel number	Channel frequency [MHz]	t _{pulse} [μs]	Dwell time [ms]	Limit [ms]
39	2441	3025.641	323.138	400
Operation mode 2b				
Channel number	Channel frequency [MHz]	t _{pulse} [μs]	Dwell time [ms]	Limit [ms]
39	2441	3041.667	324.850	400
Measurement uncertainty			<10 ⁻⁷	

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:
165

TEST REPORT REFERENCE: F101336E4

5.5 MAXIMUM PEAK OUTPUT POWER

5.5.1 METHOD OF MEASUREMENT (MAXIMUM PEAK OUTPUT POWER)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be disabled.


The following spectrum analyser settings shall be used:

- Span: Approx. 5 times the 20 dB bandwidth, centred on a hopping channel.
- Resolution bandwidth: > the 20 dB bandwidth of the emission being measured.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The indicated level is the peak output power, which has to be corrected with the value of the cable loss and an external attenuation (if necessary).

The measurement will be performed at the upper and lower end and the middle of the assigned frequency band.

Test set-up:

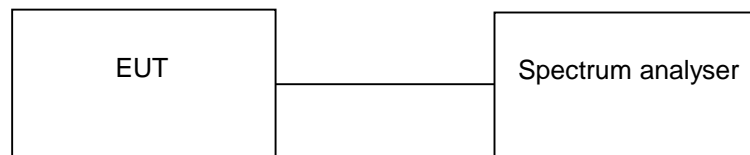


TEST REPORT REFERENCE: F101336E4


5.5.2 TEST RESULTS (MAXIMUM PEAK OUTPUT POWER)

Ambient temperature	20 °C	Relative humidity	43 %
---------------------	-------	-------------------	------

101336_56.wmf: Maximum peak output power at the lower end of the assigned frequency band (operation mode 1):

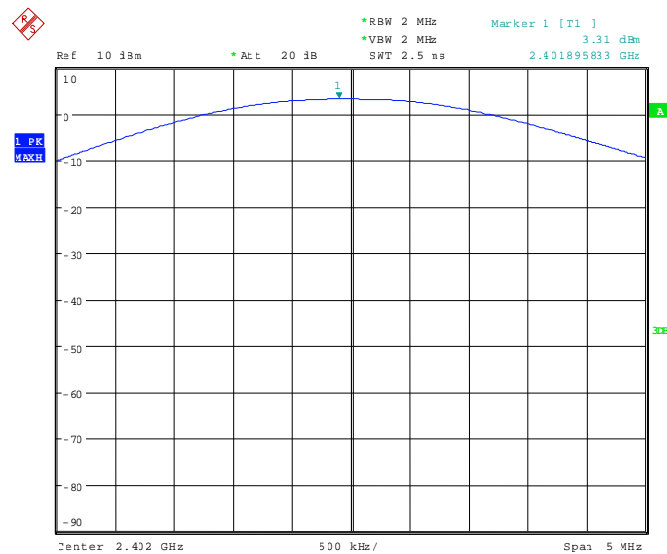


101336_57.wmf: Maximum peak output power at the middle of the assigned frequency band (operation mode 2):

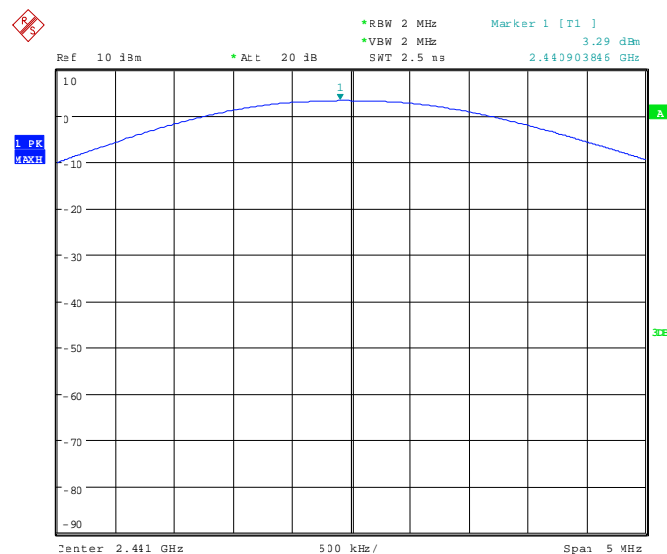

TEST REPORT REFERENCE: F101336E4

101336 58.wmf: Maximum peak output power at the upper end of the assigned frequency band
(operation mode 3):

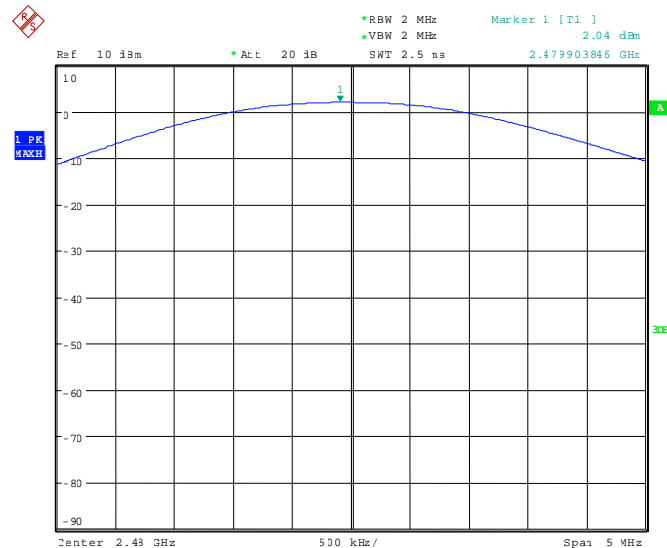

Operation mode	Channel number	Channel frequency [MHz]	Maximum peak output power [dBm]	Antenna gain [dBi]	Peak power limit [dBm]
1	0	2402	3.3	1.1	30.0
1a			1.7		
1b			2.0		
2	39	2441	3.3	1.1	30.0
2a			1.8		
2b			2.0		
3	78	2480	2.0	1.1	30.0
3a			0.4		
3b			0.7		
Measurement uncertainty				+0.66 dB / -0.72 dB	

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

165

TEST REPORT REFERENCE: F101336E4

5.6 BAND-EDGE COMPLIANCE

5.6.1 METHOD OF MEASUREMENT (BAND-EDGE COMPLIANCE (RADIATED))

The same test set-up as used for the final radiated emission measurement shall be used (refer also subclause 5.7.1 of this test report). The measurements shall be carried out with using a resolution bandwidth of 100 kHz.

The following spectrum analyser settings shall be used:

- Span: Wide enough to capture the peak level of the emission on the channel closest to the band-edge, as well as any modulation products, which fall outside the assigned frequency band.
- Resolution bandwidth: 100 kHz.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set on this value. The second display line has to be set 20 dB below the first line (or the peak marker). The frequency line shall be set on the edge of the assigned frequency band. Set the second marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is higher than that at the band-edge. This frequency shall be measured with the EMI receiver as described in subclause 5.7.1 of this test report, but 100 kHz resolution bandwidth shall be used.


The measurement will be performed at the upper and lower end of the assigned frequency band and with hopping on and off.

TEST REPORT REFERENCE: F101336E4


5.6.2 TEST RESULT (BAND-EDGE COMPLIANCE (RADIATED))

Ambient temperature	21 °C	Relative humidity	37 %
---------------------	-------	-------------------	------

101336_6.wmf: Radiated band-edge compliance, lower band edge, hopping off (operation mode 1):

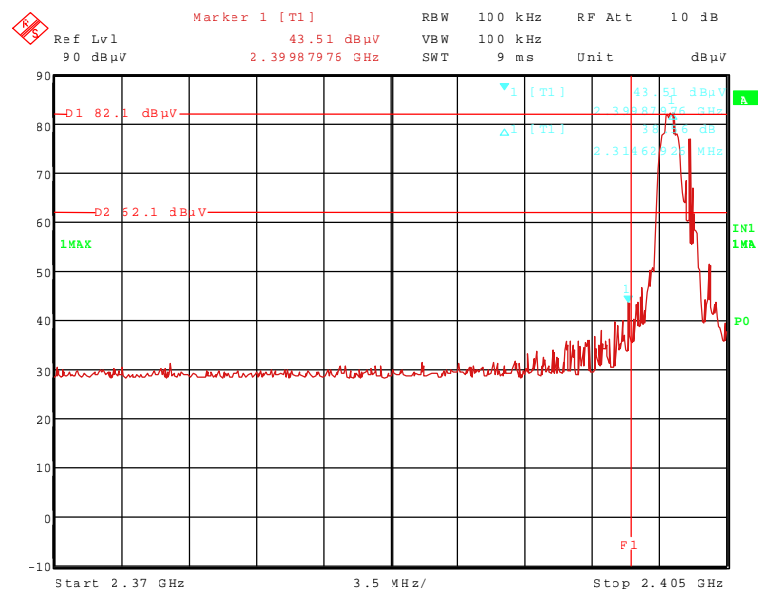


101336_7.wmf: Radiated band-edge compliance, lower band edge, hopping on (operation mode 4):

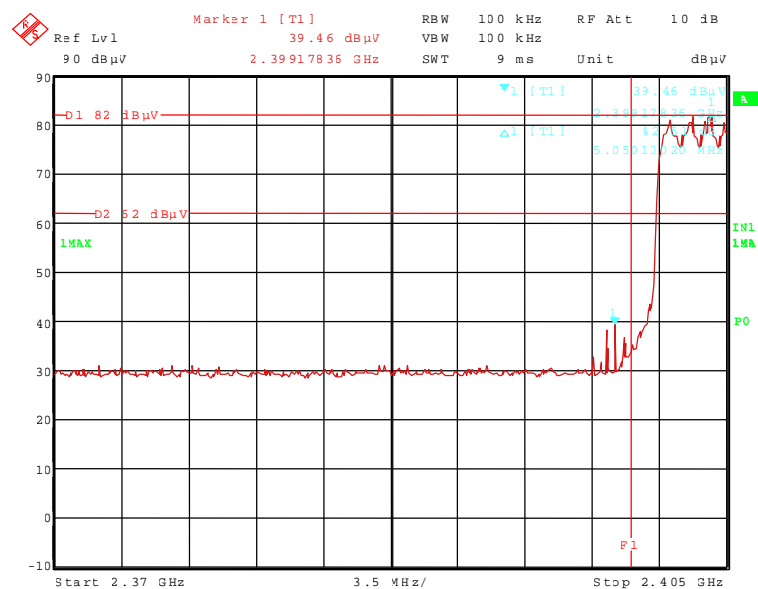


TEST REPORT REFERENCE: F101336E4

101336 4.wmf: Radiated band-edge compliance, upper band edge, hopping off (operation mode 3):

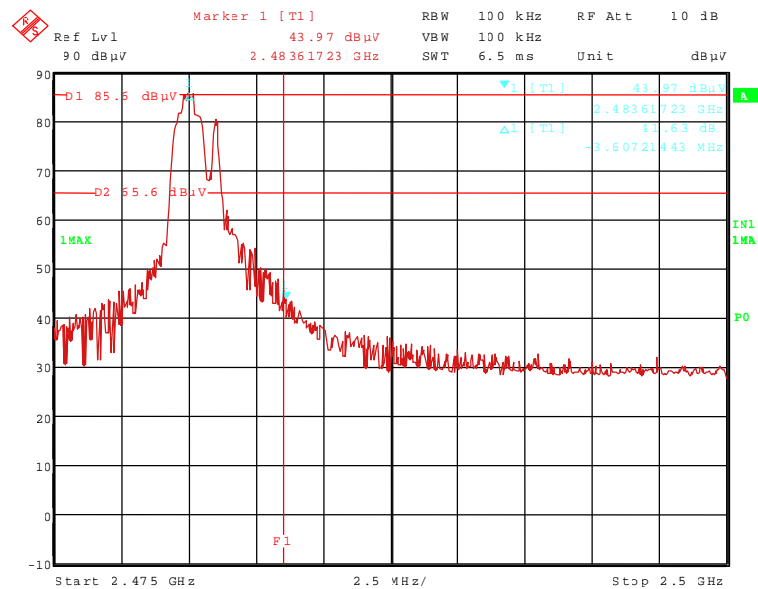

101336 5.wmf: Radiated band-edge compliance, upper band edge, hopping on (operation mode 4):

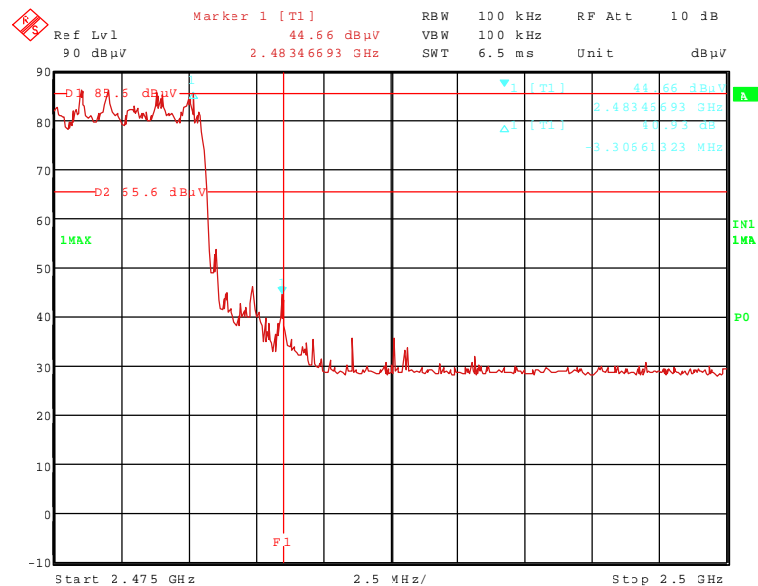

TEST REPORT REFERENCE: F101336E4

The plots on the page before are showing the radiated band-edge compliance for the upper band-edge, with and without hopping. The display line 1 (D1) in these plots represents the highest level within the assigned frequency band. The display line 2 (D2) represents the 20 dB offset to this highest level and shows the compliance with FCC 47 CFR Part 15.247 (d). The frequency line 1 (F1) shows the edge of the assigned frequency.

Band-edge compliance (lower band edge. hopping disenabled)										
Result measured with the peak detector:										
Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	92.5	-	-	86.5	28.8	26.5	3.7	150	Hor.	-
2.400	53.9	74.0	20.1	47.9	28.8	26.5	3.7	150	Hor.	No
Result measured with the average detector:										
Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	83.5	-	-	77.5	28.8	26.5	3.7	150	Hor.	-
2.400	44.9	63.5	18.6	38.9	28.8	26.5	3.7	150	Hor.	No
Measurement uncertainty							+2.2 dB / -3.6 dB			

Band-edge compliance (lower band edge. hopping enabled)										
Result measured with the peak detector:										
Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	92.5	-	-	86.5	28.8	26.5	3.7	150	Hor.	-
2.399	50.0	74.0	24.0	44.0	28.8	26.5	3.7	150	Hor.	No
Result measured with the average detector:										
Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	83.5	-	-	77.5	28.8	26.5	3.7	150	Hor.	-
2.399	41.0	63.5	22.5	35.0	28.8	26.5	3.7	150	Hor.	No
Measurement uncertainty							+2.2 dB / -3.6 dB			

TEST REPORT REFERENCE: F101336E4

Band-edge compliance (upper band edge. hopping disenabled)										
Result measured with the peak detector:										
Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.480	94.6	-	-	88.3	29.0	26.5	3.8	150	Hor.	-
2483.6	53.0	74.0	21.0	46.7	29.0	26.5	3.8	150	Hor.	Yes
Result measured with the average detector:										
Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.480	86.1	-	-	79.8	29.0	26.5	3.8	150	Hor.	-
2.4836	44.5	54.0	9.5	38.2	29.0	26.5	3.8	150	Hor.	Yes
Measurement uncertainty							+2.2 dB / -3.6 dB			

Band-edge compliance (upper band edge. hopping enabled)										
Result measured with the peak detector:										
Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.480	94.6	-	-	88.3	29.0	26.5	3.8	150	Hor.	-
2.4835	53.7	74.0	20.3	47.4	29.0	26.5	3.8	150	Hor.	Yes
Result measured with the average detector:										
Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.480	86.1	-	-	79.8	29.0	26.5	3.8	150	Hor.	-
2.4835	45.2	54.0	8.8	38.9	29.0	26.5	3.8	150	Hor.	Yes
Measurement uncertainty							+2.2 dB / -3.6 dB			

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:
29, 31 – 34, 36, 44

TEST REPORT REFERENCE: F101336E4

5.7 RADIATED EMISSIONS

5.7.1 METHOD OF MEASUREMENT (RADIATED EMISSIONS)

The radiated emission measurement is subdivided into four stages.

- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 30 MHz to 1 GHz.
- A final measurement carried out on an open area test site with reflecting ground plane and various antenna heights in the frequency range 30 MHz to 1 GHz.
- A preliminary measurement carried out in a fully anechoic chamber with a variable antenna distance and height in the frequency range 1 GHz to 110 GHz.
- A final measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 1 GHz to 110 GHz.

All measurements will be carried out with the EUT working on the middle of the assigned frequency band.


Preliminary measurement (30 MHz to 1 GHz)

In the first stage a preliminary measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2009 [1].

The frequency range 30 MHz to 1 GHz will be measured with an EMI Receiver set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 230 MHz	100 kHz
230 MHz to 1 GHz	100 kHz

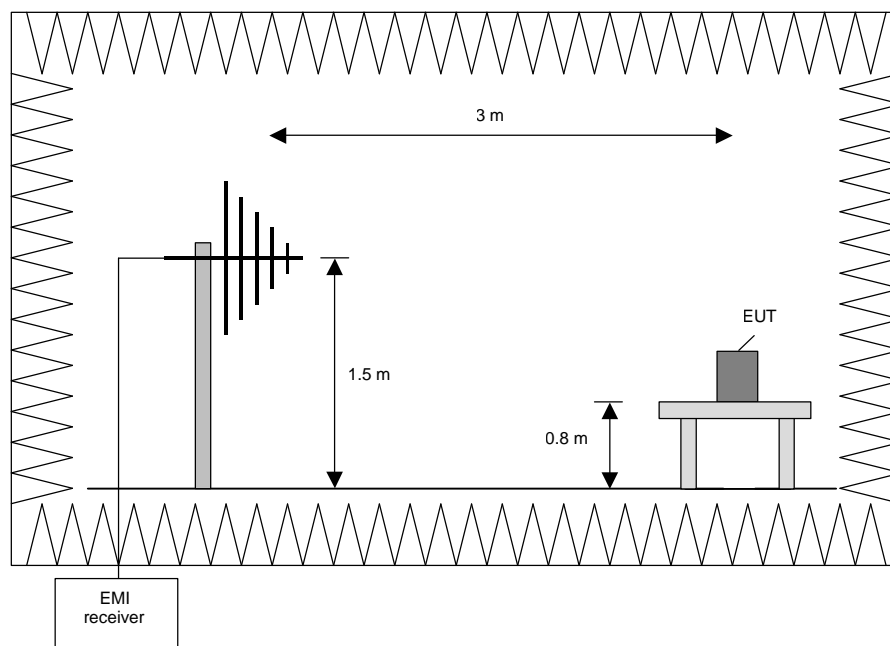

TEST REPORT REFERENCE: F101336E4

Procedure preliminary measurement:

Prescans were performed in the frequency range 30 MHz to 230 MHz and 230 MHz to 1 GHz.

The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Manipulate the system cables within the range to produce the maximum level of emission.
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Make a hardcopy of the spectrum.
5. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
6. Repeat 1) to 4) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).
7. Repeat 1) to 5) with the vertical polarisation of the measuring antenna.

Final measurement (30 MHz to 1 GHz)

A final measurement on an open area test site will be performed on selected frequencies found in the preliminary measurement. During this test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarisation and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	120 kHz

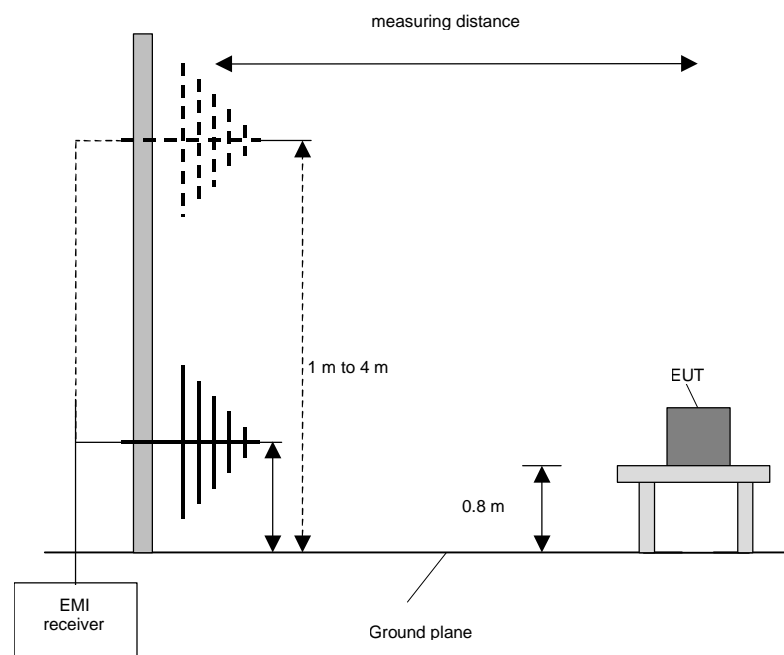

TEST REPORT REFERENCE: F101336E4

Procedure final measurement:

The following procedure will be used:

- 1) Measure on the selected frequencies at an antenna height of 1 m and a EUT azimuth of 23 °.
- 2) Move the antenna from 1 m to 4 m and note the maximum value at each frequency.
- 3) Rotate the EUT by 45 ° and repeat 2) until an azimuth of 337 ° is reached.
- 4) Repeat 1) to 3) for the other orthogonal antenna polarization.
- 5) Move the antenna and the turntable to the position where the maximum value is detected.
- 6) Measure while moving the antenna slowly +/- 1 m.
- 7) Set the antenna to the position where the maximum value is found.
- 8) Measure while moving the turntable +/- 45 °.
- 9) Set the turntable to the azimuth where the maximum value is found.
- 10) Measure with Final detector (QP and AV) and note the value.
- 11) Repeat 5) to 10) for each frequency.
- 12) Repeat 1) to 11) for each orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).

Preliminary and final measurement (1 GHz to 110 GHz)

This measurement will be performed in a fully anechoic chamber. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2009 [1].


Preliminary measurement (1 GHz to 110 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The spectrum analyser set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna, the antenna close to the EUT and while moving the antenna over all sides of the EUT. With the spectrum analyser in CLEAR / WRITE mode the cone of the emission should be found and than the measuring distance will be set to 3 m with the receiving antenna moving in this cone of emission. At this position the final measurement will be carried out.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	100 kHz
4 GHz to 12 GHz	100 kHz
12 GHz to 18 GHz	100 kHz
18 GHz to 26.5 GHz	100 kHz
26.5 GHz to 40 GHz	100 kHz
40 GHz to 60 GHz	100 kHz
50 GHz to 75 GHz	100 kHz
75 GHz to 110 GHz	100 kHz

TEST REPORT REFERENCE: F101336E4

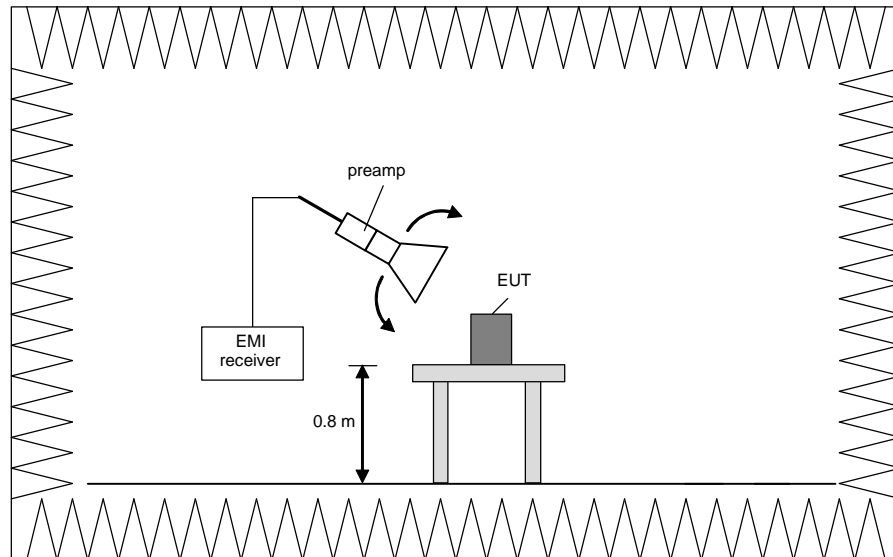


Final measurement (1 GHz to 110 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1 MHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 ° in order to have the antenna inside the cone of radiation.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	1 MHz
4 GHz to 12 GHz	1 MHz
12 GHz to 18 GHz	1 MHz
18 GHz to 26.5 GHz	1 MHz
26.5 GHz to 40 GHz	1 MHz
40 GHz to 60 GHz	1 MHz
50 GHz to 75 GHz	1 MHz
75 GHz to 110 GHz	1 MHz

TEST REPORT REFERENCE: F101336E4

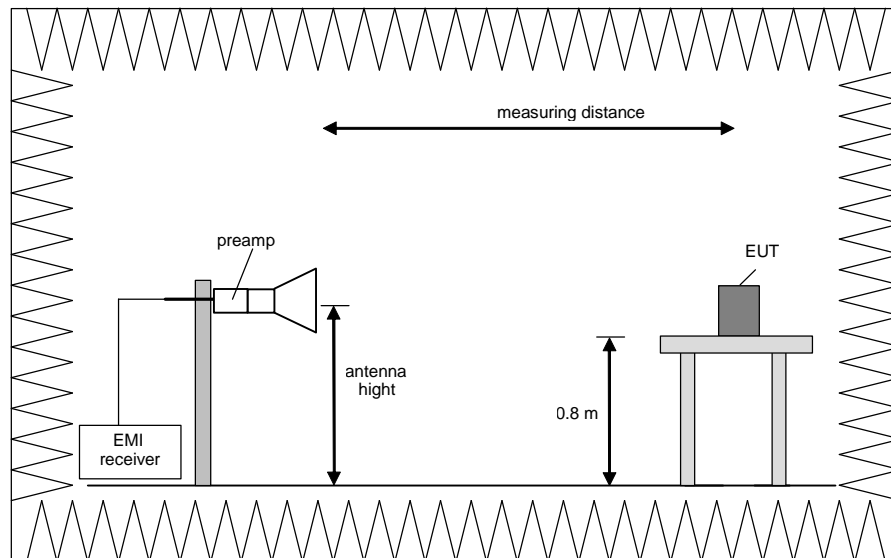

Procedure of measurement:

The measurements were performed in the frequency range 1 GHz to 4 GHz, 4 GHz to 12 GHz, 12 GHz to 18 GHz, 18 GHz to 26.5 GHz, 26.5 GHz to 40 GHz, 40 GHz to 60 GHz, 60 GHz to 75 GHz and 75 GHz to 110 GHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and move the antenna over all sides of the EUT (if necessary move the EUT to another orthogonal axis).
- 2) Change the antenna polarisation and repeat 1) with vertical polarisation.
- 3) Make a hardcopy of the spectrum.
- 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 5) Change the analyser mode to Clear / Write and found the cone of emission.
- 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3 m and the antenna will be still inside the cone of emission.
- 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarisation and azimuth and the peak and average detector, which causes the maximum emission.
- 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

Step 1) to 6) are defined as preliminary measurement.

TEST REPORT REFERENCE: F101336E4


5.7.2 TEST RESULTS (RADIATED EMISSIONS)

5.7.2.1 PRELIMINARY MEASUREMENT (9 kHz to 1 GHz)

Ambient temperature	21 °C	Relative humidity	37 %
---------------------	-------	-------------------	------

Position of EUT:	The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.
Cable guide:	The cables of the EUT were fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.
Test record:	All results are shown in the following.
Supply voltage:	During all measurements the EUT was supplied with 3.7 V DC.
Remark:	As pre-tests have shown, the emissions in the frequency range 9 kHz to 1 GHz are not depending on the transmitter operation mode or frequency. Therefore, the emissions in this frequency range were measured only with the transmitter operates on the mid channel and with DH5 modulation (operation mode 2).


101336_26.wmf: Spurious emissions from 9 kHz to 150 kHz (operation mode 2):

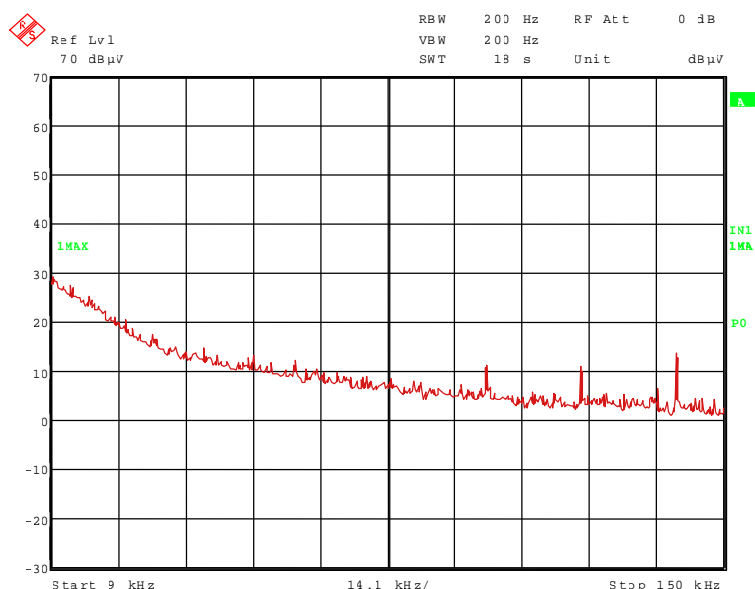


TEST EQUIPMENT USED FOR THE TEST:
29, 31 – 35, 43, 55

TEST REPORT REFERENCE: F101336E4

101336 27.wmf: Spurious emissions from 150 kHz to 1 MHz (operation mode 2):

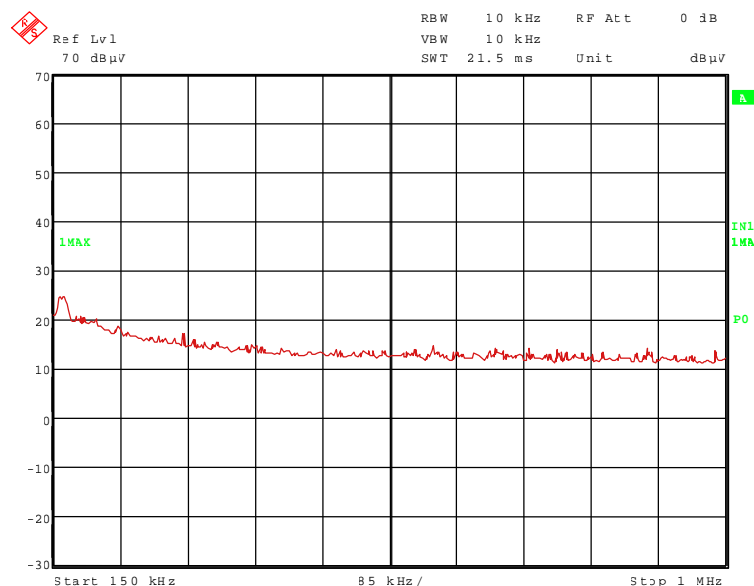

101336 28.wmf: Spurious emissions from 1 MHz to 30 MHz (operation mode 2):

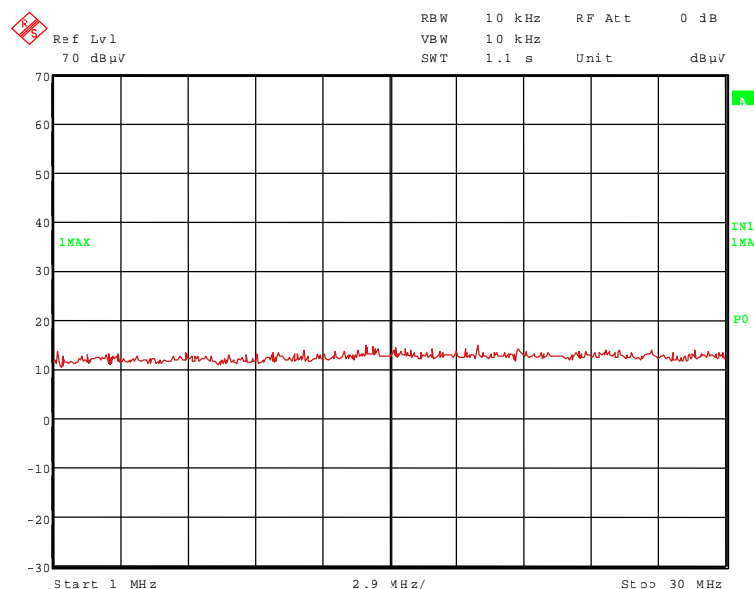

The following frequency was found inside the restricted bands during the preliminary radiated emission test:

- 100 kHz.


The following frequencies were found outside the restricted bands during the preliminary radiated emission test:

- 120 kHz and 140 kHz.


These frequencies have to be measured in a final measurement. The results were presented in the following.

TEST REPORT REFERENCE: F101336E4

101336 19.wmf: Spurious emissions from 30 MHz to 230 MHz (operation mode 2):

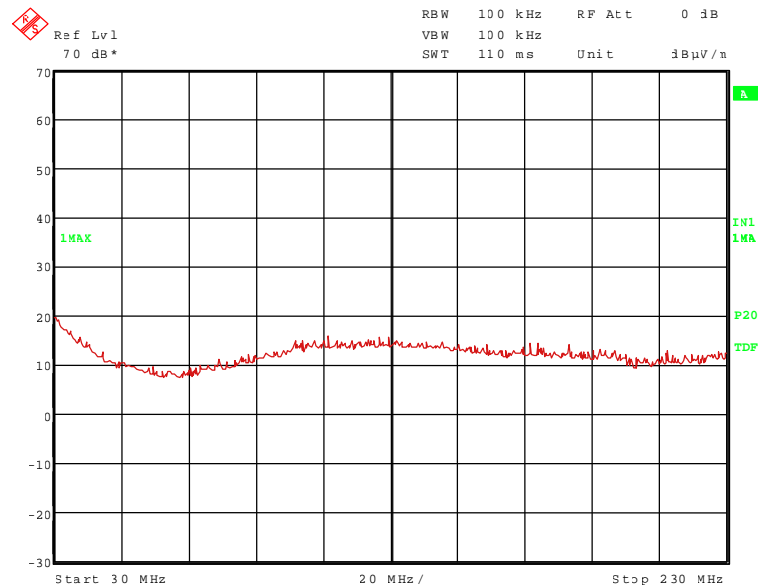

101336 20.wmf: Spurious emissions from 230 MHz to 1 GHz (operation mode 2):

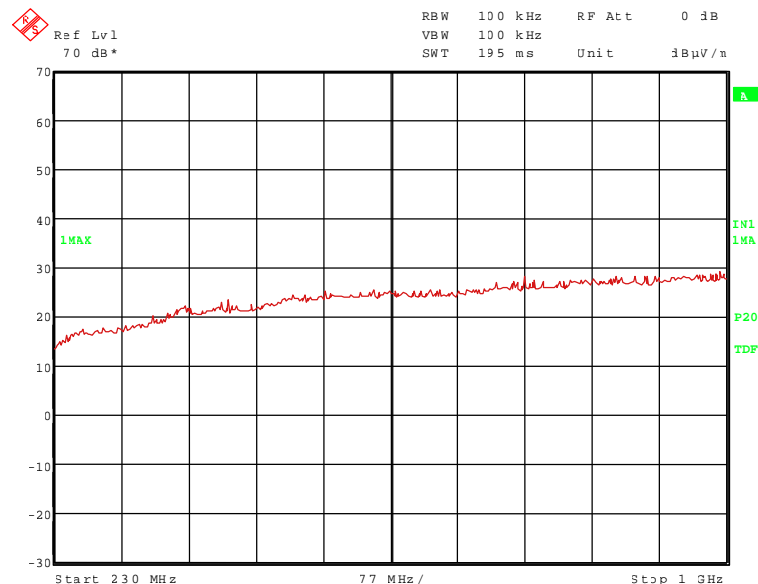

No significant frequencies above the noise floor of the system were found during the preliminary radiated emission test inside this frequency range, so no measurements were carried out on the open area test site.

TEST REPORT REFERENCE: F101336E4

5.7.2.2 FINAL MEASUREMENT (9 kHz to 30 MHz)

Ambient temperature	20 °C	Relative humidity	45 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m and 10 m.

Cable guide: The cable of the EUT is running vertically to the floor. For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was supplied with 3.7 V DC via the carrier board.

Test results: The test results were calculated with the following formula:

$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{antenna factor [dB/m]}$$

Results with measuring distance of 3 m						
Frequency	Result dB μ V/m	Limit dB μ V/m	Margin dB	Detector	Readings dB μ V	Antenna factor * dB/m
100.000	31.0	107.6	76.6	QP	11.0	20.0
120.000	30.8	106.0	75.2	AV	10.8	20.0
140.000	34.6	104.7	70.1	AV	14.6	20.0
Results with measuring distance of 10 m						
Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Detector	Readings dB μ V	Antenna factor * dB/m
100.000	Signal was below the noise floor of the measuring system					
120.000	Signal was below the noise floor of the measuring system					
140.000	Signal was below the noise floor of the measuring system					
Measurement uncertainty			+2.2 dB / -3.6 dB			

*:Cable loss included

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

55 – 57

TEST REPORT REFERENCE: F101336E4

5.7.2.3 PRELIMINARY MEASUREMENT (1 GHz to 25 GHz)

Ambient temperature	21 °C	Relative humidity	37 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.


Cable guide: The cable of the EUT is running vertically to the false floor. For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was supplied with 3.7 V DC via the carrier board.


Transmitter operates at the lower end of the assigned frequency band

101336_1.wmf: Spurious emissions from 1 GHz to 4 GHz (operation mode 1):

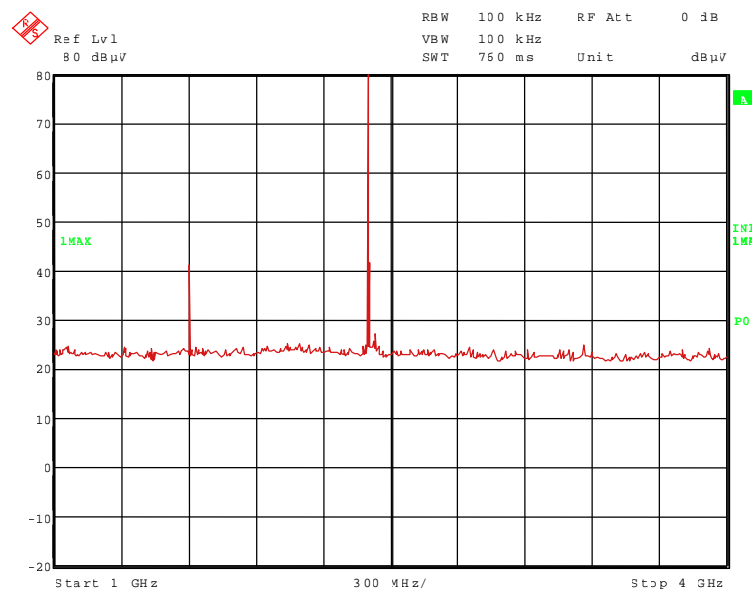


TEST REPORT REFERENCE: F101336E4

101336_8.wmf: Spurious emissions from 4 GHz to 12 GHz (operation mode 1):

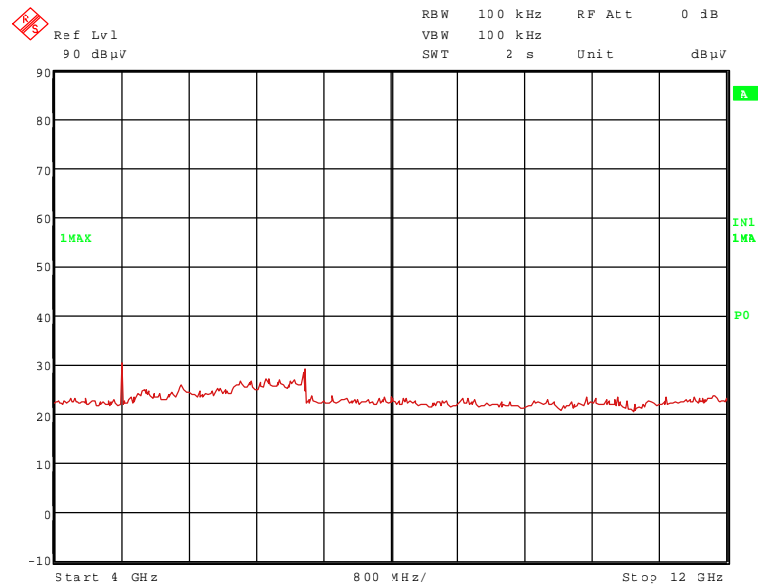


101336_13.wmf: Spurious emissions from 12 GHz to 18 GHz (operation mode 1):

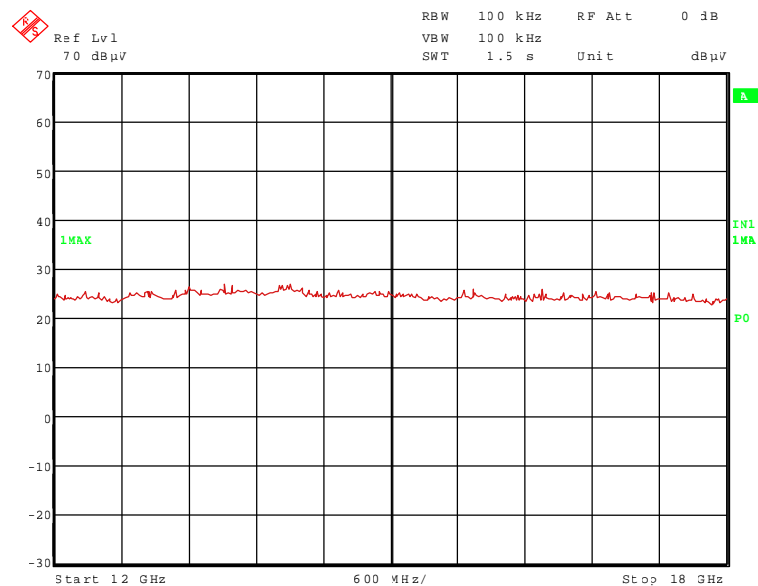

TEST REPORT REFERENCE: F101336E4

101336 18.wmf: Spurious emissions from 18 GHz to 25 GHz (operation mode 1):

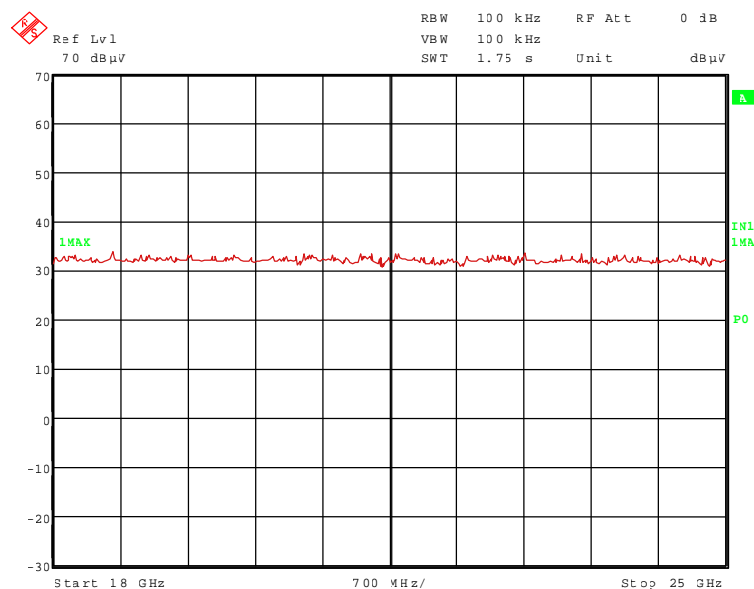

The following frequency was found inside the restricted bands during the preliminary radiated emission test:

- 1.602 GHz and 4.804 GHz.

The following frequencies were found outside the restricted bands during the preliminary radiated emission test:

- 2.402 GHz.

These frequencies have to be measured in a final measurement. The results were presented in the following.


TEST EQUIPMENT USED FOR THE TEST:

29, 31, 36, 37, 39, 44, 46, 49 - 51, 72


TEST REPORT REFERENCE: F101336E4

Transmitter operates on the middle of the assigned frequency band

101336 2.wmf: Spurious emissions from 1 GHz to 4 GHz (operation mode 2):

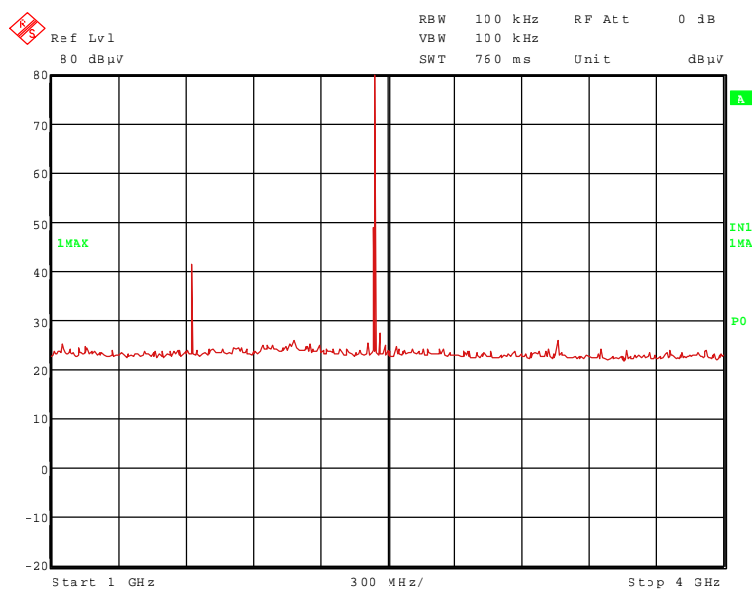


101336 9.wmf: Spurious emissions from 4 GHz to 12 GHz (operation mode 2):

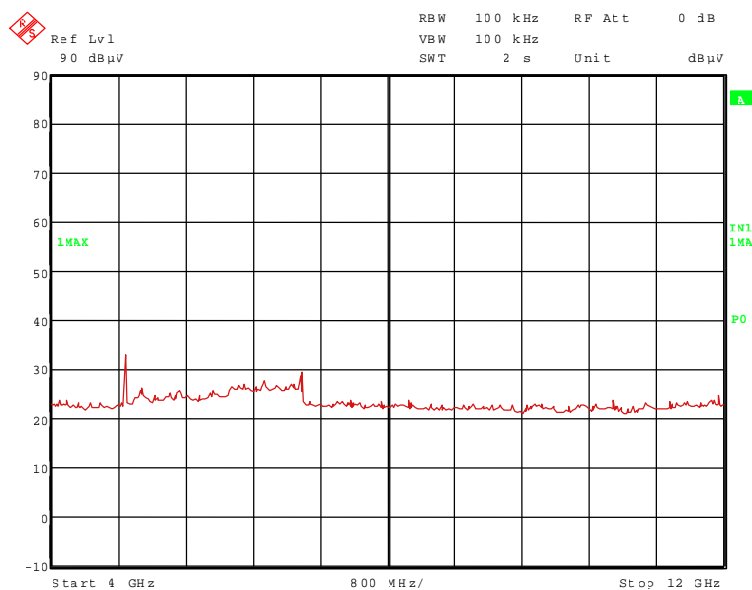


TEST REPORT REFERENCE: F101336E4

101336 14.wmf: Spurious emissions from 12 GHz to 18 GHz (operation mode 2):

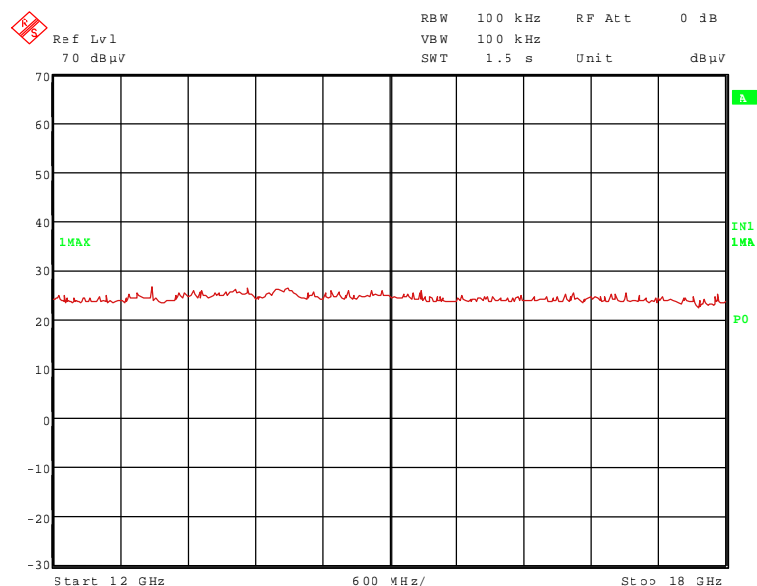

101336 17.wmf: Spurious emissions from 18 GHz to 25 GHz (operation mode 2):

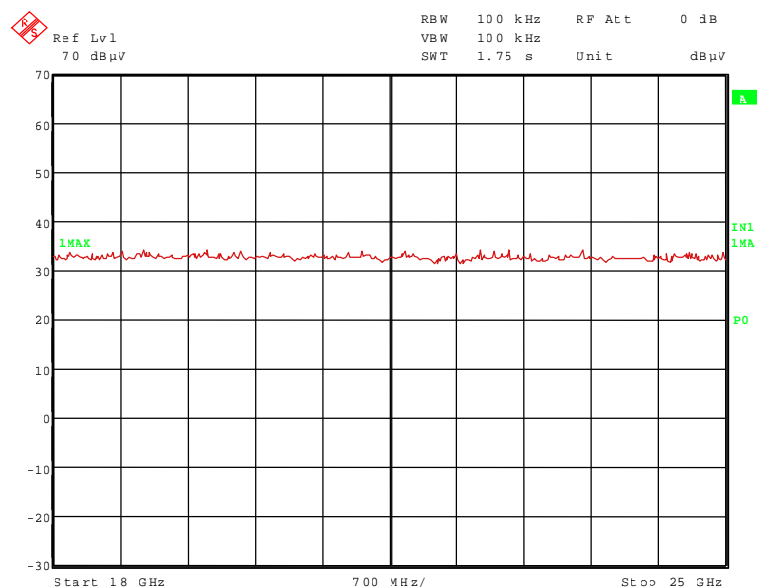

The following frequency was found inside the restricted bands during the preliminary radiated emission test:

- 4.882 GHz.

The following frequencies were found outside the restricted bands during the preliminary radiated emission test:


- 1.628 GHz and 2.441 GHz.

These frequencies have to be measured in a final measurement. The results were presented in the following.


TEST REPORT REFERENCE: F101336E4

Transmitter operates on the upper end of the assigned frequency

101336 3.wmf: Spurious emissions from 1 GHz to 4 GHz (operation mode 3):

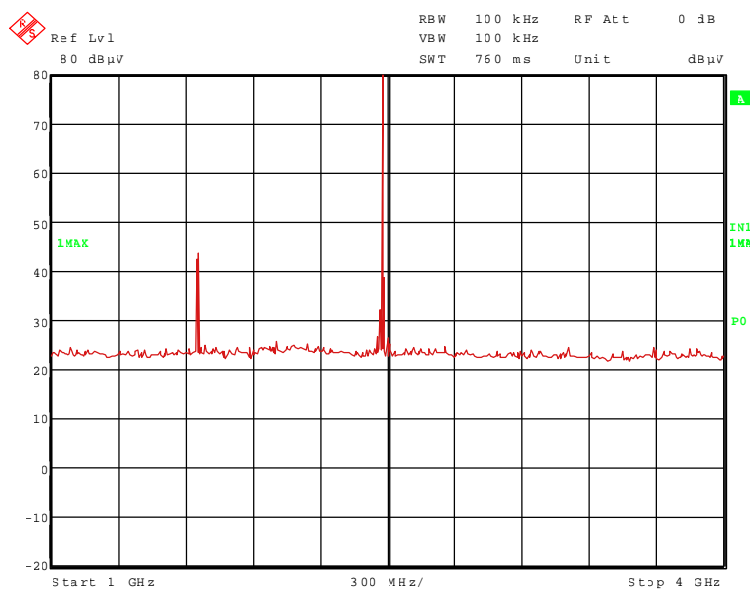


101336 10.wmf: Spurious emissions from 4 GHz to 12 GHz (operation mode 3):

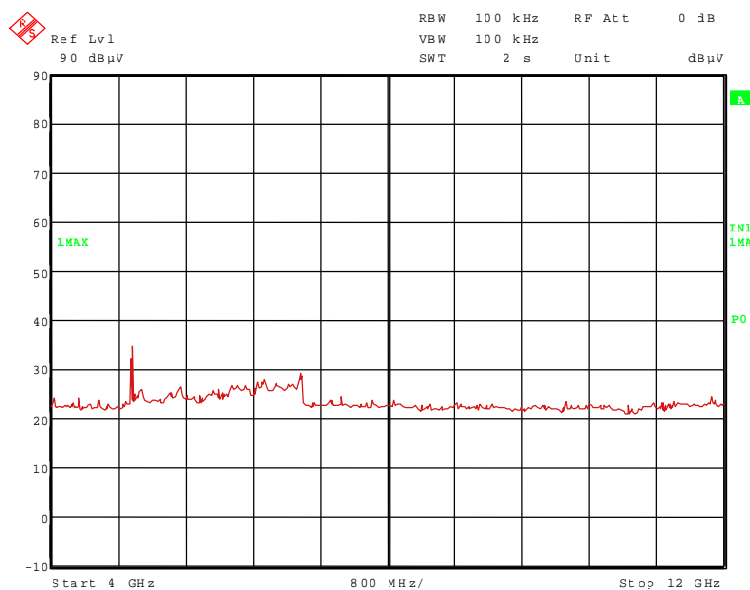


TEST REPORT REFERENCE: F101336E4

101336 15.wmf: Spurious emissions from 12 GHz to 18 GHz (operation mode 3):

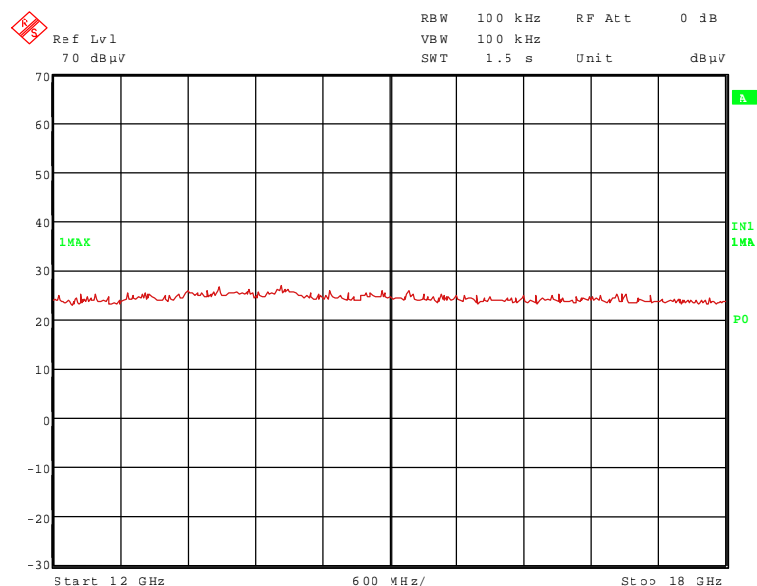

101336 16.wmf: Spurious emissions from 18 GHz to 25 GHz (operation mode 3):

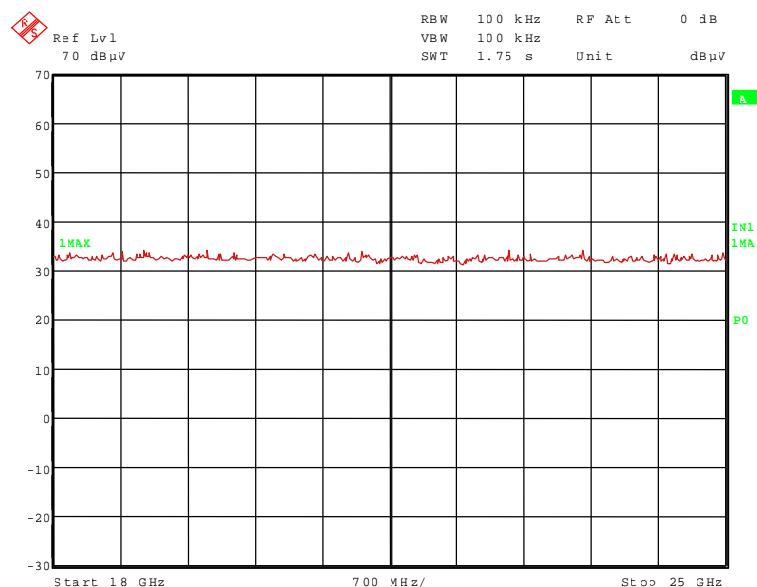

The following frequency was found inside the restricted bands during the preliminary radiated emission test:

- 4.960 GHz.

The following frequencies were found outside the restricted bands during the preliminary radiated emission test:

- 1.654 GHz and 2.480 GHz.

These frequencies have to be measured in a final measurement. The results were presented in the following.

TEST REPORT REFERENCE: F101336E4

5.7.2.4 FINAL MEASUREMENT (1 GHz to 25 GHz)

Ambient temperature	21 °C	Relative humidity	37 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: The cable of the EUT is running vertically to the false floor. For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was supplied with 3.7 V DC by the carrier board.

Resolution bandwidth: For all measurements a resolution bandwidth of 1 MHz was used.

Transmitter operates at the lower end of the assigned frequency band (operation mode 1)

Result measured with the peak detector:

Frequency GHz	Corr. value dBμV/m	Limit dBμV/m	Margin dB	Readings dBμV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
1.602	47.5	74.0	26.5	45	26.0	26.5	3.0	150	Hor.	Yes
2.402	92.5	-	-	86.5	28.8	26.5	3.7	150	Hor.	-
4.804	52.7	74.0	21.3	39.4	33.7	25.7	5.3	150	Hor.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

Result measured with the average detector:

Frequency GHz	Corr. value dBμV/m	Limit dBμV/m	Margin dB	Readings dBμV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
1.602	42.9	54.0	11.1	40.4	26.0	26.5	3.0	150	Hor.	Yes
2.402	83.5	-	-	77.5	28.8	26.5	3.7	150	Hor.	-
4.804	37.4	54.0	16.6	24.1	33.7	25.7	5.3	150	Hor.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

TEST REPORT REFERENCE: F101336E4

Transmitter operates at the middle of the assigned frequency band (operation mode 2)

Result measured with the peak detector:

Frequency GHz	Corr. value dBμV/m	Limit dBμV/m	Margin dB	Readings dBμV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
1.628	47.5	74.7	27.2	44.8	26.1	26.5	3.1	150	Hor.	No
2.441	94.7	-	-	88.6	28.9	26.5	3.7	150	Hor.	-
4.882	53.9	74.0	20.1	40.5	33.8	25.7	5.3	150	Hor.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

Result measured with the average detector:

Frequency GHz	Corr. value dBμV/m	Limit dBμV/m	Margin dB	Readings dBμV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
1.628	43.2	65.9	22.7	40.5	26.1	26.5	3.1	150	Hor.	No
2.441	85.9	-	-	79.8	28.9	26.5	3.7	150	Hor.	-
4.882	34.9	54.0	19.1	21.5	33.8	25.7	5.3	150	Hor.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

TEST REPORT REFERENCE: F101336E4

Transmitter operates at the upper end of the assigned frequency band (operation mode 3)

Result measured with the peak detector:

Frequency GHz	Corr. value dBμV/m	Limit dBμV/m	Margin dB	Readings dBμV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
1.654	49.1	74.6	25.5	46.3	26.2	26.5	3.1	150	Hor.	No
2.480	94.6	-	-	88.3	29.0	26.5	3.8	150	Hor.	-
4.960	54.8	74.0	19.2	41.1	34.0	25.6	5.3	150	Hor.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

Result measured with the average detector:

Frequency GHz	Corr. value dBμV/m	Limit dBμV/m	Margin dB	Readings dBμV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
1.654	45.8	66.1	20.3	43	26.2	26.5	3.1	150	Hor.	No
2.480	86.1	-	-	79.8	29.0	26.5	3.8	150	Hor.	-
4.960	36.8	54.0	17.2	23.1	34.0	25.6	5.3	150	Hor.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

29, 31 –34, 36, 37, 39, 44, 46, 49 - 51, 72

TEST REPORT REFERENCE: F101336E4


5.8 CONDUCTED EMISSIONS ON POWER SUPPLY LINES (150 kHz to 30 MHz)

5.8.1 METHOD OF MEASUREMENT

This test will be carried out in a shielded chamber. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm above the ground plane. Floor-standing devices will be placed directly on the ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2009 [1].

The frequency range 150 kHz to 30 MHz will be measured with an EMI Receiver set to MAX Hold mode with peak and average detector and a resolution bandwidth of 9 kHz. A scan will be carried out on the phase (or plus pole in case of DC powered devices) of the AC mains network. If levels detected 10 dB below the appropriate limit, this emission will be measured with the average and quasi-peak detector on all lines.

Frequency range	Resolution bandwidth
150 kHz to 30 MHz	9 kHz

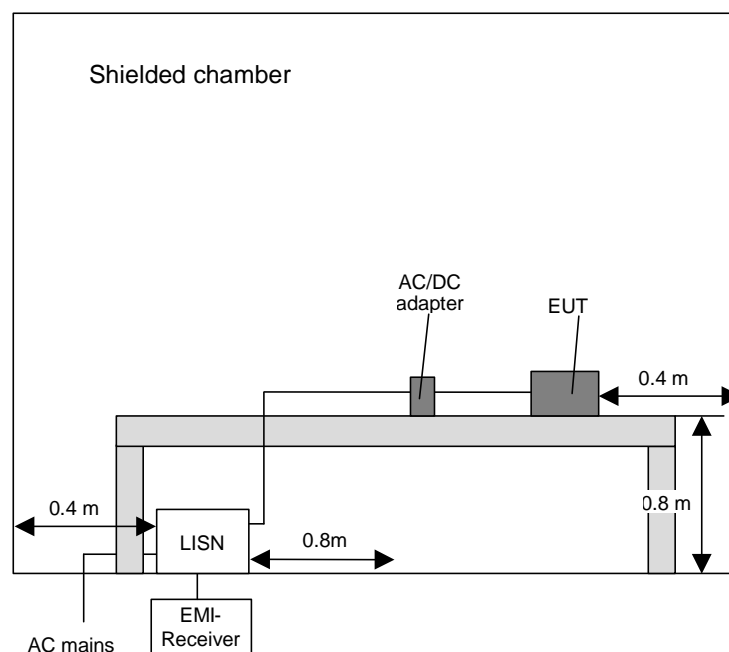

TEST REPORT REFERENCE: F101336E4

5.8.2 TEST RESULTS (CONDUCTED EMISSIONS ON POWER SUPPLY LINES)

Ambient temperature	21 °C	Relative humidity	46 %
---------------------	-------	-------------------	------


Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m.

Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: The EUT operates in operation mode 4. All results are shown in the following.

Supply voltage: During the measurement the EUT was supplied via the carrier board with 3.7 V DC by an AC / DC adaptor type Monacor PSS-2500SV, which was supplied by 120 V AC / 60 Hz.

The curves in the diagram only represent for each frequency point the maximum measured value of all preliminary measurements which were made for each power supply line. The top measured curve represents the peak measurement and the bottom measured curve the average measurement. The quasi-peak measured points are marked by an x and the average measured points by an +.

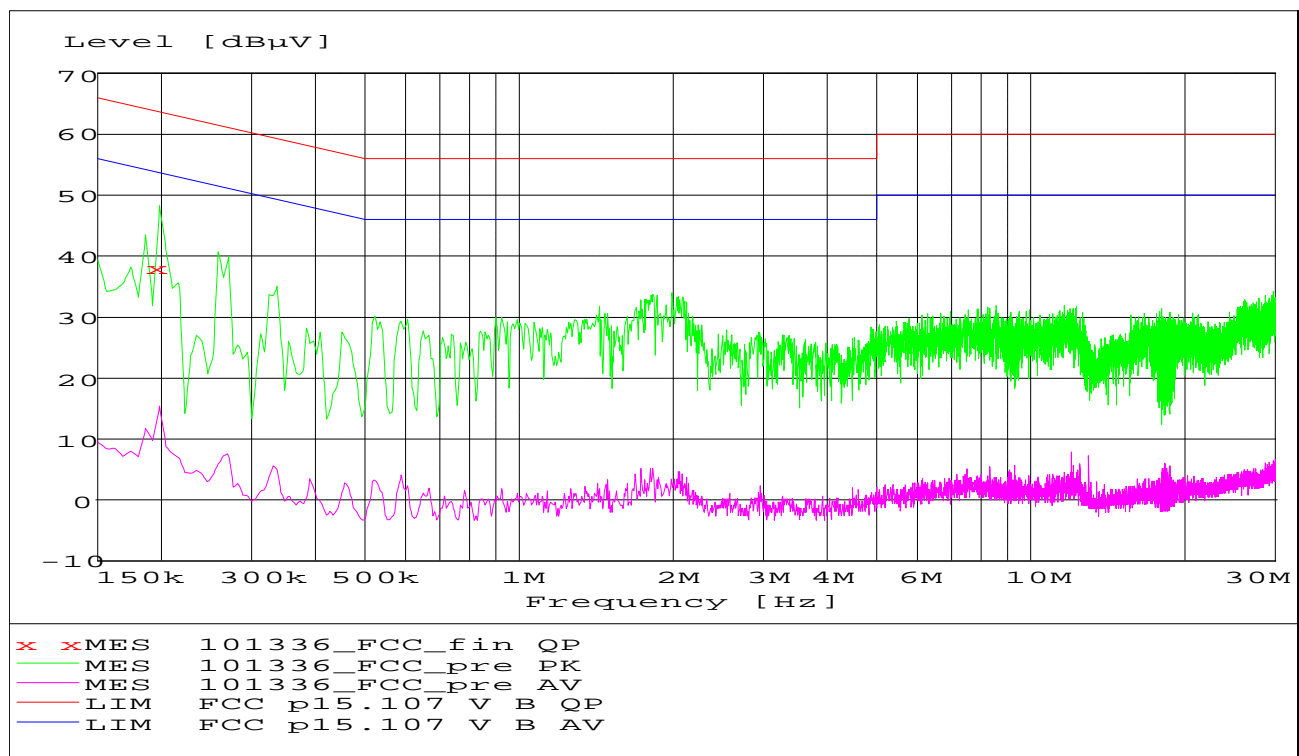

Data record name: 101336_FCC

TEST REPORT REFERENCE: F101336E4

Result measured with the quasipeak detector:

(These values are marked in the diagram by an x)

Frequency MHz	Level dB μ V	Transducer dB	Limit dB μ V	Margin dB	Line	PE
0.195000	38.30	1.0	63.8	25.5	N	FLO
Measurement uncertainty				+3.6 dB / -4.5 dB		

Data record name: 92137AC_fin

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

1 – 3, 5, 20

TEST REPORT REFERENCE: F101336E4

6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

TEST REPORT REFERENCE: F101336E4

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal. due
1	Shielded chamber M4	-	Albatross Projects	B83117S1-X158	480088	Weekly verification (system cal.)	
2	EMI Receiver	ESIB26	Rohde & Schwarz	100292	481182	02/08/2010	02/2012
3	LISN	NSLK8128	Rohde & Schwarz	8128155	480058	08/07/2009	08/2010
5	High pass filter	HR 0.13-5ENN	FSY Microwave Inc.	DC 0109 SN 001	480339	Weekly verification (system cal.)	
6	EMI-Software	ES-K1	Rohde & Schwarz	-	480111	Not applicable	
14	Open area test site	-	Phoenix Test-Lab	-	480085	Weekly verification	
15	Measuring receiver	ESIB7	Rohde & Schwarz	100304	480521	03/15/2010	03/2012
16	Controller	HD100	Deisel	100/670	480139	-	-
17	Turntable	DS420HE	Deisel	420/620/80	480087	-	-
18	Antenna support	AS615P	Deisel	615/310	480086	-	-
19	Antenna	CBL6111 A	Chase	1643	480147	08/01/2007	08/2012
20	EMI Software	ES-K1	Rohde & Schwarz	-	480111	-	-
29	Fully anechoic chamber M20	-	Albatross Projects	B83107-E2439-T232	480303	Weekly verification	
31	Measuring receiver	ESI 40	Rohde & Schwarz	100064	480355	03/17/2010	03/2012
32	Controller	MCU	Maturo	MCU/043/971107	480832	-	-
33	Turntable	DS420HE	Deisel	420/620/80	480315	-	-
34	Antenna support	AS615P	Deisel	615/310	480187	-	-
35	Antenna	CBL6112 B	Chase	2688	480328	10/11/2005	10/2010
36	Antenna	3115 A	EMCO	9609-4918	480183	04/11/2008	11/2013
37	Standard Gain Horn 11.9 GHz – 18 GHz	18240-20	Flann Microwave	483	480294	Six month verification (system cal.)	
39	Standard Gain Horn 17.9 GHz – 26.7 GHz	20240-20	Flann Microwave	411	480297	Six month verification (system cal.)	
43	RF-cable No. 36	Sucoflex 106B	Huber + Suhner	0522/6B	480571	Weekly verification	
44	RF-cable No. 31	RTK 081	Rosenberger	-	410142	Weekly verification	
46	RF-cable 1 m	KPS-1533-400-KPS	Insulated Wire	-	480301	Six month verification (system cal.)	
49	Preamplifier	JS3-00101200-23-5A	Miteq	681851	480337	Six month verification (system cal.)	
50	Preamplifier	JS3-12001800-16-5A	Miteq	571667	480343	Six month verification (system cal.)	
51	Preamplifier	JS3-18002600-20-5A	Miteq	658697	480342	Six month verification (system cal.)	
55	Loop antenna	HFH2-Z2	Rohde & Schwarz	832609/014	480059	03/10/2010	03/2013
56	Outdoor test site	-	Phoenix Test-Lab	-	480293	Monthly verification	
57	EMI test receiver	ESPC	Rohde & Schwarz	843756/006	480150	03/12/2010	03/2012
72	4 GHz High Pass Filter	WHKX4.0/18G-8SS	Wainwright Instruments	1	480587	Weekly verification	
165	Spectrum analyser	FSU	Rohde & Schwarz	200125	480956	04/15/2010	04/2010

TEST REPORT REFERENCE: F101336E4

7 LIST OF ANNEXES

ANNEX A	PHOTOGRAPHS OF THE TEST SET-UPS:	6 pages
	cB-OBC001i, test set-up fully anechoic chamber	101336_7.jpg
	cB-OBC001i, test set-up fully anechoic chamber	101336_10.jpg
	cB-OBC001i, test set-up fully anechoic chamber	101336_9.jpg
	cB-OBC001i, test set-up fully anechoic chamber	101336_8.jpg
	cB-OBC001i, test set-up outdoor test site	101336_31.jpg
	cB-OBC001i, test set-up shielded chamber	101336_14.jpg
ANNEX B	INTERNAL PHOTOGRAPHS OF THE TEST SAMPLE:	5 pages
	cB-OBC001i, top view	101336_a.jpg
	cB-OBC001i, top view, shielding removed	101336_c.jpg
	cB-OBC001i, bottom view	101336_b.jpg
	cB-OBC001i, mounted on carrier board (cB-0942), top view	101336_g.jpg
	cB-OBC001i, carrier board (cB-0942), bottom view	101336_f.jpg
ANNEX C	EXTERNAL PHOTOGRAPHS OF THE TEST SAMPLE:	0 pages
	Because the EUT is a module, which is intended to be implemented inside a final application, no external photographs were available	
ANNEX D	ADDITIONAL RESULTS FOR INDUSTRY CANADA:	7 pages