



NVLAP LAB CODE 200707-0



FCC PART 15.247

MEASUREMENT AND TEST REPORT

For

Iqua Ltd.

Kimmeltie 3, Espoo, FINLAND

FCC ID: TUFBHS-802

This Report Concerns: <input checked="" type="checkbox"/> Original Report		Equipment Type: Bluetooth Wireless Headset	
Test Engineer:	Andy Yan and <i>Andy Yan</i> Danny Dong <i>Danny Dong</i>		
Report No.:	RSZ08010406		
Test Date:	2007-11-19 to 2007-11-21		
Report Date:	2008-01-11		
Reviewed By:	EMC Manager: Green Xu <i>Green Xu</i>		
Prepared By:	Bay Area Compliance Laboratories Corp.(Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008		

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.(Shenzhen). This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
HOST SYSTEM CONFIGURATION LIST AND DETAILS	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	7
CONFIGURATION OF TEST SETUP	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
§15.247 (i) & §2.1093 - RF EXPOSURE.....	10
§15.203 - ANTENNA REQUIREMENT.....	11
STANDARD APPLICABLE	11
ANTENNA CONNECTOR CONSTRUCTION	11
§15.207 (a) - CONDUCTED EMISSIONS.....	12
MEASUREMENT UNCERTAINTY	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST PROCEDURE	13
TEST RESULTS SUMMARY.....	13
TEST DATA	14
PLOT(S) OF TEST DATA	14
§15.109, §15.205, §15.209, §15.247 - RADIATED EMISSIONS.....	17
APPLICABLE STANDARD	17
MEASUREMENT UNCERTAINTY	17
EUT SETUP.....	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST RESULTS SUMMARY.....	19
TEST DATA	19
§15.247(a) (1) - CHANNEL SEPARATION TEST.....	23
APPLICABLE STANDARD	23
TEST EQUIPMENT LIST AND DETAILS.....	23

TEST PROCEDURE23
TEST DATA23

§15.247(a) (1) – 20dB BANDWIDTH TESTING27

APPLICABLE STANDARD27
TEST EQUIPMENT LIST AND DETAILS.....27
TEST PROCEDURE27
TEST DATA27

§15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST31

APPLICABLE STANDARD31
TEST EQUIPMENT LIST AND DETAILS.....31
TEST PROCEDURE31
TEST DATA31

§15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....33

APPLICABLE STANDARD33
TEST EQUIPMENT LIST AND DETAILS.....33
TEST PROCEDURE33
TEST DATA33

§15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT37

APPLICABLE STANDARD37
TEST EQUIPMENT LIST AND DETAILS.....37
TEST PROCEDURE37
TEST DATA37

§15.247(d) - BAND EDGES TESTING.....41

APPLICABLE STANDARD41
TEST EQUIPMENT LIST AND DETAILS.....41
TEST PROCEDURE41
TEST DATA41

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Iqua Ltd.*'s product, model number: *BHS-802* or the "EUT" as referred to in this report is a *Bluetooth wireless headset*, which measures approximately 6.0 cm L x 1.0 cm W x 2.3 cm H, rated input voltage: DC 3.7V Battery.

Adapter I: Power Supply (Made in China by SPEEDY TECH)

Model: 7501SD-5018A-UL, Input: 100-240 V~50/60 Hz 50 mA, Output: 5.0 V --- 180 mA

Adapter II: SIL Switching adapter(Made in China)

Model: SSA-5W-05 US 050012N, Input: 100-240V 50/60Hz 0.2A, Output: 5.0V --- 120mA

** All measurement and test data in this report was gathered from production sample serial number: 0711025 (Assigned by BACL, Shenzhen). The EUT was received on 2007-11-14.*

Objective

This Type approval report is prepared on behalf of *Iqua Ltd.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203,15.205, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp.(Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp.(Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp.(Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



NVLAP LAB CODE 200707-0

The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm> .

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

N/A.

Special Accessories

N/A.

Equipment Modifications

Bay Area Compliance Laboratories Corp.(Shenzhen) has not done any modification on the EUT.

Host System Configuration List and Details



Manufacturer	Description	Model	Serial Number	FCC ID
DELL	PC	DELL 170L	CN-0TC670-70821-560-F4Q6	DoC
DELL	Keyboard	SK-8110	CN07N244-71616-56A-1B1E	DoC
DELL	Mouse	M071KC	520027907	DoC
DELL	LCD Monitor	1505FP	Y4287-7168-571-GBSH	DoC
ProMOS	Memory	V826632K24SATG-C0	0525-K1933700	DoC
Intel	CPU	Celeron D-2533	N/A	DoC

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
DELL	Motherboard	OWC297	CN-OWC297-70821-564-00NI	DoC
DELL	Power	NPS-250KB D	CN-0H2678-17972-56E-80BM	DoC
Seagate	Hard Disk	ST340014A	5JXK3GXE	DoC
DELL	3.5' Floppy	N/A	CN-0N8893-69802-54Q-02P0	DoC
Lite-ON	CD-Rom	LTN-489S	N/A	DoC
Intel	Ethernet	PRO 10/100 VE	N/A	DoC
CS	Smart Card	ACOS2	N/A	DoC


External I/O Cable

Cable Description	Length (M)	From Port	To
Shielded Detachable K/B Cable	1.5	K/B Port /Host	K/B
Shielded Detachable Mouse Cable	1.5	Mouse Port /Host	Mouse
Shielded Detachable Cable	1.4	Adapter	EUT

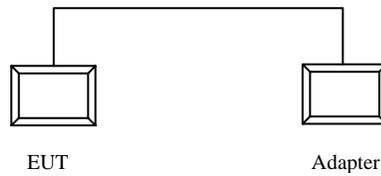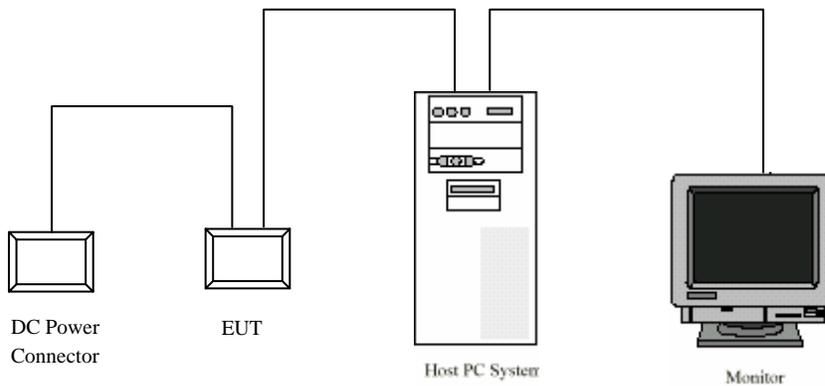
Configuration of Test Setup**Charging mode:****Transmitting mode:**

Block Diagram of Test Setup

Charging mode:

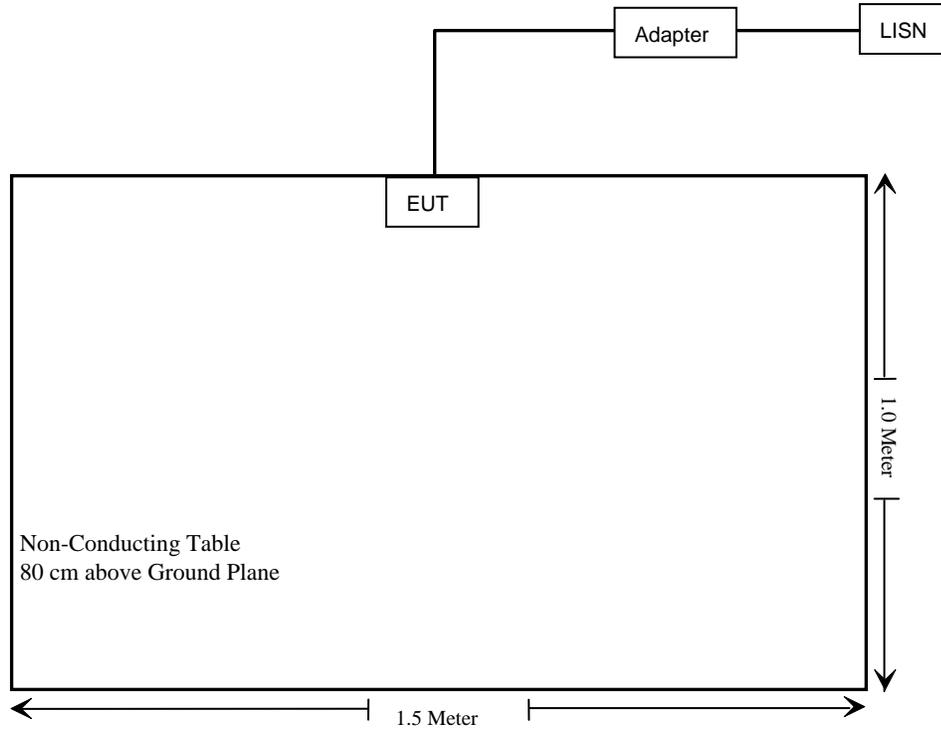

Transmitting mode:

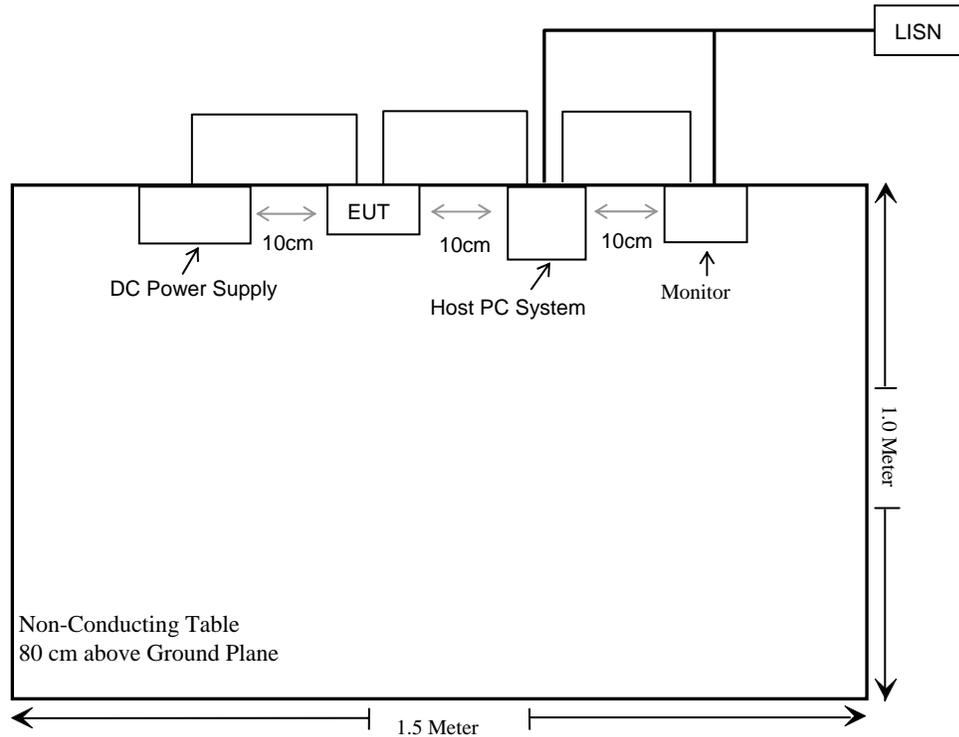

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i) & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.109, §15.205, §15.209, §15.247(d)	Radiated Emission	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges testing	Compliant

§15.247 (i) & §2.1093 - RF EXPOSURE

Standard Applicable

According to § 1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to FCC Exclusion list, In the following table, fGHz is mid-band frequency in GHz, and d is the distance to a person's body, excluding hands, wrists, feet, and ankles.

Exposure category	<u>low threshold</u>	<u>high threshold</u>
general population	$(60/f_{\text{GHz}})$ mW, $d < 2.5$ cm $(120/f_{\text{GHz}})$ mW, $d \geq 2.5$ cm	$(900/f_{\text{GHz}})$ mW, $d < 20$ cm
occupational	$(375/f_{\text{GHz}})$ mW, $d < 2.5$ cm $(900/f_{\text{GHz}})$ mW, $d \geq 2.5$ cm	$(2250/f_{\text{GHz}})$ mW, $d < 20$ cm

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

Measurement Result:

This is a portable device and the Max peak output power is $2.62 \text{ mW} < 24.98 \text{ mW} = (60/2.441 \text{ GHz}) \text{ mW}$

The SAR measurement is not necessary.

§15.203 - ANTENNA REQUIREMENT

Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connector Construction

The EUT has a component antenna permanently attached to the PCB, which, in accordance to the above sections, is considered sufficient to comply with the provisions of these sections. Please see EUT photo for details.


§15.207 (a) - CONDUCTED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp.(Shenzhen) is ± 2.4 dB.

EUT Setup

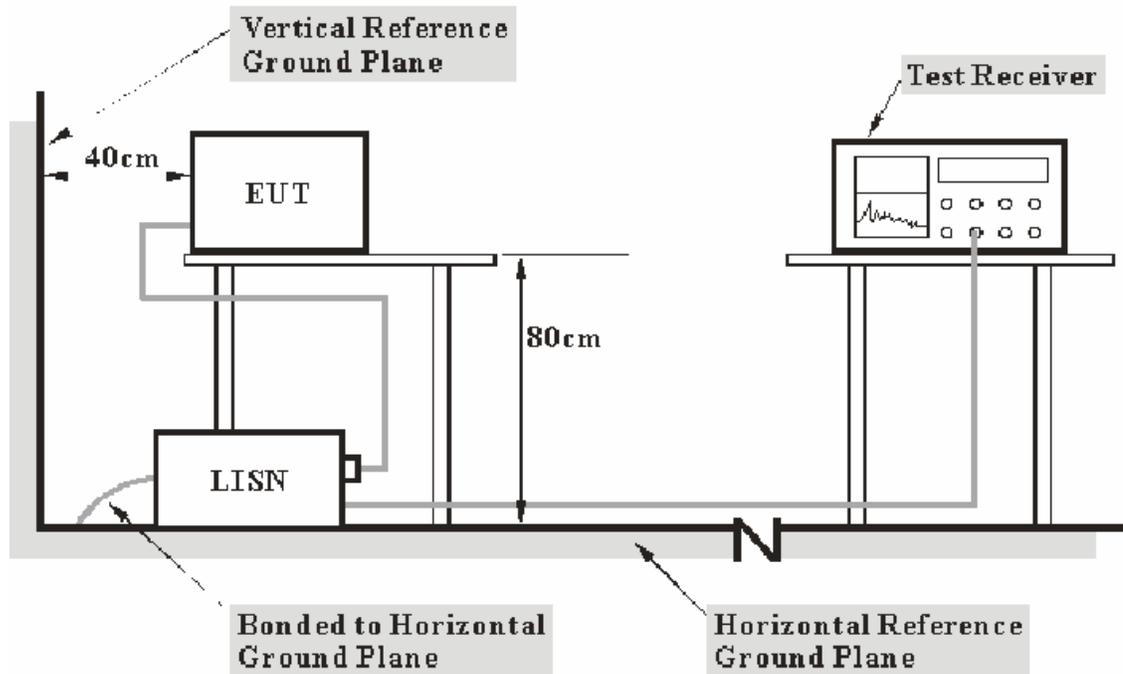

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF B/W</i>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Com-Power	L.I.S.N.	LI-200	12005	N/A	N/A
Com-Power	L.I.S.N.	LI-200	12008	N/A	N/A
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-09-29	2008-09-29
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2007-03-26	2008-03-26

* Com-Power's LISN were used as the supporting equipment.

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp.(Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

7.20 dB at 28.745 MHz in the **Live** conductor mode

Test Data**Environmental Conditions**

Temperature:	22 °C
Relative Humidity:	55 %
ATM Pressure:	100.0 kPa

The testing was performed by Danny Dong on 2007-06-26.

Test Mode: Charging

Line Conducted Emissions				FCC PART 15.207	
Frequency (MHz)	Amplitude (dB μ V)	Detector (QP/AV)	Phase (Live/Neutral)	Limit (dB μ V)	Margin (dB)
28.745	48.80	QP	Live	56.00	7.20
0.350	49.00	QP	Neutral	58.96	9.96
0.490	45.70	QP	Neutral	56.17	10.47
0.665	31.80	AV	Live	46.00	14.20
0.560	31.20	AV	Live	46.00	14.80
0.985	40.70	QP	Neutral	56.00	15.30
0.560	40.50	QP	Live	56.00	15.50
0.305	43.60	QP	Live	60.11	16.51
0.305	31.50	AV	Live	50.11	18.61
0.350	29.70	AV	Neutral	48.96	19.26
0.665	35.00	QP	Live	56.00	21.00
0.490	24.70	AV	Neutral	46.17	21.47
1.030	33.40	QP	Neutral	56.00	22.60
24.720	36.20	QP	Neutral	60.00	23.80
1.550	31.10	QP	Neutral	56.00	24.90
2.390	30.80	QP	Live	56.00	25.20
2.195	30.60	QP	Live	56.00	25.40
2.195	20.60	AV	Live	46.00	25.40
2.395	20.50	AV	Live	46.00	25.50
0.995	20.20	AV	Neutral	46.00	25.80
1.025	16.90	AV	Neutral	46.00	29.10
0.545	11.60	AV	Neutral	46.00	34.40
28.785	14.90	AV	Live	50.00	35.10
24.835	10.70	AV	Neutral	50.00	39.30


Plot(s) of Test Data

Plot(s) of Test Data is presented hereinafter as reference.

conducted emission test
FCC Part15

21. Nov 07 15:00

EUT: Bluetooth wireless headset M/N: BHS-802
Manuf: Iqua
Op Cond: CHARGING
Operator: Danny
Test Spec: AC 120/60HZ L
Comment: Temp: 25 Humi 56%

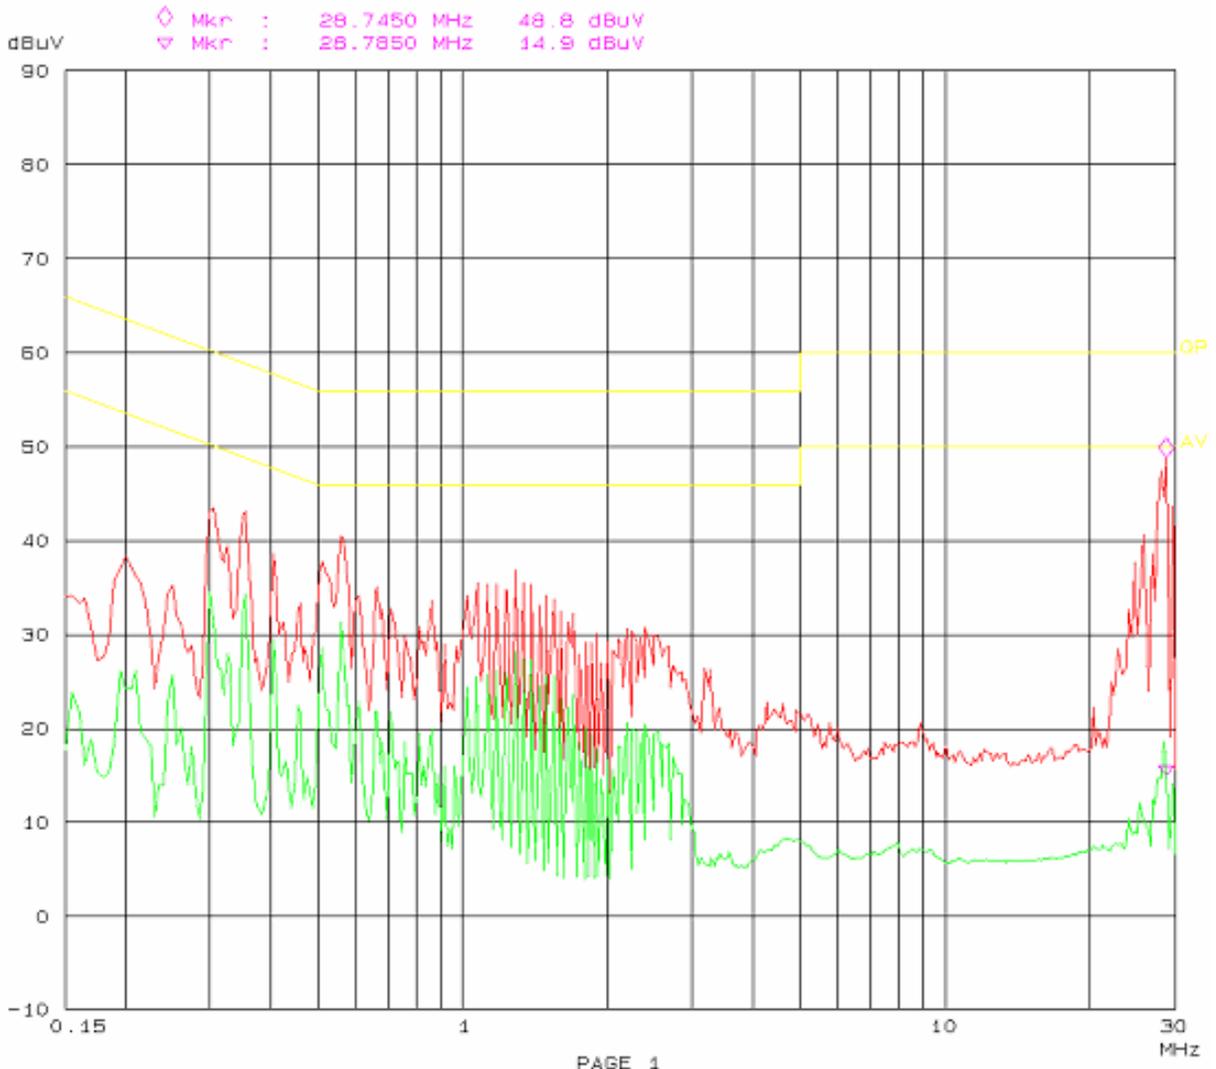


PAGE 1

Conducted Emission Test FCC Part15

21. Nov 07 14:35

EUT: Bluetooth wireless headset M/N: BHS-802
Manuf: Iqua
Op Cond: CHARGING
Operator: Danny
Test Spec: AC 120/60HZ N
Comment: Temp: 25 Humi 56%

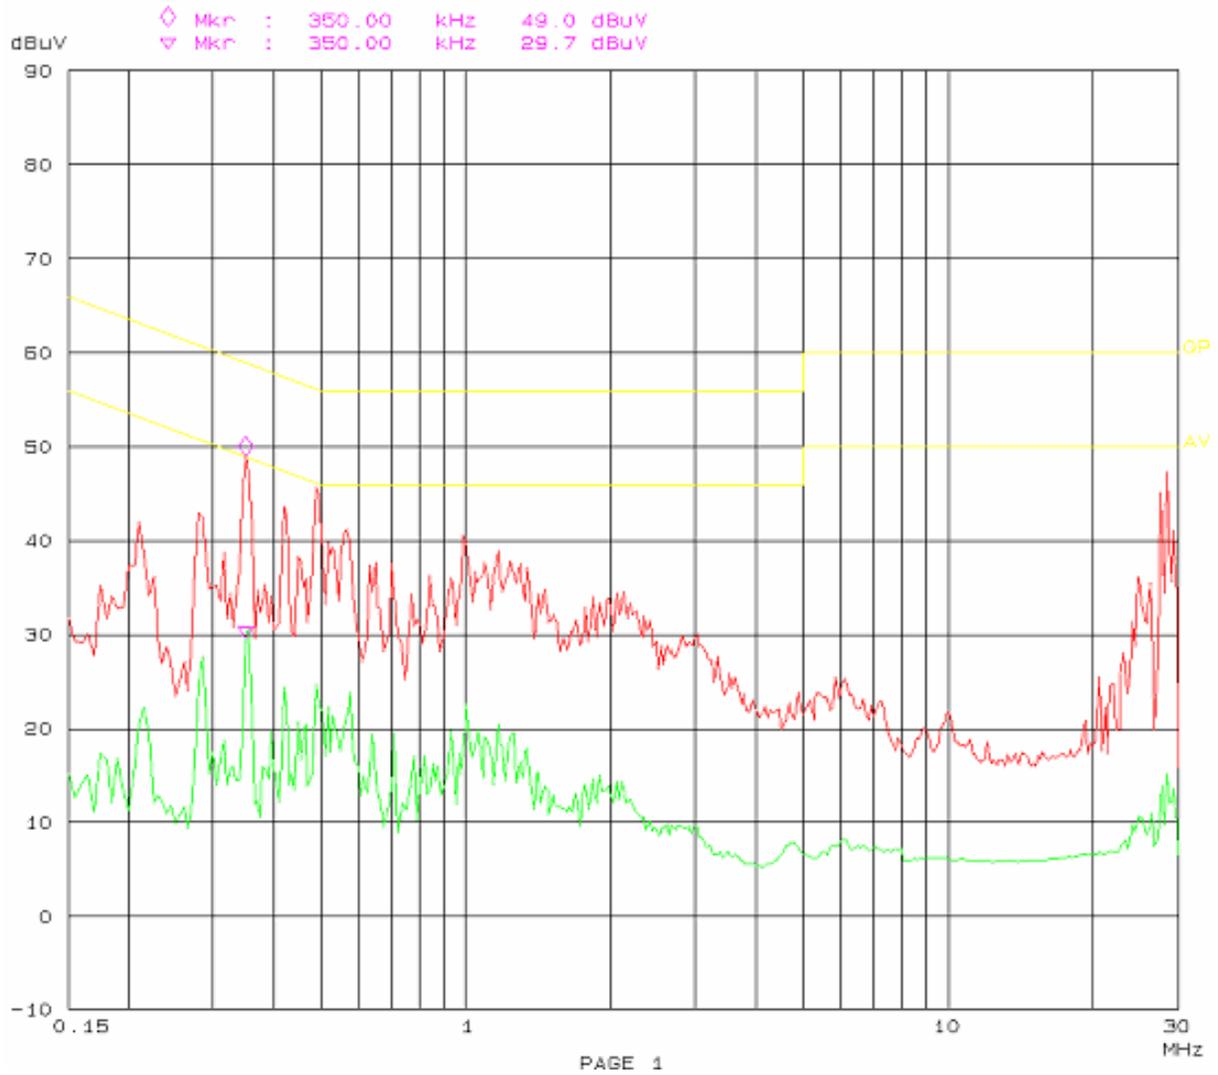

§15.109, §15.205, §15.209, §15.247 - RADIATED EMISSIONS

Applicable Standard


According to FCC §15.247 (d)

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp.(Shenzhen) is ± 4.0 dB.

EUT Setup

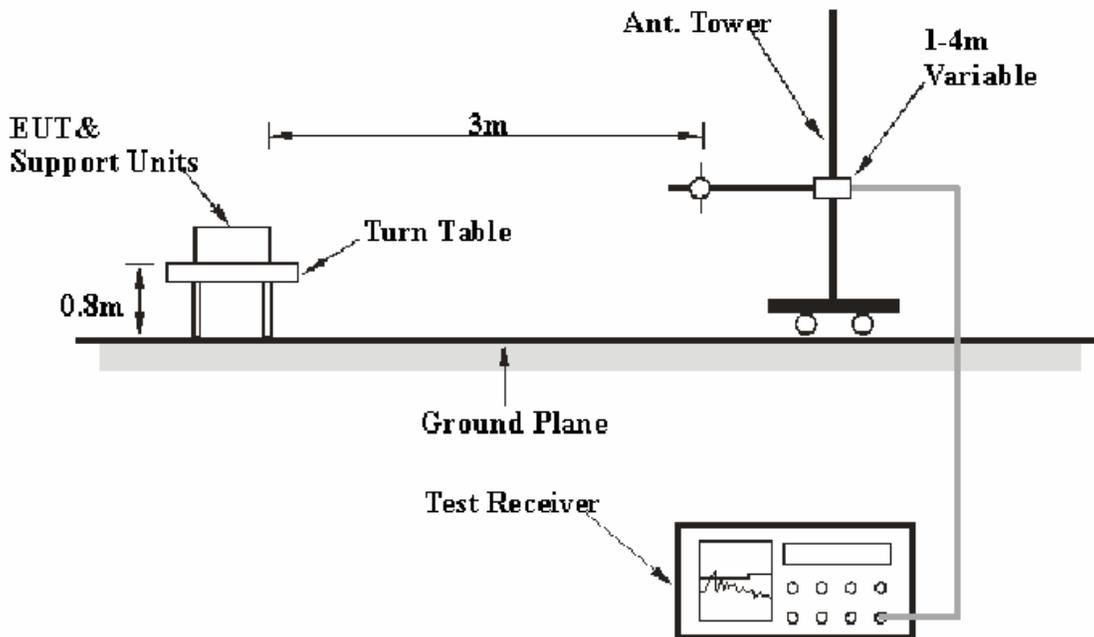

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.109, FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The host PC was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>
30MHz – 1000 MHz	100 kHz	300 kHz
1000 MHz – 25 GHz	1 MHz	3 MHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2006-11-15	2007-11-15
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-09-29	2008-09-29
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2007-08-14	2008-08-14
HP	Amplifier	8449B	3008A00277	2007-09-29	2008-09-29
Sunol Sciences	Horn Antenna	DRH-118	A052604	2007-09-25	2008-09-25
Agilent	Spectrum Analyzer	8564E	3943A01781	2006-11-22	2007-11-22

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp.(Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the host PC was connected to the outlet of the first LISN, and all other support equipment power cords were connected to the outlet of the second LISN.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the PK&AV detection mode.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.109, 15.205, 15.209, and 15.247, with the worst margin reading of:

Transmitting mode: 7.3 dB at 450.268550 MHz in the Vertical polarization, for up to 1 GHz
Transmitting mode: 2.70 dB at 4804 MHz in the Vertical polarization, for above 1 GHz (Low Channel)
Transmitting mode: 3.00 dB at 4882 MHz in the Vertical polarization, for above 1 GHz (Middle Channel)
Transmitting mode: 8.25 dB at 4960 MHz in the Vertical polarization, for above 1 GHz (High Channel)


Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	52%
ATM Pressure:	100.9 kPa

The testing was performed by Andy Yan on 2007-11-19.

Test Mode: Transmitting 30-1000 MHz)

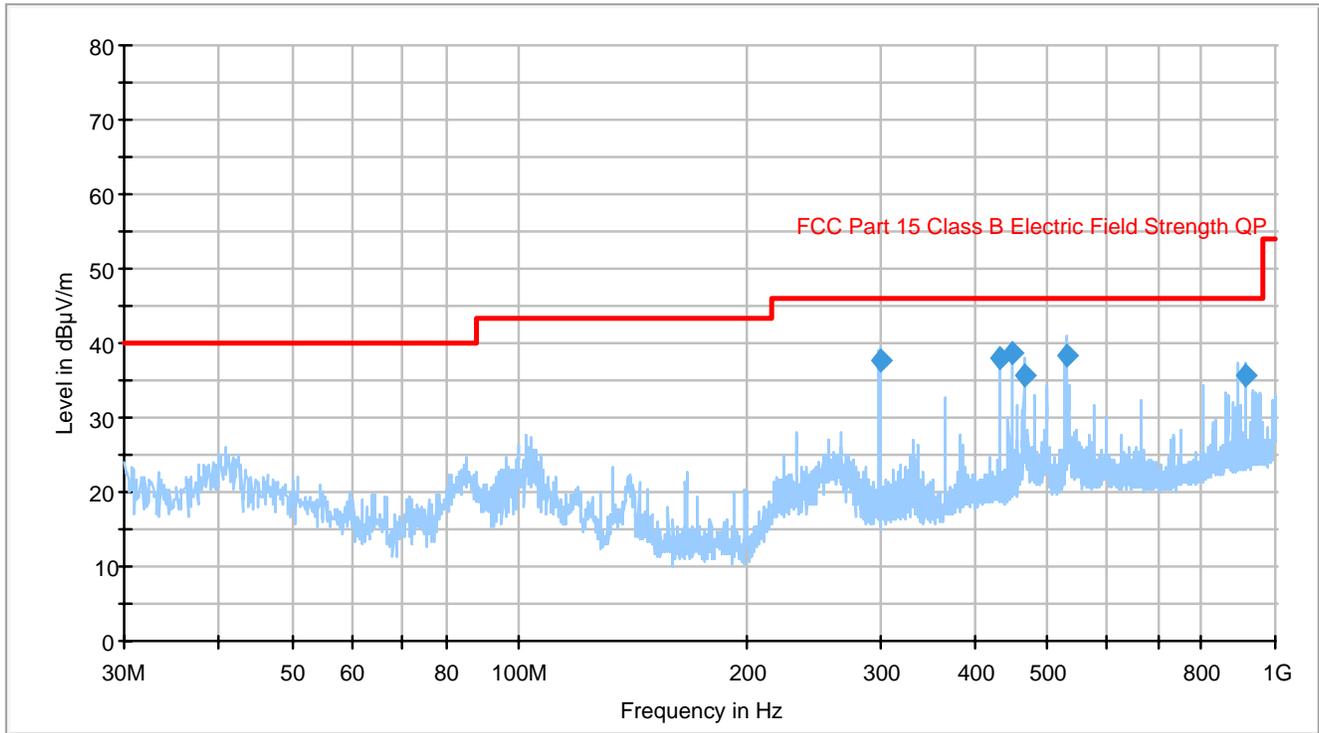

- FCC Part 15 Class B Electric Field Strength QP
- Preview Measurement Detector 1
- ◆ Final Measurement Detector 1

Frequency (MHz)	Corrected Amp. (dBµV/m)	Antenna Height (cm)	Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
450.268550	38.7	102.0	V	343.0	-7.7	46.0	7.3
528.064925	38.3	157.0	H	5.0	-7.2	46.0	7.7
432.040700	38.1	102.0	V	211.0	-7.9	46.0	7.9
299.777125	37.6	102.0	H	203.0	-10.7	46.0	8.4
911.602975	35.7	254.0	H	207.0	-1.9	46.0	10.3
466.476625	35.6	152.0	H	197.0	-7.3	46.0	10.4

Test Mode: Transmitting (Above 1 GHz)

Freq. (MHz)	Receiver Reading (dBuV)	Detector (PK/AV)	Direction Degree	Antenna			Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBuV/m)	FCC Part 15.247/209		
				Height (m)	Polar (H/V)	Factor (dB/m)				Limit (dBuV/m)	Margin (dB)	Remarks
Low Channel												
2402	90.5	PK	90	1	H	30.6	3.61	35.0	89.71			Fund.
2402	83.78	AV	45	1.0	H	30.6	3.61	35.0	82.99			Fund.
2402	96.00	PK	90	1.0	V	30.6	3.61	35.0	95.21			Fund.
2402	89.15	AV	45	1.0	V	30.6	3.61	35.0	88.36			Fund.
4804	44.66	AV	90	1.0	V	35.4	4.64	33.4	51.30	54	2.70	Harmonic
4804	41.59	AV	90	1.0	H	36.6	4.64	33.4	49.43	54	4.57	Harmonic
4804	52.69	PK	180	1.2	V	35.4	4.64	33.4	59.33	74	14.67	Harmonic
4804	49.57	PK	180	1.2	H	36.6	4.64	33.4	57.41	74	16.59	Harmonic
1601	41.98	AV	180	1.2	V	26.0	2.77	35.0	35.75	54	18.25	Spurious
1354	44.12	AV	90	1.0	V	23.8	2.79	35.2	35.51	54	18.49	Spurious
1601	41.10	AV	180	1.2	H	26.5	2.77	35.0	35.37	54	18.63	Spurious
1229	53.20	PK	45	1.2	H	26.5	2.50	36.0	46.20	74	27.80	Spurious
1601	50.32	PK	45	1.2	H	26.5	2.77	35.0	44.59	74	29.41	Spurious
1601	50.75	PK	45	1.2	V	26.0	2.77	35.0	44.52	74	29.48	Spurious
1354	52.37	PK	180	1.2	V	23.8	2.79	35.2	43.76	74	30.24	Spurious
1229	42.08	AV	45	1.2	H	26.5	2.50	36.0	35.08	74	38.92	Spurious
Middle Channel												
2441	91.54	PK	60	1.4	H	30.6	3.61	35.0	90.75			Fund.
2441	87.42	AV	152	1.3	H	30.6	3.61	35.0	86.63			Fund.
2441	97.43	PK	128	1.5	V	30.6	3.61	35.0	96.64			Fund.
2441	94.58	AV	156	1.2	V	30.6	3.61	35.0	93.79			Fund.
4882	43.16	AV	243	1.4	V	36.6	4.64	33.4	51.00	54	3.00	Harmonic
4882	40.77	AV	142	1.6	H	35.4	4.64	33.4	47.41	54	6.59	Harmonic
4882	51.78	PK	153	1.5	V	36.6	4.64	33.4	59.62	74	14.38	Harmonic
4882	50.02	PK	234	1.8	H	35.4	4.64	33.4	56.66	74	17.34	Harmonic
1627	39.36	AV	85	1.5	V	26.5	2.77	35.4	33.23	54	20.77	Spurious
1247	38.96	AV	135	1.3	H	26.0	2.50	35.6	31.86	54	22.14	Spurious
1354	51.49	PK	265	1.4	V	26.5	2.79	35.6	45.18	74	28.82	Spurious
1247	51.37	PK	156	1.4	H	26.0	2.50	35.6	44.27	74	29.73	Spurious
High Channel												
2480	92.76	PK	89	1.5	H	30.6	3.61	35.0	91.97			Fund.
2480	91.12	AV	65	1.5	H	30.6	3.61	35.0	90.33			Fund.
2480	97.51	PK	65	1.4	V	30.6	3.61	35.0	96.72			Fund.
2480	95.61	AV	65	1.6	V	30.6	3.61	35.0	94.82			Fund.
4960	39.20	AV	142	1.5	V	35.4	4.55	33.4	45.75	54	8.25	Harmonic
4960	35.49	AV	256	1.8	H	36.6	4.55	33.4	43.24	54	10.76	Harmonic
4960	49.60	PK	142	1.4	V	35.4	4.55	33.4	56.15	74	17.85	Harmonic
4960	46.02	PK	145	1.4	H	36.6	4.55	33.4	53.77	74	20.23	Harmonic
1354	39.65	AV	210	1.2	V	26.0	2.79	35.6	32.84	54	21.16	Spurious
1229	38.60	AV	156	1.2	H	26.0	2.50	35.0	32.10	54	21.90	Spurious
1229	50.21	PK	128	1.5	H	26.0	2.50	35.0	43.71	74	30.29	Spurious
1354	50.22	PK	240	1.4	V	26.0	2.79	35.6	43.41	74	30.59	Spurious

Spurious emission in Restricted Band: (RBW=1MHz, VBW=3MHz)

Freq. (MHz)	Receiver Reading (dBuV)	Detector (PK/AV)	Direction Degree	Antenna			Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dBuV/m)	FCC Part 15.247/209	
				Height (m)	Polar (H/V)	Factor (dB/m)				Limit (dBuV/m)	Margin (dB)
2310 - 2390 MHz											
2369.77	41.98	PK	180	1.2	V	30.6	3.61	35	41.19	54	12.81
2335.21	41.12	PK	90	1.1	H	30.6	3.61	35	40.33	54	13.67
2341.02	40.96	PK	180	1.2	H	30.6	3.61	35	40.17	54	13.83
2349.16	40.25	PK	90	1.0	V	30.6	3.61	35	39.46	54	14.54
2483.5 - 2500 MHz											
2488.70	41.02	PK	153	1.5	H	30.6	3.61	35	40.23	54	13.77
2483.20	40.95	PK	243	1.4	H	30.6	3.61	35	40.16	54	13.84
2486.64	41.53	PK	156	1.4	V	30.6	3.61	35	40.74	54	13.26
2497.41	41.23	PK	234	1.8	V	30.6	3.61	35	40.44	54	13.56

Note: Above PEAK measured spurious emission values are complied with the average limit (54 dBuV/m), thus average measurement has been omitted.

§15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-09-29	2008-09-29

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp.(Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another truce
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Andy Yan on 2007-11-22.


Test mode: Transmitting

Channel	Channel Frequency (MHz)	Channel Separation (MHz)	Limit (KHz)
Low Channel	2402	1004	181
Adjacent Channel	2403		
Mid Channel	2441	1004	184
Adjacent Channel	2442		
High Channel	2480	1004	184
Adjacent Channel	2479		

Test Result: Pass

Please refer to following plots

Low Channel

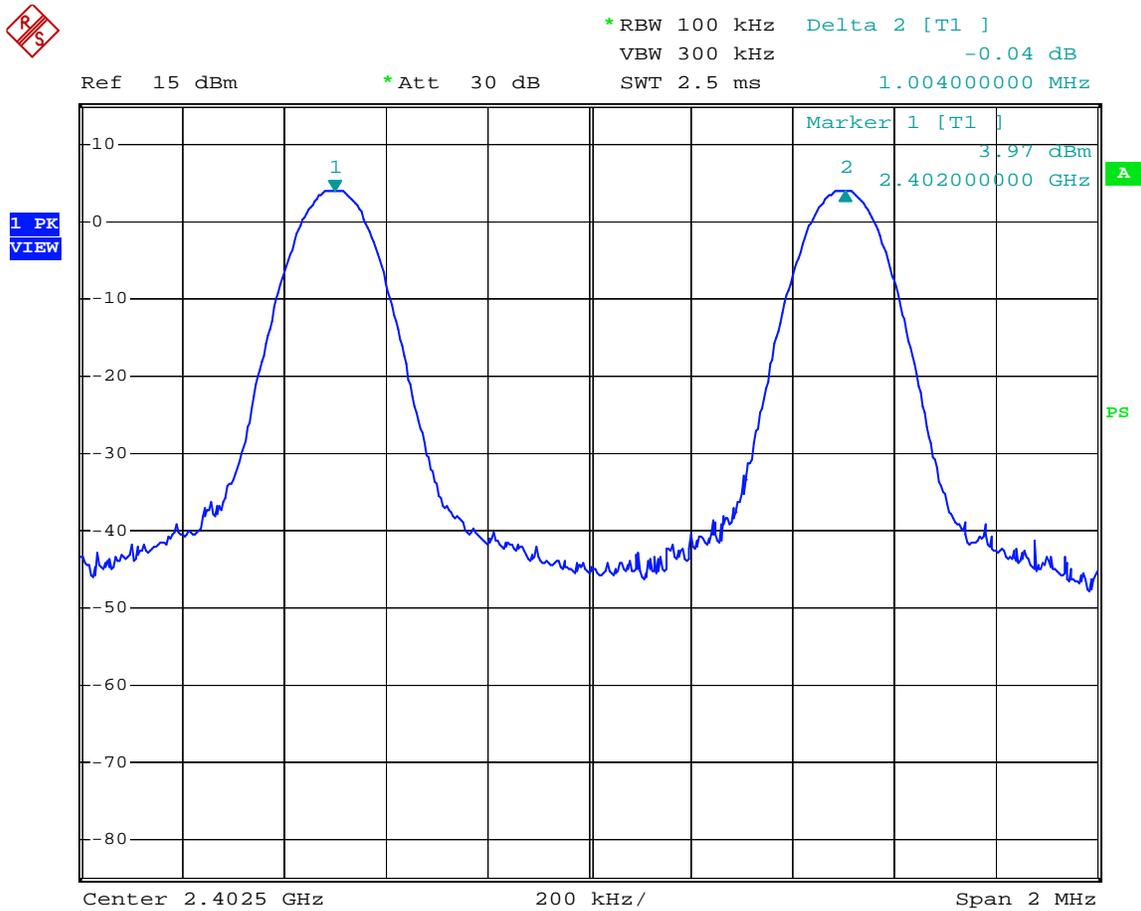

channel separation low

Date: 22.NOV.2007 14:37:52

Middle Channel




*RBW 100 kHz Delta 2 [T1]
VBW 300 kHz -0.02 dB
SWT 2.5 ms 1.004000000 MHz

Ref 15 dBm

*Att 30 dB

1 PK
VIEW

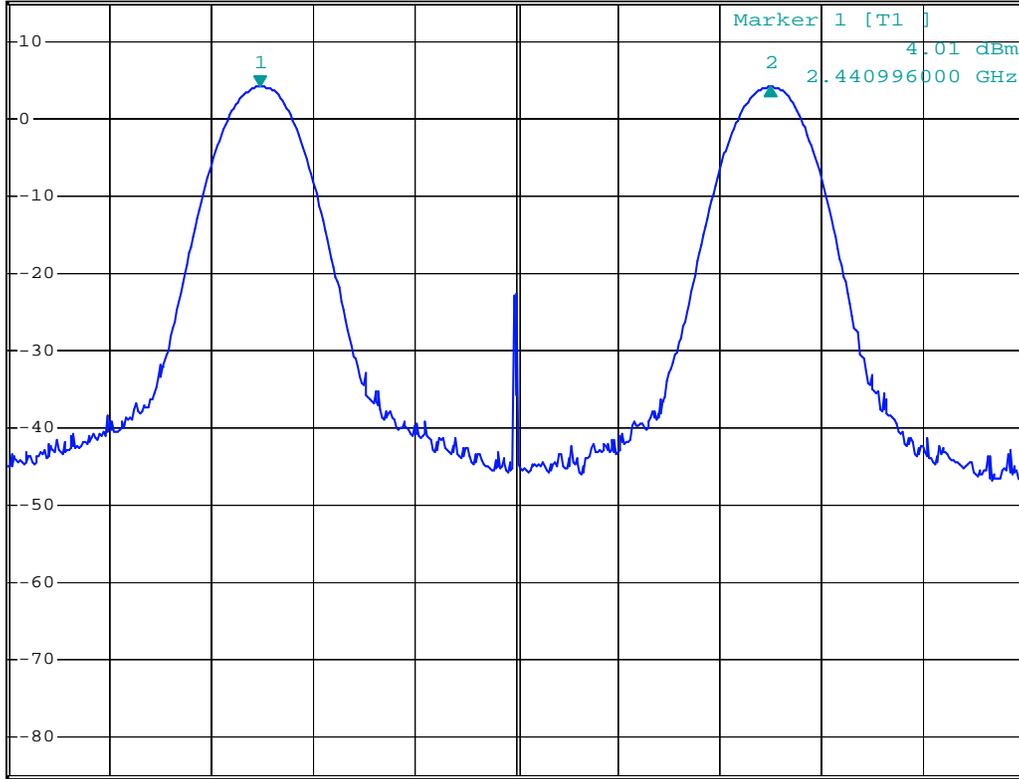

Center 2.4415 GHz

200 kHz/

Span 2 MHz

channel separation middle

Date: 22.NOV.2007 14:38:51

High Channel




*RBW 100 kHz Delta 2 [T1]
VBW 300 kHz -0.05 dB
SWT 2.5 ms 1.004000000 MHz

Ref 15 dBm

*Att 30 dB

1 PK
VIEW

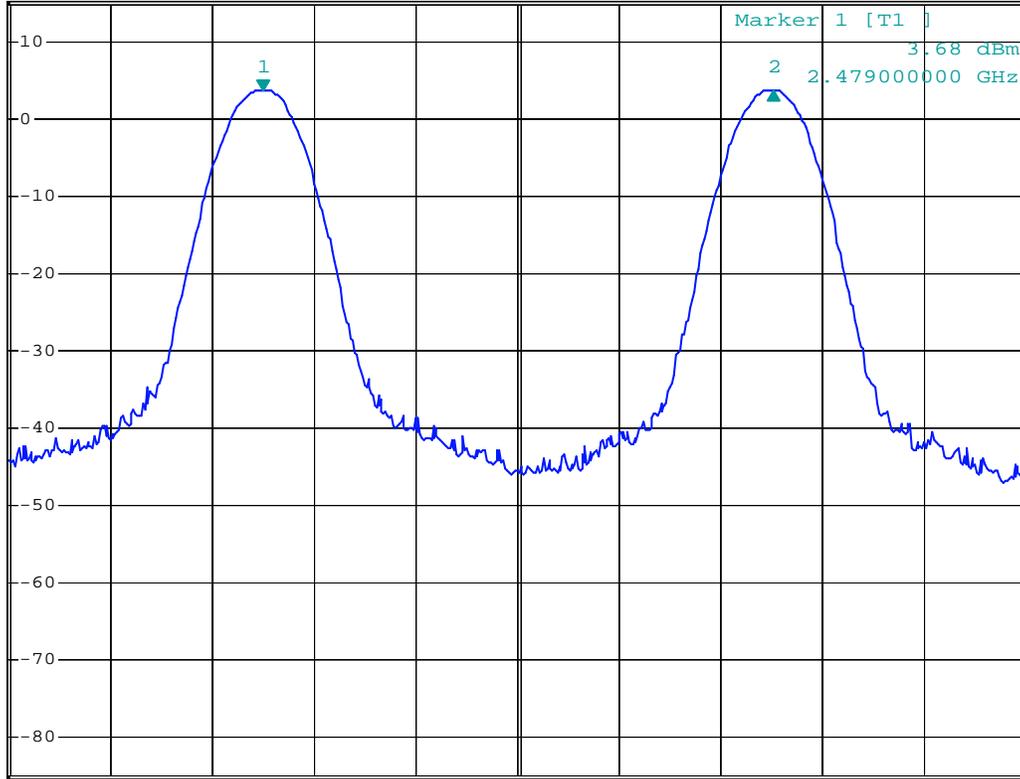

Center 2.4795 GHz

200 kHz/

Span 2 MHz

channel separation high

Date: 22.NOV.2007 14:40:08

§15.247(a) (1) – 20dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-09-29	2008-09-29

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp.(Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53 %
ATM Pressure:	100.9 kPa

The testing was performed by Andy Yan on 2007-11-22.

Test Mode: Transmitting

Channel	Channel Frequency (MHz)	20dB Bandwidth (kHz)
Low	2402	272
Mid	2441	276
High	2480	276

Middle Channel




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz 3.98 dBm
SWT 2.5 ms 2.441000000 GHz

Ref 15 dBm

*Att 30 dB

1 PK
MAXH

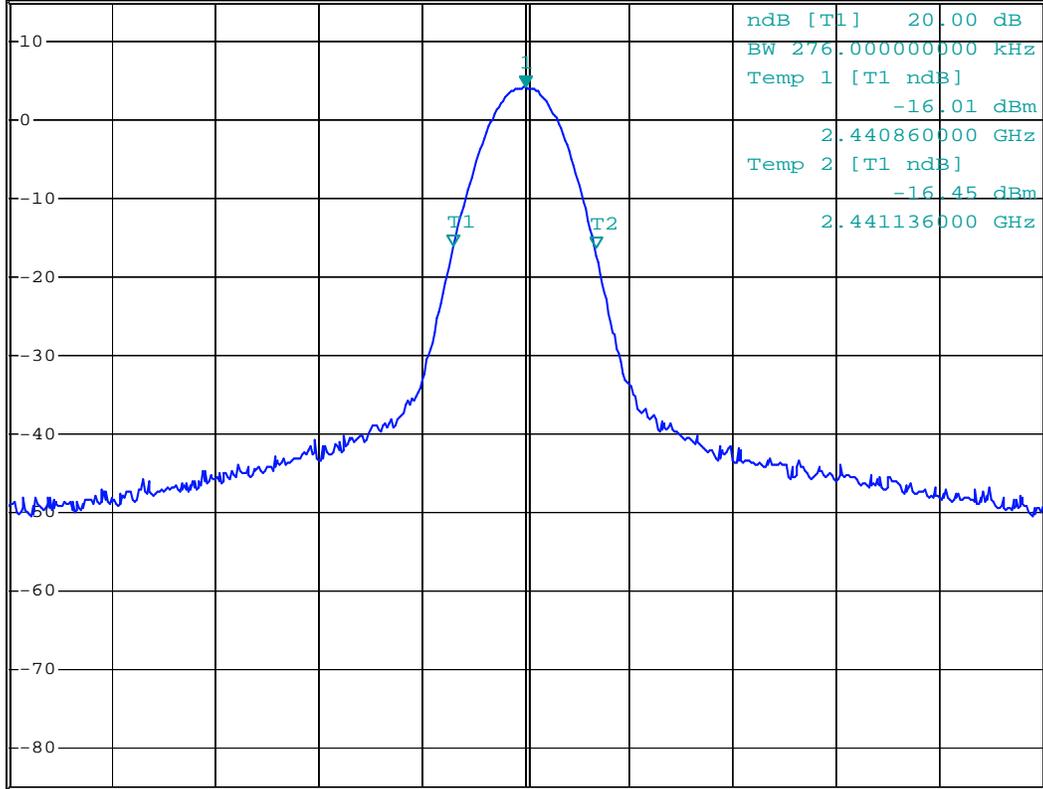

Center 2.441 GHz

200 kHz/

Span 2 MHz

20dB bandwidth middle

Date: 22.NOV.2007 14:32:36

High Channel




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz 3.63 dBm
SWT 2.5 ms 2.48000000 GHz

Ref 15 dBm

*Att 30 dB

1 PK
MAXH

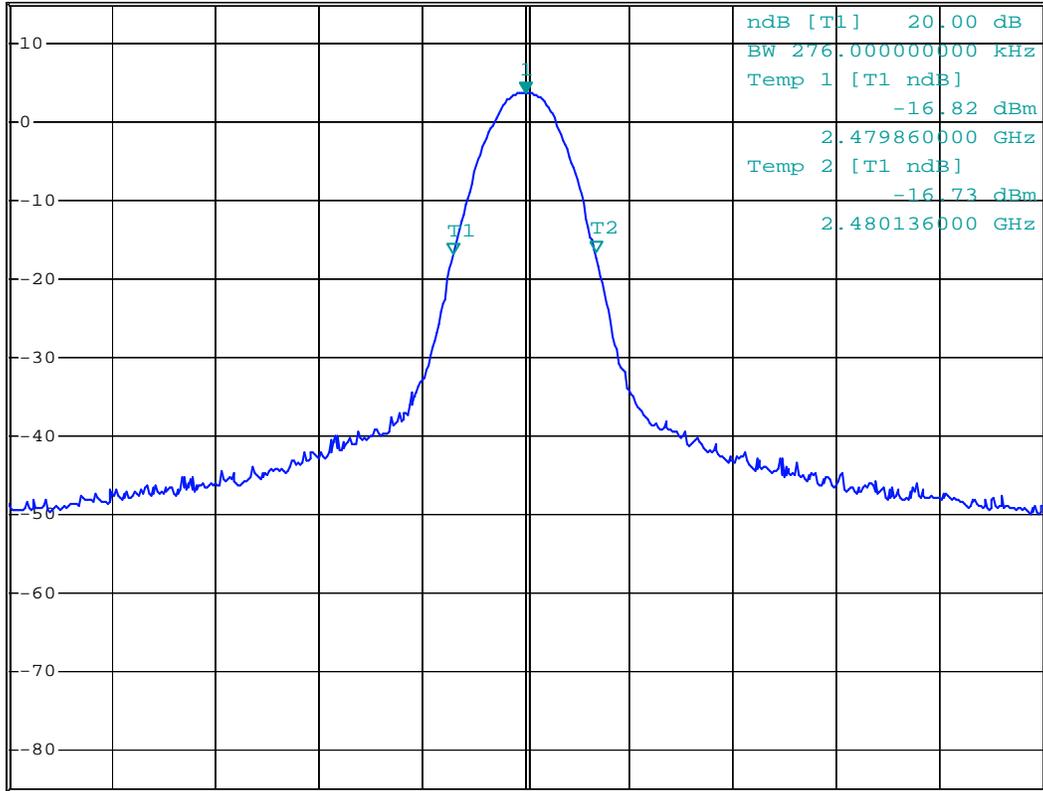

Center 2.48 GHz

200 kHz/

Span 2 MHz

20dB bandwidth high

Date: 22.NOV.2007 14:31:35

§15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-09-29	2008-09-29

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp.(Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in transmitting mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Andy Yan on 2007-11-22.

Test mode: Transmitting

Test Result: Pass.

Please refer to following plot

§15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-09-29	2008-09-29

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp.(Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels * 31.6s
Hop rate=1600/s

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Andy Yan on 2007-11-22.

Test mode: Transmitting


Test Result: Pass

Please refer to following tables and plots.

Channel	Pulse width (msec)	Dwell time (sec)	Limit (sec)	Result
Low	0.56	0.1792	0.4	Pass
Mid	0.56	0.1792	0.4	Pass
High	0.56	0.1792	0.4	Pass

NOTE: Dwell time= Pulse time*(1600/2/79)*31.6S

Low Channel

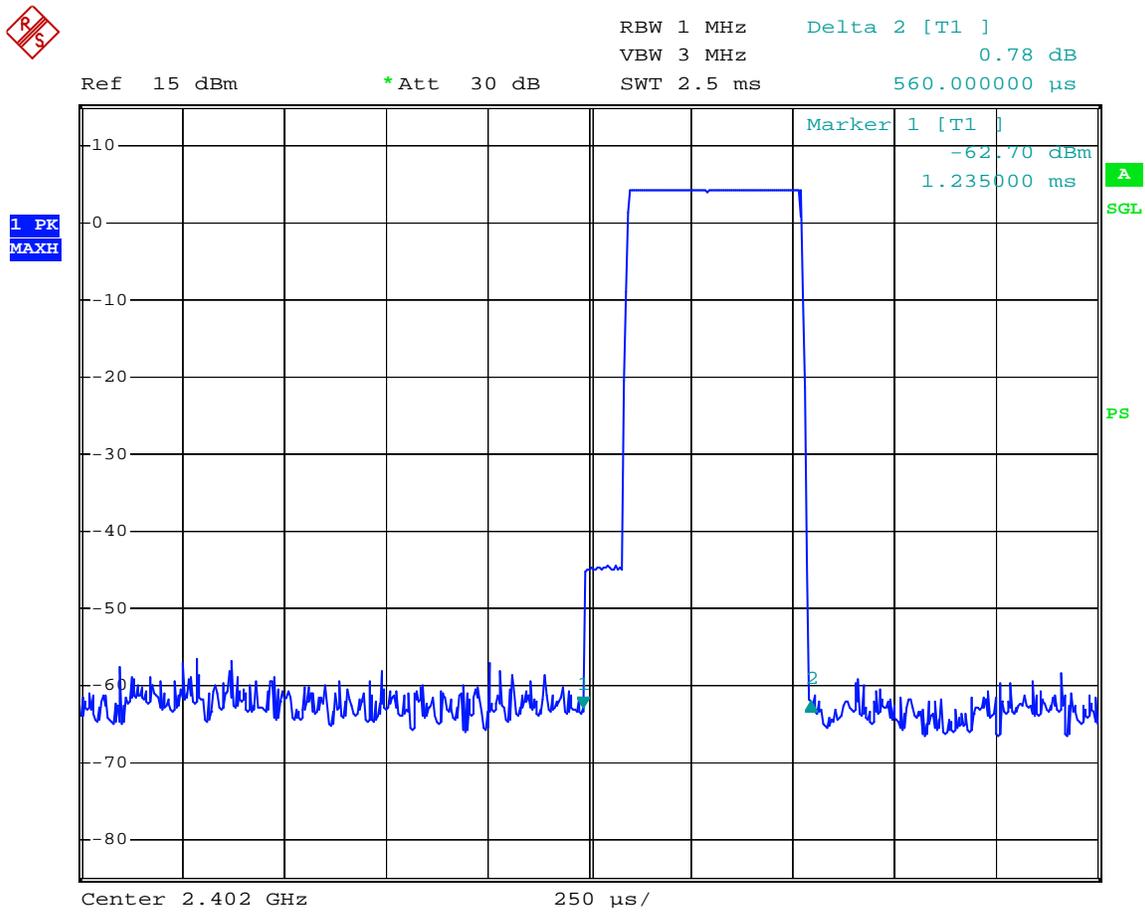


dwell time low

Date: 22.NOV.2007 14:28:16

Middle Channel



Ref 15 dBm *Att 30 dB RBW 1 MHz Delta 2 [T1]
VBW 3 MHz -0.68 dB
SWT 2.5 ms 560.000000 μs

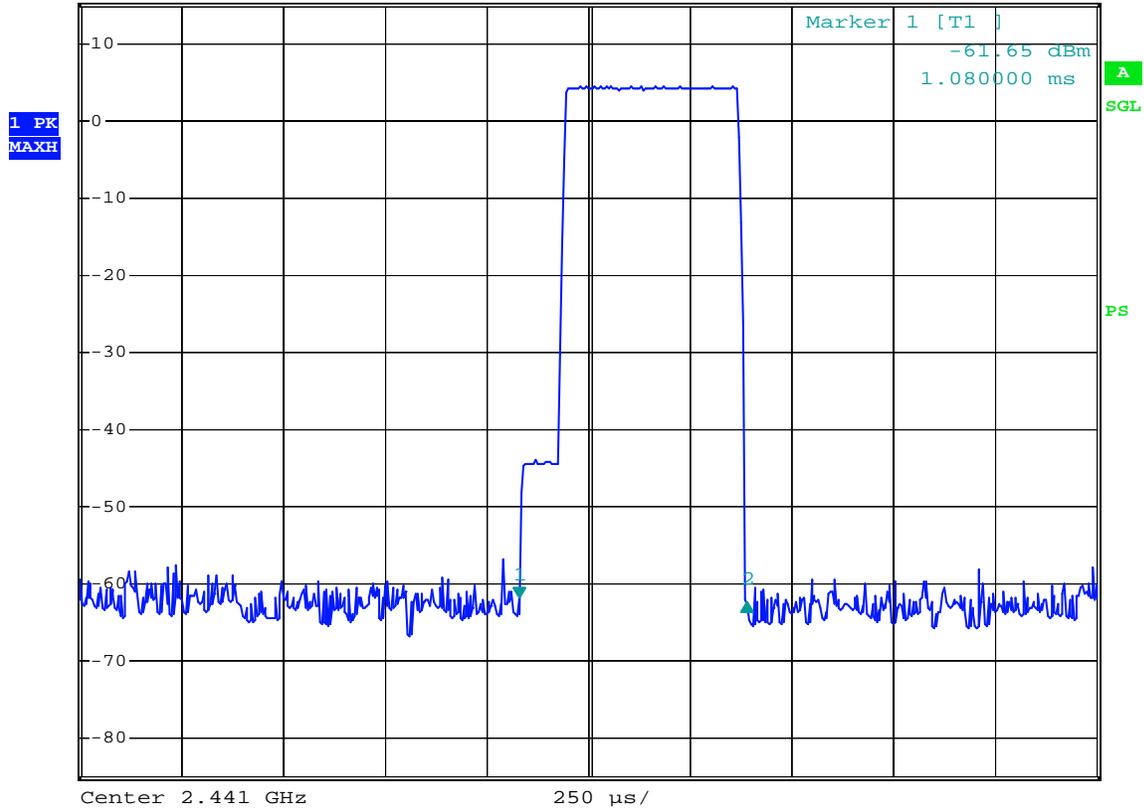

dwll time middle

Date: 22.NOV.2007 14:25:59

§15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-09-29	2008-09-29

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp.(Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Andy Yan on 2007-11-09.

Test Mode: Transmitting

Test Result: Pass.


Please refer to the following table and plots

Channel	Channel Frequency (MHz)	Power Output		Limit (w)
		(dBm)	(mw)	
Low	2402	4.13	2.588	1
Mid	2441	4.19	2.624	1
High	2480	3.73	2.360	1

Low Channel



Ref 15 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 4.13 dBm
 VBW 3 MHz 2.402020000 GHz
 SWT 2.5 ms

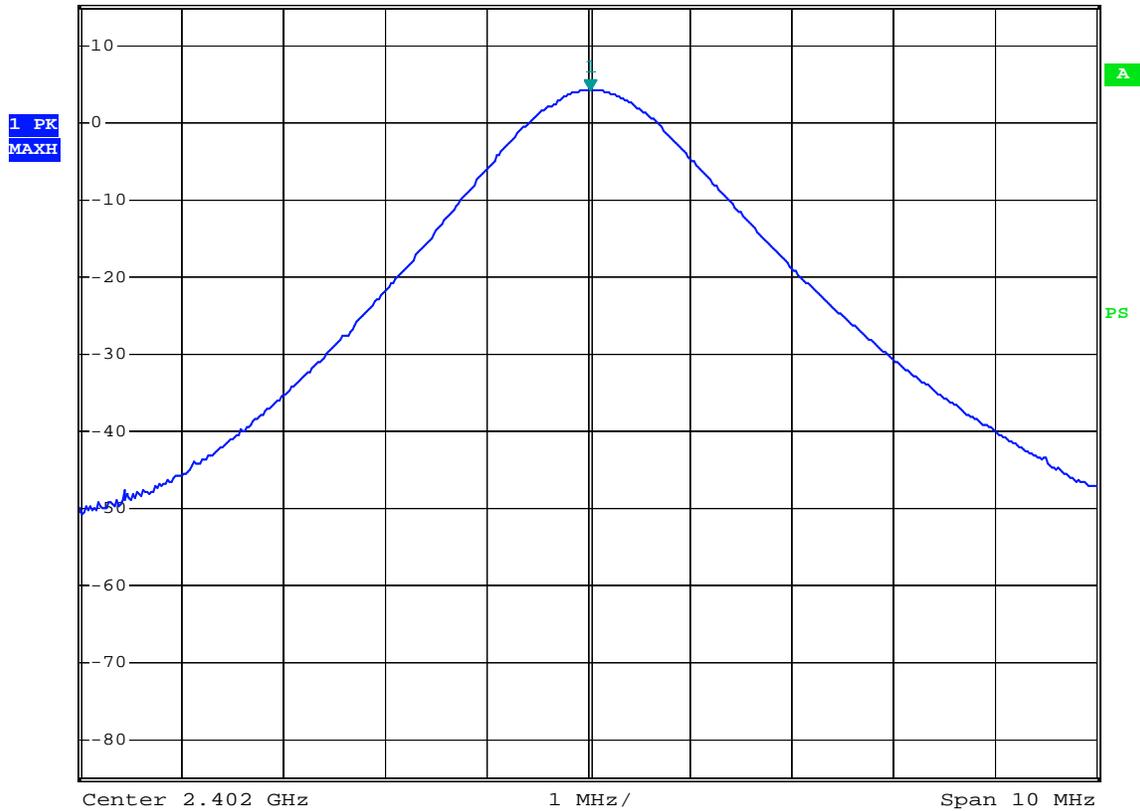

output power low

Date: 22.NOV.2007 14:20:20

Middle Channel




*RBW 1 MHz Marker 1 [T1]
VBW 3 MHz 4.19 dBm
SWT 2.5 ms 2.441000000 GHz

Ref 15 dBm

*Att 30 dB

1 PK
MAXH

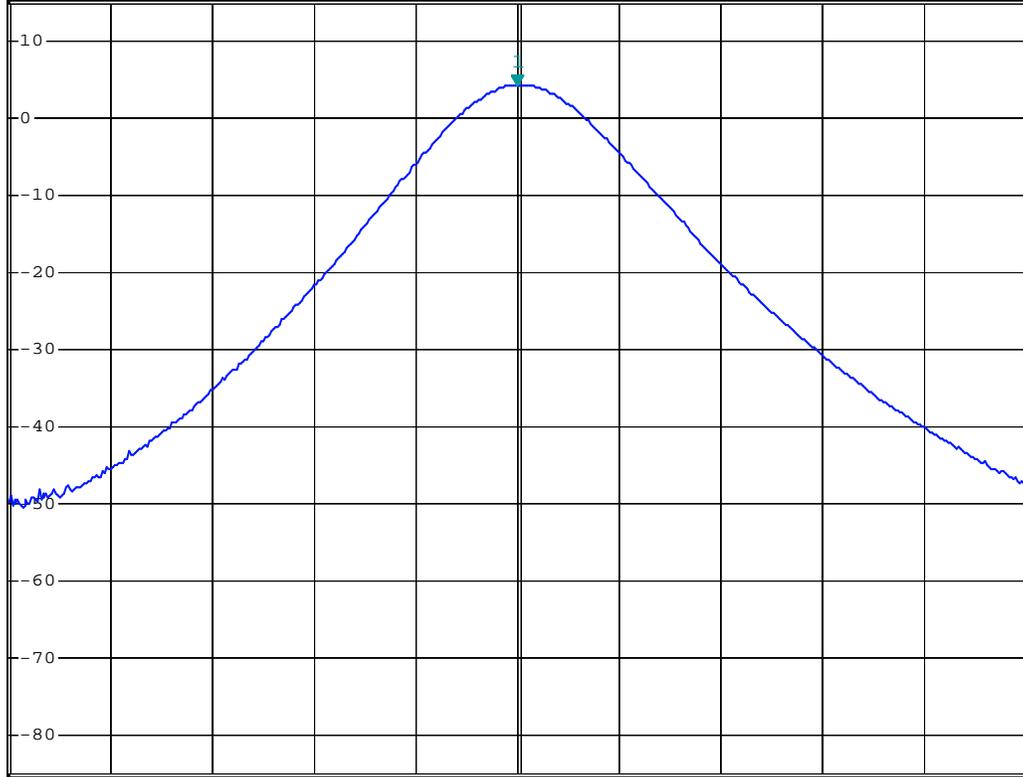

Center 2.441 GHz

1 MHz/

Span 10 MHz

output power middle

Date: 22.NOV.2007 14:22:15

High Channel




*RBW 1 MHz Marker 1 [T1]
VBW 3 MHz 3.73 dBm
SWT 2.5 ms 2.48000000 GHz

Ref 15 dBm

*Att 30 dB

1 PK
MAXH

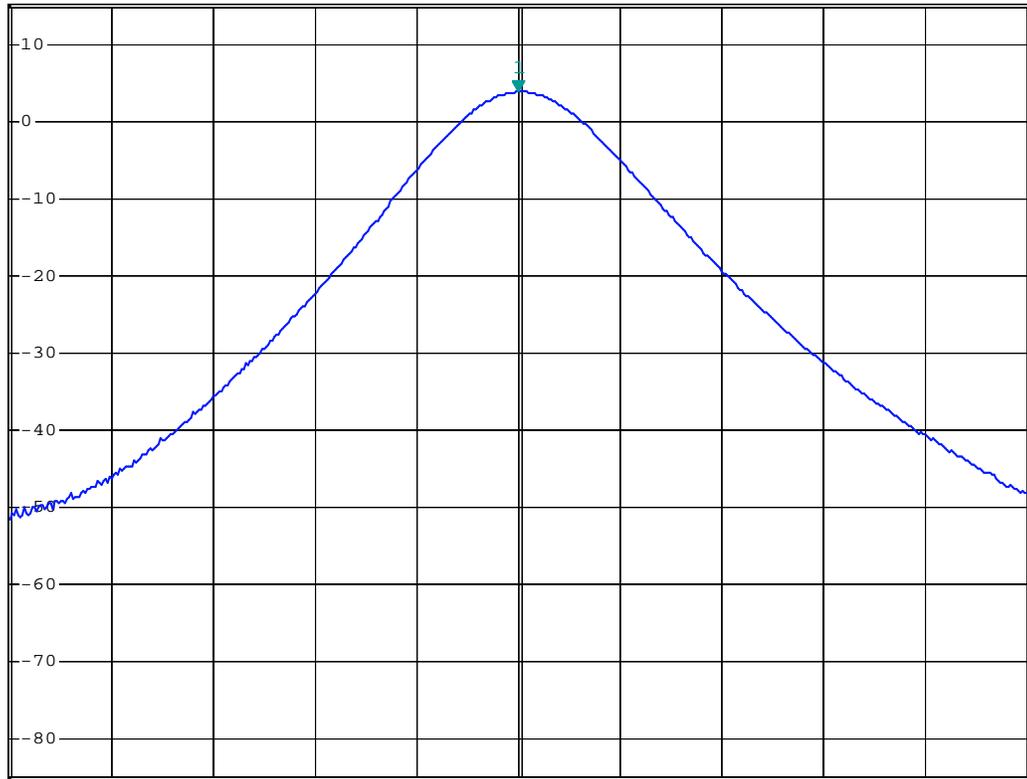

Center 2.48 GHz

1 MHz/

Span 10 MHz

output power high

Date: 22.NOV.2007 14:22:53

§15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-09-29	2008-09-29

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp.(Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Andy Yan on 2007-11-19.

Test Mode: Transmitting


Frequency (MHz)	Attenuation (dBc)	Limit (dBc)
2395.590	56.08	20
2496.052	53.24	20

Note: Attenuation = Highest Peak – Emission Level

Test Result: Pass

Please refer to the following plots

Low Band Edge

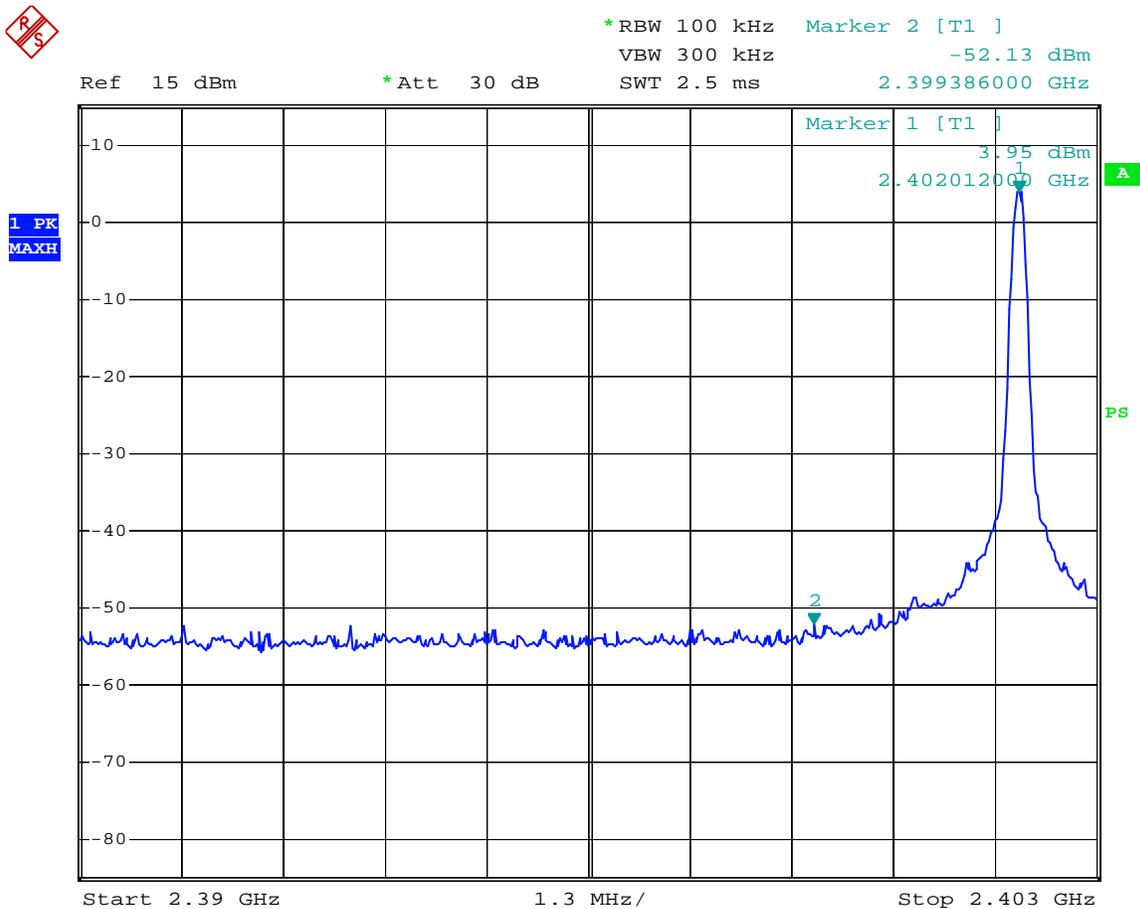

out of bandedge left

Date: 22.NOV.2007 14:46:51

High Band Edge




*RBW 100 kHz Marker 2 [T1]
VBW 300 kHz -49.47 dBm
SWT 2.5 ms 2.496010000 GHz

Ref 15 dBm

*Att 30 dB

1 PK
MAXH

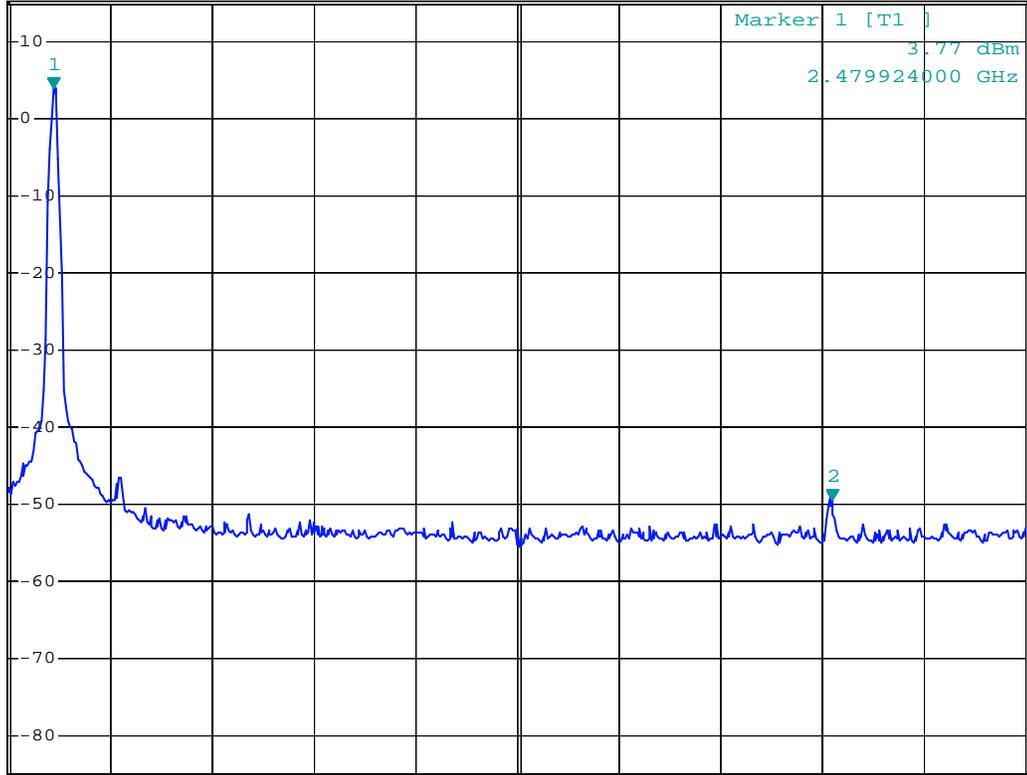

Start 2.479 GHz

2.1 MHz/

Stop 2.5 GHz

out of bandedge right

Date: 22.NOV.2007 14:44:36

***** END OF REPORT *****