

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM120800469301 Page: 1 of 70

# FCC REPORT

Application No:	SZEM1208004693RF
Applicant:	Savox communications Oy Ab
Manufacturer:	Savox communications Oy Ab
Product Name:	Professional Bluetooth Headset
Model No.(EUT):	BTH-101
FCC ID:	TUFBTH-101
Standards:	47 CFR Part 15, Subpart C (2011)
Date of Receipt:	2012-08-20
Date of Test:	2012-08-29 to 2012-09-10
Date of Issue:	2012-12-19
Test Result:	PASS *

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM120800469301 Page: 2 of 70

# 2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10 (2009)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS
Band Edge (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120800469301 Page: 3 of 70

### 3 Contents

1	СС	OVER PAGE	1
2	TE	EST SUMMARY	2
3		ONTENTS	
4		ENERAL INFORMATION	
	4.1	CLIENT INFORMATION	4
	4.2	GENERAL DESCRIPTION OF EUT	4
	4.3	TEST ENVIRONMENT	
	4.4	DESCRIPTION OF SUPPORT UNITS	6
	4.5	TEST LOCATION	6
	4.6	TEST FACILITY	
	4.7	DEVIATION FROM STANDARDS	
	4.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	4.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	4.10	Equipment List	8
5	TE	EST RESULTS AND MEASUREMENT DATA	
	5.1	ANTENNA REQUIREMENT	
	5.2	CONDUCTED PEAK OUTPUT POWER	
	5.3	20dB Occupy Bandwidth	
	5.4	CARRIER FREQUENCIES SEPARATION	
	5.5	HOPPING CHANNEL NUMBER	
	5.6	DWELL TIME	
	5.7	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	5.8	SPURIOUS RF CONDUCTED EMISSIONS	
	5.9	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	
	5.10	RADIATED SPURIOUS EMISSION	
	•.	10.1 Radiated Emission below 1GHz	
	5.	10.2 Transmitter Emission above 1GHz	
	5.11	BAND EDGE (RADIATED EMISSION)	61-70



Report No.: SZEM120800469301 Page: 4 of 70

# 4 General Information

#### 4.1 Client Information

Applicant:	Savox communications Oy Ab
Address of Applicant:	Sinikalliontie 3 B, 02630 Espoo, Finland
Manufacturer:	Savox communications Oy Ab
Address of Manufacturer:	Sinikalliontie 3 B, 02630 Espoo, Finland

### 4.2 General Description of EUT

Name:	Professional Bluetooth Headset
Model No.:	BTH-101
Trade Mark:	Savox
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	3.0
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Portable production
Test Power Grade:	255(manufacturer declare )
Test Software of EUT:	CSR BlueSuite(manufacturer declare)
Antenna Type	Integral
Antenna Gain	2.0dBi
Power Supply:	3.7V Recharge battery
Test Voltage:	3.7V

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120800469301 Page: 5 of 70

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120800469301 Page: 6 of 70

### 4.3 Test Environment

Operating Environment:	
Temperature:	24.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	1015mbar

### 4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
	DONGGUAN CITY YINGJU	
AC/DC adapter	ELECTRONICS CO., LTD	YJS005D-0500200U

#### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.



Report No.: SZEM120800469301 Page: 7 of 70

### 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

#### • FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

### 4.7 Deviation from Standards

None.

#### 4.8 Abnormalities from Standard Conditions

None.

#### 4.9 Other Information Requested by the Customer

None.



Report No.: SZEM120800469301 Page: 8 of 70

## 4.10 Equipment List

RE in Chamber					
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2013-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2013-05-17
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2013-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2013-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2013-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2013-05-17
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2013-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2013-05-59
10	Coaxial cable	SGS	N/A	SEL0189	2013-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2013-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2013-05-29
13	Band filter	Amindeon	82346	SEL0094	2013-05-17
14	Barometer	Chang Chun	DYM3	SEL0088	2013-05-24
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2013-05-17
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2013-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2013-06-04



Report No.: SZEM120800469301 Page: 9 of 70

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2013-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2013-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2013-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2013-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2013-05-24
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2013-05-17
8	Band filter	amideon	82346	SEL0094	2013-05-17
9	POWER METER	R & S	NRVS	SEL0144	2013-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2013-05-17
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2013-10-24

Note: The calibration interval is one year, all the instruments are valid.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120800469301 Page: 10 of 70

# 5 Test results and Measurement Data

#### 5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
-----------------------	--

#### 15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.0dBi.

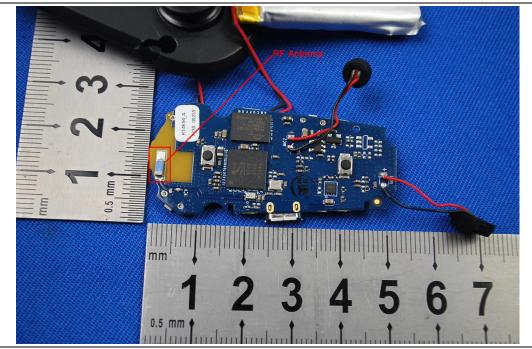



Report No.: SZEM120800469301 Page: 11 of 70

#### 5.2 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Limit:	30dBm		
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi$ /4DQPSK modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type.		
Instruments Used:	Refer to section 4.10 for details		
Test Results:	Pass		



Report No.: SZEM120800469301 Page: 12 of 70


GFSK mode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result	
Lowest	5.65	30.00	Pass	
Middle	3.20	30.00	Pass	
Highest	1.39	30.00	Pass	
	π/4DQPSK m	ode		
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result	
Lowest	3.94	30.00	Pass	
Middle	1.42	30.00	Pass	
Highest	-0.05	30.00	Pass	
	8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result	
Lowest	4.37	30.00	Pass	
Middle	1.84	30.00	Pass	
Highest	0.27	30.00	Pass	

#### Measurement Data






Report No.: SZEM120800469301 Page: 13 of 70

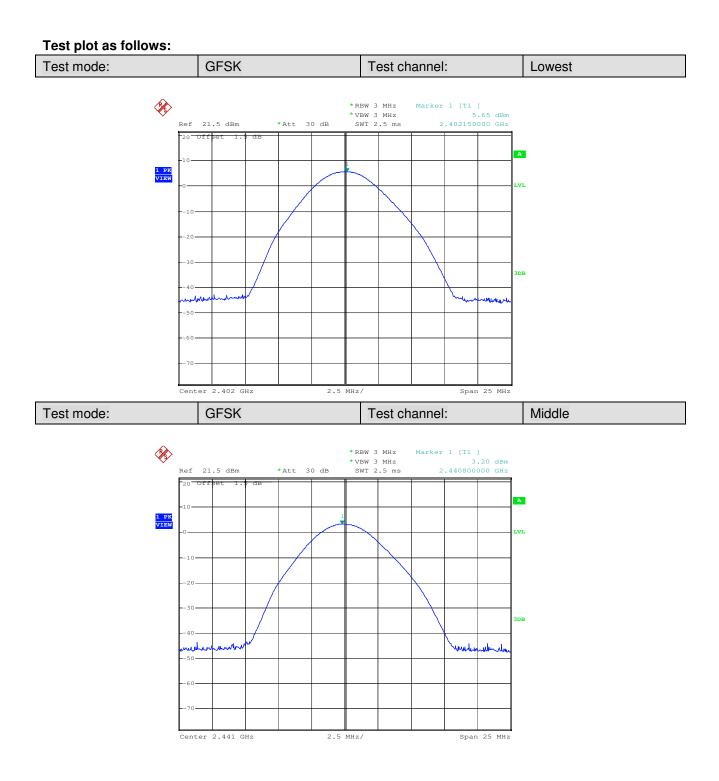




Report No.: SZEM120800469301 Page: 14 of 70

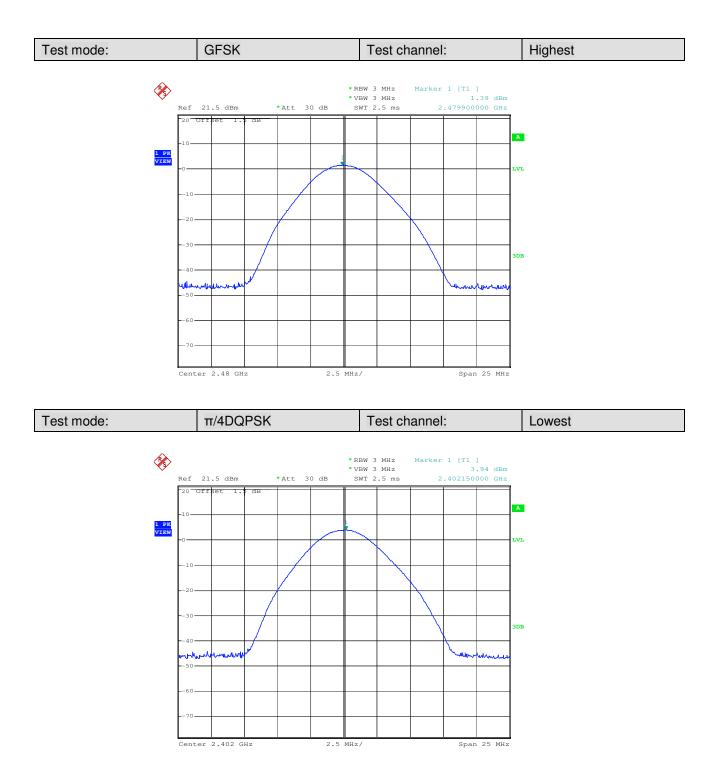




Report No.: SZEM120800469301 Page: 15 of 70

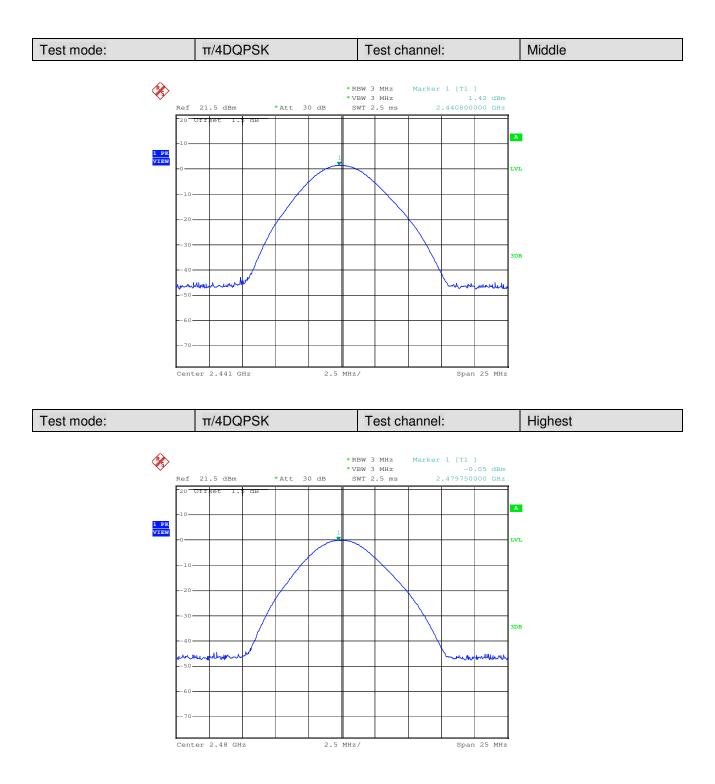




Report No.: SZEM120800469301 Page: 16 of 70

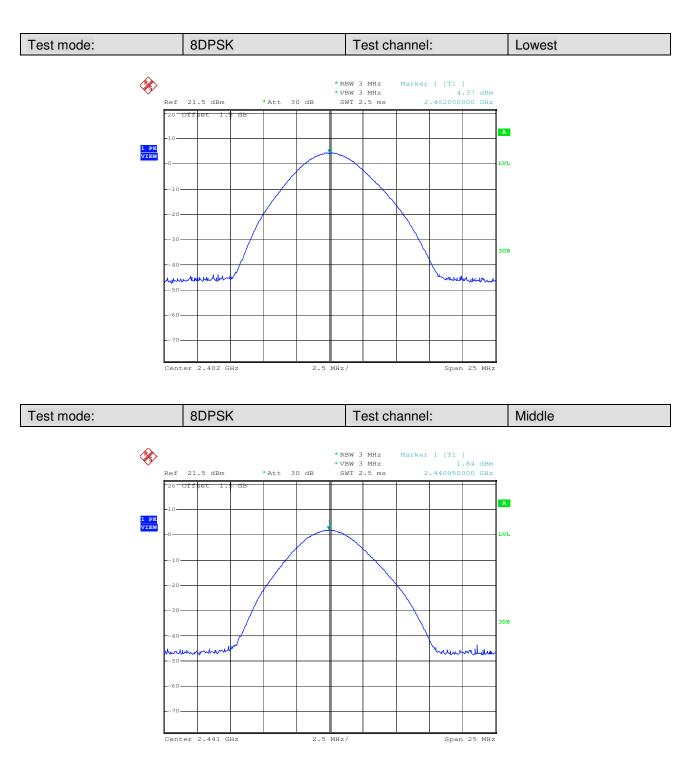



Report No.: SZEM120800469301 Page: 17 of 70

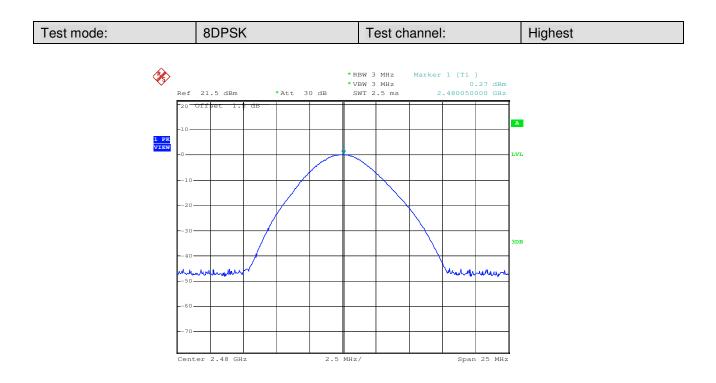



Report No.: SZEM120800469301 Page: 18 of 70

#### 5.3 20dB Occupy Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Limit:	NA		
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type		
Instruments Used:	Refer to section 4.10 for details		
Test Results:	Pass		

#### **Measurement Data**

Test channel	20dB Occupy Bandwidth (kHz)		
	GFSK	π/4DQPSK	8DPSK
Lowest	798	1206	1200
Middle	798	1218	1206
Highest	792	1218	1206




Report No.: SZEM120800469301 Page: 19 of 70

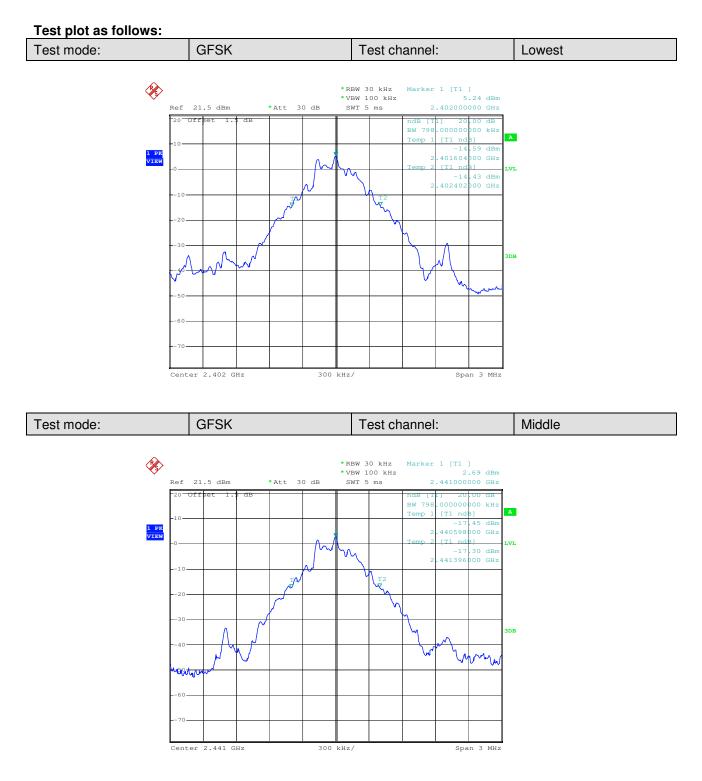




Report No.: SZEM120800469301 Page: 20 of 70

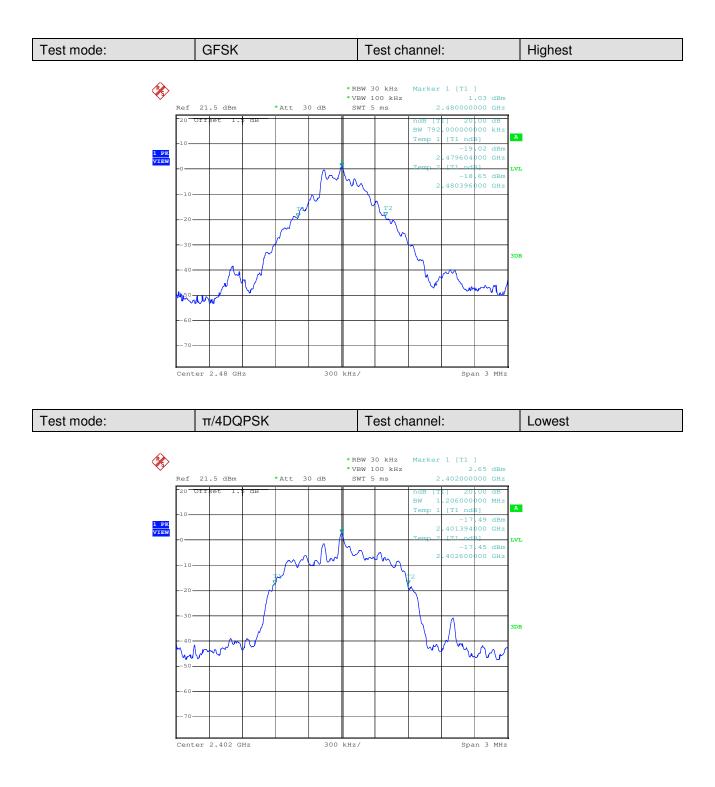




Report No.: SZEM120800469301 Page: 21 of 70

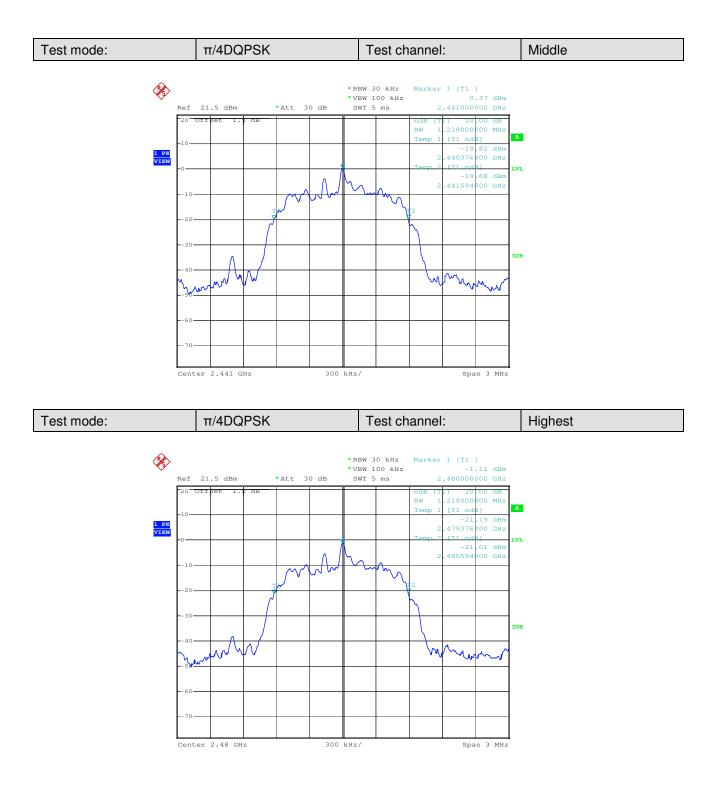




Report No.: SZEM120800469301 Page: 22 of 70

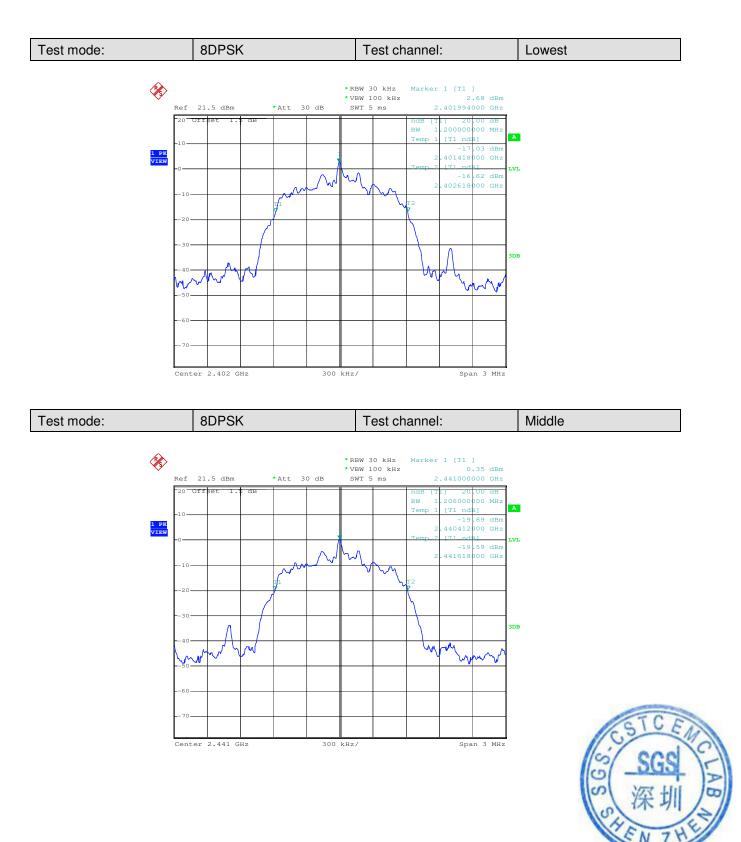



Report No.: SZEM120800469301 Page: 23 of 70

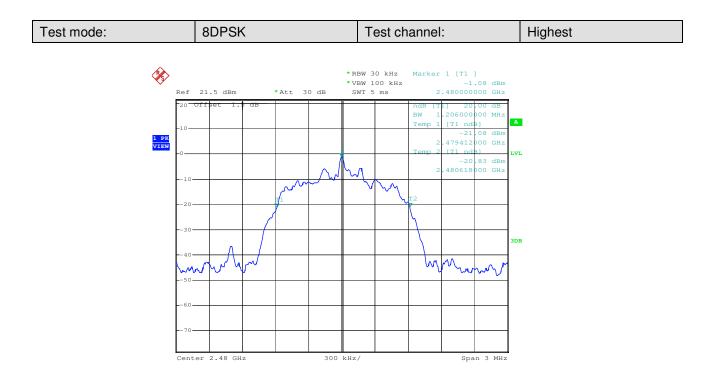



Report No.: SZEM120800469301 Page: 24 of 70

#### 5.4 Carrier Frequencies Separation

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)		
Exploratory Test Mode:			
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type.		
Instruments Used:	Refer to section 4.10 for details		
Test Results:	Pass		

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120800469301 Page: 25 of 70

#### **Measurement Data**


GFSK mode				
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result	
Lowest	1000	≥812	Pass	
Middle	1000	≥812	Pass	
Highest	1005	≥812	Pass	
	π/4DQPSK m	ode		
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result	
Lowest	1010	≥812	Pass	
Middle	1005	≥812	Pass	
Highest	1000	≥812	Pass	
	8DPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result	
Lowest	1000	≥812	Pass	
Middle	1000	≥812	Pass	
Highest	1000	≥812	Pass	

Note: According to section 5.3,

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)	
GFSK	798	532	
π/4DQPSK	1218	812	
8DPSK	1206	804	




Report No.: SZEM120800469301 Page: 26 of 70

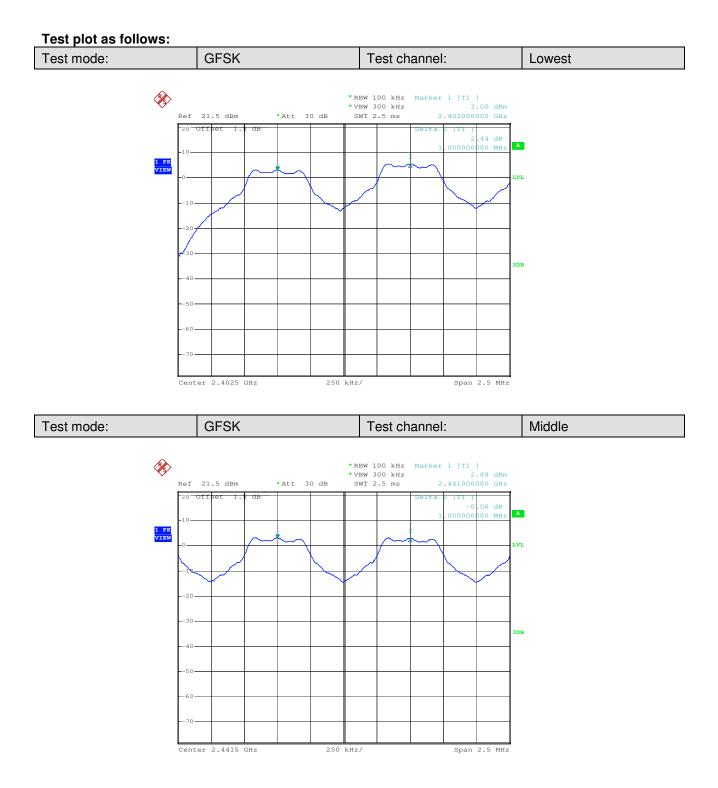




Report No.: SZEM120800469301 Page: 27 of 70

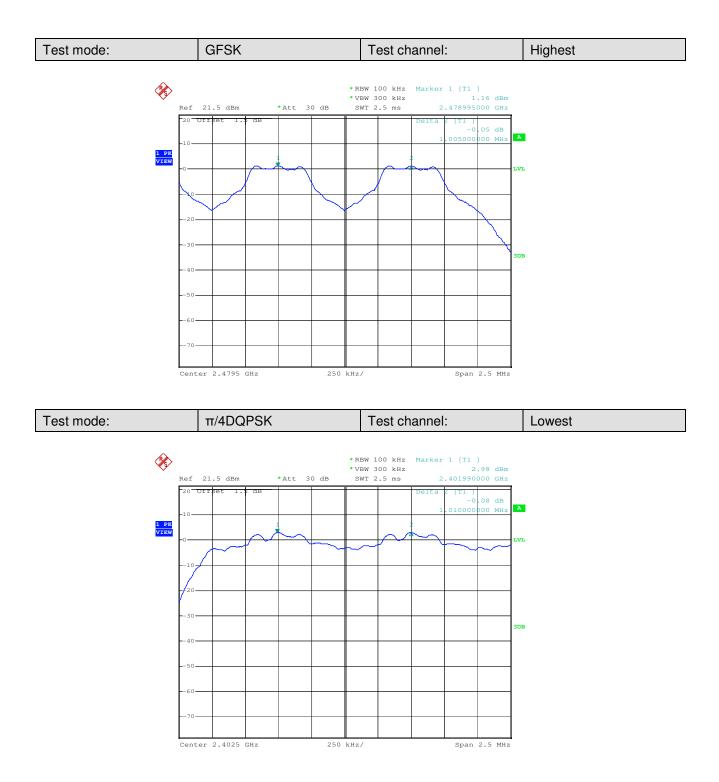




Report No.: SZEM120800469301 Page: 28 of 70

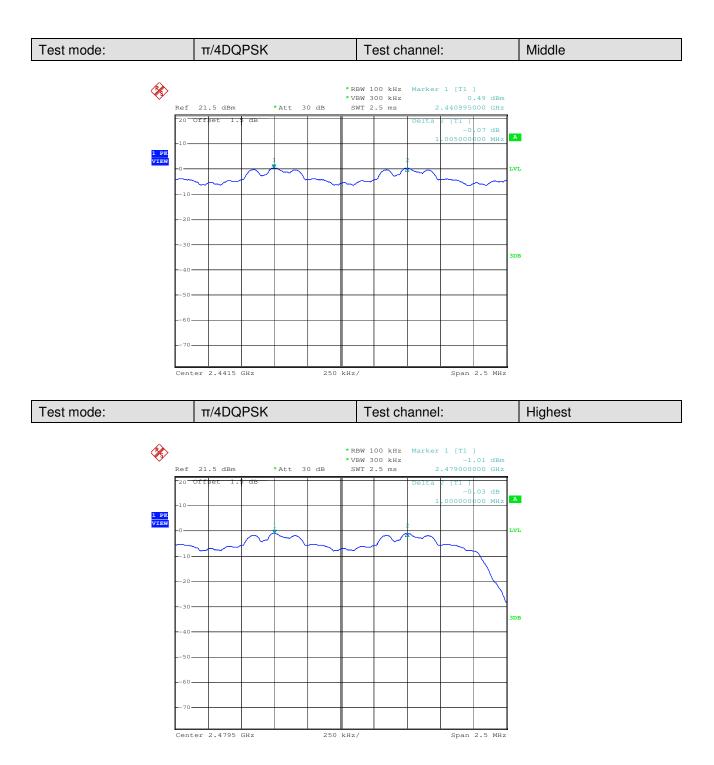




Report No.: SZEM120800469301 Page: 29 of 70

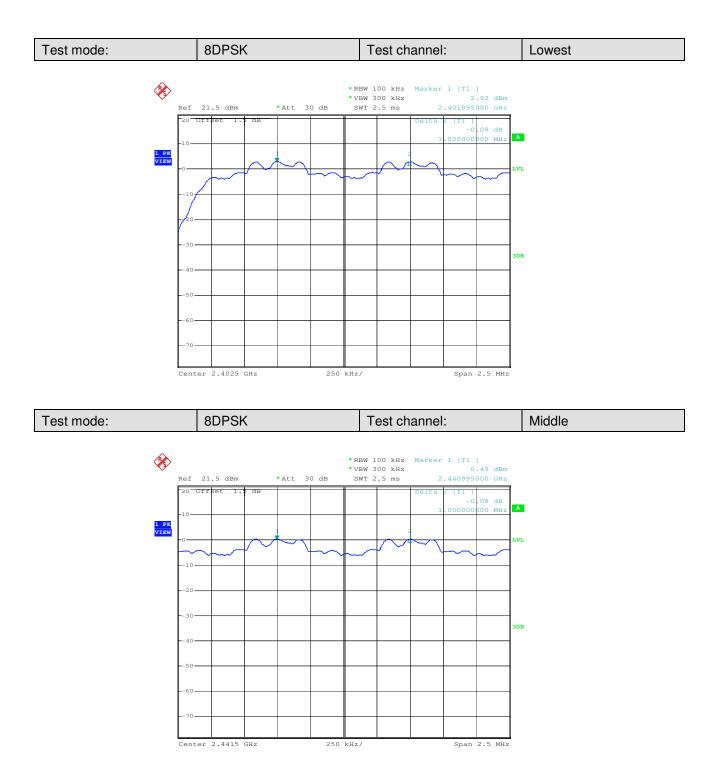



Report No.: SZEM120800469301 Page: 30 of 70

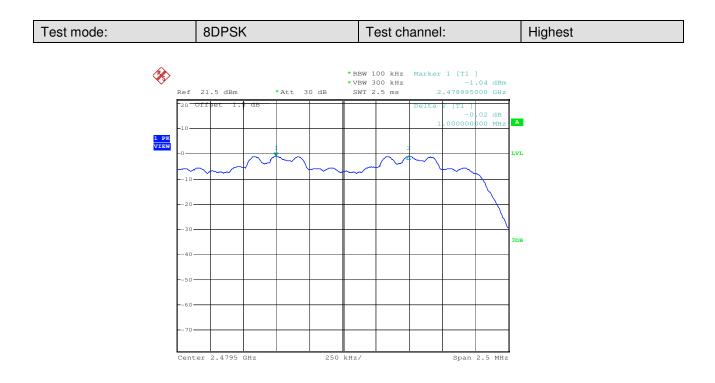

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120800469301 Page: 31 of 70

#### 5.5 Hopping Channel Number

Test Requirement:	47 CFR Part 15C Section 15.247 (b)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Limit:	At least 15 channels		
Test Mode:	Hopping transmitting with all kind of modulation		
Instruments Used:	Refer to section 4.10 for details		
Test Results:	Pass		


#### **Measurement Data**

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM120800469301 Page: 32 of 70

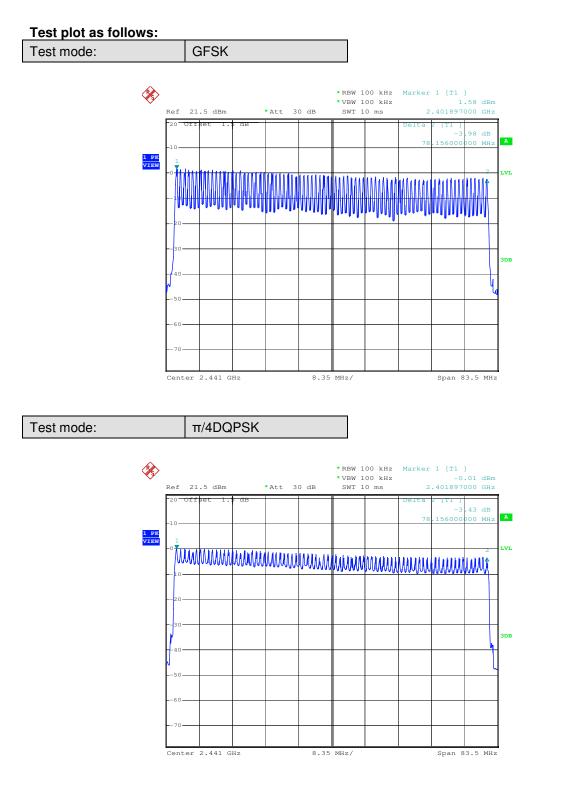





Report No.: SZEM120800469301 Page: 33 of 70

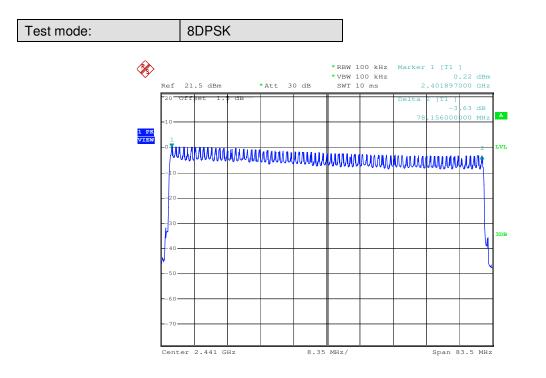



Report No.: SZEM120800469301 Page: 34 of 70

#### 5.6 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table		
	Ground Reference Plane		
Instruments Used:	Refer to section 4.10 for details		
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.		
Limit:	0.4 Second		
Test Results:	Pass		

#### **Measurement Data**

Mode	Packet	Dwell time (second)	Limit (second)
	DH1	0.1696	0.4
GFSK	DH3	0.2864	0.4
	DH5	0.3253	0.4
π/4DQPSK	2-DH1	0.1744	0.4
	2-DH3	0.2888	0.4
	2-DH5	0.1957	0.4
8DPSK	3-DH1	0.1728	0.4
	3-DH3	0.2832	0.4
	3-DH5	0.3259	0.4

#### **Test Result:**

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as below

DH1 time slot=0.530(ms)\*(1600/ (2\*79))\*31.6=169.6ms

DH3 time slot=1.790(ms)\*(1600/ (4\*79))\*31.6=286.4ms


DH5 time slot=3.050(ms)\*(1600/ (6\*79))\*31.6=325.3ms



Report No.: SZEM120800469301 Page: 35 of 70

Unimpus

#### Test plot as follows:

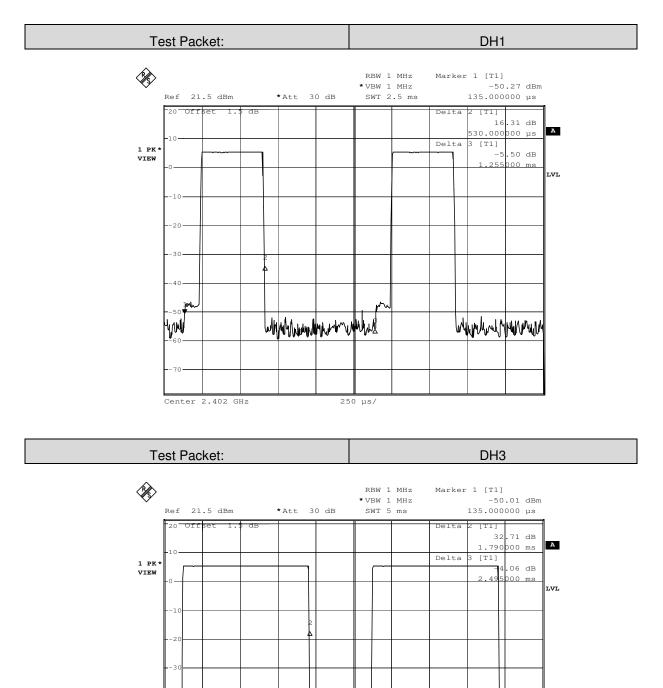

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

500 µs/


hunder

N

Center 2.402 GHz




Report No.: SZEM120800469301 Page: 36 of 70

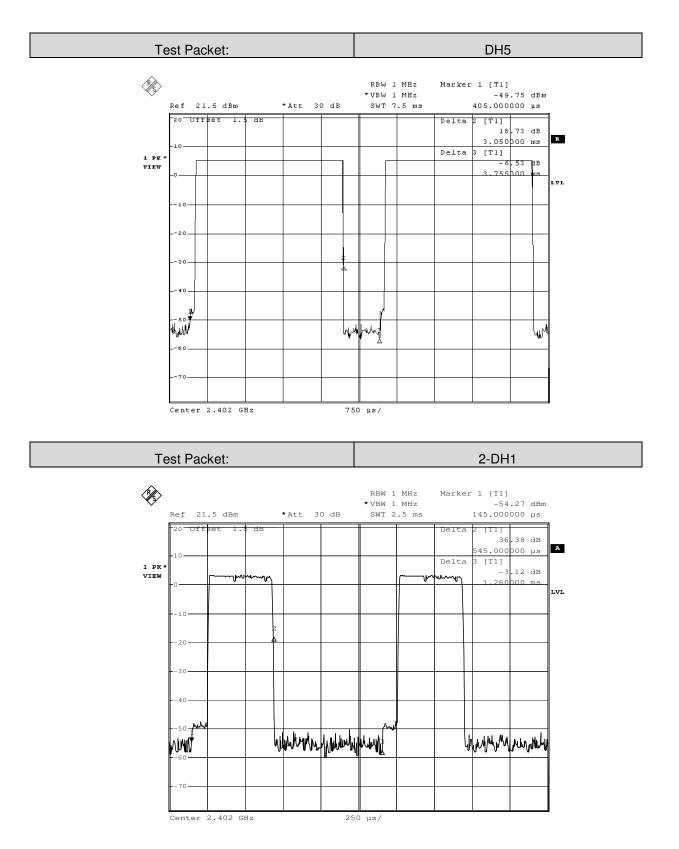




Report No.: SZEM120800469301 Page: 37 of 70

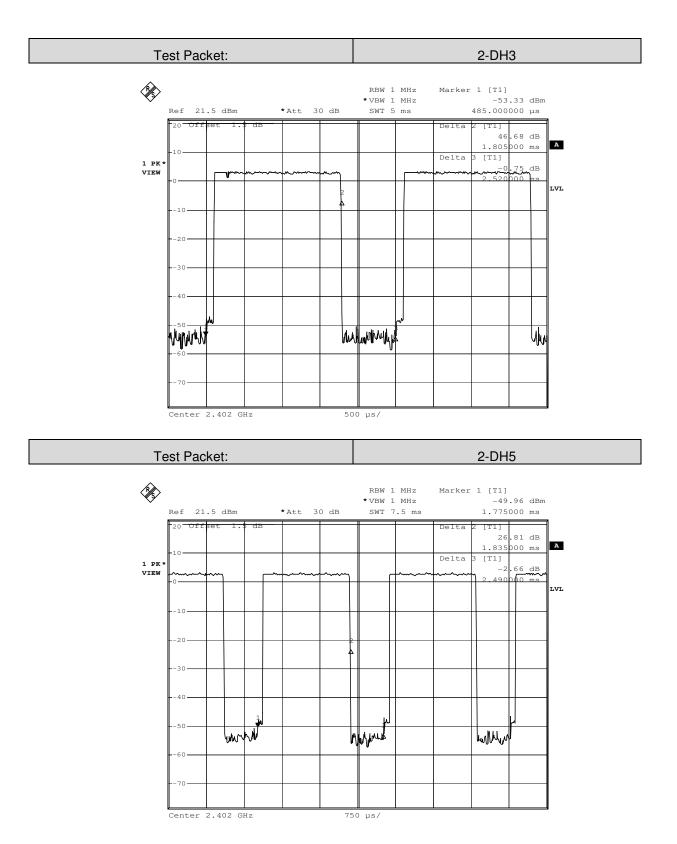




Report No.: SZEM120800469301 Page: 38 of 70

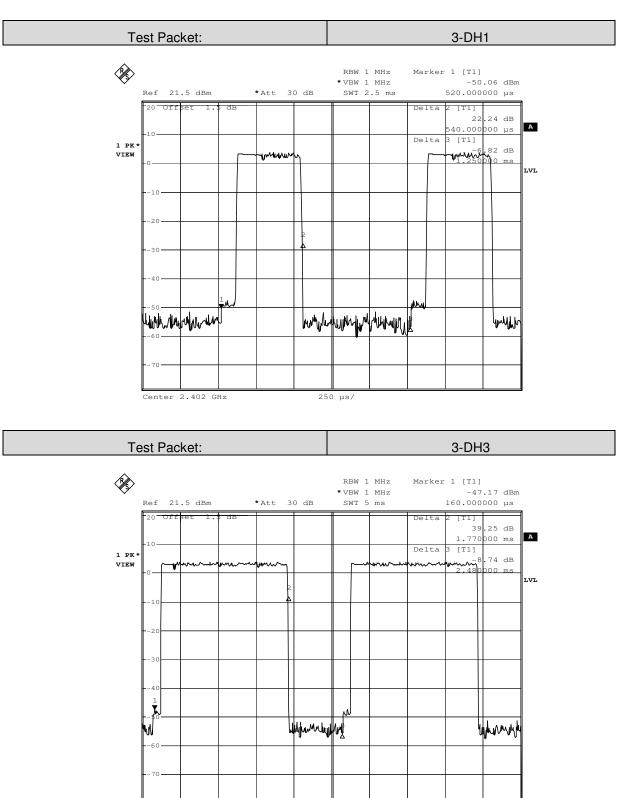

Center 2.402 GHz 500 µs/



Report No.: SZEM120800469301 Page: 39 of 70

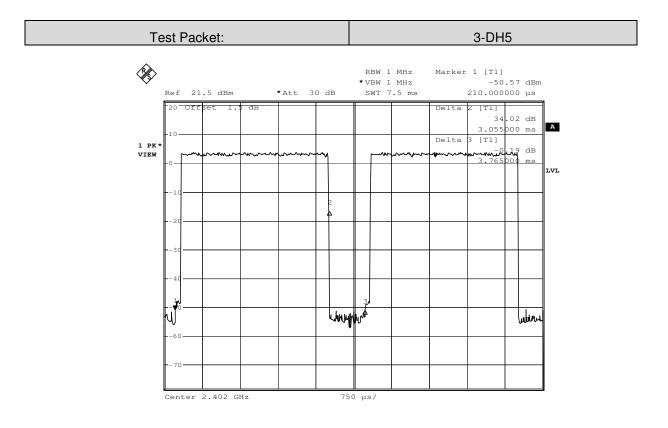



Report No.: SZEM120800469301 Page: 40 of 70


### 5.7 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)					
Test Method:	ANSI C63.10:2009					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:					
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type					
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type.					
Instruments Used:	Refer to section 4.10 for details					
Test Results:	Pass					

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM120800469301 Page: 41 of 70

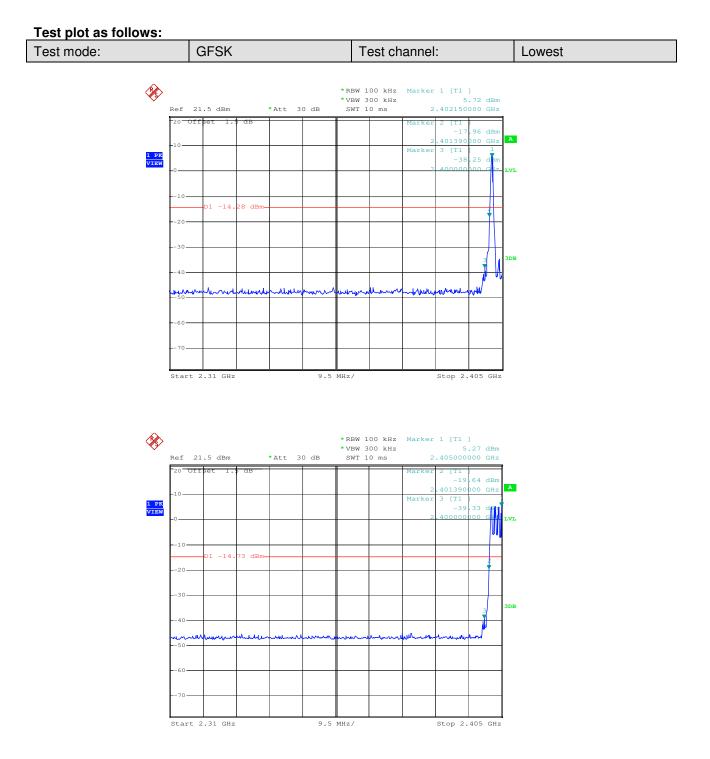




Report No.: SZEM120800469301 Page: 42 of 70

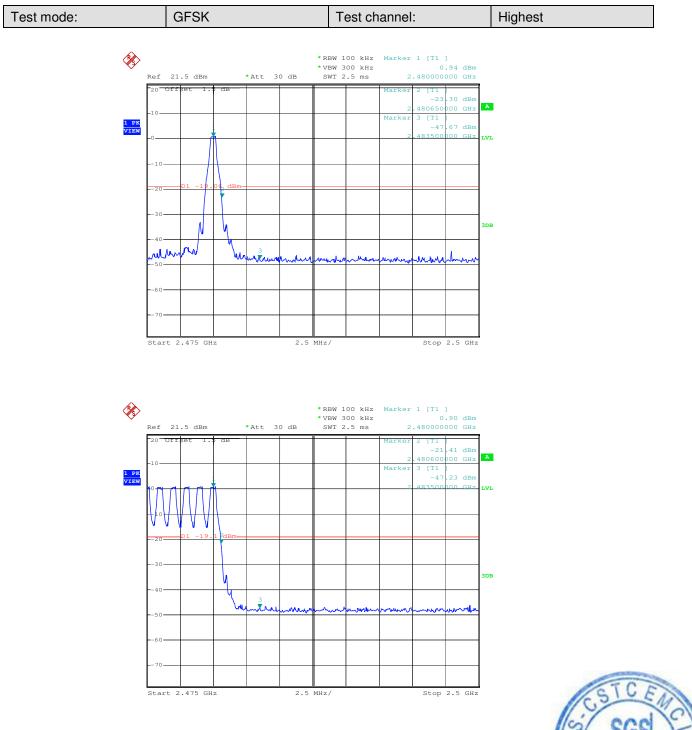

available on request or accessible at orditions for Electronic Documents at




Report No.: SZEM120800469301 Page: 43 of 70

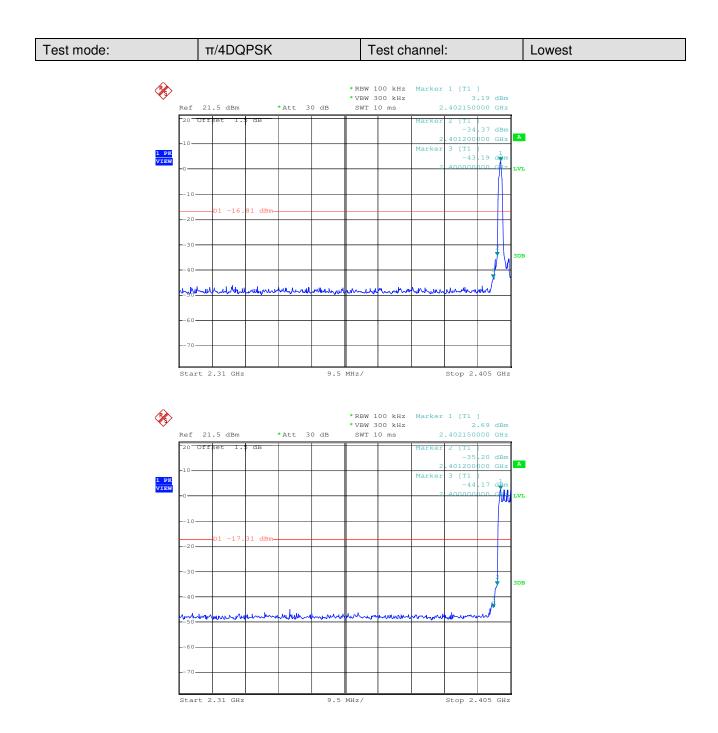




Report No.: SZEM120800469301 Page: 44 of 70

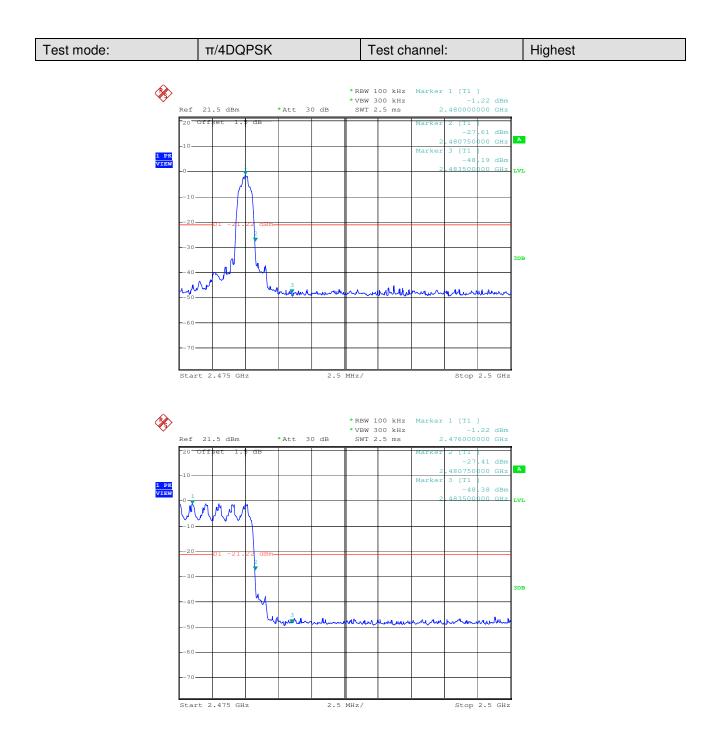




Report No.: SZEM120800469301 Page: 45 of 70

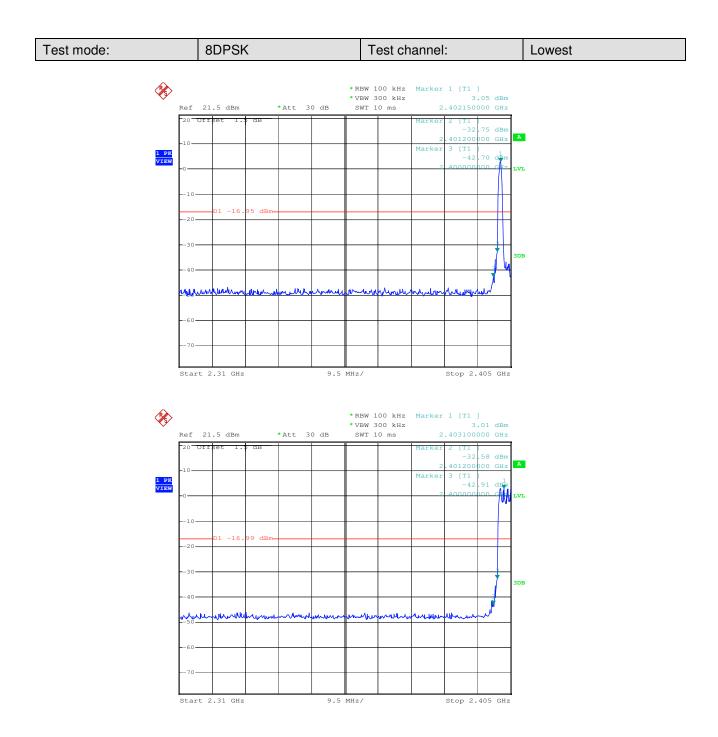



Report No.: SZEM120800469301 Page: 46 of 70

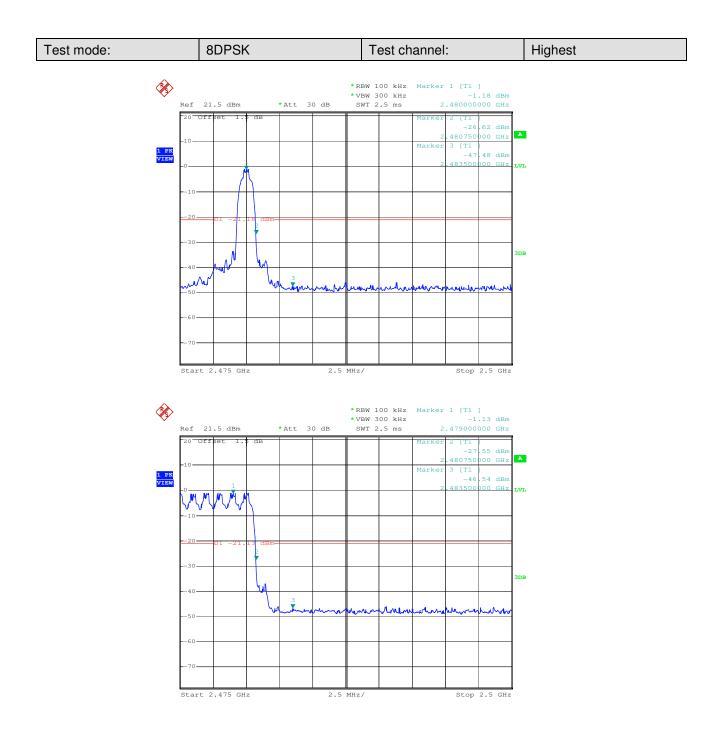



Report No.: SZEM120800469301 Page: 47 of 70


## 5.8 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)					
Test Method:	ANSI C63.10:2009					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane					
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type					
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type.					
Instruments Used:	Refer to section 4.10 for details					
Test Results:	Pass					

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM120800469301 Page: 48 of 70

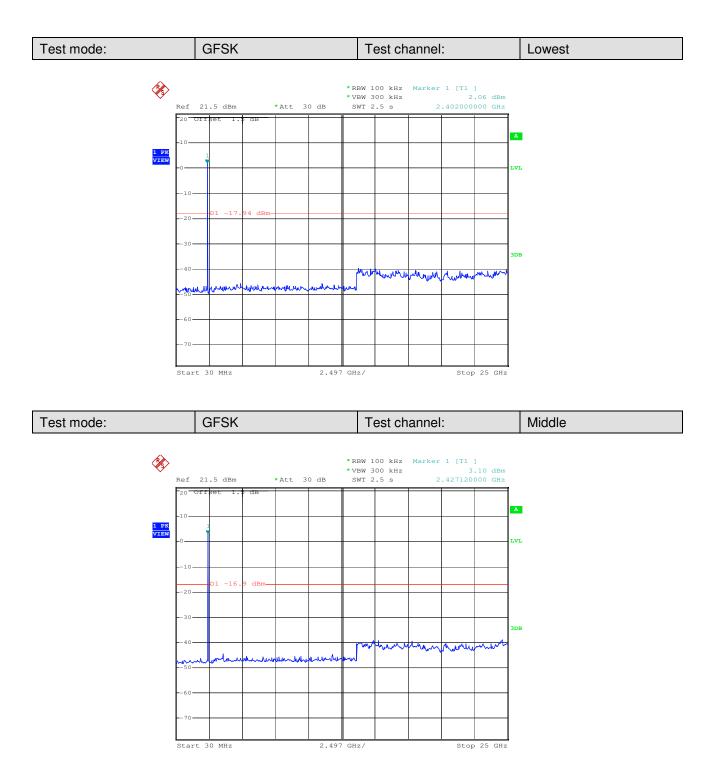




Report No.: SZEM120800469301 Page: 49 of 70

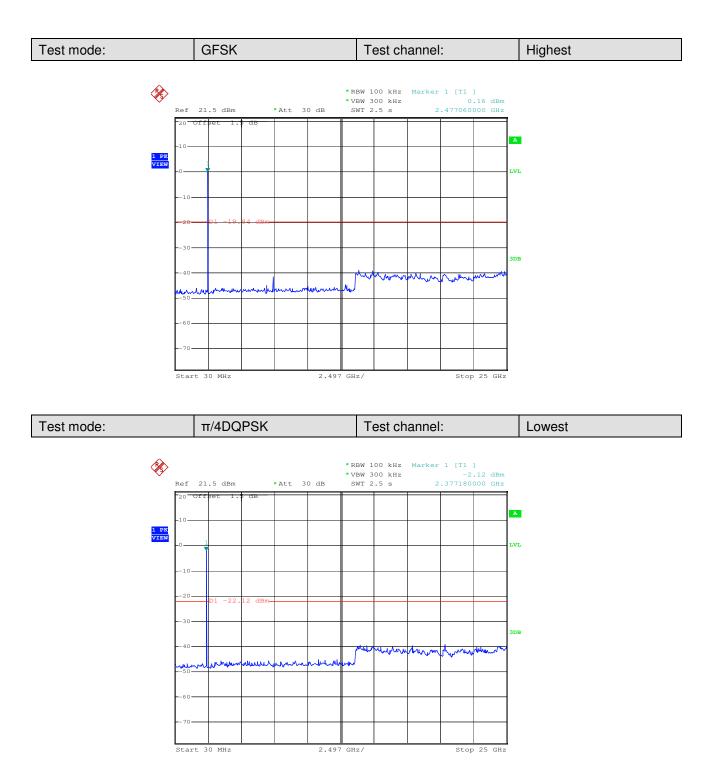




Report No.: SZEM120800469301 Page: 50 of 70

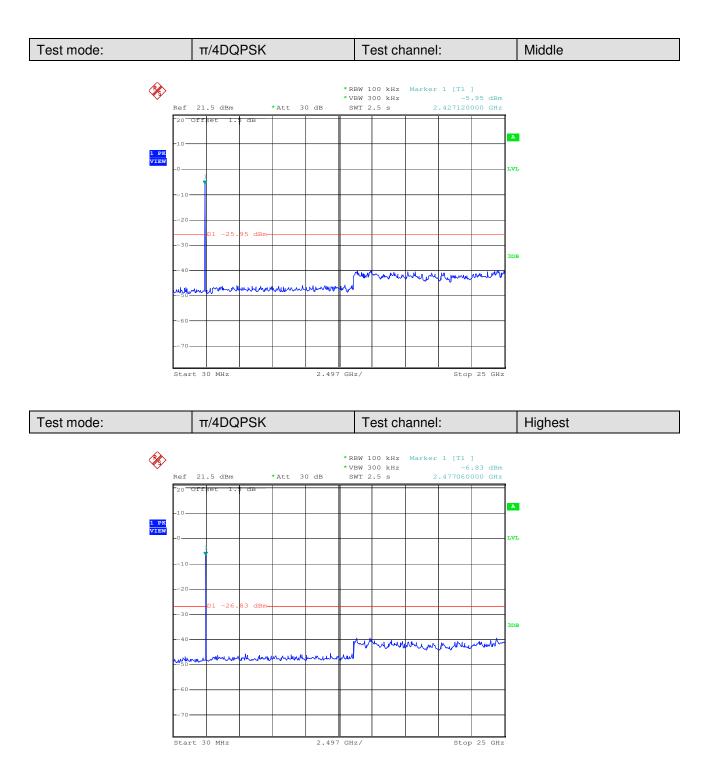




Report No.: SZEM120800469301 Page: 51 of 70

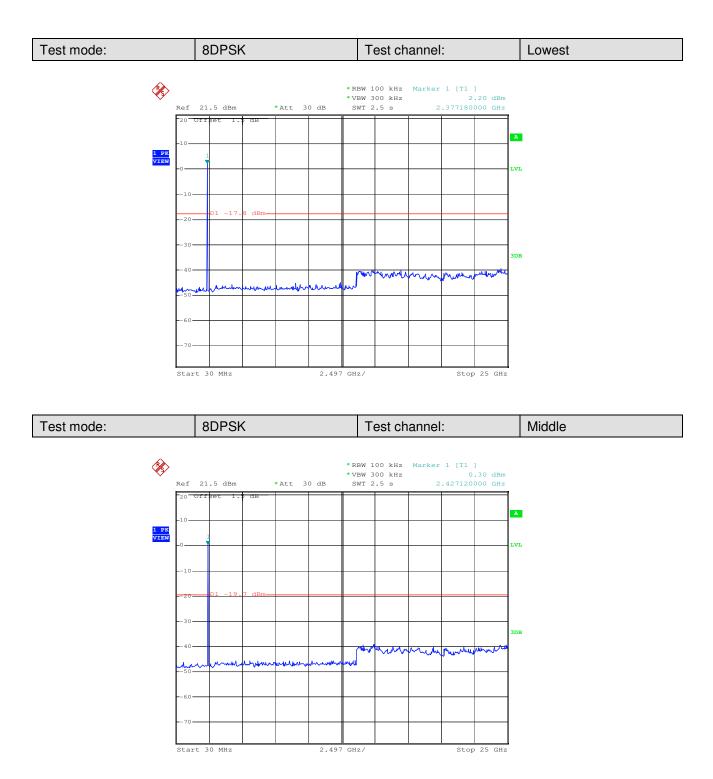



Report No.: SZEM120800469301 Page: 52 of 70

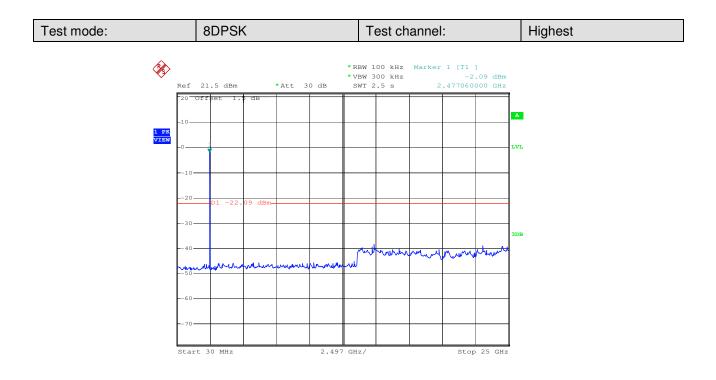





Report No.: SZEM120800469301 Page: 53 of 70

## 5.9 Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
of 25 kHz or the 20 dB band Alternatively. Frequency hop channel carrier frequencies hopping channel, whichever than 125 mW. The system s rate from a Pseudorandom of on the average by each tran	s shall have hopping channel carrier frequencies separated by a minimum width of the hopping channel, whichever is greater. oping systems operating in the 2400-2483.5 MHz band may have hopping that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the r is greater, provided the systems operate with an output power no greater shall hop to channel frequencies that are selected at the system hopping ordered list of hopping frequencies. Each frequency must be used equally ismitter. The system receivers shall have input bandwidths that match the s of their corresponding transmitters and shall shift frequencies in nsmitted signals.
EUT Pseudorandom Frequ	
outputs are added in a modu	sequence: 29 -1 = 511 bits
Linear Feedback S	Shift Register for Generation of the PRBS sequence
	om Frequency Hopping Sequence as follow:
0 2 4 6	62 64 78 1 73 75 77
The system receivers have i	y on the average by each transmitter. input bandwidths that match the hopping channel bandwidths of their and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEM120800469301 Page: 54 of 70


# **5.10 Radiated Spurious Emission**

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205									
Test Method:	ANSI C63.10: 2009									
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)									
Receiver Setup:	Frequency		Detector	RBW	VBW	Remark				
	0.009MHz-0.090MH	z	Peak	10kHz	z 30kHz	Peak				
	0.009MHz-0.090MH	Z	Average	10kHz	z 30kHz	Average				
	0.090MHz-0.110MH	Z	Quasi-peak	10kHz	z 30kHz	Quasi-peak				
	0.110MHz-0.490MH	Z	Peak	10kHz	z 30kHz	Peak				
	0.110MHz-0.490MH	Z	Average	10kHz	z 30kHz	Average				
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak				
	30MHz-1GHz		Quasi-peak	100 kH	lz 300kHz	Quasi-peak				
	Above 1GHz		Peak	1MHz	3MHz	Peak				
			Peak	1MHz	10Hz	Average				
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measuremen distance (m				
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300				
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30				
	1.705MHz-30MHz		30	-	-	30				
	30MHz-88MHz		100	40.0	Quasi-peak	3				
	88MHz-216MHz		150	43.5	Quasi-peak	3				
	216MHz-960MHz		200	46.0	Quasi-peak	3				
	960MHz-1GHz		500	54.0	Quasi-peak	3				
	Above 1GHz		500	54.0	Average	3				
	Above 1GHz50054.0Average3Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.									

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120800469301 Page: 55 of 70

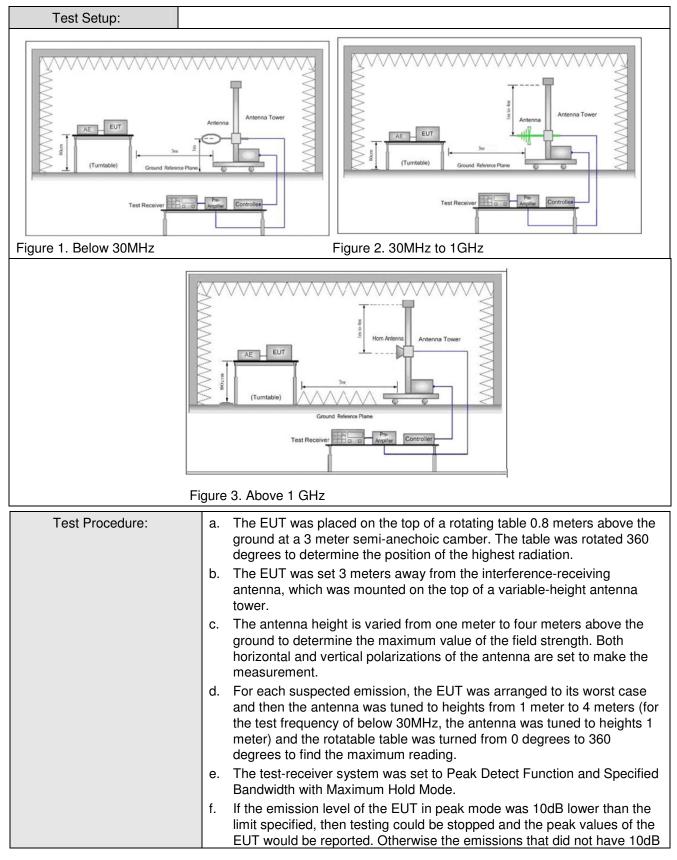



Report No.: SZEM120800469301 Page: 56 of 70

margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)
<ul> <li>h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li> </ul>
i. Repeat above procedures until all frequencies measured was complete.
Non-hopping transmitting mode with all kind of modulation and all kind of data type
Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type
Refer to section 4.10 for details
Pass


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM120800469301 Page: 57 of 70

#### 5.10.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

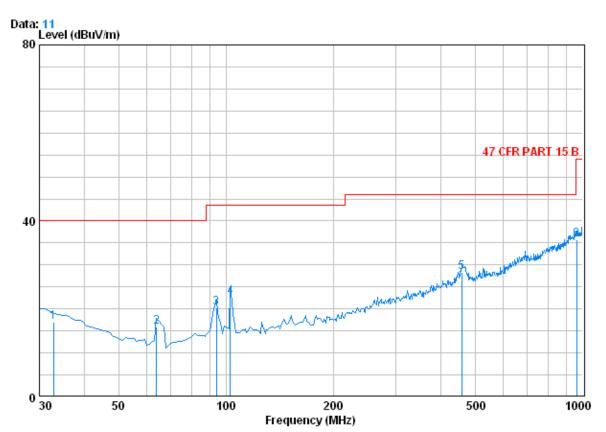

Condition : 47 CFR PART 15 B 3m 3142C VERTICAL Job No. : 4693RF


test mode : transmitting

	Freq		Antenna Factor	Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	32.910	0.60	13.91		29.79			-23.04
2 3	63.950 94.020	$0.80 \\ 1.14$	7.07 8.87	27.26 27.21	35.36 37.45	15.97 20.25	40.00 43.50	-24.03 -23.25
4 50	102.750 458.740	1.21 2.45	8.97 17.22	27.18 27.50	39.66 36.08		43.50 46.00	-20.85 -17.75
6	963.140	3.66	23.70	26.47	34.86	35.76	54.00	-18.24



Report No.: SZEM120800469301 Page: 58 of 70



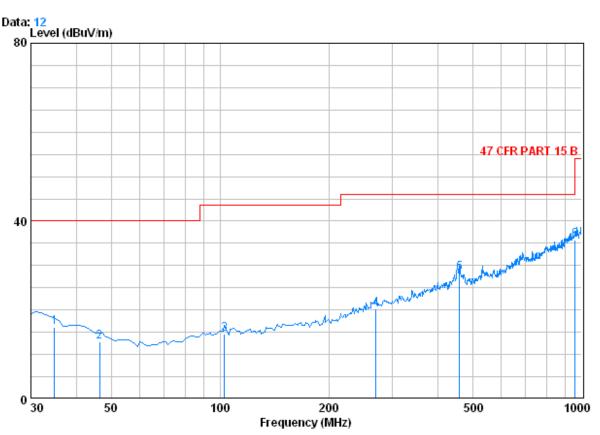

Condition : 47 CFR PART 15 B 3m 3142C HORIZONTAL Job No. : 4693RF test mode : transmitting

	0	Cablei	Intenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	34.850	0.60	13.05	27.34	29.80	16.12	40.00	-23.88
2	46.490	0.73	9.60	27.30	29.83	12.86	40.00	-27.14
3	102.750	1.21	8.97	27.18	31.52	14.51	43.50	-28.99
4	269.590	1.77	12.70	26.48	32.35	20.34	46.00	-25.66
50	459.710	2.45	17.22	27.50	36.07	28.24	46.00	-17.76
6	960.230	3.66	23.60	26.51	35.04	35.79	54.00	-18.21



Report No.: SZEM120800469301 Page: 59 of 70

Worse case	mode:	GFSK(DH1)	Test	channel:	Lowest	Rema	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1464.963	2.49	28.04	39.33	53.64	44.84	74	-29.16	Vertical
3151.992	3.44	33.34	40.41	47.80	44.17	74	-29.83	Vertical
4785.075	4.68	34.73	41.61	52.57	50.37	74	-23.63	Vertical
6428.771	5.24	36.20	40.55	49.78	50.67	74	-23.33	Vertical
8615.126	6.17	36.29	38.65	47.77	51.58	74	-22.42	Vertical
10480.590	6.09	38.28	37.65	46.75	53.47	74	-20.53	Vertical
1296.469	2.38	27.73	39.27	48.51	39.35	74	-34.65	Horizontal
3216.838	3.50	33.32	40.47	47.81	44.16	74	-29.84	Horizontal
4455.890	4.47	35.06	41.37	48.38	46.54	74	-27.46	Horizontal
5806.408	5.06	35.40	41.09	49.01	48.38	74	-25.62	Horizontal
8042.903	6.20	36.01	39.15	49.53	52.59	74	-21.41	Horizontal
9985.762	5.97	37.70	37.47	45.40	51.60	74	-22.40	Horizontal

#### 5.10.2 Transmitter Emission above 1GHz

Worse case	mode:	GFSK(DH1)	) Tes	t channel:	Middle	Ren	nark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1357.254	2.42	27.85	39.29	47.74	38.72	74	-35.28	Vertical
3376.244	3.64	33.25	40.58	47.57	43.88	74	-30.12	Vertical
5311.469	4.88	34.72	41.52	48.23	46.31	74	-27.69	Vertical
6974.358	5.50	35.83	40.08	47.62	48.87	74	-25.13	Vertical
9088.188	6.13	36.70	38.24	46.20	50.79	74	-23.21	Vertical
11169.240	6.26	38.47	37.93	45.60	52.40	74	-21.60	Vertical
1392.247	2.44	27.91	39.31	48.36	39.40	74	-34.60	Horizontal
3088.453	3.39	33.37	40.37	47.84	44.23	74	-29.77	Horizontal
4223.950	4.31	34.45	41.21	47.82	45.37	74	-28.63	Horizontal
5646.079	5.00	35.12	41.22	48.66	47.56	74	-26.44	Horizontal
7702.278	6.22	36.00	39.44	46.96	49.74	74	-24.26	Horizontal
11056.090	6.23	38.49	37.88	46.14	52.98	74	-21.02	Horizontal



Report No.: SZEM120800469301 Page: 60 of 70

Worse case	mode:	GFSK(DH1	) Tes	t channel:	Highest	Ren	nark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1406.496	2.45	27.94	39.31	54.46	45.54	74	-28.46	Vertical
3738.129	3.95	33.49	40.84	49.09	45.69	74	-28.31	Vertical
4971.316	4.76	34.43	41.75	51.83	49.27	74	-24.73	Vertical
5865.832	5.08	35.48	41.04	49.87	49.39	74	-24.61	Vertical
7470.558	6.08	35.99	39.64	51.64	54.07	74	-19.93	Vertical
9859.472	5.98	37.56	37.58	46.39	52.35	74	-21.65	Vertical
1464.963	2.49	28.04	39.33	52.12	43.32	74	-30.68	Horizontal
3933.367	4.11	33.74	40.98	48.81	45.68	74	-28.32	Horizontal
4971.316	4.76	34.43	41.75	56.14	53.58	74	-20.42	Horizontal
6886.154	5.43	35.92	40.15	49.39	50.59	74	-23.41	Horizontal
8042.903	6.20	36.01	39.15	48.93	51.99	74	-22.01	Horizontal
10480.59	6.09	38.28	37.65	46.20	52.92	74	-21.08	Horizontal

Worse case	mode:	GFSK(DH1	) Tes	t channel:	Highest	Rem	ark:	Average
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1406.496	2.45	27.94	39.31	42.12	33.20	54	-16.12	Vertical
3738.129	3.95	33.49	40.84	36.75	33.35	54	-15.97	Vertical
4971.316	4.76	34.43	41.75	39.49	36.93	54	-12.39	Vertical
5865.832	5.08	35.48	41.04	37.53	37.05	54	-12.27	Vertical
7470.558	6.08	35.99	39.64	39.30	41.73	54	-7.59	Vertical
9859.472	5.98	37.56	37.58	34.05	40.01	54	-9.31	Vertical

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report, except High channel Vertical Polarization.



Report No.: SZEM120800469301 Page: 61 of 70

# 5.11 Band edge (Radiated Emission)

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10: 2009								
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Limit:	Frequency Limit (dBuV/m @3m) Remark								
	30MHz-88MHz	40.0	Quasi-peak Value						
	88MHz-216MHz	43.5	Quasi-peak Value						
	216MHz-960MHz	46.0	Quasi-peak Value						
	960MHz-1GHz	54.0	Quasi-peak Value						
	Above 1GHz	54.0	Average Value						
		74.0	Peak Value						
Test Setup:									
AE EUT (Turntable) Ground Reference Pic Test Receiver	Antenna Tower	AE EUT (Turntable) Ground Reference Plu Test Receiver	Horn Antenna Tower						
Figure 1. 30MHz to 1GHz	Fig	jure 2. Above 1 GHz							



Report No.: SZEM120800469301 Page: 62 of 70

Test Procedure:	<ul> <li>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> <li>g. Test the EUT in the lowest channel , the Highest channel</li> <li>h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li> <li>i. Repeat above procedures until all frequencies measured was complete.</li> </ul>
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of date type is the worse case of
	GFSK modulation type
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass






20

2402.200

## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM120800469301 Page: 63 of 70

74.00 26.54

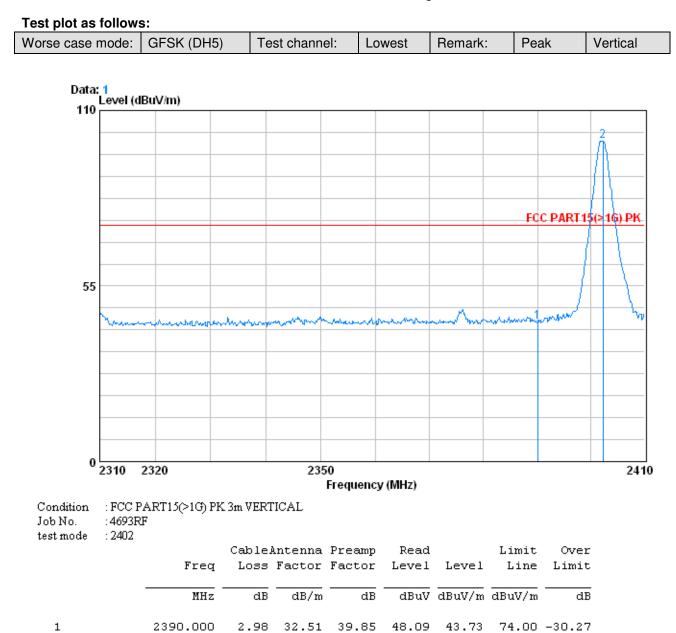

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


2.98 32.51 39.86 104.91 100.54



Report No.: SZEM120800469301 64 of 70 Page:

dB

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	------------	---------------	--------	---------	------	------------

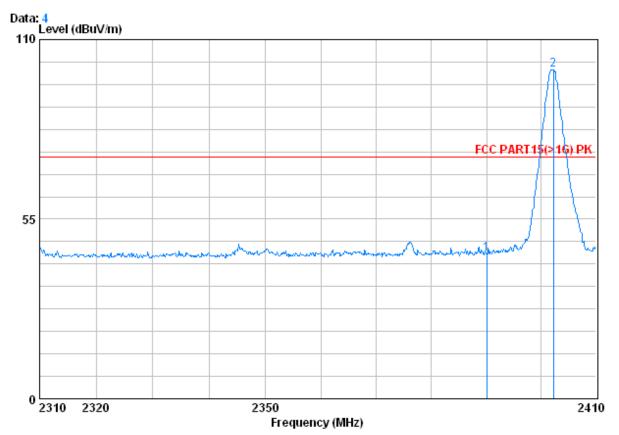


<sup>:</sup> FCC PART15(>1G) PK 3m HORIZONTAL Condition Job No. :4693RF :2402 test mode

CableAntenna Preamp Read Over Limit Loss Factor Factor Level Level Line Limit Freq MHz dBuV dBuV/m dBuV/m dB dB/m dB2390.000 2.98 32.51 39.85 48.78 44.43 74.00 -29.57 1 2 0 2402.200 2.98 32.51 39.86 105.17 100.80 74.00 26.80



Report No.: SZEM120800469301 Page: 65 of 70

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	------------	---------------	--------	---------	---------	----------

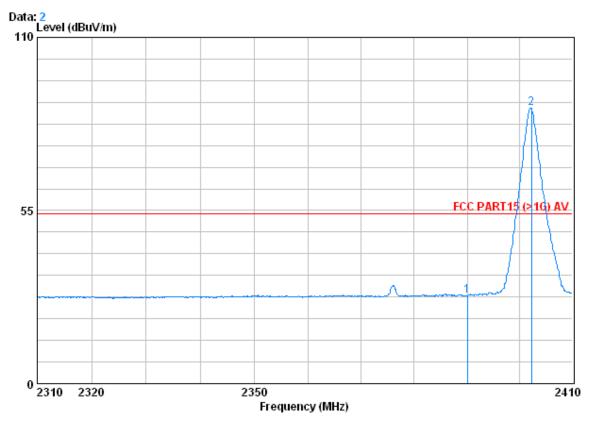

Condition : FCC PART15 (>1G) AV 3m VERTICAL Job No. : 4693RF


test mode 👘 : 2402

		CableA	Intenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	32.29	27.93	54.00	-26.07
20	2402.200	2.98	32.51	39.86	91.84	87.47	54.00	33.47



Report No.: SZEM120800469301 Page: 66 of 70

Worse case mode: GFSK (DH5)	Test channel:	Lowest	Remark:	Average	Horizontal
-----------------------------	---------------	--------	---------	---------	------------

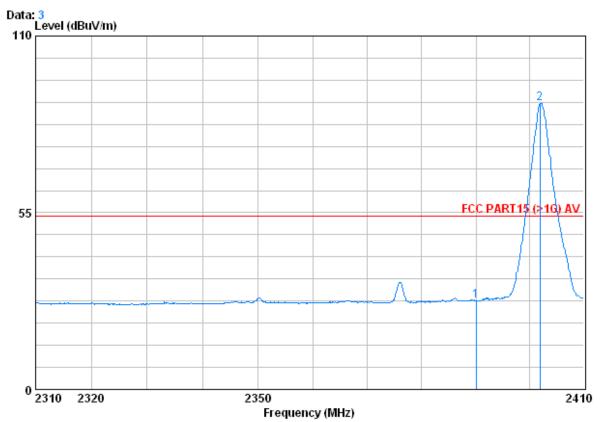


Condition : FCC PART15 (>1G) AV 3m HORIZONTAL Job No. : 4693RF test mode : 2402

	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 0	2390.000 2401.900			39.85 39.86				



Report No.: SZEM120800469301 Page: 67 of 70

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Vertical	
------------------	------------	---------------	---------	---------	------	----------	--

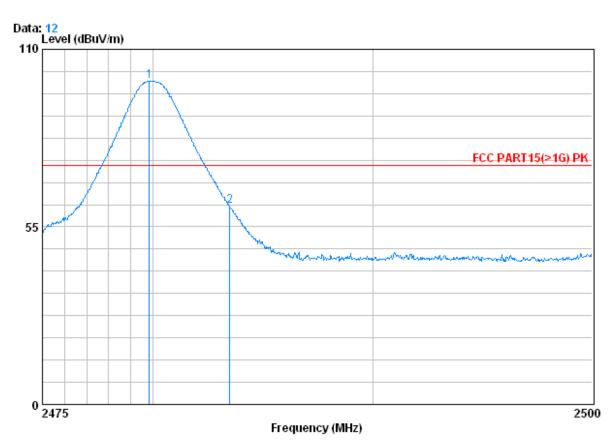


Condition : FCC PART15(>1G) PK 3m VERTICAL Job No. : 4693RF test mode : 2480

	Freq			-	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2479.850 2483.500					100.06 61.39		



Report No.: SZEM120800469301 Page: 68 of 70

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	------------	---------------	---------	---------	------	------------

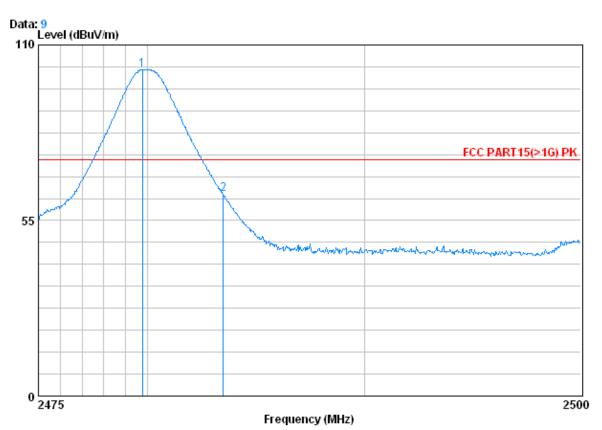

Condition : FCC PART15(>1G) PK 3m HORIZONTAL Job No. : 4693RF

test mode : 2480


1 2

	Freq			-	Read Level		Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
0	2479.775 2483.500				106.47 67.33			



Report No.: SZEM120800469301 Page: 69 of 70

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Vertical
------------------	------------	---------------	---------	---------	---------	----------

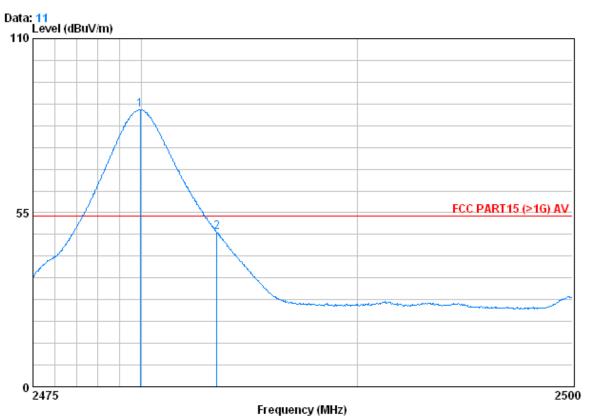

Condition : FCC PART15 (>1G) AV 3m VERTICAL

Job No. : 4693RF test mode : 2480

	 Freq	CableAntenna Loss Factor		-	Read Level Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2479.950 2483.500			39.92 39.92				




Report No.: SZEM120800469301 70 of 70 Page:

dB

-3.79

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	------------	---------------	---------	---------	---------	------------

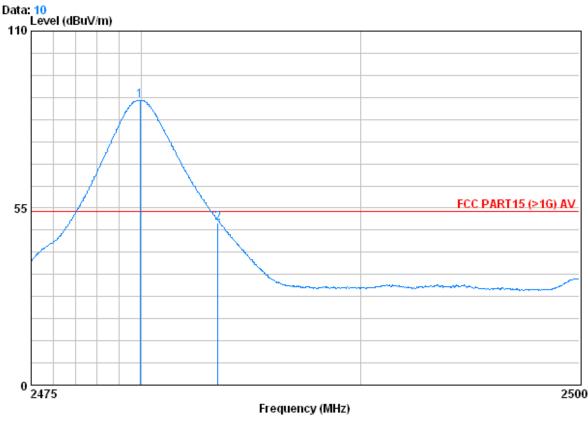

Condition : FCC PART15 (>1G) AV 3m HORIZONTAL Job No. : 4693RF test mode :2480 CableAntenna Preamp Read Limit Over Freq Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m 10 2479.950 3.03 32.67 39.92 92.77 88.55 54.00 34.55

32.67

39.92

54.43

50.21

54.00

Note:

2

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

3.03

2483.500