



# FCC TEST REPORT

Product Name	GSM Fixed Wireless Phone
Model Name	LGP-450,LGP-450A
Applicant	LG-Nortel Co. Ltd.
FCC ID	TUILGP450

## ESTECH CO., LTD

Rm. 1015 World Venture Center, 426-5 Gasan-dong, Geumcheon-gu,  
Seoul, 153-803, Korea. Tel:82-2-867-3201, Fax:82-2-867-3204



# FCC Test Report

Report Number	ESTR1006-042			
Applicant	Company Name	LG-Nortel Co. Ltd.		
	Address	533, Hogye-1dong, Dongan-gu, Anyang-shi, Kyongki-do, 431-749, Korea		
Product	Product Name	GSM Fixed Wireless Phone		
	Model No.	LGP-450, LGP-450A	Manufacturer	LG-Nortel Co., Ltd.
	Serial No.	NONE	Country of origin	KOREA
Other	Issued Date	2010-06-24	Tested Date	2010-06-09 ~ 2010-06-24
	Test Result			<b>Pass</b>
Standard	<b>FCC PART 24 Subpart E &amp; PART 22 Subpart H</b>			
Tested by	I.K. Hong/ Engineer	(Signature)		
Approved by	Tag-Sun Park/Engineering manager	(Signature)		
<b>ESTECH CO., LTD</b>				
Rm. 1015 World Venture Center, 426-5 Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea. Tel:82-2-867-3201, Fax:82-2-867-3204				
<p>o Basic model : LGP-450. Additional model : LGP-450A.  Two model is same product, only model name is different.  o This is certified that the above mentioned products have been tested for the sample provided by client.  o No part of this document may not be duplicated or reproduced by any means without the express written permission of Estech Co., Ltd.</p>				



## Contents

<b>1. General Information</b>	Page 4
<b>2. Laboratory Information</b>	Page 5
<b>3. Summary of Test Results</b>	Page 5
<b>4. RF Output Power</b>	Page 6
<b>5. Occupied Bandwidth</b>	Page 8
<b>6. Spurious and Harmonic Emission at Antenna Terminal</b>	Page 11
<b>7. Field Strength of Spurious Radiation</b>	Page 20
<b>8. Frequency stability</b>	Page 23

**Attachment 1 : EUT Test Photographs**

**Attachment 2 : EUT Photographs**

## 1. General Information

### 1.1 EUT Description

FCC ID	<b>TUILGP450</b>
Product Name	<b>GSM Fixed Wireless Phone</b>
Model Name	<b>LGP-450,LGP-450A</b>
Frequency	<b>Tx :1850.20 ~ 1909.80MHz(PCS1900), 824.2 ~ 848.8MHz(GSM850)</b>
Channel	<b>PCS1900(512/661/810), GSM850 (128/190/251)</b>
Modulation Type	<b>GSM</b>
Power Rating	<b>3.7 Vd.c.(3.2 ~ 4.3)Vd.c.</b>

## 2. Laboratory Information

- 2.1 Laboratory Name** Estech Co., Ltd.
- 2.2 Location**
- Head Office** Rm. 1015, World Venture Center II, 426-5 Gasan-dong  
 Geumcheon-gu, Seoul, 153-803. Korea.
- EMC Lab(Ichon)** 58-1, Osan-Ri, GaNam-Myon, YeoJoo-Gun, KyungKi-Do, Korea
- EMC Lab(Yanggi)** 97-1, Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea
- 2.3 Quality System** Accredited by KOLAS(ISO/IEC 17025)
- 2.4 Major Accredited Mark**



## 3. Summary of Test Results

Test Item	Standard	Result
RF Output Power	Part 22 & 24	PASS
Occupied Bandwidth		PASS
Spurious and Harmonic Emission at Antenna Terminal		PASS
Field Strength of Spurious Radiation		PASS
Frequency stability		PASS


## 4. RF Output Power

### 4.1 Test Procedure(accroding to ANSI/TIA/EIA 603 Clause 2.2.17 , FCC 22.913 & FCC 24.232)

1. The EUT was placed on a wooden turn table 3 meters from the receive antenna. The receive antenna height and turn table rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1MHz, A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For reading 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

2. The RF output port of the EUT was connected to the dual directional coupler and Wireless communications test set connected dual directional coupler  
 The RF Power is measured Power matter This test was performed three channels (Low, High, Middle)

### 3. Test setup for RF Conducted measurement

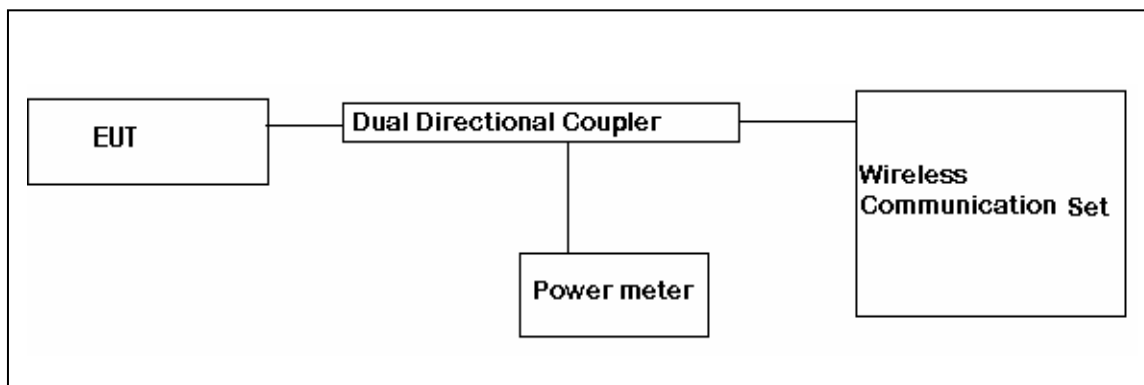

### 4.2 Test Equipments

The following test equipments are used during tests

Equipment	Manufacturer	Model	Cal. Due Date
Receiver	Rohde & Schwarz	ESPI7	2010-08-27
Signal Generator	HP	83620B	2010-09-08
Power Meter	HP	EPM-442A	2010-10-13
Wireless Communications Test Set	Agilent	E5515C	2011-05-11
Pre Amplifier	HP	8449B	2011-02-01
Horn Antenna	SCHWARZBECK	BBHA 9120 D	2010-06-30
Horn Antenna	SCHWARZBECK	BBHA 9120 D	2010-06-30



**4.3. Test Results**

**4.3.1 PCS1900**

(GSM)

Ch No.	Freq (MHz)	Peak Power Meter(dBm)	Peak Power EIRP(dBm)
512	1850.20	28.60	27.40
661	1880.00	28.57	29.63
810	1909.80	28.87	29.94

FREQ (MHz)	Receiver Reading (dBuV)	Correction Factor (dB)		SG Reading (dBm)	EIRP (dBm)	Limit (dBm)	POL (H/V)
		Antenna gain(dBi)	Cable Loss (dB)				
1850.20	96.19	10.40	12.50	29.50	27.40	33	V
1880.00	95.86	10.43	12.60	31.80	29.63	33	V
1909.80	95.60	10.44	12.70	32.20	29.94	33	V

**4.3.2 GSM850**

(GSM)


Ch No.	Freq (MHz)	Peak Power Meter(dBm)	Peak Power ERP(dBm)
128	824.20	31.87	29.98
190	836.60	32.02	29.11
251	848.80	32.20	28.52

FREQ (MHz)	Receiver Reading (dBuV)	Correction Factor (dB)		SG Reading (dBm)	ERP (dBm)	Limit (dBm)	POL (H/V)
		Antenna gain(dBi)	Cable Loss (dB)				
824.20	101.98	0.99	8.90	37.89	29.98	38.5	V
836.60	100.87	1.31	9.10	36.90	29.11	38.5	V
848.80	100.61	1.62	9.20	36.10	28.52	38.5	V

## 5. Occupied Bandwidth

### 5.1 Test Procedure

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% of the Emission bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.

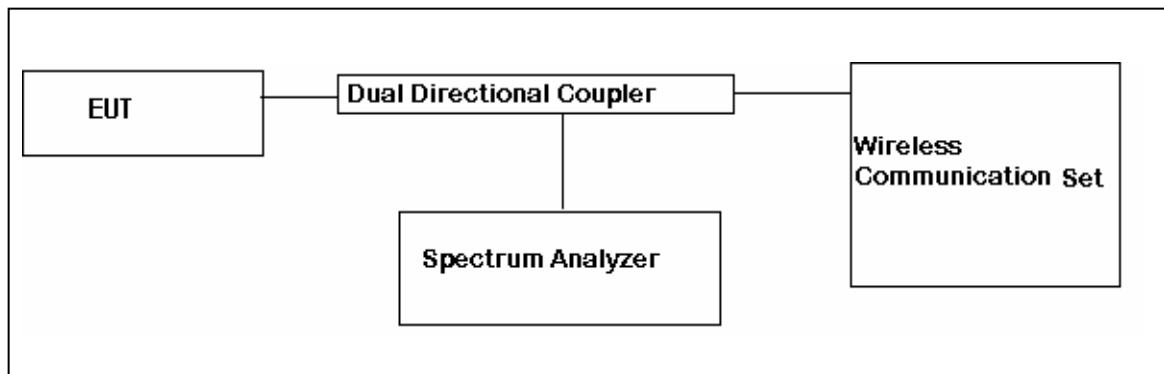

### 5.2 Test Equipments

The following test equipments are used during tests

Equipment	Manufacturer	Model	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	2010-09-10
Dual Directional Coupler	HP	778D	2011-02-25
Wireless Communications Test Set	Agilent	E5515C	2011-05-11

### 5.3 Test Results

#### 5.3.1 PCS1900

(GSM)

Channel	Frequency(MHz)	26dB Bandwidth(kHz)
512	1850.20	310.76
661	1880.00	306.87
810	1909.80	316.19

#### 5.3.2 GSM850

(EDGE)

Channel	Frequency(MHz)	26dB Bandwidth(kHz)
128	824.20	315.95
190	836.60	314.15
251	848.80	314.85






5.4 Test Plot

PCS1900 GSM


26dB Channel Bandwidth(512)



26dB Channel Bandwidth(661)

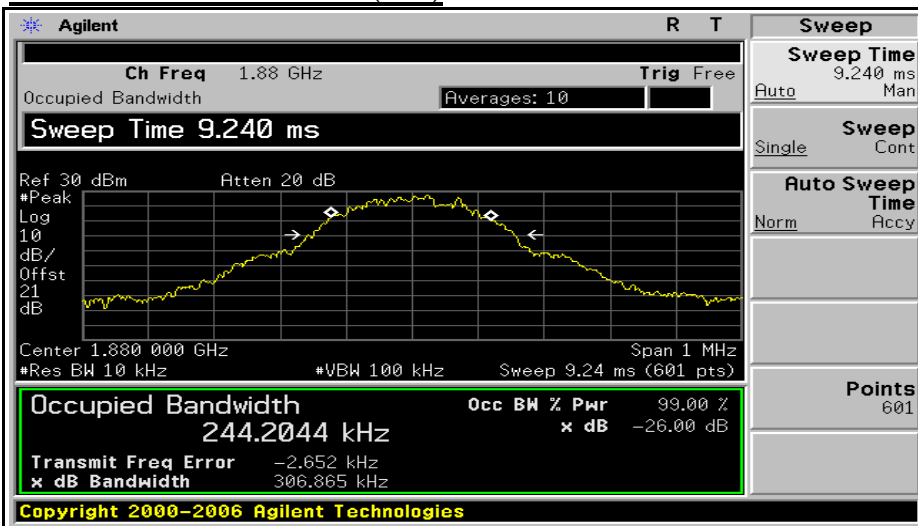


26dB Channel Bandwidth(810)

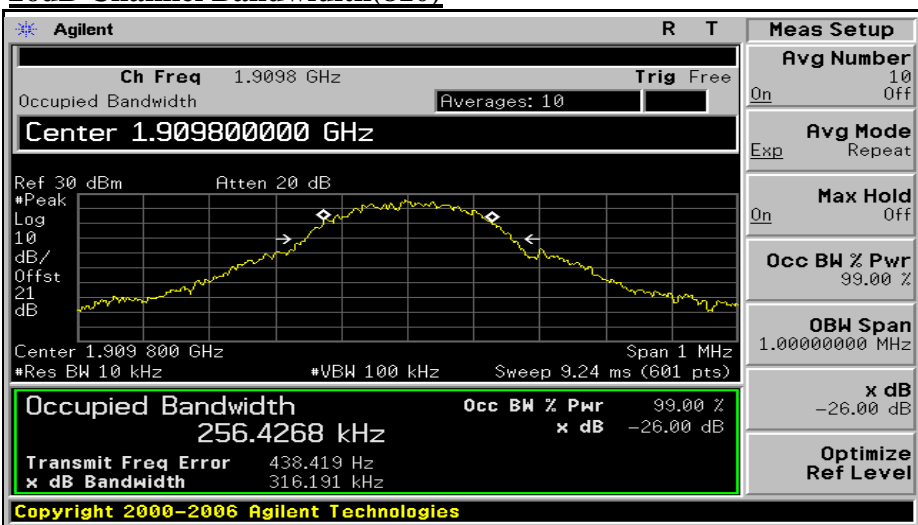




GSM850


**26dB Channel Bandwidth(128)**

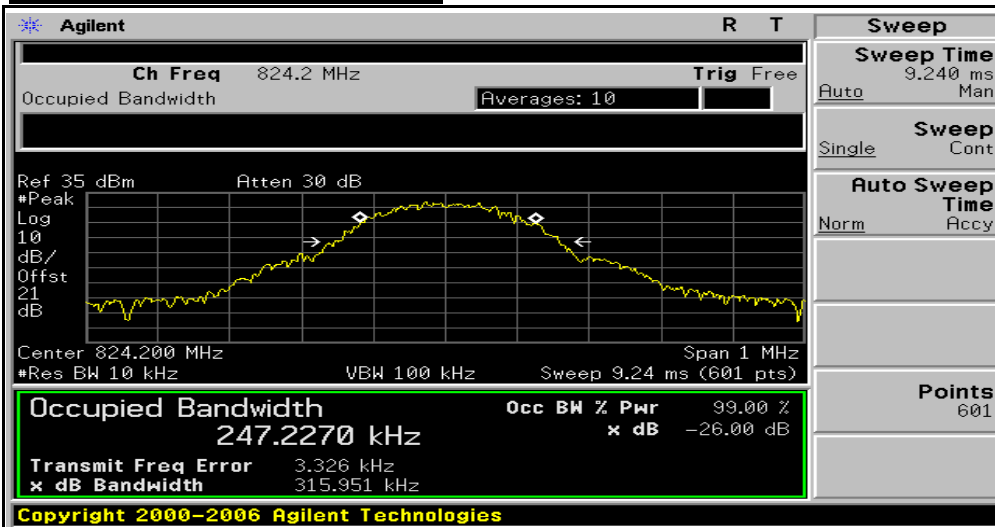

**26dB Channel Bandwidth(190)**

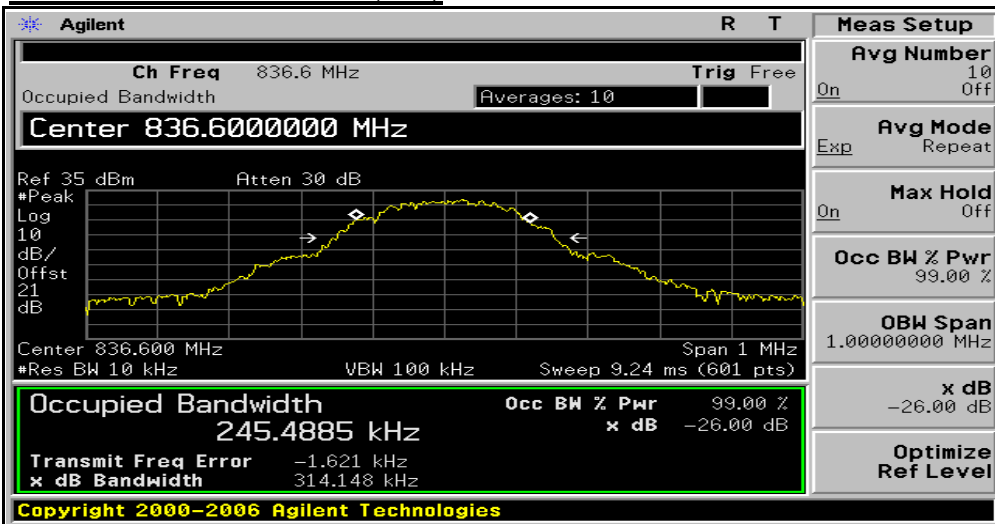

**26dB Channel Bandwidth(256)**

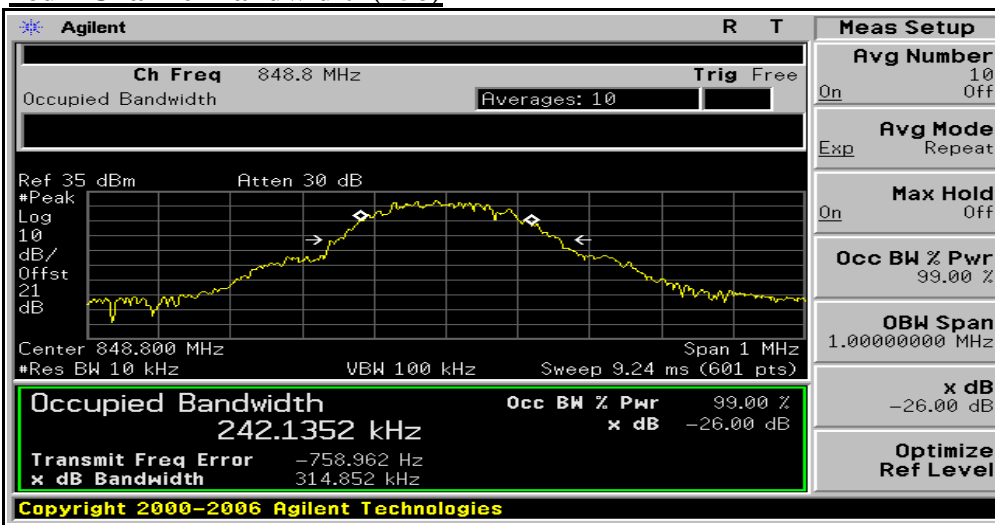


## 6. Spurious and Harmonic Emission at Antenna Terminal

### 6.1 Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to 10GHz. Set the RES BW to 1% of the emission bandwidth to show compliance with the -13dBm, limit, in the 1MHz bands immediately outside and adjacent to the top and bottom edges of the frequency block.

For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10xfo of the fundamental carrier for all frequency block. A display line was placed at -13dBm to show compliance for spurious, and harmonics.

22.917(f): Mobile emission in base frequency range. The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitter operated must be attenuated to a level not to exceed -80dBm at the transmit antenna connector.

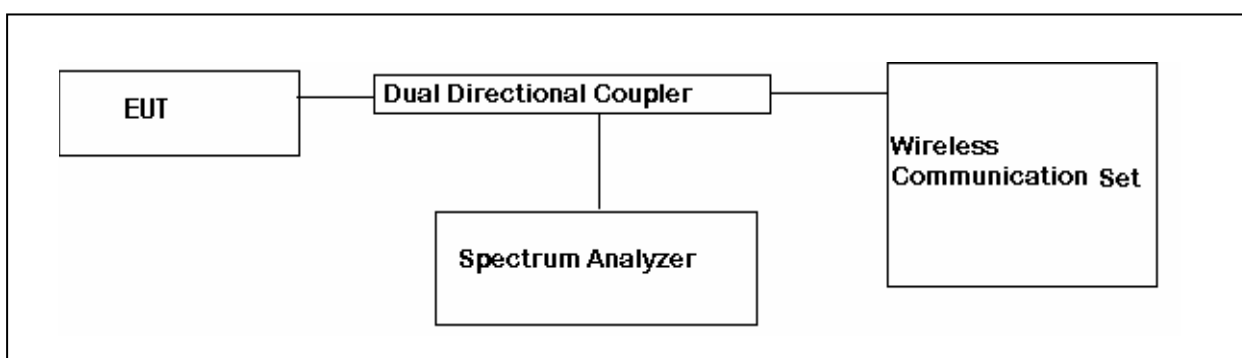

### 6.2 Test Equipments

The following test equipments are used during tests

Equipment	Manufacturer	Model	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	2010-09-10
Dual Directional Coupler	HP	778D	2011-02-25
Wireless Communications Test Set	Agilent	E5515C	2011-05-11

### 6.3 Test Results

#### 6.3.1 PCS1900

PCS1900 GSM(Spurious Emission: Band Edge)

Channel	Frequency	Result	Limit	Margin
512	1850.20	-15.11	-13.00	2.11
810	1909.80	-15.56	-13.00	2.56

PCS1900 GSM (Spurious Emission: Out of Band)

Channel	Frequency	Result	Limit	Margin
512	1850.20	-34.01	-13.00	21.01
661	1880.00	-34.02	-13.00	21.02
810	1909.80	-34.08	-13.00	21.08



**(GSM850)**

GSM850 (Spurious Emission: Band Edge)

Channel	Frequency	Result	Limit	Margin
128	824.20	-14.57	-13.00	1.57
251	848.80	-14.70	-13.00	1.70


GSM850 (Spurious Emission: Out of Band)

Channel	Frequency	Result	Limit	Margin
128	824.20	-26.66	-13.00	13.66
190	836.60	-25.88	-13.00	12.88
251	848.80	-26.98	-13.00	13.98


6.5 Test Plot

**PCS1900**

PLOT OF EMISSION (PCS1900):BAND EDGE (CH512)

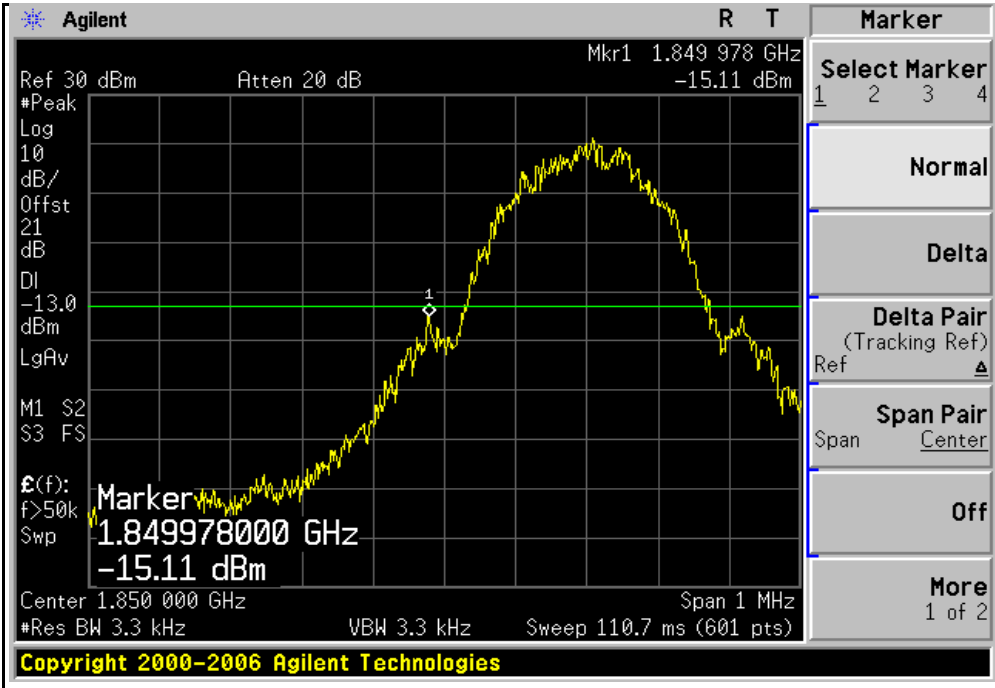


PLOT OF EMISSION (PCS1900):BAND EDGE (CH810)

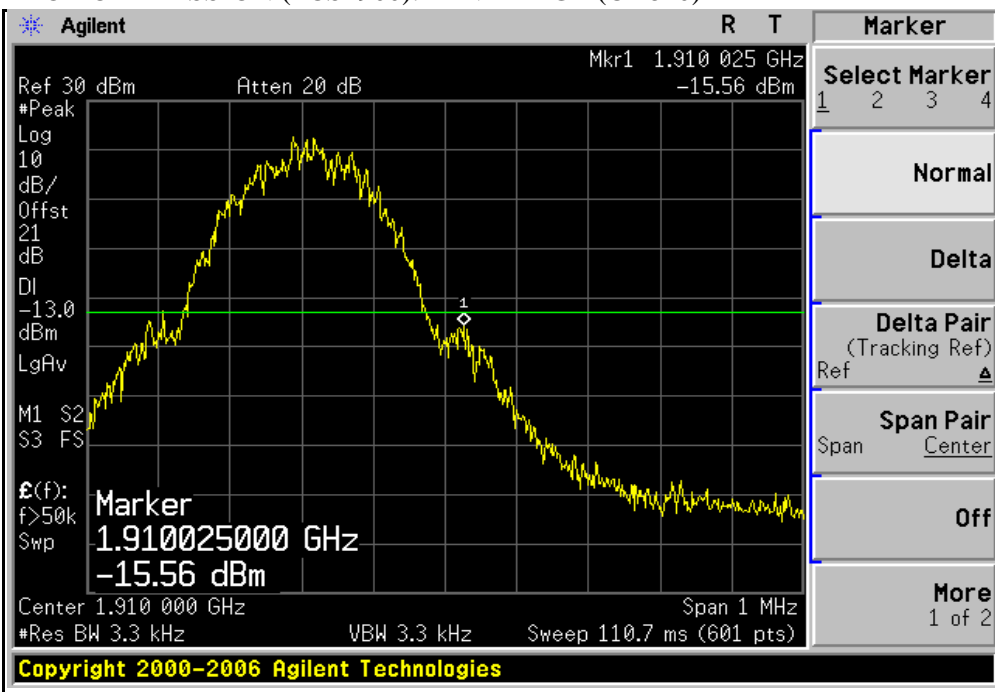




**GSM850**

PLOT OF EMISSION (GSM850):BAND EDGE (CH128)


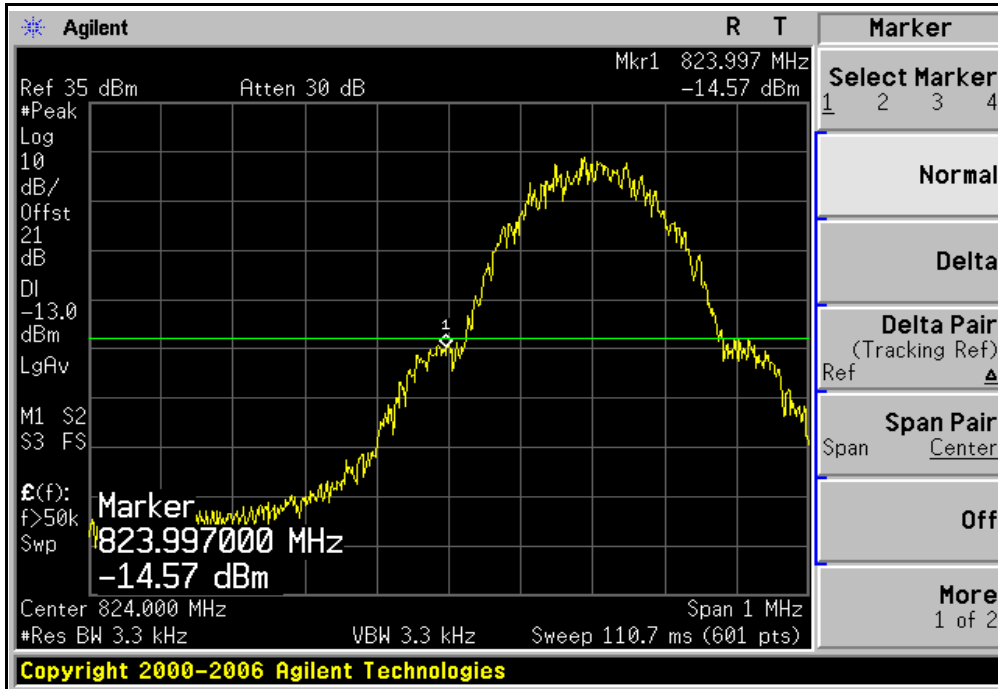


PLOT OF EMISSION (GSM850):BAND EDGE (CH251)

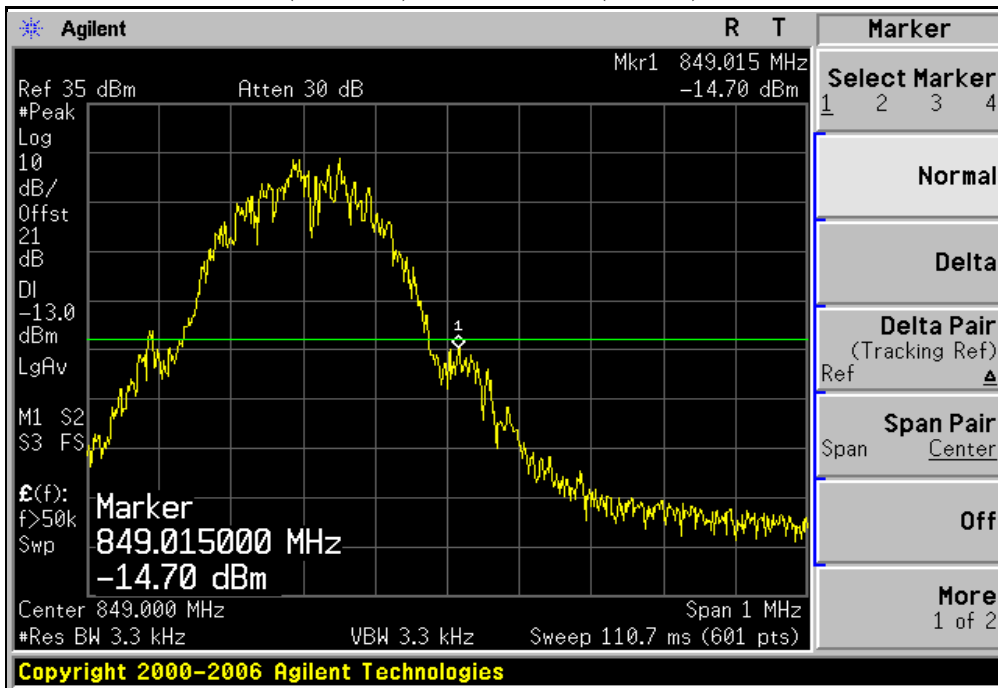



**PCS1900**

PLOTS OF EMISSION (PCS1900): OUT OF BAND(CH512)

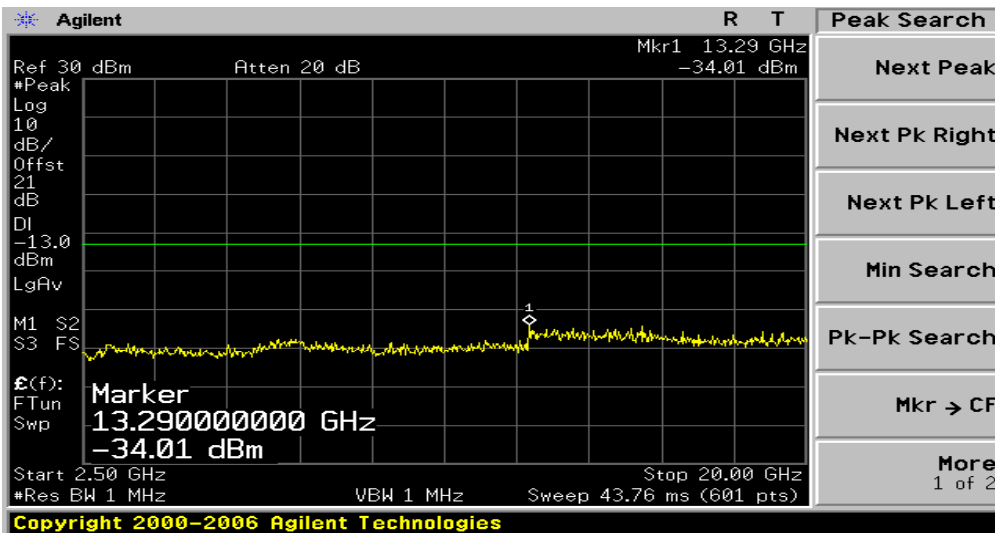
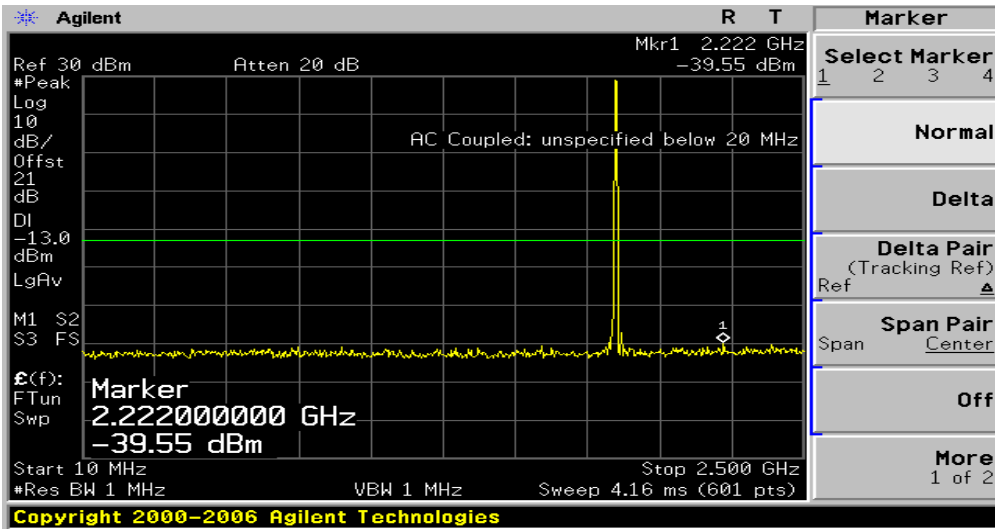


PLOTS OF EMISSION (PCS1900): OUT OF BAND(CH661)

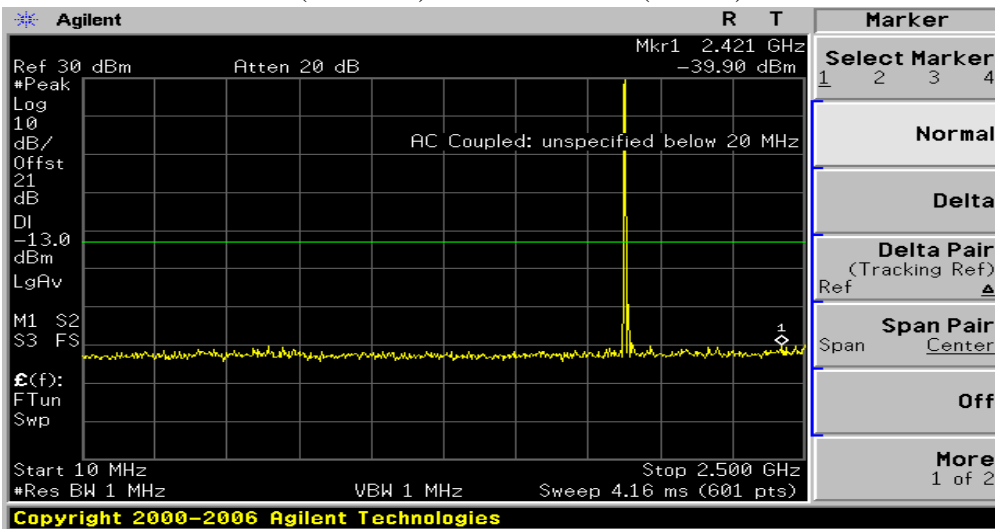

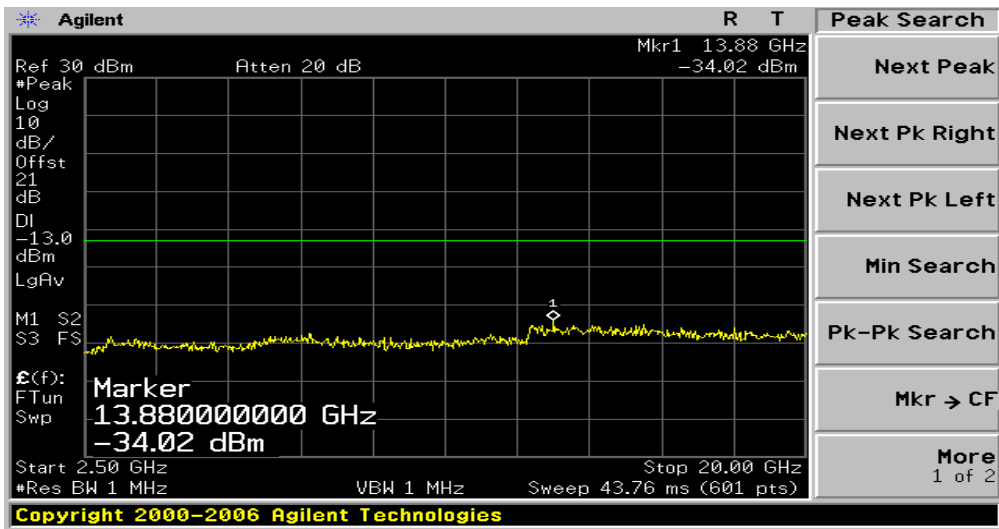



PLOTS OF EMISSION (PCS1900): OUT OF BAND(CH810)

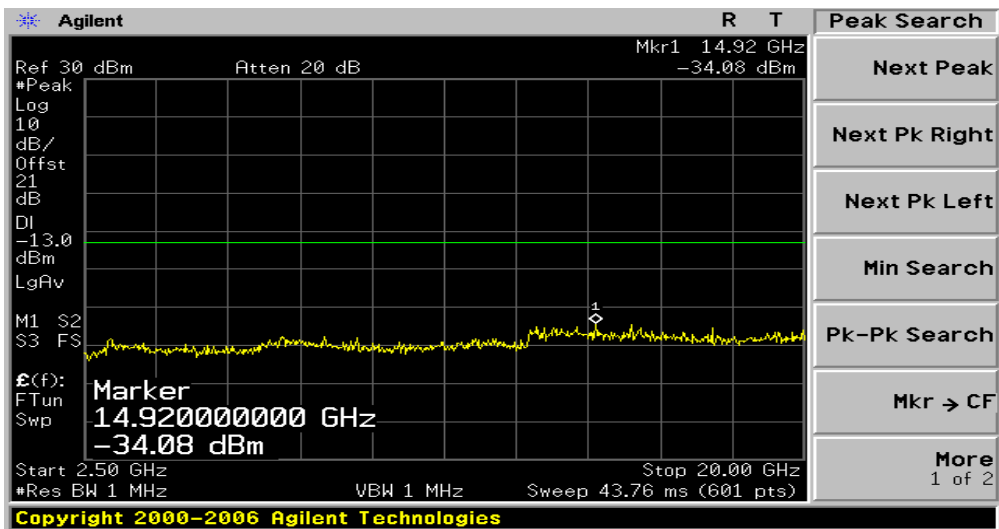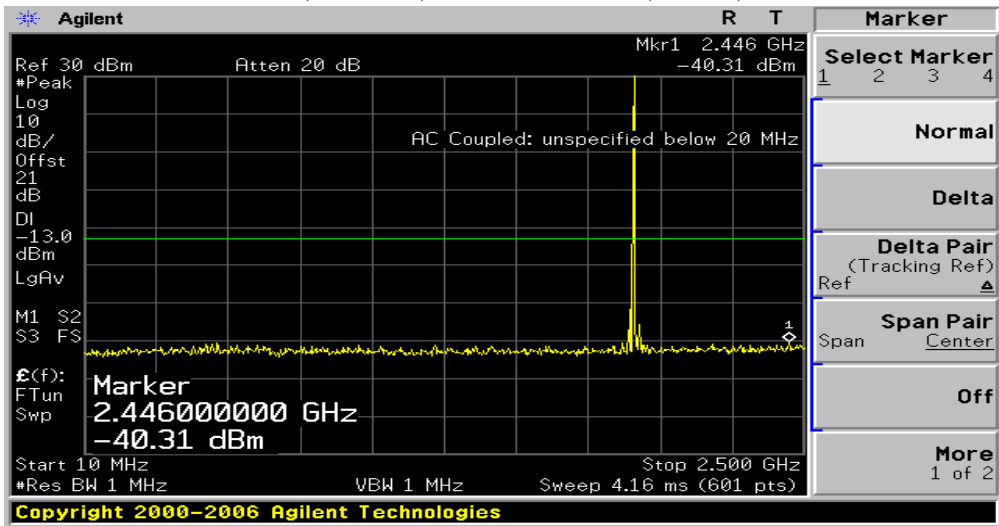





**GSM850**

PLOTS OF EMISSION (GSM850): OUT OF BAND(CH128)

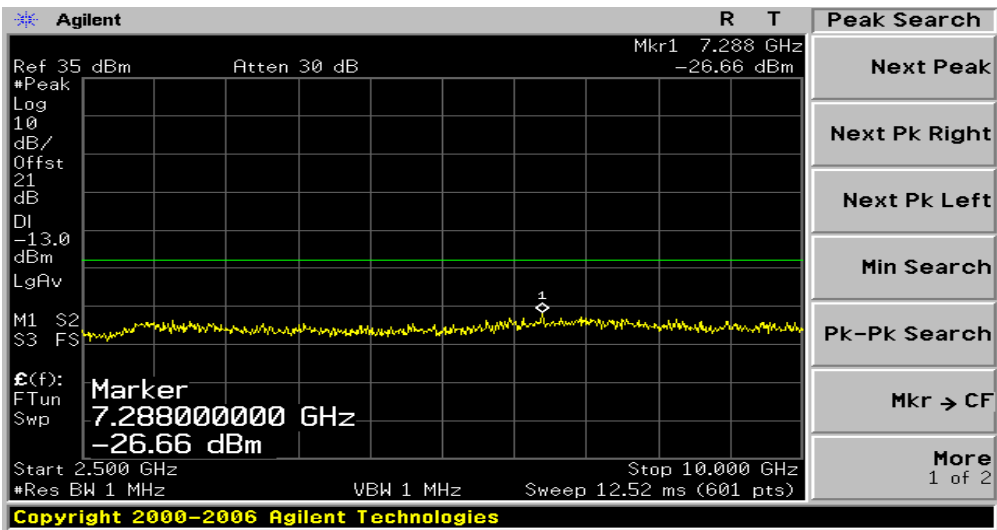
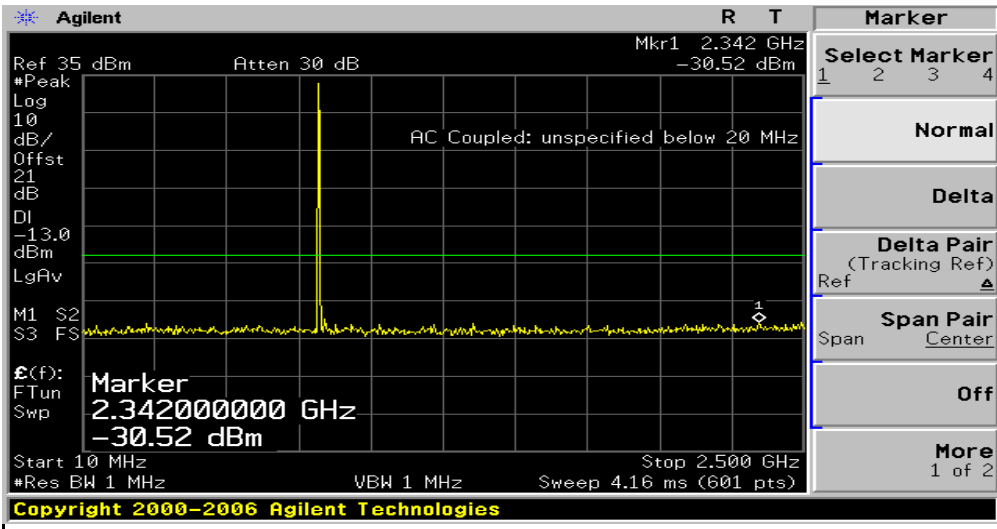


PLOTS OF EMISSION (GSM850): OUT OF BAND(CH190)

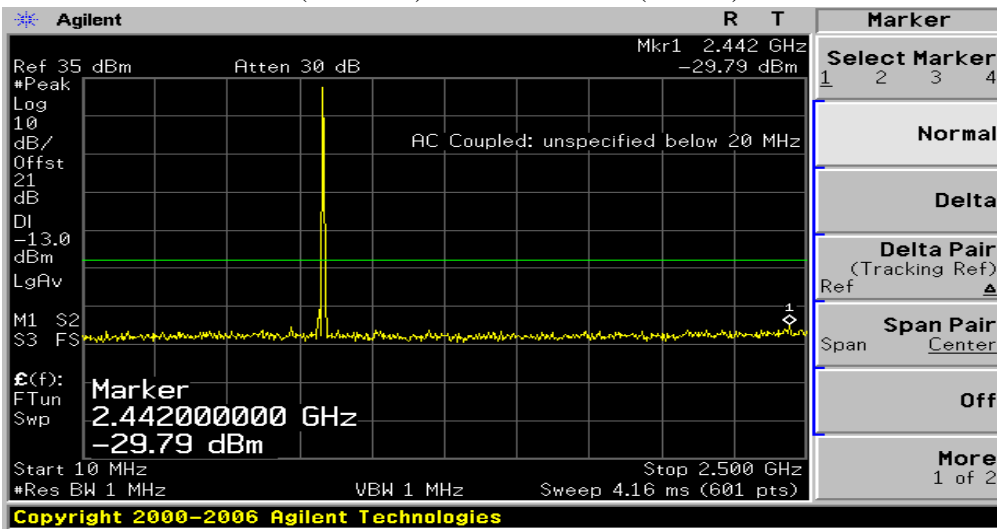

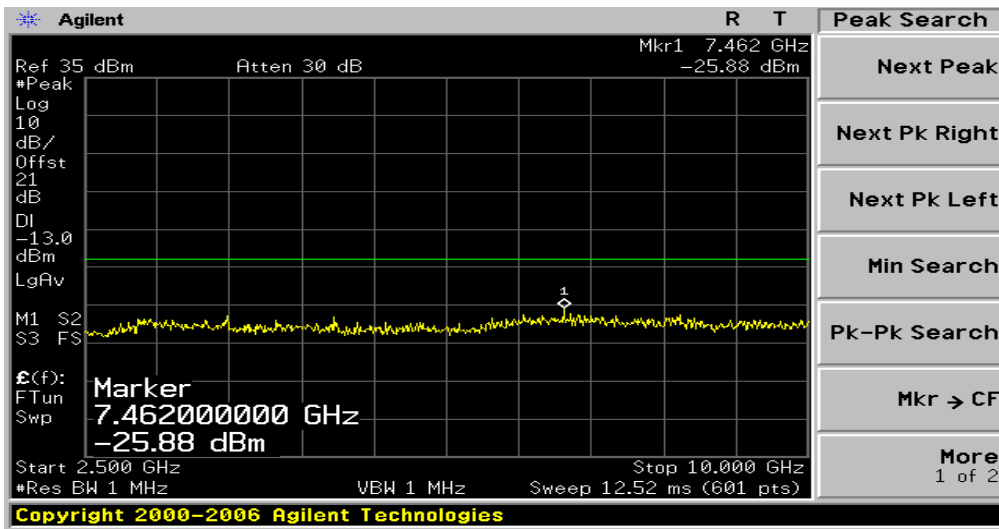


PLOTS OF EMISSION (GSM850): OUT OF BAND(CH251)

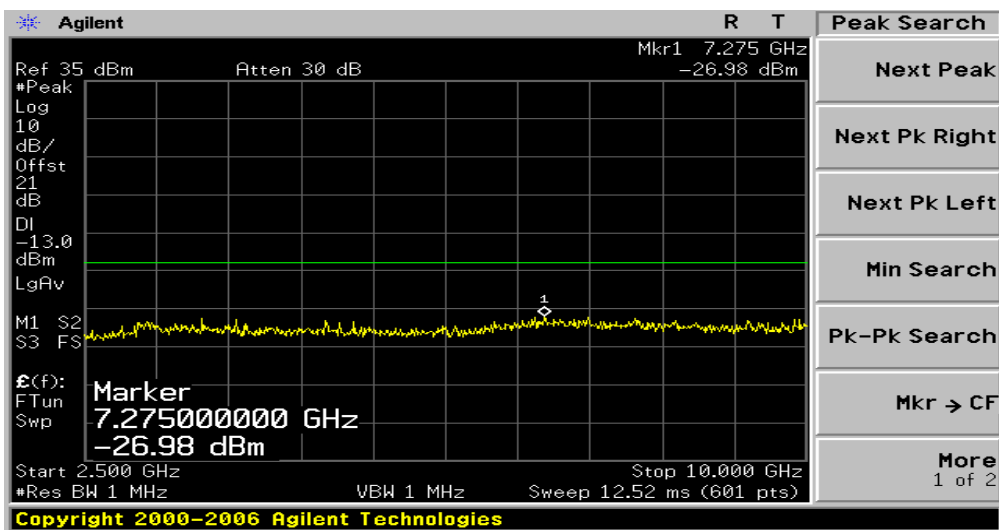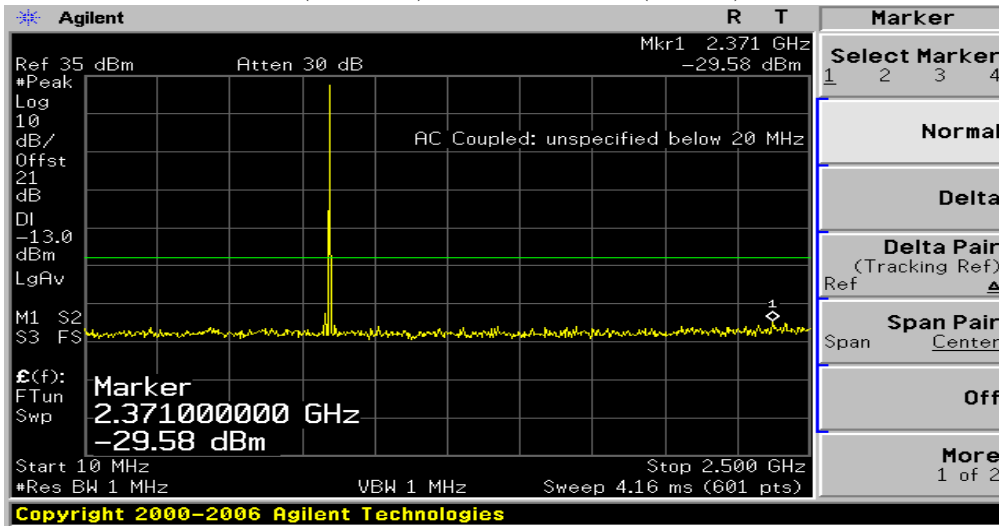



MOBILE EMISSION IN BASE FREQUENCY RANGE (RX BAND)

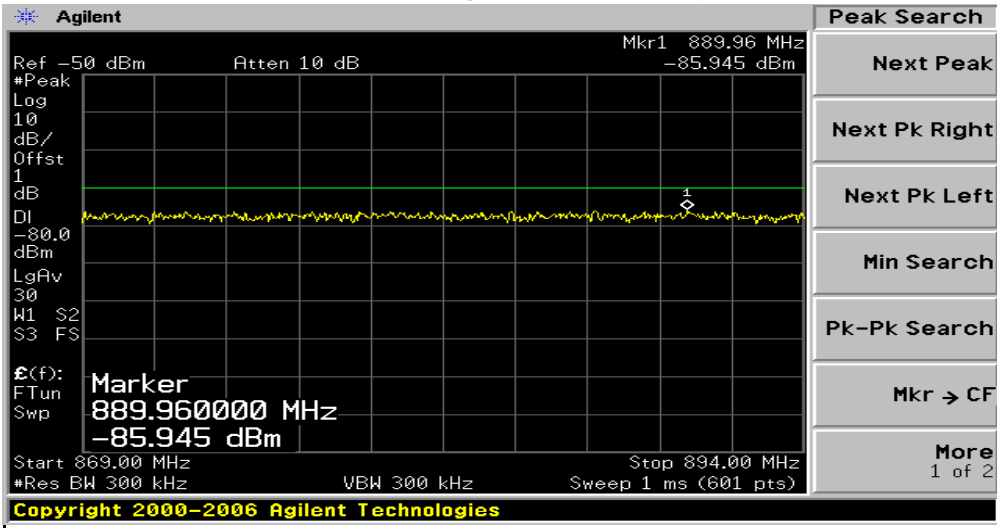

## 7. Field Strength of Spurious Radiation

### 7.1 Test Procedure(according to ANSI/TIA/EIA 603 Clause 3.2.12 ,FCC 22.917 & FCC 24.238)

Radiation and harmonic emission are measured outdoors at our 3 meters test range. The equipment under test is placed on a wooden turntable 3 meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer (or receiver). A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

### 7.2 Test Equipments


The following test equipments are used during tests

Equipment	Manufacturer	Model	Cal. Due Date
Receiver	Rohde & Schwarz	ESPI7	2010-08-27
Signal Generator	HP	83620B	2010-09-08
Wireless Communications Test Set	Agilent	E5515C	2011-02-01
Pre Amplifier	HP	8444B	2011-02-01
Horn Antenna	SCHWARZBECK	BBHA 9120 D	2010-06-30
Horn Antenna	SCHWARZBECK	BBHA 9120 D	2010-06-30


\* The TX signal isn't detected from 3rd harmonics.

### 7.3 Test Setup

Test setup for 30MHz to 1GHz

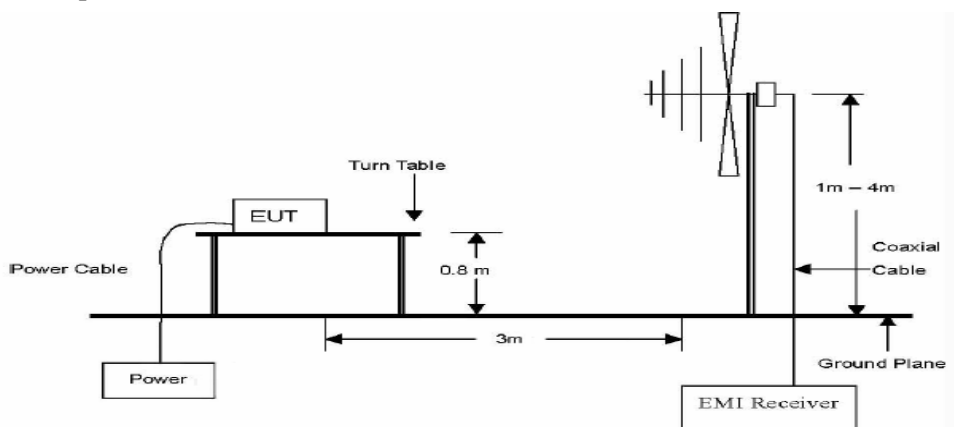

Test setup for above1GHz

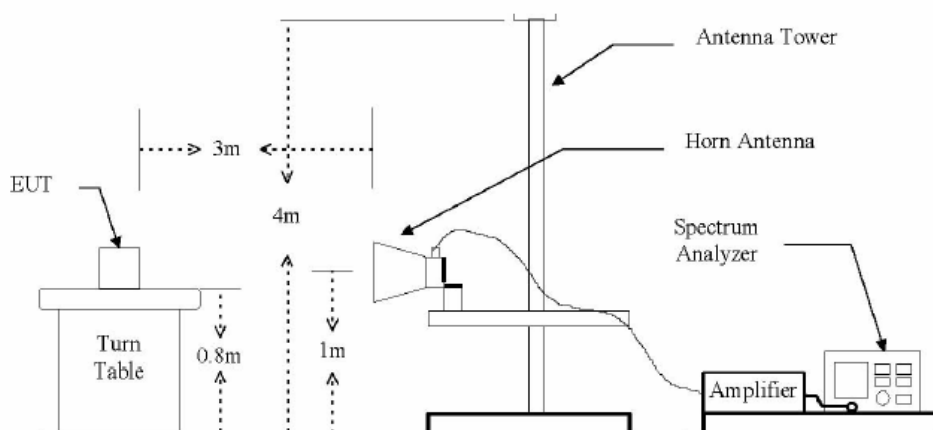

7.3 Test Results

**PCS1900**

**GSM(Ch 512)**

**Measured output power: 28.60dBm = 0.724W, Limit: 43+10log<sub>10</sub>(W)= 41.60dBc**

Frequency (MHz)	Receiver Reading(dBuV)	Correction Factor(dB)		EIRP(dBm)		dBc	Polarity
		AG(dBi)	CL(dB)	SG Reading	Result		
3700.40	45.10	12.69	19.10	-33.30	-39.71	68.31	H

**GSM(Ch 661)**

**Measured output power: 28.57dBm = 0.719W, Limit: 43+10log<sub>10</sub>(W)= 41.57dBc**

Frequency (MHz)	Receiver Reading(dBuV)	Correction Factor(dB)		EIRP(dBm)		dBc	Polarity
		AG(dBi)	CL(dB)	SG Reading	Result		
3760.00	44.40	12.75	19.50	-32.60	-39.35	67.92	H

**GSM(Ch 810)**

**Measured output power: 28.87dBm = 0.771W, Limit: 43+10log<sub>10</sub>(W)= 41.87dBc**

Frequency (MHz)	Receiver Reading(dBuV)	Correction Factor(dB)		EIRP(dBm)		dBc	Polarity
		AG(dBi)	CL(dB)	SG Reading	Result		
3819.60	44.20	12.75	19.50	-32.60	-39.35	68.22	V

Remark : E.R.P. & E.I.R.P = S.G level (dBm) - Cable loss (dB) + Ant. gain (dBd/dBi)



**GSM850**

**GSM(Ch 128)**

**Measured output power: 31.87dBm = 1.538W, Limit: 43+10log<sub>10</sub>(W)= 44.87dBc**

Frequency (MHz)	Receiver Reading(dBuV)	Correction Factor(dB)		EIRP(dBm)		dBc	Polarity
		AG(dBd)	CL(dB)	SG Reading	Result		
1648.40	46.10	9.77	11.60	-48.80	-50.63	82.50	V

**GSM(Ch 190)**

**Measured output power: 32.02dBm = 1.592W, Limit: 43+10log<sub>10</sub>(W)= 45.02dBc**

Frequency (MHz)	Receiver Reading(dBuV)	Correction Factor(dB)		EIRP(dBm)		dBc	Polarity
		AG(dBd)	CL(dB)	SG Reading	Result		
1673.20	45.20	9.94	11.70	-49.90	-51.66	83.68	V

**GSM(Ch 251)**

**Measured output power: 32.20dBm = 1.660W, Limit: 43+10log<sub>10</sub>(W)= 45.20dBc**

Frequency (MHz)	Receiver Reading(dBuV)	Correction Factor(dB)		EIRP(dBm)		dBc	Polarity
		AG(dBd)	CL(dB)	SG Reading	Result		
1697.60	46.10	10.12	11.80	-48.80	-50.48	82.68	V

Remark : E.R.P. & E.I.R.P = S.G level (dBm) - Cable loss (dB) + Ant. gain (dBd/dBi)


## 8. Frequency stability

### 8.1 Test Procedure

The frequency stability of the transmitter is measured by:

- a) **Temperature:** The temperature is varied from -30°C to +60°C using an environmental chamber.
- b) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

※ The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±2.5ppm of the center frequency.

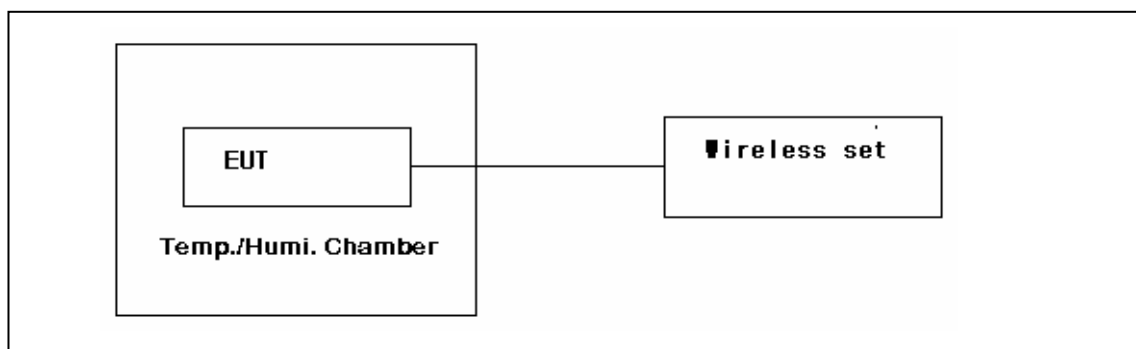

### 8.2 Test Equipments

The following test equipments are used during tests

Equipment	Manufacturer	Model	Cal. Due Date
Wireless Communications Test Set	Agilent	E5515C	2011-02-01
DC Power Supply	INTERACT	AK-3010	2011-02-25
Tem/Hum Chamber	Myung Technology	SM-150-2	2011-02-09

**8.3 Test Results**

**PCS1900**

Operating Frequency :	1,880,000,000
Channel :	661
Reference Voltage :	3.70
Deviatin Limit(ppm) :	± 2.5

Voltage (%)	Power (VDC)	Temperature (°C)	Frequency (Hz)	Deviation (ppm)
100	3.70	+20 °C (Ref)	1,880,000,000	0.000
100		-30	1,879,999,978	0.012
100		-20	1,879,999,974	0.014
100		-10	1,879,999,975	0.013
100		0	1,879,999,973	0.014
100		10	1,879,999,985	0.008
100		20	1,880,000,000	0.000
100		25	1,879,999,971	0.015
100		30	1,879,999,974	0.014
100		40	1,879,999,982	0.010
100		50	1,879,999,972	0.015
100		60	1,879,999,972	0.015
85		3.15	20	1,879,999,972
115	4.26	20	1,879,999,975	0.013
Batt EndPoint	3.00	20	1,879,999,974	0.014






**GSM850**

Operting Frequency :	836,600,000
Channel :	190
Reference Voltage :	3.70
Deviatin Limit(ppm) :	± 2.5

Voltage (%)	Power (VDC)	Temperature (°C)	Frequency (Hz)	Deviation (ppm)
100	3.70	+20 °C (Ref)	836,600,001	0.000
100		-30	836,599,972	0.035
100		-20	836,599,975	0.031
100		-10	836,599,984	0.020
100		0	836,599,983	0.022
100		10	836,599,972	0.035
100		20	836,600,001	0.000
100		25	836,599,982	0.023
100		30	836,599,984	0.020
100		40	836,599,976	0.030
100		50	836,599,978	0.027
100		60	836,599,973	0.033
85		3.15	20	836,599,974
115	4.26	20	836,599,983	0.022
Batt EndPoint	3.00	20	836,599,974	0.032

**Attachment 1 : EUT Test Photographs**

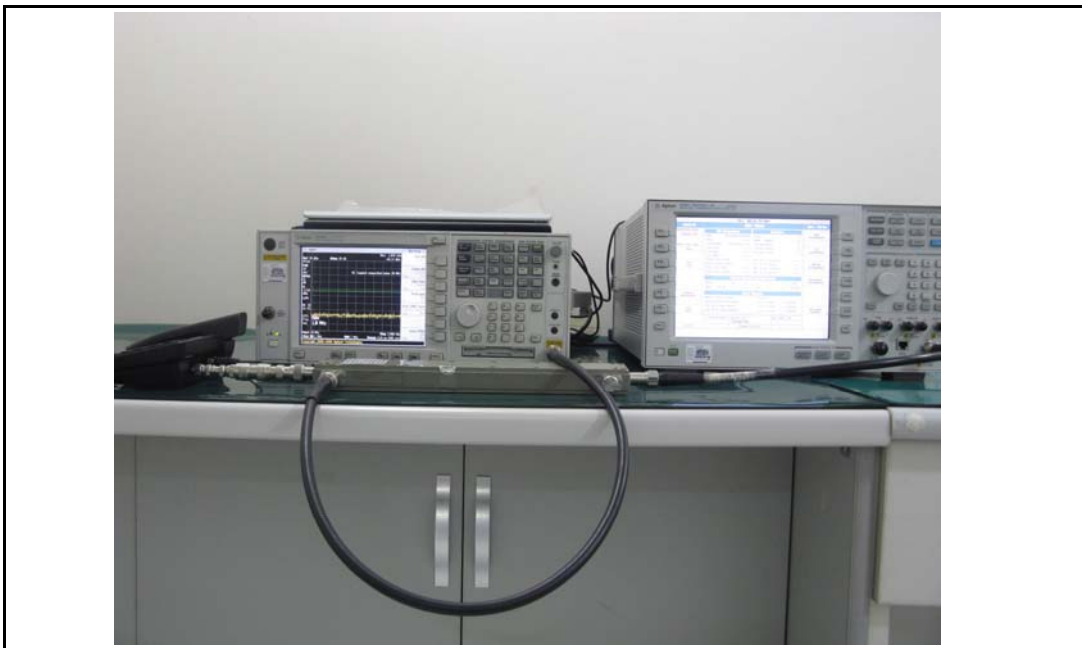

**Attachment 2 : EUT Photographs**



**Attachment 2 : EUT Photographs**

