

FCC CERTIFICATION  
On Behalf of  
Eastern Times Technology Co., Ltd.

2.4G Wireless Laser Mouse  
Model No.: DS-2240

FCC ID: TUV2240

Prepared for : Eastern Times Technology Co., Ltd.  
Address : Building 5, Penghua Industry Park, Heping Rd.(W),  
Longhua, Shenzhen, Guangdong, China

Prepared by : ACCURATE TECHNOLOGY CO. LTD  
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report Number : ATE20091963  
Date of Test : September 28, 2009  
Date of Report : September 29, 2009

## TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility .....	4
1.3. Measurement Uncertainty .....	5
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>6</b>
<b>3. SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>4. FUNDAMENTAL AND HARMONICS RADIATED EMISSION FOR SECTION 15.249(A) 8</b>	<b>8</b>
4.1. Block Diagram of Test Setup.....	8
4.2. The Emission Limit .....	9
4.3. Configuration of EUT on Measurement .....	9
4.4. Operating Condition of EUT .....	9
4.5. Test Procedure .....	10
4.6. The Field Strength of Radiation Emission Measurement Results .....	11
<b>5. SPURIOUS RADIATED EMISSION FOR SECTION 15.249(D) .....</b>	<b>14</b>
5.1. Block Diagram of Test Setup.....	14
5.2. The Emission Limit For Section 15.249(d) .....	15
5.3. EUT Configuration on Measurement .....	15
5.4. Operating Condition of EUT .....	15
5.5. Test Procedure .....	16
5.6. The Emission Measurement Result .....	17
<b>6. BAND EDGES .....</b>	<b>20</b>
6.1. The Requirement .....	20
6.2. EUT Configuration on Measurement .....	20
6.3. Operating Condition of EUT .....	20
6.4. Test Procedure .....	20
6.5. The Measurement Result .....	21
<b>7. ANTENNA REQUIREMENT.....</b>	<b>23</b>
7.1. The Requirement .....	23
7.2. Antenna Construction .....	23

APPENDIX I ( TEST CURVES) (22 pages)

## Test Report Certification

Applicant : Eastern Times Technology Co., Ltd.  
Manufacturer : Eastern Times Technology Co., Ltd.  
EUT Description : 2.4G Wireless Laser Mouse  
(A) MODEL NO.: DS-2240  
(B) SERIAL NO.: N/A  
(C) POWER SUPPLY: 3V DC (“AAA” batteries 2×)


Measurement Procedure Used:


**FCC Rules and Regulations Part 15 Subpart C Section 15.249**  
**ANSI C63.4: 2003**

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.249 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : September 28, 2009

Prepared by :   
(Engineer)

Approved & Authorized Signer :   
(Manager)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT	:	2.4G Wireless Laser Mouse
Model Number	:	DS-2240
Power Supply	:	3V DC (“AAA” batteries 2×)
Operate Frequency	:	2402-2478MHz
Channel Number	:	64
Applicant Address	:	Eastern Times Technology Co., Ltd. Building 5, Penghua Industry Park, Heping Rd.(W), Longhua, Shenzhen, Guangdong, China
Manufacturer Address	:	Eastern Times Technology Co., Ltd. Building 5, Penghua Industry Park, Heping Rd.(W), Longhua, Shenzhen, Guangdong, China
Date of sample received	:	September 22, 2009
Date of Test	:	September 28, 2009

### 1.2. Description of Test Facility

EMC Lab	:	Accredited by TUV Rheinland Shenzhen  Listed by FCC The Registration Number is 752051  Listed by Industry Canada The Registration Number is 5077A-2  Accredited by China National Accreditation Committee for Laboratories The Certificate Registration Number is L3193
Name of Firm	:	ACCURATE TECHNOLOGY CO. LTD
Site Location	:	F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

### 1.3.Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty  
(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty  
(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty  
(Above 1GHz) = 4.06dB, k=2

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	03.28.2010
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	03.28.2010
Spectrum Analyzer	Agilent	E7405A	MY45115511	03.28.2010
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	03.30.2010
Loop Antenna	Schwarzbeck	FMZB1516	1516131	03.28.2010
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	03.28.2010
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	12.19.2009
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	10.09.2009
LISN	Rohde&Schwarz	ESH3-Z5	100305	03.28.2010
LISN	Schwarzbeck	NSLK8126	8126431	03.28.2010

### 3. SUMMARY OF TEST RESULTS

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
Section 15.207	Conducted Emission	N/A
Section 15.249(a)	Fundamental and Harmonics Radiated Emission	Compliant
Section 15.249(d)	Spurious Radiated Emission	Compliant
Section 15.249(d)	Band Edge	Compliant
Section 15.203	Antenna Requirement	Compliant

Remark: "N/A" means "Not applicable".

# 4. FUNDAMENTAL AND HARMONICS RADIATED EMISSION FOR SECTION 15.249(A)


## 4.1. Block Diagram of Test Setup

### 4.1.1. Block diagram of connection between the EUT and simulators



(EUT: 2.4G Wireless Laser Mouse)

### 4.1.2. Semi-Anechoic Chamber Test Setup Diagram

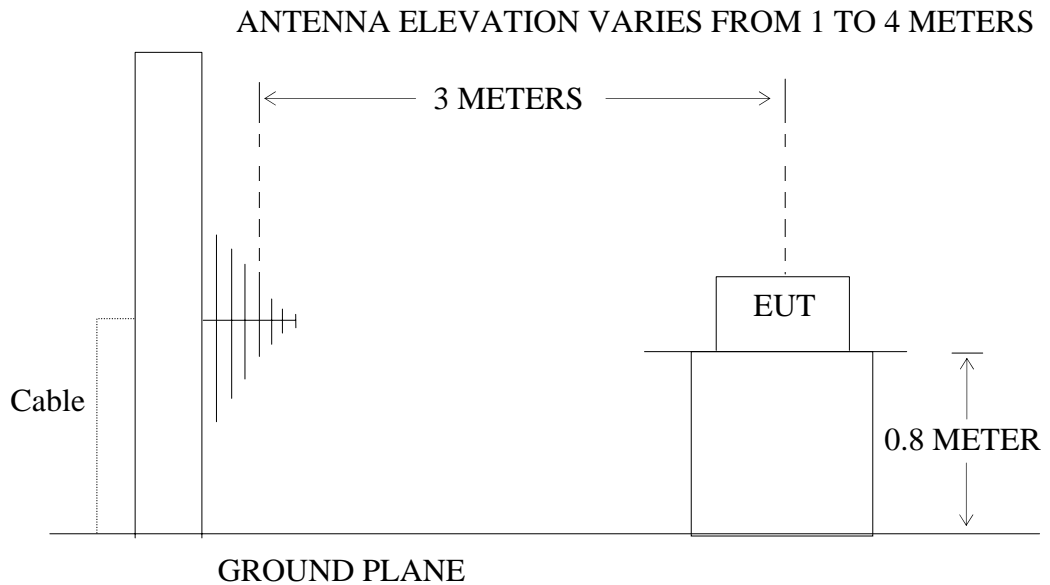

(EUT: 2.4G Wireless Laser Mouse)



## 4.2.The Emission Limit

4.2.1.For intentional radiators, According to section 15.249(a), Operation within the frequency band of 2.4 to 2.4835GHz, The fundamental field strength shall not exceed 94 dB $\mu$ V/m and the harmonics shall not exceed 54 dB $\mu$ V/m.

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of harmonics (microvolts/meter)
902-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

4.2.2.According to section 15.249(e), as shown in section 15.35(b), the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

## 4.3.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 4.3.1. 2.4G Wireless Laser Mouse (EUT)

Model Number : DS-2240  
 Serial Number : N/A  
 Manufacturer : Eastern Times Technology Co., Ltd.

## 4.4.Operating Condition of EUT

4.4.1.Setup the EUT and simulator as shown as Section 4.1.

4.4.2.Turn on the power of all equipment.

4.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2478MHz. We are select 2402MHz, 2440MHz, 2478MHz TX frequency to transmit.

#### 4.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 1MHz.

## 4.6. The Field Strength of Radiation Emission Measurement Results

### PASS.

Date of Test:	September 28, 2009	Temperature:	25°C
EUT:	2.4G Wireless Laser Mouse	Humidity:	50%
Model No.:	DS-2240	Power Supply:	3V DC ("AAA" batteries 2×)
Test Mode:	TX 2402MHz	Test Engineer:	Joe

### Fundamental Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2402.275	89.87	95.79	-7.45	82.42	88.34	94	114	-11.58	-25.66	Vertical
2402.275	95.07	100.93	-7.45	87.62	93.48	94	114	-6.38	-20.52	Horizontal

### Harmonics Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4804.551	43.08	48.94	-7.45	82.42	88.34	54	74	-11.22	-25.36	Vertical
4804.551	48.79	54.68	-0.30	48.49	54.38	54	74	-5.51	-19.62	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	<u>September 28, 2009</u>	Temperature:	<u>25°C</u>
EUT:	<u>2.4G Wireless Laser Mouse</u>	Humidity:	<u>50%</u>
Model No.:	<u>DS-2240</u>	Power Supply:	<u>3V DC (“AAA” batteries 2×)</u>
Test Mode:	<u>TX 2440MHz</u>	Test Engineer:	<u>Joe</u>

### Fundamental Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2440.272	88.49	94.36	-7.36	81.13	87.00	94	114	-12.87	-27.00	Vertical
2440.272	94.78	100.67	-7.36	87.42	93.31	94	114	-6.58	-20.69	Horizontal

### Harmonics Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4880.542	42.14	48.02	0.13	42.27	48.15	54	74	-11.73	-25.85	Vertical
4880.542	47.24	53.11	0.13	47.37	53.24	54	74	-6.63	-20.76	Horizontal

Note:

- Emissions attenuated more than 20 dB below the permissible value are not reported.
- The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:  

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain
- The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	<u>September 28, 2009</u>	Temperature:	<u>25°C</u>
EUT:	<u>2.4G Wireless Laser Mouse</u>	Humidity:	<u>50%</u>
Model No.:	<u>DS-2240</u>	Power Supply:	<u>3V DC ("AAA" batteries 2×)</u>
Test Mode:	<u>TX 2478MHz</u>	Test Engineer:	<u>Joe</u>

### Fundamental Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2478.273	88.59	94.51	-7.37	81.22	87.14	94	114	-12.78	-26.86	Vertical
2478.273	94.88	100.77	-7.37	87.51	93.40	94	114	-6.49	-20.60	Horizontal

### Harmonics Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4956.545	42.50	48.41	0.51	43.01	48.92	54	74	-10.99	-25.08	Vertical
4956.545	48.27	54.18	0.51	48.78	54.69	54	74	-5.22	-19.31	Horizontal

Note:

- Emissions attenuated more than 20 dB below the permissible value are not reported.
- The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:  

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain
- The spectral diagrams in appendix I display the measurement of peak values.

## 5. SPURIOUS RADIATED EMISSION FOR SECTION 15.249(D)


### 5.1. Block Diagram of Test Setup

#### 5.1.1. Block diagram of connection between the EUT and simulators



(EUT: 2.4G Wireless Laser Mouse)

#### 5.1.2. Semi-Anechoic Chamber Test Setup Diagram

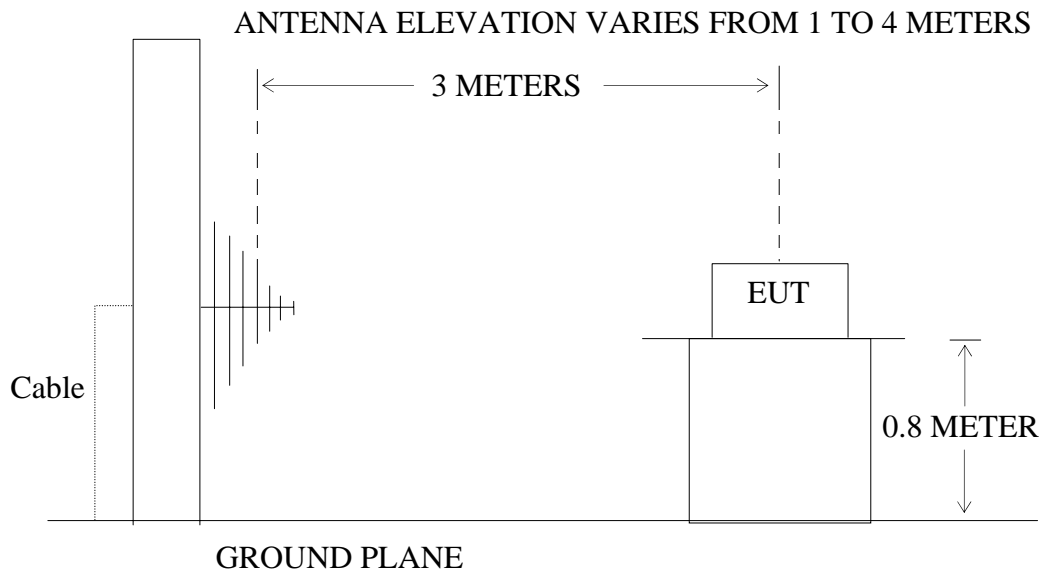

(EUT: 2.4G Wireless Laser Mouse)

5.2.The Emission Limit For Section 15.249(d)

5.2.1.Emission radiated outside of the specified frequency bands, except for harmonics, shall be comply with the general radiated emission limits in Section 15.209.

Radiation Emission Measurement Limits According to Section 15.209

Frequency (MHz)	Limit		The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.
	Field Strength of Quasi-peak Value (microvolts/m)	Field Strength of Quasi-peak Value (dBμV/m)	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	

5.3.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1. 2.4G Wireless Laser Mouse (EUT)

- Model Number : DS-2240
- Serial Number : N/A
- Manufacturer : Eastern Times Technology Co., Ltd.

5.4.Operating Condition of EUT

5.4.1.Setup the EUT and simulator as shown as Section 5.1.

5.4.2.Turn on the power of all equipment.

5.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2478MHz. We are select 2402MHz, 2440MHz, 2478MHz TX frequency to transmit.

## 5.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 120kHz in 30-1000MHz. and set at 1MHz in above 1000MHz.

The frequency range from 30MHz to 25000MHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.



## 5.6.The Emission Measurement Result

**PASS.**

Date of Test:	<u>September 28, 2009</u>	Temperature:	<u>25°C</u>
EUT:	<u>2.4G Wireless Laser Mouse</u>	Humidity:	<u>50%</u>
Model No.:	<u>DS-2240</u>	Power Supply:	<u>3V DC (“AAA” batteries 2×)</u>
Test Mode:	<u>TX 2402MHz</u>	Test Engineer:	<u>Joe</u>

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	<u>September 28, 2009</u>	Temperature:	<u>25°C</u>
EUT:	<u>2.4G Wireless Laser Mouse</u>	Humidity:	<u>50%</u>
Model No.:	<u>DS-2240</u>	Power Supply:	<u>3V DC (“AAA” batteries 2×)</u>
Test Mode:	<u>TX 2440MHz</u>	Test Engineer:	<u>Joe</u>

Frequency (MHz)	Reading (dBµV/m)	Factor(dB) Corr.	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	<u>September 28, 2009</u>	Temperature:	<u>25°C</u>
EUT:	<u>2.4G Wireless Laser Mouse</u>	Humidity:	<u>50%</u>
Model No.:	<u>DS-2240</u>	Power Supply:	<u>3V DC (“AAA” batteries 2×)</u>
Test Mode:	<u>TX 2478MHz</u>	Test Engineer:	<u>Joe</u>

Frequency (MHz)	Reading (dBµV/m)	Factor(dB) Corr.	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	Vertical
-	-	-	-	-	-	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

3. The spectral diagrams in appendix I display the measurement of peak values.

## 6. BAND EDGES

### 6.1. The Requirement

6.1.1. Band Edge from 2400MHz to 2483.5MHz. Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

### 6.2. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 6.2.1. 2.4G Wireless Laser Mouse (EUT)

Model Number : DS-2240  
Serial Number : N/A  
Manufacturer : Eastern Times Technology Co., Ltd.

### 6.3. Operating Condition of EUT

6.3.1. Setup the EUT and simulator as shown as Section 4.1.

6.3.2. Turn on the power of all equipment.

6.3.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2478MHz. We are select 2402MHz, 2478MHz TX frequency to transmit.

### 6.4. Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:  
RBW=1MHz, VBW=1MHz

## 6.5.The Measurement Result

**Pass.**

Date of Test:	<u>September 28, 2009</u>	Temperature:	<u>25°C</u>
EUT:	<u>2.4G Wireless Laser Mouse</u>	Humidity:	<u>50%</u>
Model No.:	<u>DS-2240</u>	Power Supply:	<u>3V DC (“AAA” batteries 2×)</u>
Test Mode:	<u>TX 2402MHz</u>	Test Engineer:	<u>Joe</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2400.000	48.25	54.12	-7.46	40.79	46.66	54	74	-13.21	-27.34	Vertical
2400.000	53.07	58.96	-7.46	45.61	51.50	54	74	-8.39	-22.50	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	<u>September 28, 2009</u>	Temperature:	<u>25°C</u>
EUT:	<u>2.4G Wireless Laser Mouse</u>	Humidity:	<u>50%</u>
Model No.:	<u>DS-2240</u>	Power Supply:	<u>3V DC ("AAA" batteries 2×)</u>
Test Mode:	<u>TX 2478MHz</u>	Test Engineer:	<u>Joe</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	43.01	48.91	-7.37	35.64	41.54	54	74	-18.36	-32.46	Vertical
2483.500	43.92	49.79	-7.37	36.55	42.42	54	74	-17.45	-31.58	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

3. The spectral diagrams in appendix I display the measurement of peak values.


## 7. ANTENNA REQUIREMENT

### 7.1.The Requirement

7.1.1. According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 7.2. Antenna Construction

The antenna is PCB Layout antenna, no consideration of replacement.

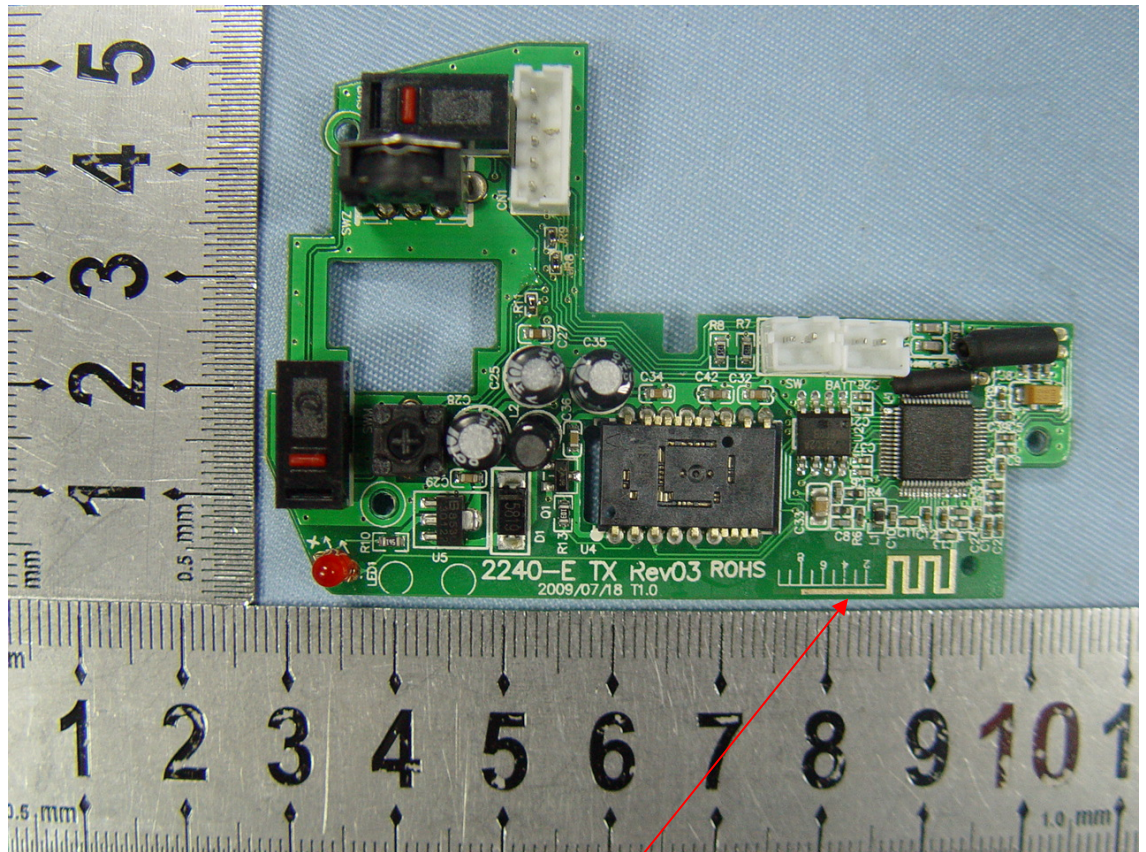

Antenna

# APPENDIX I (Test Curves)






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3263	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 9/00/19
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2402MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

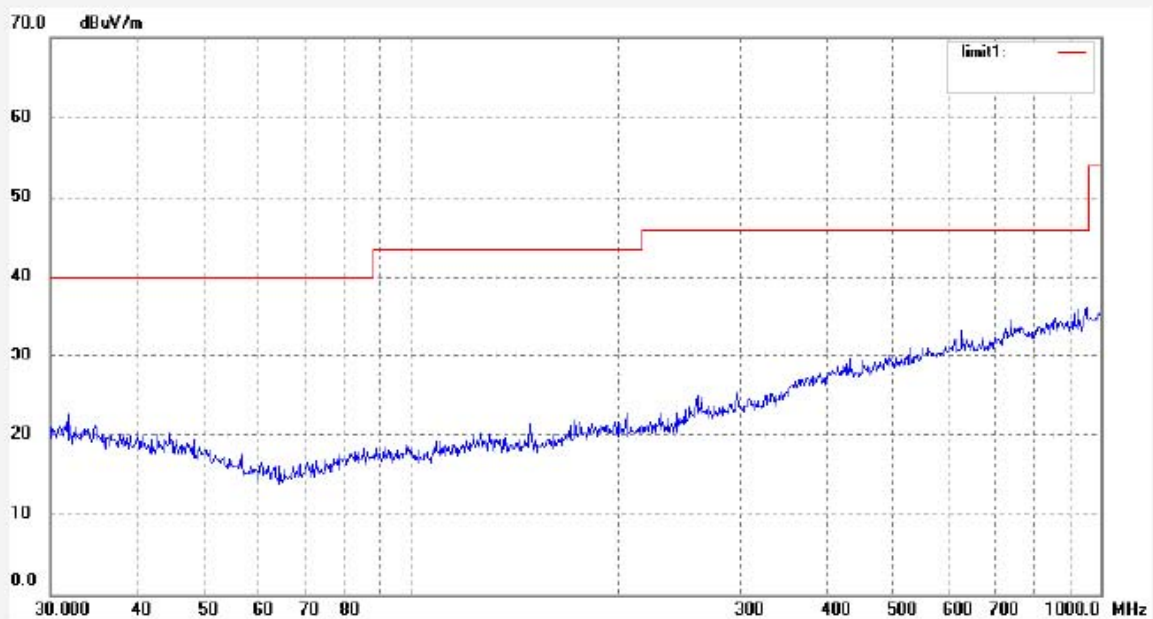

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3264	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 9/03/21
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2402MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

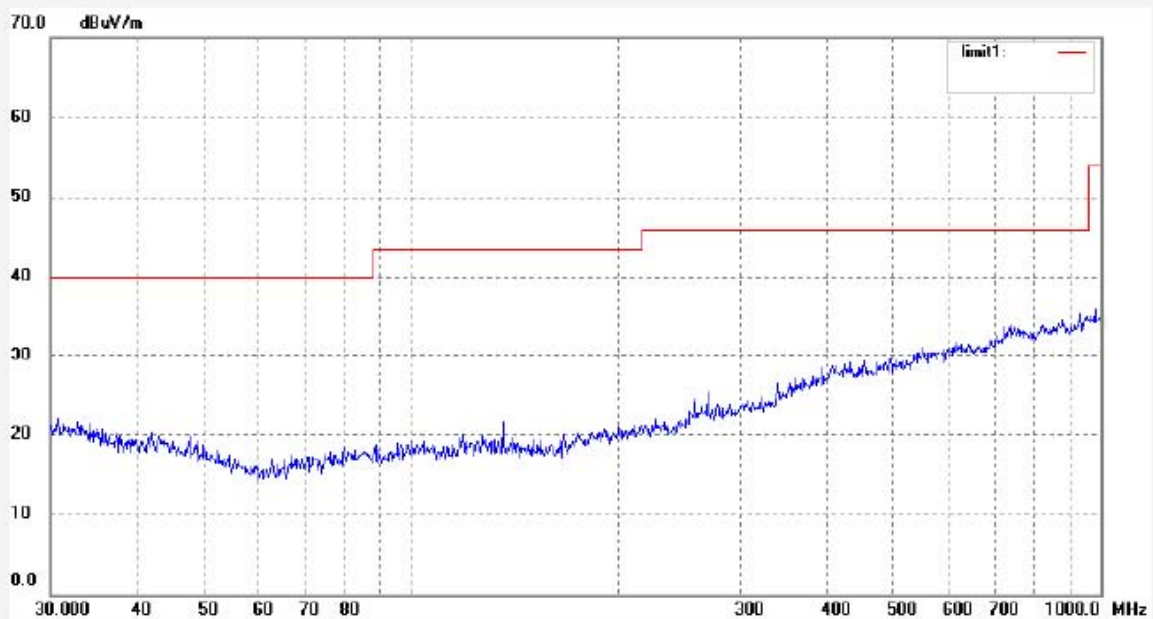

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3286	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 11/07/38
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2402MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

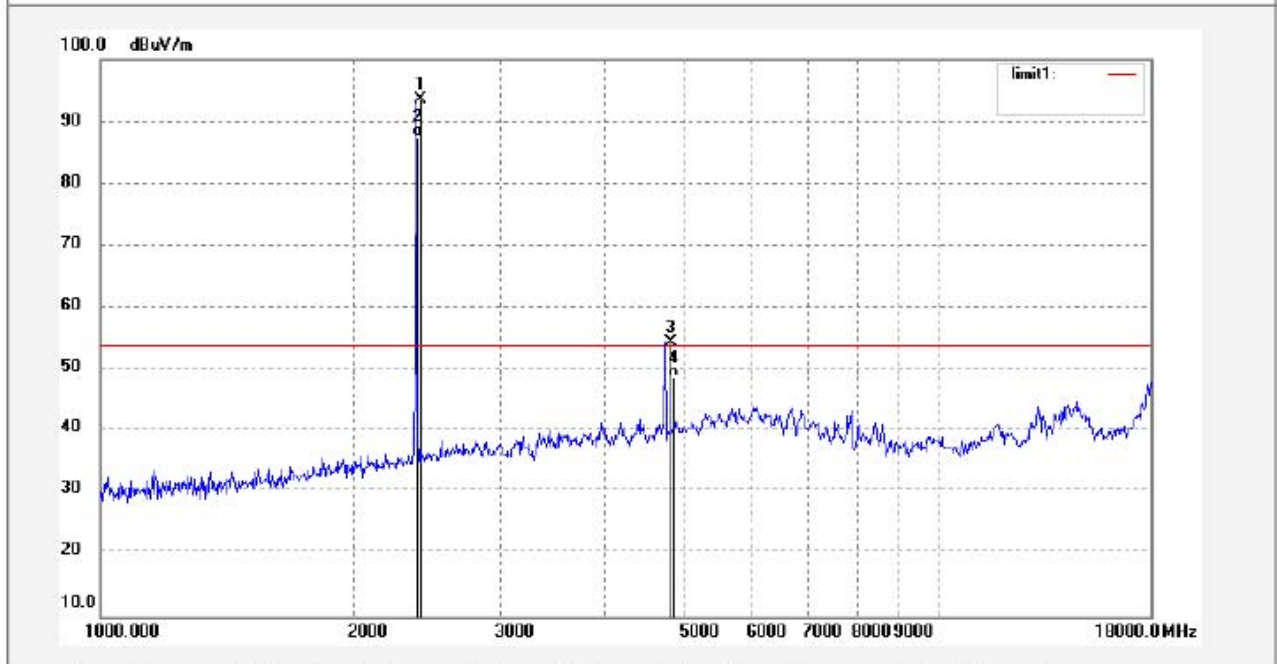

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.275	100.93	-7.45	93.48	114.00	-20.52	peak			
2	2402.275	95.07	-7.45	87.62	94.00	-6.38	AVG			
3	4804.551	54.68	-0.30	54.38	74.00	-19.62	peak			
4	4804.551	48.79	-0.30	48.49	54.00	-5.51	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3285	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 11/04/29
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2402MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

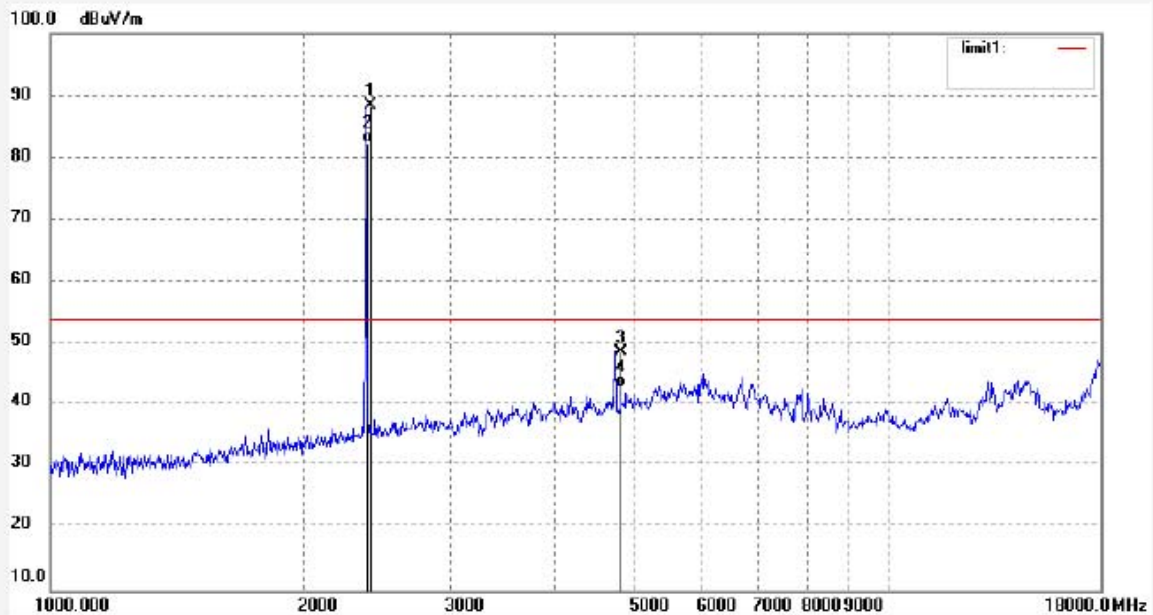

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.275	95.79	-7.45	88.34	114.00	-25.66	peak			
2	2402.275	89.87	-7.45	82.42	94.00	-11.58	AVG			
3	4804.551	48.94	-0.30	48.64	74.00	-25.36	peak			
4	4804.551	43.08	-0.30	42.78	54.00	-11.22	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3295	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 14/03/43
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2402MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

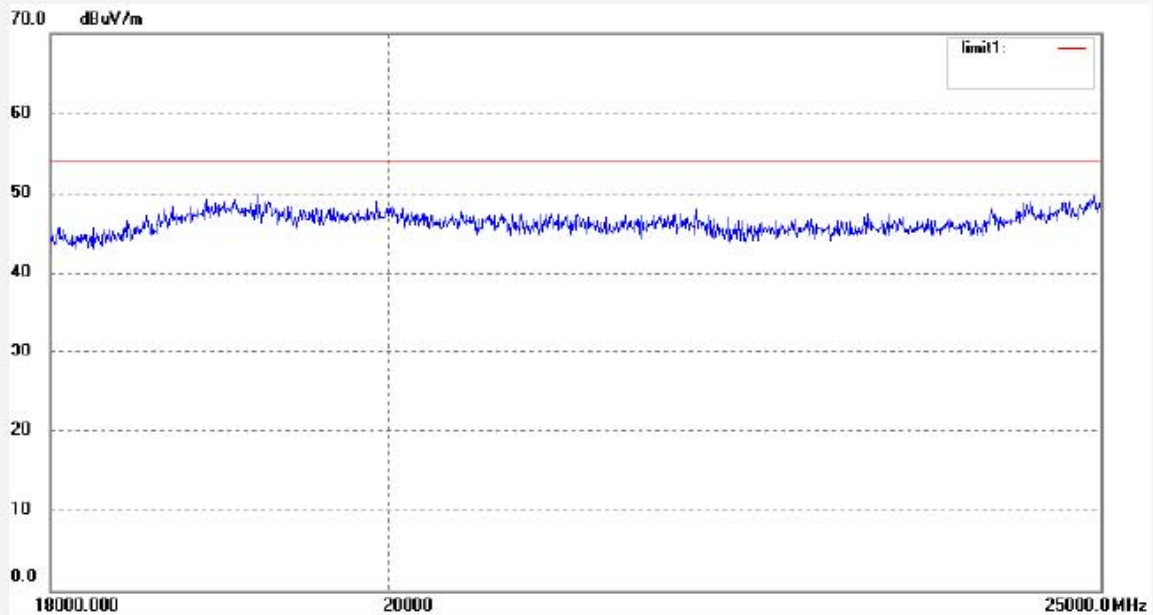

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3296	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 14/06/50
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2402MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

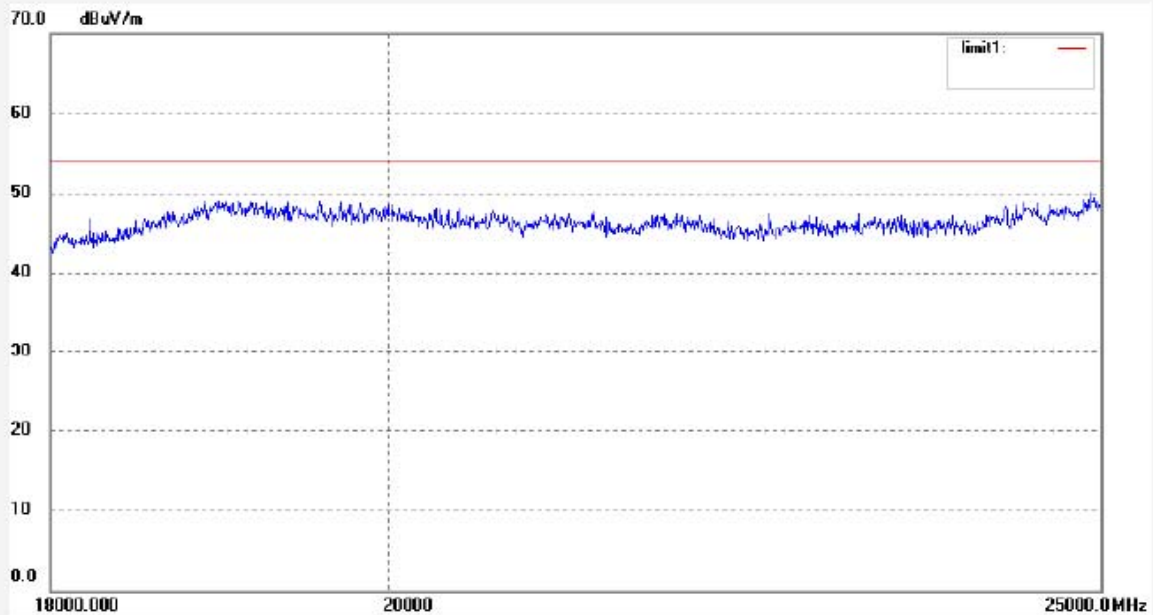

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3266	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 9/10/22
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2440MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

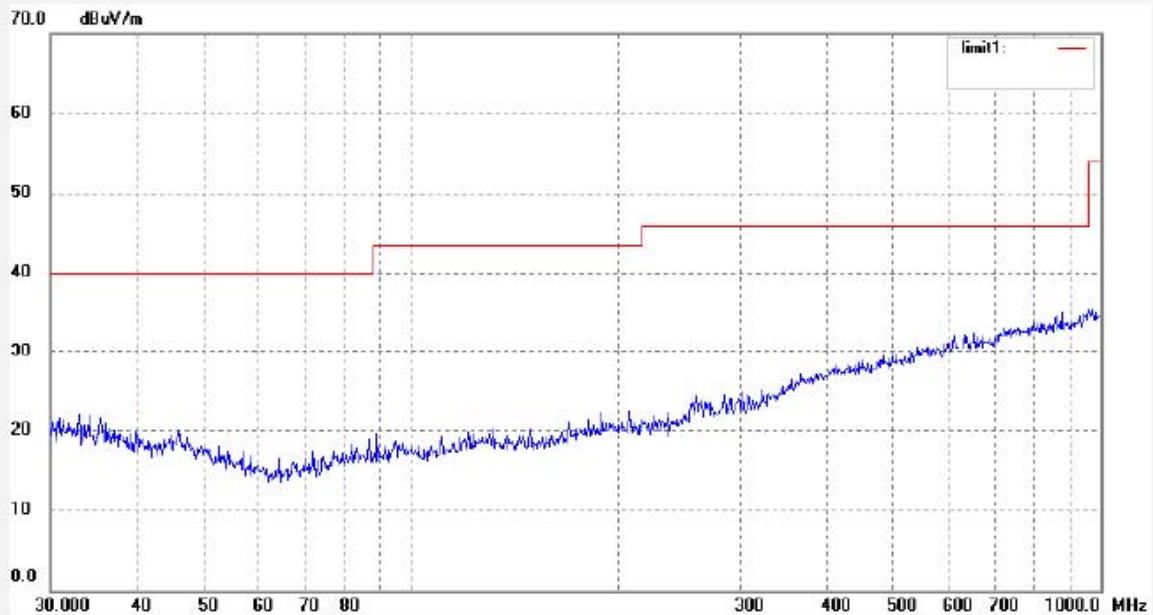

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3265	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 9/07/18
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2440MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

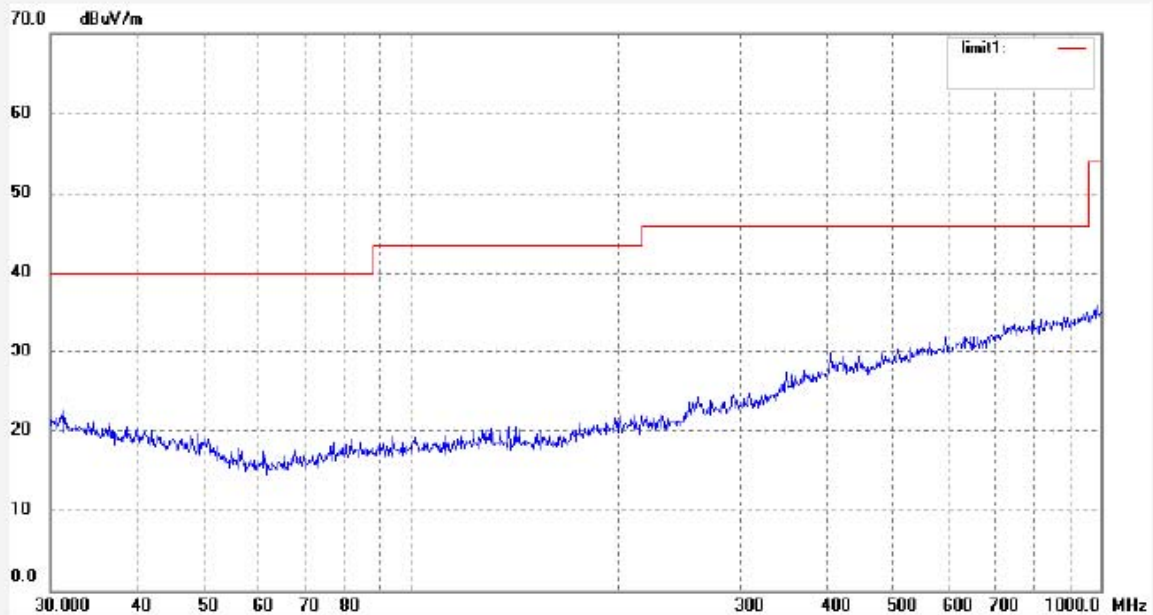

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3287	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 11/11/55
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2440MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

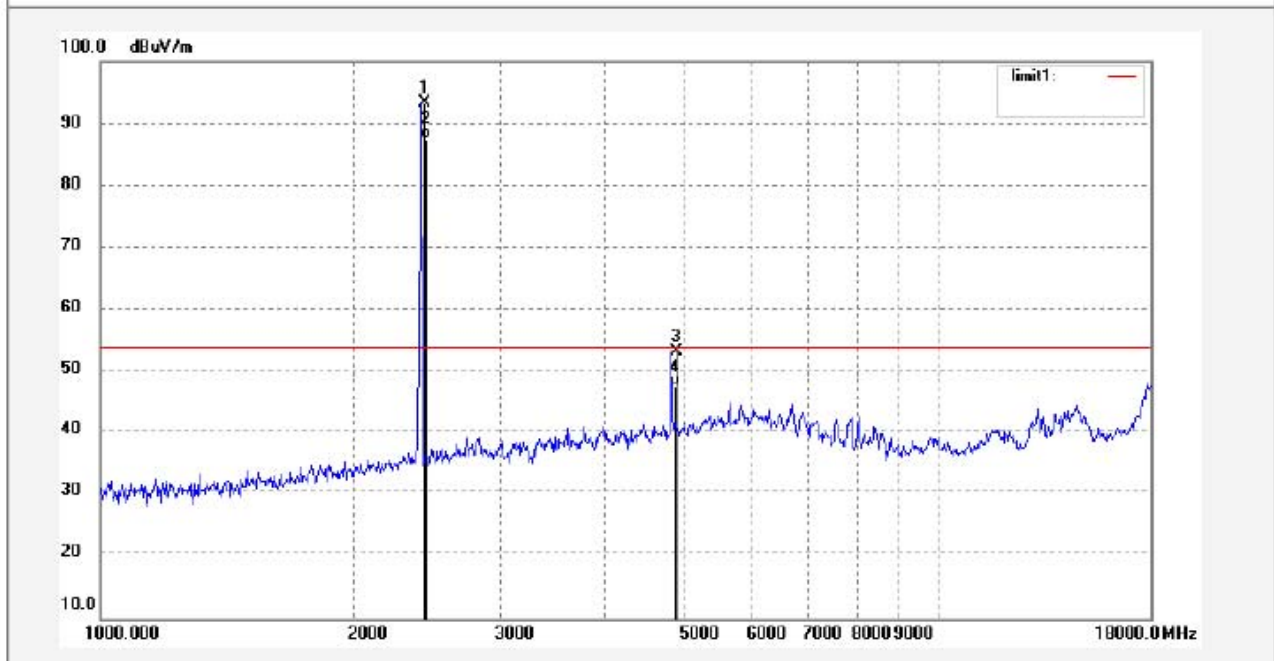

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.272	100.67	-7.36	93.31	114.00	-20.69	peak			
2	2440.272	94.78	-7.36	87.42	94.00	-6.58	AVG			
3	4880.542	53.11	0.13	53.24	74.00	-20.76	peak			
4	4880.542	47.24	0.13	47.37	54.00	-6.63	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3288	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 11/14/58
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2440MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

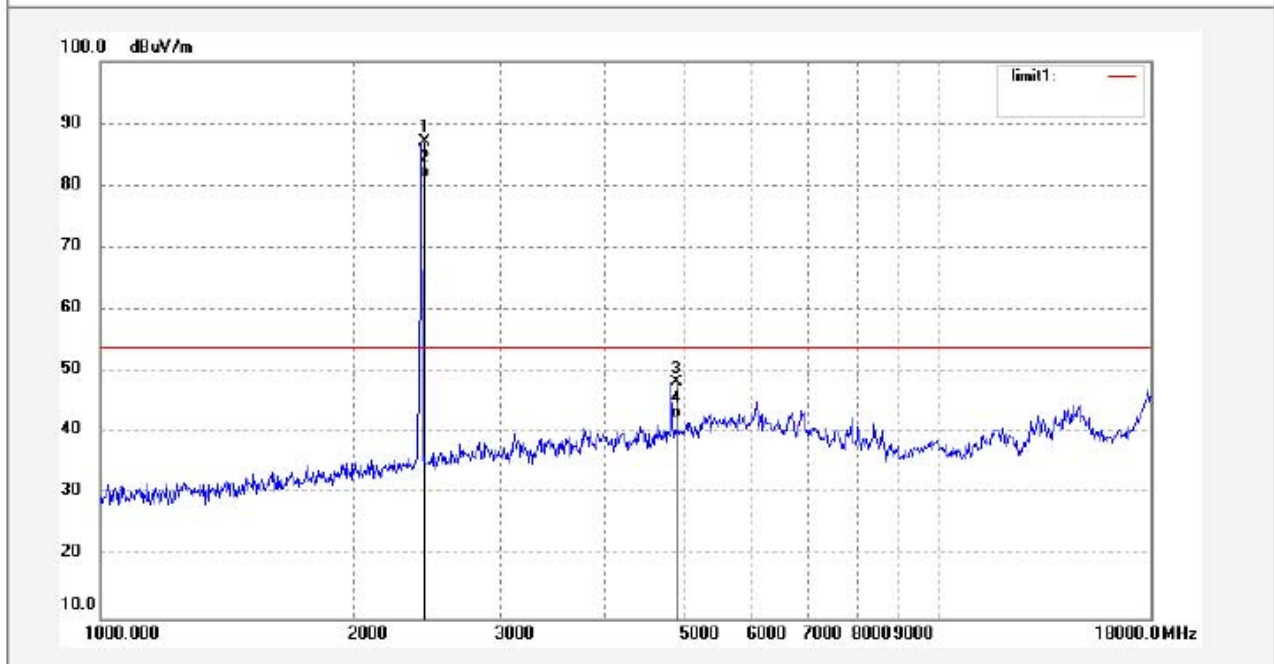

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.272	94.36	-7.36	87.00	114.00	-27.00	peak			
2	2440.272	88.49	-7.36	81.13	94.00	-12.87	AVG			
3	4880.542	48.02	0.13	48.15	74.00	-25.85	peak			
4	4880.542	42.14	0.13	42.27	54.00	-11.73	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3298	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 14/13/49
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2440MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

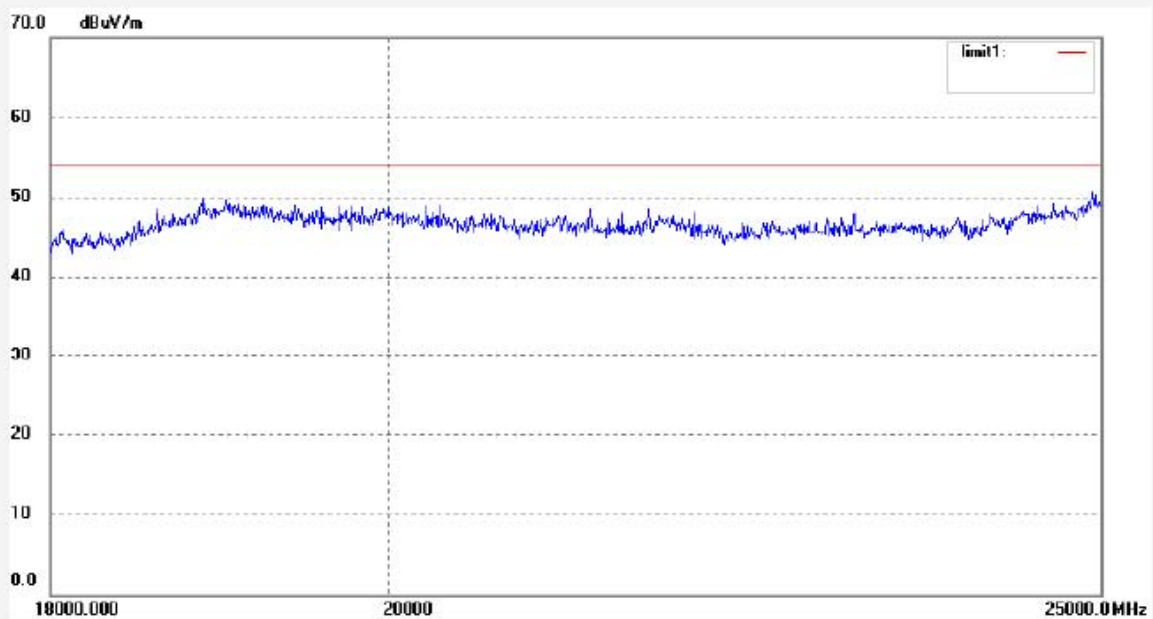

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3297	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 14/10/41
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2440MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

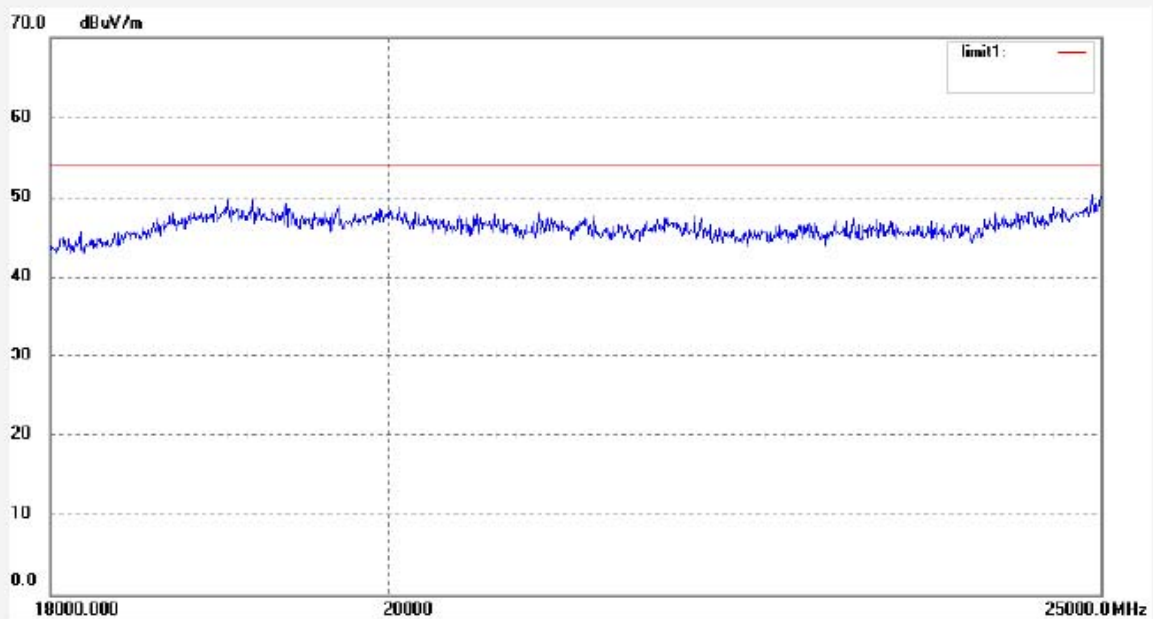

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3267	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 9/14/11
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2478MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

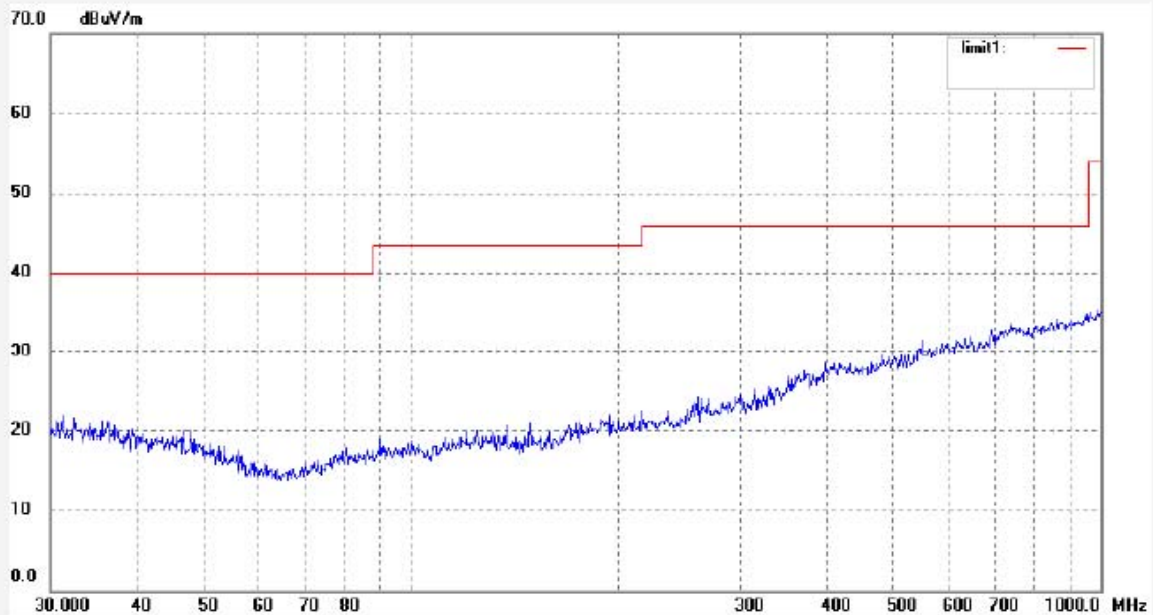

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3268	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 9/17/23
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2478MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

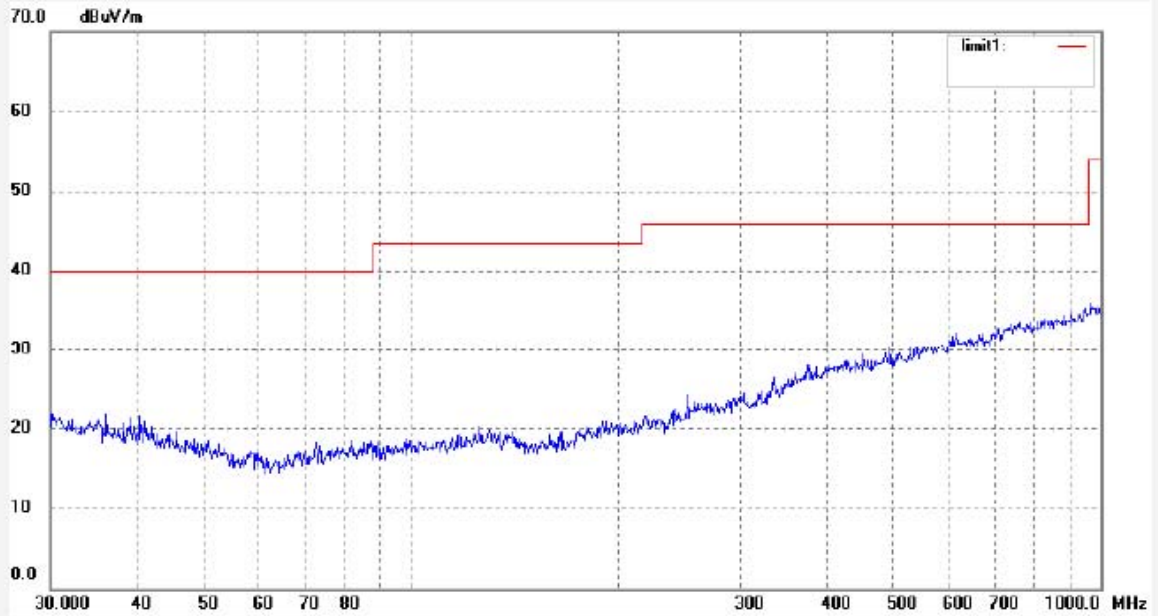

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3290	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 11/22/30
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2478MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

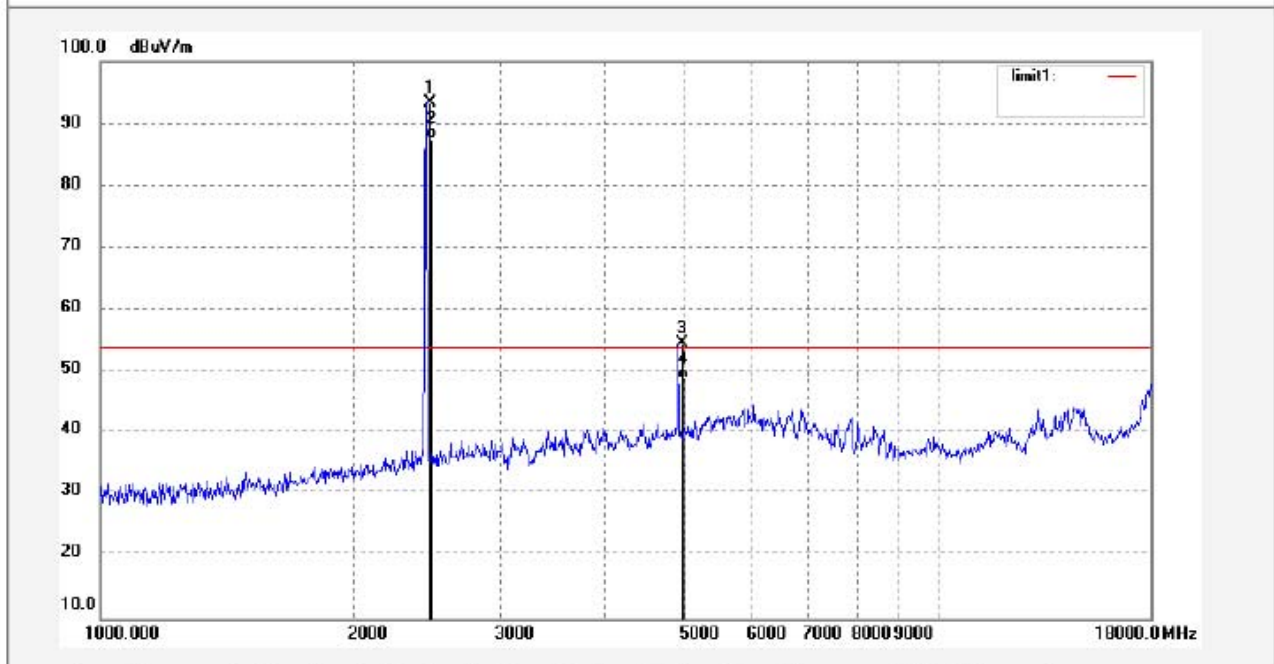

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2478.273	100.77	-7.37	93.40	114.00	-20.60	peak			
2	2478.273	94.88	-7.37	87.51	94.00	-6.49	AVG			
3	4956.545	54.18	0.51	54.69	74.00	-19.31	peak			
4	4956.545	48.27	0.51	48.78	54.00	-5.22	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3289	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 11/19/12
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2478MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

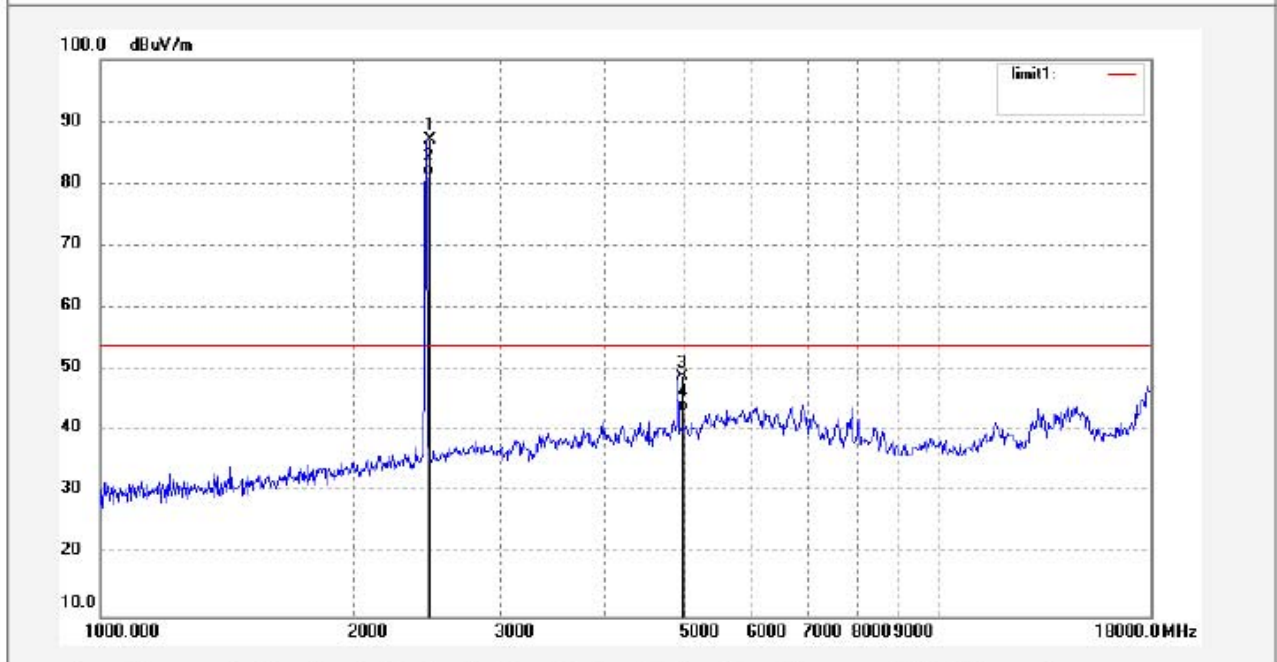

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2478.273	94.51	-7.37	87.14	114.00	-26.86	peak			
2	2478.273	88.59	-7.37	81.22	94.00	-12.78	AVG			
3	4956.545	48.41	0.51	48.92	74.00	-25.08	peak			
4	4956.545	42.50	0.51	43.01	54.00	-10.99	AVG			






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3299	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 14/17/42
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2478MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

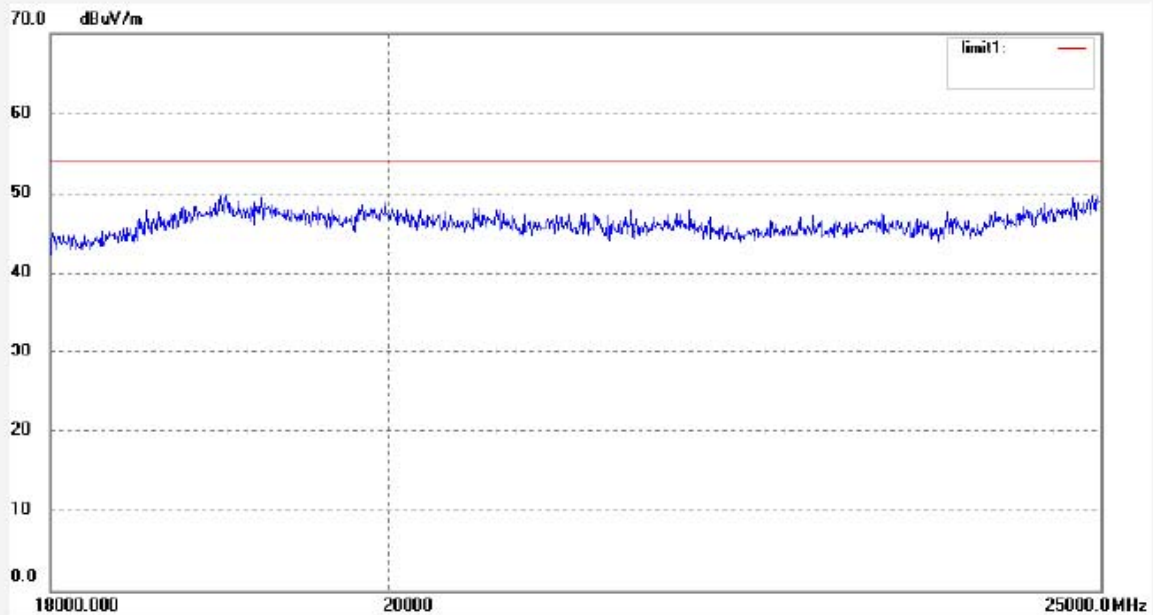

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3300	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 14/20/51
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2478MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

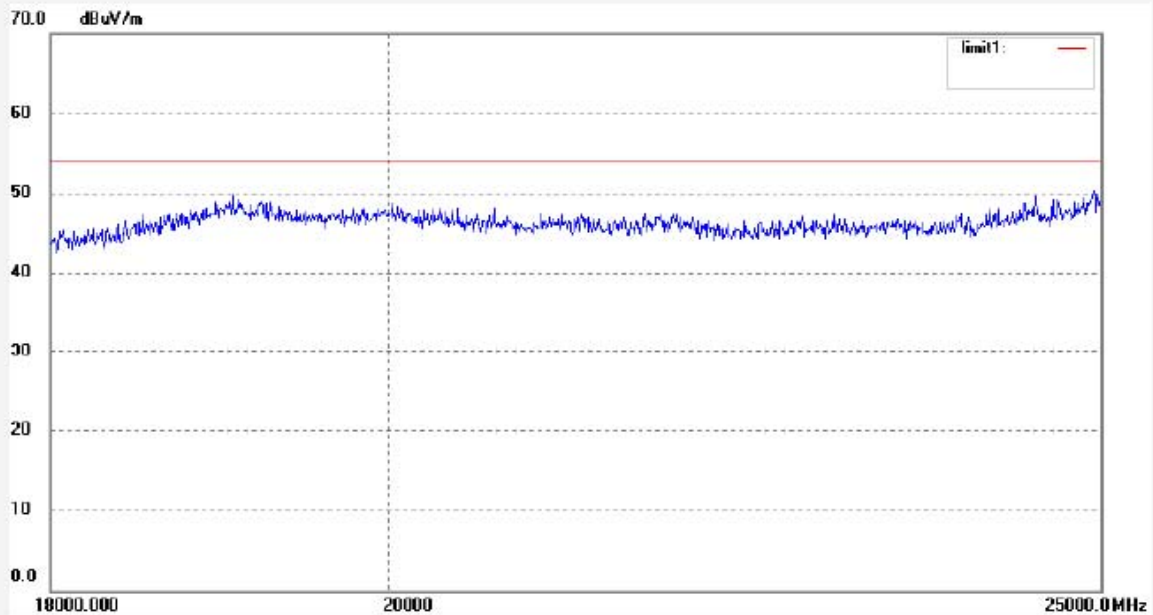

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3294	Polarization: Horizontal
Standard: FCC Part 15 PEAK 2.4G	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 13/48/33
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2402MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

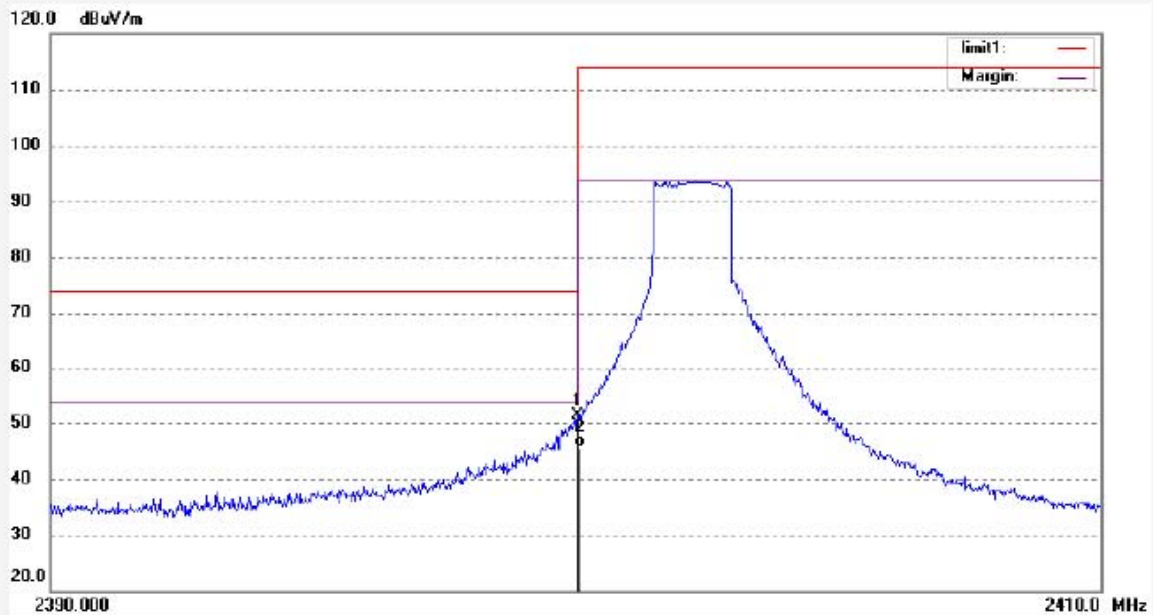

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2400.000	58.96	-7.46	51.50	74.00	-22.50	peak			
2	2400.000	53.07	-7.46	45.61	54.00	-8.39	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3293	Polarization: Vertical
Standard: FCC Part 15 PEAK 2.4G	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 13/45/26
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2402MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

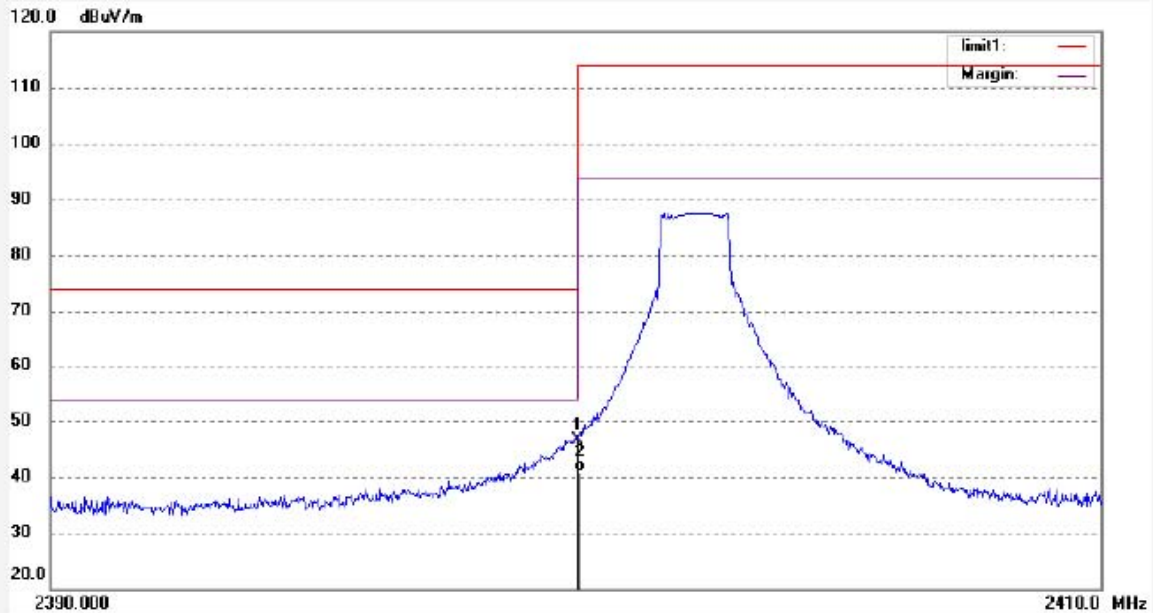

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2400.000	54.12	-7.46	46.66	74.00	-27.34	peak			
2	2400.000	48.25	-7.46	40.79	54.00	-13.21	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: RTTE #3291	Polarization: Horizontal
Standard: FCC Part 15 PEAK 2.4G	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 13/37/07
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2478MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

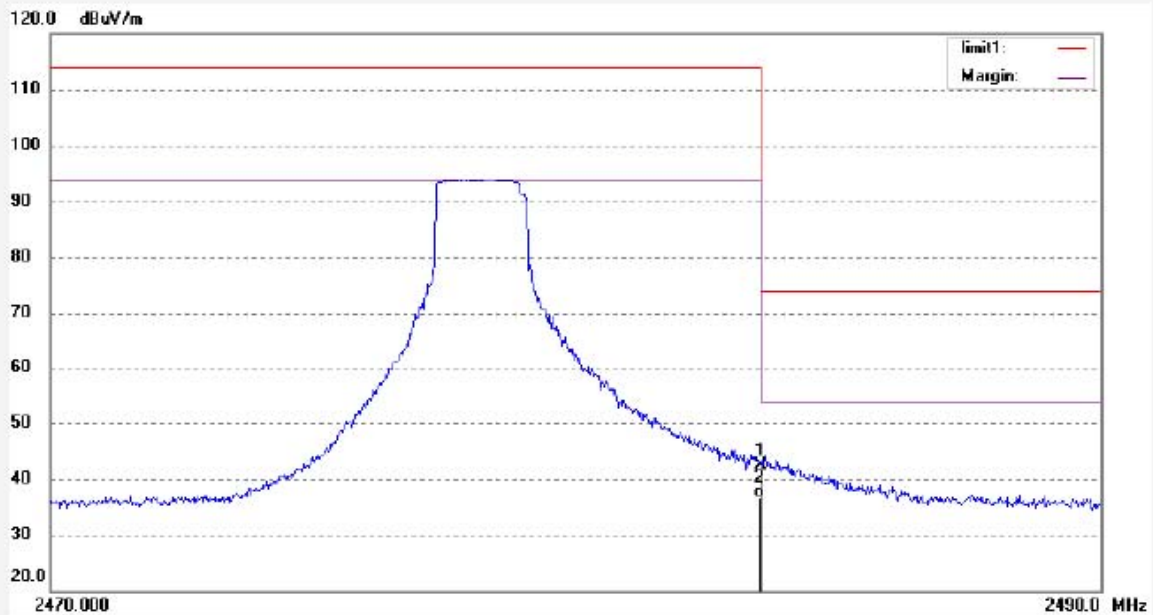

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	49.79	-7.37	42.42	74.00	-31.58	peak			
2	2483.500	43.92	-7.37	36.55	54.00	-17.45	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #3292	Polarization: Vertical
Standard: FCC Part 15 PEAK 2.4G	Power Source: DC 3V
Test item: Radiation Test	Date: 09/09/28/
Temp.( C)/Hum.(%) 25 C / 50 %	Time: 13/40/11
EUT: 2.4G Wireless Laser Mouse	Engineer Signature: Joe
Mode: TX 2478MHz	Distance: 3m
Model: DS-2240	
Manufacturer: Eastern Times Technology Co., Ltd	

Note: Sample No.:092157 Report No.:ATE20091963

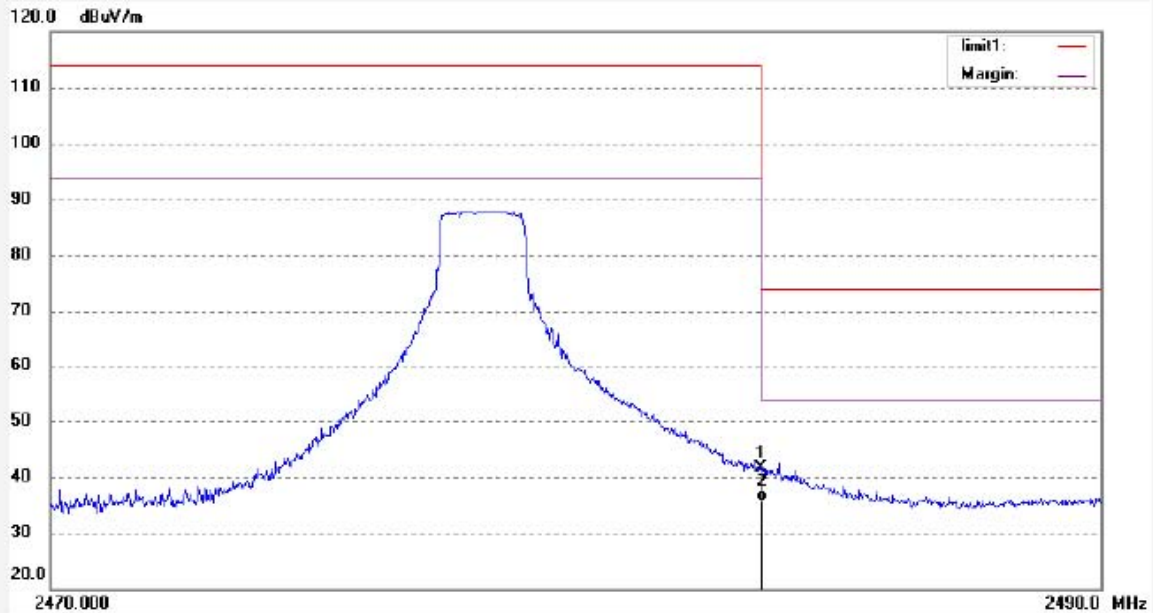

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	48.91	-7.37	41.54	74.00	-32.46	peak			
2	2483.500	43.01	-7.37	35.64	54.00	-18.36	AVG			