

Report No.: TW2101269E File reference No.: 2022-04-08

Applicant: Eastern Times Technology Co.,Ltd

Product: WIRED BLUETOOTH DUAL MODE MECHANICAL

**KEYBOARD** 

Model No.: T-TGK317RGB-BL, T-TGK317RGB-BR,

T-TGK317RGB-RD, ET-8452, ET-8501, ET-8547

Trademark: T-DAGGER

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 &FCC Part 15 Subpart C,

Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Terry Tang

Manager

Dated: April 08, 2022

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

### SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Date: 2022-04-08



# Page 2 of 39

# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

#### **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

### FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

## Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

#### A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Date: 2022-04-08



# Test Report Conclusion

|            | Content                             |    |
|------------|-------------------------------------|----|
| 1.0        | General Details                     | 4  |
| 1.1        | Test Lab Details.                   | 4  |
| 1.2        | Applicant Details                   | 4  |
| 1.3        | Description of EUT                  | 4  |
| 1.4        | Submitted Sample                    | 4  |
| 1.5        | Test Duration.                      | 5  |
| 1.6        | Test Uncertainty.                   | 5  |
| 1.7        | Test By                             | 5  |
| 2.0        | List of Measurement Equipment.      | 6  |
| 3.0        | Technical Details                   | 7  |
| 3.1        | Summary of Test Results.            | 7  |
| 3.2        | Test Standards.                     | 7  |
| 4.0        | EUT Modification.                   | 7  |
| 5.0        | Power Line Conducted Emission Test. | 8  |
| 5.1        | Schematics of the Test.             | 8  |
| 5.2        | Test Method and Test Procedure.     | 8  |
| 5.3        | Configuration of the EUT.           | 8  |
| 5.4        | EUT Operating Condition.            | 9  |
| 5.5        | Conducted Emission Limit.           | 9  |
| 5.6        | Test Result.                        | 9  |
| 6.0        | Radiated Emission test              | 12 |
| 6.1        | Test Method and Test Procedure.     | 12 |
| 6.2        | Configuration of the EUT.           | 13 |
| 6.3        | EUT Operation Condition.            | 13 |
| 6.4        | Radiated Emission Limit.            | 14 |
| 6.5        | Test Result.                        | 15 |
| <b>7.0</b> | Band Edge                           | 23 |
| 7.1        | Test Method and Test Procedure.     | 23 |
| 7.2        | Radiated Test Setup.                | 23 |
| 7.3        | Configuration of the EUT.           | 23 |
| 7.4        | EUT Operating Condition.            | 23 |
| 7.5        | Band Edge Limit.                    | 23 |
| 7.6        | Band Edge Test Result.              | 24 |
| 8.0        | Antenna Requirement                 | 28 |
| 9.0        | 20dB bandwidth measurement.         | 29 |
| 10.0       | FCC ID Label                        | 32 |
| 11.0       | Photo of Test Setup and EUT View    | 33 |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2022-04-08



Page 4 of 39

## 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

#### 1.2 Applicant Details

Applicant: Eastern Times Technology Co.,Ltd

Address: Building D, Nan An Industrial Area, Youganpu Village, Fenggang Town, Dongguan City,

Guangdong, China.

Telephone: -Fax: --

#### 1.3 Description of EUT

Product: WIRED BLUETOOTH DUAL MODE MECHANICAL KEYBOARD

Manufacturer: Eastern Times Technology Co.,Ltd

Address: Building D, Nan An Industrial Area, Youganpu Village, Fenggang Town,

Dongguan City, Guangdong, China.

Trademark: T-DAGGER

Additional Trademark: N/A

Model Number: T-TGK317RGB-BL

Additional Model Name T-TGK317RGB-BR, T-TGK317RGB-RD, ET-8452, ET-8501, ET-8547

Serial No.: T-TGK317RGB-BL 201112000001
Rating: DC5.0V, 1000mA or DC3.7V, 350mAh
Battery: DC3.8V, 1600mAh Li-ion battery

Modulation Type: GFSK (Bluetooth Low Energy)

Operation Frequency: 2402-2480MHz

Channel Separate: 2MHz Channel Number: 40

Antenna Designation PCB antenna with gain 1.2dBi maximum (Get from the antenna specification)

#### 1.4 Submitted Sample: 1 pc

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2101269E Page 5 of 39

Date: 2022-04-08



1.5 Test Duration

2021-01-28 to 2022-04-08

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty = 6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Conducted Emissions Uncertainty = 3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

\_\_\_\_\_

Print Name: Andy Xing

Andy -xing

Page 6 of 39 Report No.: TW2101269E

Date: 2022-04-08



| 2.0 Test Equipment |              |                  |              |              |            |
|--------------------|--------------|------------------|--------------|--------------|------------|
| Instrument Type    | Manufacturer | Model            | Serial No.   | Date of Cal. | Due Date   |
| ESPI Test Receiver | R&S          | ESPI 3           | 100379       | 2021-06-18   | 2022-06-17 |
| LISN               | R&S          | EZH3-Z5          | 100294       | 2021-06-18   | 2022-06-17 |
| LISN               | R&S          | EZH3-Z5          | 100253       | 2021-06-18   | 2022-06-17 |
| Impuls-Begrenzer   | R&S          | ESH3-Z2          | 100281       | 2021-06-18   | 2022-06-17 |
| Loop Antenna       | EMCO         | 6507             | 00078608     | 2021-06-18   | 2024-06-17 |
| Spectrum           | R&S          | FSIQ26           | 100292       | 2021-06-18   | 2022-06-17 |
| Horn Antenna       | A-INFO       | LB-180400-KF     | J211060660   | 2021-07-02   | 2024-07-01 |
| Horn Antenna       | R&S          | BBHA 9120D       | 9120D-631    | 2021-07-02   | 2024-07-01 |
| Power meter        | Anritsu      | ML2487A          | 6K00003613   | 2021-06-18   | 2022-06-17 |
| Power sensor       | Anritsu      | MA2491A          | 32263        | 2021-06-18   | 2022-06-17 |
| Bilog Antenna      | Schwarebeck  | VULB9163         | 9163/340     | 2021-07-02   | 2024-07-01 |
| 9*6*6 Anechoic     |              |                  | N/A          | 2021-07-02   | 2022-07-01 |
| EMI Test Receiver  | RS           | ESVB             | 826156/011   | 2021-06-18   | 2022-06-17 |
| EMI Test Receiver  | RS           | ESH3             | 860904/006   | 2021-06-18   | 2022-06-17 |
| Spectrum           | HP/Agilent   | ESA-L1500A       | US37451154   | 2021-06-18   | 2022-06-17 |
| Spectrum           | HP/Agilent   | E4407B           | MY50441392   | 2021-06-18   | 2022-06-17 |
| Spectrum           | RS           | FSP              | 1164.4391.38 | 2022-01-15   | 2023-01-14 |
| RF Cable           | Zhengdi      | ZT26-NJ-NJ-8M/FA |              | 2021-06-18   | 2022-06-17 |
| RF Cable           | Zhengdi      | 7m               |              | 2021-06-18   | 2022-06-17 |
| RF Switch          | EM           | EMSW18           | 060391       | 2021-06-18   | 2022-06-17 |
| Pre-Amplifier      | Schwarebeck  | BBV9743          | #218         | 2021-06-18   | 2022-06-17 |
| Pre-Amplifier      | HP/Agilent   | 8449B            | 3008A00160   | 2021-06-18   | 2022-06-17 |
| LISN               | SCHAFFNER    | NNB42            | 00012        | 2022-01-05   | 2023-01-04 |

#### 2.2 Automation Test Software

# For Conducted Emission Test

| Name   | Version           |
|--------|-------------------|
| EZ-EMC | Ver.EMC-CON 3A1.1 |

#### For Radiated Emissions

| Name  | Version |  |  |
|---|---------|--|--|
| EMI Test Software BL410-EV18.91                 | V18.905 |  |  |
| EMI Test Software BL410-EV18.806 High Frequency | V18.06  |  |  |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2101269E Page 7 of 39

Date: 2022-04-08



#### 3.0 Technical Details

#### 3.1 Summary of test results

The EUT has been tested according to the following specifications:

| Standard   | Test Type                           | Result | Notes    |
|--|-------------------------------------|--------|----------|
| FCC Part 15, Paragraph 15.203                                  | Antenna<br>Requirement              | Pass   | Complies |
| FCC Part 15, Paragraph 15.207                                  | Conducted<br>Emission Test          | Pass   | Complies |
| FCC Part 15 Subpart C Paragraph 15.249(a)<br>& 15.249(b) Limit | Field Strength<br>of<br>Fundamental | Pass   | Complies |
| FCC Part 15, Paragraph 15.209                                  | Radiated<br>Emission Test           | Pass   | Complies |
| FCC Part 15 Subpart C Paragraph 15.249(d) Limit                | Band Edge<br>Test                   | Pass   | Complies |

#### 3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

#### 4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2022-04-08



#### 5. Power Line Conducted Emission Test

#### 5.1 Schematics of the test

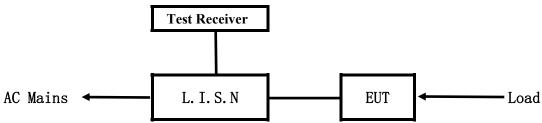


EUT: Equipment Under Test

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

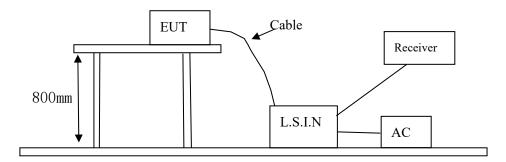

#### 5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

40 channels are provided to the EUT

#### A. EUT

| Device               | Manufacturer       | Model                    | FCC ID      |
|----------------------|--------------------|--------------------------|-------------|
| WIRED BLUETOOTH DUAL |                    | T-TGK317RGB-BL,          |             |
| MODE MECHANICAL      | Eastern Times      | T-TGK317RGB-BR,          | TUVET-8452B |
| KEYBOARD             | Technology Co.,Ltd | T-TGK317RGB-RD, ET-8452, | 10VE1-8432B |
| KE I BOARD           |                    | ET-8501, ET-8547         |             |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2022-04-08



Page 9 of 39

# B. Internal Device

| Device | Manufacturer | Model | FCC ID/DOC |
|--------|--------------|-------|------------|
| N/A    |              |       |            |

#### C. Peripherals

| Device       | Manufacturer | Model           | Rating                            |
|--------------|--------------|-----------------|-----------------------------------|
| Power Supply | KEYU         | KA23-0502000DEU | Input: 100-240V~, 50/60Hz, 0.35A; |
|              |              |                 | Output: DC5V, 2A                  |

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

| <u> </u>         |                  |               |  |  |  |  |
|------------------|------------------|---------------|--|--|--|--|
| Frequency        | Limits (c        | lB μV)        |  |  |  |  |
| (MHz)            | Quasi-peak Level | Average Level |  |  |  |  |
| $0.15 \sim 0.50$ | 66.0~56.0*       | 56.0~46.0*    |  |  |  |  |
| $0.50 \sim 5.00$ | 56.0             | 46.0          |  |  |  |  |
| 5.00 ~ 30.00     | 60.0             | 50.0          |  |  |  |  |

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 Test Results:

Pass

Report No.: TW2101269E Page 10 of 39

Date: 2022-04-08



### A: Conducted Emission on Live Terminal (150kHz to 30MHz)


**EUT Operating Environment** 

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Communication by BT** 

**Results: Pass** 

Please refer to following diagram for individual

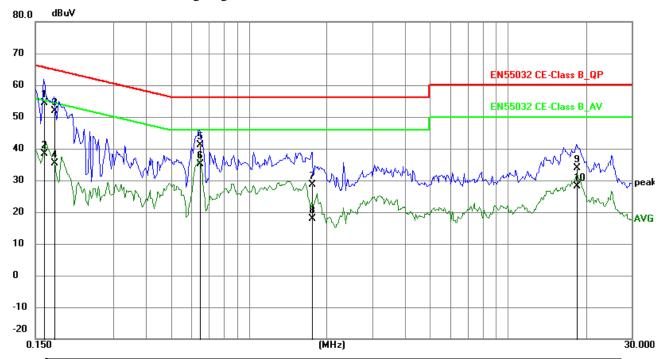

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Factor<br>(dB) | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Detector | P/F |
|-----|--------------------|-------------------|----------------|-----------------|-----------------|----------------|----------|-----|
| 1   | 0.1617             | 44.66             | 9.78           | 54.44           | 65.38           | -10.94         | QP       | Р   |
| 2   | 0.1617             | 28.50             | 9.78           | 38.28           | 55.38           | -17.10         | AVG      | Р   |
| 3   | 0.1773             | 42.17             | 9.77           | 51.94           | 64.61           | -12.67         | QP       | Р   |
| 4   | 0.1773             | 25.49             | 9.77           | 35.26           | 54.61           | -19.35         | AVG      | Р   |
| 5   | 0.6453             | 31.26             | 9.78           | 41.04           | 56.00           | -14.96         | QP       | Р   |
| 6   | 0.6453             | 25.47             | 9.78           | 35.25           | 46.00           | -10.75         | AVG      | Р   |
| 7   | 1.7529             | 18.84             | 9.80           | 28.64           | 56.00           | -27.36         | QP       | Р   |
| 8   | 1.7529             | 8.02              | 9.80           | 17.82           | 46.00           | -28.18         | AVG      | Р   |
| 9   | 18.3543            | 23.32             | 10.58          | 33.90           | 60.00           | -26.10         | QP       | Р   |
| 10  | 18.3543            | 17.63             | 10.58          | 28.21           | 50.00           | -21.79         | AVG      | Р   |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2101269E Page 11 of 39

Date: 2022-04-08



# B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


**EUT Operating Environment** 

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Communication by BT** 

**Results: Pass** 

Please refer to following diagram for individual

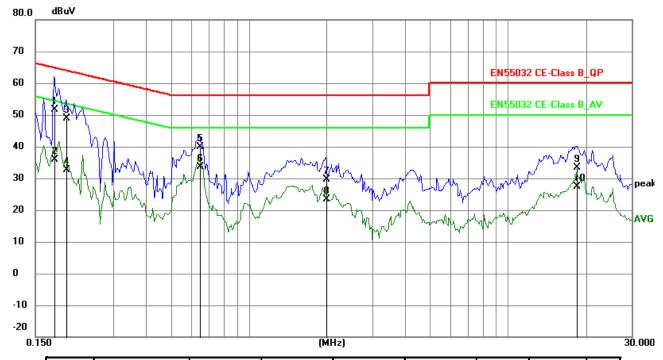

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Factor<br>(dB) | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Detector | P/F |
|-----|--------------------|-------------------|----------------|-----------------|-----------------|----------------|----------|-----|
| 1   | 0.1773             | 41.93             | 9.77           | 51.70           | 64.61           | -12.91         | QP       | Р   |
| 2   | 0.1773             | 26.15             | 9.77           | 35.92           | 54.61           | -18.69         | AVG      | Р   |
| 3   | 0.1986             | 39.24             | 9.75           | 48.99           | 63.67           | -14.68         | QP       | Р   |
| 4   | 0.1986             | 22.88             | 9.75           | 32.63           | 53.67           | -21.04         | AVG      | Р   |
| 5   | 0.6453             | 30.08             | 9.78           | 39.86           | 56.00           | -16.14         | QP       | Р   |
| 6   | 0.6453             | 23.95             | 9.78           | 33.73           | 46.00           | -12.27         | AVG      | Р   |
| 7   | 1.9830             | 19.77             | 9.80           | 29.57           | 56.00           | -26.43         | QP       | Р   |
| 8   | 1.9830             | 13.58             | 9.80           | 23.38           | 46.00           | -22.62         | AVG      | Р   |
| 9   | 18.3816            | 22.84             | 10.58          | 33.42           | 60.00           | -26.58         | QP       | Р   |
| 10  | 18.3816            | 16.86             | 10.58          | 27.44           | 50.00           | -22.56         | AVG      | Р   |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2101269E Page 12 of 39

Date: 2022-04-08




#### **6** Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz (Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

#### **Block diagram of Test setup**


For radiated emissions from 9kHz to 30MHz

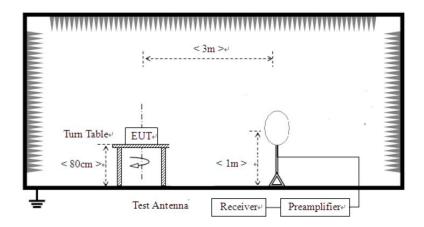


Date: 2022-04-08



For radiated emissions from 30MHz to1GHz

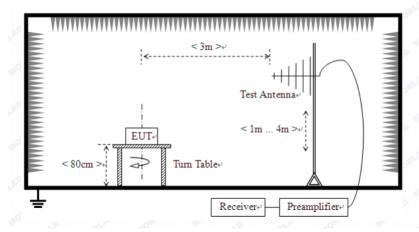

For radiated emissions above 1GHz

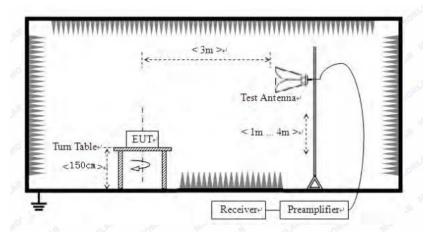

- 6.2 Configuration of The EUT

  Same as section 5.3 of this report
- 6.3 EUT Operating Condition

  Same as section 5.4 of this report.

Date: 2022-04-08



Page 14 of 39

#### 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

#### A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

| Fundamental Frequency Field Strength of |      | ength of Fundame | ental (3m) | Field S | trength of Harmo | onics (3m) |
|---|------|------------------|------------|---------|------------------|------------|
| (MHz)                                   | mV/m | dBuV/m           |            | uV/m    | dBuV/m           |            |
| 2400-2483.5                             | 50   | 94 (Average)     | 114 (Peak) | 500     | 54 (Average)     | 74 (Peak)  |

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

## B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

| Frequency Range (MHz) | Distance (m) | Field strength (dB μ V/m)         |
|-----------------------|--------------|-----------------------------------|
| 0.009-0.490           | 3            | 20log(2400/F(kHz)) +40log (300/3) |
| 0.490-1.705           | 3            | 20log(24000/F(kHz)) +40log (30/3) |
| 1.705-30              | 3            | 69.5                              |
| 30-88                 | 3            | 40.0                              |
| 88-216                | 3            | 43.5                              |
| 216-960               | 3            | 46.0                              |
| Above 960             | 3            | 54.0                              |

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. For radiated emissions from 9kHz to 30MHz, the emission level is much less than the limit for more than 20dB. No necessary to take down the record.
- 6. Battery full charged during tests.

Report No.: TW2101269E Page 15 of 39

Date: 2022-04-08




#### 6.5 Test result

### A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

#### Horizontal

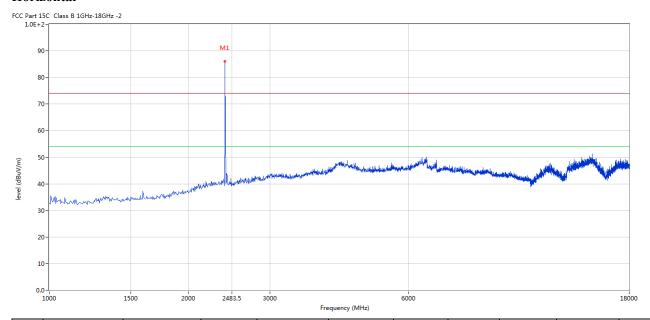


| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |            |         |
| 1   | 2402      | 86.73    | -3.57  | 114.0    | -27.27     | Peak     | 313.00 | 100    | Horizontal | Pass    |

Report No.: TW2101269E Page 16 of 39

Date: 2022-04-08



#### Vertical

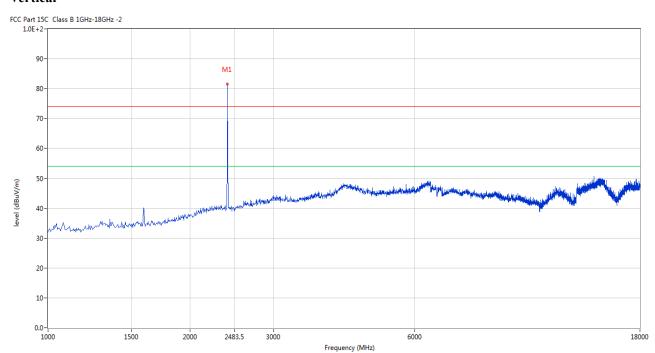

| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table (o) | Height | ANT      | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          |           | (cm)   |          |         |
| 1   | 2402      | 81.71    | -3.57  | 114.0    | -32.29     | Peak     | 177.00    | 100    | Vertical | Pass    |


Report No.: TW2101269E Page 17 of 39

Date: 2022-04-08



Please refer to the following test plots for details: Middle Channel-2440MHz

#### Horizontal

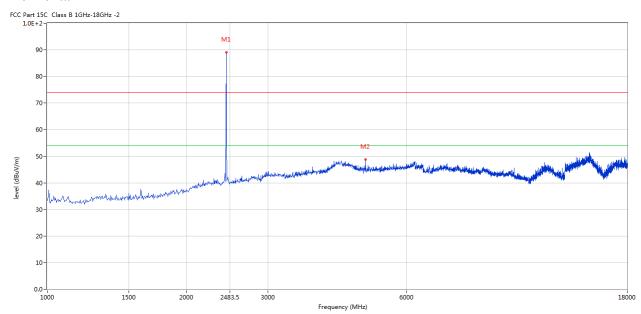


| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |            |         |
| 1   | 2440      | 89.00    | -3.57  | 114.0    | -25.00     | Peak     | 128.00 | 100    | Horizontal | Pass    |
| 2   | 4879.280  | 48.69    | 3.20   | 74.0     | -25.31     | Peak     | 128.00 | 100    | Horizontal | Pass    |

Report No.: TW2101269E Page 18 of 39

Date: 2022-04-08



#### Vertical

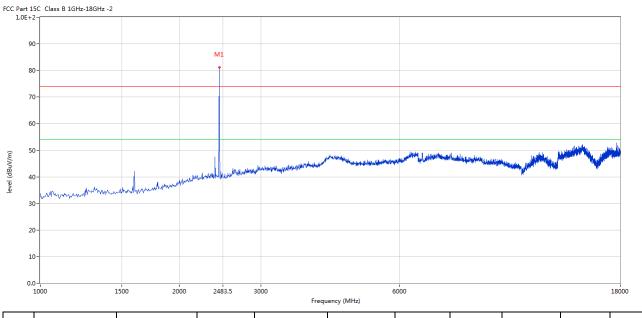

| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT      | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |          |         |
| 1   | 2440      | 81.12    | -3.57  | 114.0    | -32.88     | Peak     | 205.00 | 100    | Vertical | Pass    |


Report No.: TW2101269E Page 19 of 39

Date: 2022-04-08



Please refer to the following test plots for details: High Channel-2480MHz

#### Horizontal

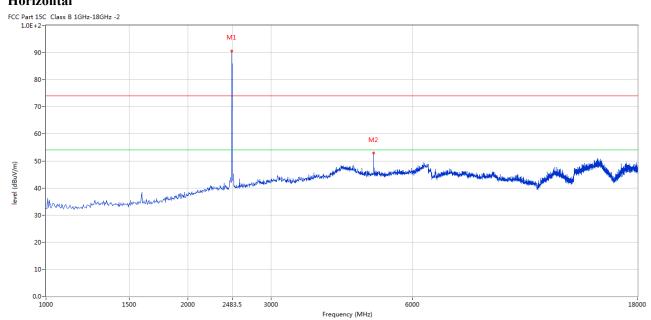


| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |            |         |
| 1   | 2480      | 90.79    | -3.57  | 114.0    | -23.21     | Peak     | 142.00 | 100    | Horizontal | Pass    |
| 2   | 4960.010  | 52.88    | 3.36   | 74.0     | -21.12     | Peak     | 137.00 | 100    | Horizontal | Pass    |

Report No.: TW2101269E Page 20 of 39

Date: 2022-04-08



#### Vertical

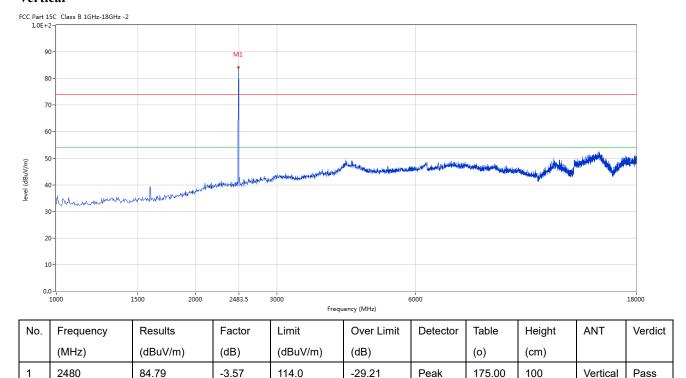

Note: (2) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (3) Margin=Emission-Limits
- (4) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2101269E Page 21 of 39

Date: 2022-04-08




# B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

**Results:** Pass

Please refer to following diagram for individual

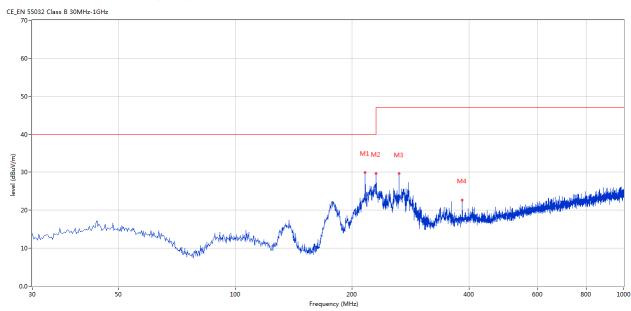

| No. | Frequency | Results  | Factor (dB) | Limit    | Over Limit | Detector | Table  | Height | ANT        | Verdict |
|-----|-----------|----------|-------------|----------|------------|----------|--------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) |             | (dBuV/m) | (dB)       |          | (o)    | (cm)   |            |         |
| 1   | 215.951   | 29.90    | -13.60      | 40.0     | -10.10     | Peak     | 252.00 | 100    | Horizontal | Pass    |
| 2   | 230.012   | 29.66    | -12.67      | 47.0     | -17.34     | Peak     | 266.00 | 100    | Horizontal | Pass    |
| 3   | 263.954   | 29.60    | -11.79      | 47.0     | -17.40     | Peak     | 257.00 | 100    | Horizontal | Pass    |
| 4   | 383.962   | 22.68    | -9.16       | 47.0     | -24.32     | Peak     | 260.00 | 100    | Horizontal | Pass    |

Report No.: TW2101269E Page 22 of 39

Date: 2022-04-08




#### Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

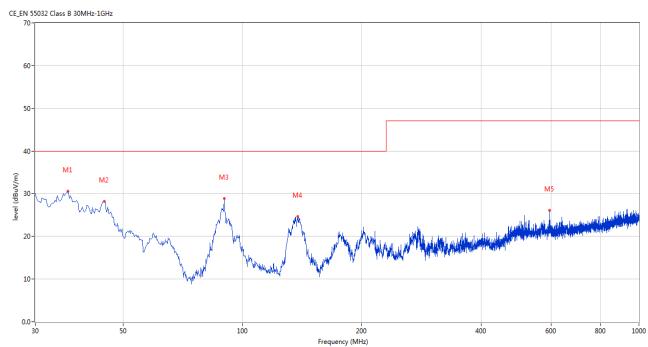

| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table (o) | Height | ANT      | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          |           | (cm)   |          |         |
| 1   | 36.303    | 30.56    | -13.57 | 40.0     | -9.44      | Peak     | 328.00    | 100    | Vertical | Pass    |
| 2   | 44.789    | 28.26    | -11.42 | 40.0     | -11.74     | Peak     | 263.00    | 100    | Vertical | Pass    |
| 3   | 89.883    | 28.93    | -15.19 | 40.0     | -11.07     | Peak     | 283.00    | 100    | Vertical | Pass    |
| 4   | 137.643   | 24.70    | -17.25 | 40.0     | -15.30     | Peak     | 331.00    | 100    | Vertical | Pass    |
| 5   | 595.854   | 26.07    | -5.18  | 47.0     | -20.93     | Peak     | 339.00    | 100    | Vertical | Pass    |

Report No.: TW2101269E Page 23 of 39

Date: 2022-04-08




#### 7. Band Edge

#### 7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

#### 7. 2 Radiated Test Setup

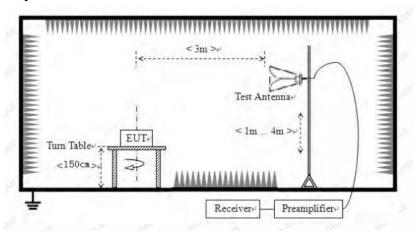

For the actual test configuration, please refer to the related items – Photos of Testing

### 7.3 Configuration of The EUT

Same as section 5.3 of this report

#### 7.4 EUT Operating Condition

Same as section 5.4 of this report.

#### 7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.


The report refers only to the sample tested and does not apply to the bulk.

Report No.: TW2101269E Page 24 of 39

Date: 2022-04-08




#### 7.6 Test Result

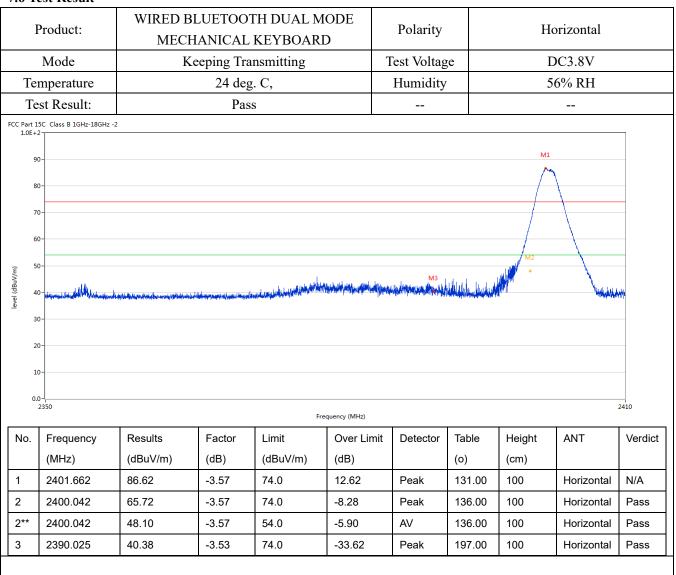

Report No.: TW2101269E Page 25 of 39



| Product:     | WIRED BLUETOOTH DUAL MODE<br>MECHANICAL KEYBOARD | Detector     | Vertical |
|--------------|--|--------------|----------|
| Mode         | Keeping Transmitting                             | Test Voltage | DC3.8V   |
| Temperature  | 24 deg. C,                                       | Humidity     | 56% RH   |
| Test Result: | Pass   |              |          |

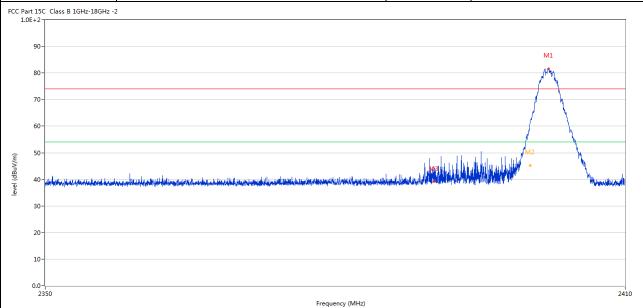


| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table  | Height | ANT      | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          | (o)    | (cm)   |          |         |
| 1   | 2401.977  | 81.60    | -3.57  | 74.0     | 7.60       | Peak     | 180.00 | 100    | Vertical | N/A     |
| 2   | 2400.072  | 61.81    | -3.57  | 74.0     | -12.19     | Peak     | 180.00 | 100    | Vertical | Pass    |
| 2** | 2400.072  | 45.25    | -3.57  | 54.0     | -8.75      | AV       | 180.00 | 100    | Vertical | Pass    |
| 3   | 2390.070  | 39.12    | -3.53  | 74.0     | -34.88     | Peak     | 360.00 | 100    | Vertical | Pass    |

Page 26 of 39 Report No.: TW2101269E



| Product:     | WIRED BLUETOOTH DUAL MODE<br>MECHANICAL KEYBOARD | Polarity     | Horizontal |
|--------------|--|--------------|------------|
| Mode         | Keeping Transmitting                             | Test Voltage | DC3.8V     |
| Temperature  | 24 deg. C,                                       | Humidity     | 56% RH     |
| Test Result: | Pass   |              |            |

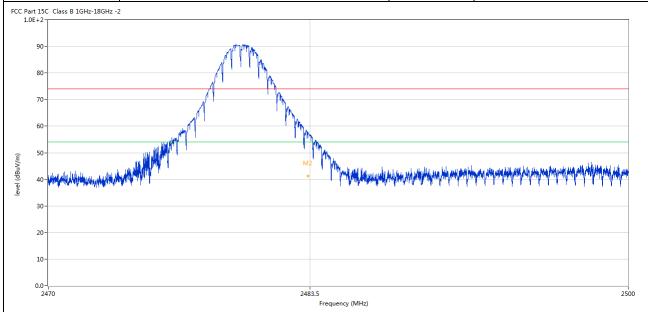

| ١ | No. | Frequency | Results  | Factor | Limit    | Over       | Detector | Table  | Height | ANT        | Verdict |
|---|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
|   |     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | Limit (dB) |          | (o)    | (cm)   |            |         |
| 1 | 1   | 2479.995  | 90.59    | -3.57  | 74.0     | 16.59      | Peak     | 134.00 | 100    | Horizontal | N/A     |
| 2 | 2   | 2483.399  | 57.73    | -3.57  | 74.0     | -16.27     | Peak     | 134.00 | 100    | Horizontal | Pass    |
| 2 | 2** | 2483.399  | 41.19    | -3.57  | 54.0     | -12.81     | AV       | 134.00 | 100    | Horizontal | Pass    |

Page 27 of 39

Report No.: TW2101269E

Date: 2022-04-08



|                | Product: WIRED BLUETOOTH DU  MECHANICAL KEYB  |  |  |                               |  | Detecto  | r   | Vertical                          |  |  |  |
|----------------|---|--|--|-------------------------------|--|--|---|-----------------------------------|--|--|--|
|                | Mode Keeping Transmitting   |  |  |                               |  | Test Voltage   |   |                                   | DC3.8V   |  |  |
| Τe             | Temperature 24 deg. C,  |  |  |                               |  | Humidit  |   |                                   |  |  |  |
| To             | est Result:   | ass  |  |                               |  |  |   |                                   |  |  |  |
| CC Part        | 15C Class B 1GHz-18GHz -  | 2  |  |                               |  |  |   |                                   |  |  |  |
| !              | 90 -  |  |  |                               |  |  |   |                                   |  |  |  |
| ;              | 80-   |  | A CONTRACTOR OF THE PROPERTY O |                               |  |  |   |                                   |  |  |  |
|                | 70-   |  |  |                               |  |  |   |                                   |  |  |  |
|                |   |  |  |                               |  |  |   |                                   |  |  |  |
| (              | 60-   |  | <i>[</i>   | M <sub>2</sub> M <sub>2</sub> |  |  |   |                                   |  |  |  |
|                | 50-   |  | <u> </u>   | M2                            |  |  |   |                                   |  |  |  |
|                |   | Military Constitution of the State of the St |  | M2                            | March April 200 Colombia   | والمارا والماران والم | dhhadring bhirteileadh                    | kadekiindaa mijidalo siloodda,ada | and the state of the state of  |  |  |
| level (dBuV/m) | 50-   | Marie  |  | My M2                         | Mary halitation and an interestive   | i katalah dan dari berlih den des  | alle konglesie des kalen kendille gert de | hadatirdasanddalasticidaeda       | en kalendari da  |  |  |
| level (dBuV/m) | 40-   | animakidi Milihil Kabupatan da   |  | M2                            | Annalishing and in the seal and  | inishidada middidda da isa   | dhadish birining da                       | hadelindaanddalashicdigedg        | ent the heart of the high  | ta ta da sa |  |
| level (dBuV/m) | 50-<br>40- <b></b>  | Salah di   |  | M2                            | Maryan kadipat padi kalendah un  | luisidad da karata d   | athabuntain ba batha padha an ta          | koleiindaan päikän oluuda ele     | ent de theat (their de   |  |  |
| level (dBuV/m) | 50-<br>40   | namentinal de de de la companya de l |  | Mark Mark                     | And the state of t | ويدونه فأفراه والإنتان والمرافية والمرافية والمرافية والمرافية والمرافية والمرافية والمرافية والمرافية والمرافية   | all-kundisi-kulokulonya (a                | taleindaan jirki yilad ee         | rak di shaifidh dh   |  |  |
| level (dBuV/m) | 50-<br>40- <b>, 114, 164, 184, 184, 184, 184</b> , 184, 184, 184, 184, 184, 184, 184, 184 | naminalis di   |  | 2483.5                        | requency (MHz)   | المستعلقة المستعددة والمستعددة والمستعدد والمستع | alla kundisir ku kalengan da              | taplatividas apidės vijudi pil gi | and the state of t | 2500   |  |
| level (dBuV/m) | 30-<br>10-  | Results  | Factor   |                               |  | Detector   | Table                                     | Height                            | ANT  |  |  |
| level (dBuV/m) | 30  |  | Factor (dB)  | Fi                            | requency (MHz)   |  |   |                                   |  | 2500   |  |
| level (dBuV/m) | 30-<br>10-<br>2470  | Results  | 1  | Limit                         | requency (MHz)  Over Limit   |  | Table                                     | Height                            |  | 2500   |  |

Note: The PK emission level less than the AV limit. No necessary to record the AV emission level.

Report No.: TW2101269E Page 28 of 39

Date: 2022-04-08



#### 8.0 Antenna Requirement

#### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB antenna with gain 1.2dBi maximum. It fulfills the requirement of this section.

Test Result: Pass

Page 29 of 39

Report No.: TW2101269E



| Product:          |                    | LUETOOTH D<br>ANICAL KEY   |                          | Test Mod                     | le:          | Keep transmitting DC3.8V |                    |    |  |
|-------------------|--------------------|--|--------------------------|------------------------------|--------------|--------------------------|--------------------|----|--|
| Mode              | Kε                 | eping Transmi  | tting                    | Test Volta                   | ige          |                          |                    |    |  |
| Temperature       |                    | 24 deg. C,   |                          | Humidit                      | у            | 569                      | % RH               |    |  |
| Test Result:      |                    | Pass   |                          | Detecto                      | r            | PK                       |                    |    |  |
| 0dB Bandwidth     |                    | 1.202MHz   |                          |                              |              |                          |                    |    |  |
| Ref Lvl<br>10 dBm | Marke<br>ndB<br>BW | ) dB VBW   | 100 kF<br>300 kF<br>5 ms | Ιz                           | RF Att 20 di |                          |                    |    |  |
| 10 dBill          | BW                 | 1.20240483   | L MHZ SWI                | 5 IIIs                       | . UI         | nit                      | dBm                | 1  |  |
| 0                 |                    |  |                          | <b>V</b> <sub>1</sub>        | [T1]         | 2.40172                  | .54 dBm<br>044 GHz | A  |  |
|                   |                    |  |                          | ndB<br>BW<br>∇ <sub>T1</sub> | [T1]         | 1.20240                  | .00 dB<br>481 MHz  |    |  |
| -10               |                    | A CONTRACTOR OF THE PARTY OF TH |                          | $\nabla_{\mathrm{T2}}$       | [T1]         | 2.40137                  |                    |    |  |
| -20<br>1MAX       | <u> </u>           | Ž  |                          |                              |              | 2.40257                  | 415 GHz            | 1M |  |
| -30               | ~~~~               |  |                          |                              | Jane 1       |                          |                    |    |  |
| -40               |                    |  |                          |                              |              |                          | Manage             |    |  |
| -50               |                    |  |                          |                              |              |                          |                    |    |  |
| -60               |                    |  |                          |                              |              |                          |                    |    |  |
| -70               |                    |  |                          |                              |              |                          |                    |    |  |
| -80               |                    |  |                          |                              |              |                          |                    |    |  |
| -90               |                    |  |                          |                              |              |                          |                    |    |  |
| Center 2.4        | 02 GHz             |  | 300 kHz/                 |                              |              | Spa                      | n 3 MHz            | ш  |  |

Page 30 of 39

Report No.: TW2101269E



| Product:       | WIRED BLUETOOTH DUAL MODE<br>MECHANICAL KEYBOARD |       |           |         | Test Mode: |              |                       | Keep transmitting                                |         |                     |     |
|----------------|--|-------|-----------|---------|------------|--------------|-----------------------|--|---------|---------------------|-----|
| Mode           | Keeping Transmitting                             |       |           |         |            | Test Voltage |                       |  | DC      | C3.8V               |     |
| Temperature    |  | 24    | 4 deg. C, |         |            | Humidity     |                       |  | 569     | % RH                |     |
| Test Result:   |  |       | Pass      |         |            | Detector     |                       |  | ]       | PK                  |     |
| 20dB Bandwidth |  | 1.    | 196MHz    |         |            |              |                       |  |         |                     |     |
| $\wedge$       | M  | arker | 1 [T1 r   | ndB]    | Rl         | BW           | 100 ki                | Hz Rl  | F Att   | 20 dB               |     |
| Ref Lvl        |  | dB    |           |         |            | BW           | 300 ki                |  |         |                     |     |
| 10 dBm         | В  | W 1   | .196392   | 279 MHz | SI         | WT           | 5 ms                  | s Uı   | nit     | dBm                 |     |
| 10             |  |       |           |         |            |              | <b>v</b> <sub>1</sub> | [m1.]  |         | 16 15               |     |
|                |  |       |           |         |            |              | , 1                   | [T1]   | 2.43971 | .16 dBm<br>.443 GHz | A   |
| 0              |  |       |           | 1       |            |              | ndB                   |  | 2.43971 | 0.00 dB             |     |
|                |  |       | /         |         |            |              | BW                    |  | 1.19639 |                     |     |
| -10            |  |       |           |         |            |              | $ abla_{\mathrm{T1}}$ | [T1]   | -23     | 3.06 dBm            |     |
|                |  |       |           |         |            |              | ~                     |  | 2.43937 | 776 GHz             |     |
|                |  |       |           |         |            |              | V <sub>T</sub> 2      | [T1]   | -23     | 3.83 dBm            |     |
| -20            |  | 7     | -         |         |            |              | <u>F</u> 2            |  | 2.44057 | 415 GHz             | 1MA |
| IMAX           |  |       |           |         |            |              | }                     | \  |         |                     | IMA |
| -30            | - Armore   |       |           |         |            |              |                       | <del>\                                    </del> |         |                     |     |
|                | سممس   |       |           |         |            |              |                       | July   |         |                     |     |
| -40            |  |       |           |         |            |              |                       |  | ****    |                     |     |
|                |  |       |           |         |            |              |                       |  |         |                     |     |
| -50            |  |       |           |         |            |              |                       |  |         |                     |     |
|                |  |       |           |         |            |              |                       |  |         |                     |     |
|                |  |       |           |         |            |              |                       |  |         |                     |     |
| -60            |  |       |           |         |            |              |                       |  |         |                     |     |
|                |  |       |           |         |            |              |                       |  |         |                     |     |
| -70            |  |       |           |         |            |              |                       |  |         |                     |     |
|                |  |       |           |         |            |              |                       |  |         |                     |     |
| -80            |  |       |           |         |            |              |                       |  |         |                     |     |
|                |  |       |           |         |            |              |                       |  |         |                     |     |
| -90            |  |       |           |         |            |              |                       |  |         |                     |     |
| Center 2       | .44 GHz  |       |           | 300     | kHz/       |              |                       |  | Spa     | an 3 MHz            |     |
| Date: 23       | 3.MAR.202  | 22 09 | :39:12    |         |            |              |                       |  |         |                     |     |
|                |  |       |           |         |            |              |                       |  |         |                     |     |

Page 31 of 39

Report No.: TW2101269E



| Product:          | WIRED BLUETOOTH DUAL MODE<br>MECHANICAL KEYBOARD |                                       |       |   | Test Mode:     |                          |                 | Keep transmitting                |  |     |
|-------------------|--|---------------------------------------|-------|---|----------------|--------------------------|-----------------|----------------------------------|--|-----|
| Mode              | Keeping Transmitting                             |                                       |       |   | Test Voltage   |                          |                 | DC                               | C3.8V                                    |     |
| Temperature       | 2  | 4 deg. C,                             |       |   | Humidity       |                          |                 | 569                              | % RH                                     |     |
| Test Result:      |  | Pass                                  |       |   | Detector       |                          |                 | ]                                | PK                                       |     |
| 20dB Bandwidth    | 1.   | 202MHz                                |       |   |                |                          |                 |                                  |  |     |
| Ref Lvl<br>10 dBm | ndB  | 1 [T1 r<br>20.                        | 00 dB | V | BW<br>BW<br>WT | 100 kH<br>300 kH<br>5 ms | łz              | F Att                            | 20 dB                                    | ı   |
| 0                 |  |                                       |       |   |                | ndB<br>BW                | [T1]            | 2.47972<br>2.420240              | 0.00 dB                                  | A   |
| -10               | 77   | A A A A A A A A A A A A A A A A A A A |       | \ | Mark Control   | ▼ <sub>T1</sub>          | [T1]<br>[T1]    | -22<br>2.47937<br>-22<br>2.48057 | .31 dBm<br>174 GHz<br>.53 dBm<br>415 GHz |     |
| -30               |  |                                       |       |   |                | V                        | Language Market |                                  |  | 1MA |
| -40               |  |                                       |       |   |                |                          |                 |                                  |  |     |
| -50               |  |                                       |       |   |                |                          |                 |                                  |  |     |
| -60               |  |                                       |       |   |                |                          |                 |                                  |  |     |
| -70               |  |                                       |       |   |                |                          |                 |                                  |  |     |
| -80               |  |                                       |       |   |                |                          |                 |                                  |  |     |
| Center 2          | :42:08   | 300                                   | kHz/  | ' |                |                          | Spa             | an 3 MHz                         | 1  |     |

Report No.: TW2101269E Page 32 of 39

Date: 2022-04-08



#### 10.0 FCC ID Label

#### FCC ID: TUVET-8452B

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### **Mark Location:**



Page 33 of 39

Report No.: TW2101269E

Date: 2022-04-08



#### 11.0 Photo of testing

#### 11.1 Conducted test View--




Page 34 of 39

Report No.: TW2101269E

Date: 2022-04-08



#### Radiated emission test view

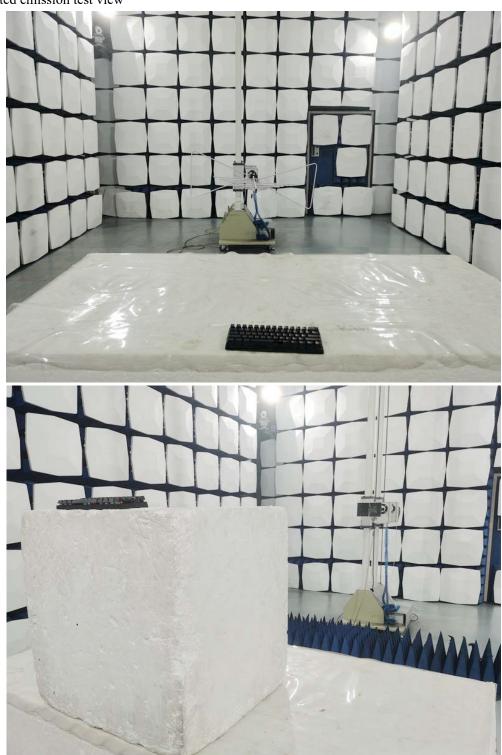

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2022-04-08



#### 11.2 Photographs-EUT

#### Outside View



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2022-04-08



#### Photographs – EUT

#### Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 37 of 39 Report No.: TW2101269E




Outside View



Page 38 of 39

Report No.: TW2101269E



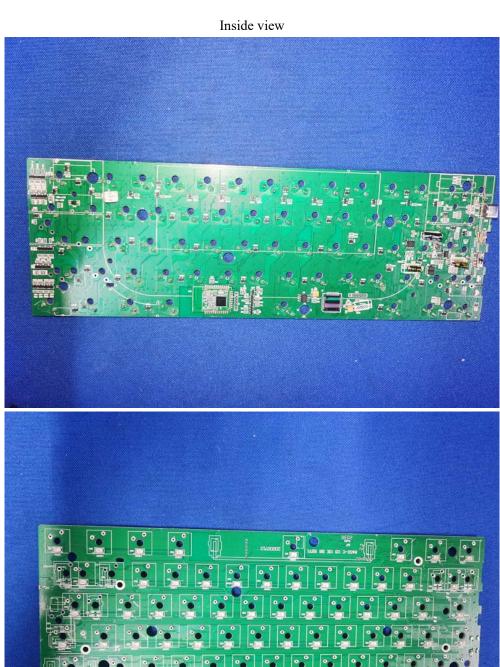


Page 39 of 39

Report No.: TW2101269E

Date: 2022-04-08



Inside view

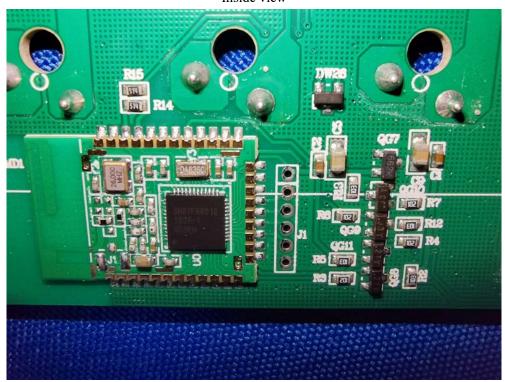



-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.