

Applicant: Eastern Times Technology Co.,Ltd

Product: 3MODES 60% ALUMINUM RGB MECHANICAL

KEYBOARD

Model No.: K641G-GW-RGB-PRO, ET-8876, K641B-BW-RGB-PRO

Trademark: REDRAGON

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 & FCC Part 15 Subpart C,

Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Terry long

Terry Tang

Manager

Dated: October 30, 2023


Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Report No.: TW2308374-02E Page 2 of 35

Date: 2023-10-30



Special Statement:

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

CAB identifier: CN0033

4

4

4

4

5

Report No.: TW2308374-02E

Date: 2023-10-30

1.5

1.6



Test Report Conclusion

	Content
1.0	General Details.
1.1	Test Lab Details
1.2	Applicant Details.
1.3	Description of EUT
1.4	Submitted Sample

1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details.	7

Test Duration.

Test Uncertainty.

4.0	EUT Modification.	7
3.2	Test Standards.	7
3.1	Summary of Test Results	7

5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test	8
5.2	Test Method and Test Procedure	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition	9
5.5	Conducted Emission Limit.	9

5.6	Test Result	9
6.0	Radiated Emission test	12
6.1	Test Method and Test Procedure	12
62	Configuration of the FUT	13

6.2	Configuration of the EUT	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit	13
6.5	Test Result	15

7.0	Band Edge	23
7.1	Test Method and Test Procedure.	23
7.2	Radiated Test Setup	23

7.3	Configuration of the EUT	23
7.4	EUT Operating Condition.	23
7.5	Band Edge Limit.	23
- -	D 151 M (D 1)	

7.6	Band Edge Test Result.	24
8.0	Antenna Requirement	28
9.0	20dB bandwidth measurement.	29

10.0FCC ID Label3311.0Photo of Test Setup and EUT View34

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2023-10-30



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Eastern Times Technology Co.,Ltd

Address: Building D, Nan An Industrial Area, Youganpu Village, Fenggang Town, Dongguan City,

Guangdong, China.

Telephone: --Fax: --

1.3 Description of EUT

Product: 3MODES 60% ALUMINUM RGB MECHANICAL KEYBOARD

Manufacturer: Eastern Times Technology Co.,Ltd

Address: Building D, Nan An Industrial Area, Youganpu Village, Fenggang Town,

Dongguan City, Guangdong, China.

Trademark: REDRAGON

Model Number: K641G-GW-RGB-PRO

Additional Model Name ET-8876, K641B-BW-RGB-PRO

Rating: Input: DC5V, 740mA or DC3.7V, 260mA

Battery: DC3.7V, 3000mAh Li-ion battery

Hardware Version: 8876-A V1 Software Version: 6A5D

Serial No.: RDK641G-GW-RGB-PRO23012500219

Operation Frequency: 2402-2480MHz

Modulation Type: GFSK Number of Channels: 79 Channel Separation: 1MHz

Antenna Designation PCB antenna with gain -7.30dB maximum (Get from the antenna

specification)

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2308374-02E Page 5 of 35

Date: 2023-10-30



1.4 Submitted Sample: 2 Samples

1.5 Test Duration 2023-08-29 to 2023-10-30

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty =3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Page 6 of 35

Report No.: TW2308374-02E

Date: 2023-10-30



2.0 Test Equipment	2.0 Test Equipment				
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2023-07-14	2024-07-13
LISN	R&S	EZH3-Z5	100294	2023-07-14	2024-07-13
LISN	R&S	EZH3-Z5	100253	2023-07-14	2024-07-13
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2023-07-14	2024-07-13
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17
Spectrum	R&S	FSIQ26	100292	2023-07-14	2024-07-13
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2024-07-17
Power meter	Anritsu	ML2487A	6K00003613	2023-07-14	2024-07-13
Power sensor	Anritsu	MA2491A	32263	2023-07-14	2024-07-13
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17
9*6*6 Anechoic			N/A	2022-07-26	2025-07-25
EMI Test Receiver	RS	ESVB	826156/011	2023-07-14	2024-07-13
EMI Test Receiver	RS	ESCS 30	834115/006	2023-07-14	2024-07-13
Spectrum	HP/Agilent	E4407B	MY50441392	2023-07-14	2024-07-13
Spectrum	RS	FSP	1164.4391.38	2023-07-14	2024-07-13
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA		2023-07-14	2024-07-13
RF Cable	Zhengdi	7m		2023-07-14	2024-07-13
Pre-Amplifier	Schwarebeck	BBV9743	#218	2023-07-14	2024-07-13
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2023-07-14	2024-07-13
LISN	SCHAFFNER	NNB42	00012	2023-07-14	2024-07-13
ESPI Test Receiver	R&S	ESPI 3	100379	2023-07-14	2024-07-13
LISN	R&S	EZH3-Z5	100294	2023-07-14	2024-07-13

2.2 Automation Test Software

For Conducted Emission Test

Name	Version	
EZ-EMC	Ver.EMC-CON 3A1.1	

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 7 of 35

Report No.: TW2308374-02E

Date: 2023-10-30



3.0 Technical Details

3.1 Summary of test results

The EUT has been	tested accord	ling to the foll	owing specifications:
			o

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph 15.207	Conducted Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	Pass	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	Pass	Complies
FCC Part 15.215(c)	20dB bandwidth	Pass	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2023-10-30



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test

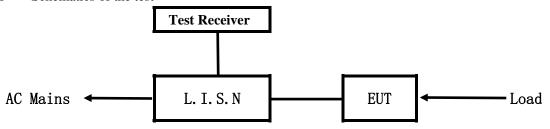


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

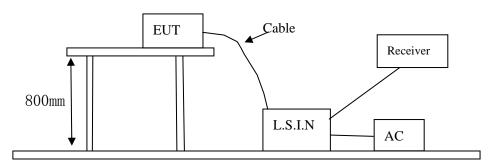

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

79 channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID
3MODES 60% ALUMINUM RGB MECHANICAL KEYBOARD	Eastern Times Technology Co.,Ltd	K641G-GW-RGB-PRO, ET-8876, K641B-BW-RGB-PRO	TUVET-8876A

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2308374-02E Page 9 of 35

Date: 2023-10-30



B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	KEYU	KA23-0502000DEU	Input: 100-240V~, 50/60Hz, 0.35A;
			Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB µ V)			
(MHz)	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	56.0	46.0		
5.00 ~ 30.00	60.0	50.0		

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

5.6 Test Results:

Date: 2023-10-30



A: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging + Communication by BT

Results: Pass

Please refer to following diagram for individual

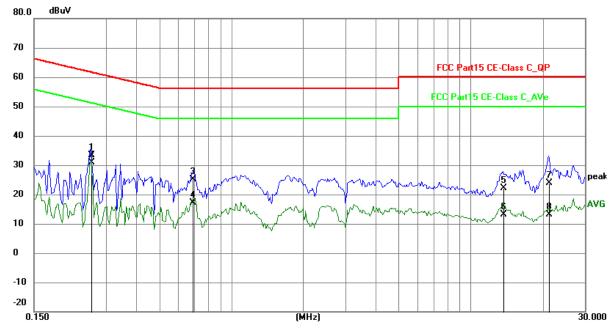

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2592	23.73	9.75	33.48	61.46	-27.98	QP	Р
2	0.2592	21.17	9.75	30.92	51.46	-20.54	AVG	Р
3	0.6920	15.29	9.78	25.07	56.00	-30.93	QP	Р
4	0.6920	7.45	9.78	17.23	46.00	-28.77	AVG	Р
5	13.6275	11.80	10.32	22.12	60.00	-37.88	QP	Р
6	13.6275	2.76	10.32	13.08	50.00	-36.92	AVG	Р
7	21.2208	13.22	10.76	23.98	60.00	-36.02	QP	Р
8	21.2208	2.32	10.76	13.08	50.00	-36.92	AVG	Р

Date: 2023-10-30



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging + Communication by BT

Results: Pass

Please refer to following diagram for individual

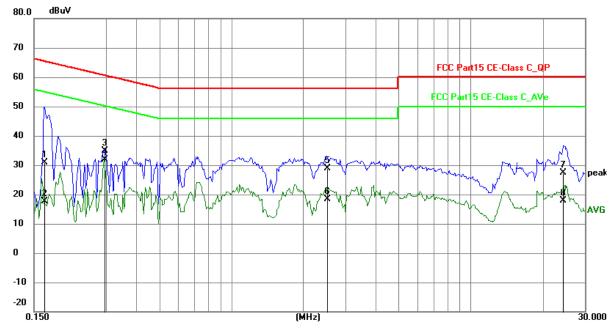

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1655	21.09	9.77	30.86	65.18	-34.32	QP	Р
2	0.1655	7.81	9.77	17.58	55.18	-37.60	AVG	Р
3	0.2943	25.14	9.76	34.90	60.40	-25.50	QP	Р
4	0.2943	22.00	9.76	31.76	50.40	-18.64	AVG	Р
5	2.5056	19.01	9.82	28.83	56.00	-27.17	QP	Р
6	2.5056	8.54	9.82	18.36	46.00	-27.64	AVG	Р
7	24.3876	16.45	10.95	27.40	60.00	-32.60	QP	Р
8	24.3876	6.86	10.95	17.81	50.00	-32.19	AVG	Р

Date: 2023-10-30



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 9kHz to 25 GHz was investigated. The frequency spectrum is set as follows:


Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
ADOVE IGHZ	Peak	1MHz	10Hz	Average

(Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.

- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup


For radiated emissions from 9kHz to 30MHz

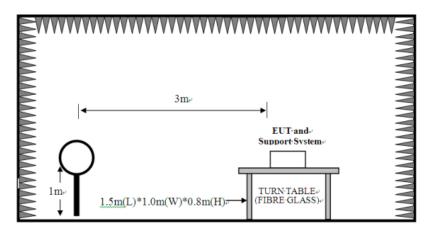


Date: 2023-10-30



For radiated emissions from 30MHz to1GHz

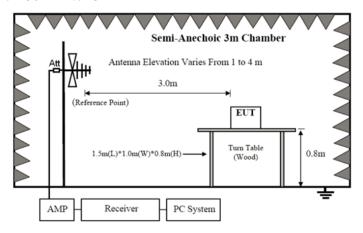

For radiated emissions above 1GHz

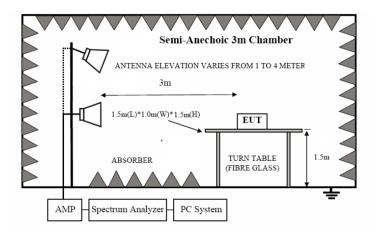

- 6.2 Configuration of the EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Strength of Fundamental (3m)			Field Strength of Harmonics (3m)		
(MHz)	mV/m dBuV/m		uV/m	dBuV/m		

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2308374-02E Page 14 of 35

Date: 2023-10-30



2400-2483.5 50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)
----------------	--------------	------------	-----	--------------	-----------

Note:

- 1. RF Field Strength $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
0.009-0.490	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-80	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. Battery fully charged was used during the test.

Report No.: TW2308374-02E Page 15 of 35

Date: 2023-10-30




6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

Horizontal

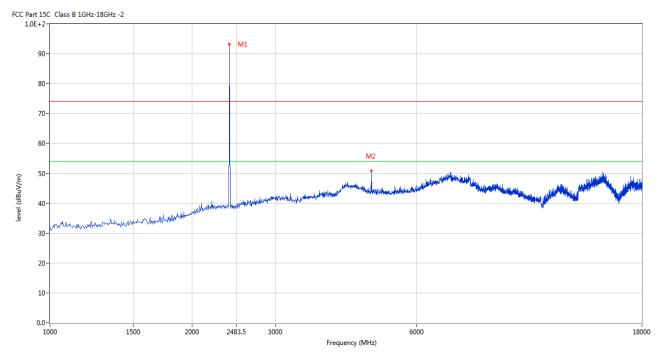


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402	95.24	-3.57	114.0	-18.76	Peak	79.00	100	Horizontal	Pass
1**	2402	86.08	-3.57	94.0	-7.92	AV	79.00	100	Horizontal	Pass
2	4802.799	50.79	3.12	74.0	-23.21	Peak	74.00	100	Horizontal	Pass

Report No.: TW2308374-02E Page 16 of 35

Date: 2023-10-30



Vertical

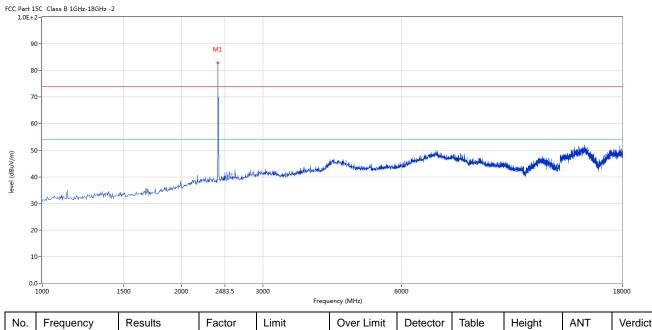

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402	83.87	-3.57	114.0	-30.13	Peak	205.00	100	Vertical	Pass


Report No.: TW2308374-02E Page 17 of 35

Date: 2023-10-30



Please refer to the following test plots for details: Middle Channel-2441MHz

Horizontal

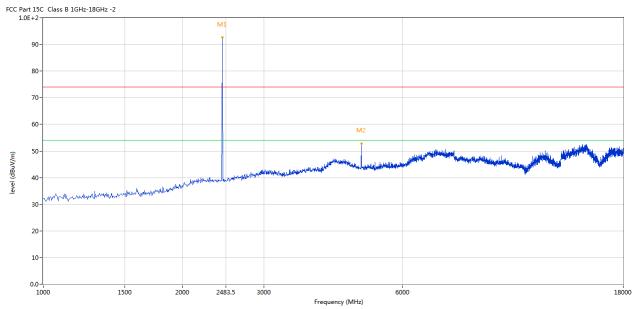


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2441	92.61	-3.57	114.0	-21.39	Peak	79.00	100	Horizontal	Pass
2	4879.280	52.76	3.20	74.0	-21.24	Peak	109.00	100	Horizontal	Pass

Report No.: TW2308374-02E Page 18 of 35

Date: 2023-10-30



Vertical

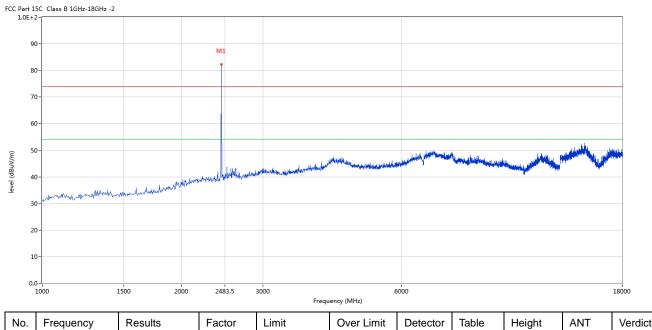

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2441	82.33	-3.57	114.0	-31.67	Peak	206.00	100	Vertical	Pass


Report No.: TW2308374-02E Page 19 of 35

Date: 2023-10-30



Please refer to the following test plots for details: High Channel-2480MHz

Horizontal

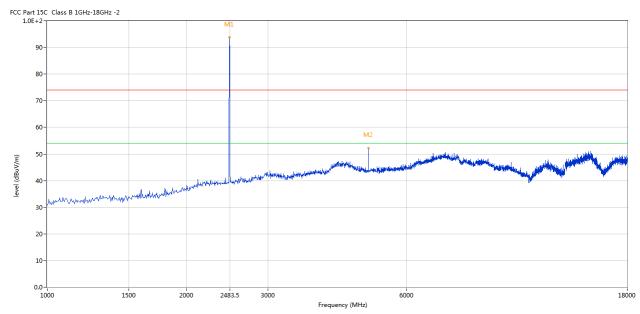


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2480	93.85	-3.57	114.0	-20.15	Peak	96.00	100	Horizontal	Pass
1**	2480	84.59	-3.57	94.0	-9.41	AV	96.00	100	Horizontal	Pass
2	4960.010	52.13	3.36	74.0	-21.87	Peak	101.00	100	Horizontal	Pass

Report No.: TW2308374-02E Page 20 of 35

Date: 2023-10-30



Vertical

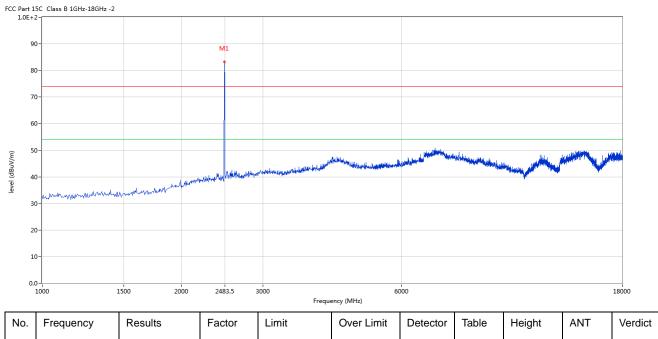

Ν	0.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1		2480	83.81	-3.57	114.0	-30.19	Peak	1.00	100	Vertical	Pass

Note: (1) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (2) Margin=Emission-Limits
- (3) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (4) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise and less than the limit for more than 20dB. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2308374-02E Page 21 of 35

Date: 2023-10-30




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

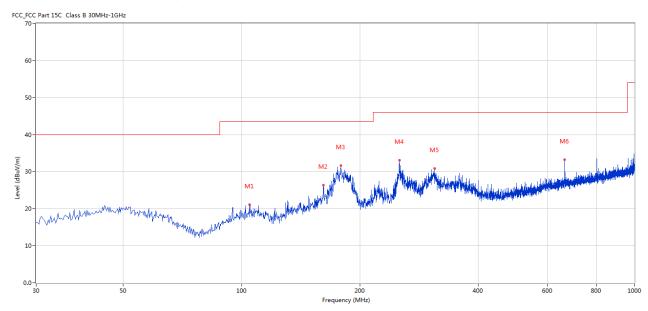

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	104.914	21.11	-13.23	43.5	22.39	Peak	261.00	100	Horizontal	Pass
2	161.645	26.40	-16.39	43.5	17.10	Peak	304.00	100	Horizontal	Pass
3	178.858	31.68	-15.41	43.5	11.82	Peak	267.00	100	Horizontal	Pass
4	252.074	33.11	-12.07	46.0	12.89	Peak	175.00	100	Horizontal	Pass
5	310.017	30.80	-10.70	46.0	15.20	Peak	256.00	100	Horizontal	Pass
6	663.737	33.23	-4.42	46.0	12.77	Peak	274.00	100	Horizontal	Pass

Report No.: TW2308374-02E Page 22 of 35

Date: 2023-10-30




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

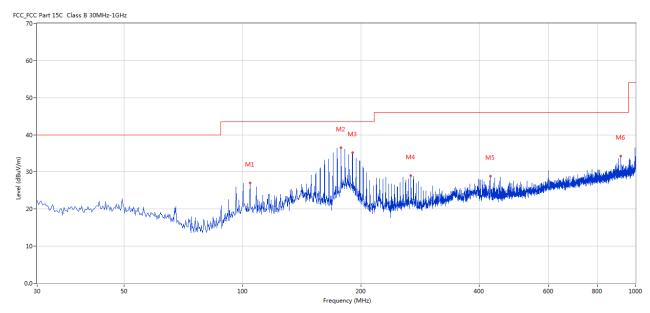

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	104.429	27.08	-13.28	43.5	16.42	Peak	27.00	100	Vertical	Pass
2	178.130	36.58	-15.51	43.5	6.92	Peak	22.00	100	Vertical	Pass
3	190.495	35.16	-14.32	43.5	8.34	Peak	24.00	100	Vertical	Pass
4	268.318	29.02	-11.71	46.0	16.98	Peak	1.00	100	Vertical	Pass
5	427.116	28.83	-8.18	46.0	17.17	Peak	322.00	100	Vertical	Pass
6	918.540	34.25	-2.02	46.0	11.75	Peak	337.00	100	Vertical	Pass

Date: 2023-10-30




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

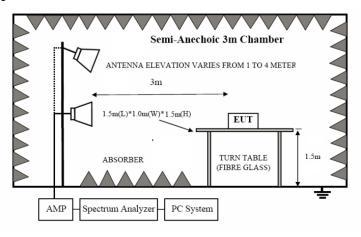

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of the EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: TW2308374-02E Page 24 of 35

Date: 2023-10-30



7.6 Test Result

]	Product:			LUMINUM R L KEYBOAR		Polar	ity		Horizontal	
	Mode		Keeping Tra		D	Test Vol	tage		DC3.7V	
Te	mperature		24 de			Humic			56% RH	
	est Result:		Pas	_						
FCC Pai	rt 15C Class B 1GHz-18GH	łz -2		-						
	90-							M2	M1	
level (dBuV/m)	40-	والدأ ويتنافعه وأراب المسترو والمراز والمالية والمرازع وا	ortologisku, mikin, tujukh	abayaha dhaannaya dhilik	halida dakalin birakka kabupilak da angland		13).	
level (dBuV/m)	30- 20-	tikdogilligar dejo-lasi prahvori sirizadina	ord-skopskilas, socilaise, kirjinkla	niversity discovered discovered	desta, data sa periodo da secondo co			Haland .	X	M
level (dBuV/m)	30-	(indoquillipan addyn-lan) prajmont (iniganish)	erā viņa dilas, veikies, i u ģrāļas	nisegols desarrosses de delle	Frequency (MHz)			Wales of the second	X	2410
(m/\mu/\mu/\mu) level	30 - 20 - 10 - 0.0	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Frequency (MHz) Over Limit (dB)			Height (cm)	ANT	2410 Verdic
No.	30- 20- 10- 2350	Results			Over Limit		Table	_	ANT Horizontal	
No.	30- 20- 10- 2350 Frequency (MHz)	Results (dBuV/m)	(dB)	(dBuV/m)	Over Limit (dB)	Detector	Table (o)	(cm)		Verdic
	30- 20- 10- 2350 Frequency (MHz) 2402.187	Results (dBuV/m) 94.06	(dB) -3.57	(dBuV/m) 74.0	Over Limit (dB) 20.06	Detector Peak	Table (o) 86.00	(cm)	Horizontal	Verdid

Report No.: TW2308374-02E Page 25 of 35

Date: 2023-10-30



F	Product:			LUMINUM F LKEYBOAR		Detect	or		Vertical	
	Mode	K	Leeping Tra	ansmitting		Test Vol	tage]	DC3.7V	
Teı	mperature		24 deg	g. C,		Humid	ity		56% RH	
Te	st Result:		Pas	SS						
C Part 1 1.0E+2	5C Class B 1GHz-18GHz -	2								
90	0-									
									M1	
80	0-									
70	0-							<i></i>	$- \downarrow -$	
60	0-							-+	<u>\</u>	
						M4 _M :		T .	N ₁	
, 50	0-					* *	di	M2		
. 50			1					J _{M2}	V	.
40		والمعادلة	de la desta de la constanta de	والمستنبط والمراجع والمتعارب والمتعا	البطالة أفادين هيئين بالمسافر أفارا			, M2	V	Makashaliyadi
40	O-	والمساورين والمساورين والمساورة والمساورة المساورة المساورة والمساورة والمساورة والمساورة والمساورة والمساورة	المسالم والمالية والم	eride eridene drageridded	ijdi an jedinica na dibibben			M2 •		Marshall
40	O-	يرخط أعامل المراجع والمستعادة وال	المرافعية فالماسية ومانه	epocifik an elderkel eroppozedlik de	distribution of the state of th			M2	, and the second	Marshilleride
30		od bilakistysses kadis og fystosist	h didunt out on the	والمستراط والمسترط والمستراط والمستر	المنافقة ال			M2		Mary de Mary
40 30 20		och deleviseren hande spelde en frelsen e	المسيأة مودية عاطا الدوية المسترك	uponida an idalupulungan madda ad	المرافز المعلمة والمعلمة والمعلمة المعلمة المتعلمة المتعلمة المتعلمة والمتعلمة المتعلمة المتع			M2		March House
30 20 10		e de Labella de come la come de come de la constitución de la constitu	المسالم والمار والماران والمار		Frequency (MHz)			M2		्यूच का प्रश्निक स्थापना है। स्थापना स्थापना
30 20 10		Results	Factor				Table	Height	ANT	24
40 30 20 10	0-2350				Frequency (MHz)		Table (o)	Height (cm)	ANT	24
40 30 20 10	o- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0-	Results	Factor	Limit	Frequency (MHz) Over Limit			_	ANT Vertical	2- Verdi
40 30 20 10 0.0	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Frequency (MHz) Over Limit (dB)	Detector	(o)	(cm)		Verdi
30 20 10 10 No.	Frequency (MHz)	Results (dBuV/m) 83.69	Factor (dB)	Limit (dBuV/m) 74.0	Frequency (MHz) Over Limit (dB) 9.69	Detector Peak	(o) 184.00	(cm)	Vertical	24 Verdi
30 20 10 0.0 No.	Frequency (MHz) 2402.097	Results (dBuV/m) 83.69 64.49	Factor (dB) -3.57 -3.57	Limit (dBuV/m) 74.0 74.0	Over Limit (dB) 9.69 -9.51	Detector Peak Peak	(o) 184.00 184.00	(cm) 100 100	Vertical Vertical	Verdi N/A Pass

Report No.: TW2308374-02E Page 26 of 35

Date: 2023-10-30



I	Product:			ALUMINUM AL KEYBOA		P	olarity		Horizont	al
	Mode		Keeping 7	Transmitting		Test	t Voltage		DC3.7\	1
Te	mperature		24 d	leg. C,		Hı	ımidity		56% RI	ł
	est Result:			ass						
C Part 1	15C Class B 1GHz-18GHz	z -2						L		
8 7 6	00- 00- 00- 00-	Mill	M. Mary Mary Mary Mary Mary Mary Mary Mary	The state of the s	Hu _q					
3	10-	plant in Judge de la company de la compa		M.	2	Marketon Marketon Advisor Control of the Control of	leigeschen bescheide der Steiner Stein		in the second second	ligas qu. 3-stiligas ta des pristas.
4 3 2	10-	nentral photographic design of the second		M.	3.5	Made de la companya della companya della companya de la companya della companya d	lishadh obalishinn shi	andal de de de mei de gregorie de	in the Marian service of the Section	yna raydu ya
4 3 2 1	10		Footor	248.	3.5 Frequency (MHz)			Jakin Line	ANT.	ı
4 3 2	200- 2470	Results	Factor	248 Limit	3.5 Frequency (MHz)	Detector	Table	Height	ANT	ı
3 3 2 1 1 0.	Frequency (MHz)	Results (dBuV/m)	(dB)	Limit (dBuV/m)	3.5 Frequency (MHz) Over Limit (dB)	Detector	Table (o)	(cm)		Verdi
3 3 2 1 1 0.	Frequency (MHz) 2479.890	Results (dBuV/m) 92.22	(dB) -3.57	Limit (dBuV/m) 74.0	3.5 Frequency (MHz) Over Limit (dB) 18.22	Detector Peak	Table (o) 89.00	(cm)	Horizontal	Verdi
3 3 2 1 1 0.	Frequency (MHz)	Results (dBuV/m)	(dB)	Limit (dBuV/m)	3.5 Frequency (MHz) Over Limit (dB)	Detector	Table (o)	(cm)		Verdi

Page 27 of 35

Report No.: TW2308374-02E

Date: 2023-10-30



	Product:			LUMINUM R L KEYBOAR		Detec	tor		Vertical	
	Mode			ansmitting		Test Vol	Itage		DC3.7V	
Te	emperature		24 de			Humic			56% RH	
	est Result:		Pas							
FCC Pa	rt 15C Class B 1GHz-18GH: DE+2-	z -2		<u> </u>				1		
	90- 80- 70-		M1							
level (dBuV/m)	50- 40- 30- 20-	Nakin salah Bilanda yakada			mandely produced by the state of the state o	addin vitteliteran þá líksi	ik krajolik polenoka	dikkoris didak, ord endersold	allan-describbilitati	ody of the United States
level (dBuV/m)	50- 40- 30-	laki, maaka ki fisik wilayo da ah		2483.5		addin o Historia da Nad	ik majolik platoka	dikkinis didak, nikenderadi		2500
	50- 40- 30- 20- 10-	Results	Factor			Detector	Table	Height	ANT	ı
	30 - 20 - 10 - 2470		Factor (dB)	T	Frequency (MHz)					ı
(w/nngp) ana	30- 20- 10- 2470	Results		Limit	Frequency (MHz) Over Limit		Table	Height		2500 Verdid

Note: The PK emission level less than the AV limit. No necessary to record the AV emission level.

Report No.: TW2308374-02E Page 28 of 35

Date: 2023-10-30



8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB antenna with gain -7.30 dBi maximum. It fulfills the requirement of this section.

Test Result: Pass

Date: 2023-10-30



Page 29 of 35

9.0 20dB Bandwidth Measurement

Test Configuration



Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Limit

N/A

Page 30 of 35


Report No.: TW2308374-02E

Date: 2023-10-30



Test Result

GFSK					
Product:	3MODES 60% ALUMINUM RGB MECHANICAL KEYBOARD	Test Mode:	Keep transmitting		
Mode	Keeping Transmitting	Test Voltage	DC3.7V		
Temperature	24 deg. C,	Humidity	56% RH		
Test Result:	Pass	Detector	PK		
20dB Bandwidth	1.230MHz				
20dB Bandwidth	1.230MHz				

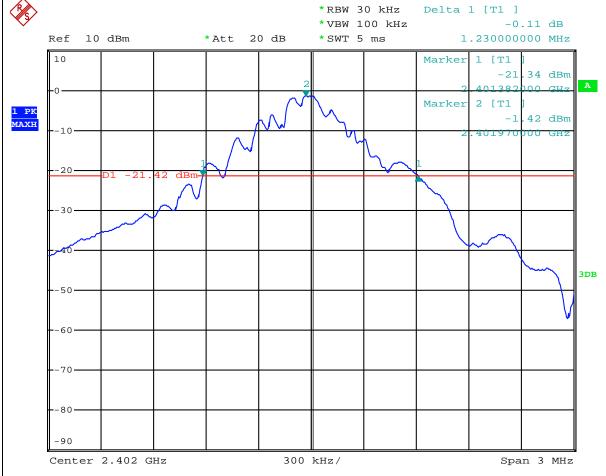

Date: 10.SEP.2023 14:41:40

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 31 of 35

Report No.: TW2308374-02E

Date: 2023-10-30



GFSK					
Product:	3MODES 60% ALUMINUM RGB	Test Mode:	Keep transmitting		
	MECHANICAL KEYBOARD				
Mode	Keeping Transmitting	Test Voltage	DC3.7V		
Temperature	24 deg. C,	Humidity	56% RH		
Test Result:	Pass	Detector	PK		
20dB Bandwidth	1.164MHz				

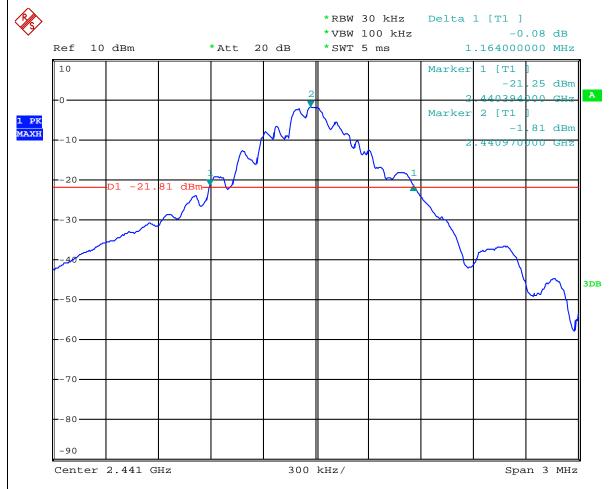

Date: 10.SEP.2023 14:50:29


Page 32 of 35

Report No.: TW2308374-02E

Date: 2023-10-30



GFSK					
Product:	3MODES 60% ALUMINUM RGB	Test Mode:	Keep transmitting		
	MECHANICAL KEYBOARD				
Mode	Keeping Transmitting	Test Voltage	DC3.7V		
Temperature	24 deg. C,	Humidity	56% RH		
Test Result:	Pass	Detector	PK		
20dB Bandwidth	1.074MHz				

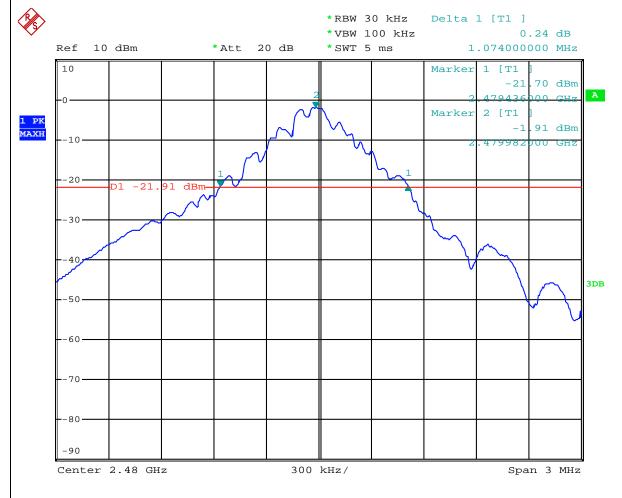

Date: 10.SEP.2023 14:53:02

Report No.: TW2308374-02E Page 33 of 35

Date: 2023-10-30




10.0 FCC ID Label

FCC ID: TUVET-8876A

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

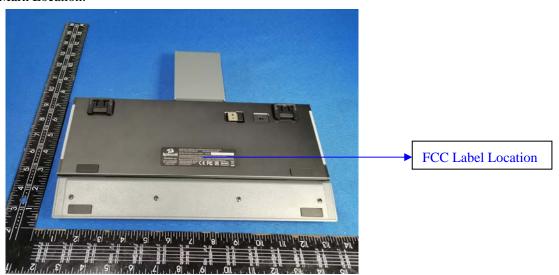

Page 34 of 35


Report No.: TW2308374-02E

Date: 2023-10-30



11.0 Photo of testing

11.1 Conducted test View

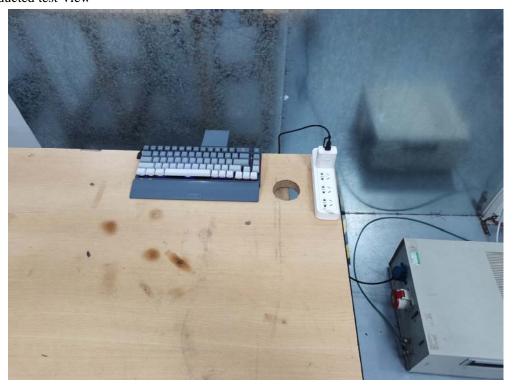

Page 35 of 35

Report No.: TW2308374-02E

Date: 2023-10-30



Radiated emission test view



11.2 Photographs – EUT

Please refer test report TW2308374-01E

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.