

FCC CERTIFICATION  
On Behalf of  
Eastern Times Technology Co., Ltd.

Wireless Optical Mouse  
Model No.: DS-2134

**FCC ID: TUVMSEB**

Prepared for : Eastern Times Technology Co., Ltd.  
Address : Building 5, Penghua Industry Park, Heping Rd.(W),  
Longhua, Shenzhen, Guangdong, P.R. China

Prepared by : ACCURATE TECHNOLOGY CO. LTD  
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report Number : ATE20052251  
Date of Test : December 12, 2005  
Date of Report : December 16, 2005

## TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility .....	4
1.3. Measurement Uncertainty .....	4
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>5</b>
<b>3. RADIATED EMISSION FOR FCC PART 15 SECTION 15.227(B).....</b>	<b>6</b>
3.1. Block Diagram of Test Setup.....	6
3.2. The Field Strength of Radiation Emission Measurement Limits.....	6
3.3. Configuration of EUT on Measurement .....	7
3.4. Operating Condition of EUT .....	7
3.5. Test Procedure .....	7
3.6. The Field Strength of Radiation Emission Measurement Results .....	8
<b>4. FUNDAMENTAL RADIATED EMISSION FOR FCC PART 15 SECTION 15.227(A) .....</b>	<b>9</b>
4.1. Block Diagram of Test Setup.....	9
4.2. The Emission Limit For Section 15.227(a) .....	9
4.3. EUT Configuration on Measurement .....	10
4.4. Operating Condition of EUT .....	10
4.5. Test Procedure .....	10
4.6. The Emission Measurement Result .....	11
<b>5. BAND EDGES .....</b>	<b>12</b>
5.1. The Requirement .....	12
5.2. EUT Configuration on Measurement .....	12
5.3. Operating Condition of EUT .....	12
5.4. Test Procedure .....	12
5.5. The Measurement Result .....	13
APPENDIX I ( TEST CURVES) (3pages)	

## Test Report Certification

Applicant : Eastern Times Technology Co., Ltd.  
Manufacturer : Eastern Times Technology Co., Ltd.  
EUT Description : Wireless Optical Mouse  
(A) MODEL NO.: DS-2134  
(B) SERIAL NO.: N/A  
(C) POWER SUPPLY: 2.4V DC (“AAA” batteries 2×)


Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.227: 2004 & ANSI C63.4: 2003

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.227 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : December 16, 2005

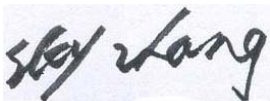Prepared by :   
(Engineer)

Reviewer :   
(Quality Manager)

Approved & Authorized Signer :   
(Manager)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT : Wireless Optical Mouse

Model Number : DS-2134

Power Supply : 2.4V DC (“AAA” batteries 1 ×)

Applicant : Eastern Times Technology Co., Ltd.  
Address : Building 5, Penghua Industry Park, Heping Rd.(W),  
Longhua, Shenzhen, Guangdong, P.R. China

Manufacturer : Eastern Times Technology Co., Ltd.  
Address : Building 5, Penghua Industry Park, Heping Rd.(W),  
Longhua, Shenzhen, Guangdong, P.R. China

Date of sample received : December 12, 2005

Date of Test : December 16, 2005

### 1.2. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen, May 10, 2004  
Accredited by FCC, May 10, 2004  
The Certificate Registration Number is 253065  
Accredited by Industry Canada, May 18, 2004  
The Certificate Registration Number is IC 5077

Name of Firm : ACCURATE TECHNOLOGY CO. LTD  
Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

### 1.3. Measurement Uncertainty

Conducted Emission Uncertainty =  $\pm 2.66\text{dB}$

Radiated Emission Uncertainty =  $\pm 4.26\text{dB}$

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	12.16.2006
EMI Test Receiver	Rohde&Schwarz	ESI26	838786/013	12.16.2006
Loop Antenna	Schwarzbeck	FMZB1516	113	12.16.2006
Bilog Antenna	Schwarzbeck	VULB9163	9163-194	12.16.2006
Horn Antenna	Rohde&Schwarz	HF906	100013	12.16.2006
Spectrum Analyzer	Anritsu	MS2651B	6200238856	12.16.2006
Pre-Amplifier	Agilent	8447D	2944A10619	12.16.2006
Signal Generator	GW	GAG-810	0913317	12.16.2006

### 3. RADIATED EMISSION FOR FCC PART 15 SECTION 15.227(B)


#### 3.1. Block Diagram of Test Setup

##### 3.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless Optical Mouse)

##### 3.1.2. Anechoic Chamber Test Setup Diagram

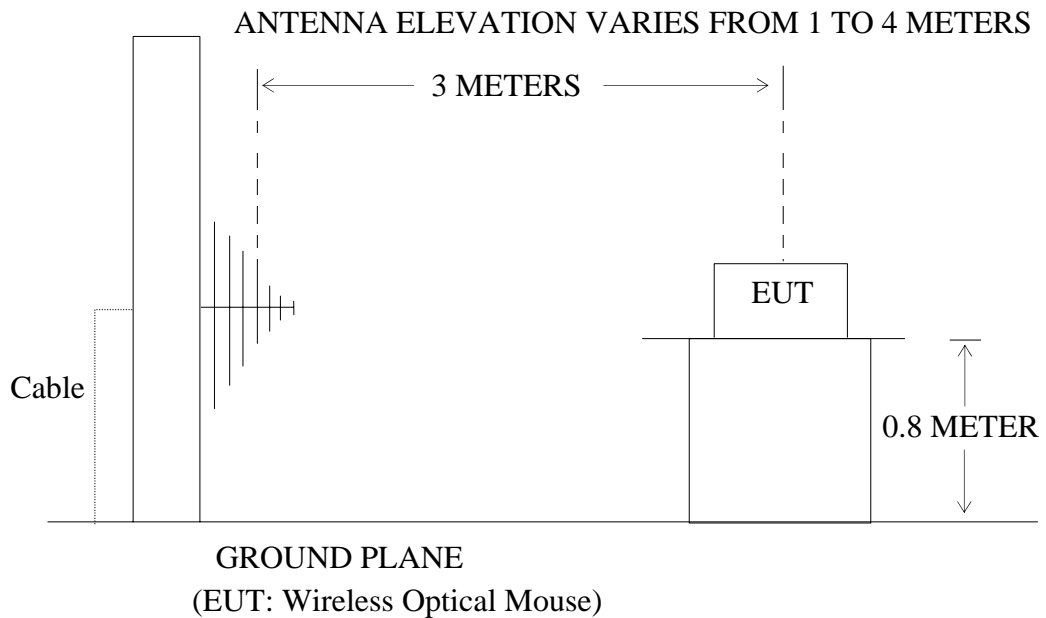

#### 3.2. The Field Strength of Radiation Emission Measurement Limits

3.2.1. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209

Radiation Emission Measurement Limits According to Section 15.209(a)

Frequency (MHz)	Limit,		The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those
	Field Strength of Quasi-peak Value (microvolts/m)	Field Strength of Quasi-peak Value (dBμV/m)	
30 - 88	100	40	
88 - 216	150	43.5	

216 - 960	200	46	frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.
Above 960	500	54	

### 3.3.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 3.3.1. Wireless Optical Mouse (EUT)

Model Number : DS-2134  
Serial Number : N/A  
Manufacturer : Eastern Times Technology Co., Ltd.

### 3.4.Operating Condition of EUT

3.4.1. Setup the EUT and simulator as shown as Section 3.1.

3.4.2. Turn on the power of all equipment.

3.4.3. Let the EUT work in TX modes(on) measure it.

### 3.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to FCC Part 15 Subpart C on radiated emission measurement.

The bandwidth of test receiver (R&S ESI26) is set at 120KHz in 30-1000MHz. The frequency range from 30MHz to 1000MHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

### 3.6. The Field Strength of Radiation Emission Measurement Results

**PASS.**

The frequency range 30MHz to 1000MHz is investigated.

Date of Test:	<u>December 16, 2005</u>	Temperature:	<u>20°C</u>
EUT:	<u>Wireless Optical Mouse</u>	Humidity:	<u>50%</u>
Model No.:	<u>DS-2134</u>	Power Supply:	<u>2.4V DC (“AAA”battery 2×)</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Andy</u>

Polarization	Frequency (MHz)	Reading(dBμV/m)	Factor Corr.( dB)	Result(dBμV/m)	Limits(dBμV/m)	Margin(dBμV/m)
		QP		QP	QP	QP
Horizontal	324.505	54.9	-18.5	36.4	46	9.6
Horizontal	353.546	53.8	-17.6	36.2	46	9.8
Horizontal	946.473	44.2	-11.6	32.6	46	13.4
Vertical	81.126	51.5	-24.4	27.1	40	12.9
Vertical	353.546	47.4	-17.6	29.8	46	16.2
Vertical	973.512	43.3	-11.4	32.5	54	21.5


The spectral diagrams in appendix 1 display the measurement of un-weighted peak values.

The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

Reviewer :





## 4. FUNDAMENTAL RADIATED EMISSION FOR FCC PART 15

### SECTION 15.227(A)


#### 4.1. Block Diagram of Test Setup

##### 4.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless Optical Mouse)

##### 4.1.2. Anechoic Chamber Test Setup Diagram

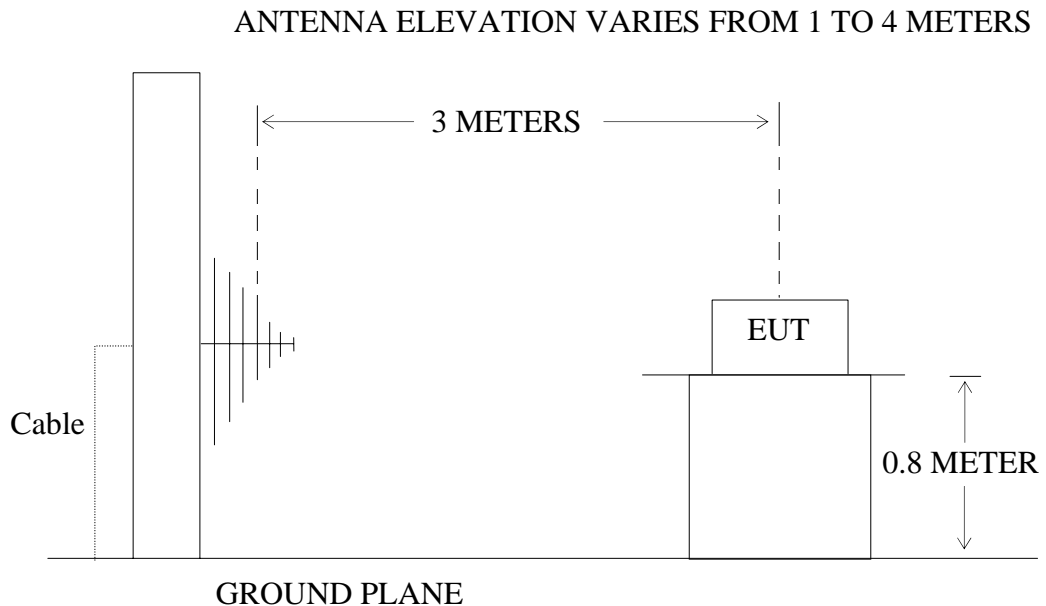

(EUT: Wireless Optical Mouse)

#### 4.2. The Emission Limit For Section 15.227(a)

4.2.1 The field strength of any emission within this band shall not exceed 10,000microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Section 15.35 for limiting peak emission apply.

### 4.3.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 4.3.1. Wireless Optical Mouse (EUT)

Model Number : DS-2134  
Serial Number : N/A  
Manufacturer : Eastern Times Technology Co., Ltd.

### 4.4.Operating Condition of EUT

4.4.1.Setup the EUT and simulator as shown as Section 4.1.

4.4.2.Turn on the power of all equipment.

4.4.3.Let the EUT work in TX mode (On) measure it.

### 4.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. calibrated Loop antenna is used as receiving antenna. In order to find the maximum emission levels, all of the interface cables must be manipulated according to FCC Part 15 on radiated emission measurement.

The bandwidth of test receiver (R&S ESI26) is set at 9KHz in 9kHz-30MHz

## 4.6. The Emission Measurement Result

**PASS.**


Date of Test:	<u>December 16, 2005</u>	Temperature:	<u>20°C</u>
EUT:	<u>Wireless Optical Mouse</u>	Humidity:	<u>50%</u>
Model No.:	<u>DS-2134</u>	Power Supply:	<u>2.4V DC ("AAA"battery 2×)</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Andy</u>

**Fundamental Radiated Emissions**

Test conditions		Fundamental Frequency	
		27.042MHz	
T <sub>nom</sub> (20°C)	Unit	(dBμV/m)/( μ V/m) AV	(dBμV/m)/( μ V/m) PEAK
			60.3/1,035
limit		80/10,000	100/100,000
Note: Measurement was performed with modulated signal with average detector and peak detector.			

The spectral diagrams in appendix 1.

Reviewer :



## 5. BAND EDGES

### 5.1.The Requirement

5.1.1. The wanted emission within the band 26.96-27.28MHz.

### 5.2.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 5.2.1.Wireless Optical Mouse (EUT)

Model Number : DS-2134  
Serial Number : N/A  
Manufacturer : Eastern Times Technology Co., Ltd.

### 5.3.Operating Condition of EUT

5.3.1.Setup the EUT and simulator as shown as Section 4.1.

5.3.2.Turn on the power of all equipment.

5.3.3.Let the EUT work in TX mode (On) measure it.

### 5.4.Test Procedure

The transmitter output was fed into the spectrum analyzer and photo was taken. The vertical scale is set to 10dB per division; the horizontal scale is set to 32kHz per division. Star frequency are 26.96MHz, stop frequency are 27.28MHz .  
RBW are 3kHz, VBW are 3kHz, Sweep time are 50ms.

## 5.5.The Measurement Result

**The EUT does meet the FCC requirement.**


The spectral diagrams in appendix 1.

# APPENDIX I (Test Curves)

Radiated Disturbance

FCC Part 15


EUT: Wireless Optical Mouse M/N:DS-2134  
Manufacturer: Eastern Times  
Operating Condition: TX  
Test Site: ATC EMC Lab.SAC  
Operator: Andy  
Test Specification: Horizontal  
Comment : DC 2.4V  
:

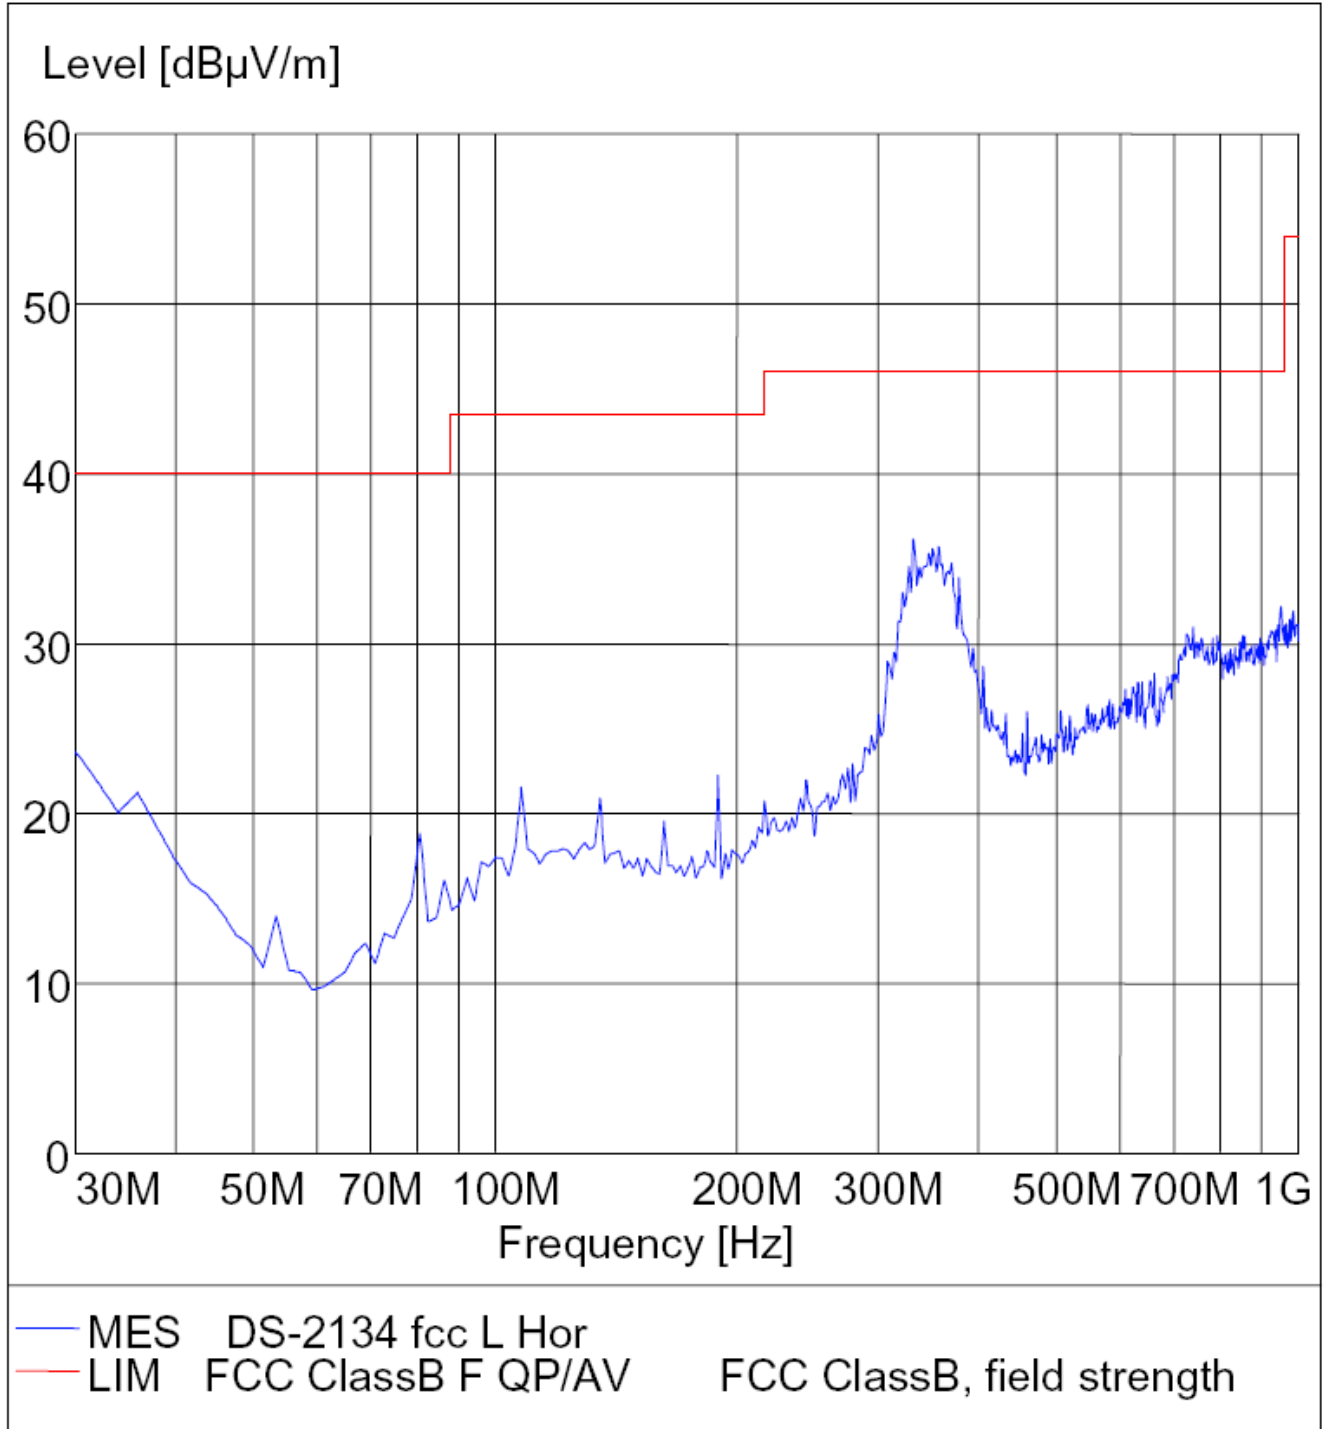

Radiated Disturbance

FCC Part 15

EUT: Wireless Optical Mouse M/N:DS-2134  
Manufacturer: Eastern Times  
Operating Condition: TX  
Test Site: ATC EMC Lab.SAC  
Operator: Andy  
Test Specification: Vertical  
Comment : DC 2.4V  
:

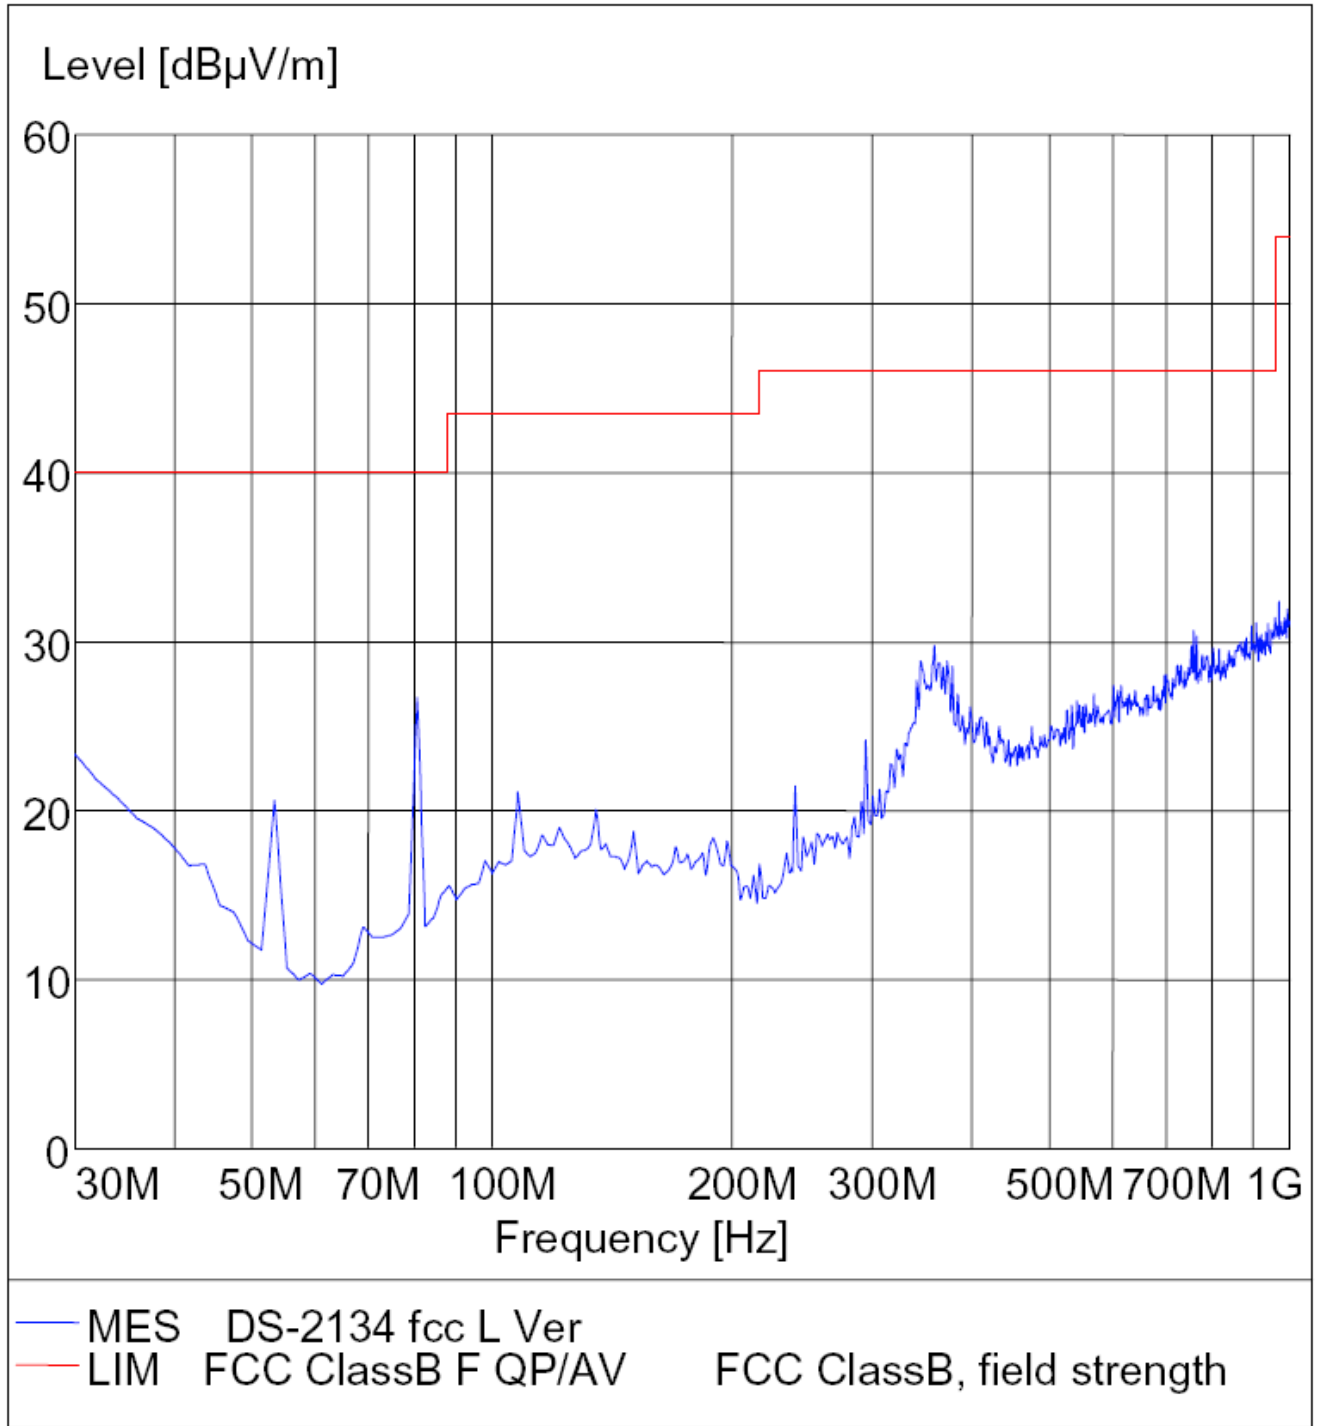






\*RBW 3 kHz      Marker 1 [T1 ]  
\*VBW 3 kHz      54.09 dBuV  
\*SWT 50 ms      27.042560000 MHz

Ref 87 dBuV

Att 10 dB

UNCAL

1 PK  
VIEW

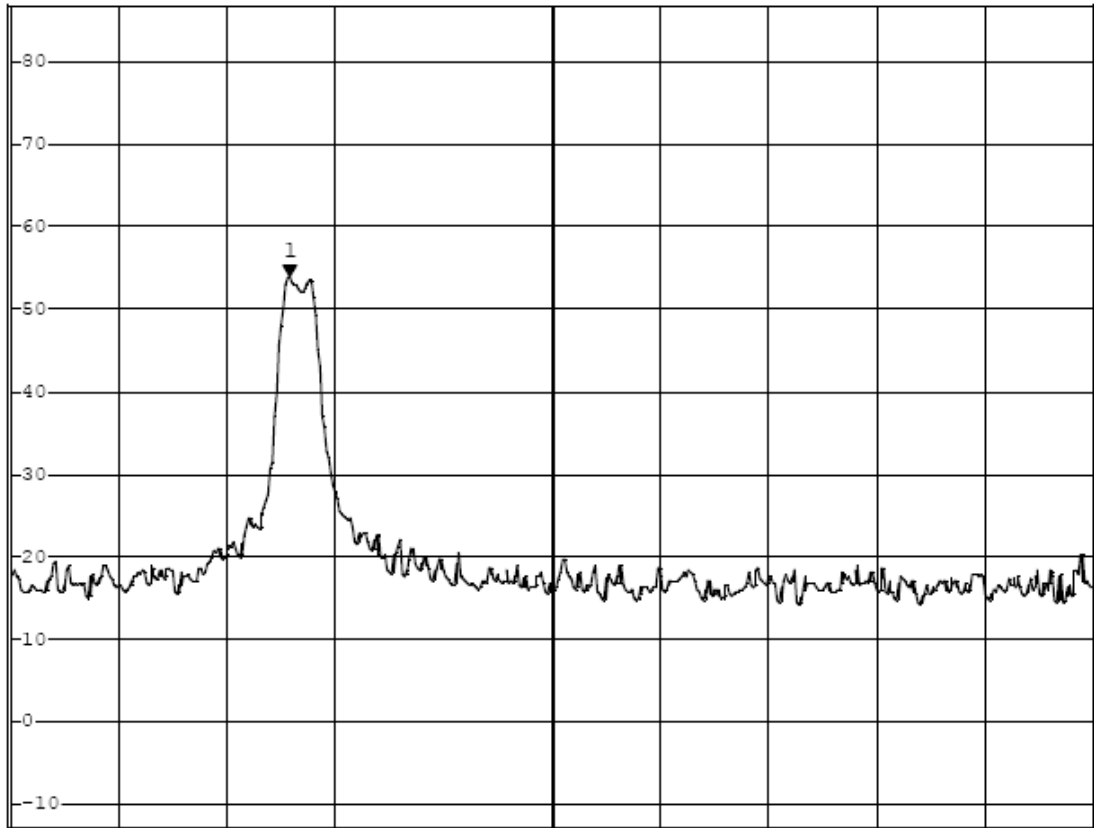

Start 26.96 MHz

32 kHz/

Stop 27.28 MHz