

Submittal Application Report

For Grant of Certification

Model: RB4011iGS+5HacQ2HnD-IN-US
5180-5240, and 5745-5825 MHz

Unlicensed National Information Infrastructure (U-NII) and
Licence-Exempt Local Area Network (LE-LAN) Devices
U-NII-1, U-NII-3 Operation (New Rules)

FCC ID: TV74011GS-5HQ2HD
IC: 7442A-4011G5Q2

FOR

Mikrotikls SIA

Brivibas gatve 214i
Riga Latvia LV-1039

Test Report Number: 180515

FCC Designation: US5305
IC Test Site Registration: 3041A-1

Authorized Signatory: *Scot D Rogers*
Scot D. Rogers



ROGERS LABS, INC.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

Engineering Test Report for Grant of Certification Application

FOR

Unlicensed National Information Infrastructure (U-NII) and
Licence-Exempt Local Area Network (LE-LAN) Devices
47CFR, Part 15E 15.407 (New Rules)
Industry Canada RSS-247 Issue 2

For

Mikrotiks SIA

Brivibas gatve 214i
Riga Latvia LV-1039

Licence-Exempt U-NII, Local Area Network equipment
U-NII-1 and U-NII-3 operation

Model: RB4011iGS+5HacQ2HnD-IN-US
Frequency Range 5180-5240 and 5745-5825 MHz
FCC ID: TV74011GS-5HQ2HD
IC: 7442A-4011G5Q2

Test Date: May 15, 2018

Certifying Engineer: *Scot D. Rogers*

Scot D. Rogers
Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory.
This report must not be used by the client to claim product certification, approval, or endorsement
by NVLAP, NIST, or any agency of the Federal Government.

Table of Contents

TABLE OF CONTENTS.....3

REVISIONS.....10

FOREWORD.....11

OPINION / INTERPRETATION OF RESULTS11

EQUIPMENT TESTED.....12

EQUIPMENT FUNCTION AND CONFIGURATION.....13

 Equipment Configuration.....14

APPLICANT COMPANY INFORMATION15

EQUIPMENT INFORMATION.....15

 Product Details16

 Accessories16

 Table for Filed Antennas16

 Antenna and Bandwidth.....16

APPLICATION FOR CERTIFICATION.....17

APPLICABLE STANDARDS & TEST PROCEDURES18

EQUIPMENT TESTING PROCEDURES18

 AC Line Conducted Emission Test Procedure18

 Radiated Emission Test Procedure.....19

 Antenna Port Conducted Emission Test Procedure.....19

 Diagram 1 Test arrangement for Conducted emissions20

 Diagram 2 Test arrangement for radiated emissions of tabletop equipment.....21

 Diagram 3 Test arrangement for radiated emissions tested on Open Area Test Site (OATS).....22

 Diagram 4 Test arrangement for Antenna Port Conducted emissions22

LIST OF TEST EQUIPMENT 23

TEST SITE LOCATIONS 24

UNITS OF MEASUREMENTS 24

ENVIRONMENTAL CONDITIONS..... 24

INTENTIONAL RADIATORS..... 24

Antenna Requirements 24

Restricted Bands of Operation..... 25

 Table 1 Radiated Emissions in Restricted Bands Data (802.11a)..... 25

 Table 2 Radiated Emissions in Restricted Bands Data (802.11n) 26

 Table 3 Radiated Emissions in Restricted Bands Data (802.11ac) 27

Summary of Results for Radiated Emissions in Restricted Bands 27

AC Line Conducted Emissions Procedure 28

 Figure 1 AC Line Conducted Emissions Line 1 (Configuration #1) 29

 Figure 2 AC Line Conducted Emissions Line 2 (Configuration #1) 29

 Figure 3 AC Line Conducted Emissions Line 1 (Configuration #2) 30

 Figure 4 AC Line Conducted Emissions Line 2 (Configuration #2) 30

 Table 4 AC Line Conducted Emissions Data (Line L1, Configuration #1)..... 31

 Table 5 AC Line Conducted Emissions Data (Line L2, Configuration #1)..... 31

 Table 6 AC Line Conducted Emissions Data (Line L1, Configuration #2)..... 32

 Table 7 AC Line Conducted Emissions Data (Line L2, Configuration #2)..... 32

Summary of Results for AC Line Conducted Emissions 32

General Radiated Emissions Procedure 33

 Table 8 General Radiated Emissions from EUT Data (Highest, Configuration #1) 34

 Table 9 General Radiated Emissions from EUT Data (Highest, Configuration #2) 35

Summary of Results for General Radiated Emissions 35

Operation in the 5150-5250 and 5725-5850 MHz Frequency U-NII-1 and U-NII-3 Bands 36

Figure 5 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 0, 802.11a)..... 38

Figure 6 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 1, 802.11a)..... 38

Figure 7 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 2, 802.11a)..... 39

Figure 8 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 3, 802.11a)..... 39

Figure 9 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 0, 802.11n40) 40

Figure 10 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 1, 802.11n40) 40

Figure 11 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 2, 802.11n40) 41

Figure 12 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 3, 802.11n40) 41

Figure 13 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 0, 802.11ac)..... 42

Figure 14 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 1, 802.11ac)..... 42

Figure 15 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 2, 802.11ac)..... 43

Figure 16 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 3, 802.11ac)..... 43

Figure 17 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 0, 802.11a) 44

Figure 18 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 1, 802.11a) 44

Figure 19 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 2, 802.11a) 45

Figure 20 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 3, 802.11a) 45

Figure 21 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 0, 802.11n40) 46

Figure 22 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 1, 802.11n40) 46

Figure 23 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 2, 802.11n40) 47

Figure 24 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 3, 802.11n40) 47

Figure 25 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 0, 802.11ac) 48

Figure 26 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 1, 802.11ac) 48

Figure 27 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 2, 802.11ac) 49

Figure 28 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 3, 802.11ac) 49

Figure 29 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 0, 802.11a)..... 50

Figure 30 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 1, 802.11a)..... 50

Figure 31 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 2, 802.11a)..... 51

Figure 32 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 3, 802.11a)..... 51

Figure 33 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 0, 802.11n40) 52

Figure 34 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 1, 802.11n40) 52

Figure 35 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 2, 802.11n40) 53

Figure 36 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 3, 802.11n40) 53

Figure 37 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 0, 802.11ac)..... 54

Figure 38 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 1, 802.11ac)..... 54

Figure 39 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 2, 802.11ac)..... 55

Figure 40 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 3, 802.11ac)..... 55

Figure 41 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11a, Chain 0, 99% OBW) 56

Figure 42 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11a, Chain 1, 99% OBW) 56

Figure 43 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11a, Chain 2, 99% OBW) 57

Figure 44 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11a, Chain 3, 99% OBW) 57

Figure 45 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11a, Chain 0, 26 dB OBW) 58

Figure 46 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11a, Chain 1, 26 dB OBW) 58

Figure 47 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11a, Chain 2, 26 dB OBW) 59

Figure 48 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11a, Chain 3, 26 dB OBW) 59

Figure 49 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11n40, Chain 0, 99% OBW) 60

Figure 50 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11n40, Chain 1, 99% OBW) 60

Figure 51 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11n40, Chain 2, 99% OBW) 61

Figure 52 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11n40, Chain 3, 99% OBW) 61

Figure 53 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11n40, Chain 0, 26 dB OBW)..... 62

Figure 54 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11n40, Chain 1, 26 dB OBW)..... 62

Figure 55 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11n40, Chain 2, 26 dB OBW)..... 63

Figure 56 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11n40, Chain 3, 26 dB OBW)..... 63

Figure 57 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11ac, Chain 0, 99% OBW) 64

Figure 58 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11ac, Chain 1, 99% OBW) 64

Figure 59 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11ac, Chain 2, 99% OBW) 65

Figure 60 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11ac, Chain 3, 99% OBW) 65

Figure 61 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11ac, Chain 0, 26 dB OBW) 66

Figure 62 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11ac, Chain 1, 26 dB OBW) 66

Figure 63 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11ac, Chain 2, 26 dB OBW) 67

Figure 64 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11ac, Chain 3, 26 dB OBW) 67

Figure 65 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 0, 802.11a)..... 68

Figure 66 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 1, 802.11a)..... 68

Figure 67 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 2, 802.11a)..... 69

Figure 68 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 3, 802.11a)..... 69

Figure 69 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 0, 802.11n40) 70

Figure 70 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 1, 802.11n40) 70

Figure 71 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 2, 802.11n40) 71

Figure 72 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 3, 802.11n40) 71

Figure 73 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 0, 802.11ac)..... 72

Figure 74 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 1, 802.11ac)..... 72

Figure 75 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 2, 802.11ac)..... 73

Figure 76 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 3, 802.11ac)..... 73

Figure 77 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 0, 802.11a) 74

Figure 78 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 1, 802.11a) 74

Figure 79 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 2, 802.11a) 75

Figure 80 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 3, 802.11a) 75

Figure 81 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 0, 802.11n40) 76

Figure 82 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 1, 802.11n40) 76

Figure 83 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 2, 802.11n40) 77

Figure 84 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 3, 802.11n40) 77

Figure 85 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 0, 802.11ac) 78

Figure 86 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 1, 802.11ac) 78

Figure 87 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 2, 802.11ac) 79

Figure 88 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 3, 802.11ac) 79

Figure 89 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 0, 802.11a)..... 80

Figure 17 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 1, 802.11a)..... 80

Figure 90 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 2, 802.11a)..... 81

Figure 91 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 3, 802.11a)..... 81

Figure 92 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 0, 802.11n40) 82

Figure 93 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 1, 802.11n40) 82

Figure 94 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 2, 802.11n40) 83

Figure 95 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 3, 802.11n40) 83

Figure 96 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 0, 802.11ac)..... 84

Figure 97 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 1, 802.11ac)..... 84

Figure 98 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 2, 802.11ac)..... 85

Figure 99 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 3, 802.11ac)..... 85

Figure 100 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11a, Chain 0, 99% OBW) 86

Figure 101 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11a, Chain 1, 99% OBW) 86

Figure 102 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11a, Chain 2, 99% OBW) 87

Figure 103 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11a, Chain 3, 99% OBW) 87

Figure 104 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11a, Chain 0, 6-dB OBW)..... 88

Figure 105 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11a, Chain 1, 6-dB OBW)..... 88

Figure 106 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11a, Chain 2, 6-dB OBW)..... 89

Figure 107 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11a, Chain 3, 6-dB OBW)..... 89

Figure 108 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11n40, Chain 0, 99% OBW) 90

Figure 109 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11n40, Chain 1, 99% OBW) 90

Figure 110 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11n40, Chain 2, 99% OBW) 91

Figure 111 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11n40, Chain 3, 99% OBW) 91

Figure 112 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11n40, Chain 0, 6-dB OBW) 92

Figure 113 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11n40, Chain 1, 6-dB OBW) 92

Figure 114 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11n40, Chain 2, 6-dB OBW) 93

Figure 115 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11n40, Chain 3, 6-dB OBW) 93

Figure 116 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11ac, Chain 0, 99% OBW) 94

Figure 117 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11ac, Chain 1, 99% OBW) 94

Figure 118 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11ac, Chain 2, 99% OBW) 95

Figure 119 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11ac, Chain 3, 99% OBW) 95

Figure 120 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11ac, Chain 0, 6-dB OBW)..... 96

Figure 121 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11ac, Chain 1, 6-dB OBW)..... 96

Figure 122 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11ac, Chain 2, 6-dB OBW)..... 97

Figure 123 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11ac, Chain 3, 6-dB OBW)..... 97

Transmitter Emissions Data..... 98

Table 10 Transmitter Radiated Emission (802.11a, 5150-5250 MHz Band)..... 98

Table 11 Transmitter Radiated Emission (802.11a, 5725-5850 MHz Band)..... 99

Table 12 Transmitter Radiated Emission (802.11n, 5150-5250 MHz Band) 100

Table 13 Transmitter Radiated Emission (802.11n, 5725-5850 MHz Band) 101

Table 14 Transmitter Radiated Emission (802.11ac, 5150-5250 MHz Band)..... 102

Table 15 Transmitter Radiated Emission (802.11ac, 5725-5850 MHz Band)..... 103

Table 16 Transmitter Antenna Port Conducted Power and Emissions (Chain 0) 104

Table 17 Transmitter Antenna Port Conducted Power and Emissions (Chain 1) 105

Table 18 Transmitter Antenna Port Conducted Power and Emissions (Chain 2) 106

Table 19 Transmitter Antenna Port Conducted Power and Emissions (Chain 3) 107

Table 20 Transmitter Antenna Port Conducted Power and Emissions (Total All Chains) 108

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator 109

STATEMENT OF MODIFICATIONS AND DEVIATIONS 109

ANNEX..... 110

Annex A Measurement Uncertainty Calculations..... 111

Annex B Rogers Labs Test Equipment List..... 112

Annex C Rogers Qualifications 113

Annex D Rogers Labs Certificate of Accreditation..... 114

Revisions

Revision 2 Issued July 31, 2018 – Updated report to address MIMO operation per KDB 662911, pages 18 and 36
 Revision 1 Issued July 26, 2018

Foreword

The following information is submitted for consideration in obtaining Equipment Grants of Certification for License Exempt, Unlicensed National Information Infrastructure (U-NII) Intentional Radiator operating under 47CFR Paragraph 15E (15.407), U-NII-1 and U-NII-3 new rules, 5180-5240, and 5745-5825 MHz bands, and Industry Canada RSS-GEN Issue 5, and RSS-247 Issue 2, LE-LAN transmitter.

Name of Applicant: Mikrotikls SIA FRN: 0014431100
 Brivibas gatve 214i
 Riga Latvia LV-1039

Model: RB4011iGS+5HacQ2HnD-IN-US

FCC ID: TV74011GS-5HQ2HD, **IC:** 7442A-4011G5Q2

Frequency Range: 5180-5240 MHz and 5745-5825 MHz (U-NII-1 and U-NII-3 under new rules 15.407, 802.11a (20 MHz), n (40 MHz) and ac (80 MHz) channels) and limited antenna options and power restrictions for operation in Canada

Maximum Power: U-NII-1a Band, 20 MHz mode, 0.004-watt, 99% OBW 16,710 kHz
 U-NII-1n Band, 40 MHz mode, 0.004-watt, 99% OBW 36,075 kHz
 U-NII-1ac Band, 80 MHz mode, 0.003-watt, 99% OBW 76,950 kHz
 U-NII-3a Band, 20 MHz mode, 0.056-watt, 99% OBW 16,740 kHz
 U-NII-3n Band, 40 MHz mode, 0.069-watt, 99% OBW 36,150 kHz
 U-NII-3ac Band, 80 MHz mode, 0.064-watt, 99% OBW 77,100 kHz

Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Restricted Frequency Bands 15.205, RSS-GEN 8.10	-3.0	Complies
AC Line Conducted 15.207, RSS-GEN 7.2.4	-4.7	Complies
Radiated Emissions 15.209, RSS-GEN 7.2.5	-0.1	Complies
Harmonic Emissions per 15.407, RSS-247	-10.7	Complies
Power Spectral Density per 15.407, RS-247	-12.6	Complies

Equipment Tested

<u>Equipment</u>	<u>Model</u>	<u>FCC ID</u>
EUT #1	RB4011iGS+5HacQ2HnD-IN-US	TV74011GS-5HQ2HD
EUT #2	RB4011iGS+5HacQ2HnD-IN-US	TV74011GS-5HQ2HD
AC Power Adapter	WT2402500, p/n: WT202500-RS	N/A
Power Adapter	Power Over Ethernet (POE)	N/A
Dell Studio 1555	PP39L	N/A


Test results in this report relate only to the items tested.

Equipment Function and Configuration


The EUT is a 5 GHz (quad chain) (4x4MIMO) Licence-Exempt, Unlicensed National Information Infrastructure (U NII), Local Area Network Transmission System. The design provides operational capabilities in the U-NII-1 and U-NII-3 services (5180-5240 and 5745-5825 MHz frequency bands). The EUT offers broadband wireless connectivity to transmit and receive data. The product also includes a 2412-2462 MHz 802.11b/g/n transmitter module (FCC ID: TV7R11E2HPND, IC: 7442A-R11E2HPND) providing communications channels in the 2.4 GHz band. Test software (Winbox version 3.10) was used to operate the transmitter during testing. This software provided the ability to set test channel, operational mode, and modulation. The design provides 4 omni directional antennas mounted to the enclosure. Each antenna provided 5 GHz Omni directional antenna and the outer 2 antennas provided connection to both the 2 and 5 GHz transmitters. The EUT provides single power interface port for use with the AC Power Adapter as well as POE (Power Over Ethernet) network port. The product provides 10 gigabit network connection ports, an SFP (Small Form-factor Pluggable) Fiber optic transceiver socket, and a console monitoring port. For testing purposes, the EUT transceiver was connected to the manufacturer supplied AC/DC power supply as well as the POE. Communications between the EUT and laptop computer were provided through the Ethernet network interface. This configuration provided operational control of the EUT and communications over the network interface between the EUT and supporting computer system. The design provides no other interfacing options than those presented in this report. For testing purposes, the RB4011iGS+5HacQ2HnD-IN-US test sample was configured to transmit in available data modes receiving power from the manufacturer provided AC/DC power supply and/or POE adapter. As requested by the manufacturer and required by regulations, the equipment was tested for emissions compliance using the available configurations with the worst-case data presented. Test results in this report relate only to the products described in this report.

Equipment Configuration

1) Configuration #1, AC/DC adapter, Network connection

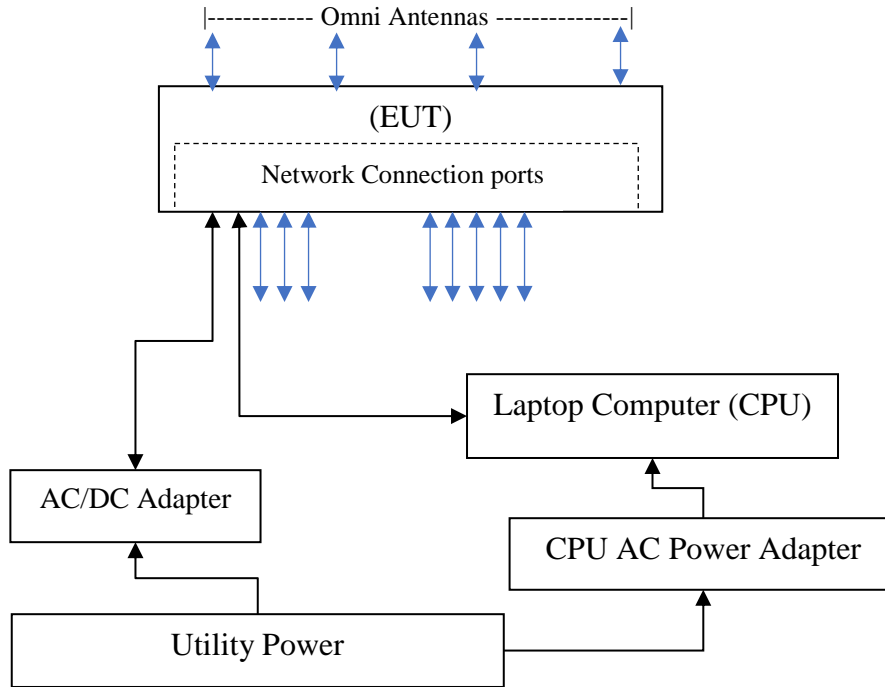

2) Configuration #2, POE-AC/DC adapter, Network connection

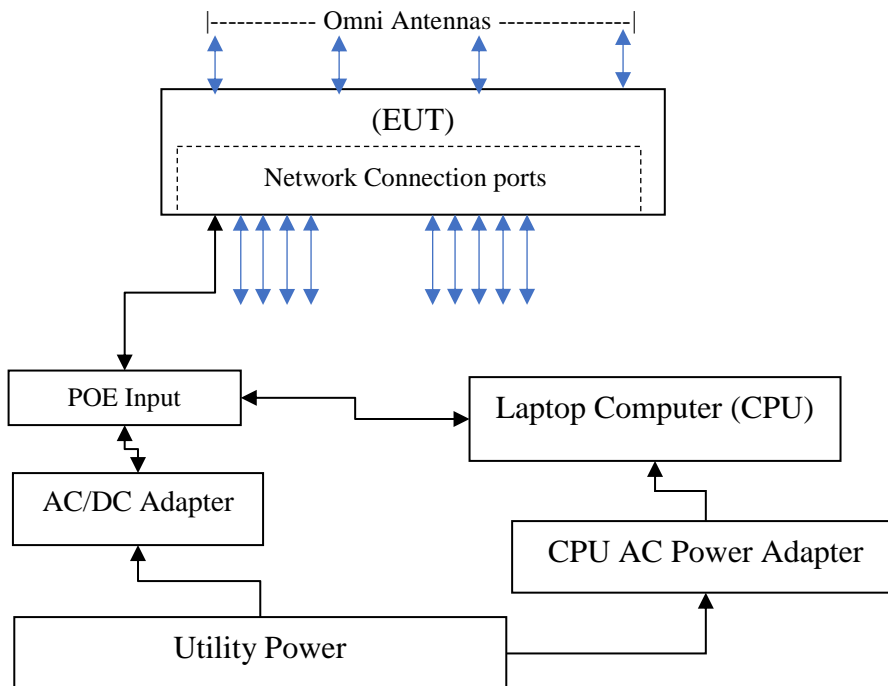

Applicant Company information

Applicants Company	MikroTik (“Mikrotīkls, SIA”)
Applicants Address	Brivibas gatve 214i, Riga Latvia LV-1039
FCC Identifier	TV74011GS-5HQ2HD
Industry Canada Identifier	7442A-4011G5Q2
Manufacturer Company	MikroTik (“Mikrotīkls, SIA”)
Manufacturer Address	Brivibas gatve 214i, Riga Latvia LV-1039

Equipment information

Product Marketing Name (PMN): The PMN is the name or model number under which the product will be marketed/offered for sale in Canada. If the product has PMN, it must be provided.	RB4011iGS+5HacQ2HnD-IN-US
Unique Product Number (UPN): The applicant made up of a maximum of 11 alphanumeric characters (A-Z, 0-9), assigns the UPN.	4011G5Q2
Hardware Version Identification Number (HVIN): The HVIN identifies hardware specifications of a product version. The HVIN replaces the ISED Model Number in the legacy E-filing System. An HVIN is required for all products for certification applications.	RB4011iGS+5HacQ2HnD-IN-US
Host Marketing Name (HMN) (if applicable): The HMN is the name or model number of a final product, which contains a certified radio module.	
Brand Name	
Model Number	RB4011iGS+5HacQ2HnD-IN-US
Test Rule Part(s)	47CFR 15E, 15.407, RSS-247
Test Frequency Range	5.15-5.25 and 5.725-5.85 GHz
Project Number	180515
Submission Type	FCC: Certification, IC: Certification

Product Details

Items	Description
Product Type	Quad chain 5 GHz U-NII-1 and U-NII-3
Radio Type	Transceiver
Power Type	POE adapter and External AC Power Supply
Frequency Range	5150-5250 MHz / 5725-5850 MHz
Channel Number	802.11a/n: 9 for 20MHz bandwidth; 4 for 40MHz bandwidth 802.11 a/c: N/A
Maximum Conducted Output Power	Band 1: IEEE 802.11a: 0.019 Watts IEEE 802.11n: 0.025 Watts IEEE 802.11ac: 0.024 Watts Band 3: IEEE 802.11a: 0.248 Watts IEEE 802.11n: 0.434 Watts IEEE 802.11ac: 0.475 Watts
Carrier Frequencies	Please refer to Table for Carrier Frequencies
Antenna	Integrated antenna information Omni Directional (3 dBi)
Communication Mode	Device provides Quad MIMO, 5 GHz, U-NII 1 and U-NII-3 operation
Beamforming Function	Without beamforming
Operating Mode	5150-5250 MHz (U-NII-1 band) and 5725-5825 MHz (U-NII-3)

Accessories

AC Power Adapter	FLD181-240075-U
Power Over Ethernet (POE) adapter	POE

Table for Filed Antennas

Ant.	Brand	Model Name	P/N	Antenna Type	Connector	Gain (dBi)	
						2.4GHZ	5GHZ
1	Mikrotikls	Integrated	N/A	Omni	Attached	3	3

Antenna and Bandwidth

Antenna	Number of TX chains		
	20 MHz	40 MHz	80 MHz
IEEE 802.11a	1 to 4 chains	1 to 4 chains	1 to 4 chains
IEEE 802.11n	1 to 4 chains	1 to 4 chains	1 to 4 chains
IEEE 802.11ac	1 to 4 chains	1 to 4 chains	1 to 4 chains

Application for Certification

- (1) Manufacturer: Mikrotiks SIA
Brivibas gatve 214i
Riga Latvia LV-1039
- (2) Identification: Model: RB4011iGS+5HacQ2HnD-IN-US
FCC ID: TV74011GS-5HQ2HD IC: 7442A-4011G5Q2
- (3) Instruction Book:
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from power received from authorized AC/DC power adapter and POE. The EUT provides 10 Gigabit Ethernet ports for communications, an SFP socket, Console port, power port and contains fur Omni directional antennas. During testing, the EUT was powered from the POE and AC/DC power supply and connected to CPU through network cable.
- (9) Transition Provisions of 47CFR 15.37 are not requested
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.
- (13) Applications for certification of U-NII devices in the 5.15-5.35 GHz and the 5.47-5.85 GHz bands must include a high-level operational description of the security procedures that control the radio frequency operating parameters and ensure that unauthorized modifications cannot be made. The required information has been provided in Operational Description Exhibit filed with the application.
- (14) Contain at least one drawing or photograph showing the test set-up for each of the required types of tests applicable to the device for which certification is requested. These drawings or photographs must show enough detail to confirm other information contained in the test report. Any photographs used must be focused originals without glare or dark spots and must clearly show the test configuration used. This information is provided in this report and Test Setup Exhibits provided with the application filing.

Applicable Standards & Test Procedures

The following information is submitted in accordance with e-CFR dated May 15, 2018, Part 2, Subpart J, Part 15, Subpart 15E, Industry Canada RSS-GEN Issue 5, and RSS-247 Issue 2. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.10-2013, KDB 789033 D02 General UNII Test Procedures New Rules v02r01, KDB 662911 D01 Multiple Transmitter Output v02r01, KDB 926956 v02, RSS-247 Issue 2, and RSS-GEN Issue 5.

Equipment Testing Procedures

AC Line Conducted Emission Test Procedure


Testing for the AC line-conducted emissions was performed as defined in ANSI C63.10-2013. The test setup, including the EUT, was arranged in the test configurations as presented during testing. The test configuration was placed on a 1 x 1.5-meter wooden bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50- μ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table. Refer to diagram one showing typical test arrangement and photographs in exhibits for EUT placement used during testing.

Radiated Emission Test Procedure


Radiated emission testing was performed as required on a CISPR 16-1-4 compliant OATS and as specified in ANSI C63.10-2013 and applicable KDB documents. The EUT was placed on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a 3 meters distance from the FSM antenna. The table permitted orientation of the EUT in each of three orthogonal axis positions if necessary. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken using a spectrum analyzer. The frequency spectrum from 9 kHz to 60,000 MHz was searched for during preliminary investigation. Refer to diagrams two and three showing typical test arrangement and photographs in the test setup exhibits for specific EUT placement during testing.

Antenna Port Conducted Emission Test Procedure

The EUT was assembled as required for operation placed on a benchtop. This configuration provided the ability to connect test equipment to the provided test antenna port. Antenna Port conducted emissions testing was performed on test sample #2 as required in the regulations and specified in ANSI C63.10-2013. Testing was completed on a laboratory bench in a shielded room. The active antenna port of the unlicensed wireless device was connected to appropriate attenuation and the spectrum analyzer. Refer to diagram four showing typical test arrangement and photographs in the test setup exhibits for specific EUT placement during testing.

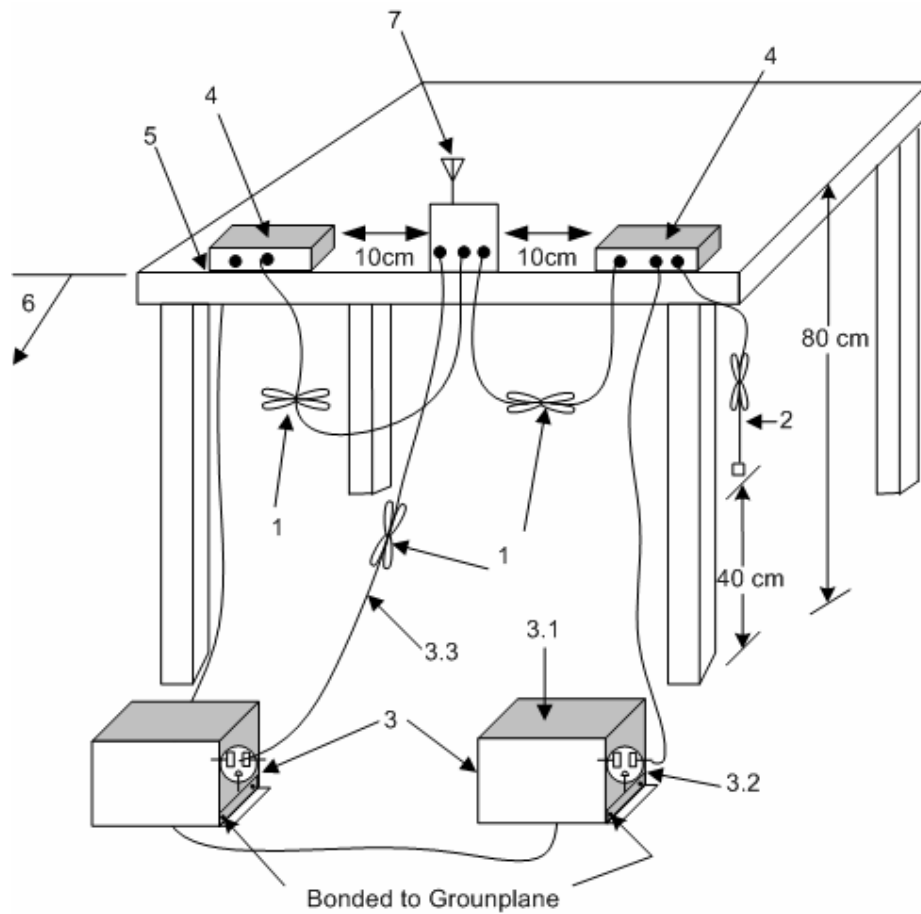

1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long see (see 6.2.3.2).
 2. The I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see 6.2.2).
 3. EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN may be placed on top of, or immediately beneath, reference ground plane (see 6.2.2 and 6.2.3).
 - 3.1 All other equipment powered from additional LISN(s).
 - 3.2 Multiple-outlet strip can be used for multiple power cords of non-EUT equipment.
 - 3.3 LISN at least 80 cm from nearest part of EUT chassis
 4. Non-EUT components of EUT system being tested
 5. Rear of EUT, including peripherals, shall all be aligned and flush with edge of tabletop (see 6.2.3.2).
 6. Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane (see 6.2.2 for options).
 7. Antenna may be integral or detachable. If detachable, the antenna shall be attached for this test.
- Diagram 1 Test arrangement for Conducted emissions**

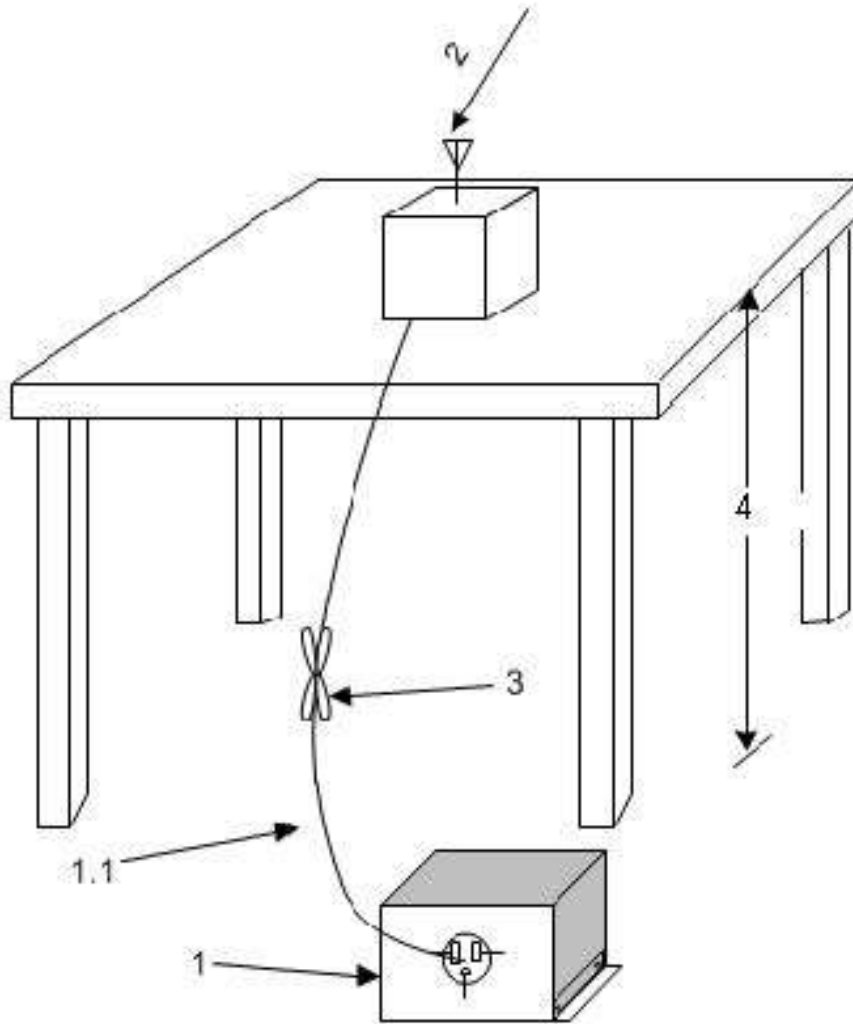

1. A LISN is optional for radiated measurements between 30 MHz and 1000 MHz but not allowed for measurements below 30 MHz and above 1000 MHz (see 6.3.1). If used, then connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. The LISN may be placed on top of, or immediately beneath, the reference ground plane (see 6.2.2 and 6.2.3.2).


1.1 LISN spaced at least 80 cm from nearest part of EUT chassis.

2. Antenna can be integral or detachable, depending on the EUT (see 6.3.1).

3. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see 6.3.1).

4. For emission measurements at or below 1 GHz, the table height shall be 80 cm. For emission measurements above 1 GHz, the table height shall be 1.5 m for measurements, except as otherwise specified (see 6.3.1 and 6.6.3.1).

Diagram 2 Test arrangement for radiated emissions of tabletop equipment

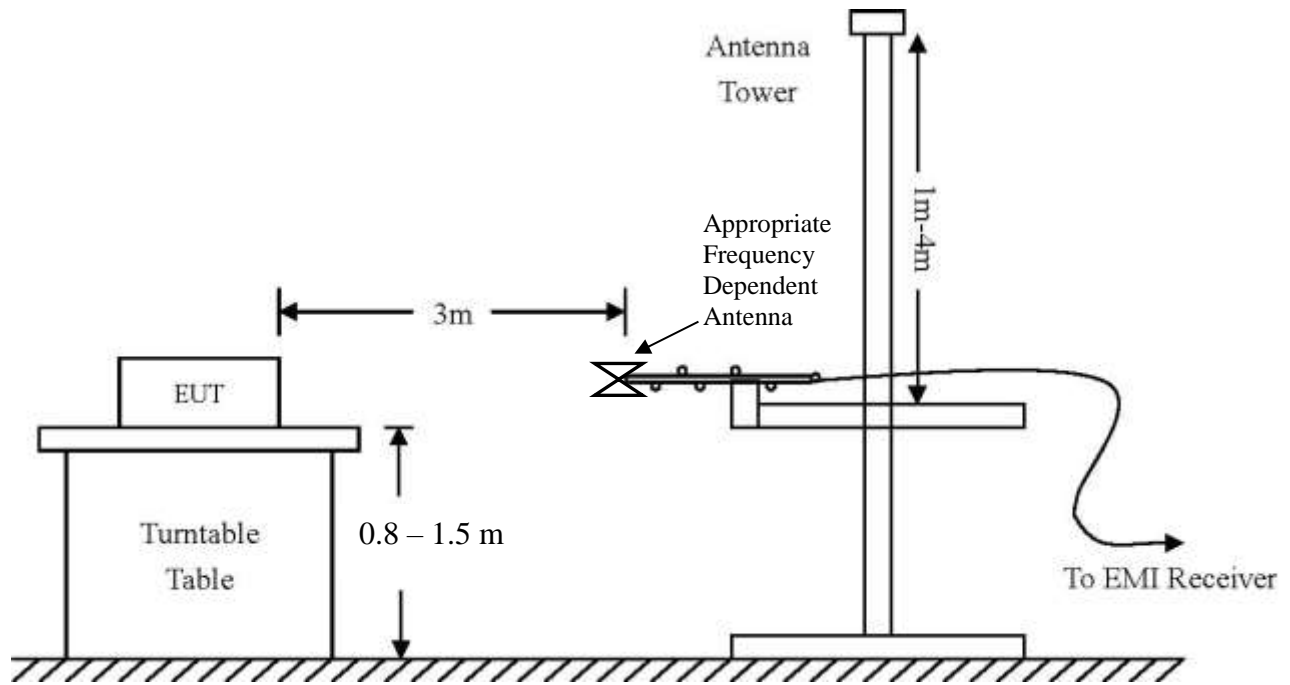

Frequency: 9 kHz-30 MHz	Frequency: 30 MHz- 1 GHz	Frequency: Above 1 GHz
Loop Antenna	Broadband Biconilog	Horn
RBW = 9 kHz	RBW = 120 kHz	RBW = 1 MHz
VBW = 30 kHz	VBW = 120 kHz	VBW = 1 MHz
Sweep time = Auto	Sweep time = Auto	Sweep time = Auto
Detector = PK, QP	Detector = PK, QP	Detector = PK, AV
Antenna Height 1m	Antenna Height 1-4m	Antenna Height 1-4m

Diagram 3 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)

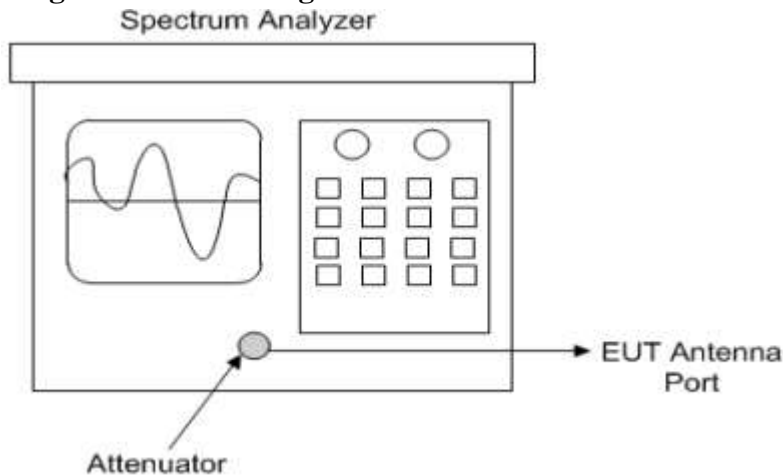


Diagram 4 Test arrangement for Antenna Port Conducted emissions

List of Test Equipment

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date(m/d/y)</u>	<u>Due</u>
<input checked="" type="checkbox"/> LISN	FCC	FCC-LISN-50-2-10(1PA) (160611)	.15-30MHz	5/2/2018	5/2/2019
<input checked="" type="checkbox"/> LISN	Compliance Design	FCC-LISN-2.Mod.cd,	.15-30MHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(303073)	9kHz-40 GHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303069)	9kHz-40 GHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303071)	9kHz-40 GHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Cable	Belden	RG-58 (L2-CAT3-11509)	9kHz-30 MHz	10/24/2017	10/24/2018
<input type="checkbox"/> Antenna	ARA	BCD-235-B (169)	20-350MHz	10/24/2017	10/24/2018
<input type="checkbox"/> Antenna	EMCO	3147 (40582)	200-1000MHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	5/2/2018	5/2/2020
<input type="checkbox"/> Antenna	Com Power	AH-118 (10110)	1-18 GHz	10/24/2017	10/24/2019
<input checked="" type="checkbox"/> Antenna	Com Power	AH-840 (101046)	18-40 GHz	5/15/2017	5/15/2019
<input checked="" type="checkbox"/> Antenna	Com Power	AL-130 (121055)	.001-30 MHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	5/2/2018	5/2/2019
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESW44 (101534)	20Hz-44GHz	12/22/2017	12/22/2018
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	FS-Z60, 90, 140, and 220	40GHz-220GHz	12/22/2017	12/22/2019
<input type="checkbox"/> Analyzer	HP	8591EM (3628A00871)	9kHz-1.8GHz	5/2/2018	5/2/2019
<input type="checkbox"/> Analyzer	HP	8562A (3051A05950)	9kHz-125GHz	5/2/2018	5/2/2019
<input type="checkbox"/> Analyzer	HP External Mixers	11571, 11970	25GHz-110GHz	5/2/2018	5/2/2019
<input checked="" type="checkbox"/> Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Amplifier	Com-Power	CPPA-102 (01254)	1-1000 MHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	10/24/2017	10/24/2018
<input checked="" type="checkbox"/> Power Meter	Agilent	N1911A with N1921A	0.05-40 GHz	5/2/2018	5/2/2019
<input type="checkbox"/> Generator	Rohde & Schwarz	SMB100A6 (100150)	20Hz-6 GHz	5/2/2018	5/2/2019
<input type="checkbox"/> Generator	Rohde & Schwarz	SMBV100A6 (260771)	20Hz-6 GHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC50722 (009) 9G notch	30-1800 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	HPM50114 (017) 1.5G HPF	30-18000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	HPM50117 (063) 3G HPF	30-18000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	HPM50105 (059) 6G HPF	30-18000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	BRM50702 (172) 2G notch	30-1800 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC50703 (G102) 5G notch	30-1800 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC50705 (024) 5G notch	30-1800 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> RF Filter	Micro-Tronics	BRC17663 (001) 9G notch	30-1800 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Fairview	SA6NFNF100W-14 (1625)	30-1800 MHz	5/2/2018	5/2/2019
<input checked="" type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1735)	30-6000 MHz	5/2/2018	5/2/2019
<input checked="" type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1436)	30-6000 MHz	5/2/2018	5/2/2019
<input checked="" type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (14362)	30-6000 MHz	5/2/2018	5/2/2019
<input checked="" type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (1445)	30-6000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-3W2+ (14452)	30-6000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-6W2+ (1438)	30-6000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	Mini-Circuits	VAT-6W2+ (1736)	30-6000 MHz	5/2/2018	5/2/2019
<input type="checkbox"/> Attenuator	JFW Industries	50FH-010-10 (1)	30-18000 MHz	5/2/2018	5/2/2019
<input checked="" type="checkbox"/> Weather station	Davis	6312 (A70927D44N)		10/24/2017	10/24/2018

Test Site Locations

Conducted EMI	Conducted emissions testing was performed in a shielded screen room located at Rogers Labs, Inc., 4405 West 259 th Terrace, Louisburg, KS
Radiated EMI	Radiated emissions tests was performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 West 259 th Terrace, Louisburg, KS
Site Registration	FCC Site Designation US5305, Industry Canada Registration: 3041A-1
Accreditation	NVLAP Accreditation Lab Code 200087-0

Units of Measurements

AC Line Conducted EMI	Data is in dB μ V; dB referenced to one microvolt
Antenna port Conducted	Data is in dBm; dB referenced to one milliwatt
Radiated EMI	Data is in dB μ V/m; dB/m referenced to one microvolt per meter

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured
A.F. = Receive antenna factor, Gain = amplification gains and/or cable losses
 $RFS (dB\mu V/m @ 3m) = FSM (dB\mu V) + A.F. (dB) - Gain (dB)$

Environmental Conditions

Ambient Temperature	23.6° C
Relative Humidity	39%
Atmospheric Pressure	1012.8 mb

Intentional Radiators

As per 47CFR subpart E and Industry Canada RSS-247 Issue 2, the following information is submitted for consideration and demonstration of compliance with regulations and standards.

Antenna Requirements

The EUT contains four Omni directional antennas mounted on the enclosure. The antennas are not designed for removal or replacement. The antenna connection provision complies with the unique antenna connection requirements. The requirements of 15.203 are fulfilled there are no deviations or exceptions to the specification.

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured on the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in restricted bands. Emissions were investigated while the EUT was located on the OATS using appropriate antennas or pyramidal horns, amplification stages, and spectrum analyzer receiver. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.10-2013 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed radiated emission values consider the measured radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Table 1 Radiated Emissions in Restricted Bands Data (802.11a)

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Quasi-Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Quasi-Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)
U-NII-1 Operation Worst-case							
5150.0	47.5	N/A	34.8	48.2	N/A	35.5	54.0
5350.0	48.5	N/A	35.7	48.6	N/A	35.8	54.0
15540.0	62.9	N/A	50.1	62.6	N/A	50.1	54.0
15600.0	62.5	N/A	49.9	63.0	N/A	49.9	54.0
15720.0	62.4	N/A	49.8	62.2	N/A	49.6	54.0
U-NII-3 Operation Worst-case							
11490.0	61.1	N/A	48.4	64.4	N/A	51.0	54.0
11570.0	60.9	N/A	48.0	64.2	N/A	50.6	54.0
11650.0	61.4	N/A	48.5	64.1	N/A	50.9	54.0
22980.0	60.1	N/A	47.4	60.8	N/A	48.0	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 2 Radiated Emissions in Restricted Bands Data (802.11n)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Quasi-Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Quasi-Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)
U-NII-1 Operation Worst-case							
5150.0	47.7	N/A	35.3	49.1	N/A	36.1	54.0
5350.0	48.4	N/A	35.8	49.0	N/A	36.1	54.0
15570.0	63.5	N/A	50.9	63.2	N/A	50.8	54.0
15690.0	63.0	N/A	50.1	63.1	N/A	50.0	54.0
U-NII-3 Operation Worst-case							
11510.0	63.7	N/A	50.8	63.8	N/A	50.6	54.0
11590.0	63.2	N/A	50.6	63.6	N/A	50.5	54.0
23020.0	61.9	N/A	48.9	62.4	N/A	48.9	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 3 Radiated Emissions in Restricted Bands Data (802.11ac)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
U-NII-1 Operation Worst-case							
5150.0	48.8	N/A	35.4	49.5	N/A	36.7	54.0
5350.0	49.0	N/A	36.2	50.4	N/A	36.8	54.0
15630.0	62.9	N/A	49.8	62.2	N/A	49.7	54.0
20840.0	60.1	N/A	47.2	60.2	N/A	47.2	54.0
U-NII-3 Operation Worst-case							
11550.0	63.2	N/A	50.8	63.8	N/A	50.6	54.0
23100.0	59.4	N/A	46.3	59.4	N/A	46.4	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Summary of Results for Radiated Emissions in Restricted Bands

The EUT demonstrated compliance with the emissions requirements of 47CFR 15.205, RSS-GEN Issue 5, and RSS-247 Issue 2. The EUT provided a worst-case minimum margin of -3.0 dB below the emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

AC Line Conducted Emissions Procedure

The EUT was arranged in a typical equipment configuration and placed on a 1 x 1.5-meter wooden bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room. The LISN was positioned on the floor of the screen room 80-cm from the rear of the EUT. The manufacturer supplied AC/DC adapter was connected to the LISN and provided direct current power to the unit or POE and powered the test sample. A second LISN was positioned on the floor of the screen room 80-cm from the rear of the supporting equipment of the EUT. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1 µf capacitor, internal to the LISN. Power line conducted emissions testing were carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequency of each emission displaying the highest amplitude. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worst-case configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz then the data was recorded with maximum conducted emissions levels.

Refer to figures one and two for plots of the EUT AC/DC adapter, with direct connection to the EUT, AC Line Conducted emissions. Refer to figures three and four for plots of the EUT POE AC/DC adapter, AC Line Conducted emissions.

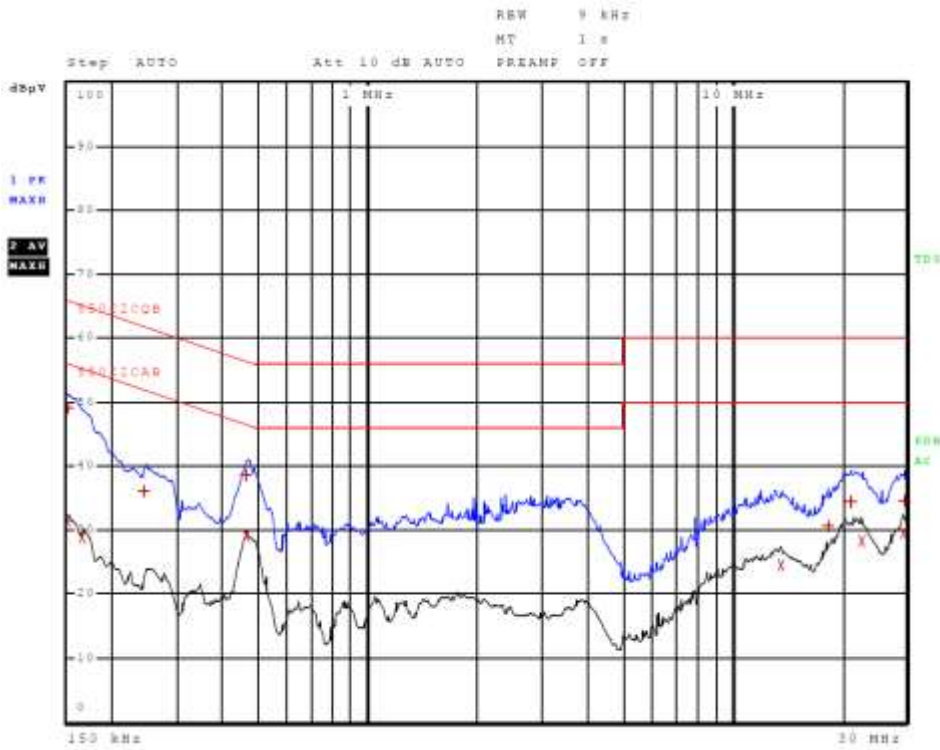


Figure 1 AC Line Conducted Emissions Line 1 (Configuration #1)

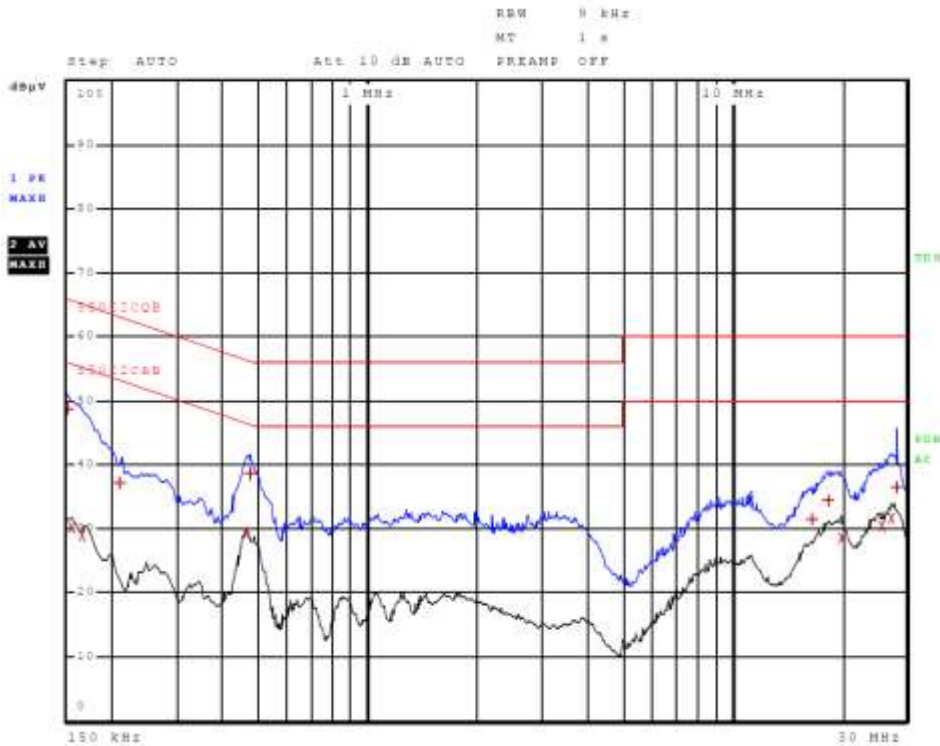


Figure 2 AC Line Conducted Emissions Line 2 (Configuration #1)

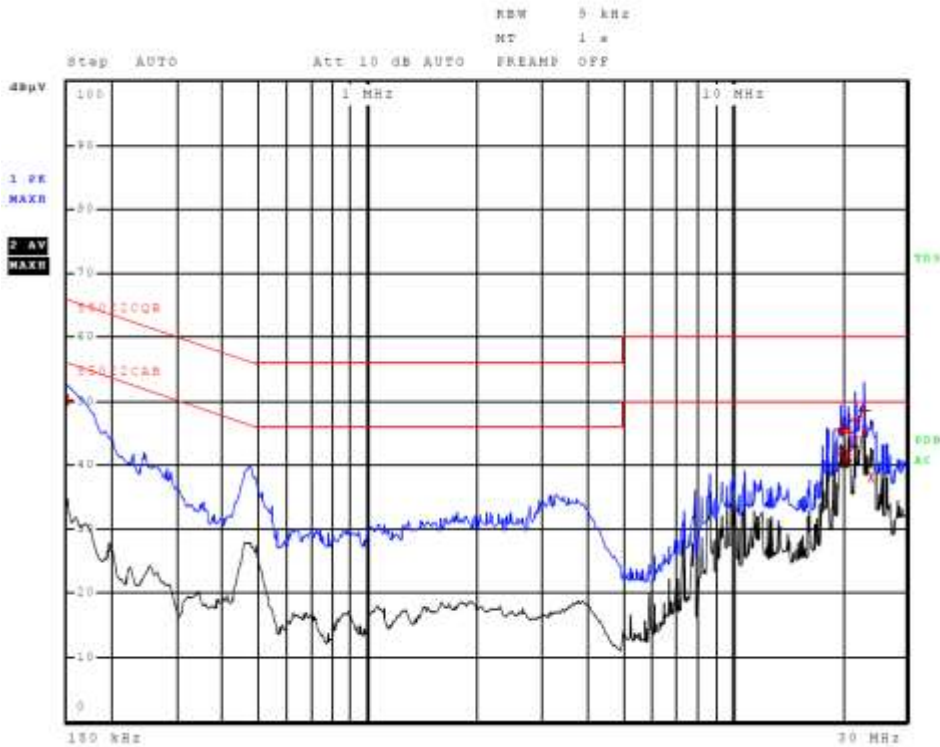


Figure 3 AC Line Conducted Emissions Line 1 (Configuration #2)

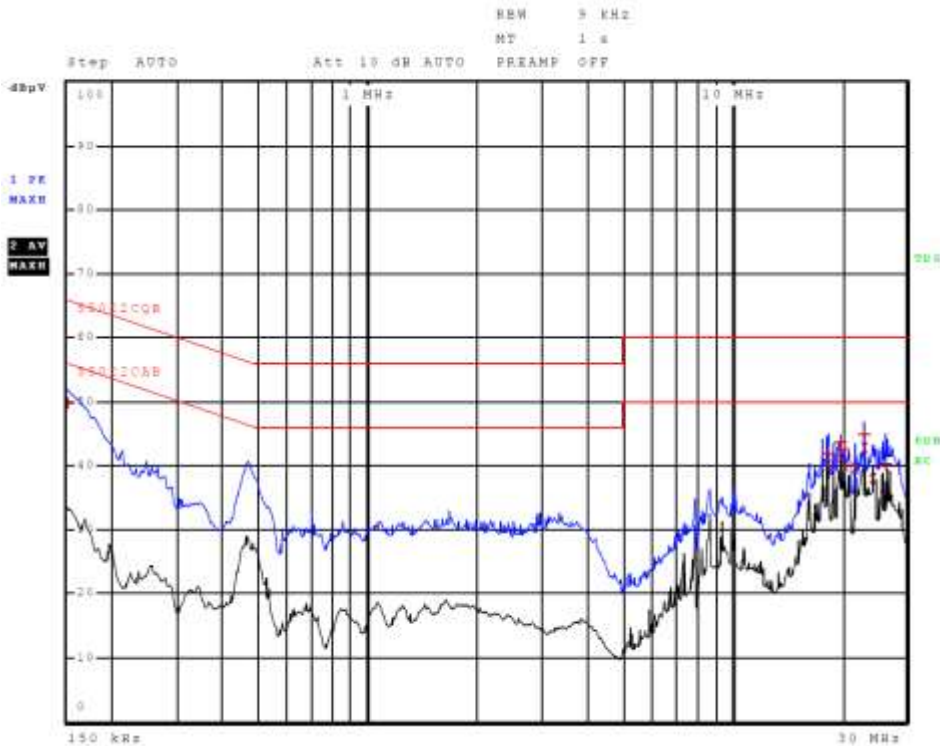


Figure 4 AC Line Conducted Emissions Line 2 (Configuration #2)

Table 4 AC Line Conducted Emissions Data (Line L1, Configuration #1)

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	150.000000000 kHz	49.07	Quasi Peak	-16.93
2	150.000000000 kHz	31.49	Average	-24.51
2	166.000000000 kHz	28.92	Average	-26.24
1	246.000000000 kHz	35.96	Quasi Peak	-25.93
2	462.000000000 kHz	29.02	Average	-17.64
1	466.000000000 kHz	38.55	Quasi Peak	-18.03
2	13.632000000 MHz	24.38	Average	-25.62
1	18.272000000 MHz	30.60	Quasi Peak	-29.40
1	21.128000000 MHz	34.31	Quasi Peak	-25.69
2	22.616000000 MHz	28.26	Average	-21.74
2	29.444000000 MHz	29.52	Average	-20.48
1	29.748000000 MHz	34.59	Quasi Peak	-25.41

Other emissions present had amplitudes at least 20 dB below the limit.

Table 5 AC Line Conducted Emissions Data (Line L2, Configuration #1)

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	150.000000000 kHz	48.67	Quasi Peak	-17.33
2	154.000000000 kHz	30.15	Average	-25.63
2	166.000000000 kHz	28.86	Average	-26.30
1	210.000000000 kHz	37.16	Quasi Peak	-26.05
2	462.000000000 kHz	29.29	Average	-17.37
1	470.000000000 kHz	38.61	Quasi Peak	-17.91
1	16.500000000 MHz	31.50	Quasi Peak	-28.50
1	18.376000000 MHz	34.33	Quasi Peak	-25.67
2	19.988000000 MHz	28.36	Average	-21.64
2	25.740000000 MHz	30.36	Average	-19.64
2	27.232000000 MHz	31.64	Average	-18.36
1	28.332000000 MHz	36.42	Quasi Peak	-23.58

Other emissions present had amplitudes at least 20 dB below the limit.

Table 6 AC Line Conducted Emissions Data (Line L1, Configuration #2)

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	150.000000000 kHz	50.19	Quasi Peak	-15.81
1	19.708000000 MHz	45.57	Quasi Peak	-14.43
2	19.708000000 MHz	42.13	Average	-7.87
1	20.260000000 MHz	45.64	Quasi Peak	-14.36
2	20.380000000 MHz	40.94	Average	-9.06
2	20.808000000 MHz	41.46	Average	-8.54
1	20.808000000 MHz	45.06	Quasi Peak	-14.94
2	21.664000000 MHz	43.70	Average	-6.30
1	21.664000000 MHz	46.90	Quasi Peak	-13.10
2	23.128000000 MHz	45.28	Average	-4.72
1	23.128000000 MHz	48.48	Quasi Peak	-11.52
2	24.044000000 MHz	38.06	Average	-11.94

Other emissions present had amplitudes at least 20 dB below the limit.

Table 7 AC Line Conducted Emissions Data (Line L2, Configuration #2)

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	150.000000000 kHz	49.71	Quasi Peak	-16.29
2	18.304000000 MHz	40.10	Average	-9.90
1	18.364000000 MHz	41.68	Quasi Peak	-18.32
2	19.708000000 MHz	41.13	Average	-8.87
1	19.708000000 MHz	43.57	Quasi Peak	-16.43
2	20.260000000 MHz	40.04	Average	-9.96
1	20.260000000 MHz	42.63	Quasi Peak	-17.37
2	21.664000000 MHz	39.59	Average	-10.41
2	23.128000000 MHz	42.65	Average	-7.35
1	23.128000000 MHz	44.76	Quasi Peak	-15.24
2	24.348000000 MHz	37.87	Average	-12.13
1	26.484000000 MHz	40.30	Quasi Peak	-19.70

Other emissions present had amplitudes at least 20 dB below the limit.

Summary of Results for AC Line Conducted Emissions

The EUT test system demonstrated compliance to the conducted emissions requirements of 47CFR 15.207, RSS-247 Issue 2 and RSS-GEN. The EUT demonstrated minimum margin of -4.7 dB below the limit. Measurements were taken using the peak, quasi peak, and average, measurement function for each emissions amplitude and were below the limits stated in the specification. Other emissions were present with recorded data representing worst-case amplitudes.

General Radiated Emissions Procedure

The EUT was arranged in a typical equipment configuration and operated through all available modes with worst-case data recorded. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Each radiated emission was then maximized at the OATS location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the OATS at a 3 meters distance between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 60,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Loop from 9 kHz to 30 MHz, Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 1 GHz and or Double Ridge or pyramidal horns and mixers above 1 GHz, notch filters, and appropriate amplifiers and external mixers were utilized.

Table 8 General Radiated Emissions from EUT Data (Highest, Configuration #1)

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Quasi-Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Quasi-Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)
49.3	37.2	31.9	N/A	41.7	35.4	N/A	40.0
52.6	36.5	29.5	N/A	40.0	35.7	N/A	40.0
77.2	31.8	27.1	N/A	38.3	33.2	N/A	40.0
125.0	32.2	27.4	N/A	32.2	29.2	N/A	43.5
135.0	33.3	26.8	N/A	32.3	27.8	N/A	43.5
157.3	30.8	25.2	N/A	32.1	27.1	N/A	43.5
175.4	34.5	29.1	N/A	32.7	27.6	N/A	43.5
205.2	35.0	29.6	N/A	34.4	28.6	N/A	43.5
225.8	38.2	31.6	N/A	35.6	28.8	N/A	46.0
250.0	37.3	35.1	N/A	32.9	30.5	N/A	46.0
480.0	32.6	29.2	N/A	35.1	31.5	N/A	46.0
500.0	35.6	32.5	N/A	38.1	34.5	N/A	46.0
687.5	46.4	44.7	N/A	44.5	43.7	N/A	46.0
750.0	51.9	45.4	N/A	50.3	45.0	N/A	46.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 9 General Radiated Emissions from EUT Data (Highest, Configuration #2)

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Quasi-Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Quasi-Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)
50.4	35.8	32.0	N/A	40.0	35.0	N/A	40.0
53.9	31.4	28.2	N/A	41.7	36.2	N/A	40.0
55.3	32.0	25.7	N/A	42.2	36.9	N/A	40.0
73.9	36.3	33.1	N/A	34.6	30.4	N/A	40.0
110.8	29.2	22.1	N/A	33.6	28.8	N/A	43.5
115.6	26.9	19.0	N/A	32.9	28.3	N/A	43.5
137.4	29.2	23.7	N/A	31.9	24.8	N/A	43.5
216.2	35.0	29.3	N/A	29.8	24.0	N/A	43.5
222.9	47.2	37.8	N/A	39.8	30.4	N/A	46.0
230.9	35.7	26.8	N/A	31.2	23.5	N/A	46.0
250.0	34.1	31.5	N/A	32.1	29.2	N/A	46.0
275.0	35.5	32.4	N/A	29.8	26.1	N/A	46.0
350.0	35.1	32.0	N/A	28.3	24.9	N/A	46.0
500.0	38.5	35.5	N/A	40.2	37.6	N/A	46.0
687.5	46.6	44.9	N/A	44.6	43.8	N/A	46.0
750.0	52.3	45.9	N/A	51.8	45.2	N/A	46.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR part 15 and Industry Canada RSS-247 Issue 2 Intentional Radiators. The EUT demonstrated a minimum margin of -0.1 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

Operation in the 5150-5250 and 5725-5850 MHz Frequency U-NII-1 and U-NII-3 Bands

Testing followed FCC 789033 D02 General U-NII Test Procedures New Rules v02r01.

The manufacturer provided a second test sample which provided direct connection to the antenna ports. A power meter was used to measure fundamental transmitter output power. A spectrum analyzer / receiver was used to produce plots and make other antenna port conducted measurements for compliance testing. Test software (Winbox version 3.1) was used to operate the transmitter. This software provided the ability to set test channel, operational mode, and modulation scheme. The antenna port was connected to coaxial cable with 50-ohm attenuator and receiver, spectrum analyzer, or power meter during testing. The design was also tested for radiated emissions using sample #1 representative of production equipment. Radiated emissions testing was performed on the Open Area Test Site (OATS) with all transmitters operating. The test sample was placed on a turntable elevated as required above the ground plane as required at a 3 meters distance from the FSM antenna located on the OATS for testing radiated emissions. The peak and quasi-peak amplitude of the frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of emissions above 1000 MHz were measured using a spectrum analyzer. Emissions data was recorded from the measurement results. Data presented reflects measurement result corrected to account for measurement system gains and losses. Plots were made of transmitter performance for reference and demonstration of compliance. In addition, all Manufacturers of U-NII devices are responsible for ensuring frequency stability such that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual. The manufacturer has attested the equipment operates within the required frequency spectrum under normal operational conditions. This report documents emissions governed under the U-NII-1 and U-NII-3 bands operating in the 5180-5240 and 5745-5825 MHz frequency bands.

Directional correlated antenna calculation (antenna gain 3 dBi, and 4 chains). Per KDB 662911 D01 Multiple Transmitter Output v02r01, the directional gain for correlated emissions in-band may be calculated using the following formula:

$$\text{Directional gain} = G_{\text{ANT}} + 10 \log (N_{\text{ANT}}) \text{ dBi}$$

$$\text{Directional gain} = 3 + 10 \log (4) \text{ dBi} = 9 \text{ dBi}$$

Per 15.407 Technical Requirements

(a) power limitations

(1) For the Band 5.15-5.25 GHz

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

Per RSS-247 Issue 2

6. Technical requirements for license-exempt local area network devices and digital transmission systems operating in the 5 GHz band

This section provides standards for Licence-Exempt Local Area Network (LE-LAN) devices operating in the bands 5150-5250 MHz, 5250-5350 MHz, 5470-5600 MHz, 5650-5725 MHz and 5725-5850 MHz and for DTSs operating in the band 5725-5850 MHz that employ digital modulation technology but are not designed for LE-LAN operation.

Devices with occupied bandwidths which overlap different bands shall comply with all operational requirements for each band.

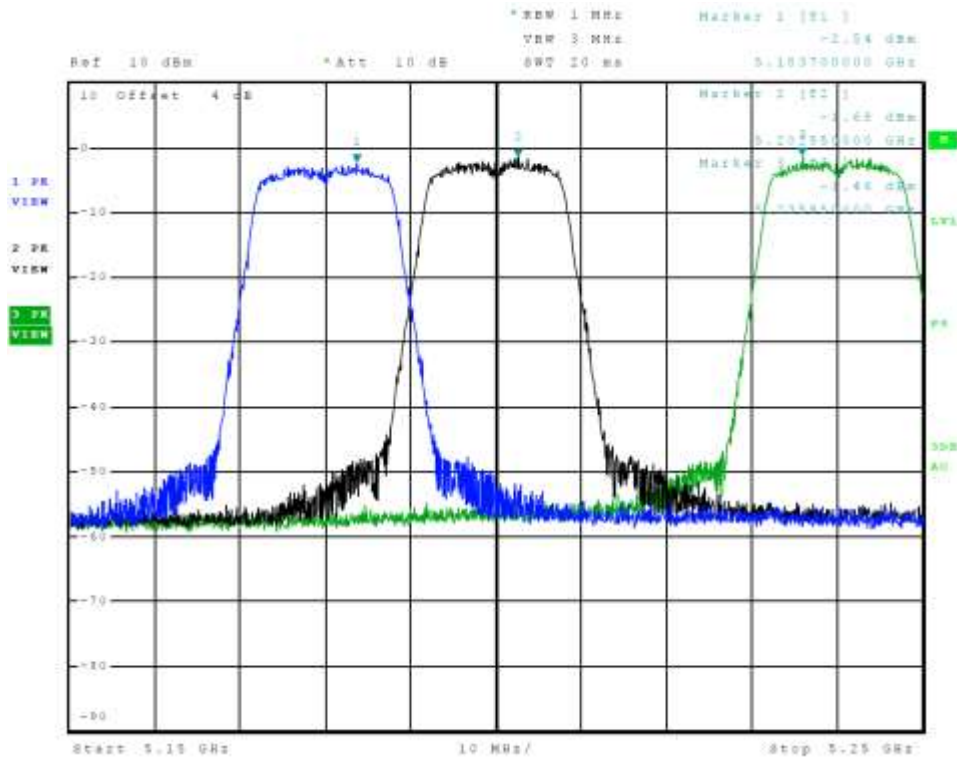


Figure 5 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 0, 802.11a)

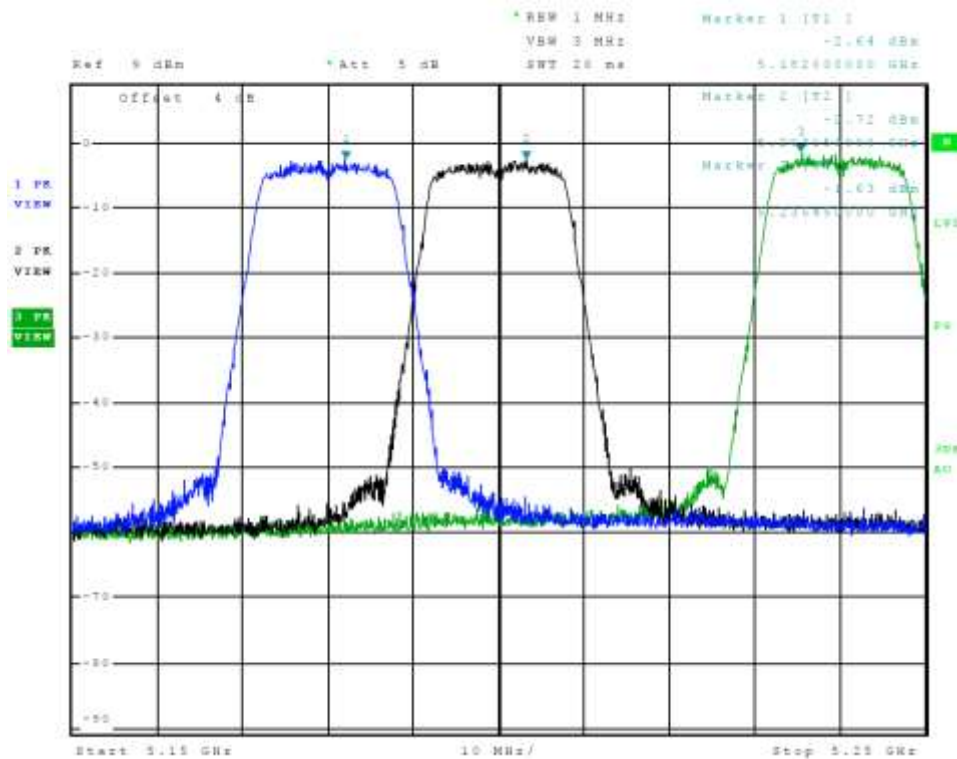


Figure 6 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 1, 802.11a)

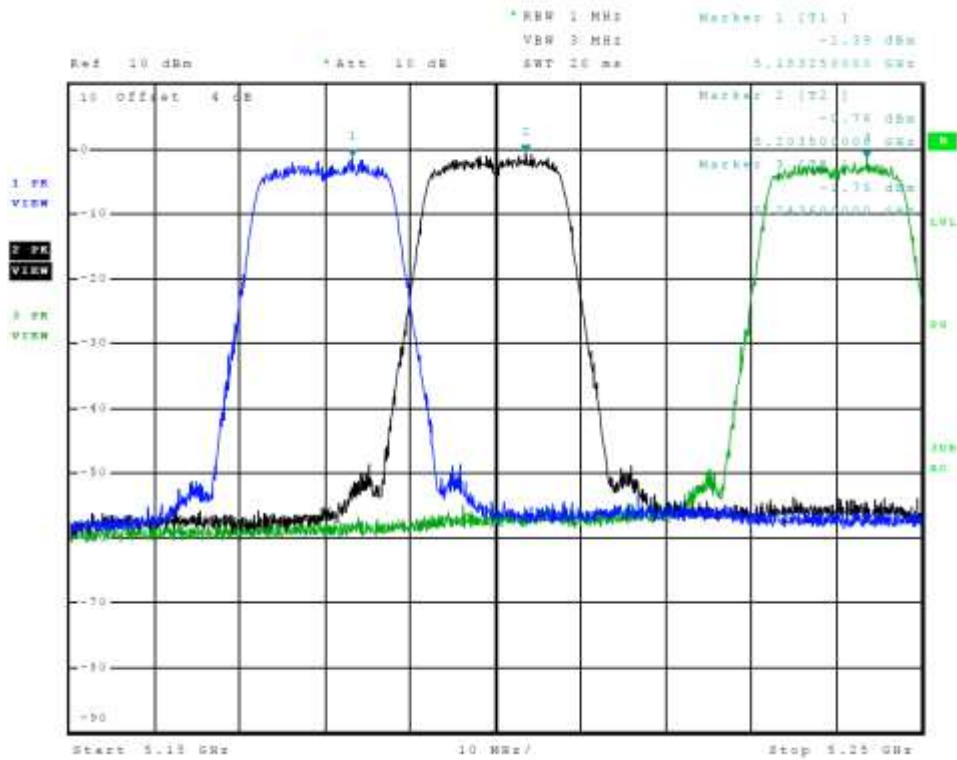


Figure 7 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 2, 802.11a)

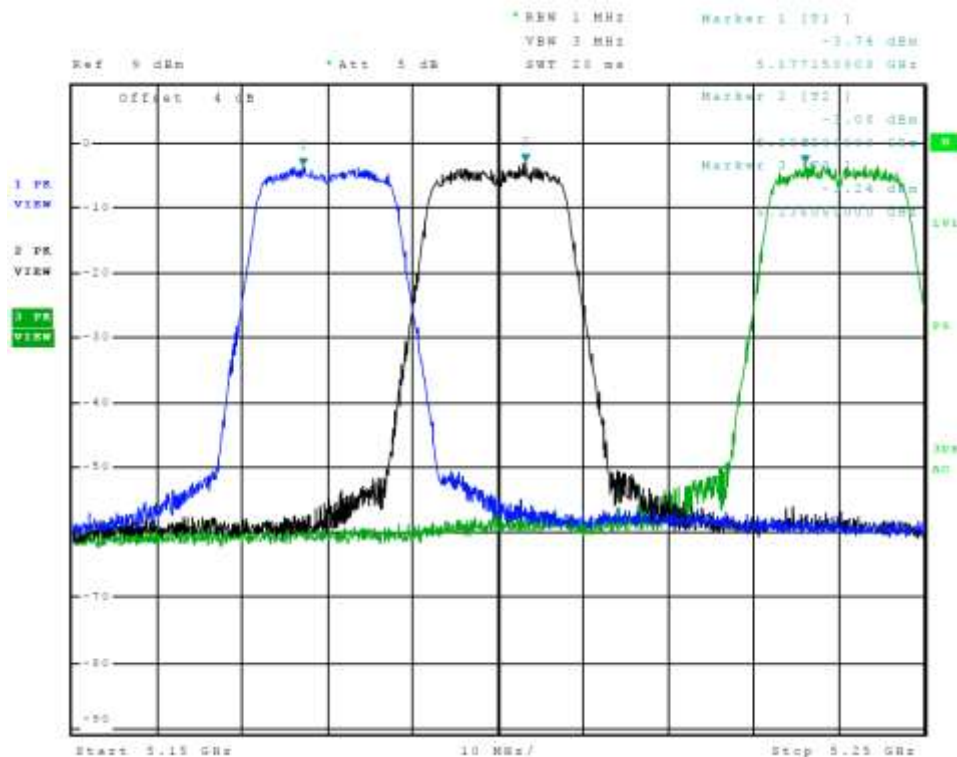


Figure 8 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 3, 802.11a)

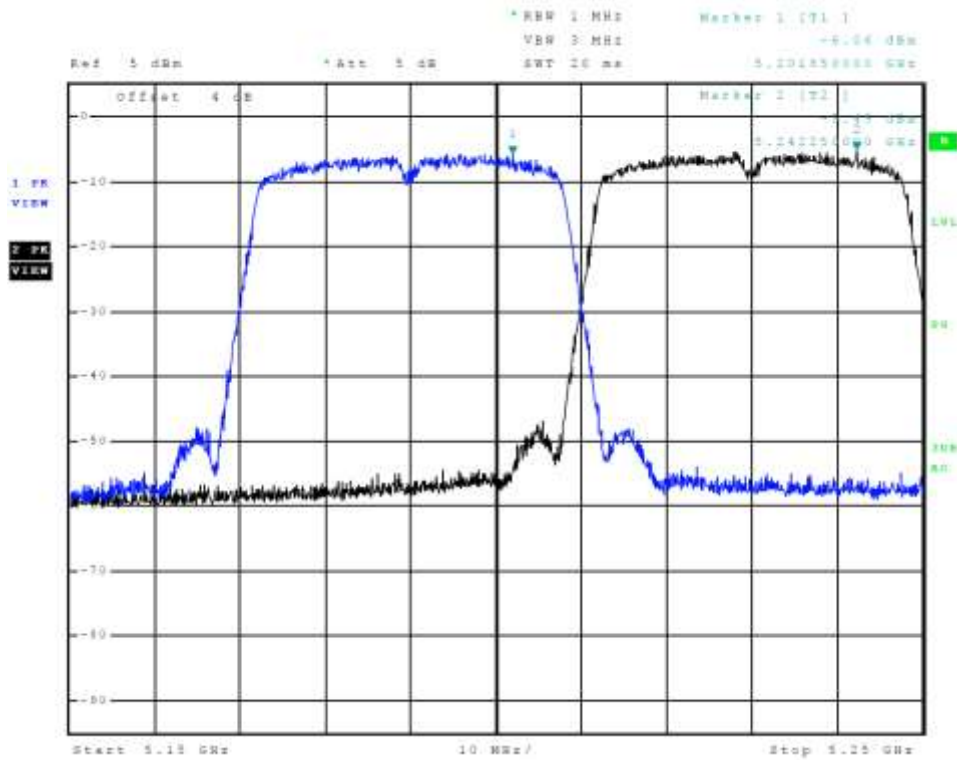


Figure 9 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 0, 802.11n40)

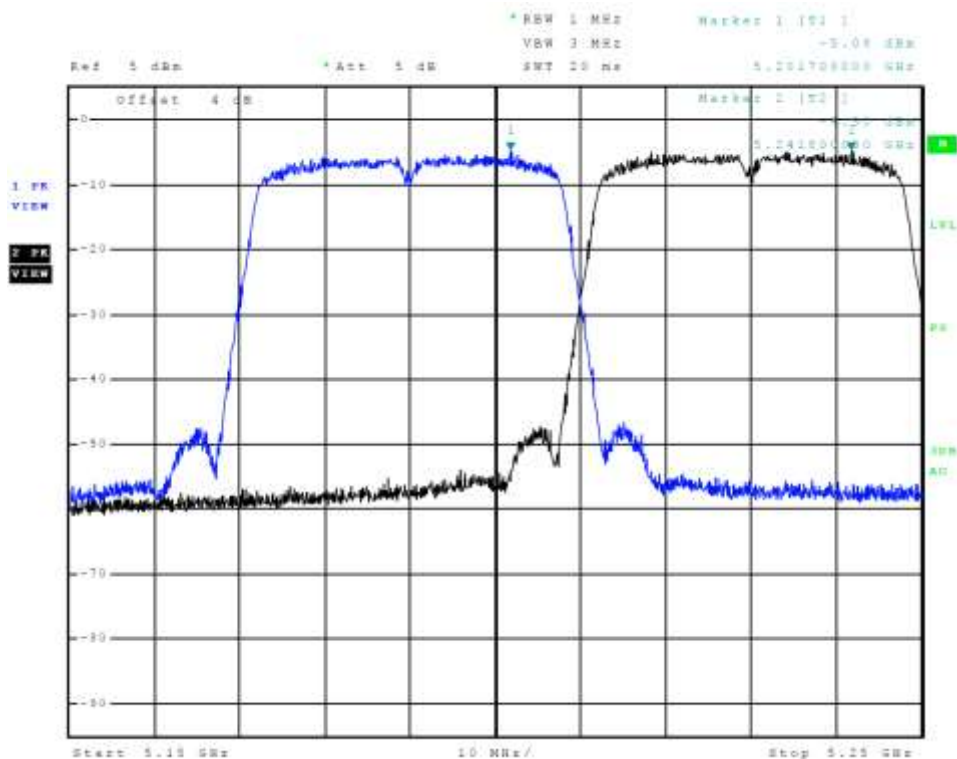


Figure 10 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 1, 802.11n40)

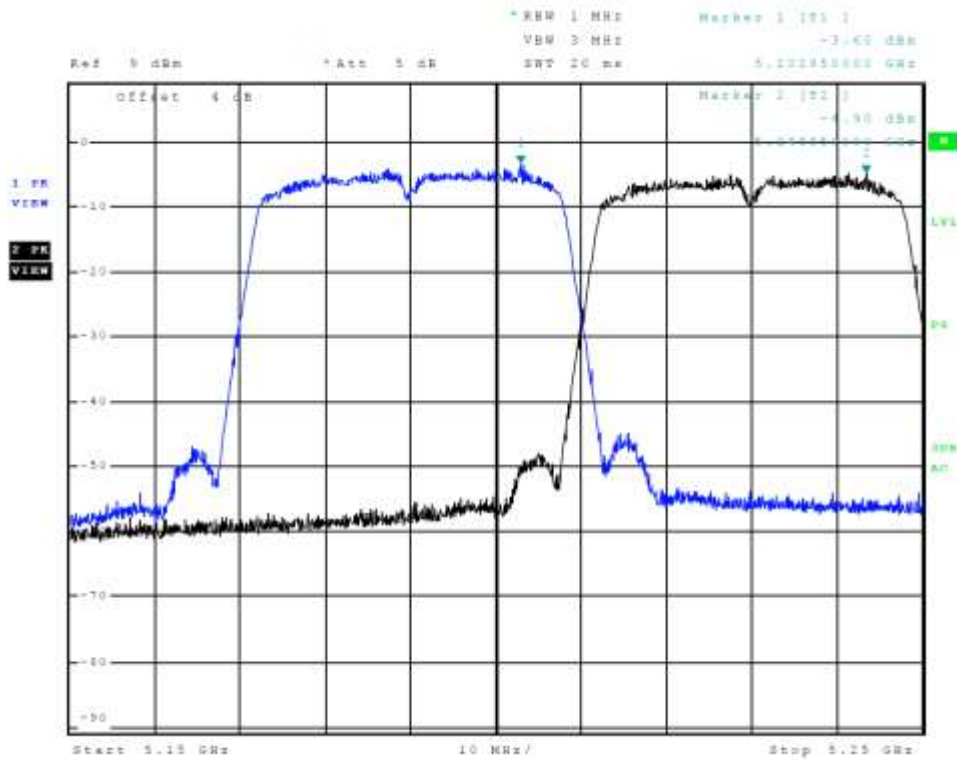


Figure 11 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 2, 802.11n40)

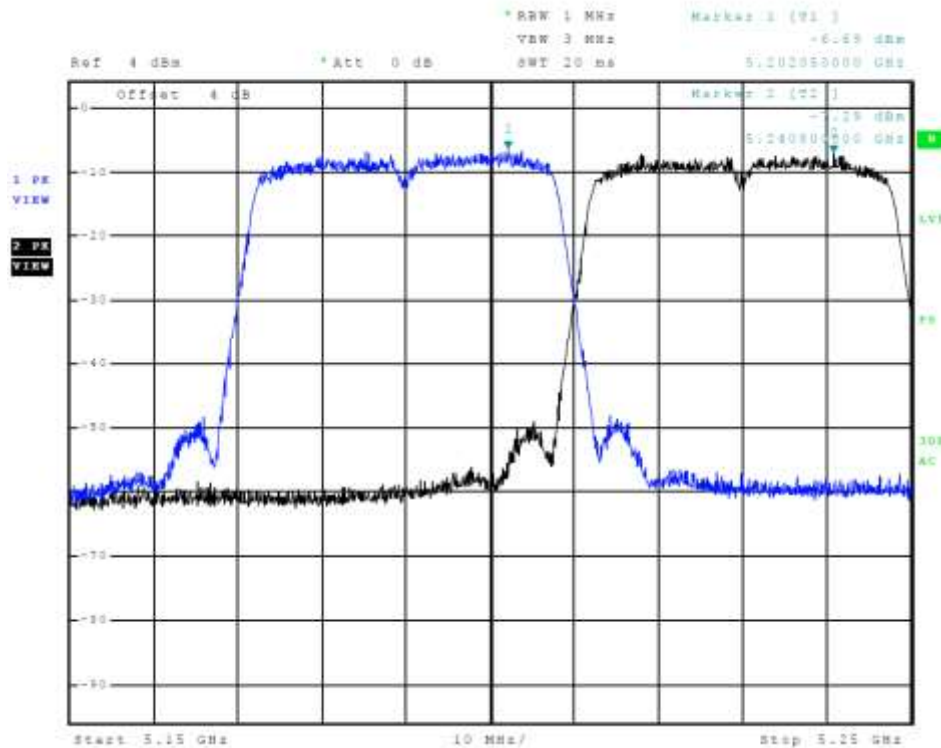


Figure 12 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 3, 802.11n40)

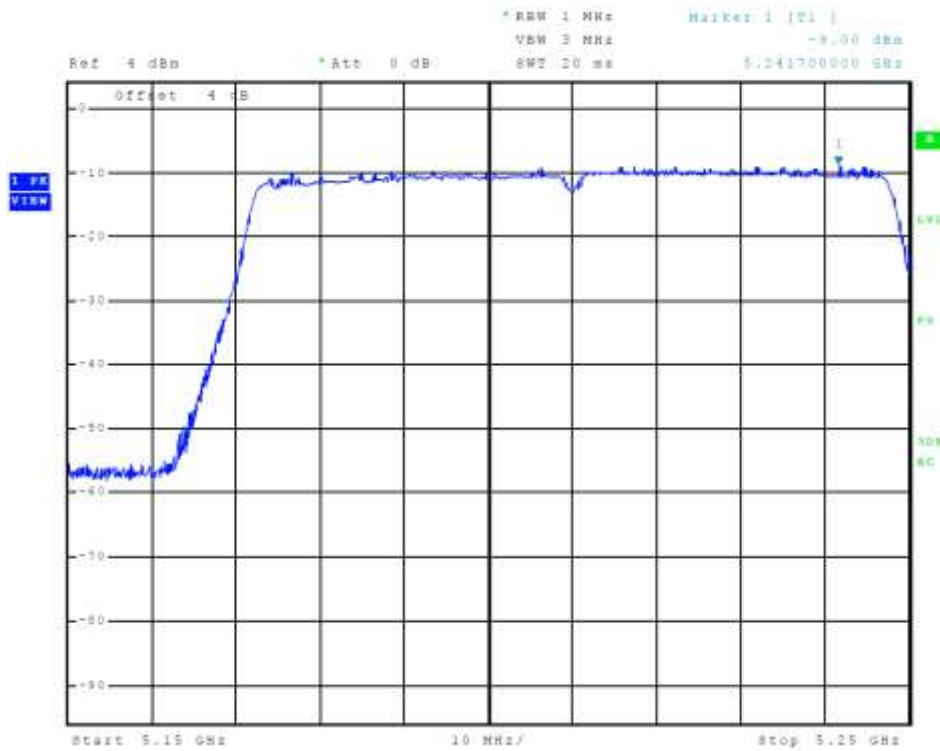


Figure 13 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 0, 802.11ac)

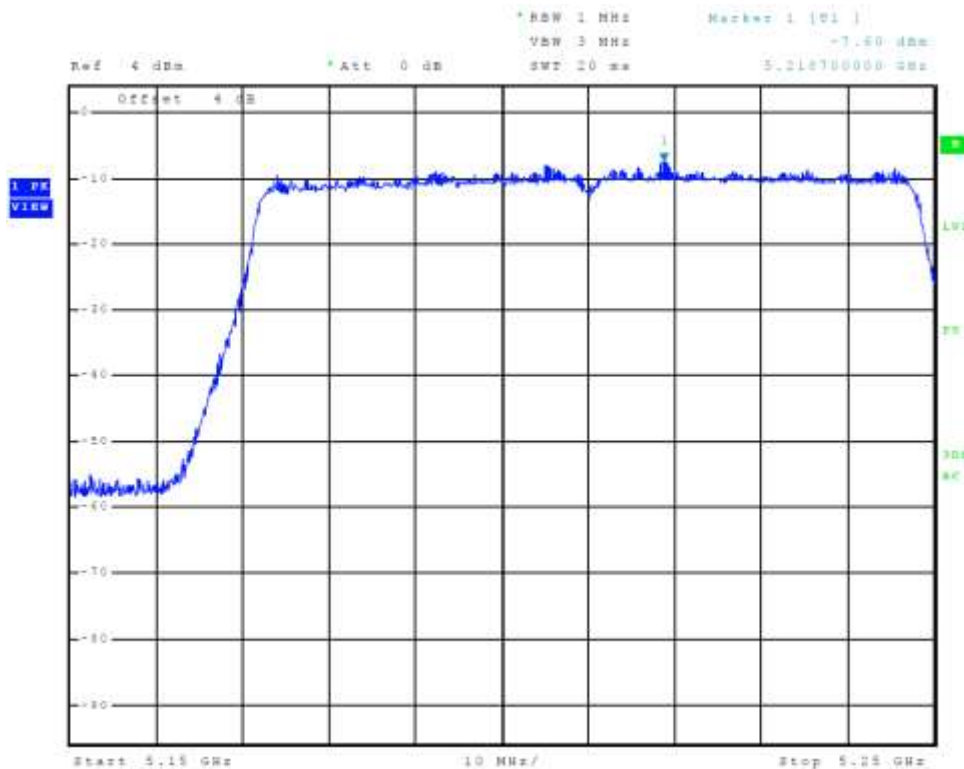


Figure 14 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 1, 802.11ac)

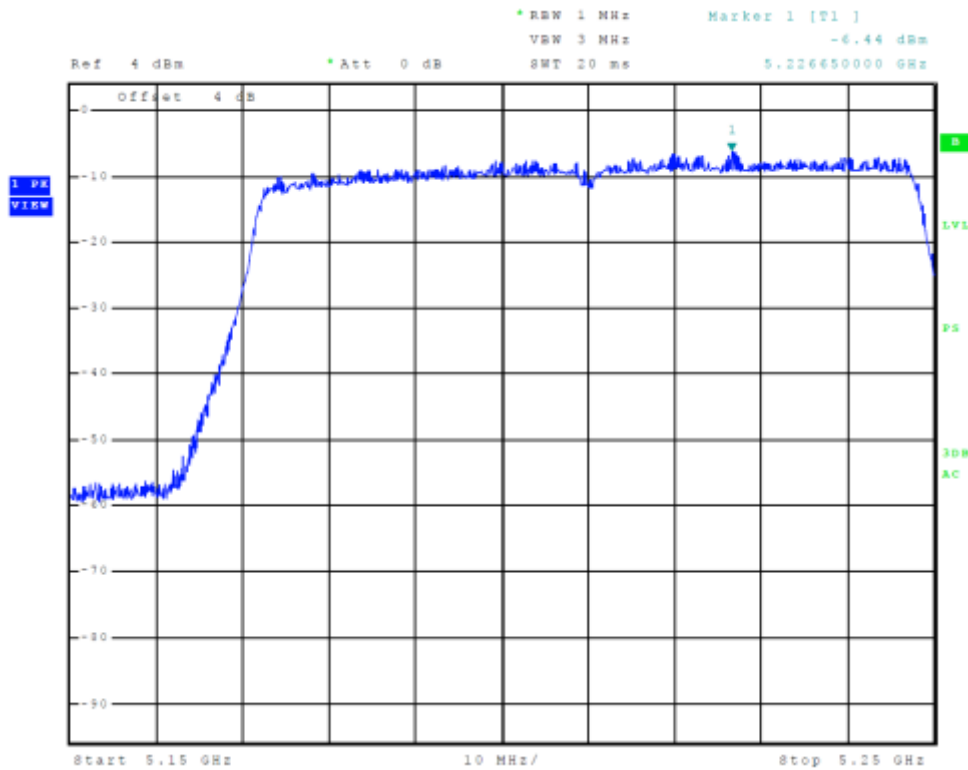


Figure 15 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 2, 802.11ac)



Figure 16 Plot of Transmitter Emissions (Across 5150-5250 MHz Band, Chain 3, 802.11ac)

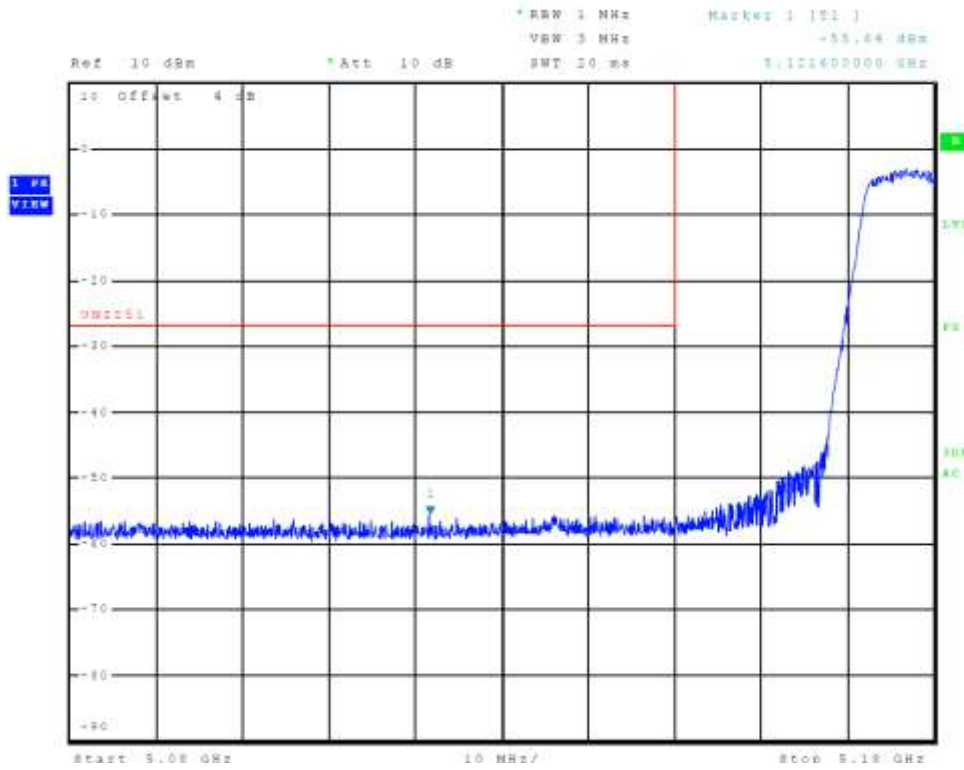


Figure 17 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 0, 802.11a)

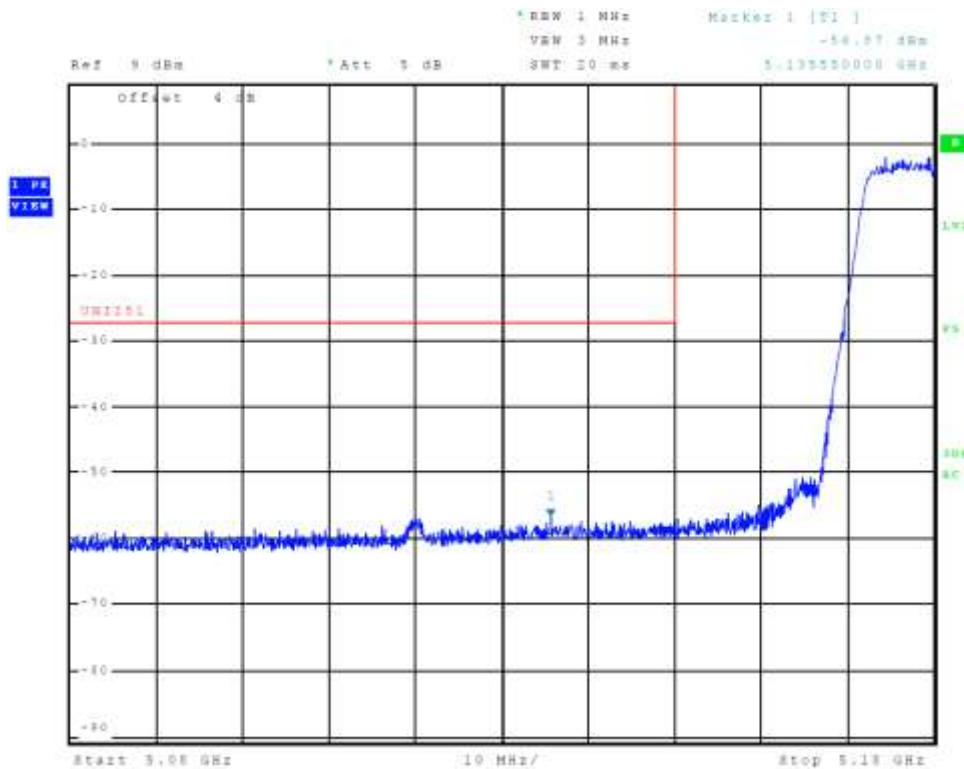


Figure 18 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 1, 802.11a)

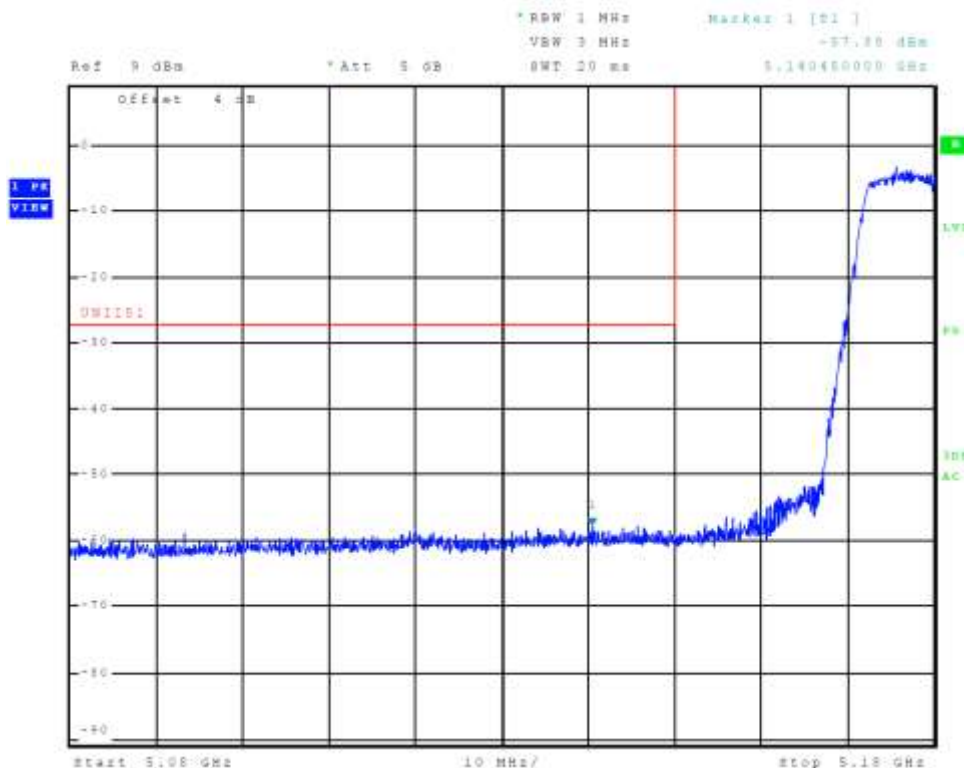


Figure 19 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 2, 802.11a)

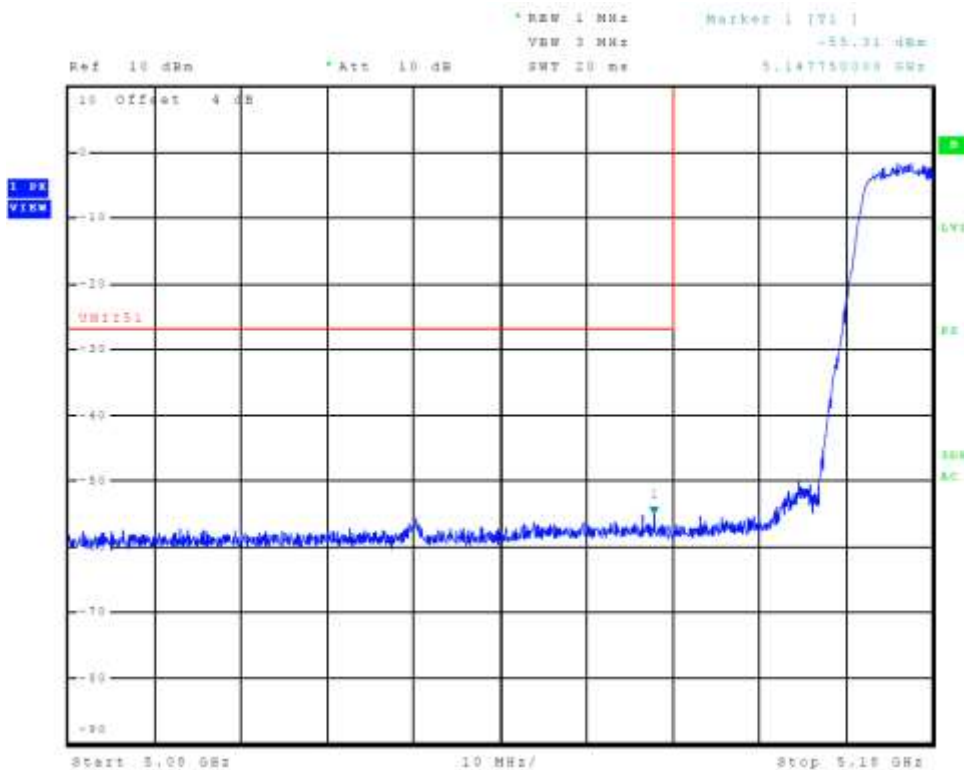


Figure 20 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 3, 802.11a)

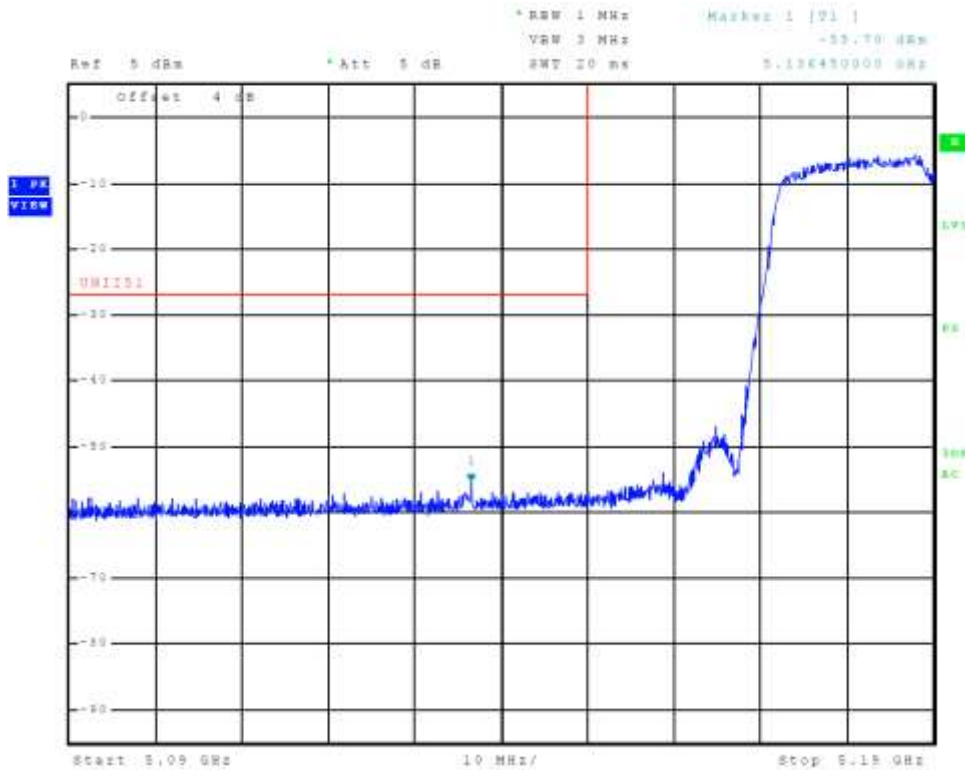


Figure 21 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 0, 802.11n40)

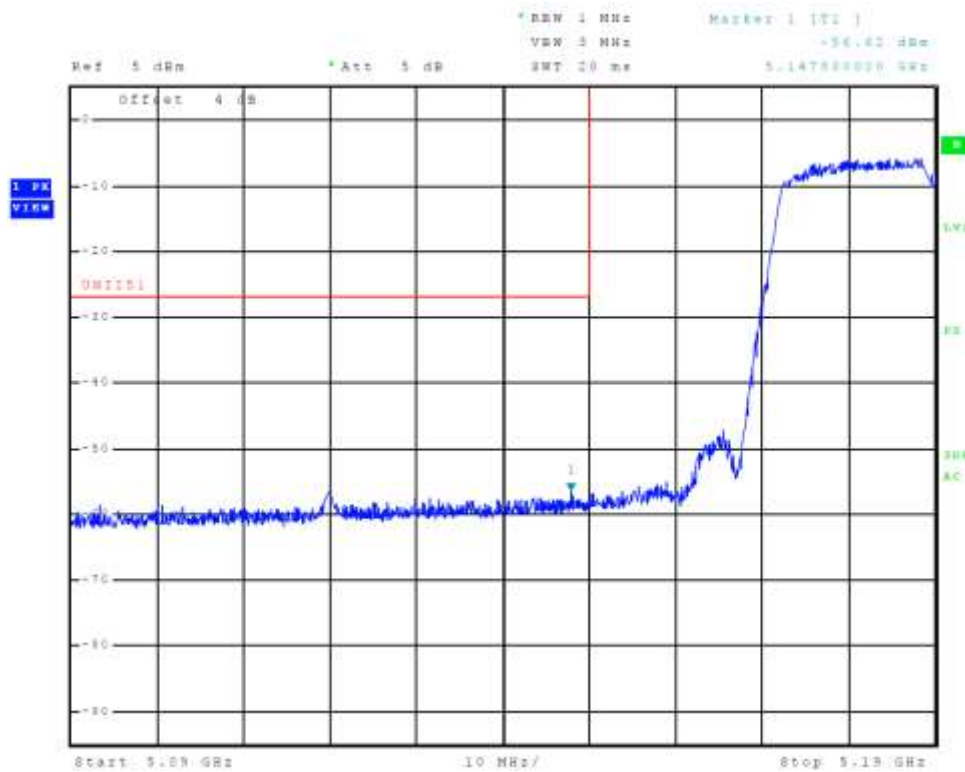


Figure 22 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 1, 802.11n40)

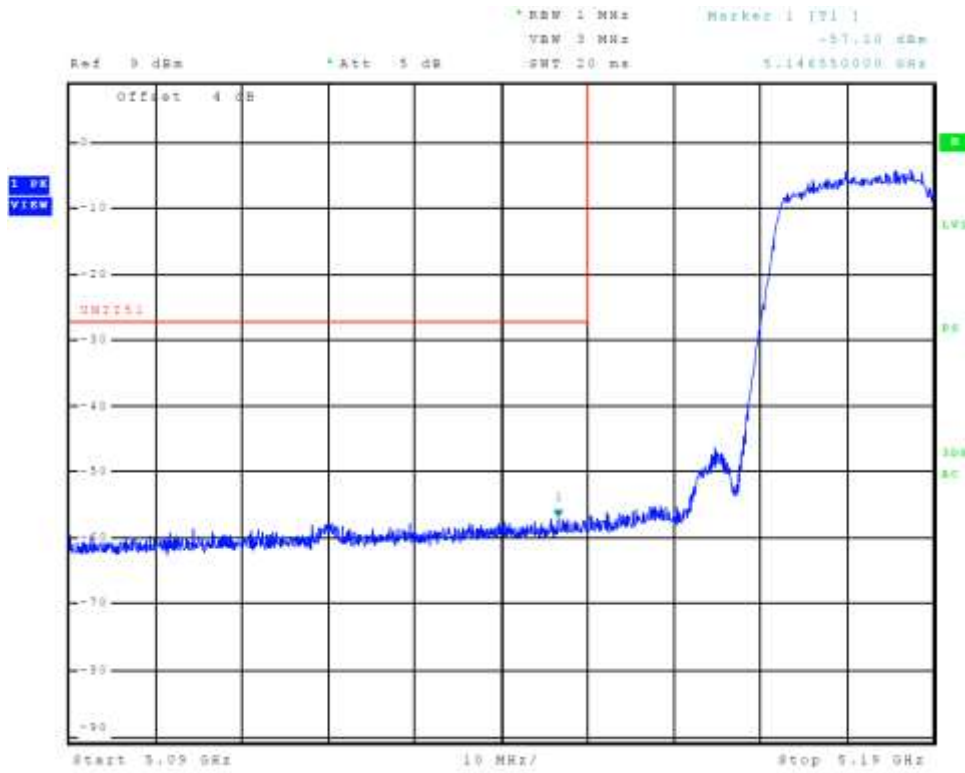


Figure 23 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 2, 802.11n40)

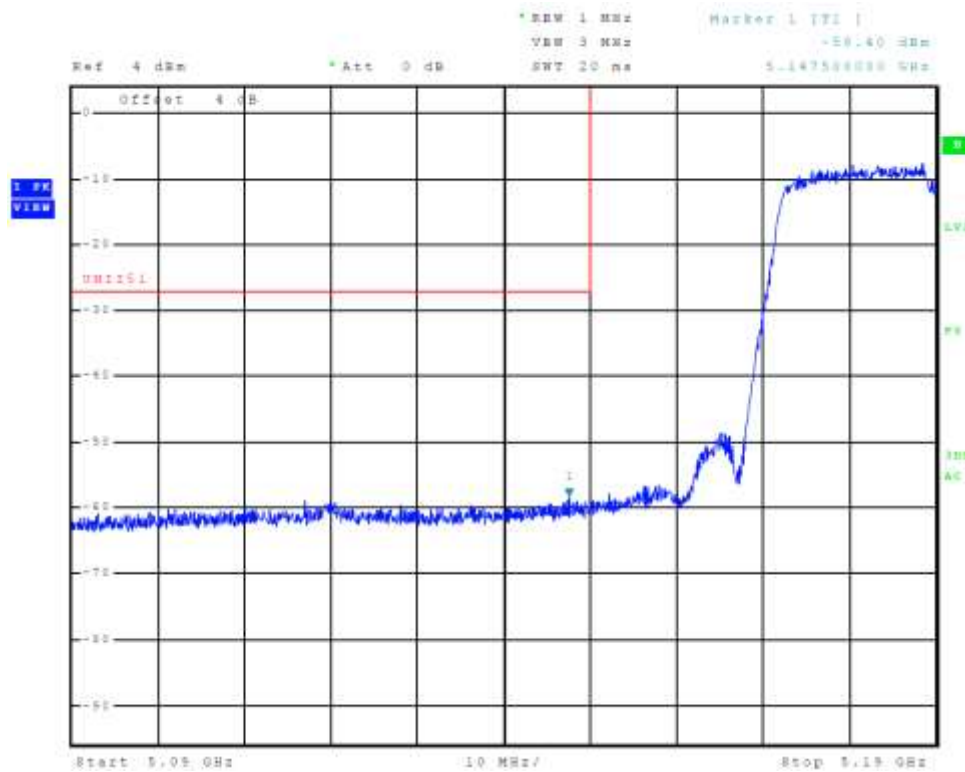


Figure 24 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 3, 802.11n40)

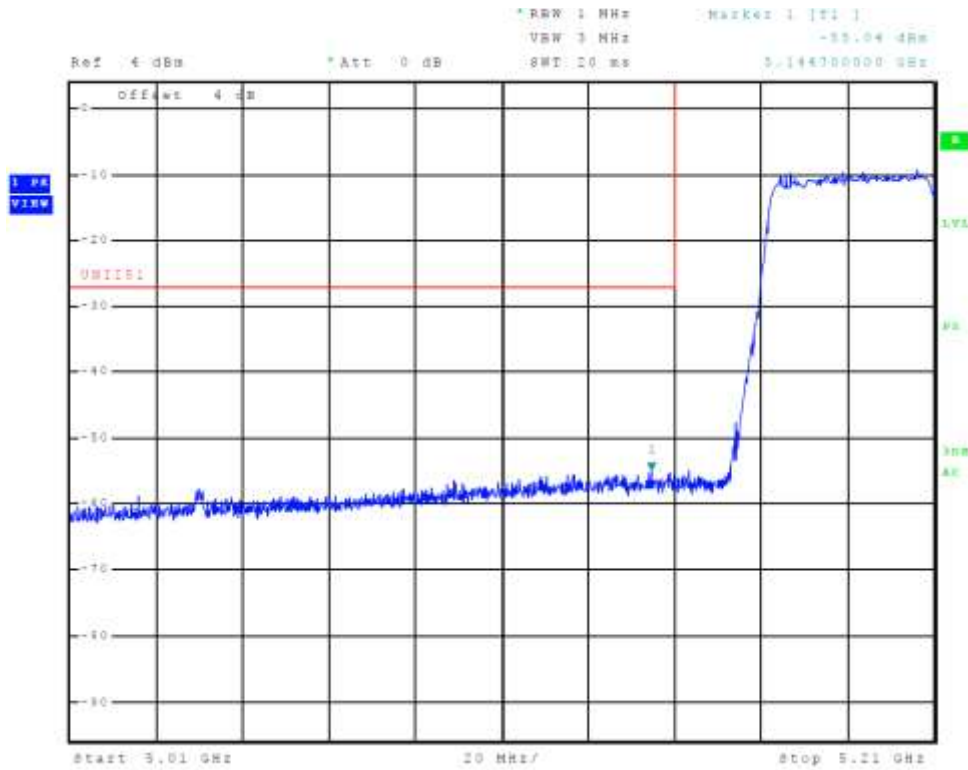


Figure 25 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 0, 802.11ac)

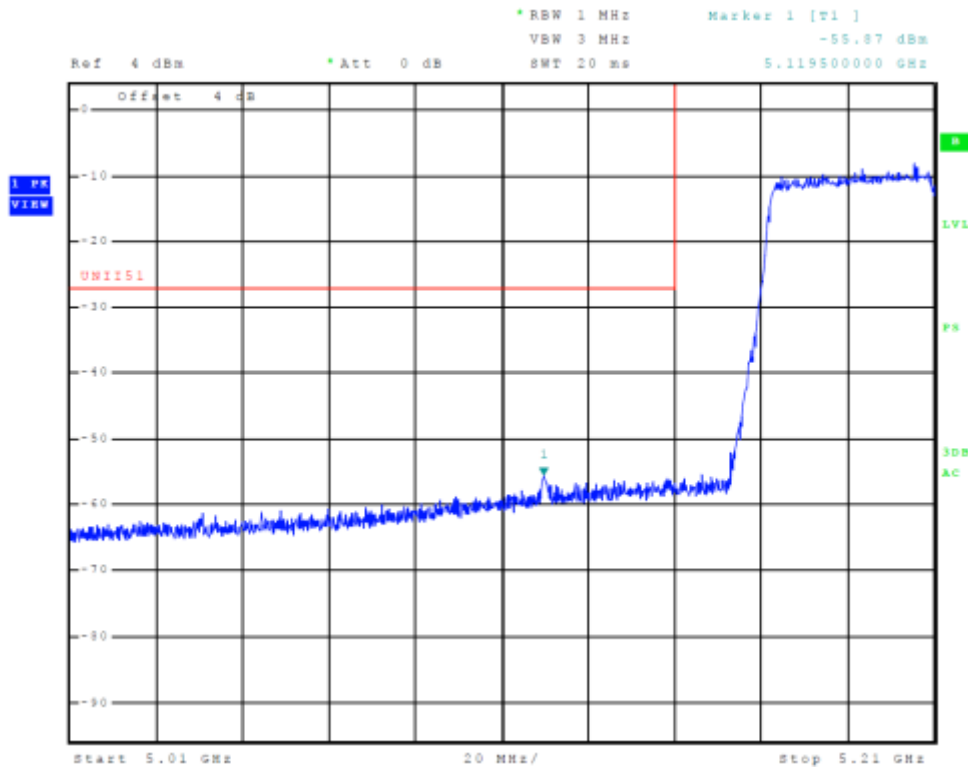


Figure 26 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 1, 802.11ac)

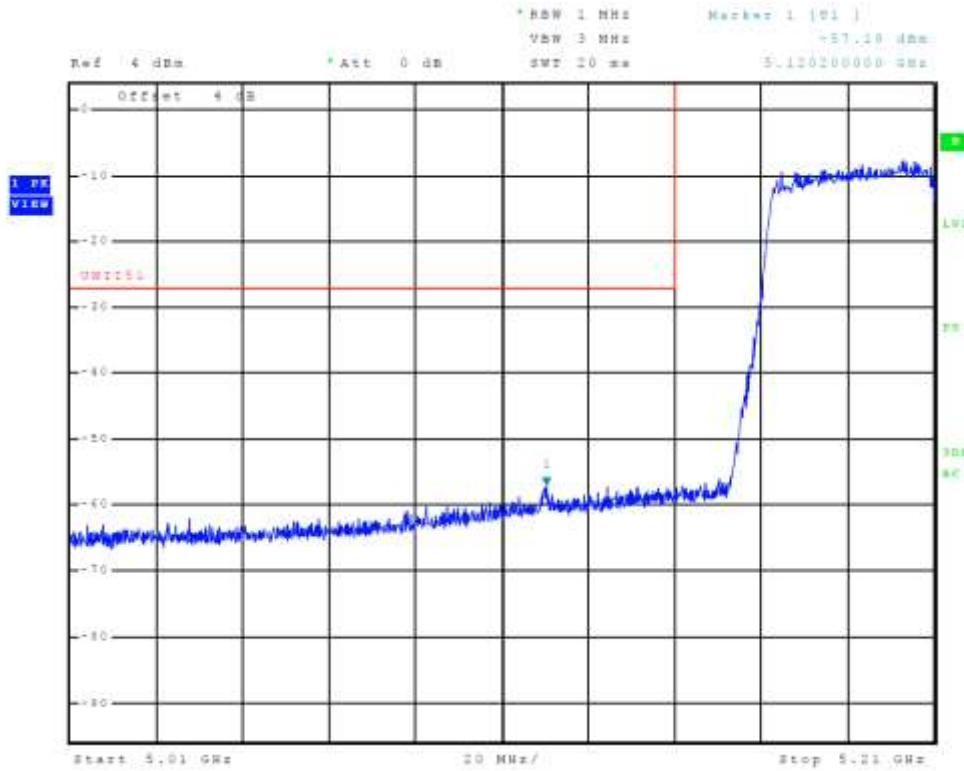


Figure 27 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 2, 802.11ac)

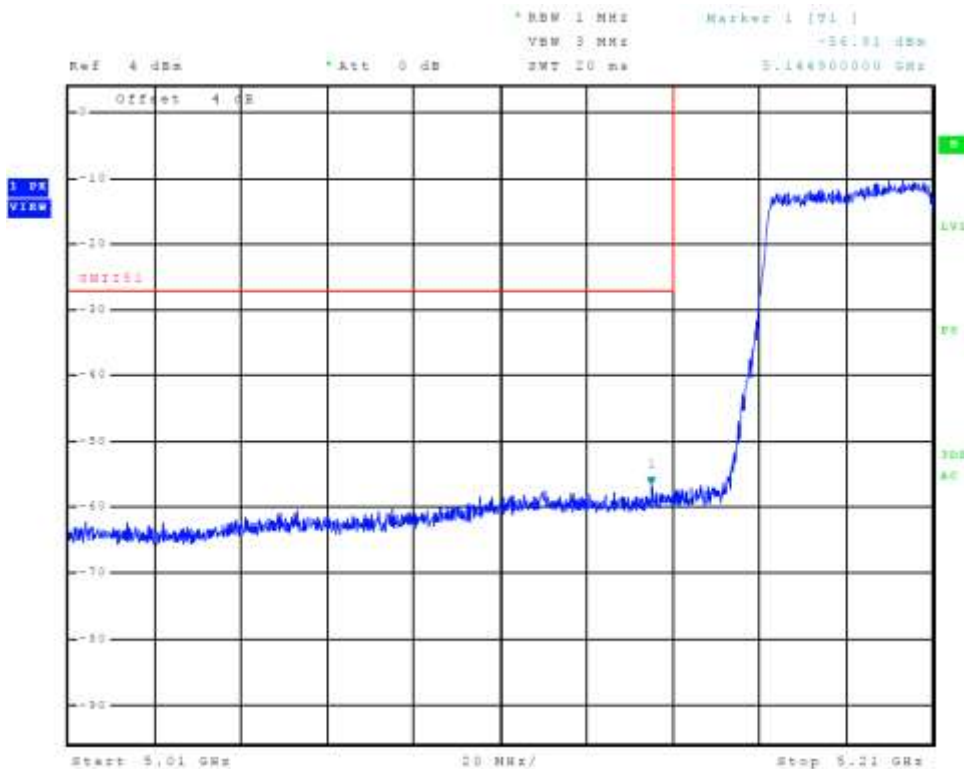


Figure 28 Plot of Transmitter Low Band Edge (5150-5250 MHz Band, Chain 3, 802.11ac)

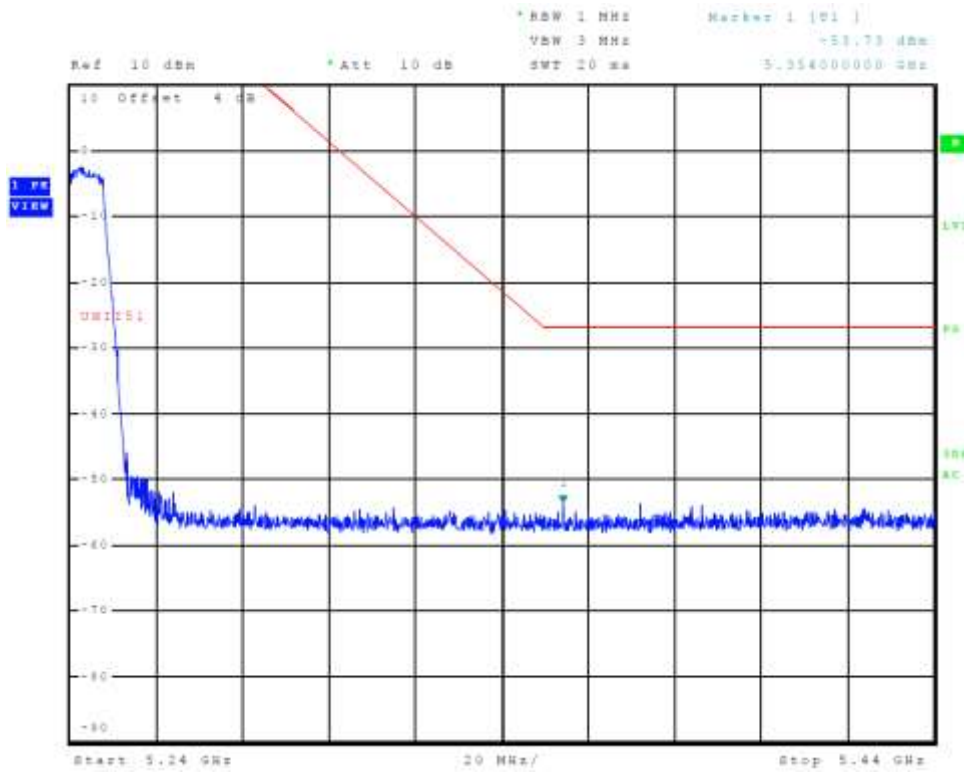


Figure 29 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 0, 802.11a)

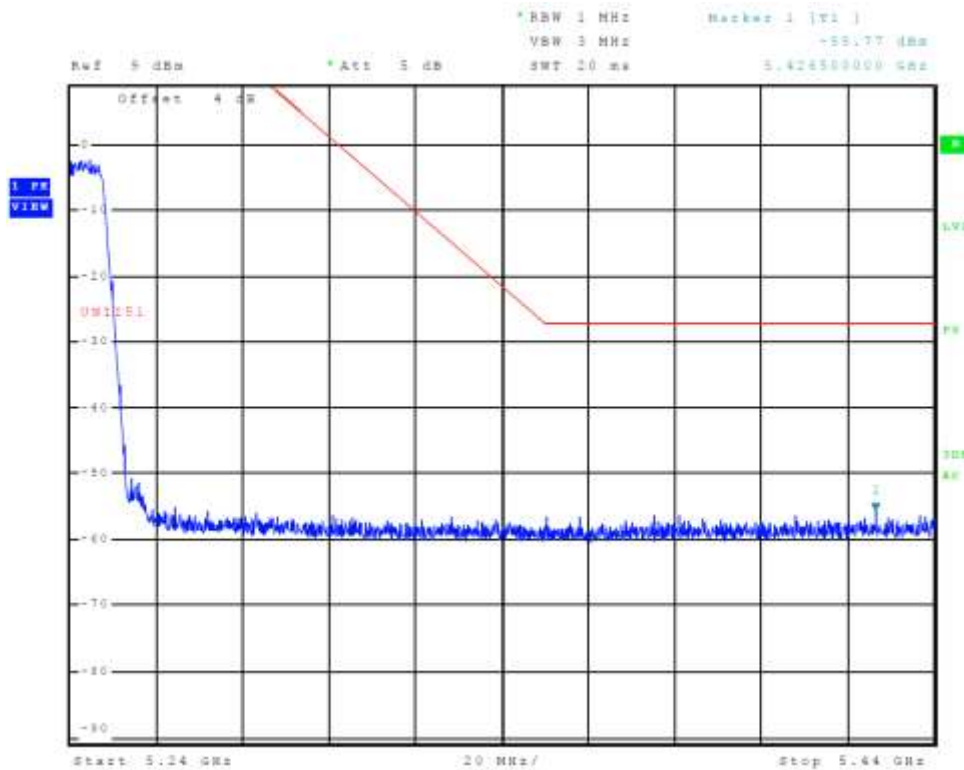


Figure 30 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 1, 802.11a)

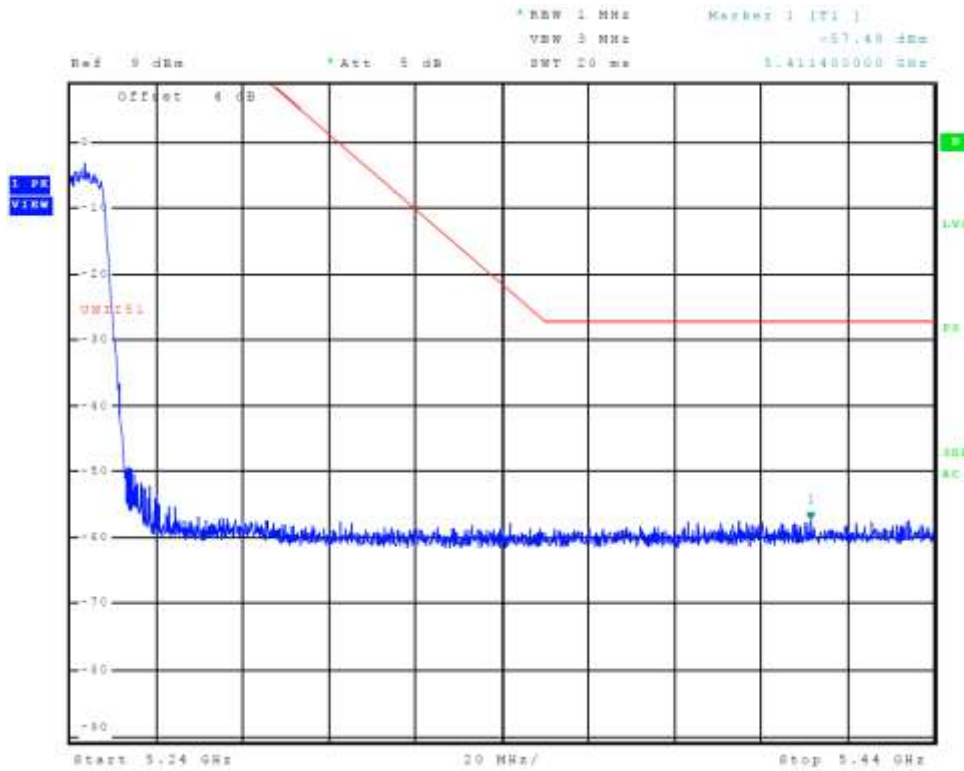


Figure 31 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 2, 802.11a)

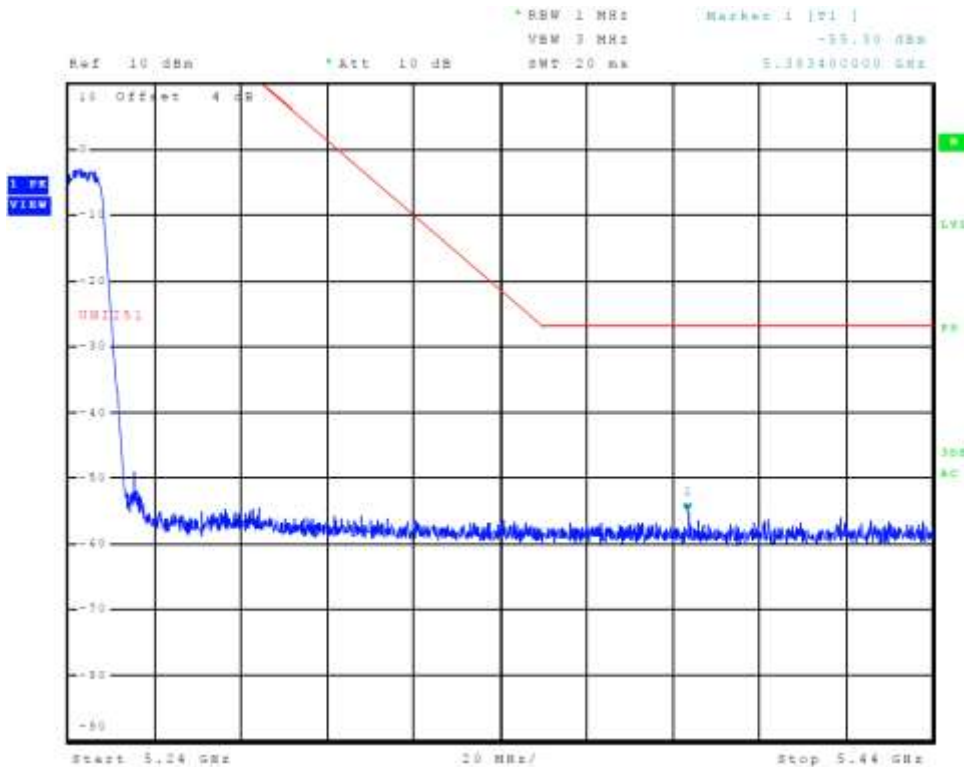


Figure 32 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 3, 802.11a)

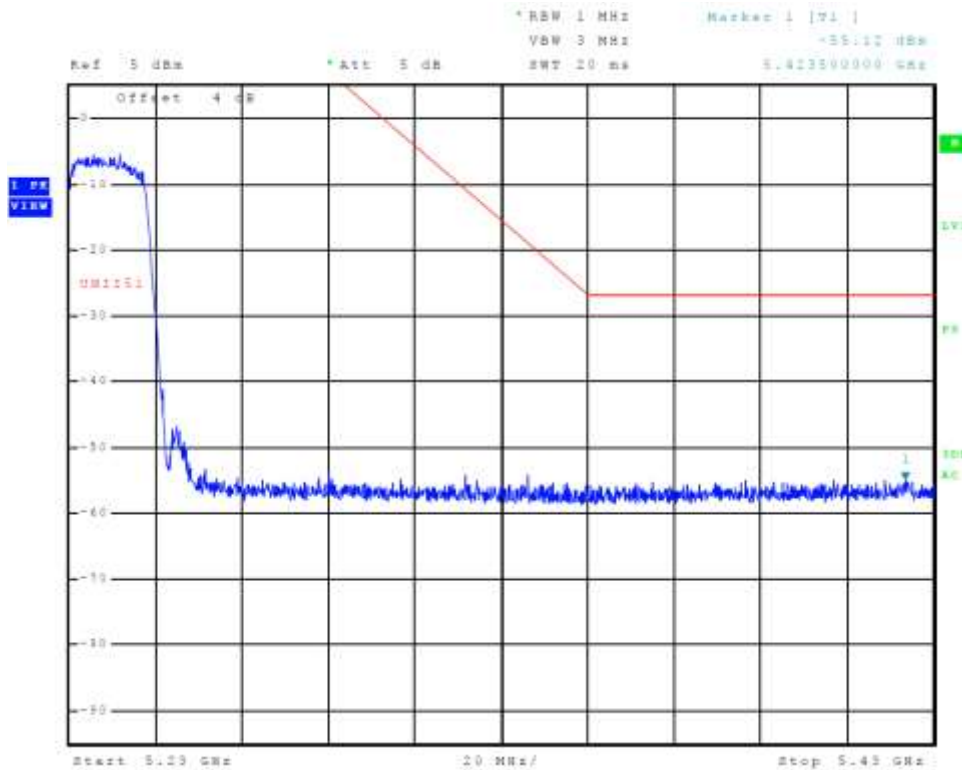


Figure 33 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 0, 802.11n40)

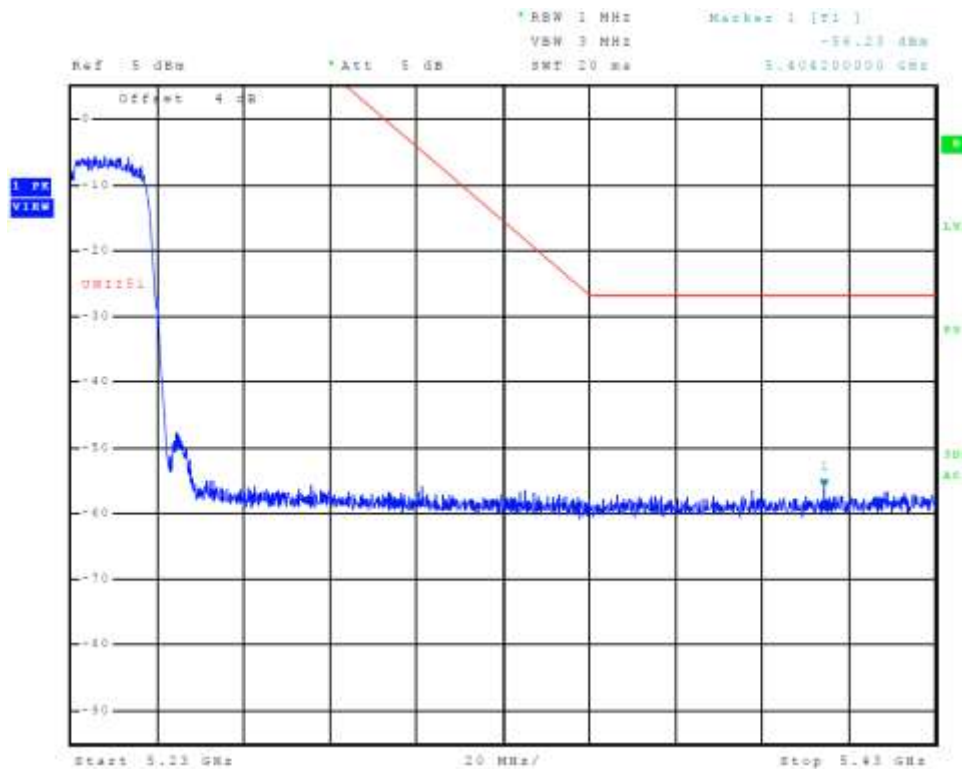


Figure 34 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 1, 802.11n40)

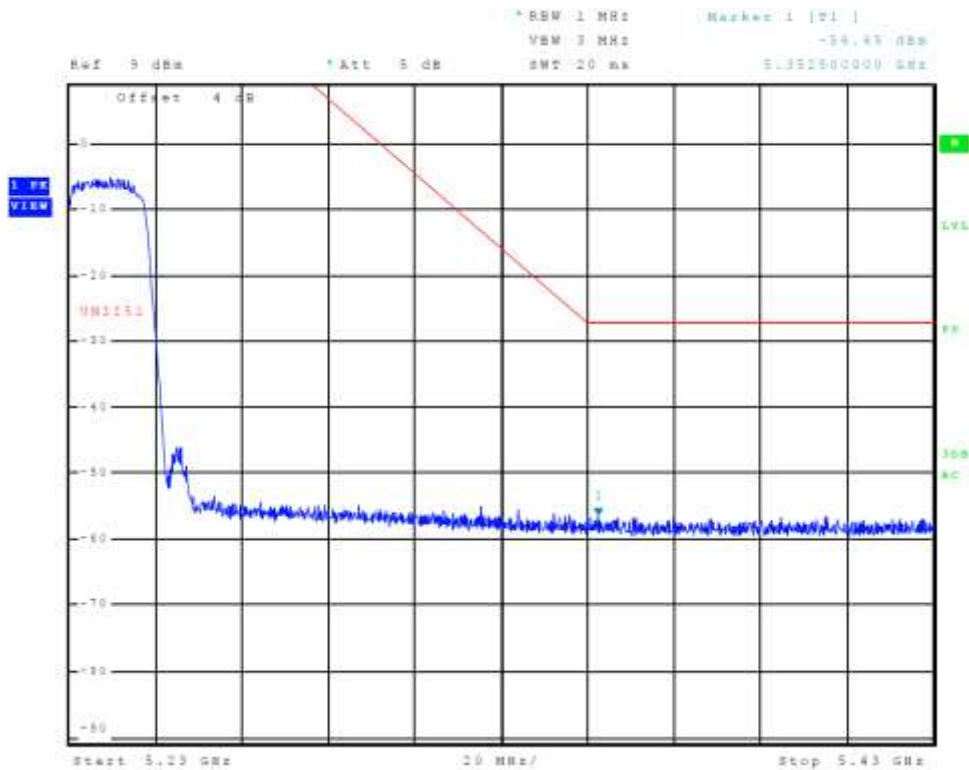


Figure 35 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 2, 802.11n40)

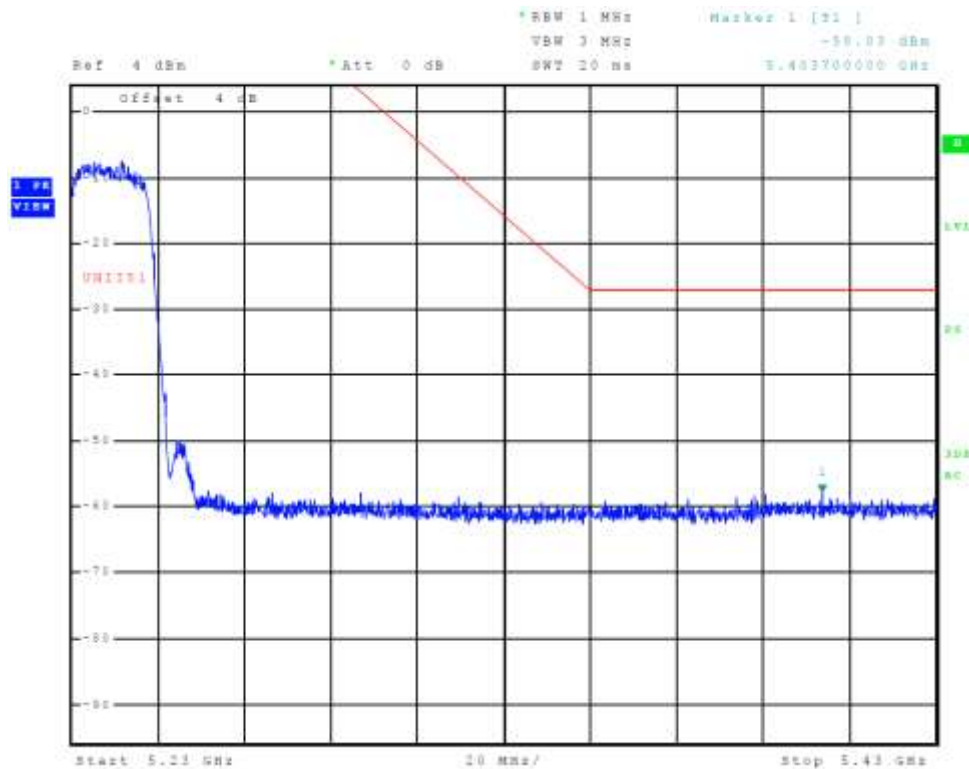


Figure 36 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 3, 802.11n40)

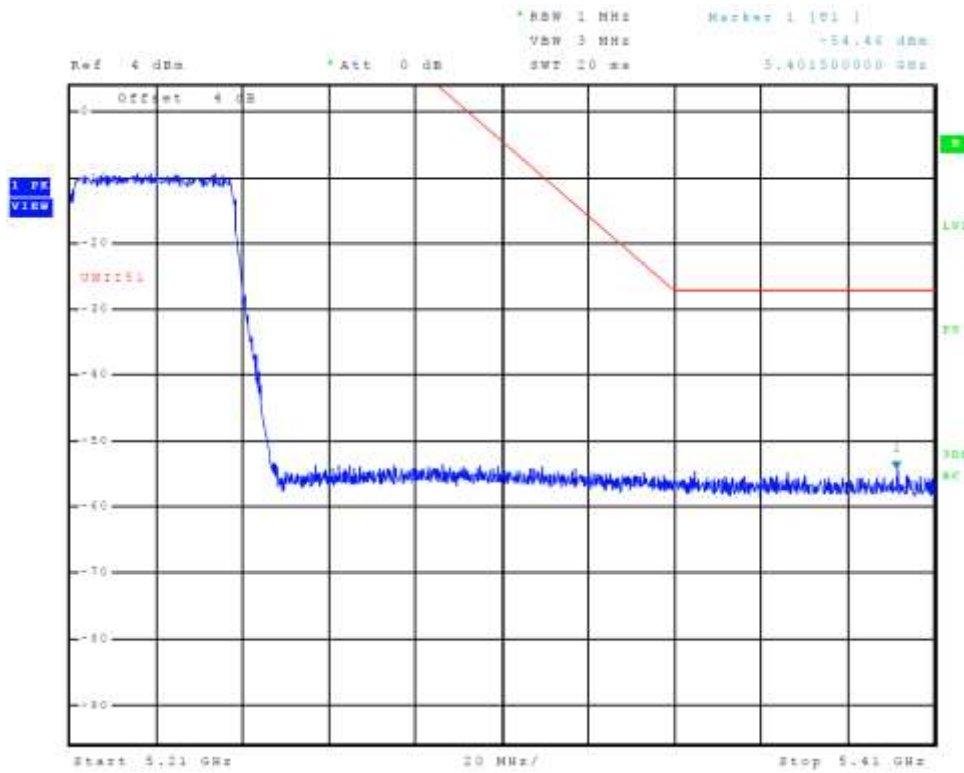


Figure 37 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 0, 802.11ac)

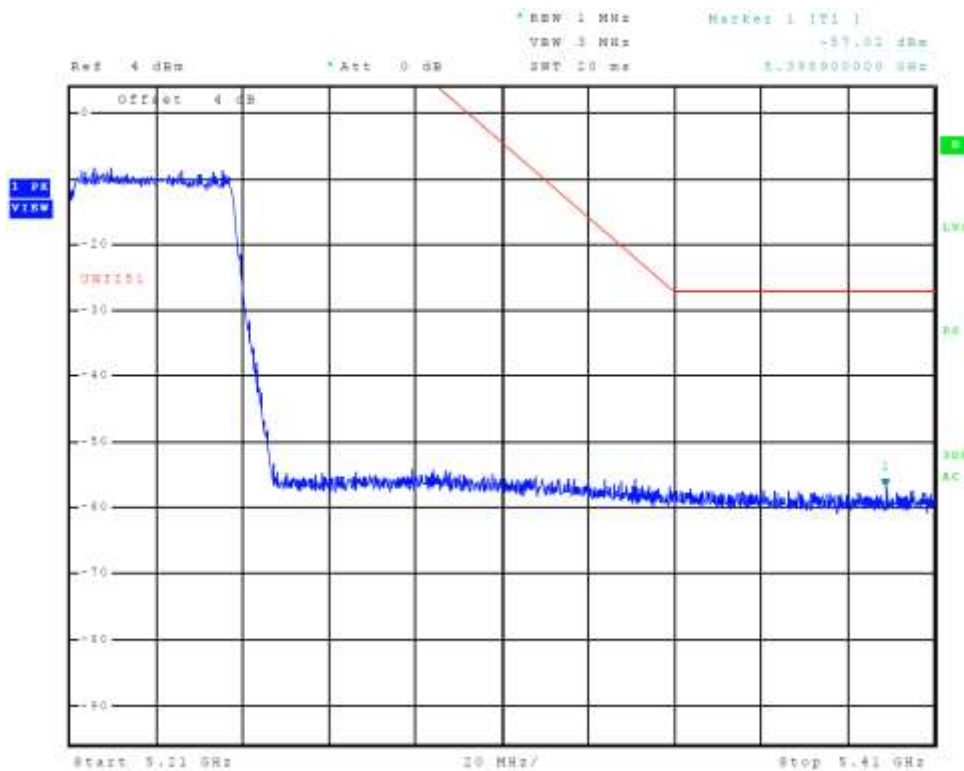


Figure 38 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 1, 802.11ac)

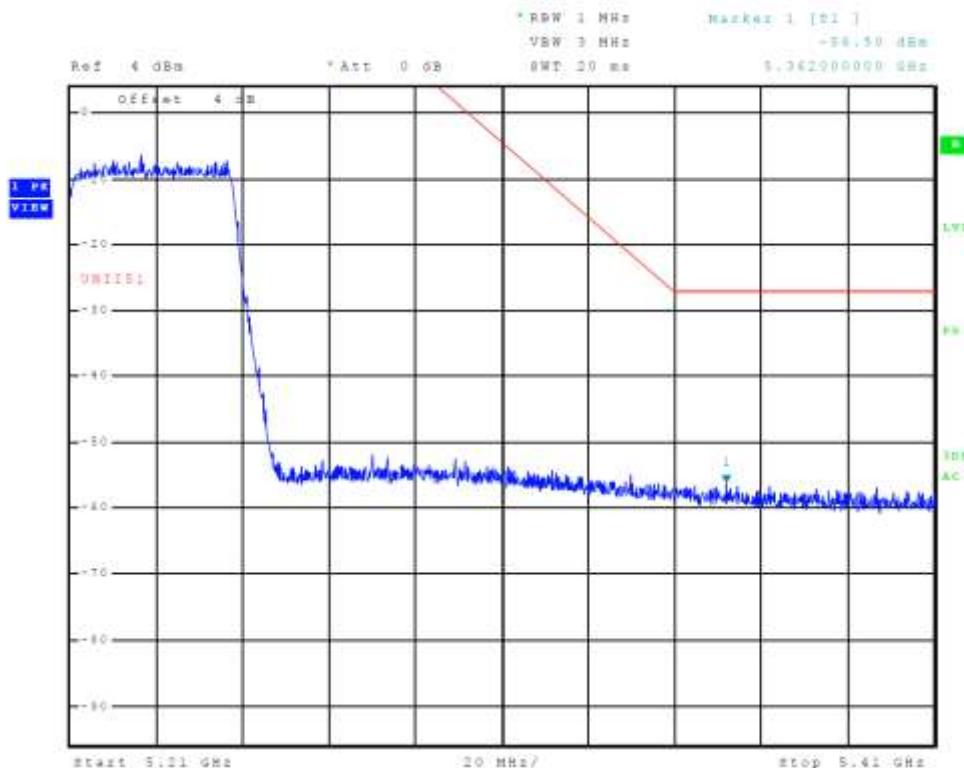


Figure 39 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 2, 802.11ac)

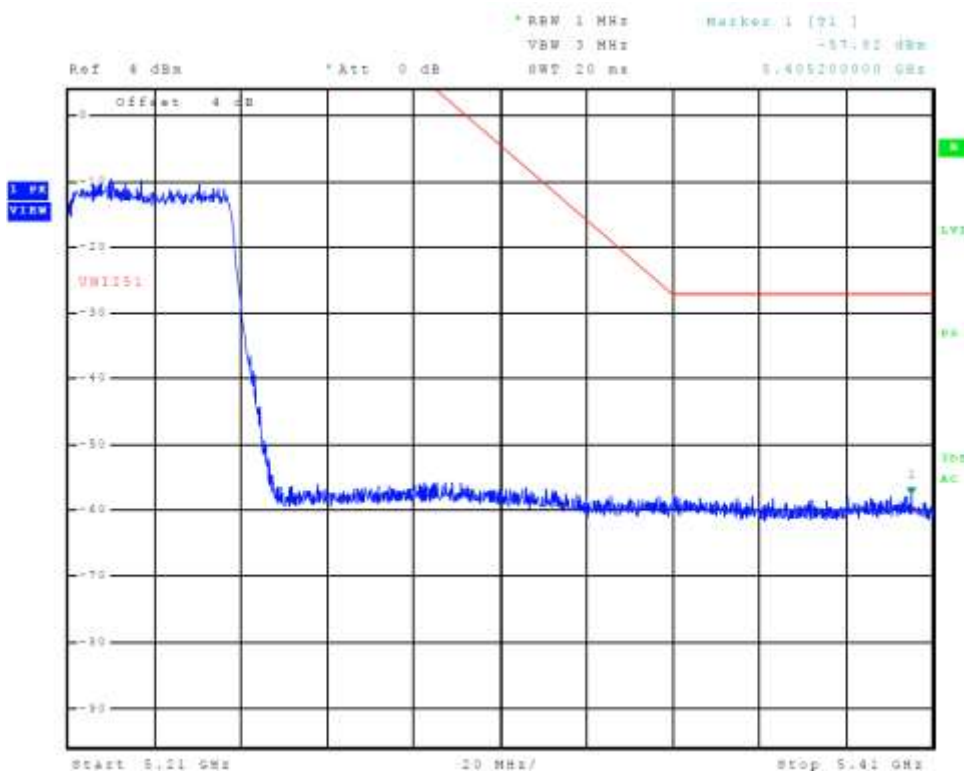


Figure 40 Plot of Transmitter High Band Edge (5150-5250 MHz Band, Chain 3, 802.11ac)

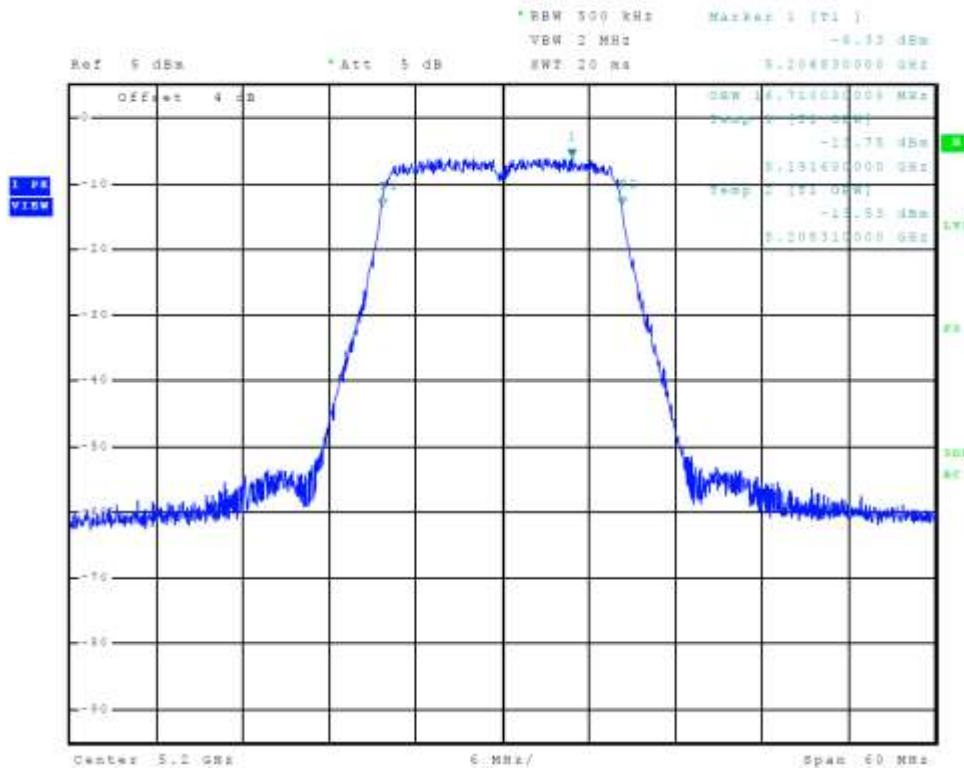


Figure 41 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11a, Chain 0, 99% OBW)

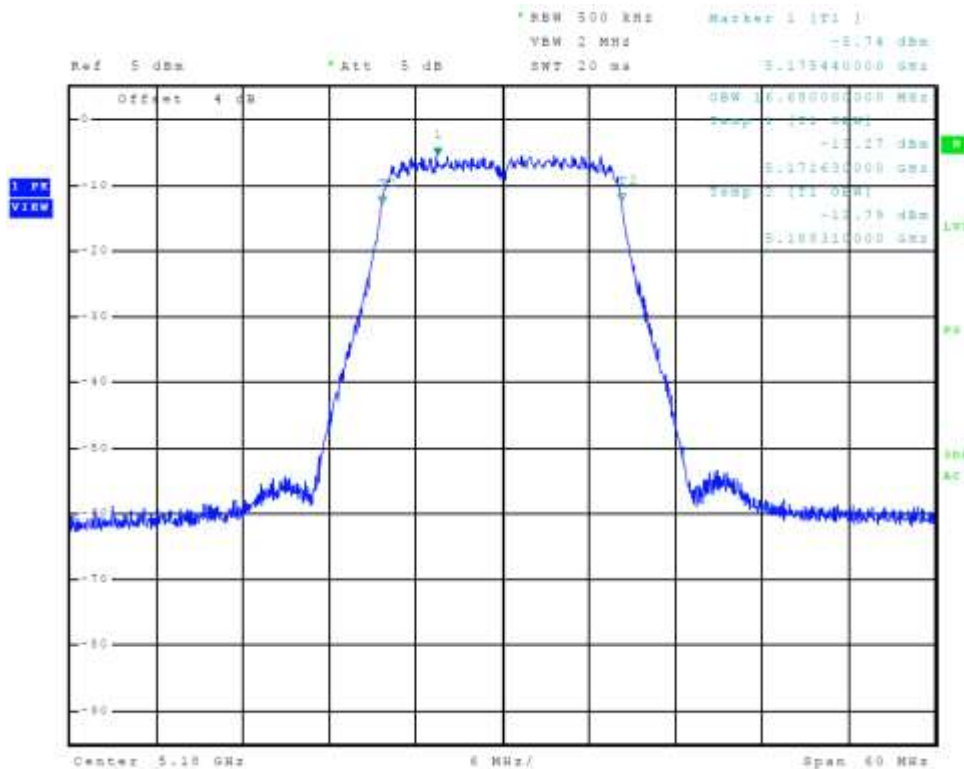


Figure 42 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11a, Chain 1, 99% OBW)

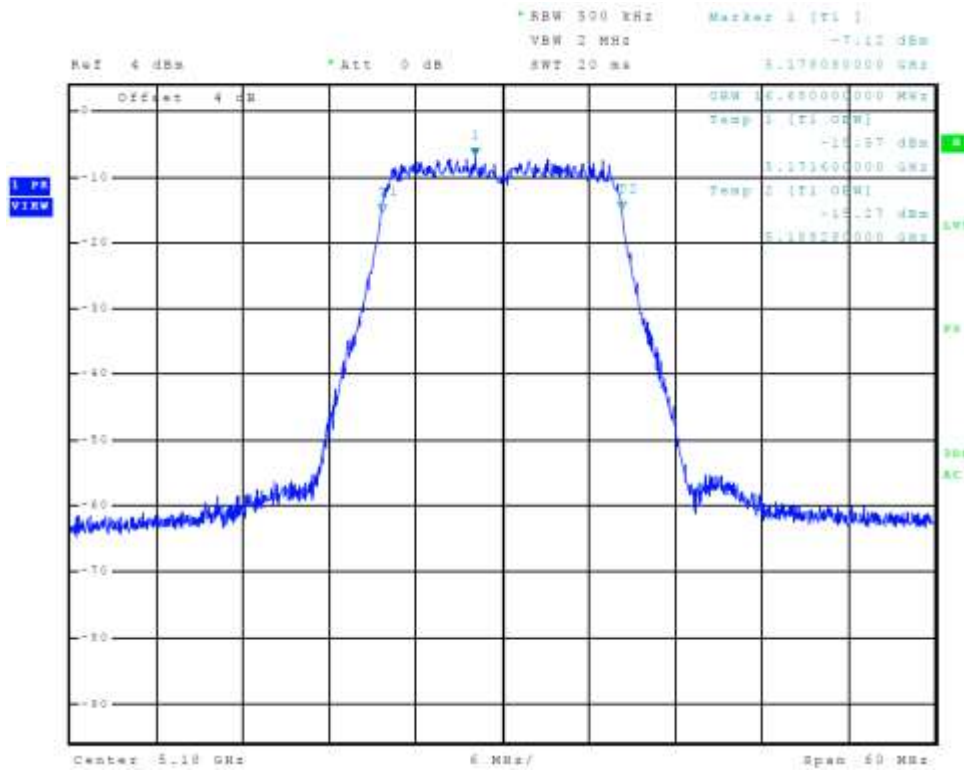


Figure 43 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11a, Chain 2, 99% OBW)

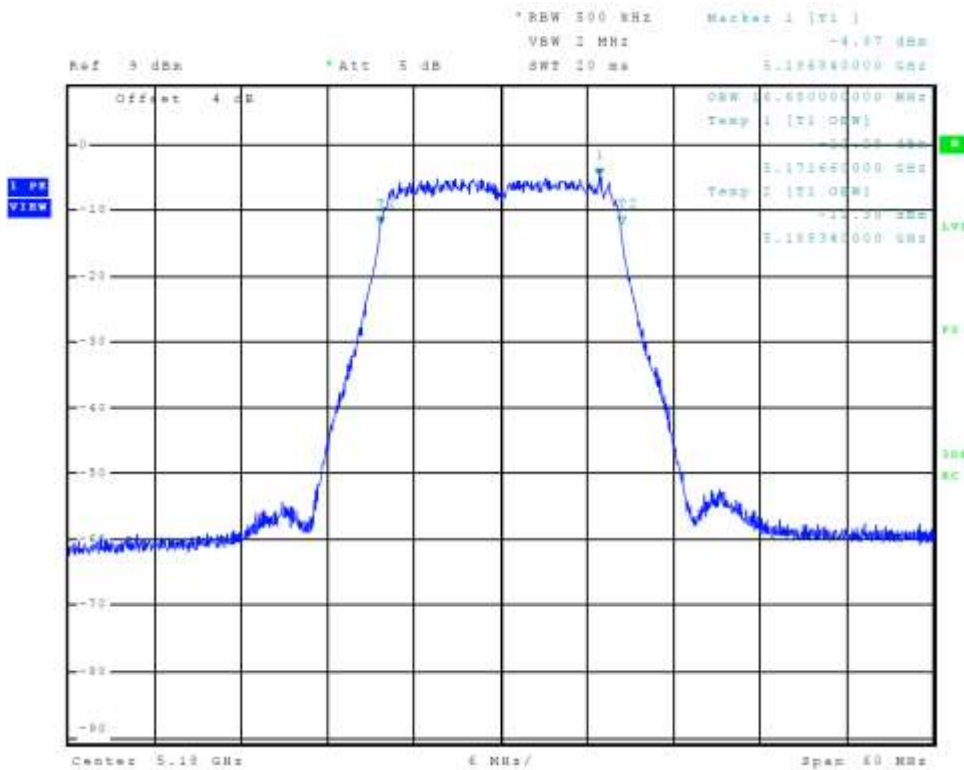


Figure 44 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11a, Chain 3, 99% OBW)

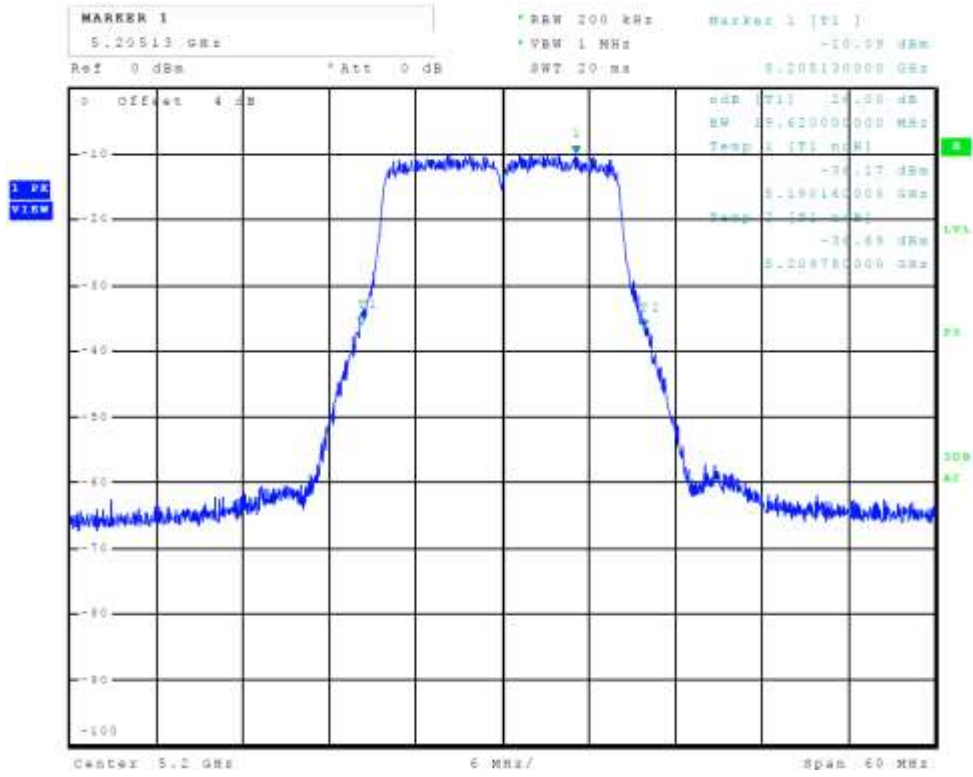


Figure 45 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11a, Chain 0, 26 dB OBW)

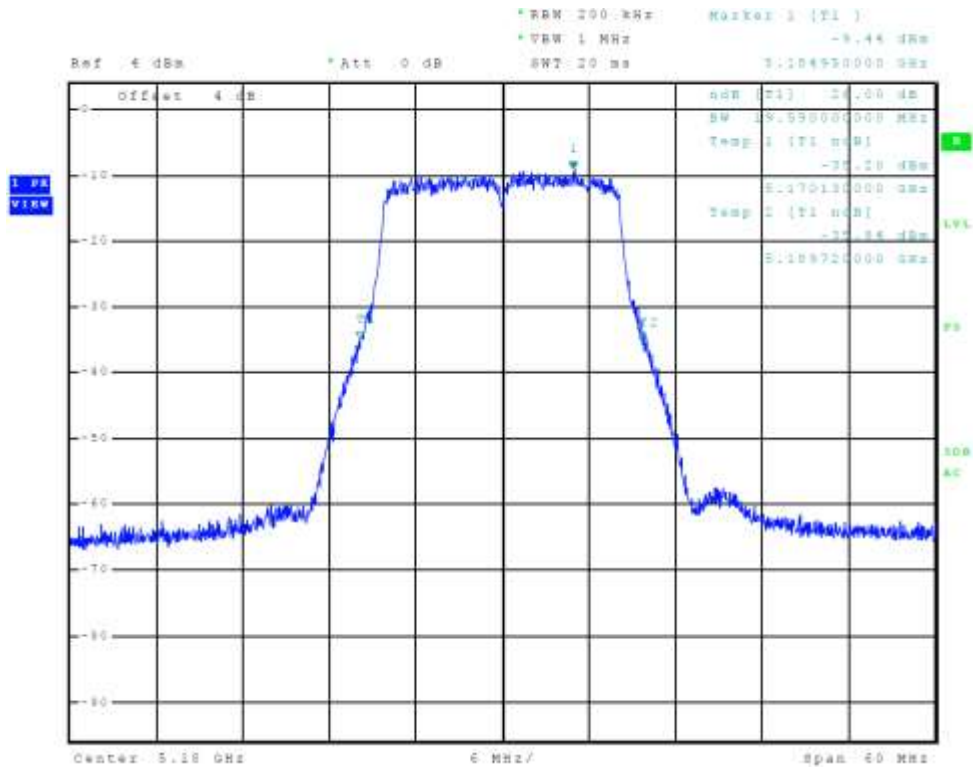


Figure 46 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11a, Chain 1, 26 dB OBW)

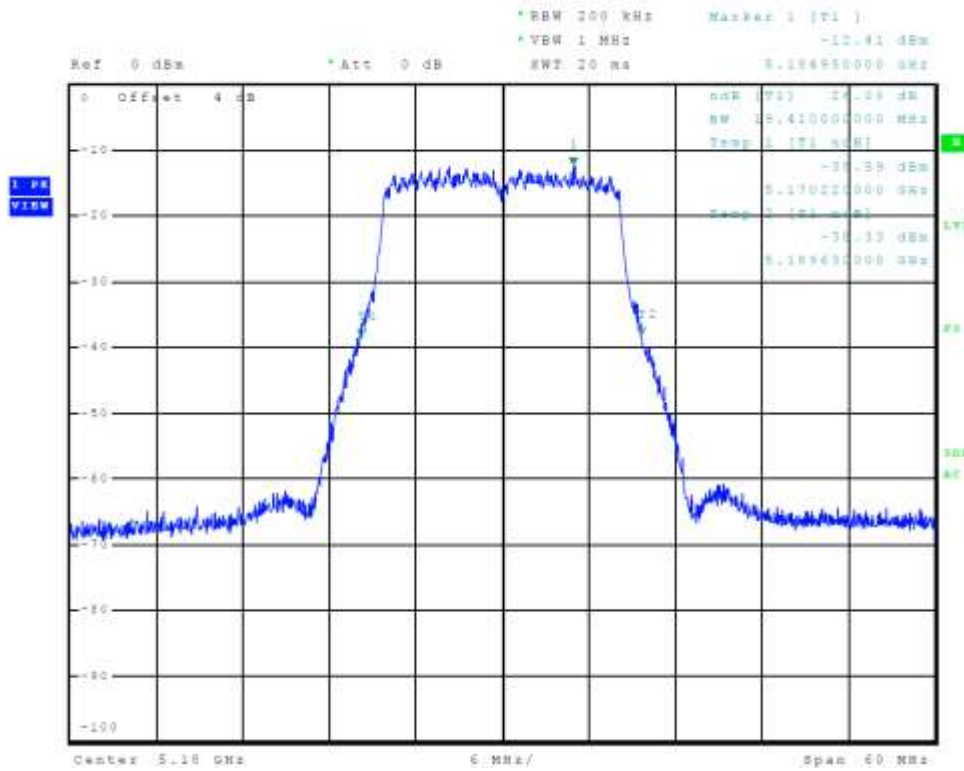


Figure 47 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11a, Chain 2, 26 dB OBW)

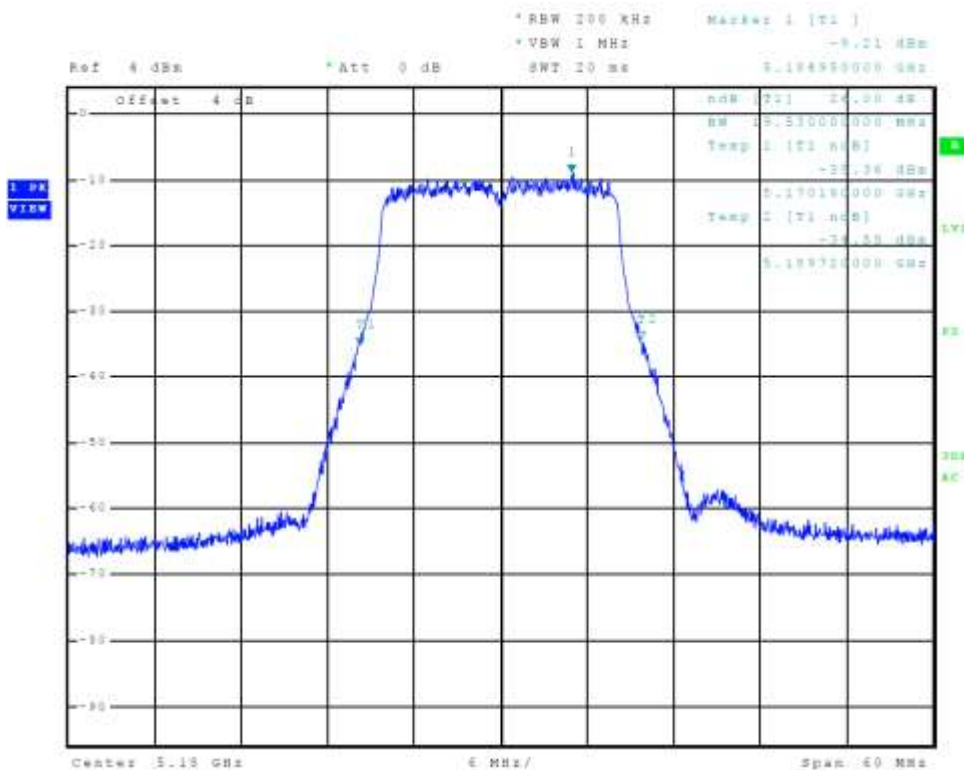


Figure 48 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11a, Chain 3, 26 dB OBW)

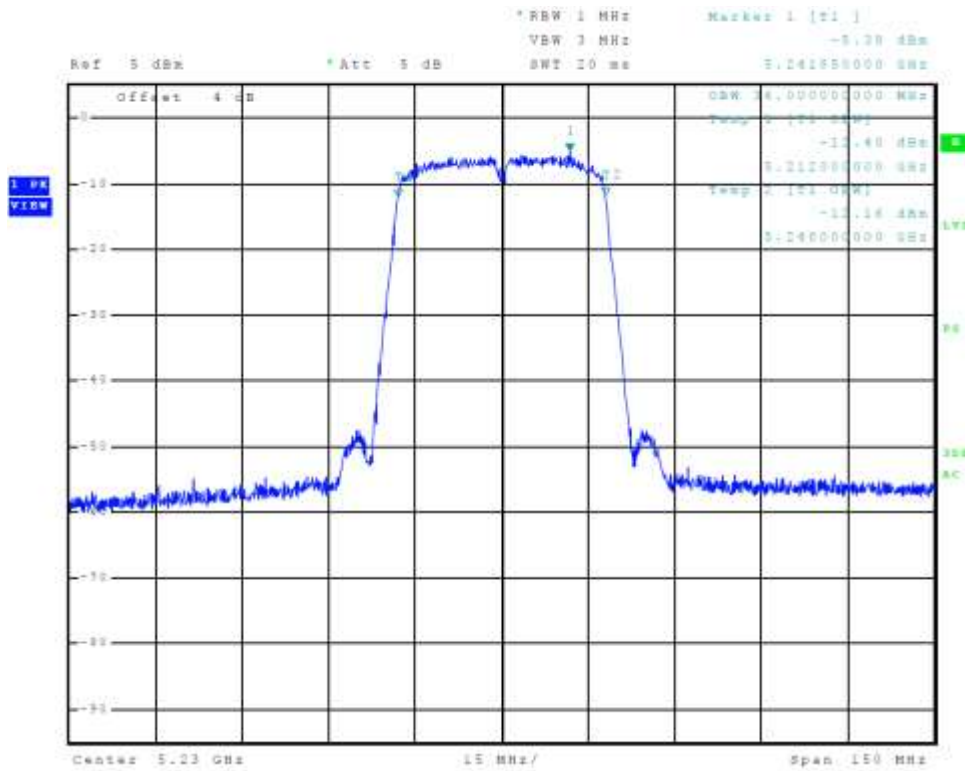


Figure 49 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11n40, Chain 0, 99% OBW)

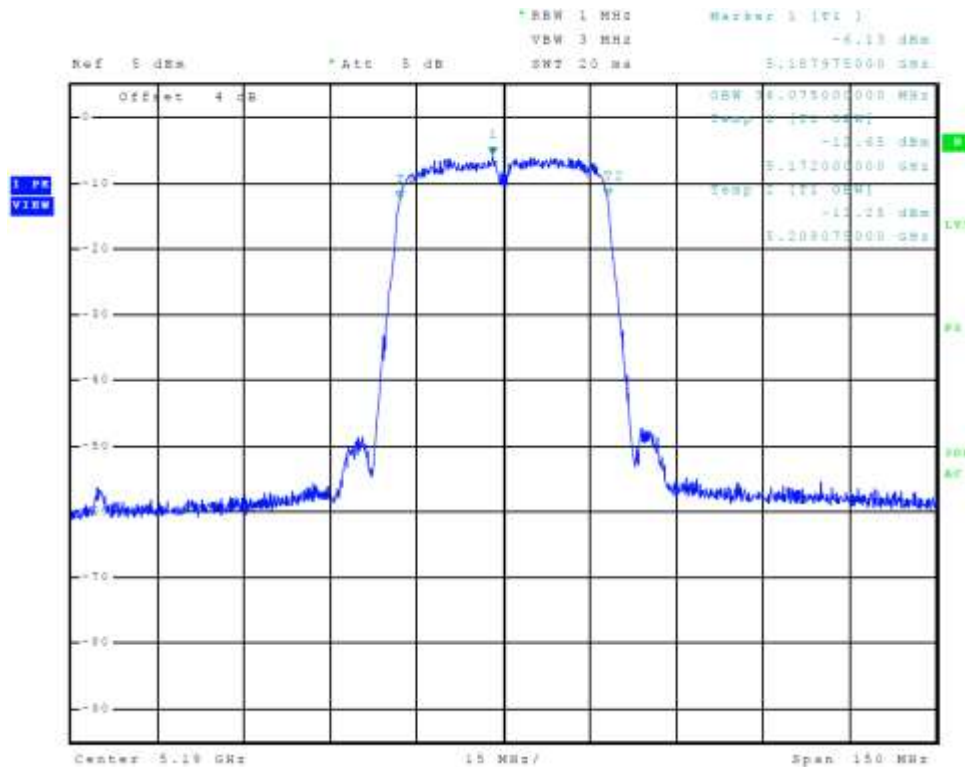


Figure 50 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11n40, Chain 1, 99% OBW)

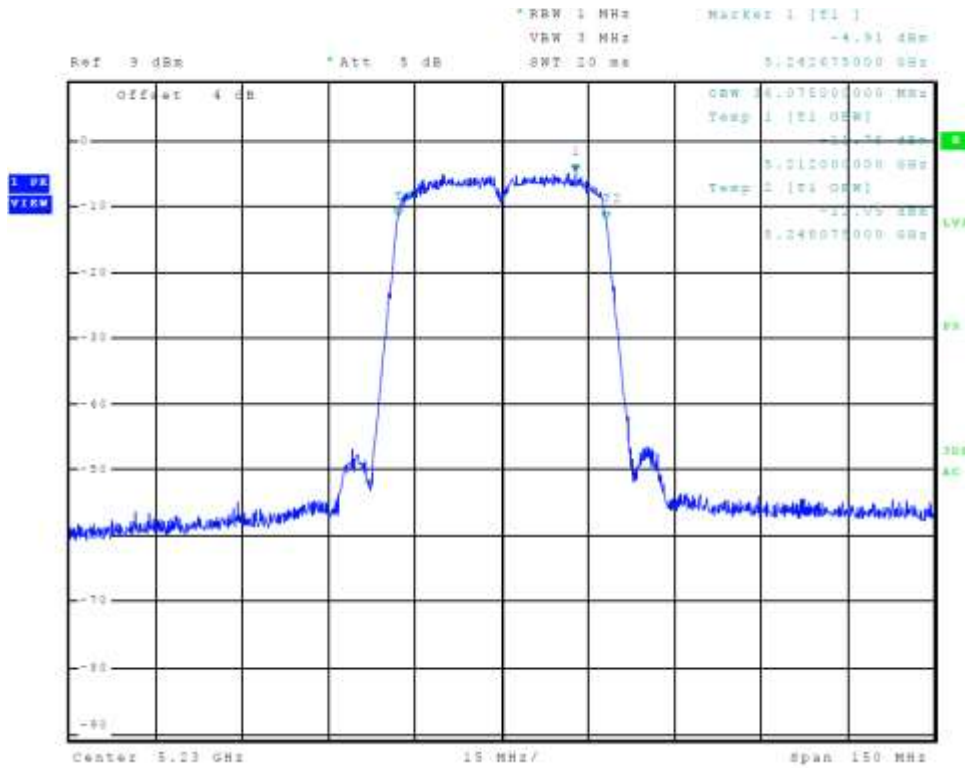


Figure 51 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11n40, Chain 2, 99% OBW)

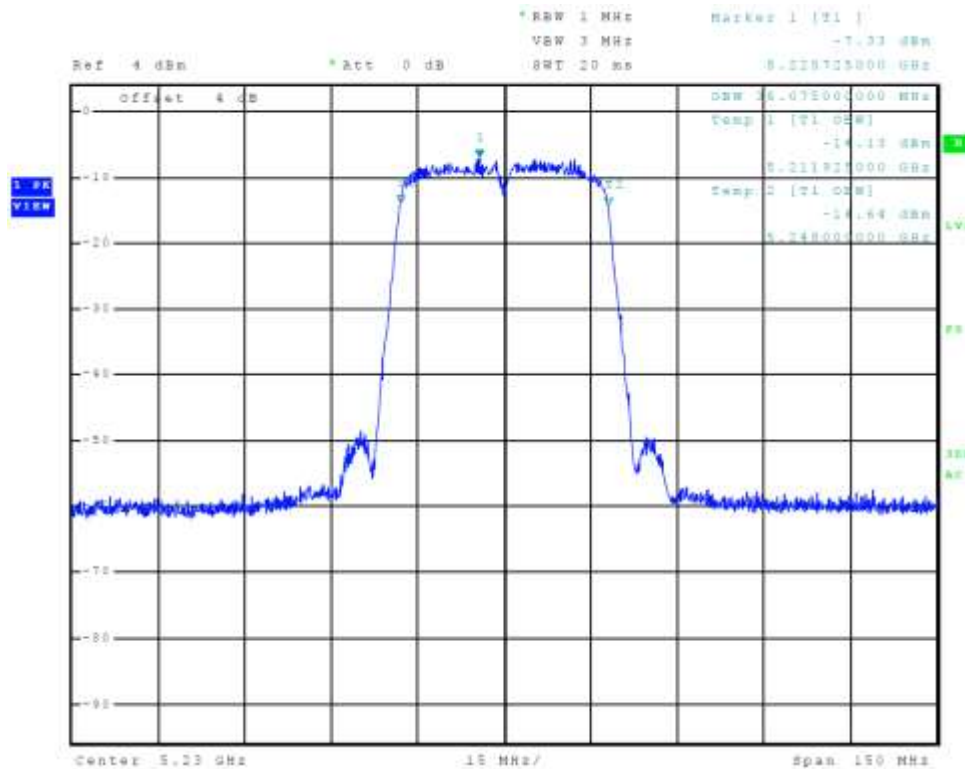


Figure 52 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11n40, Chain 3, 99% OBW)

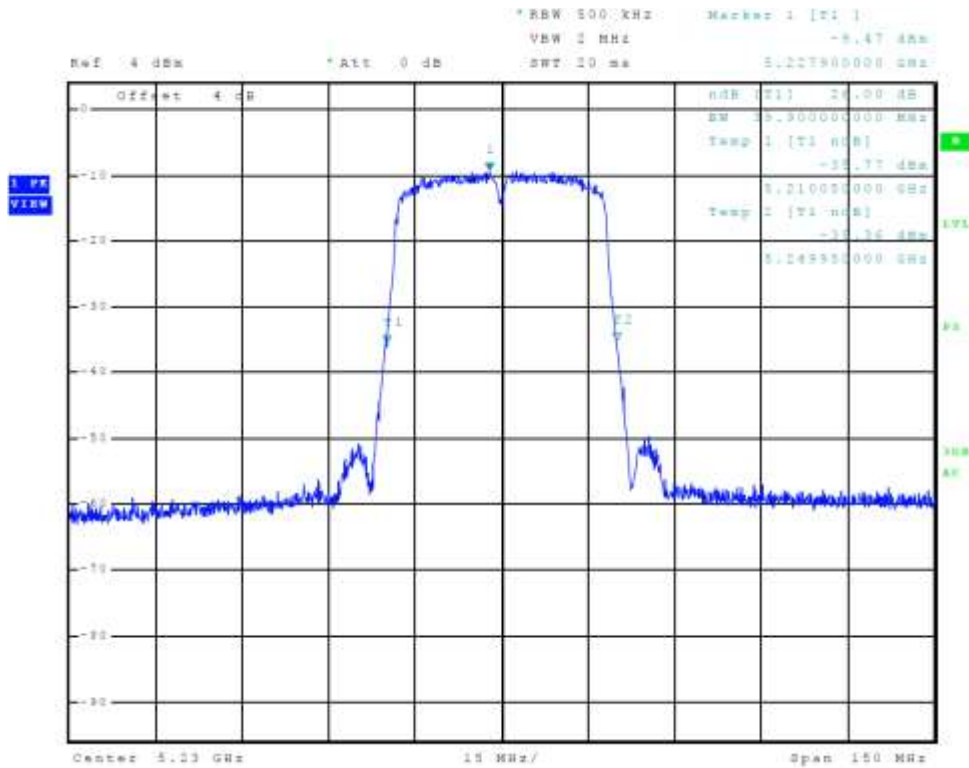


Figure 53 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11n40, Chain 0, 26 dB OBW)

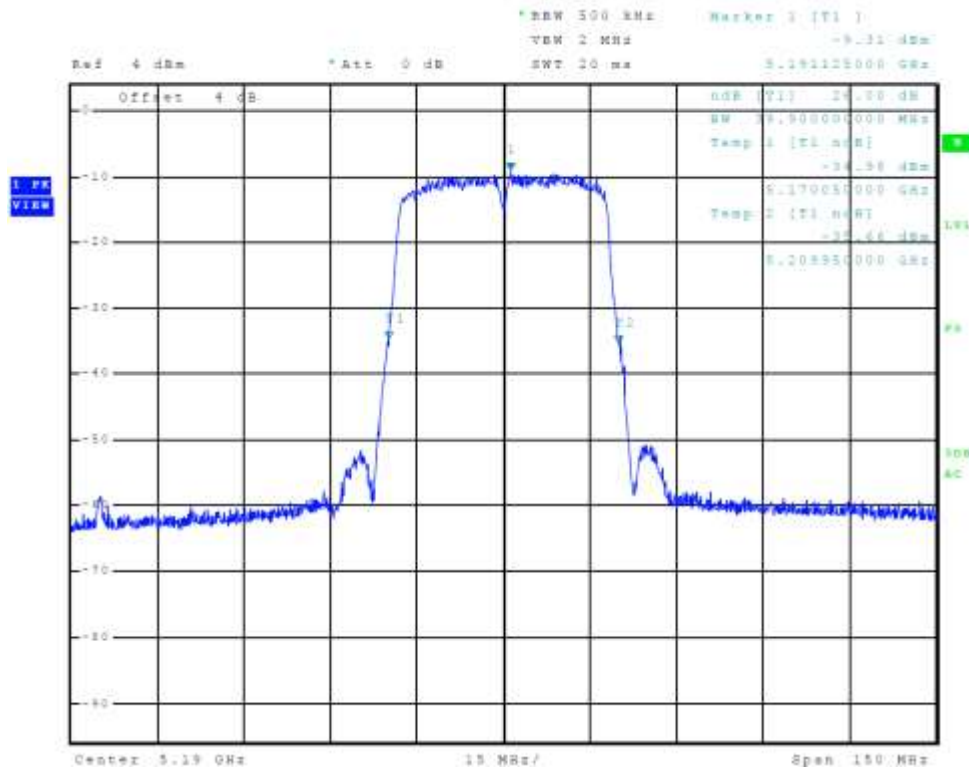


Figure 54 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11n40, Chain 1, 26 dB OBW)

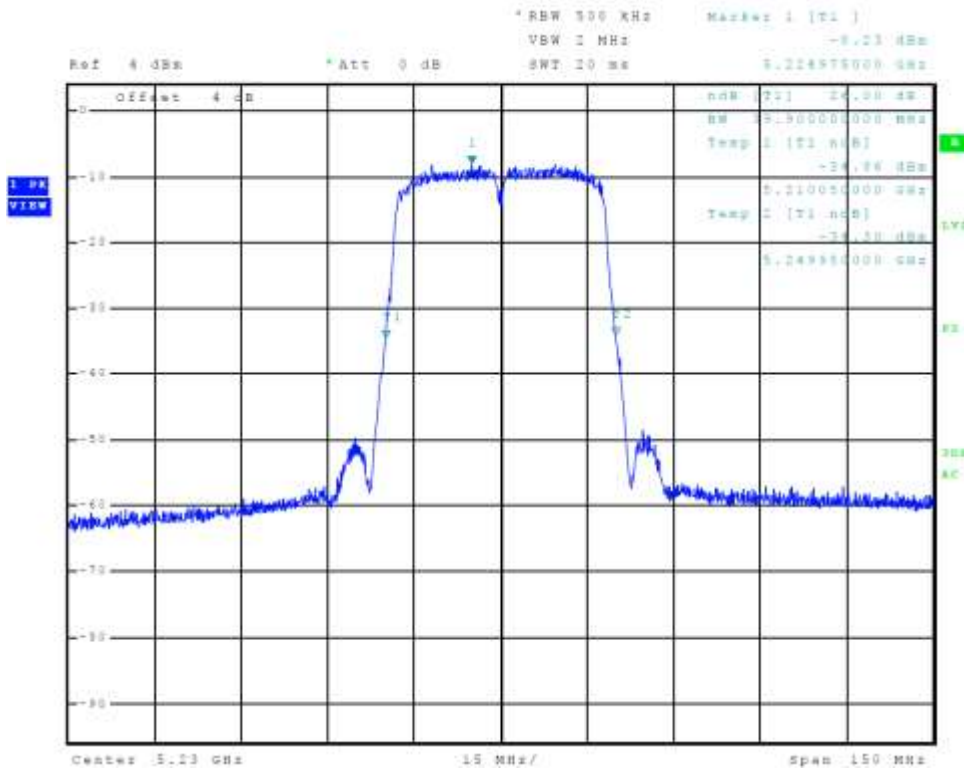


Figure 55 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11n40, Chain 2, 26 dB OBW)

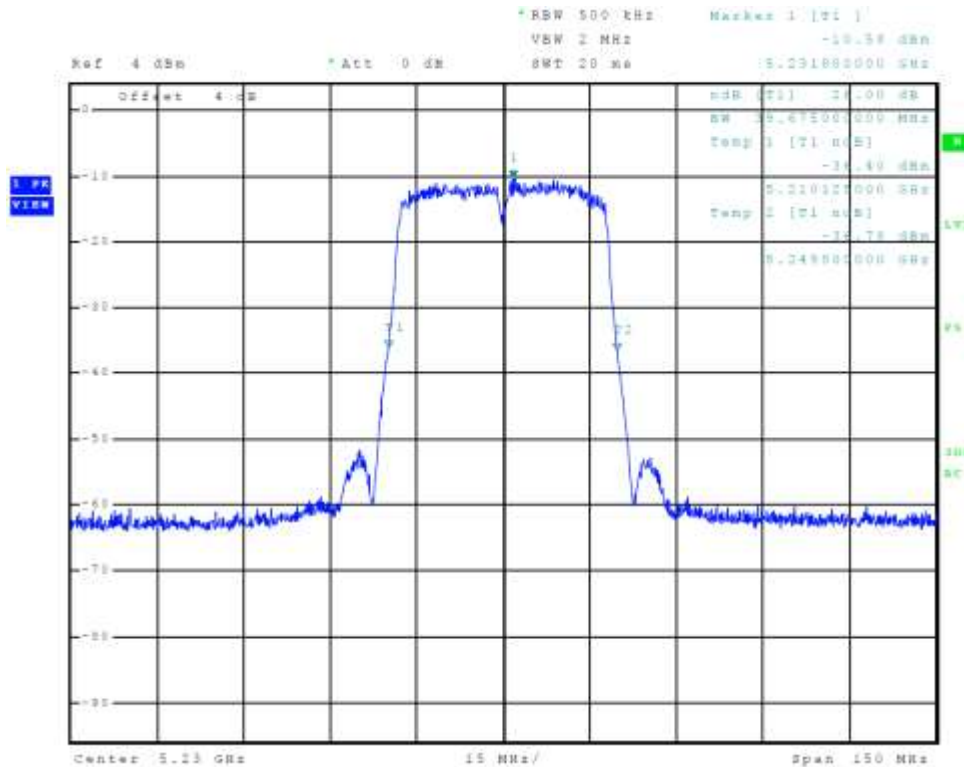


Figure 56 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11n40, Chain 3, 26 dB OBW)

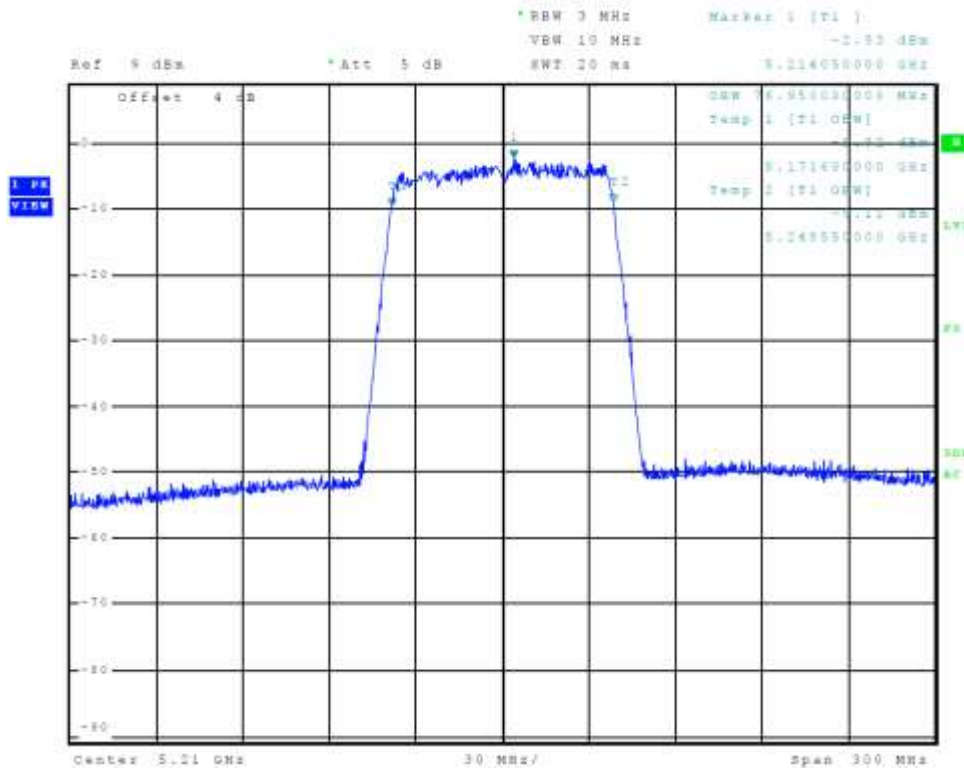


Figure 57 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11ac, Chain 0, 99% OBW)

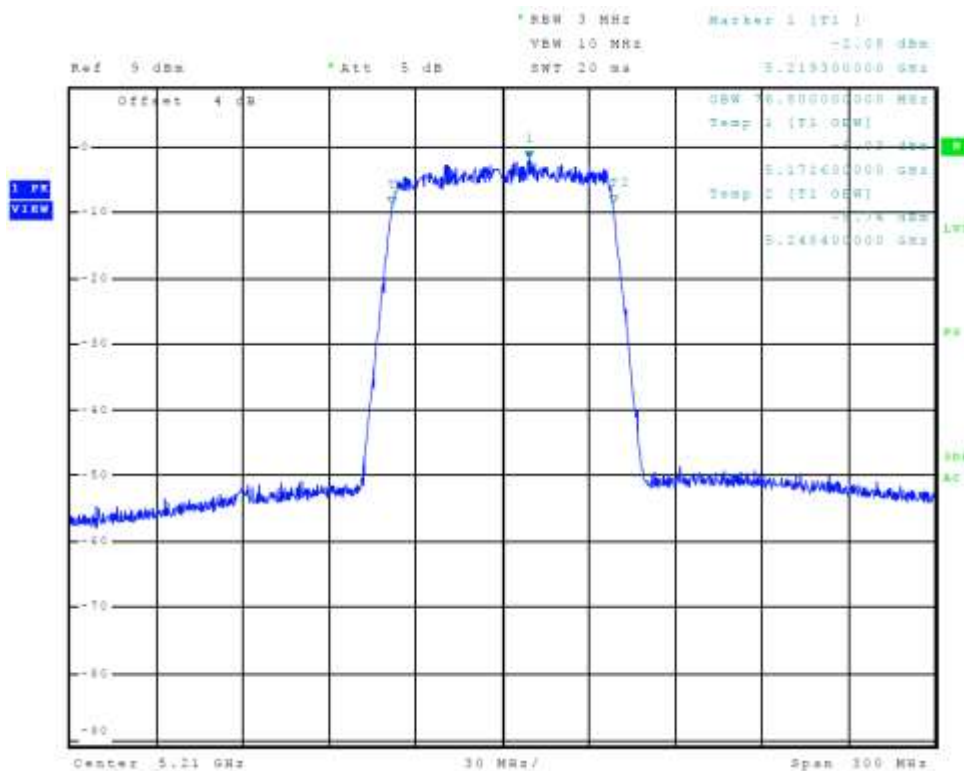


Figure 58 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11ac, Chain 1, 99% OBW)

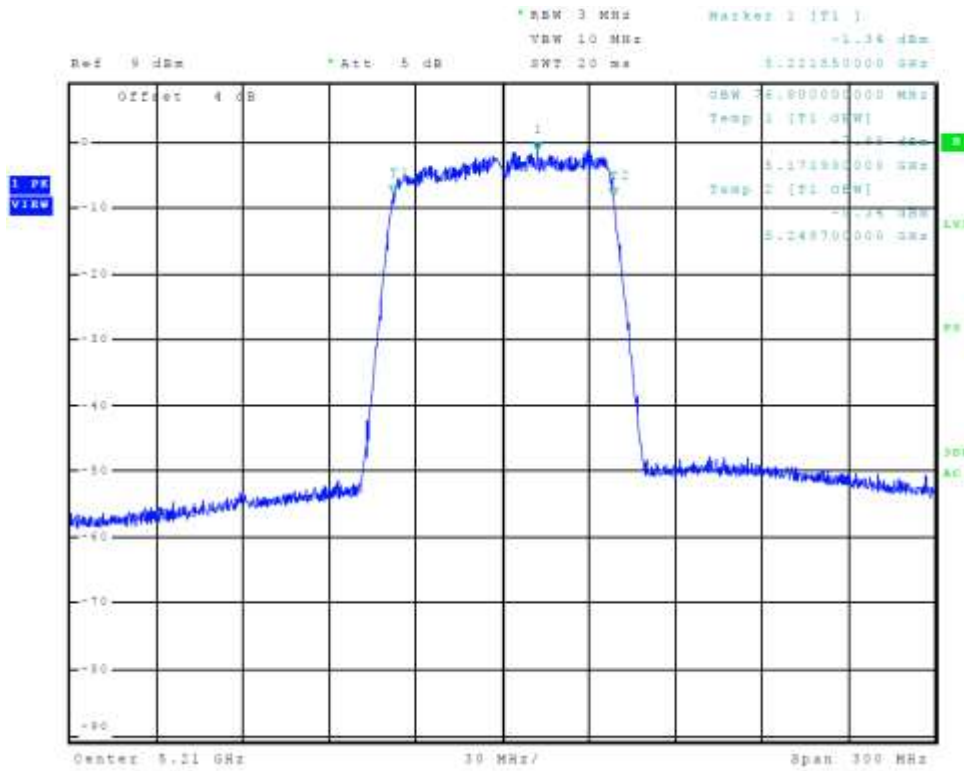


Figure 59 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11ac, Chain 2, 99% OBW)

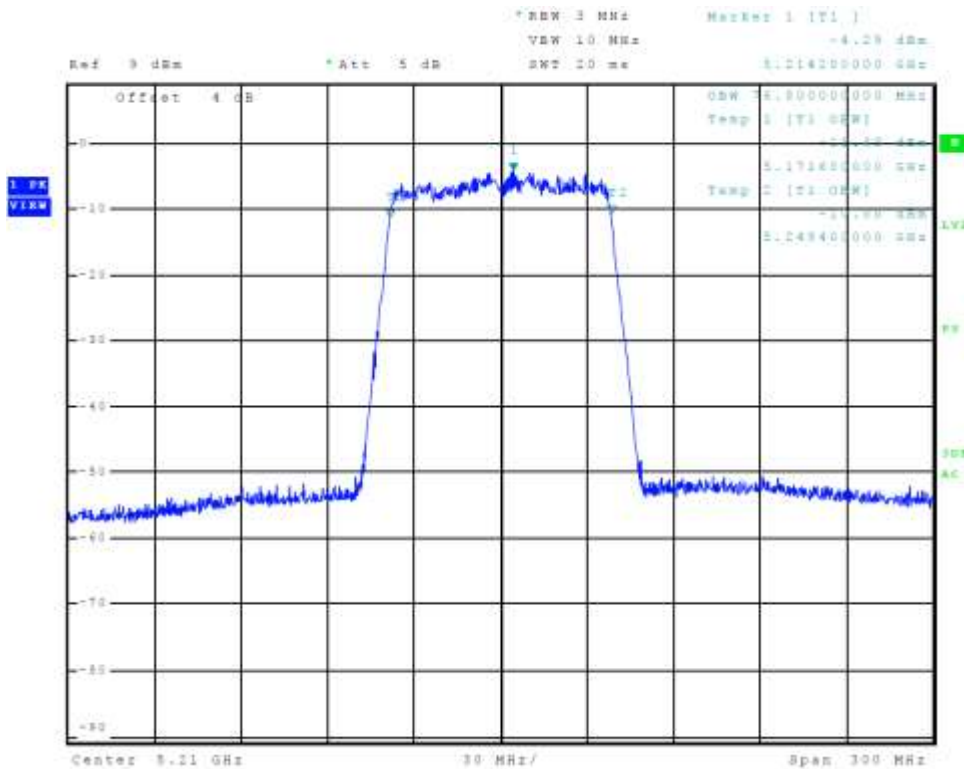


Figure 60 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11ac, Chain 3, 99% OBW)

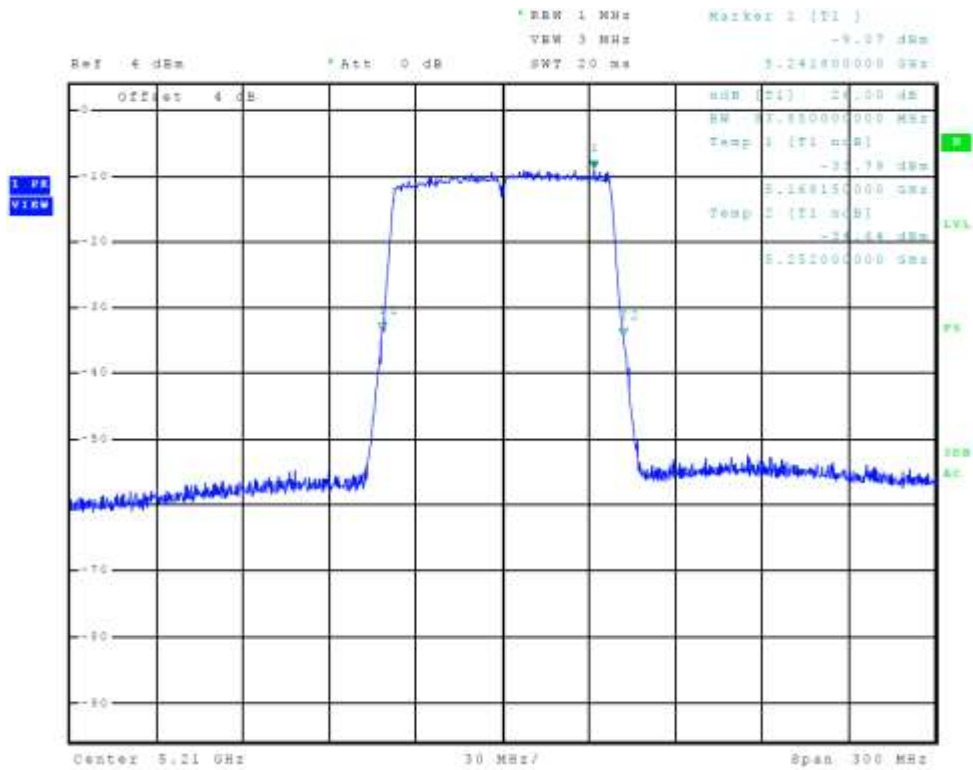


Figure 61 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11ac, Chain 0, 26 dB OBW)

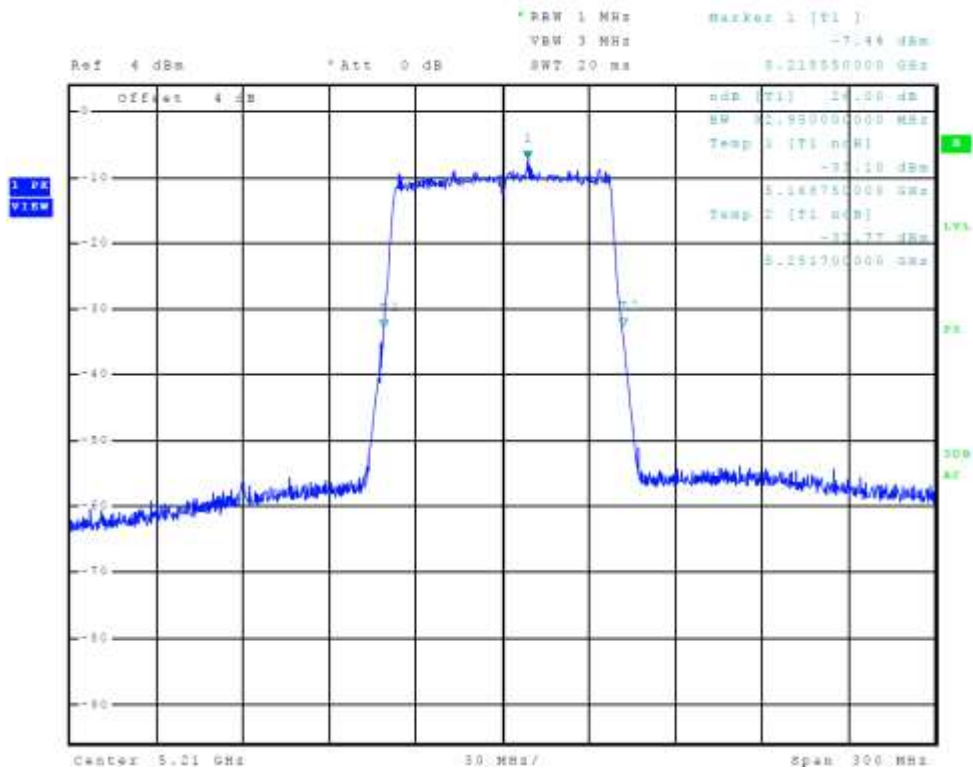


Figure 62 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11ac, Chain 1, 26 dB OBW)

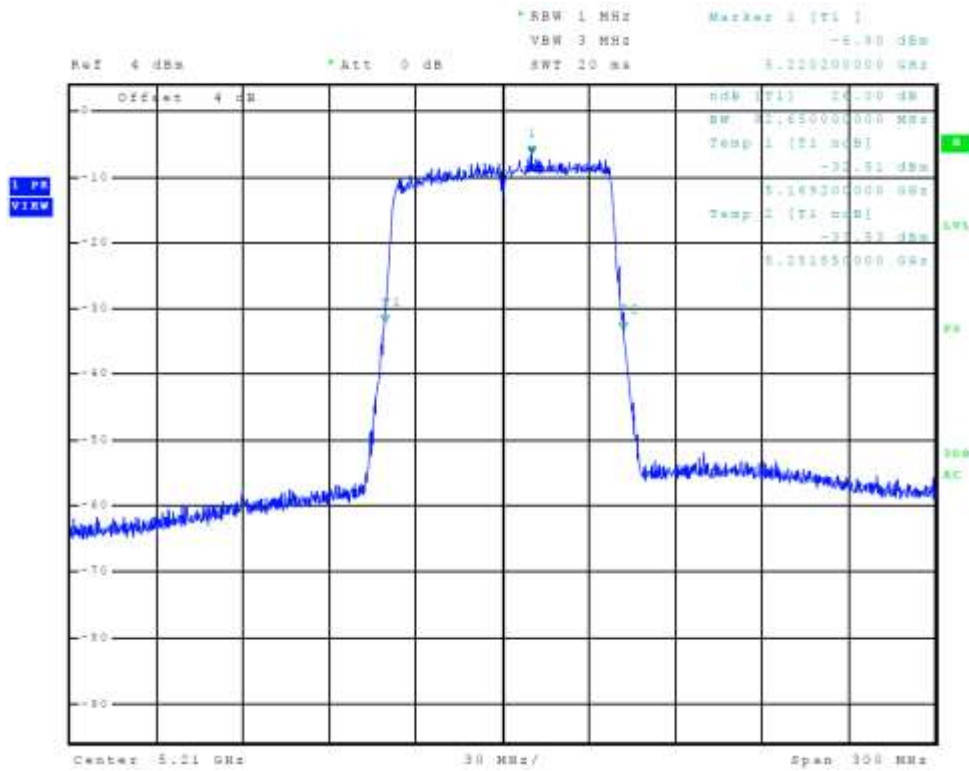


Figure 63 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11ac, Chain 2, 26 dB OBW)

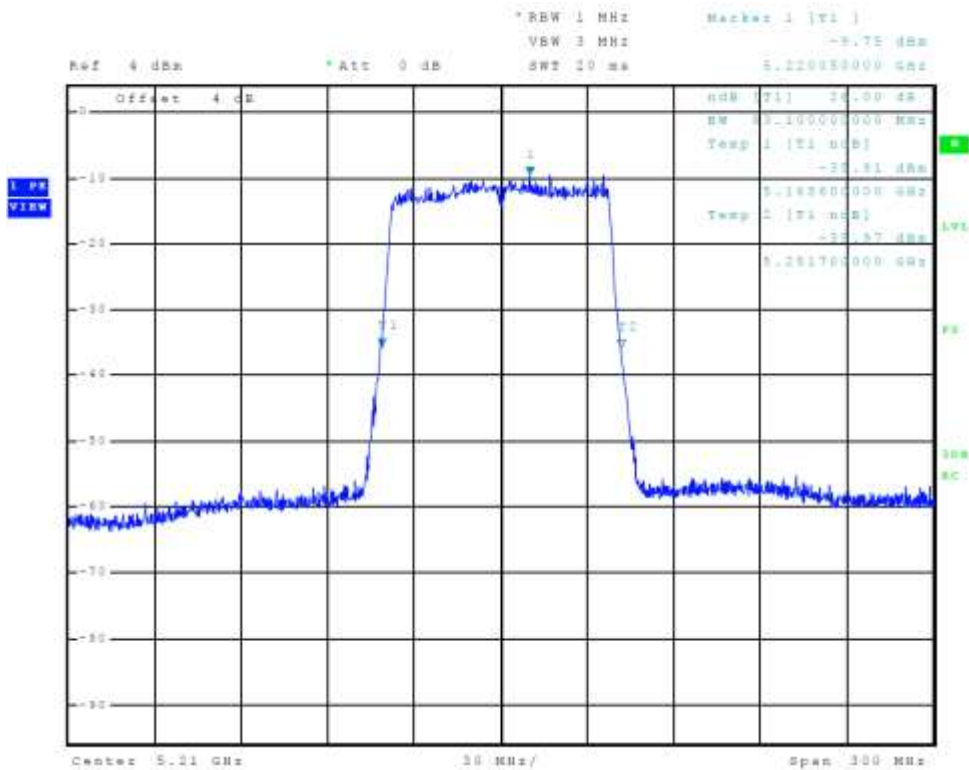


Figure 64 Plot of Transmitter Emissions (5150-5250 MHz Band, 802.11ac, Chain 3, 26 dB OBW)

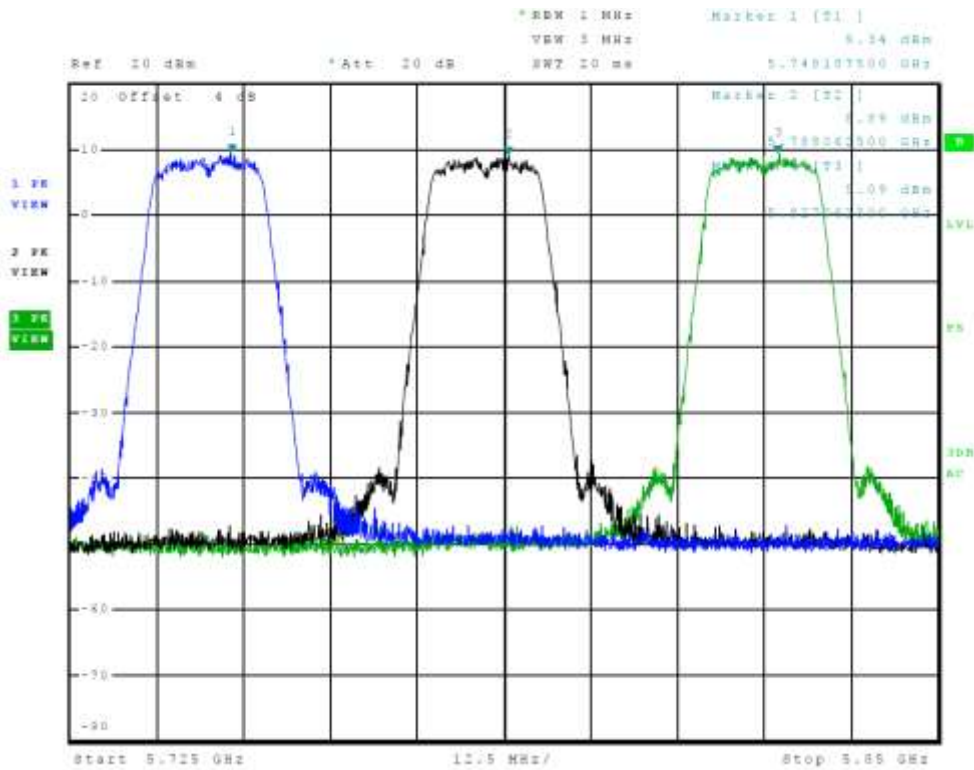


Figure 65 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 0, 802.11a)

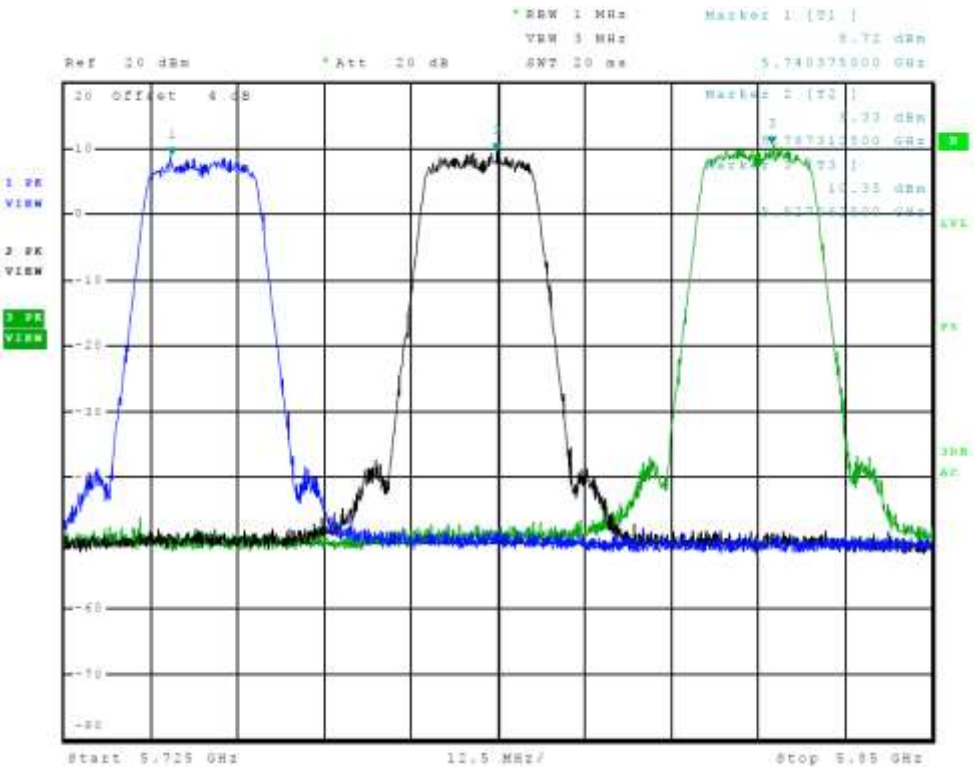


Figure 66 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 1, 802.11a)

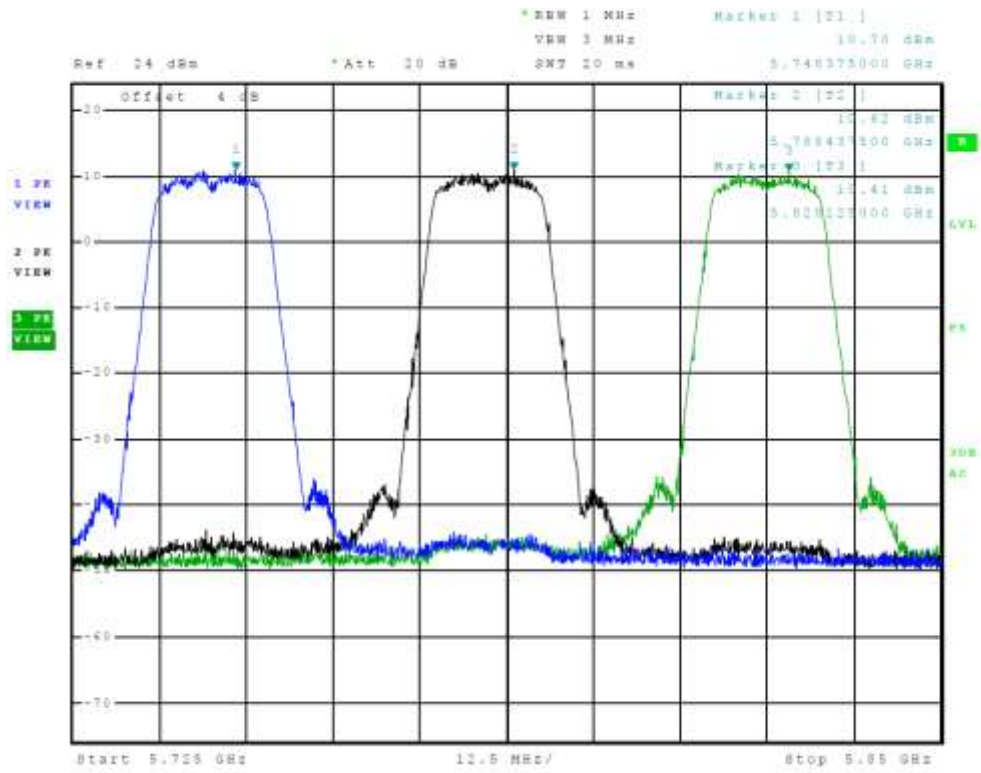


Figure 67 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 2, 802.11a)

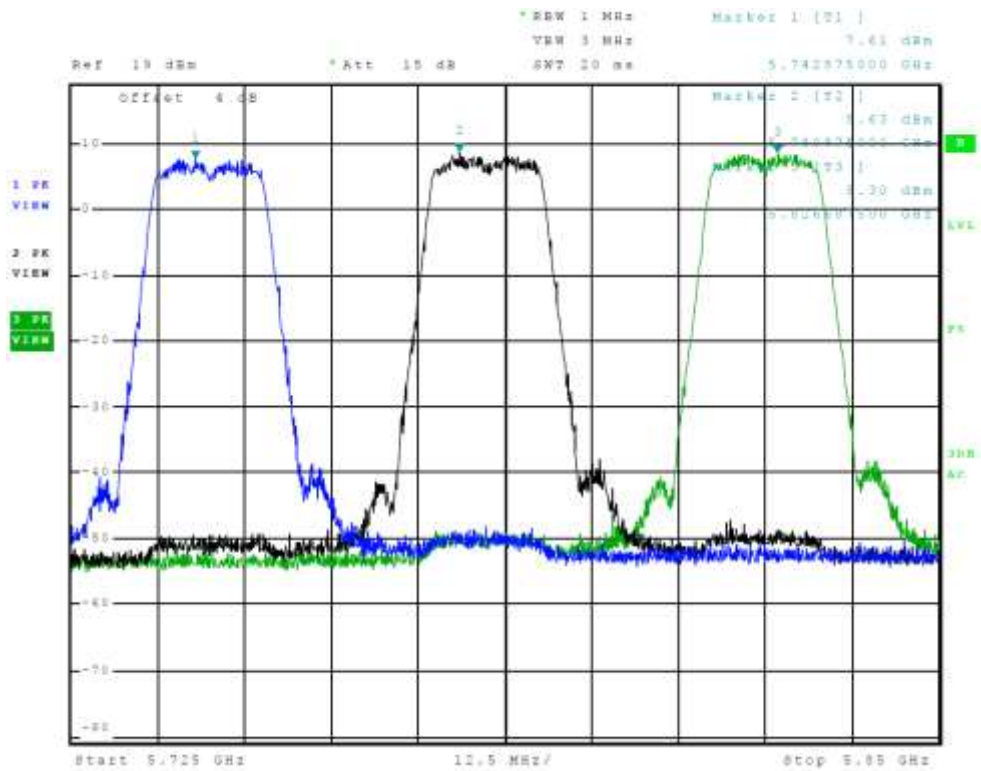


Figure 68 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 3, 802.11a)

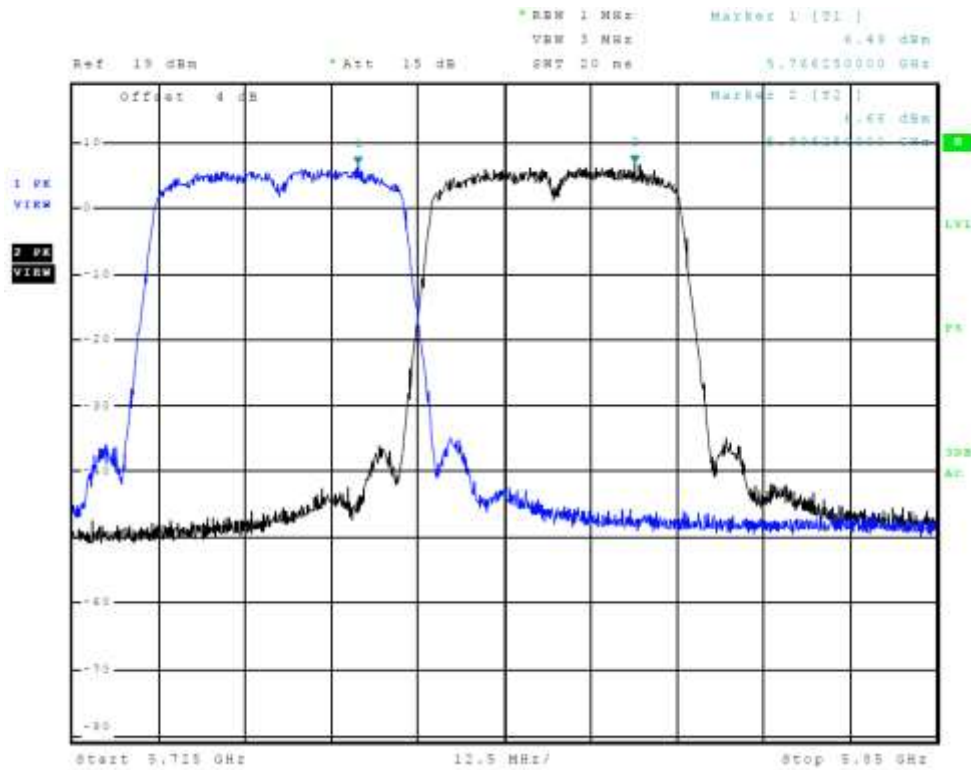


Figure 69 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 0, 802.11n40)

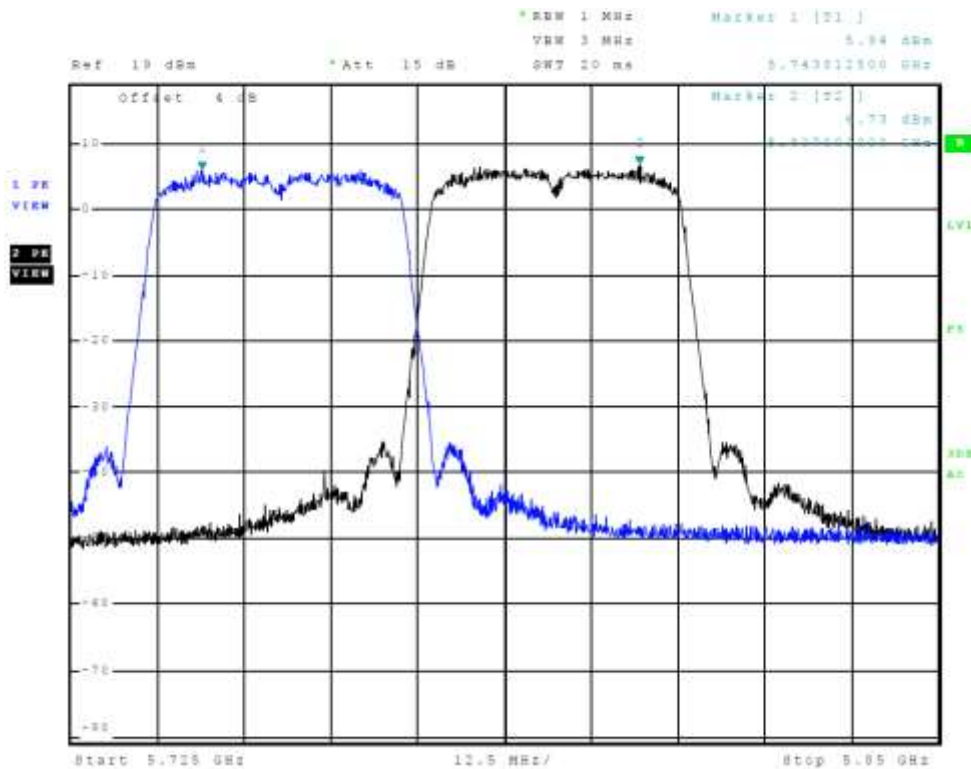


Figure 70 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 1, 802.11n40)

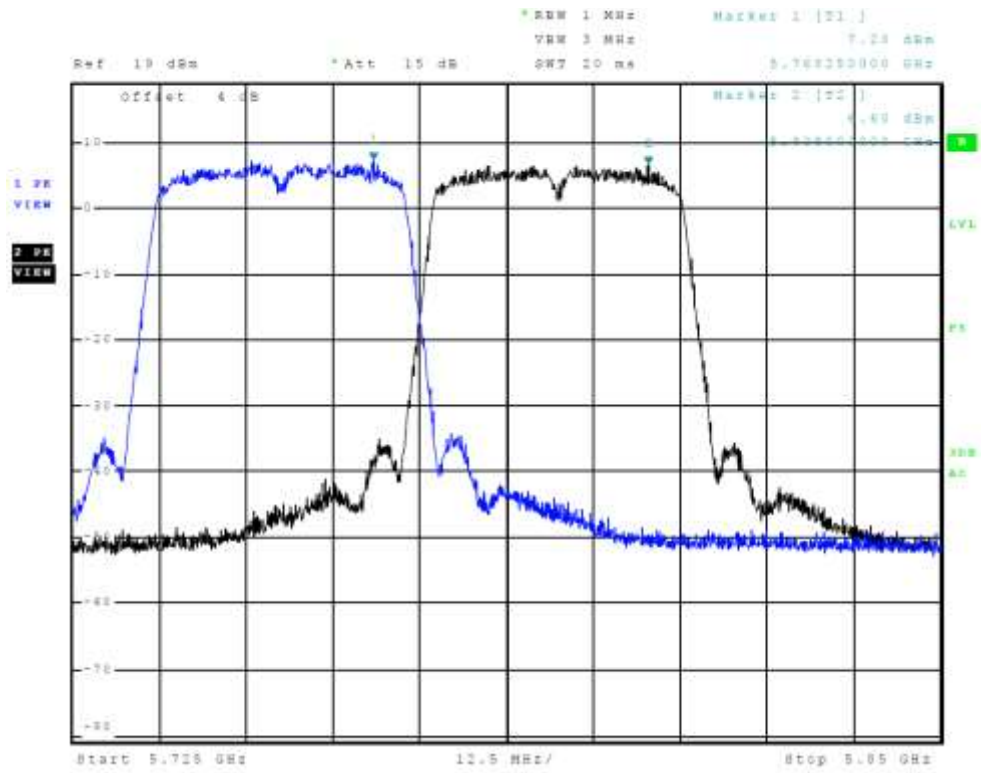


Figure 71 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 2, 802.11n40)

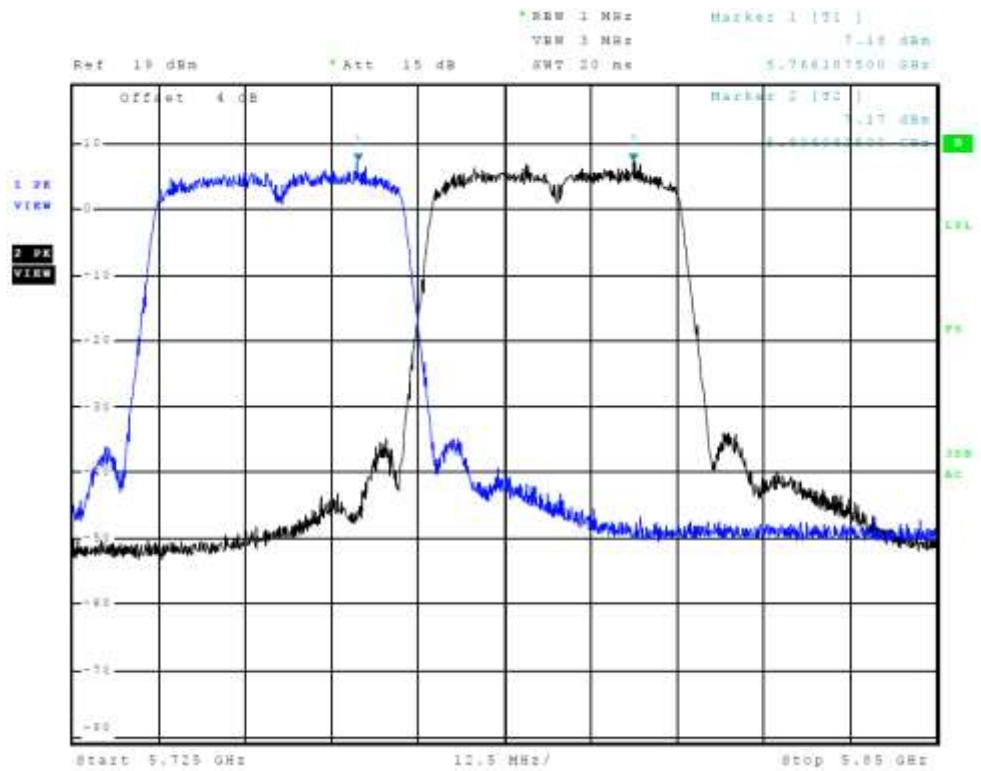


Figure 72 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 3, 802.11n40)

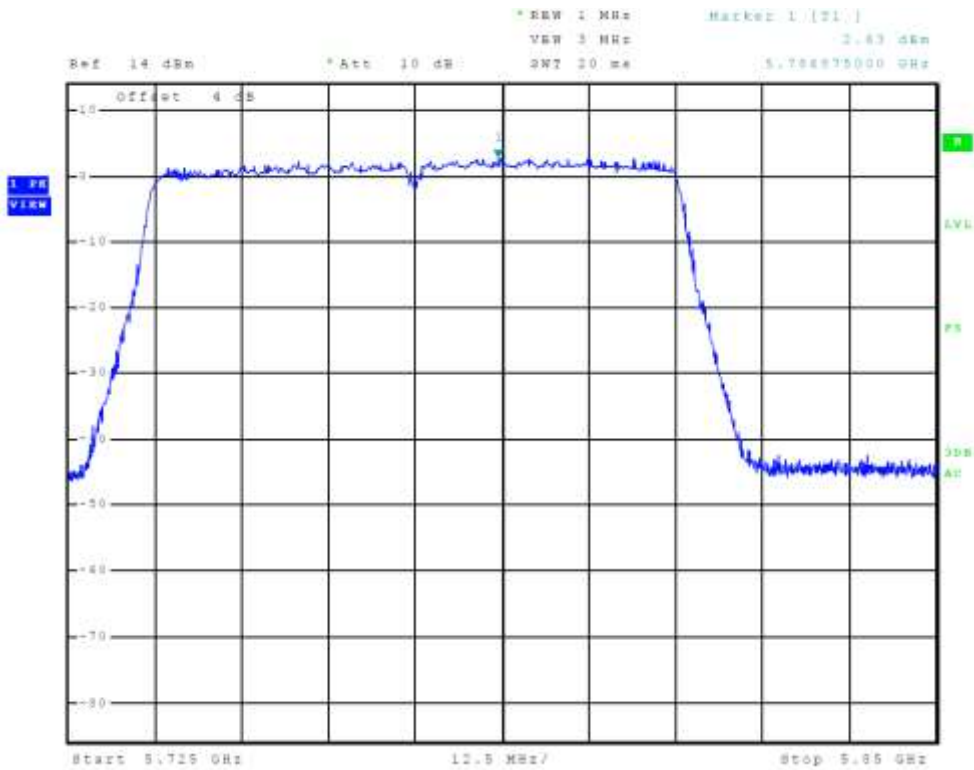


Figure 73 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 0, 802.11ac)

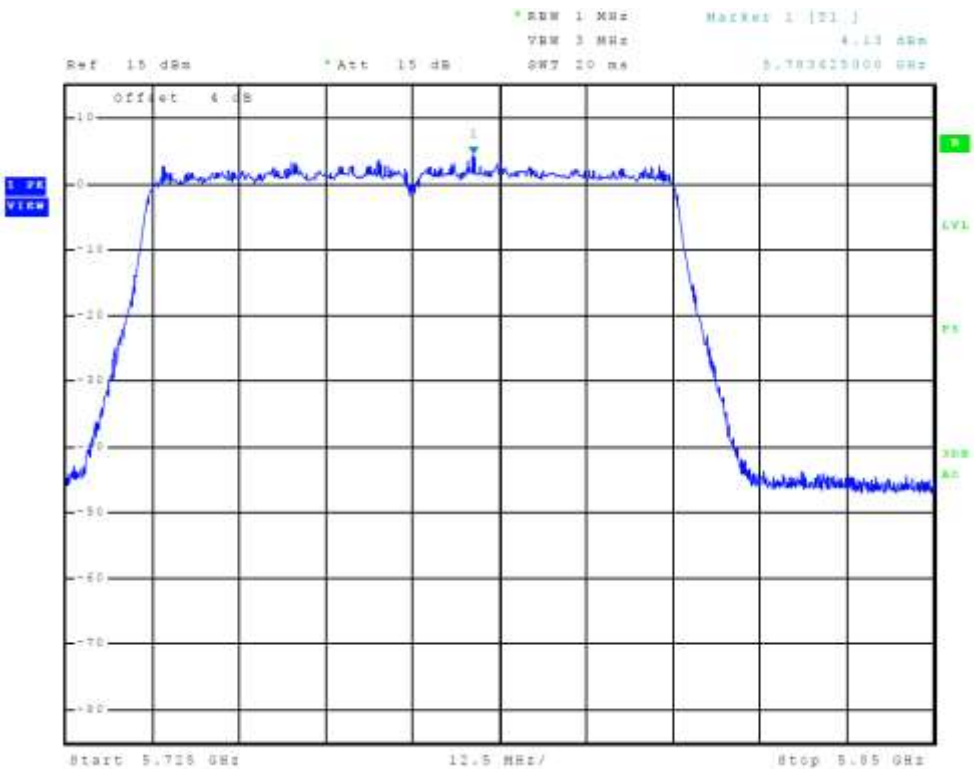


Figure 74 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 1, 802.11ac)

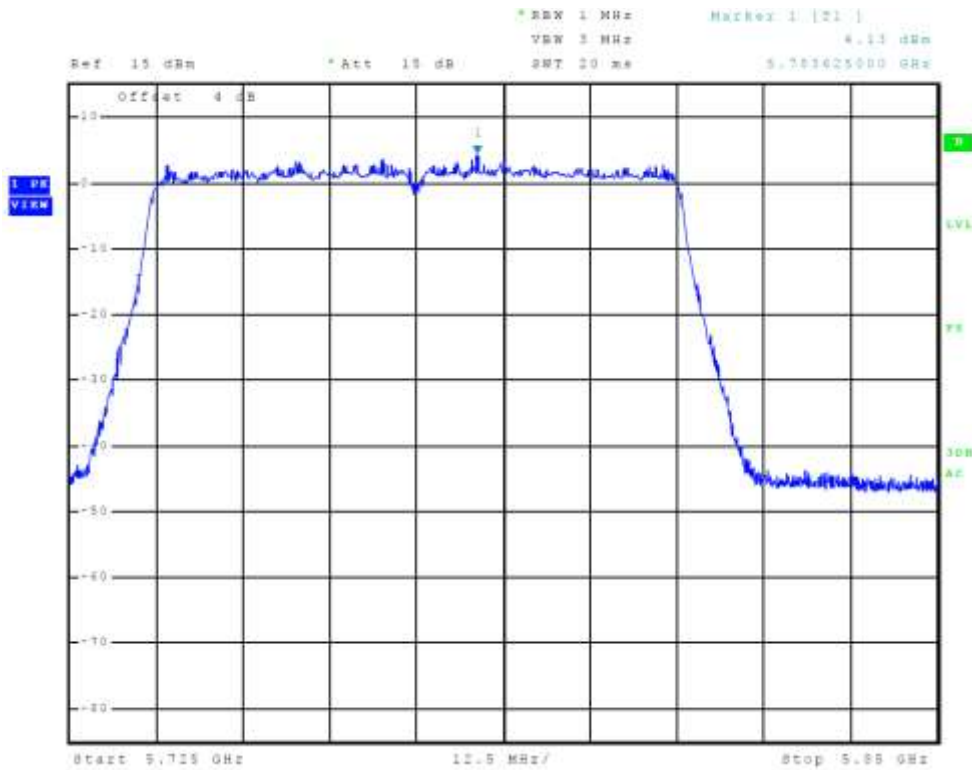


Figure 75 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 2, 802.11ac)

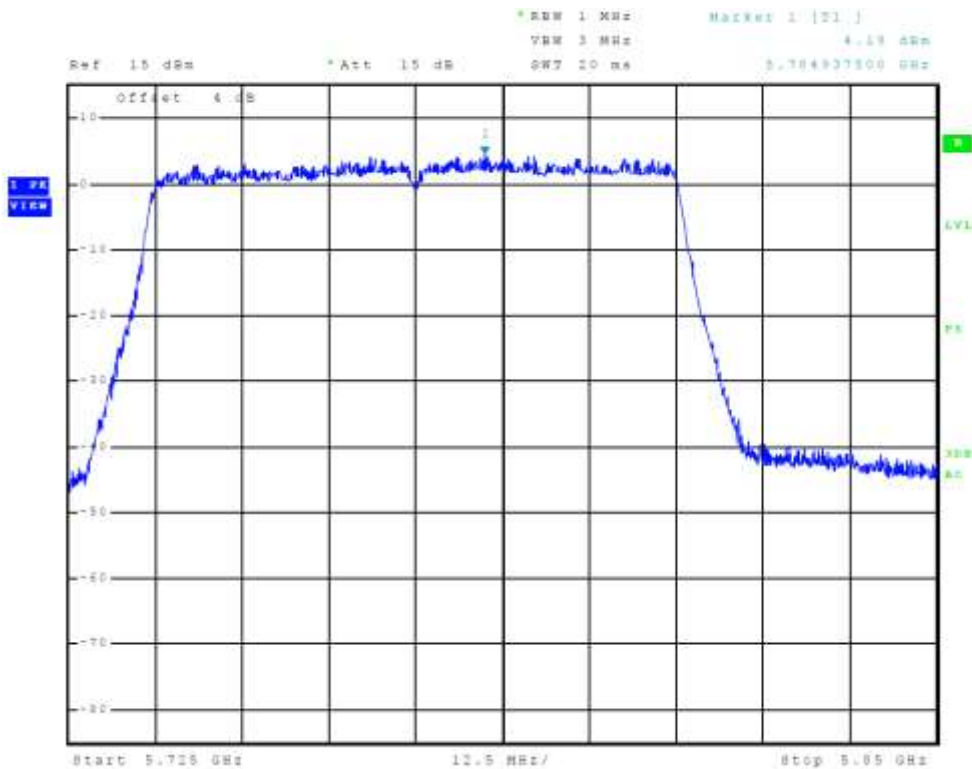


Figure 76 Plot of Transmitter Emissions (Across 5725-5850 MHz Band, Chain 3, 802.11ac)

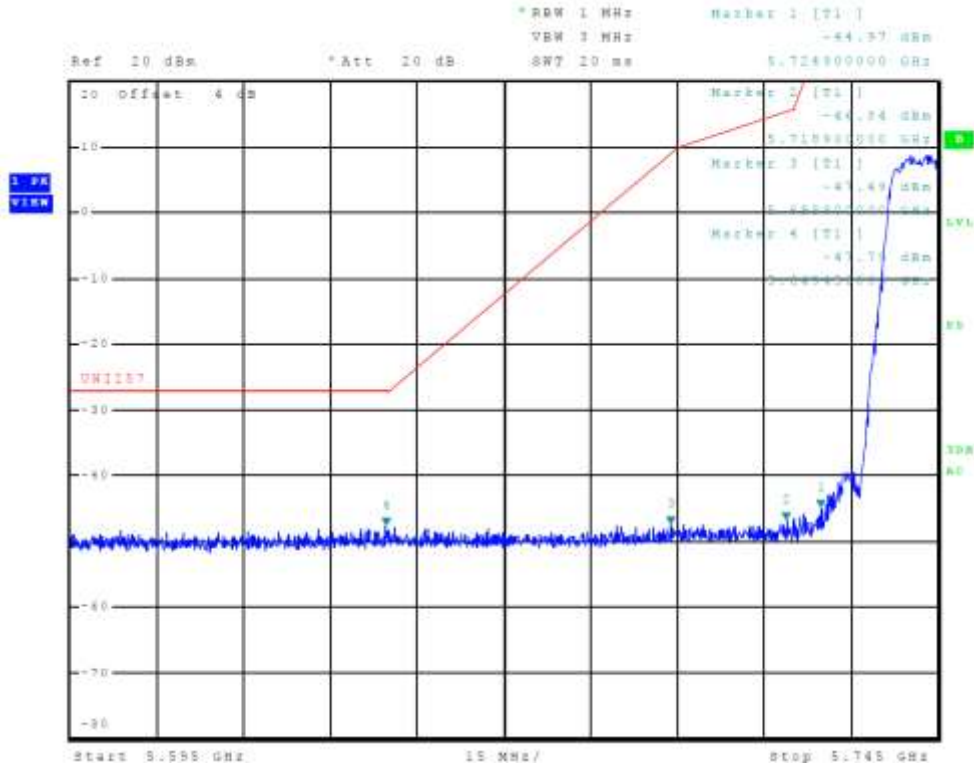


Figure 77 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 0, 802.11a)

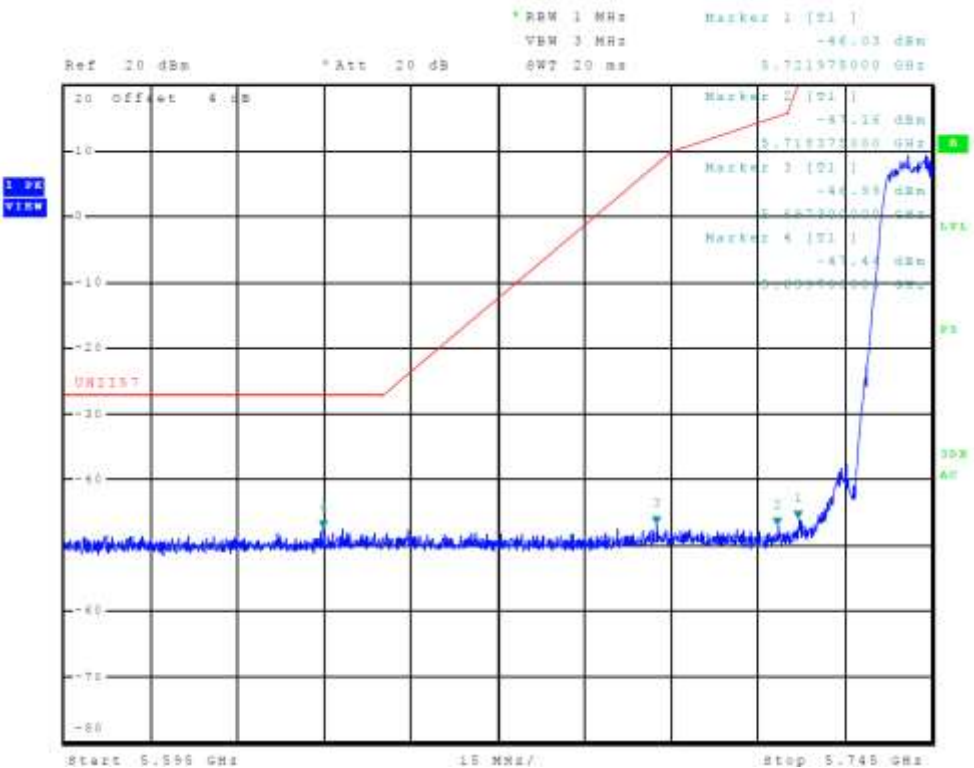


Figure 78 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 1, 802.11a)

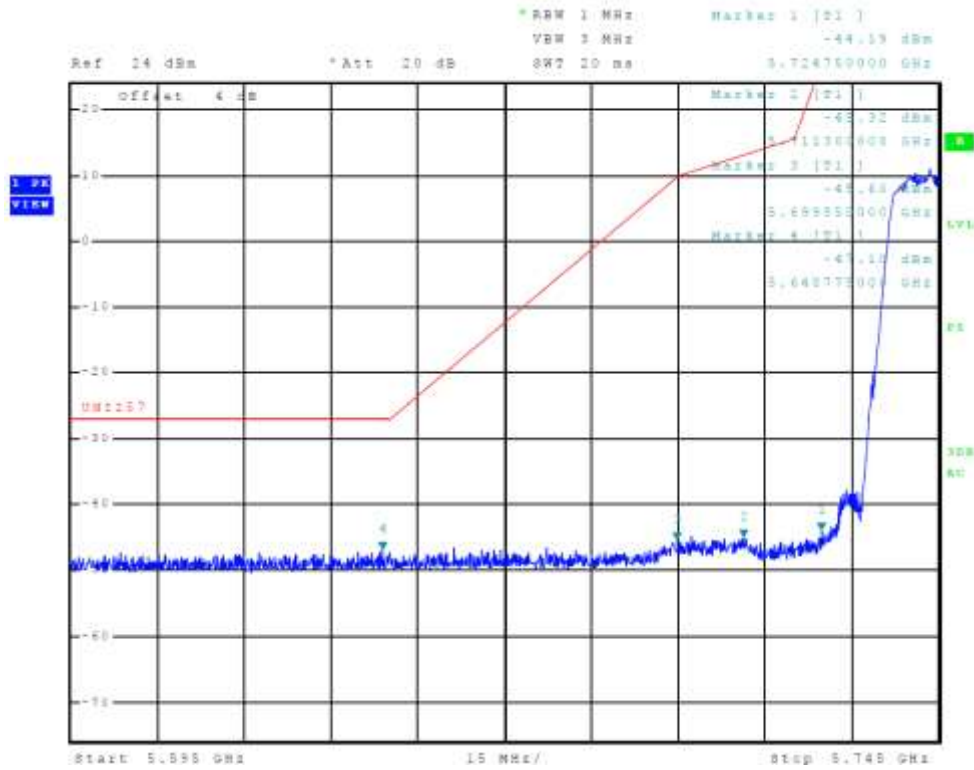


Figure 79 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 2, 802.11a)

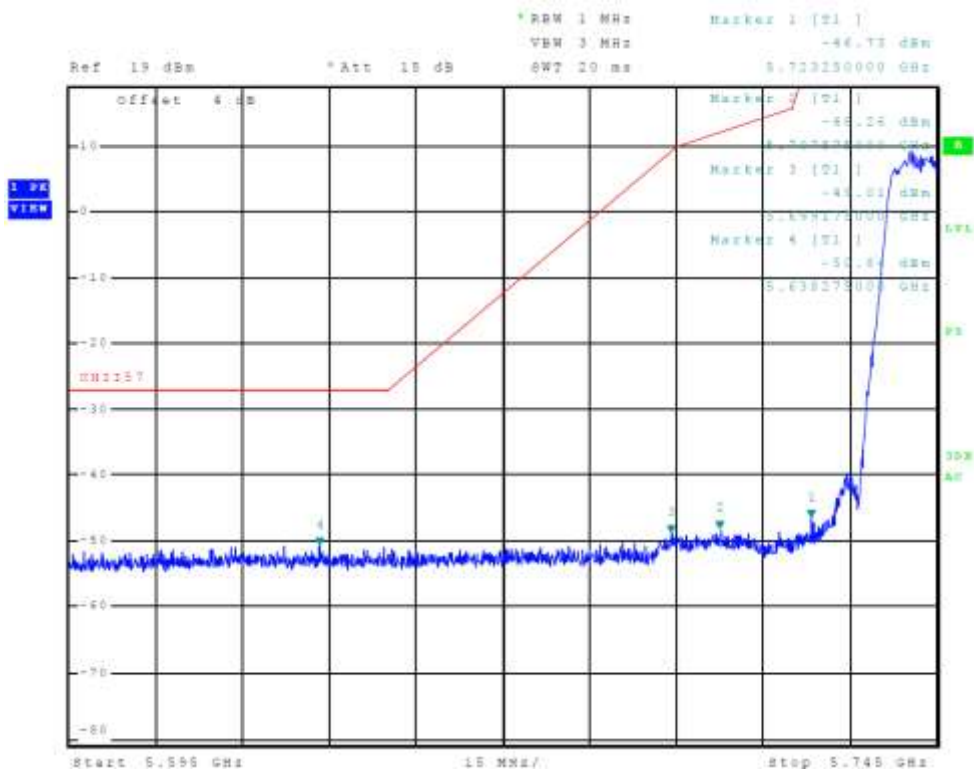


Figure 80 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 3, 802.11a)

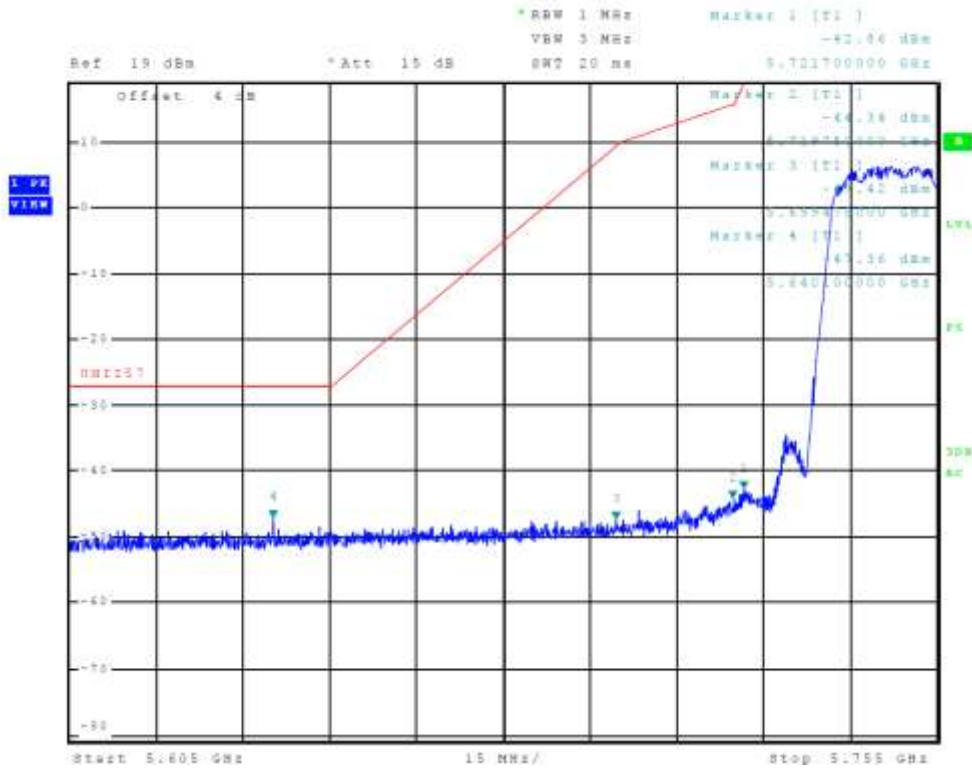


Figure 81 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 0, 802.11n40)

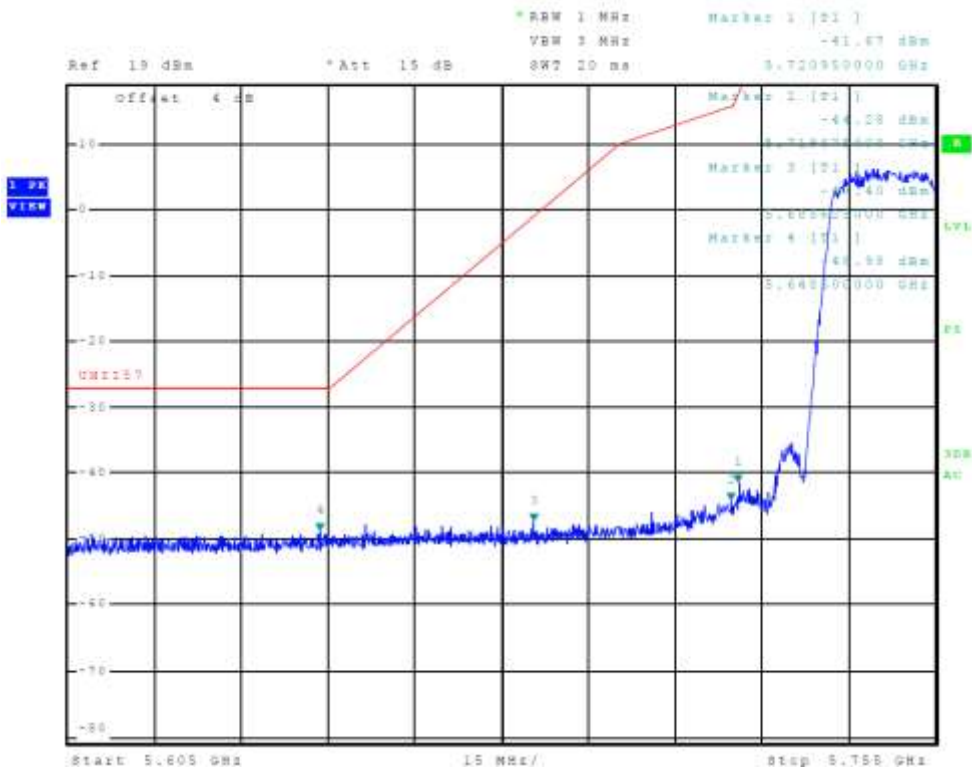


Figure 82 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 1, 802.11n40)

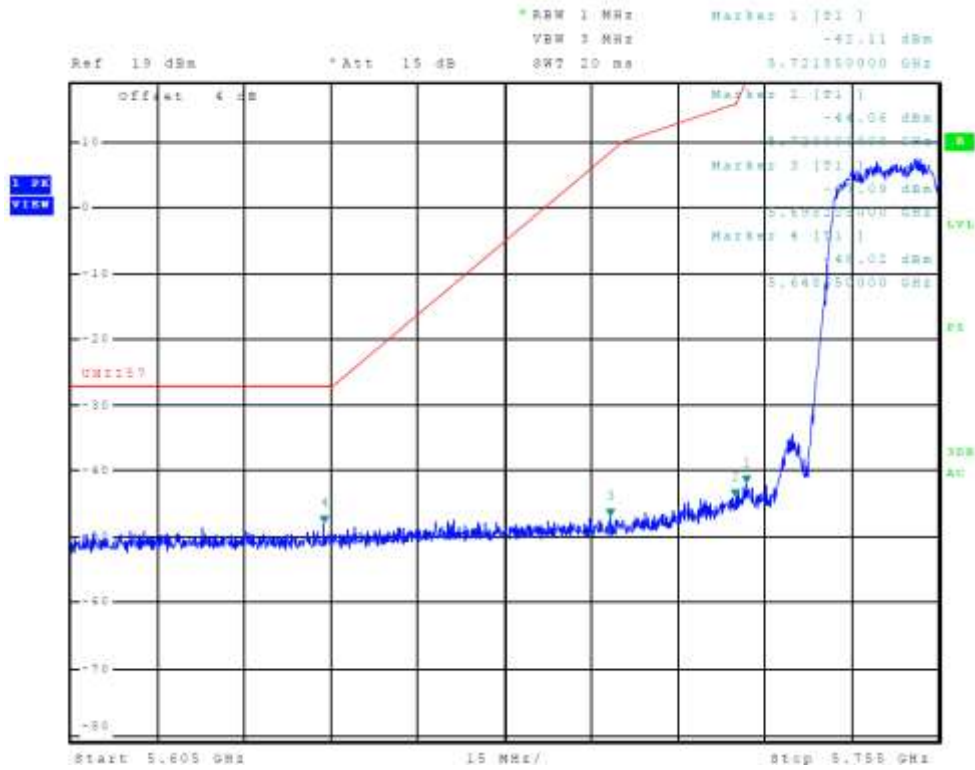


Figure 83 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 2, 802.11n40)

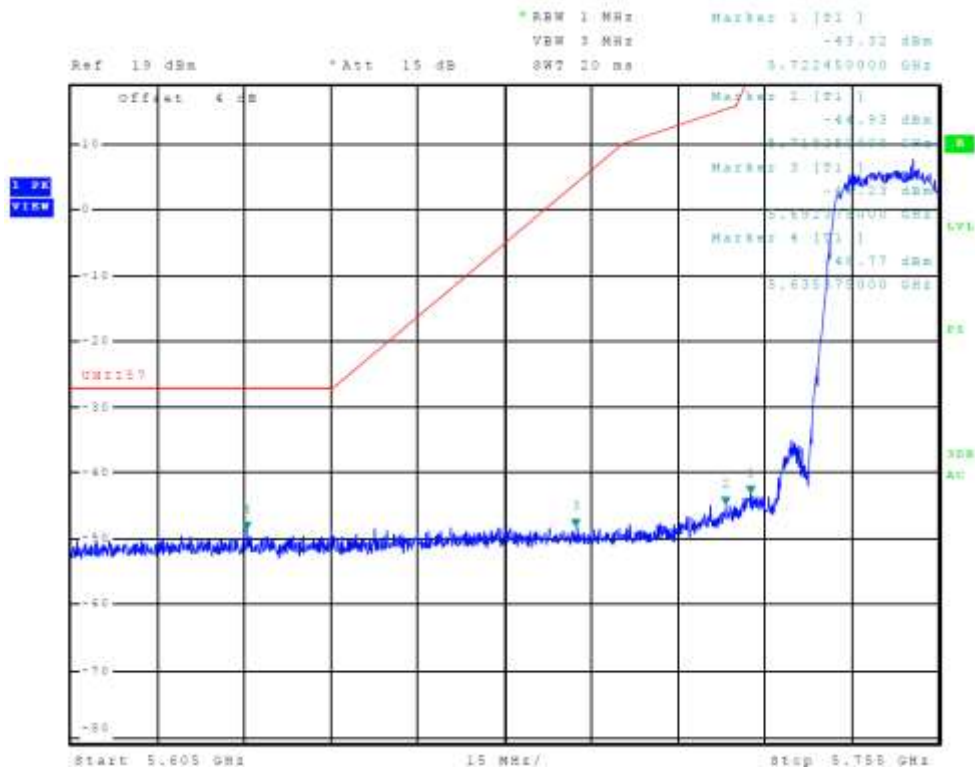


Figure 84 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 3, 802.11n40)

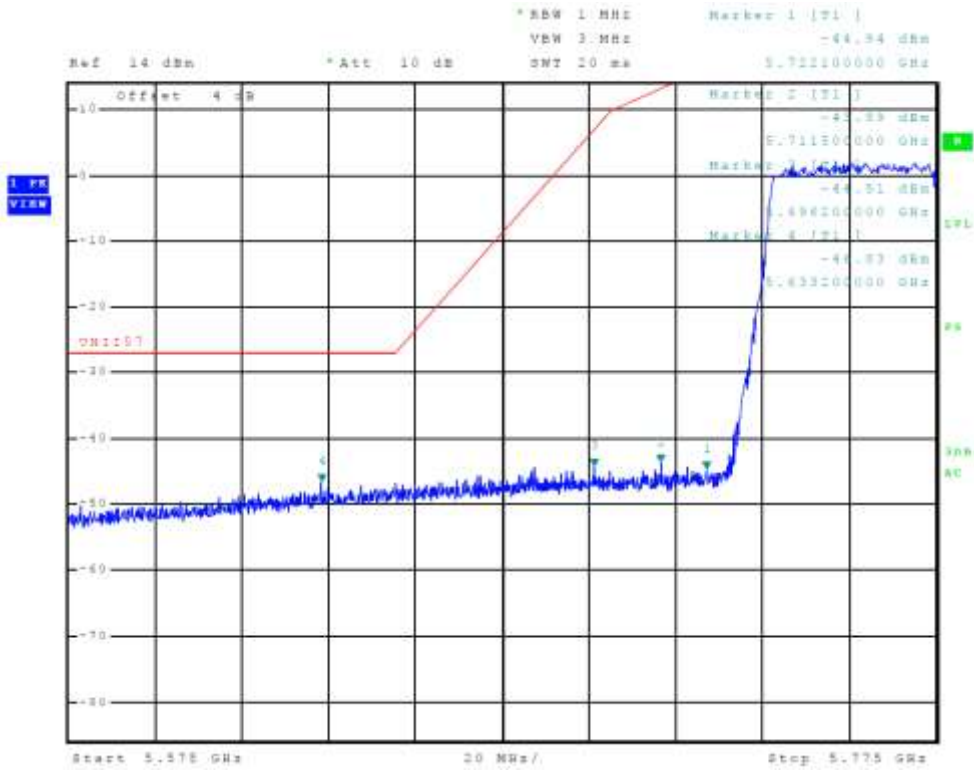


Figure 85 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 0, 802.11ac)

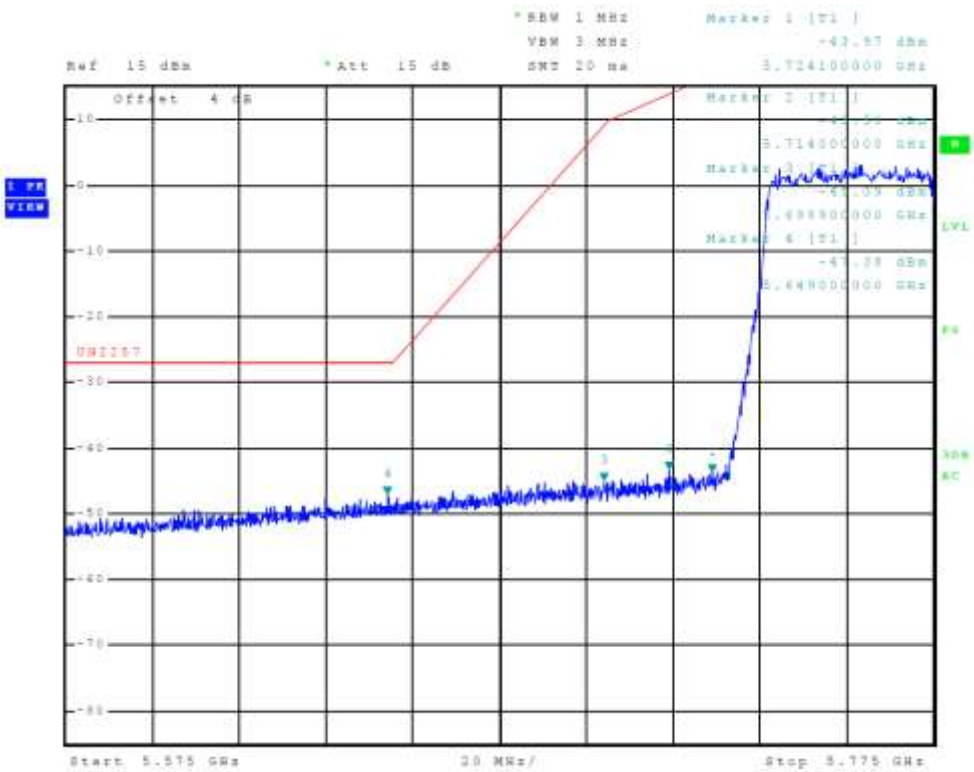


Figure 86 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 1, 802.11ac)

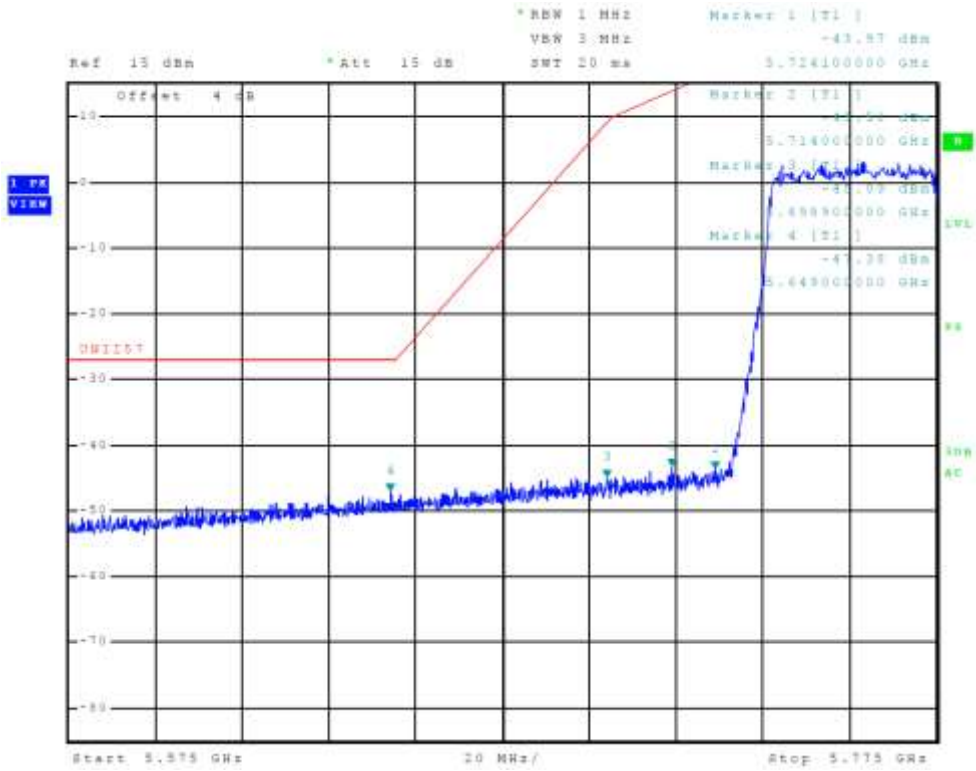


Figure 87 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 2, 802.11ac)

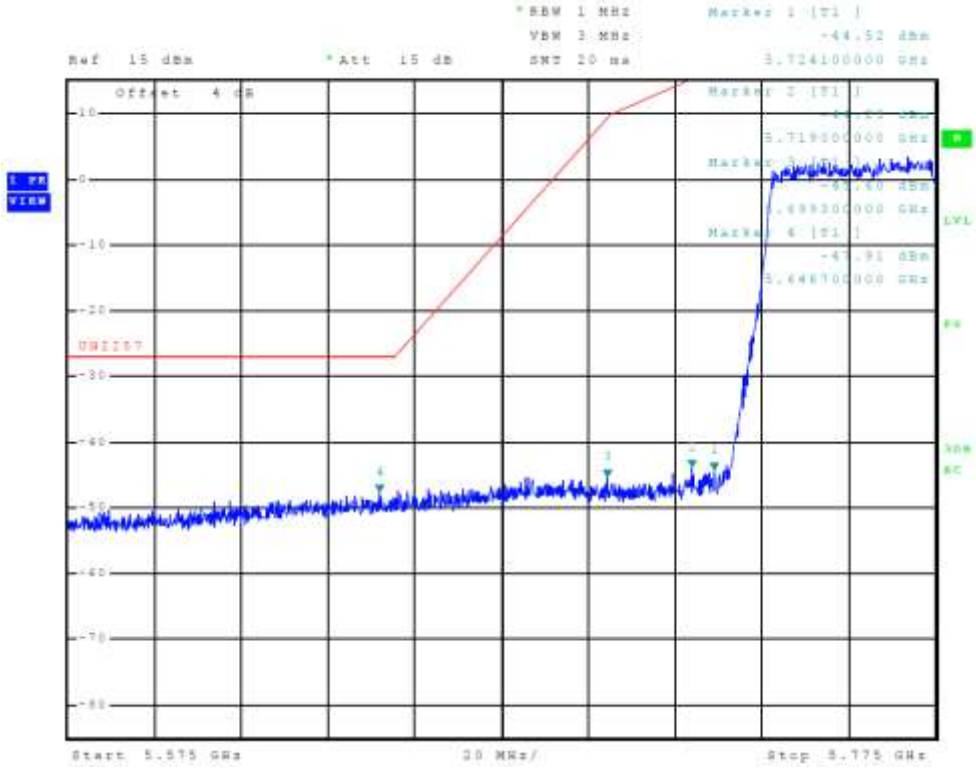


Figure 88 Plot of Transmitter Low Band Edge (5725-5850 MHz Band, Chain 3, 802.11ac)

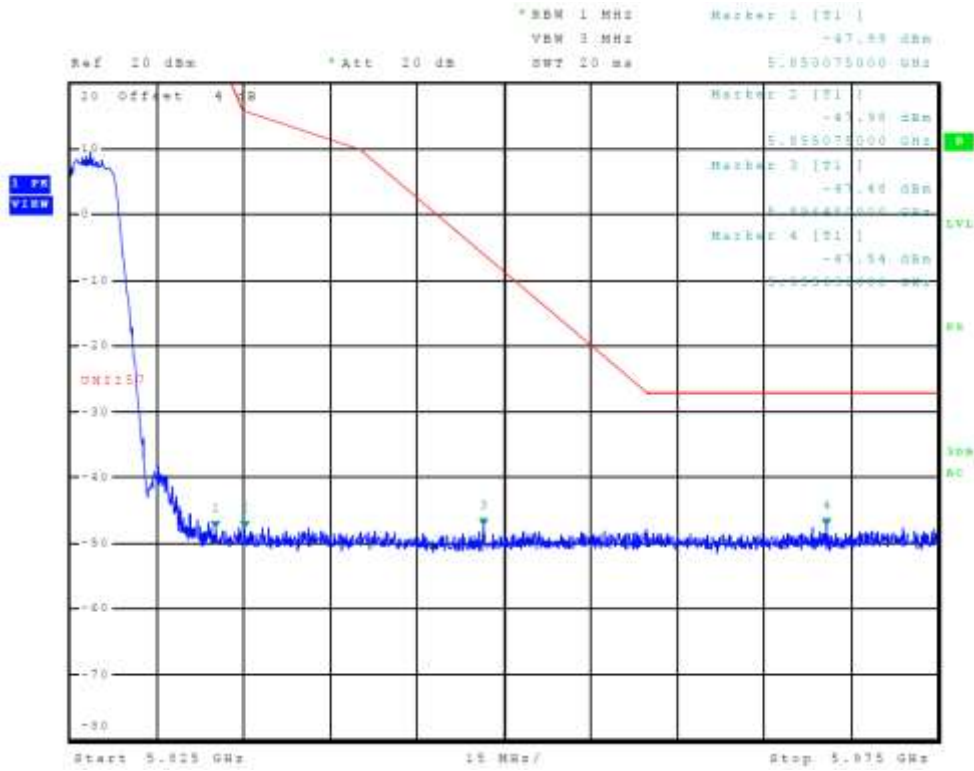


Figure 89 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 0, 802.11a)

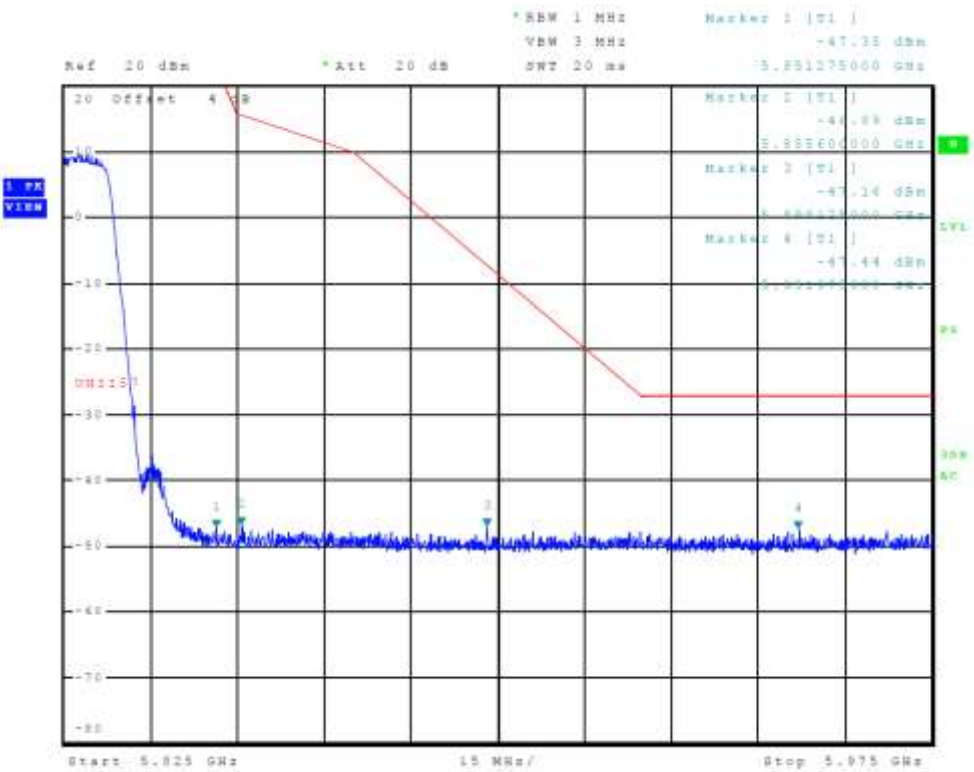


Figure 17 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 1, 802.11a)

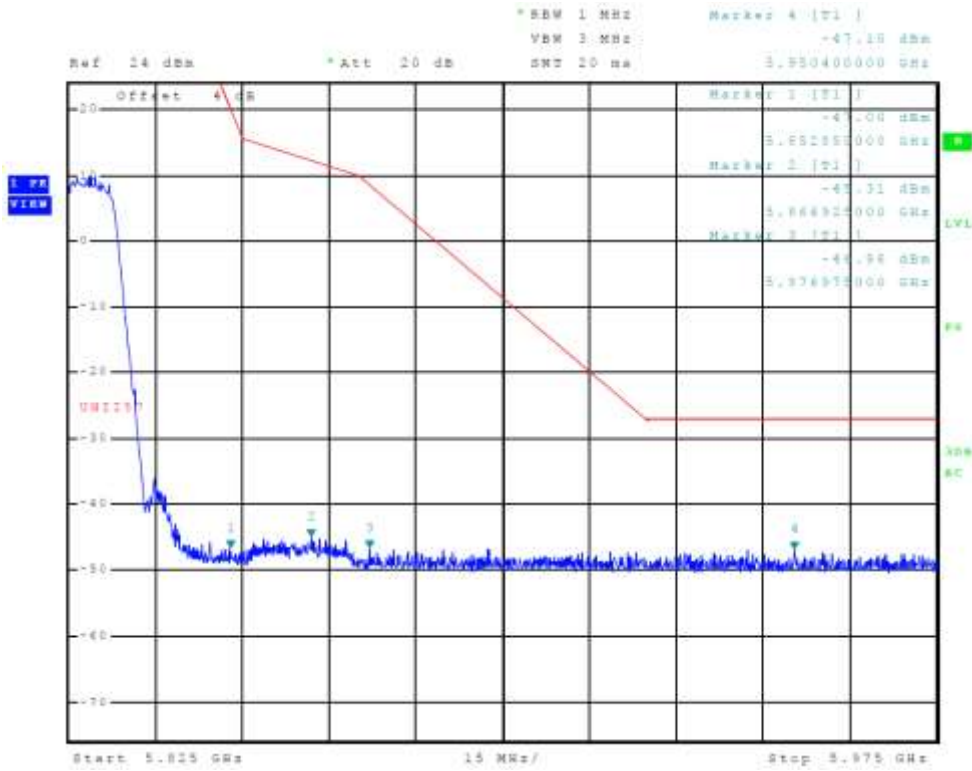


Figure 90 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 2, 802.11a)

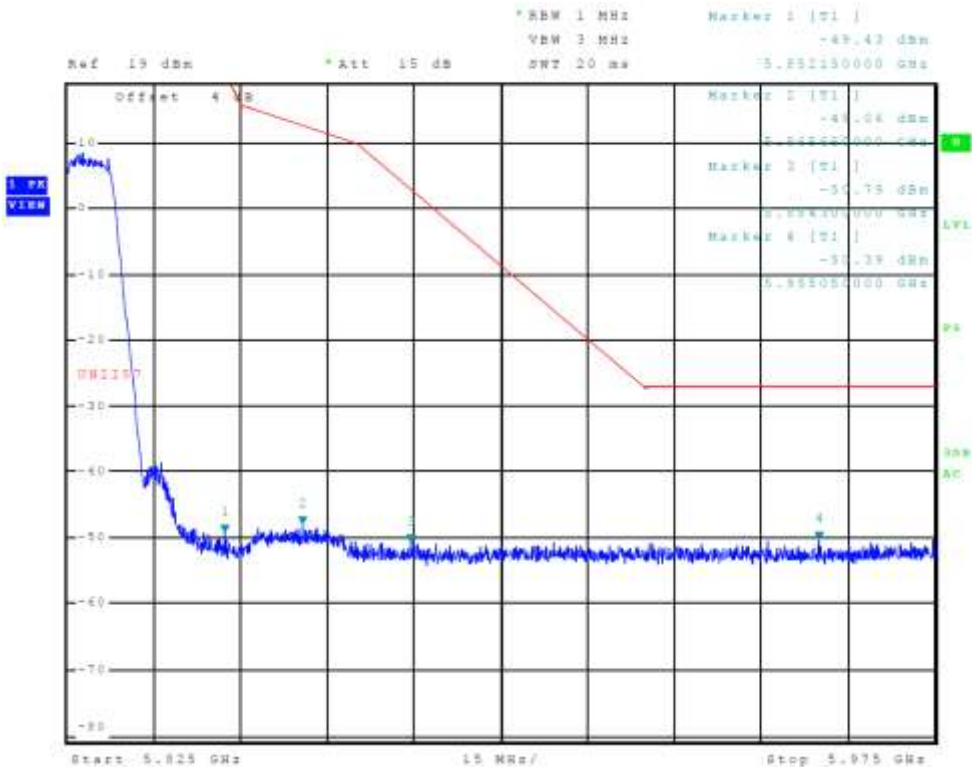


Figure 91 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 3, 802.11a)

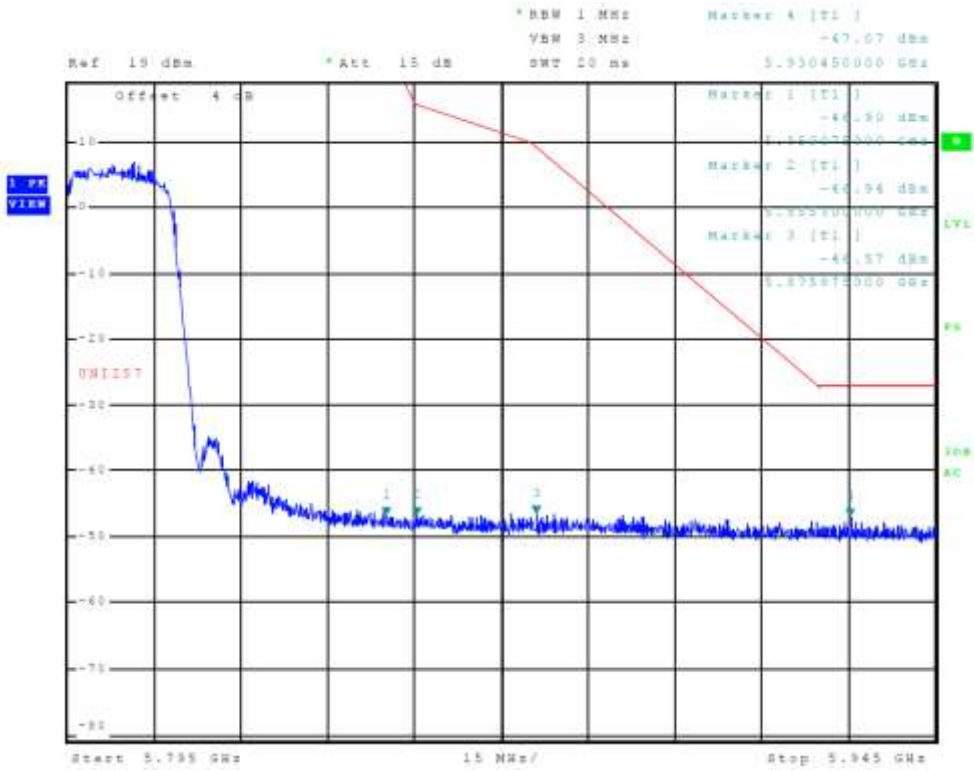


Figure 92 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 0, 802.11n40)

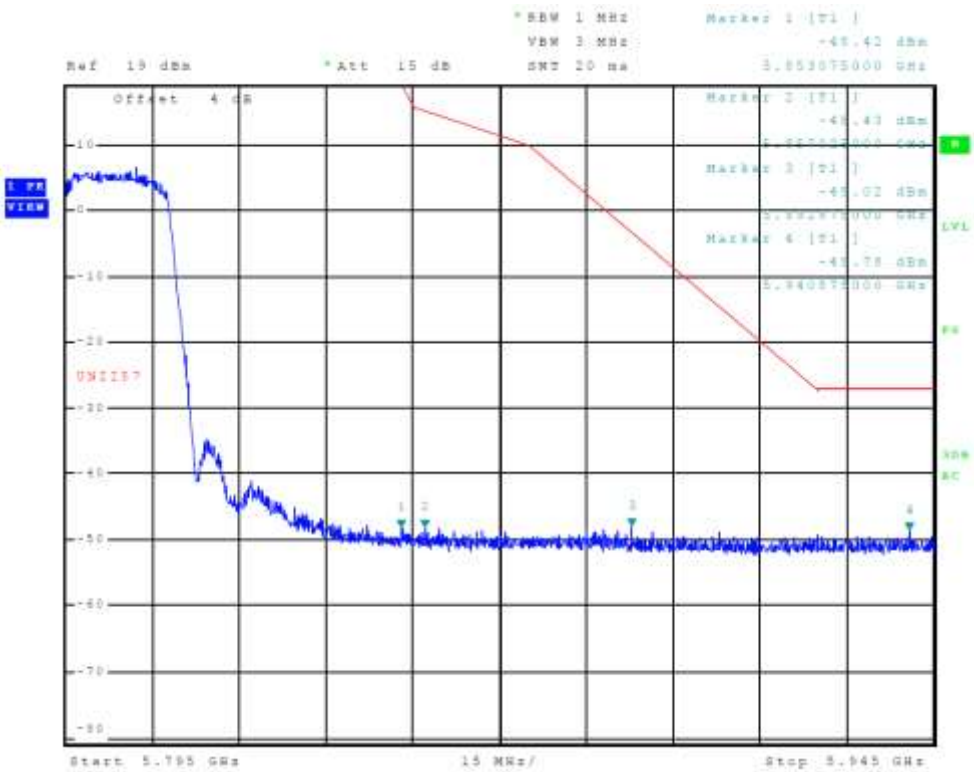


Figure 93 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 1, 802.11n40)

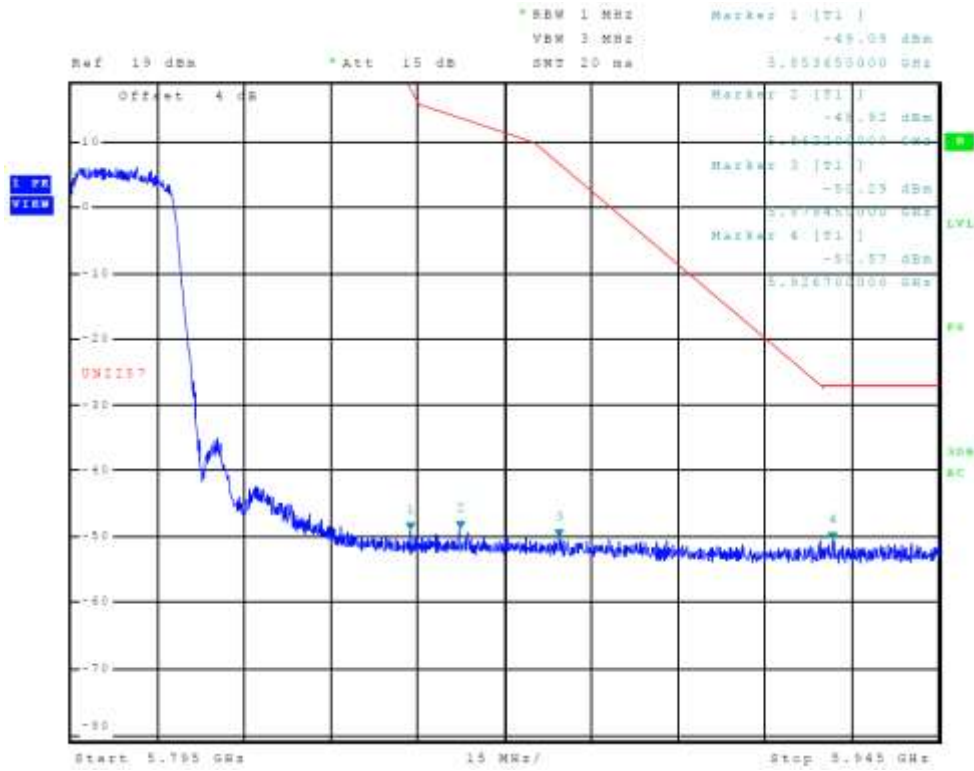


Figure 94 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 2, 802.11n40)

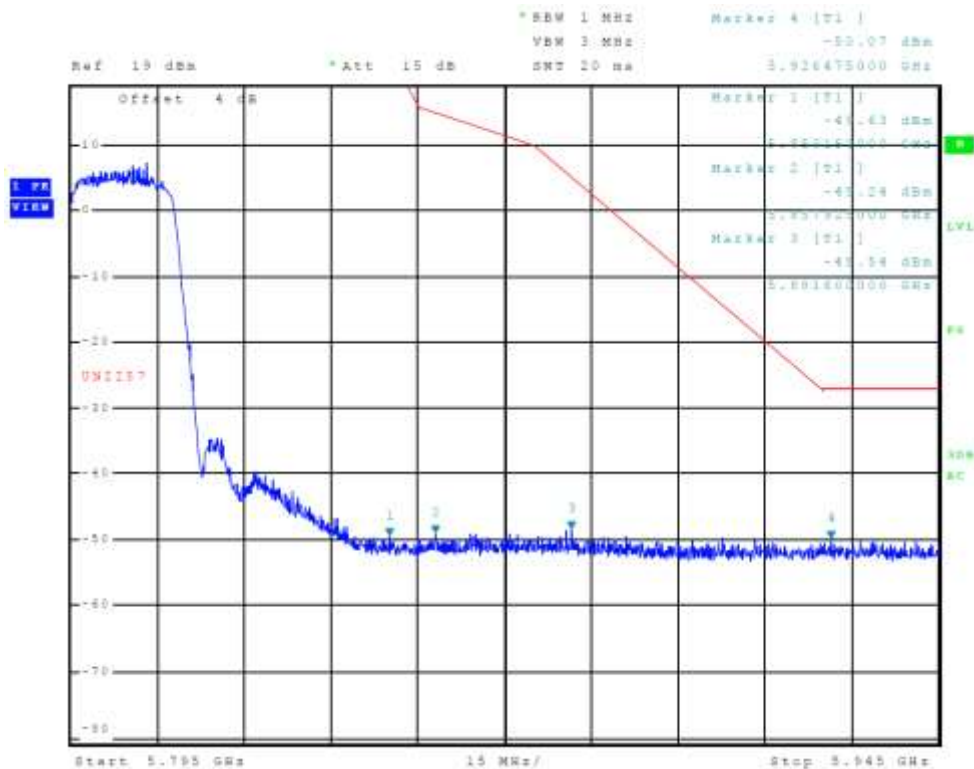


Figure 95 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 3, 802.11n40)

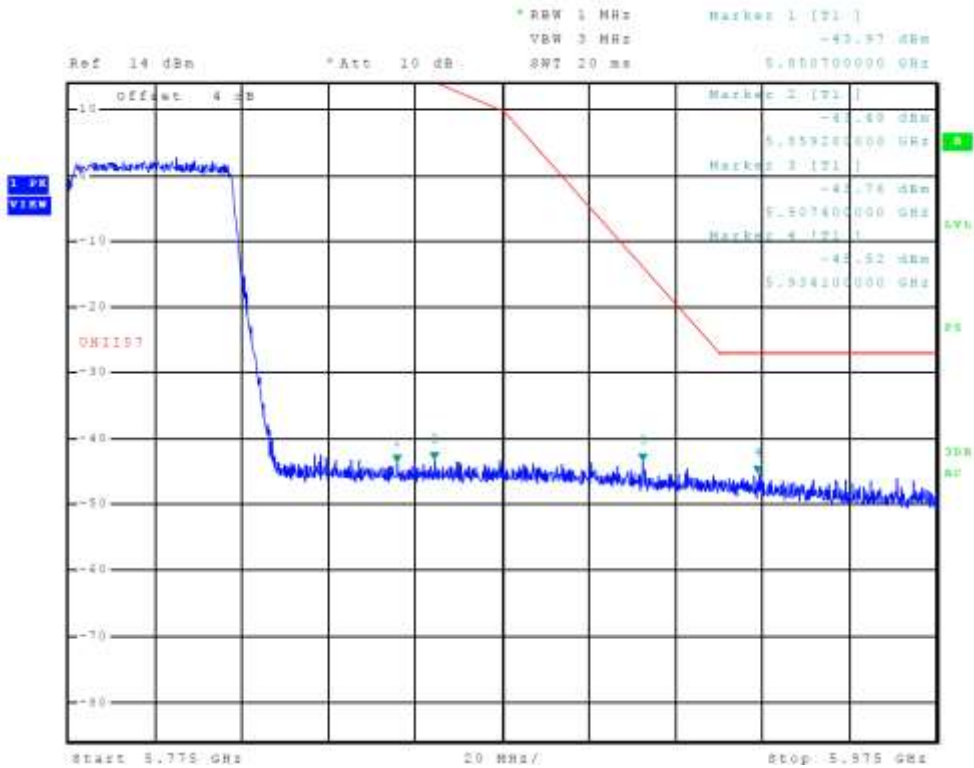


Figure 96 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 0, 802.11ac)

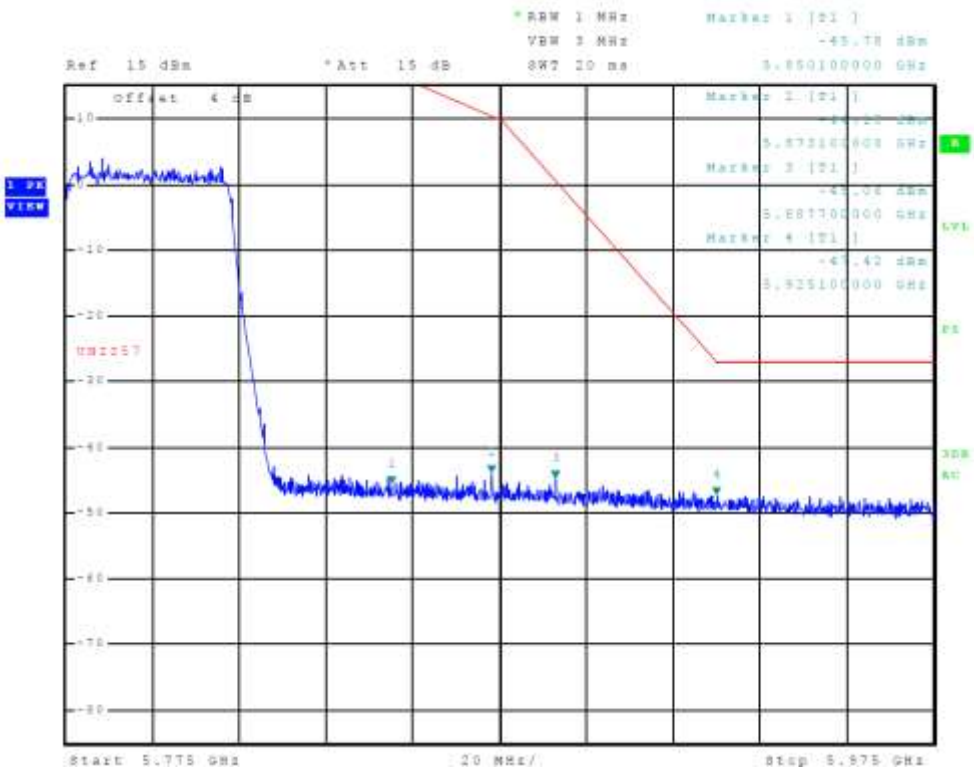


Figure 97 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 1, 802.11ac)

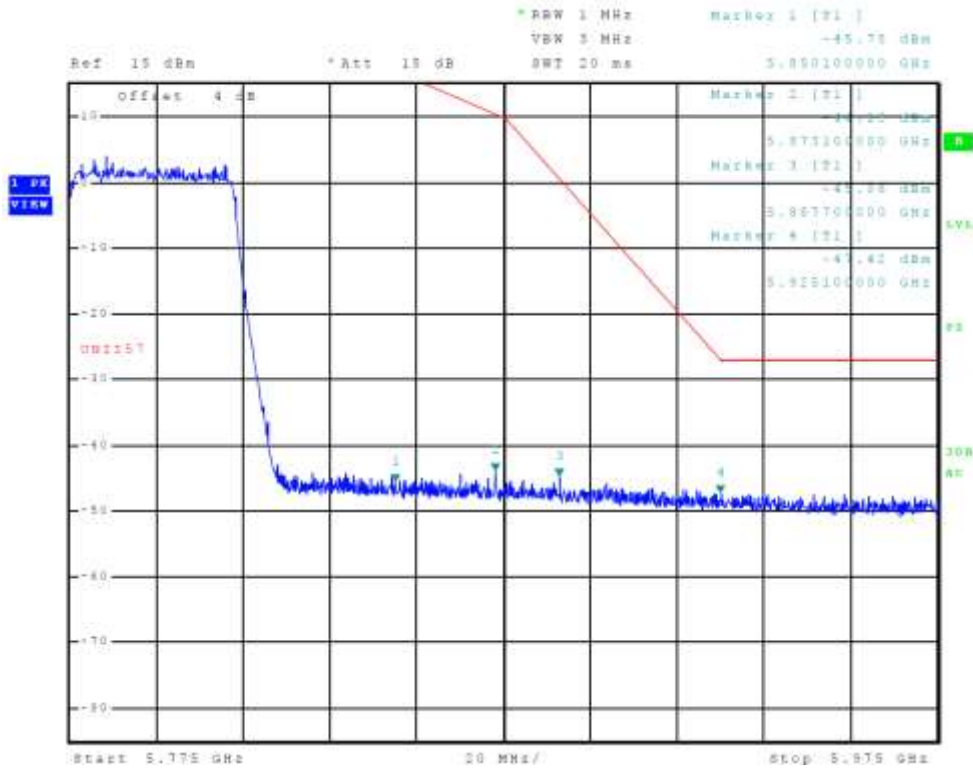


Figure 98 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 2, 802.11ac)

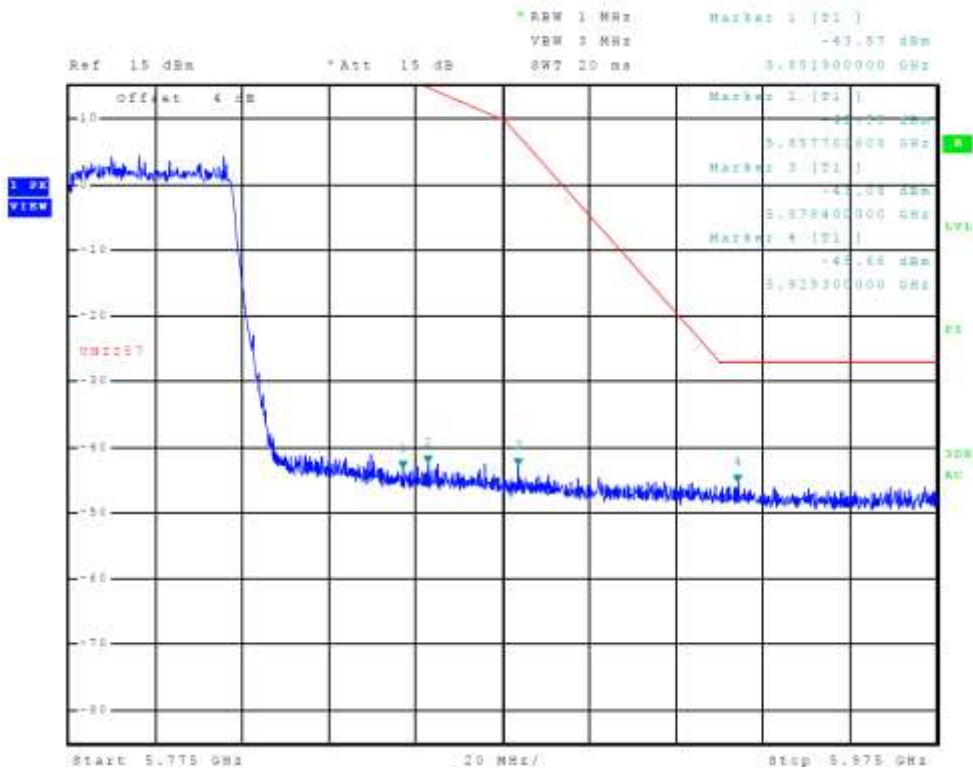


Figure 99 Plot of Transmitter High Band Edge (5725-5850 MHz Band, Chain 3, 802.11ac)

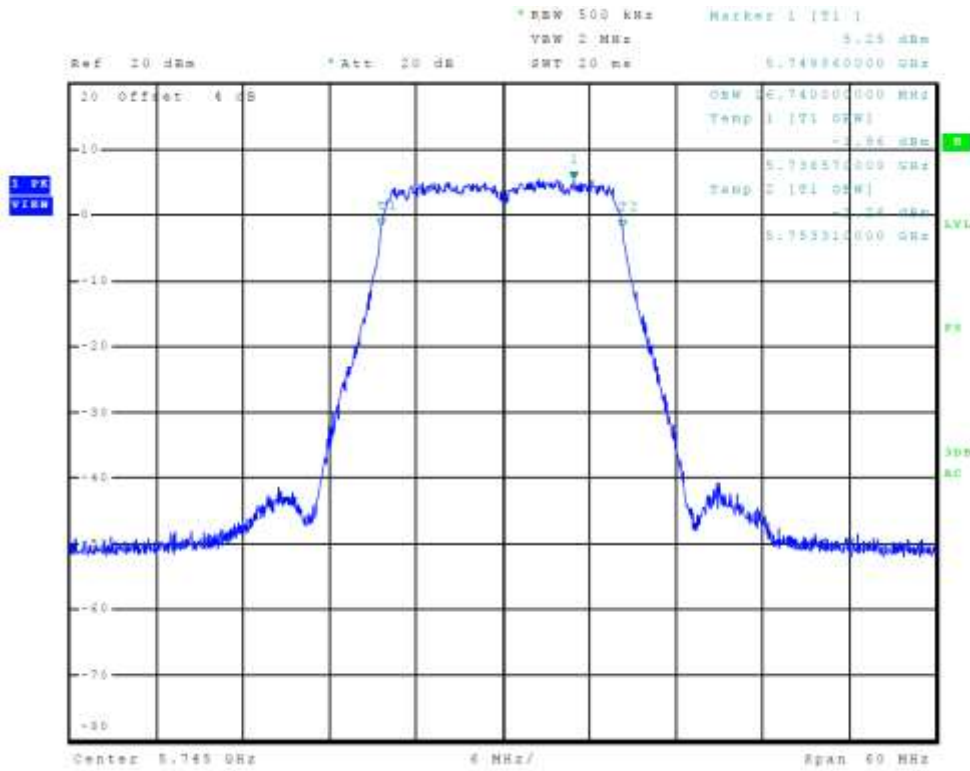


Figure 100 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11a, Chain 0, 99% OBW)

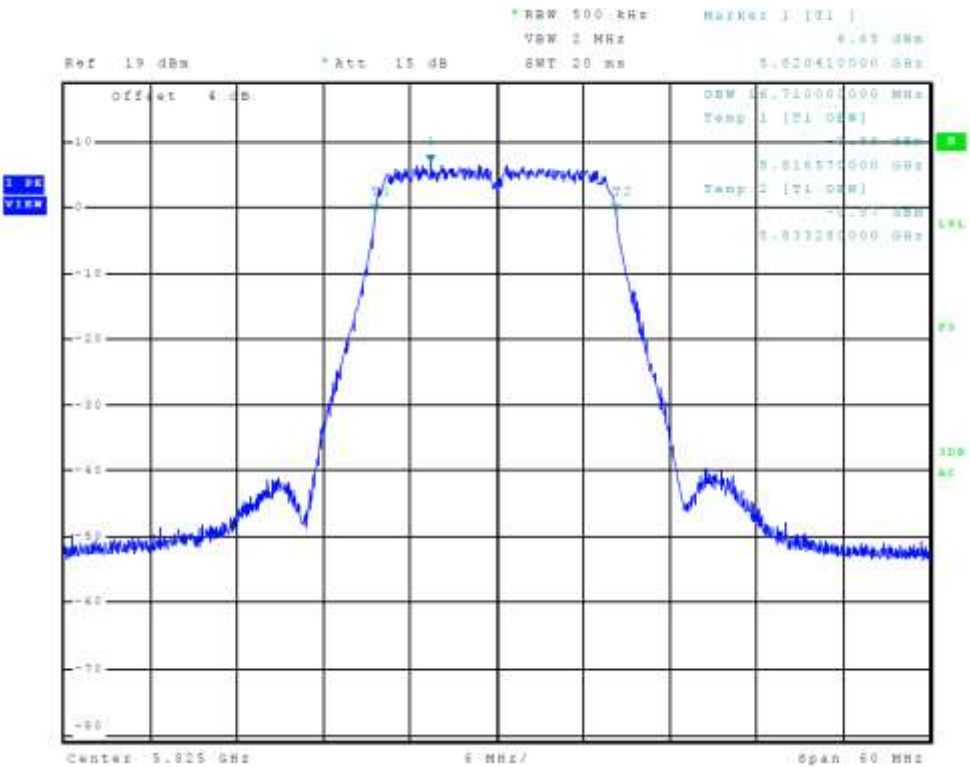


Figure 101 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11a, Chain 1, 99% OBW)

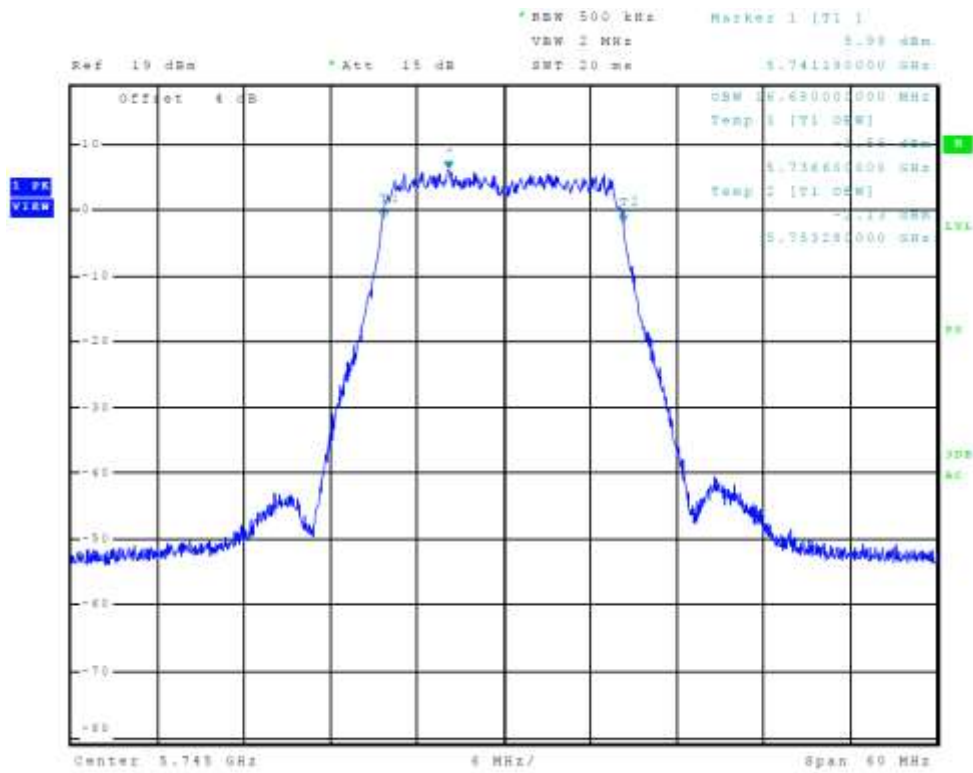


Figure 102 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11a, Chain 2, 99% OBW)

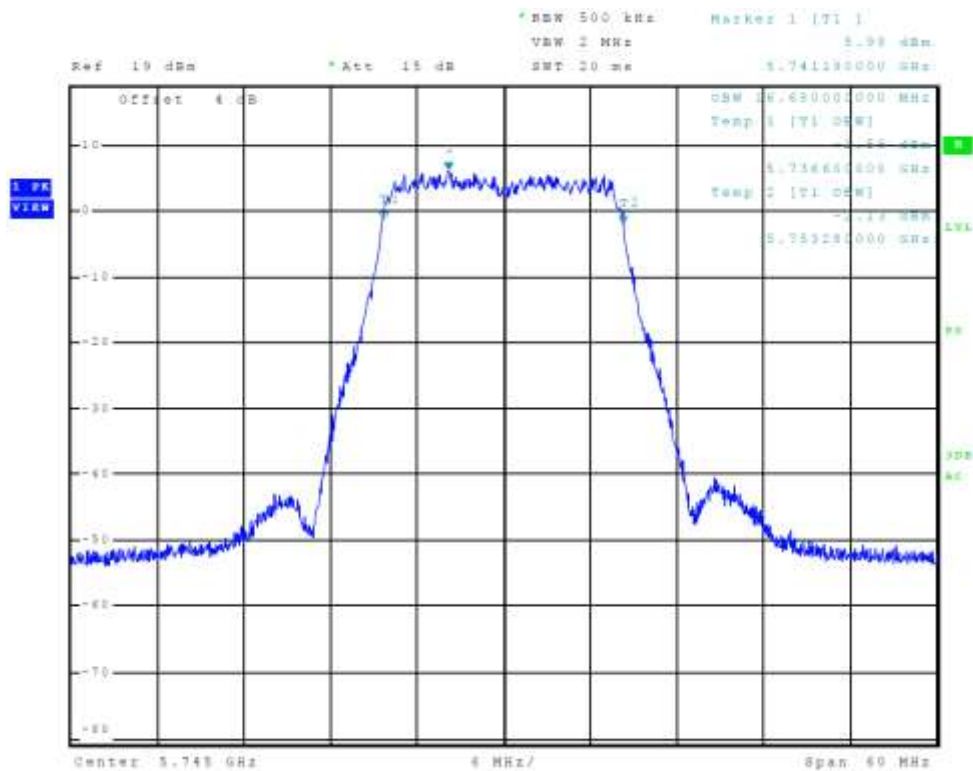


Figure 103 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11a, Chain 3, 99% OBW)

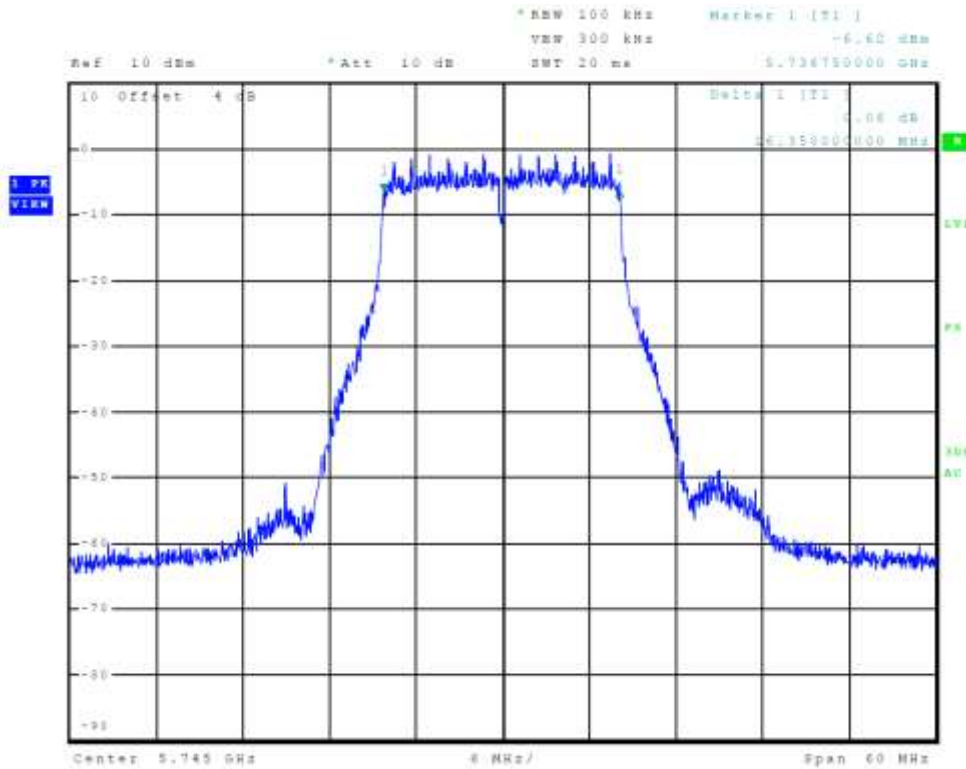


Figure 104 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11a, Chain 0, 6-dB OBW)

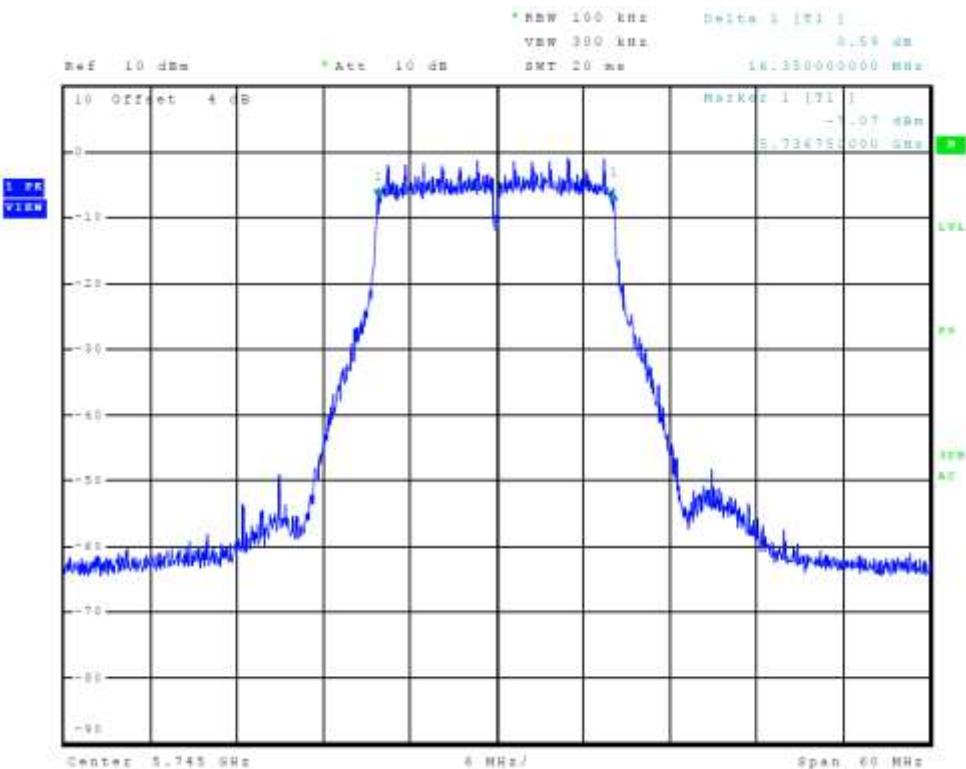


Figure 105 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11a, Chain 1, 6-dB OBW)

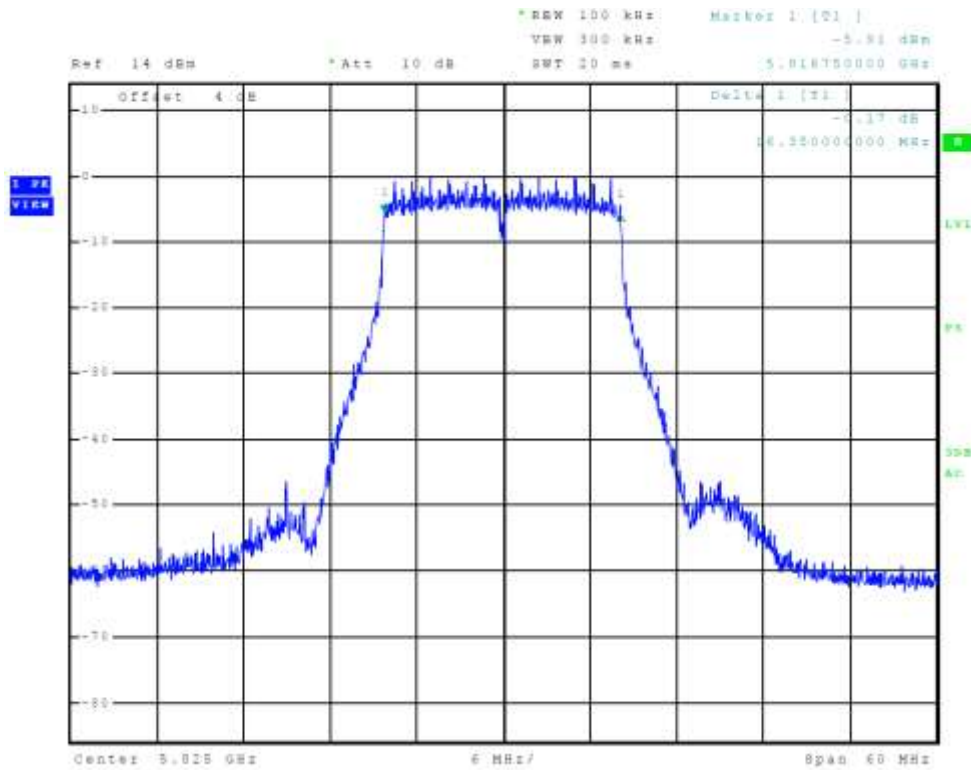


Figure 106 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11a, Chain 2, 6-dB OBW)

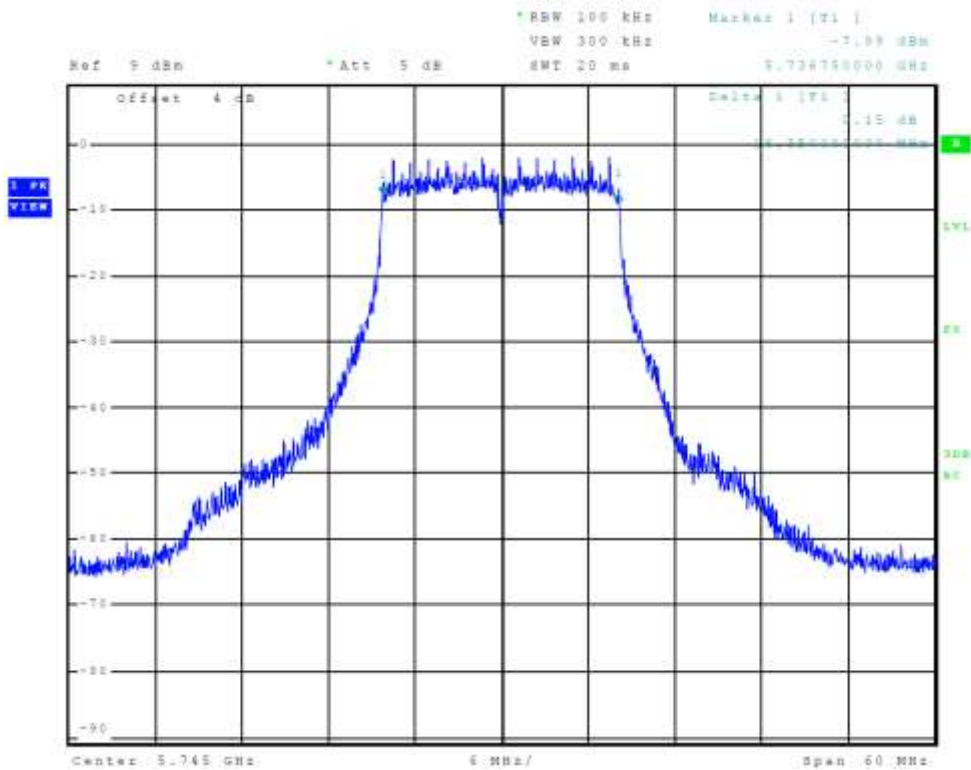


Figure 107 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11a, Chain 3, 6-dB OBW)

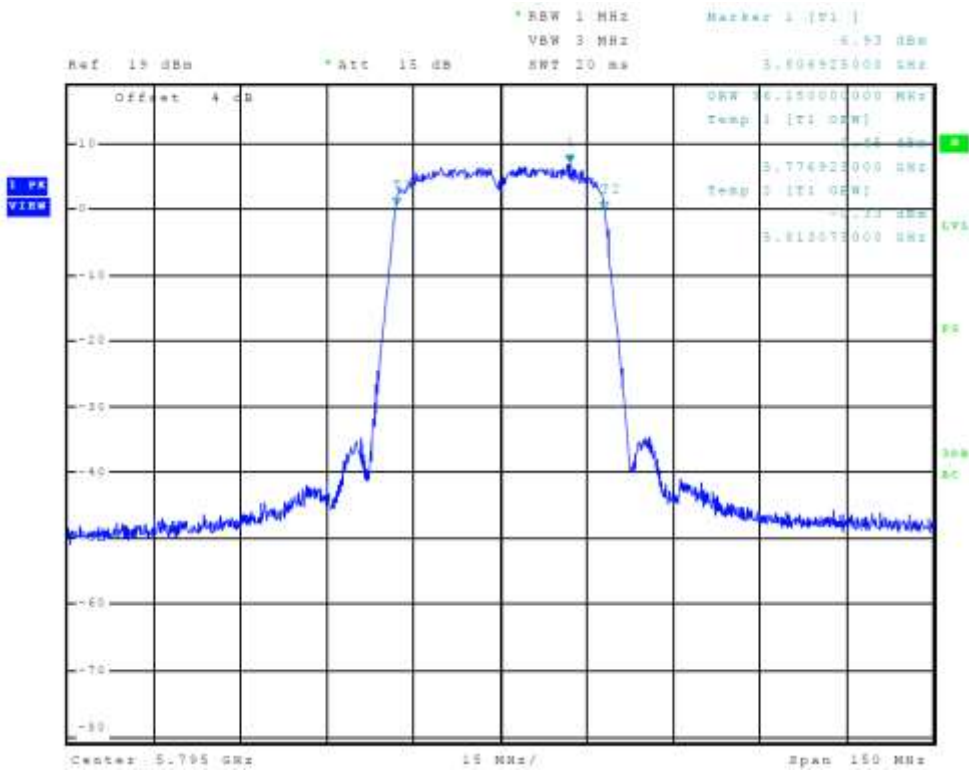


Figure 108 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11n40, Chain 0, 99% OBW)

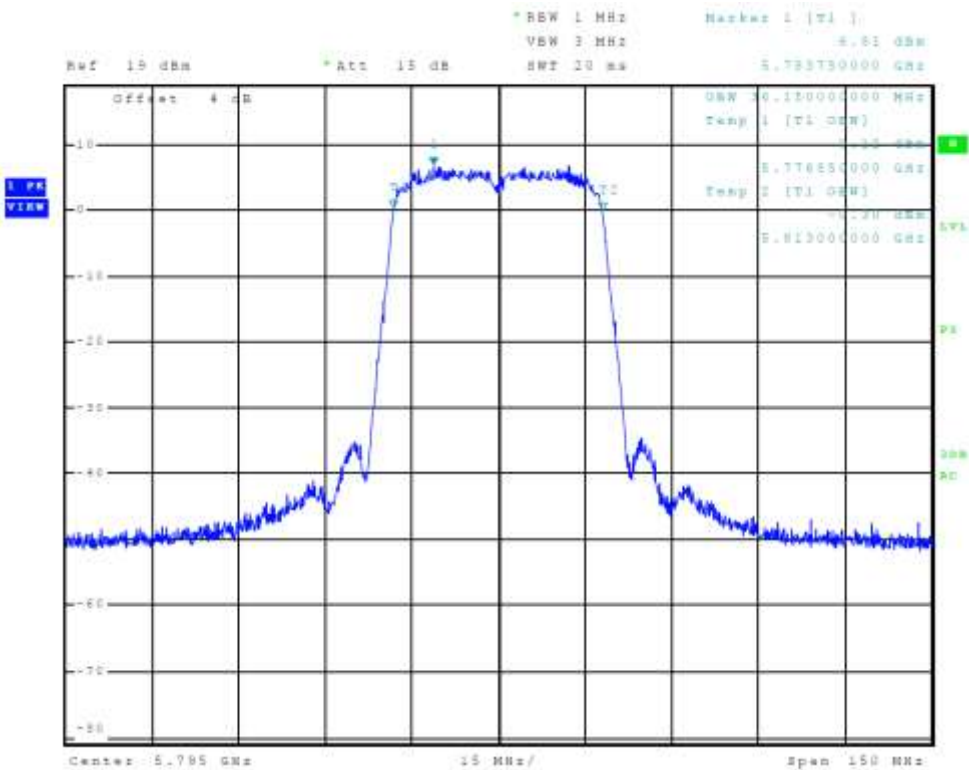


Figure 109 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11n40, Chain 1, 99% OBW)

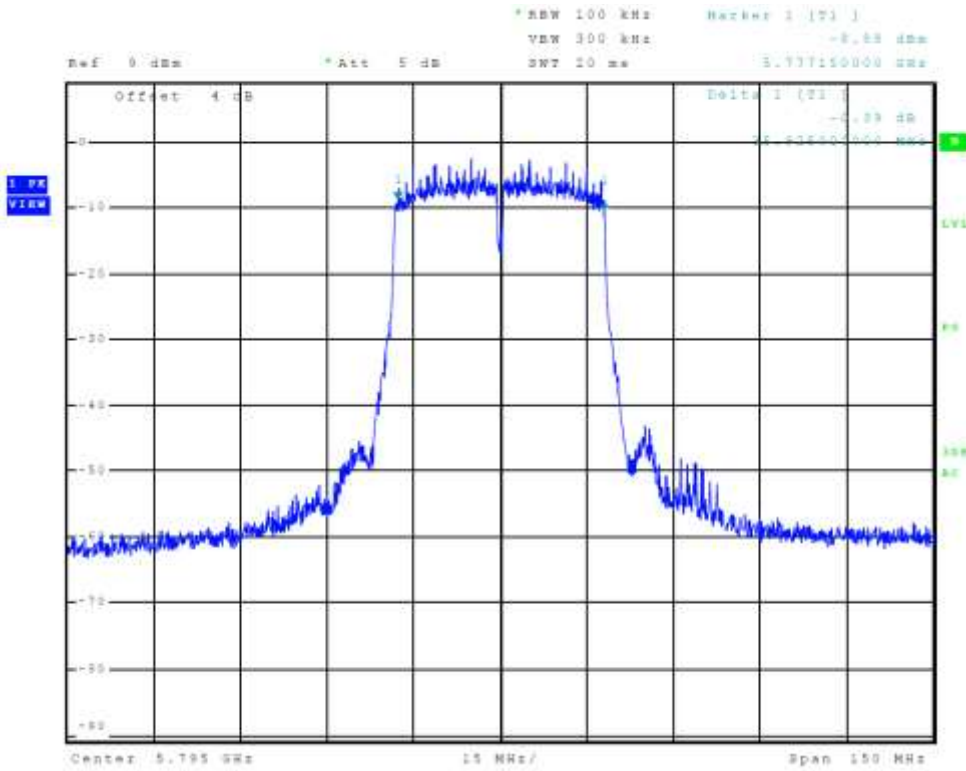


Figure 112 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11n40, Chain 0, 6-dB OBW)

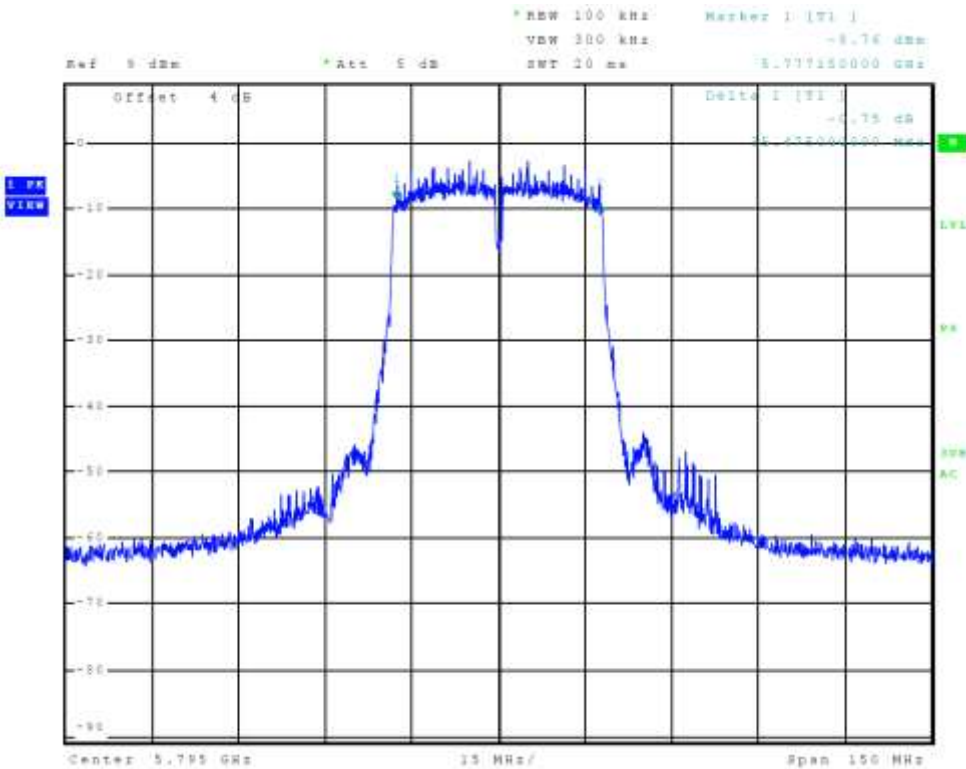


Figure 113 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11n40, Chain 1, 6-dB OBW)

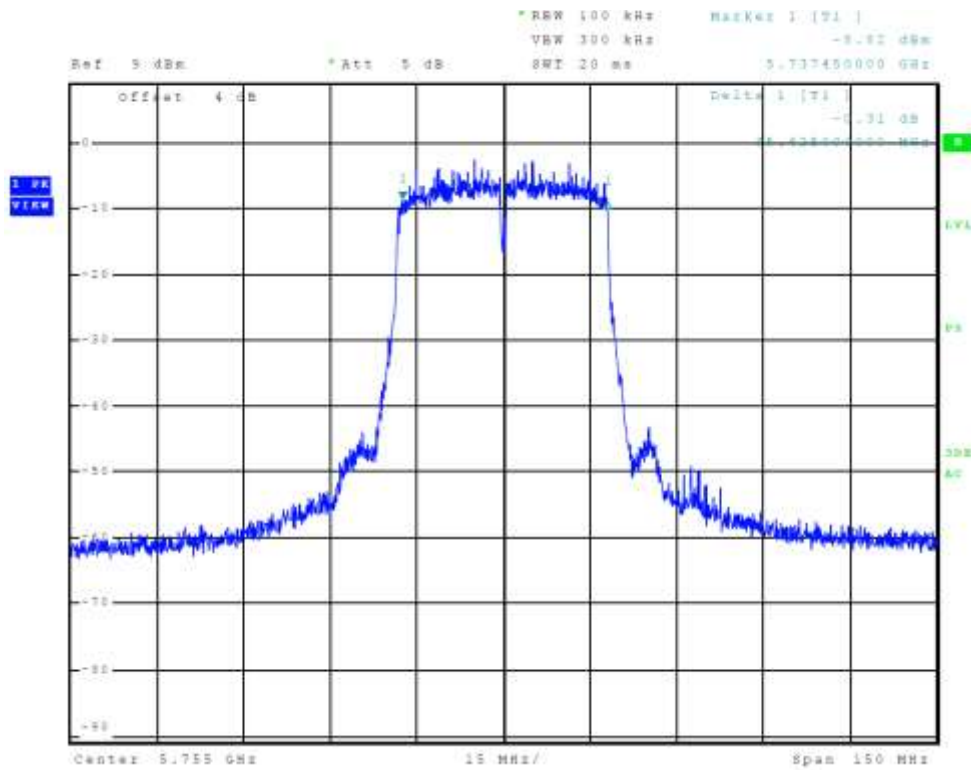


Figure 114 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11n40, Chain 2, 6-dB OBW)

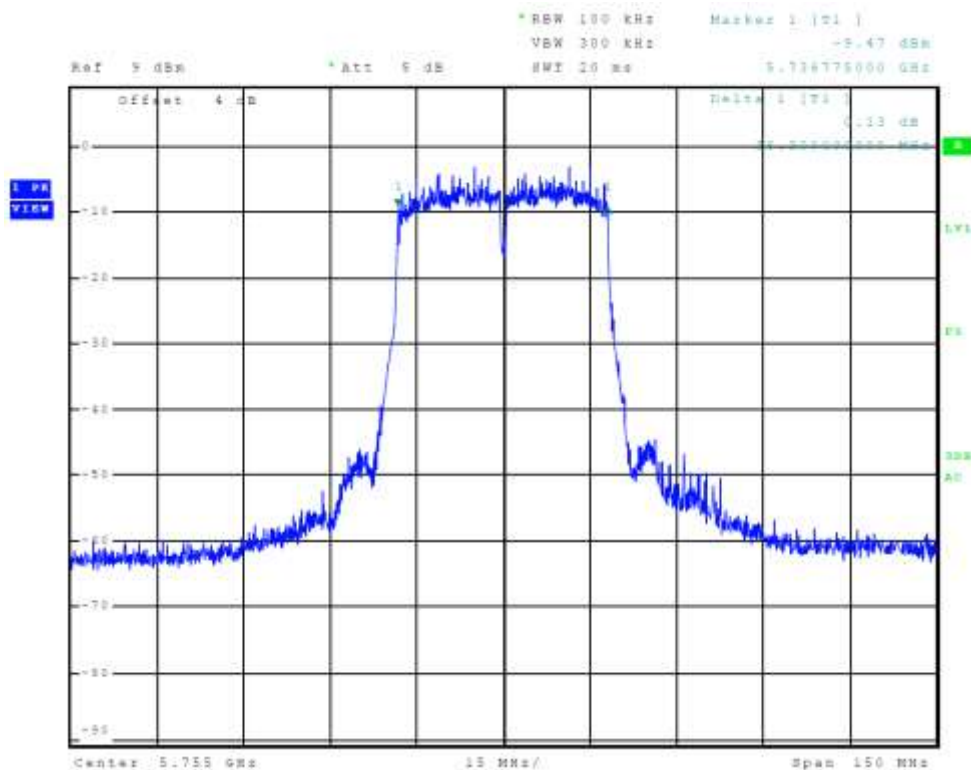


Figure 115 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11n40, Chain 3, 6-dB OBW)

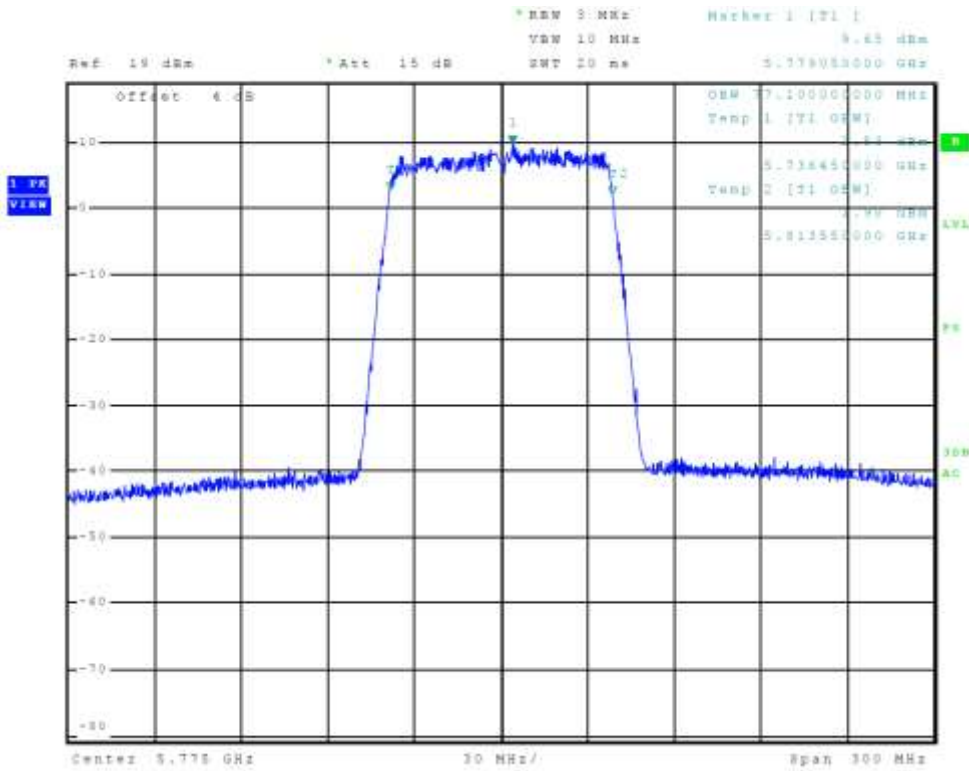


Figure 116 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11ac, Chain 0, 99% OBW)

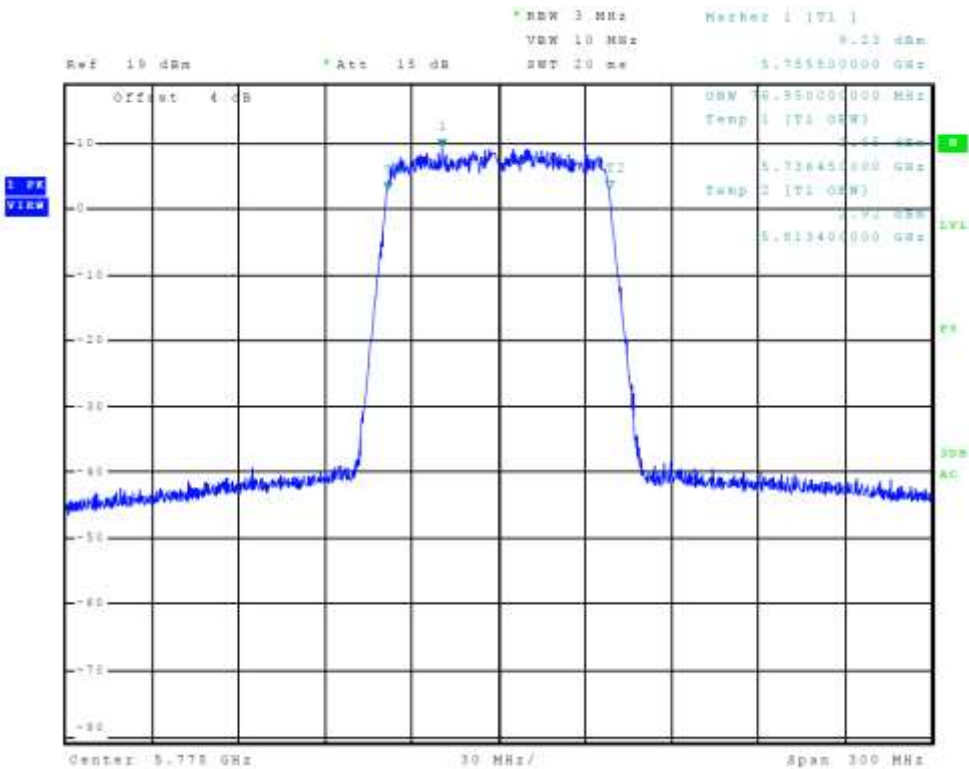


Figure 117 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11ac, Chain 1, 99% OBW)

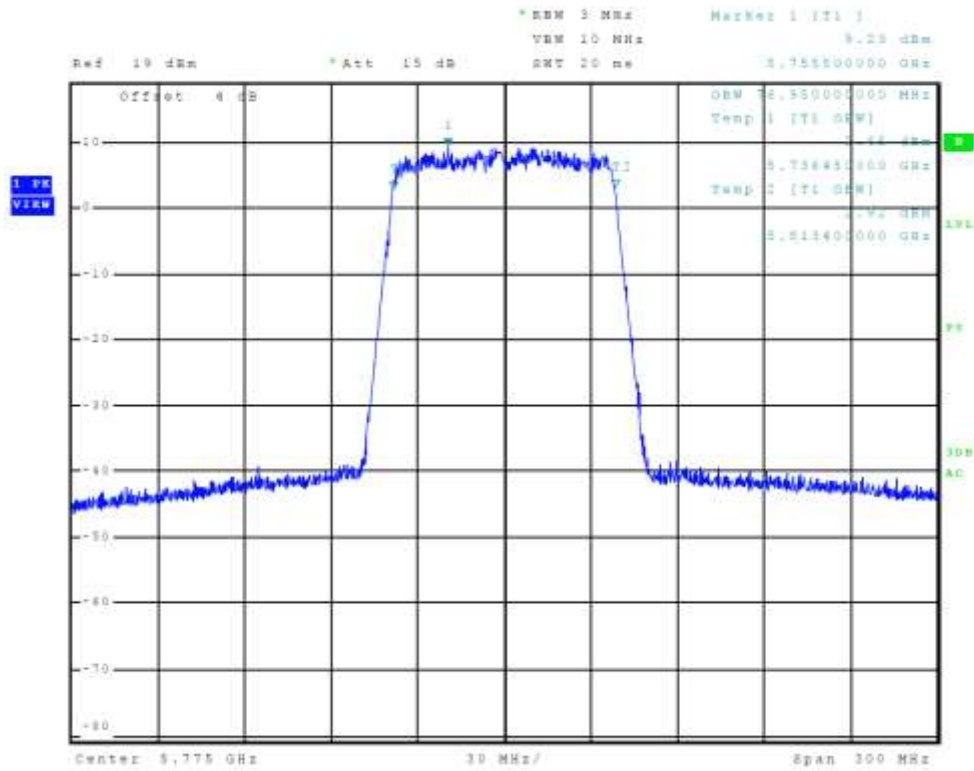


Figure 118 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11ac, Chain 2, 99% OBW)

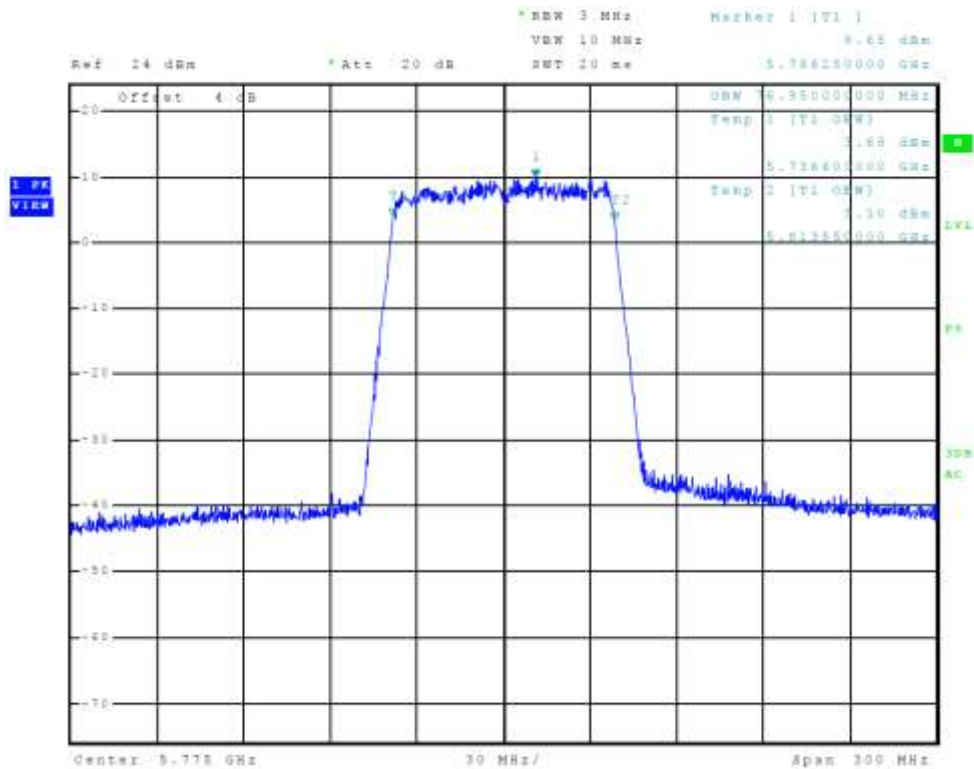


Figure 119 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11ac, Chain 3, 99% OBW)

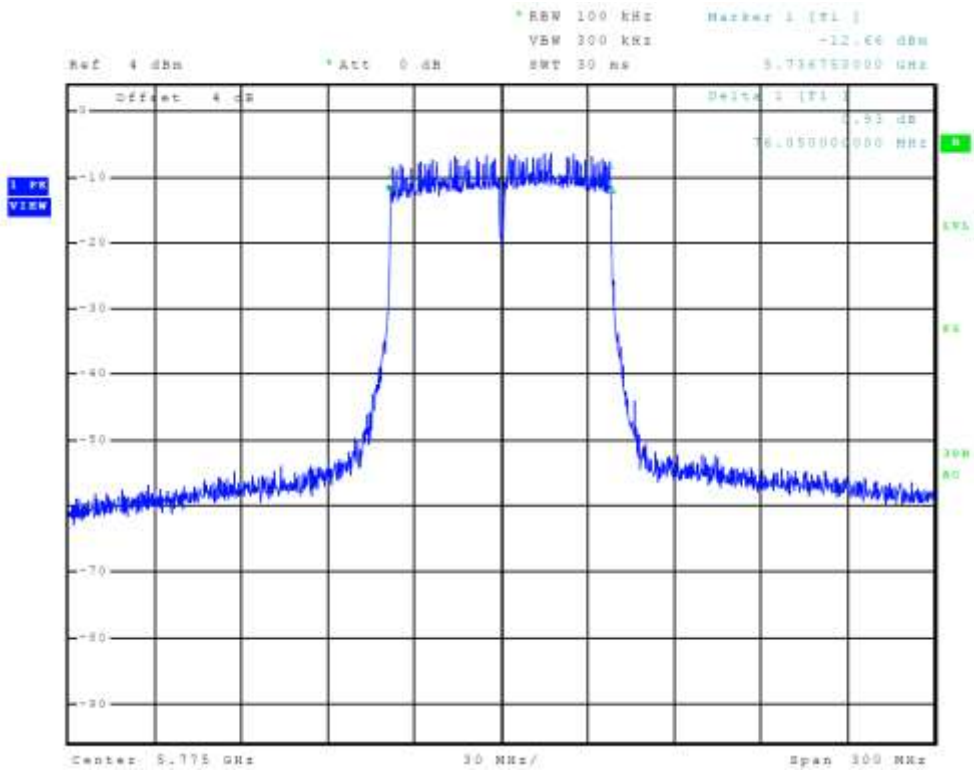


Figure 120 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11ac, Chain 0, 6-dB OBW)

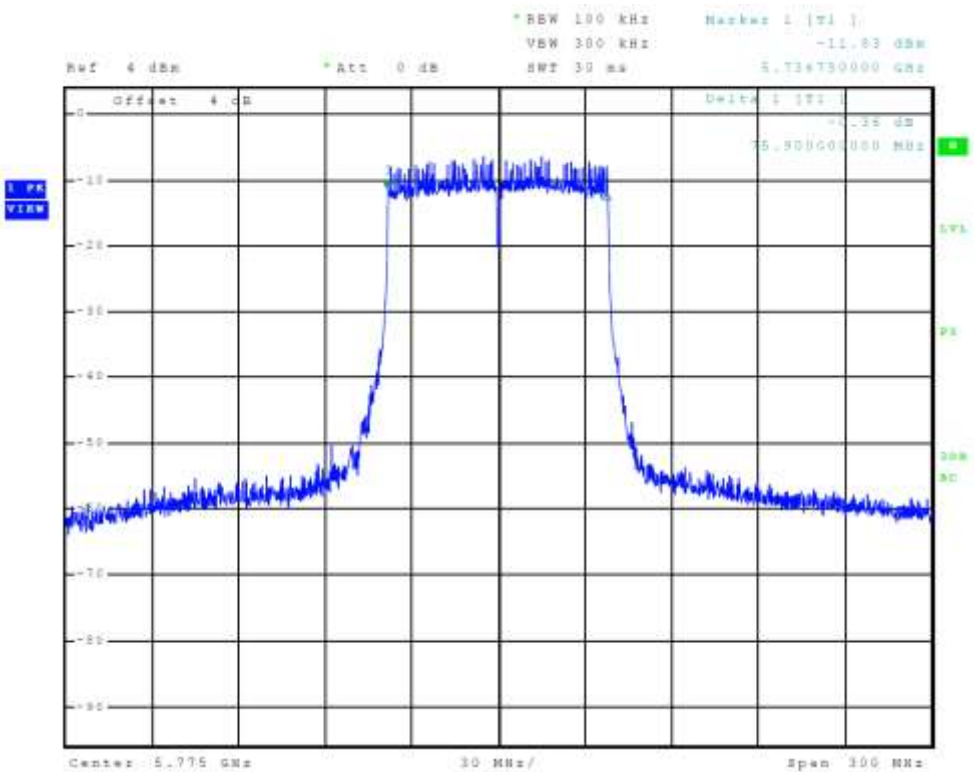


Figure 121 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11ac, Chain 1, 6-dB OBW)

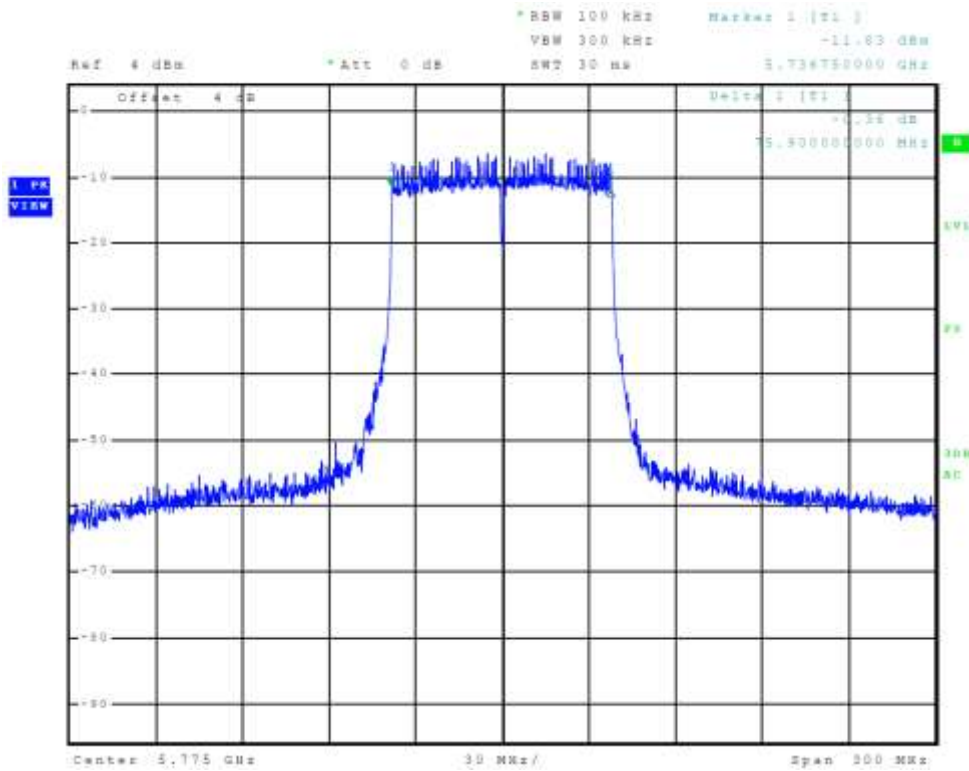


Figure 122 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11ac, Chain 2, 6-dB OBW)

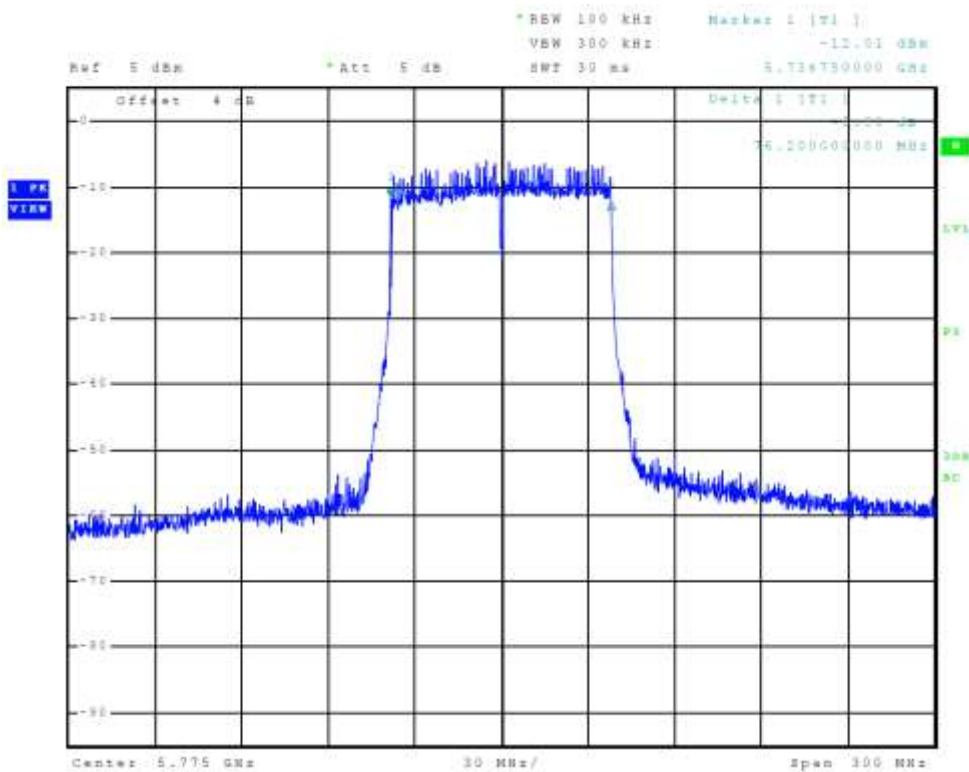


Figure 123 Plot of Transmitter Emissions (5725-5850 MHz Band, 802.11ac, Chain 3, 6-dB OBW)

Transmitter Emissions Data

Table 10 Transmitter Radiated Emission (802.11a, 5150-5250 MHz Band)

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)
20 MHz Channel					
5180.0	--	--	--	--	--
10360.0	60.7	47.3	60.4	47.3	68.3
15540.0	62.9	50.1	62.6	50.1	68.3
20720.0	60.6	48.3	61.3	48.4	68.3
25900.0	61.7	49.1	62.7	49.9	68.3
5200.0	--	--	--	--	--
10400.0	60.3	47.4	60.1	47.4	68.3
15600.0	62.5	49.9	63.0	49.9	68.3
20800.0	60.4	47.6	60.7	47.6	68.3
26000.0	63.0	50.4	63.0	50.1	68.3
5240.0	--	--	--	--	--
10480.0	60.7	47.5	60.3	47.6	68.3
15720.0	62.4	49.8	62.2	49.6	68.3
20960.0	60.1	47.4	60.3	47.3	68.3
26200.0	64.0	50.7	63.3	50.6	68.3
Band Edges					
5150.0	47.5	34.8	48.2	35.5	54.0
5350.0	48.5	35.7	48.6	35.8	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 11 Transmitter Radiated Emission (802.11a, 5725-5850 MHz Band)

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)
20 MHz Channel					
5745.0	--	--	--	--	--
11490.0	61.1	48.4	64.4	51.0	68.3
17235.0	66.5	54.1	69.5	56.5	68.3
22980.0	60.1	47.4	60.8	48.0	68.3
28725.0	64.1	51.4	64.2	51.3	68.3
5785.0	--	--	--	--	--
11570.0	60.9	48.0	64.2	50.6	68.3
17355.0	67.0	54.4	69.6	56.8	68.3
23140.0	61.9	48.9	61.5	48.9	68.3
28925.0	65.2	52.4	65.1	52.3	68.3
5825.0	--	--	--	--	--
11650.0	61.4	48.5	64.1	50.9	68.3
17475.0	68.0	55.6	70.4	57.6	68.3
23300.0	61.0	48.2	60.7	48.1	68.3
29125.0	64.3	51.6	64.4	51.7	68.3
Band Edges					
5725.0	49.4	36.2	68.8	51.7	78.2
5850.0	49.1	36.0	54.6	41.1	78.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 12 Transmitter Radiated Emission (802.11n, 5150-5250 MHz Band)

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)
40 MHz Channel					
5190.0	--	--	--	--	--
10380.0	62.6	49.6	62.6	49.5	68.3
15570.0	63.5	50.9	63.2	50.8	68.3
20760.0	61.1	48.3	61.1	48.4	68.3
25950.0	63.7	50.7	63.2	50.7	68.3
5200.0	--	--	--	--	--
10460.0	62.7	49.8	62.1	49.7	68.3
15690.0	63.0	50.1	63.1	50.0	68.3
20920.0	61.3	47.8	60.6	47.7	68.3
26150.0	63.9	51.1	63.8	51.0	68.3
Band Edges					
5150.0	47.7	35.3	49.1	36.1	54.0
5350.0	48.4	35.8	49.0	36.1	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 13 Transmitter Radiated Emission (802.11n, 5725-5850 MHz Band)

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)
40 MHz Channel					
5755.0	--	--	--	--	--
11510.0	63.7	50.8	63.8	50.6	68.3
17265.0	69.2	56.2	69.6	56.8	68.3
23020.0	61.9	48.9	62.4	48.9	68.3
28775.0	64.3	51.8	64.2	51.7	68.3
5795.0	--	--	--	--	--
11590.0	63.2	50.6	63.6	50.5	68.3
17385.0	69.5	56.7	69.6	56.8	68.3
23180.0	61.7	49.0	62.3	49.1	68.3
28975.0	65.1	52.8	65.8	52.8	68.3
Band Edges					
5725.0	50.3	37.4	74.0	58.8	78.2
5850.0	49.5	36.3	55.0	41.1	78.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 14 Transmitter Radiated Emission (802.11ac, 5150-5250 MHz Band)

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)
80 MHz Channel					
5210.0	--	--	--	--	--
10420.0	63.1	49.8	62.2	49.7	68.3
15630.0	62.9	49.8	62.2	49.7	68.3
20840.0	60.1	47.2	60.2	47.2	68.3
26050.0	63.3	50.3	63.3	50.5	68.3
Band Edges					
5150.0	48.8	35.4	49.5	36.7	54.0
5350.0	49.0	36.2	50.4	36.8	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 15 Transmitter Radiated Emission (802.11ac, 5725-5850 MHz Band)

Frequency in MHz	Horizontal Peak (dB μ V/m)	Horizontal Average (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Average (dB μ V/m)	Limit @ 3m (dB μ V/m)
80 MHz Channel					
5755.0	--	--	--	--	--
11550.0	63.2	50.8	63.8	50.6	68.3
17325.0	70.0	57.2	70.0	56.9	68.3
23100.0	59.4	46.3	59.4	46.4	68.3
28875.0	59.4	46.4	59.2	46.4	68.3
Band Edges					
5725.0	75.6	37.8	74.4	57.8	78.2
5850.0	50.7	37.2	71.2	53.6	78.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 16 Transmitter Antenna Port Conducted Power and Emissions (Chain 0)

Frequency MHz	Conducted Antenna Port Peak / Average Output Power (Watts)	99% Occupied Bandwidth (kHz)	Peak Power Spectral Density (dBm)
20 MHz Mode 802.11a			
5180	0.005 / 0.001	16710	-2.5 dBm/1MHz
5200	0.005 / 0.001	16710	-1.5 dBm/1MHz
5240	0.006 / 0.001	16710	-1.4 dBm/1MHz
40 MHz Mode 802.11n			
5190	0.007 / 0.001	36000	-5.3 dBm/1MHz
5230	0.007 / 0.001	36000	-5.2 dBm/1MHz
80 MHz Mode 802.11ac			
5210	0.006 / 0.001	76950	-9.0 dBm/1MHz
20 MHz Mode 802.11a			
5745	0.054 / 0.012	16740	5.2 dBm/500kHz
5785	0.052 / 0.012	16710	5.4 dBm/500kHz
5825	0.055 / 0.012	16740	5.4 dBm/500kHz
40 MHz Mode 802.11n			
5755	0.096 / 0.016	36150	2.7 dBm/500kHz
5795	0.095 / 0.015	36150	2.8 dBm/500kHz
80 MHz Mode 802.11ac			
5775	0.101 / 0.014	77100	-1.1 dBm/500kHz

Table 17 Transmitter Antenna Port Conducted Power and Emissions (Chain 1)

Frequency MHz	Conducted Antenna Port Peak / Average Output Power (Watts)	99% Occupied Bandwidth (kHz)	Peak Power Spectral Density (dBm)
20 MHz Mode 802.11a			
5180	0.004 / 0.001	16680	-1.4 dBm/1MHz
5200	0.005 / 0.001	16680	-1.1 dBm/1MHz
5240	0.005 / 0.001	16680	-0.7 dBm/1MHz
40 MHz Mode 802.11n			
5190	0.006 / 0.001	36075	-4.9 dBm/1MHz
5230	0.006 / 0.001	36000	-4.8 dBm/1MHz
80 MHz Mode 802.11ac			
5210	0.006 / 0.001	76800	-7.5 dBm/1MHz
20 MHz Mode 802.11a			
5745	0.054 / 0.012	16350	5.2 dBm/500kHz
5785	0.052 / 0.012	16350	5.4 dBm/500kHz
5825	0.055 / 0.012	16350	5.4 dBm/500kHz
40 MHz Mode 802.11n			
5755	0.108 / 0.016	36150	2.7 dBm/500kHz
5795	0.095 / 0.015	36150	2.8 dBm/500kHz
80 MHz Mode 802.11ac			
5775	0.100 / 0.014	77100	-1.1 dBm/500kHz

Table 18 Transmitter Antenna Port Conducted Power and Emissions (Chain 2)

Frequency MHz	Conducted Antenna Port Peak / Average Output Power (Watts)	99% Occupied Bandwidth (kHz)	Peak Power Spectral Density (dBm)
20 MHz Mode 802.11a			
5180	0.005 / 0.001	16680	-1.3 dBm/1MHz
5200	0.006 / 0.001	16680	-0.9 dBm/1MHz
5240	0.004 / 0.001	16680	-1.2 dBm/1MHz
40 MHz Mode 802.11n			
5190	0.007 / 0.001	36000	-3.3 dBm/1MHz
5230	0.006 / 0.001	36075	-4.3 dBm/1MHz
80 MHz Mode 802.11ac			
5210	0.008 / 0.001	76800	-6.5 dBm/1MHz
20 MHz Mode 802.11a			
5745	0.074 / 0.016	16650	6.5 dBm/500kHz
5785	0.070 / 0.015	16650	6.7 dBm/500kHz
5825	0.067 / 0.015	16680	6.9 dBm/500kHz
40 MHz Mode 802.11n			
5755	0.134 / 0.021	36150	3.5 dBm/500kHz
5795	0.117 / 0.019	36150	3.4 dBm/500kHz
80 MHz Mode 802.11ac			
5775	0.144 / 0.019	76950	-0.3 dBm/500kHz

Table 19 Transmitter Antenna Port Conducted Power and Emissions (Chain 3)

Frequency MHz	Conducted Antenna Port Peak / Average Output Power (Watts)	99% Occupied Bandwidth (kHz)	Peak Power Spectral Density (dBm)
20 MHz Mode 802.11a			
5180	0.003 / 0.001	16680	-4.3 dBm/1MHz
5200	0.003 / 0.001	16650	-3.7 dBm/1MHz
5240	0.004 / 0.001	16680	-3.6 dBm/1MHz
40 MHz Mode 802.11n			
5190	0.004 / 0.001	36000	-6.3 dBm/1MHz
5230	0.004 / 0.001	36075	-6.7 dBm/1MHz
80 MHz Mode 802.11ac			
5210	0.004 / 0.001	76800	-9.6 dBm/1MHz
20 MHz Mode 802.11a			
5745	0.053 / 0.013	16680	8.5 dBm/500kHz
5785	0.058 / 0.013	16680	9.1 dBm/500kHz
5825	0.048 / 0.012	16680	9.0 dBm/500kHz
40 MHz Mode 802.11n			
5755	0.095 / 0.016	36150	4.0 dBm/500kHz
5795	0.094 / 0.015	36150	3.6 dBm/500kHz
80 MHz Mode 802.11ac			
5775	0.114 / 0.015	76950	0.2 dBm/500kHz

Table 20 Transmitter Antenna Port Conducted Power and Emissions (Total All Chains)

Frequency MHz	Conducted Antenna Port Peak / Average Output Power (Watts)	99% Occupied Bandwidth (kHz)	Peak Power Spectral Density (dBm)
20 MHz Mode 802.11a			
5180	0.017 / 0.004	16,710	3.8 dBm/1MHz
5200	0.019 / 0.004	16,710	4.4 dBm/1MHz
5240	0.019 / 0.004	16,710	4.4 dBm/1MHz
40 MHz Mode 802.11n			
5190	0.025 / 0.004	36075	1.2 dBm/1M
5230	0.024 / 0.004	36075	0.9 dBm/1M
80 MHz Mode 802.11ac			
5210	0.024 / 0.003	76950	-2.0 dBm/1M
20 MHz Mode 802.11a			
5745	0.243 / 0.056	16,740	12.6 dBm/500kHz
5785	0.245 / 0.054	16,710	13.0 dBm/500kHz
5825	0.248 / 0.056	16,740	13.2 dBm/500kHz
40 MHz Mode 802.11n			
5755	0.434 / 0.069	36150	9.3 dBm/500kHz
5795	0.412 / 0.066	36150	9.2 dBm/500kHz
80 MHz Mode 802.11ac			
5775	0.475 / 0.064	77100	5.7 dBm/500kHz

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15.407 and Industry Canada RSS-247 Issue 2. The maximum measured average conducted power delivered to all antennas was 0.069-Watts. The maximum measured peak conducted power delivered to all antennas was 0.475-Watts. The minimum radiated harmonic emission margin provided -10.7 dB margin below requirements. General radiated emissions of EUT and supporting equipment provided -0.6 dB margin. There were no other significantly measurable emissions in the restricted bands other than those presented in this report. Other emissions were present with amplitudes at least 20 dB below the requirements. There were no other deviations or exceptions to the requirements.

Statement of Modifications and Deviations

No modifications to the EUT were required for the unit to demonstrate compliance with the 47CFR Part 15E and Industry Canada RSS-247 Issue 2 emissions requirements. There were no deviations or modifications to the specifications.

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D Rogers Labs Certificate of Accreditation

Annex A Measurement Uncertainty Calculations

The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16-4. Result of measurement uncertainty calculations are recorded below. Component and process variability of production devices similar to those tested may result in additional deviations. The manufacturer has the sole responsibility of continued compliance.

Measurement	Expanded Measurement Uncertainty $U_{(lab)}$
3 Meter Horizontal 0.009-1000 MHz Measurements	4.16
3 Meter Vertical 0.009-1000 MHz Measurements	4.33
3 Meter Measurements 1-18 GHz	5.14
3 Meter Measurements 18-40 GHz	5.16
10 Meter Horizontal Measurements 0.009-1000 MHz	4.15
10 Meter Vertical Measurements 0.009-1000 MHz	4.32
AC Line Conducted	1.75
Antenna Port Conducted power	1.17
Frequency Stability	1.00E-11
Temperature	1.6°C
Humidity	3%

Annex B Rogers Labs Test Equipment List

List of Test Equipment	Calibration	Date (m/d/y)	Due
Antenna: Schwarzbeck Model: BBA 9106/VHBB 9124 (9124-627)		5/2/2018	5/2/2019
Antenna: Schwarzbeck Model: VULP 9118 A (VULP 9118 A-534)		5/2/2018	5/2/2019
Antenna: EMCO 6509		10/24/2016	10/24/2018
Antenna: EMCO 3143 (9607-1277) 20-1200 MHz		5/2/2018	5/2/2019
Antenna: EMCO Dipole Set 3121C		2/23/2018	2/23/2019
Antenna: C.D. B-101		2/23/2018	2/23/2019
Antenna: Solar 9229-1 & 9230-1		2/23/2018	2/23/2019
Cable: Belden 8268 (L3)		10/24/2017	10/24/2018
Cable: Time Microwave: 4M-750HF290-750		10/24/2017	10/24/2018
Frequency Counter: Leader LDC-825 (8060153)		5/2/2018	5/2/2019
Oscilloscope Scope: Tektronix 2230		2/23/2018	2/23/2019
Wattmeter: Bird 43 with Load Bird 8085		2/23/2018	2/23/2019
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140		2/23/2018	2/23/2019
R.F. Generator: SMB100A6 s/n 100623		5/2/2018	5/2/2019
R.F. Generator: SBMBV100A s/n: 260771		5/2/2018	5/2/2019
R.F. Generators: HP 606A, HP 8614A, HP 8640B		2/23/2018	2/23/2019
R.F. Power Amp 65W Model: 470-A-1010		2/23/2018	2/23/2019
R.F. Power Amp 50W M185- 10-501		2/23/2018	2/23/2019
R.F. Power Amp A.R. Model: 10W 1010M7		2/23/2018	2/23/2019
R.F. Power Amp EIN Model: A301		2/23/2018	2/23/2019
LISN: Compliance Eng. Model 240/20		5/2/2018	15/50/19
LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08		5/2/2018	5/2/2019
Audio Oscillator: H.P. 201CD		2/23/2018	2/23/2019
ESD Test Set 2010i		2/23/2018	2/23/2019
Oscilloscope Scope: Tektronix MDO 4104		2/23/2018	2/23/2019
EMC Transient Generator HVT TR 3000		2/23/2018	2/23/2019
AC Power Source (Ametech, California Instruments)		2/23/2018	2/23/2019
Fast Transient Burst Generator Model: EFT/B-101		2/23/2018	2/23/2019
Field Intensity Meter: EFM-018		2/23/2018	2/23/2019
KEYTEK Ecat Surge Generator		2/23/2018	2/23/2019
ESD Simulator: MZ-15		2/23/2018	2/23/2019
Shielded Room not required			

Annex C Rogers Qualifications

Scot D. Rogers, Engineer

Rogers Labs, Inc.

Mr. Rogers has approximately 17 years' experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

Positions Held

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

Educational Background

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.

Scot D. Rogers

Scot D. Rogers

Annex D Rogers Labs Certificate of Accreditation

United States Department of Commerce
National Institute of Standards and Technology

NVLAP®

Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 200087-0

Rogers Labs, Inc.
Louisburg, KS

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).*

2018-02-21 through 2019-03-31
Effective Dates




For the National Voluntary Laboratory Accreditation Program

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 2

Mikrotikls SIA

S/N's: 8736081F0F4D/813, 873608E3B390/813

Model: RB4011iGS+5HacQ2HnD-IN-US IC: 7442A-4011G5Q2

Test #: 180515

FCC ID: TV74011GS-5HQ2HD

Test to: 47CFR, 15.407, RSS-247

Date: July 31, 2018

File: Mikrotikls RB4011iGS NII TstRpt 180515 r2 Page 114 of 114