


### 802.11n-HT40 Out-of-Band Emissions- Ant 0 / Ant 0 + 1

#### Channel 03 (2422MHz)

##### 100kHz PSD reference Level



##### Low Band Edge

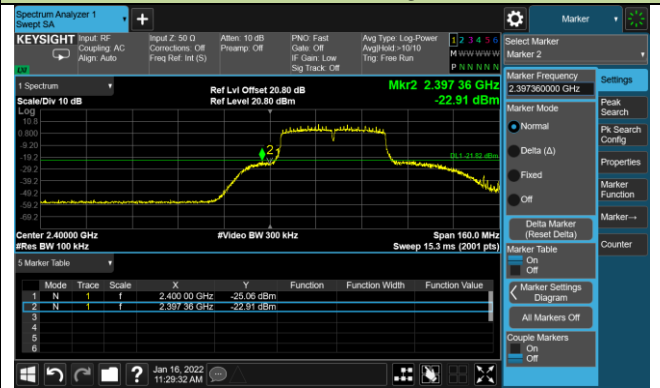

##### Spurious Emission



#### Channel 06 (2437MHz)

##### 100kHz PSD reference Level




##### Spurious Emission




### Channel 09 (2452MHz)

#### 100kHz PSD reference Level

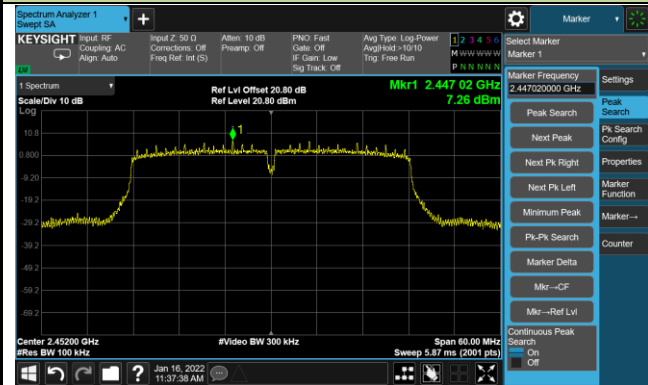

#### High Band Edge

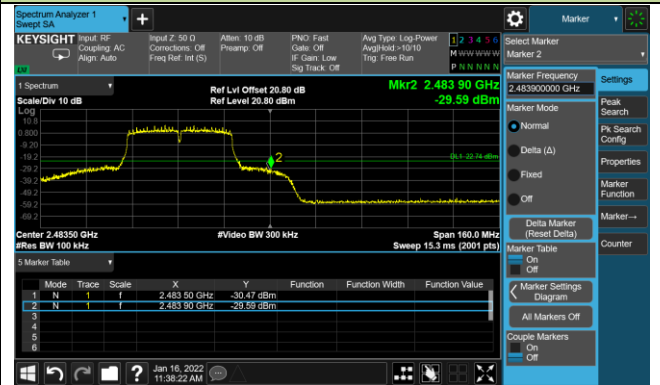

#### Spurious Emission



### 802.11b Out-of-Band Emissions - Ant 1 / Ant 0 + 1

#### Channel 01 (2412MHz)

##### 100kHz PSD reference Level



##### Low Band Edge




##### Spurious Emission




#### Channel 06 (2437MHz)

##### 100kHz PSD reference Level

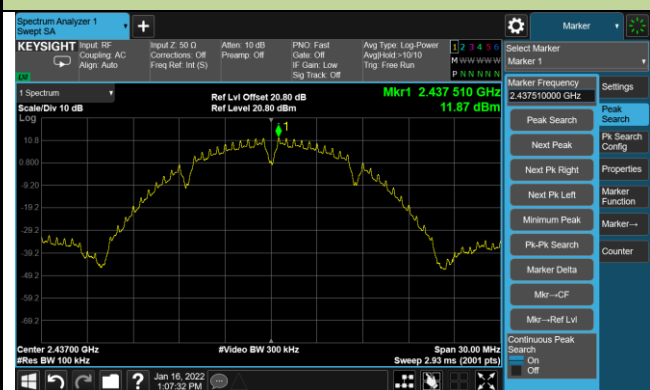

##### Spurious Emission




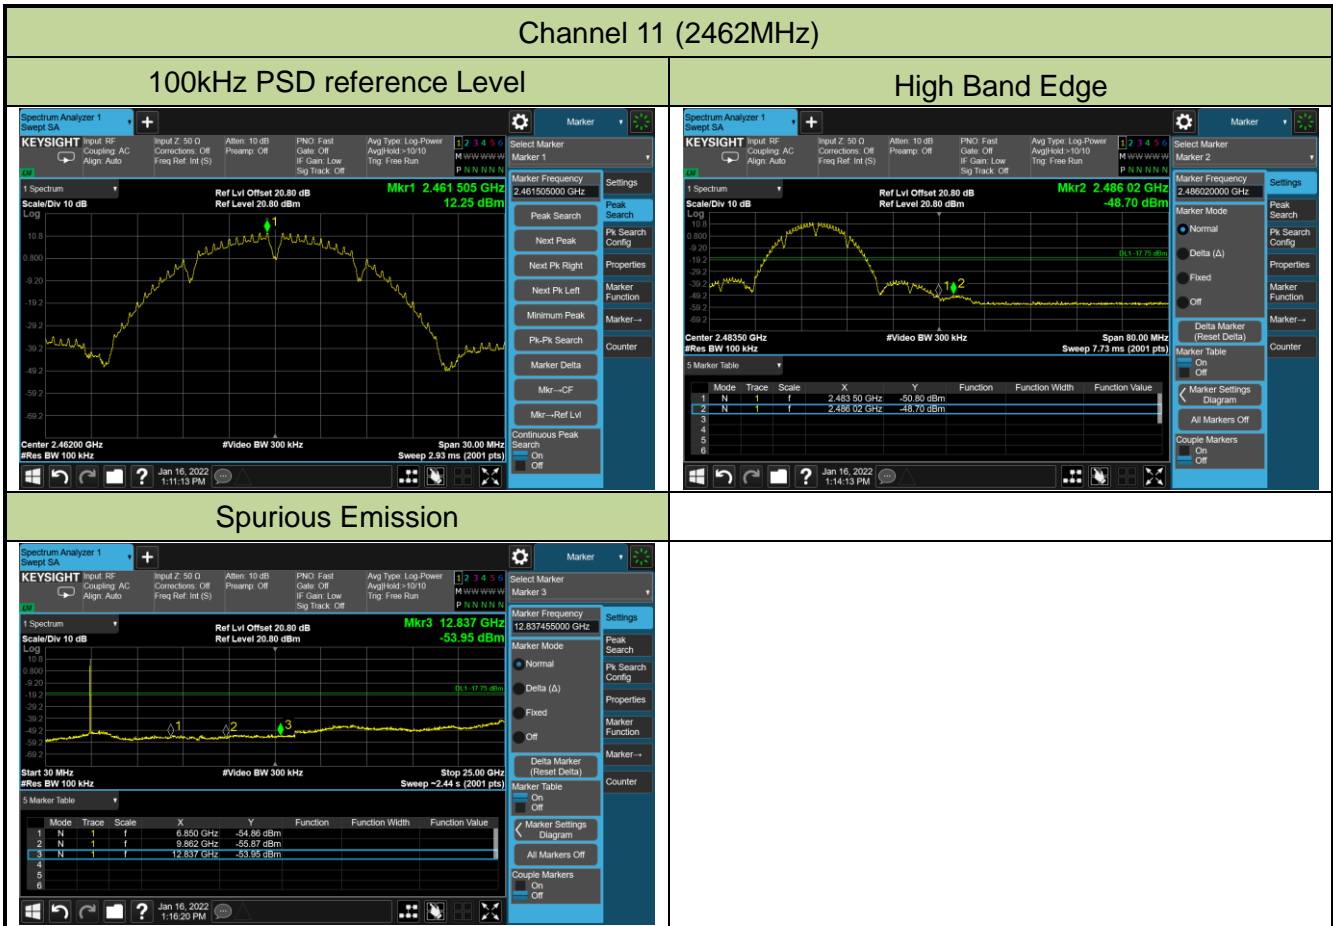


### 802.11g Out-of-Band Emissions- Ant 1 / Ant 0 + 1

#### Channel 01 (2412MHz)


##### 100kHz PSD reference Level

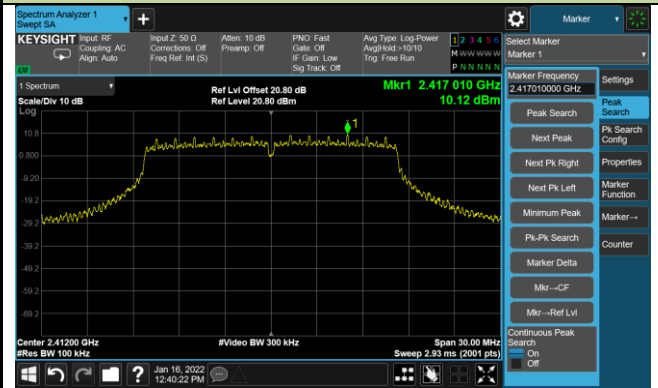

##### Low Band Edge

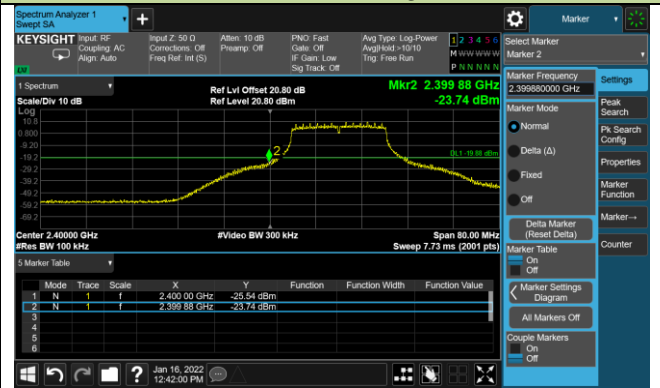


##### Spurious Emission

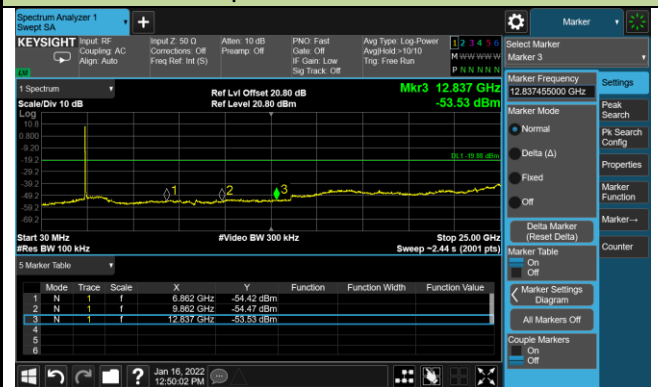

#### Channel 06 (2437MHz)

##### 100kHz PSD reference Level

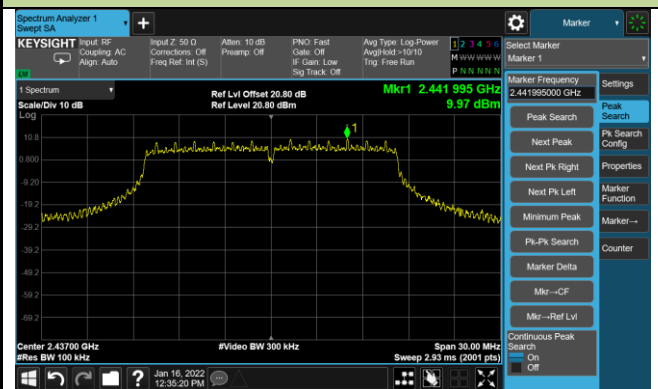

##### Spurious Emission







### 802.11n-HT20 Out-of-Band Emissions- Ant 1 / Ant 0 + 1

#### Channel 01 (2412MHz)

##### 100kHz PSD reference Level

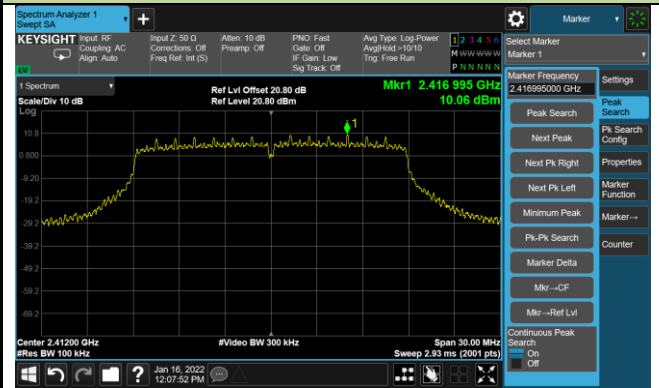

##### Low Band Edge

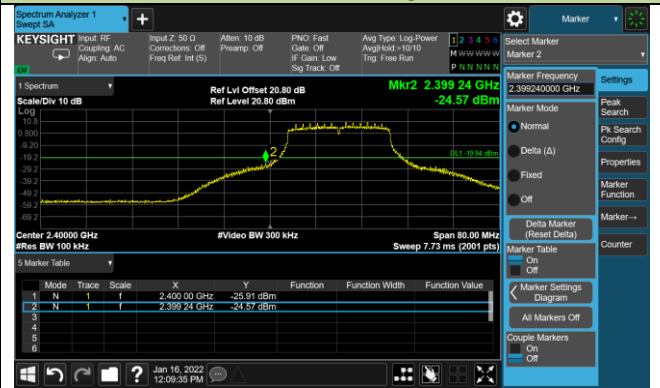


##### Spurious Emission




#### Channel 06 (2437MHz)

##### 100kHz PSD reference Level

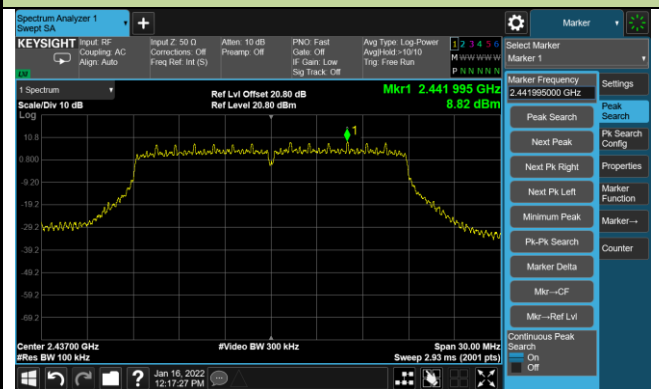

##### Spurious Emission



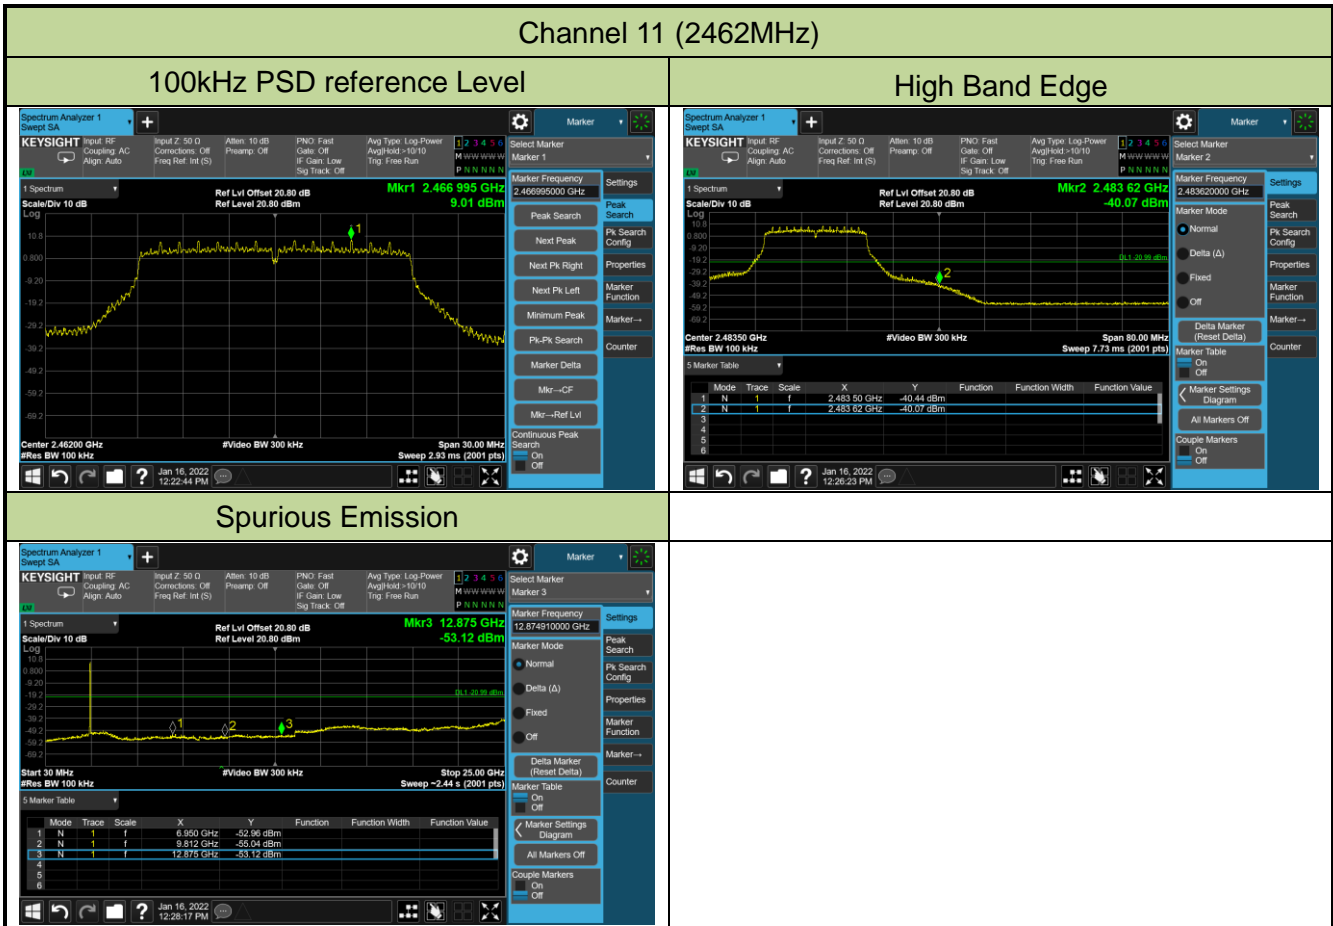




## 802.11n-HT40 Out-of-Band Emissions- Ant 1 / Ant 0 + 1

## Channel 03 (2422MHz)

## 100kHz PSD reference Level



## Low Band Edge

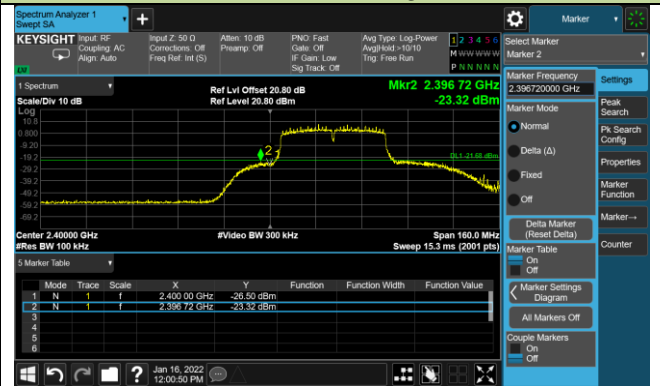


## Spurious Emission



## Channel 06 (2437MHz)

## 100kHz PSD reference Level

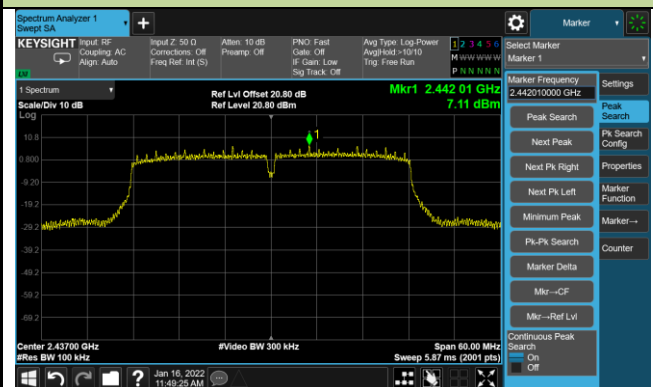

## Spurious Emission




### Channel 09 (2452MHz)

#### 100kHz PSD reference Level



#### High Band Edge

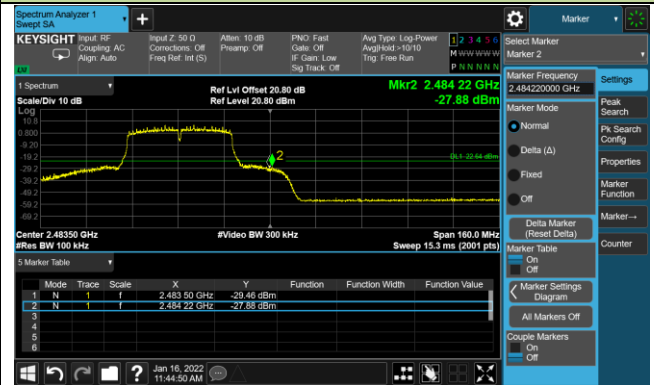

#### Spurious Emission



**A.6 Radiated Spurious Emission Test Result**

Test Site	SIP-AC1	Test Engineer	Barry Wu
Test Date	2022/01/20	Test Mode:	802.11b
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4825.0	57.9	-9.9	48.0	74.0	-26.0	Peak	Horizontal
	8310.0	48.0	-4.9	43.1	74.0	-30.9	Peak	Horizontal
	15713.5	44.4	3.9	48.3	74.0	-25.7	Peak	Horizontal
	4825.0	60.1	-9.9	50.2	54.0	-3.8	Average	Vertical
	8140.0	47.8	-5.1	42.7	74.0	-31.3	Peak	Vertical
	15807.0	43.6	4.8	48.4	74.0	-25.6	Peak	Vertical
06	4876.0	58.1	-9.6	48.5	74.0	-25.5	Peak	Horizontal
	12500.5	46.8	-1.9	44.9	74.0	-29.1	Peak	Horizontal
	15730.5	44.8	3.5	48.3	74.0	-25.7	Peak	Horizontal
	4876.0	63.2	-9.6	53.6	54.0	-0.4	Average	Vertical
	12500.5	47.3	-1.9	45.4	74.0	-28.6	Peak	Vertical
	16104.5	44.2	4.0	48.2	74.0	-25.8	Peak	Vertical
11	4927.0	60.9	-9.3	51.6	74.0	-22.4	Peak	Horizontal
	12500.5	50.4	-1.9	48.5	74.0	-25.5	Peak	Horizontal
	15926.0	45.1	5.4	50.5	74.0	-23.5	Peak	Horizontal
	4927.0	58.8	-9.3	49.5	74.0	-24.5	Peak	Vertical
	11973.5	49.2	-2.6	46.6	74.0	-27.4	Peak	Vertical
	17991.5	31.5	8.4	39.9	54.0	-14.1	Average	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Barry Wu
Test Date	2022/01/20	Test Mode:	802.11g
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4825.0	59.1	-9.9	49.2	74.0	-24.8	Peak	Horizontal
	12500.5	49.9	-1.9	48.0	74.0	-26.0	Peak	Horizontal
	15798.5	44.9	4.0	48.9	74.0	-25.1	Peak	Horizontal
	4825.0	55.2	-9.9	45.3	74.0	-28.7	Peak	Vertical
	12500.5	48.3	-1.9	46.4	74.0	-27.6	Peak	Vertical
	15586.0	45.8	4.5	50.3	74.0	-23.7	Peak	Vertical
06	4876.0	54.4	-9.6	44.8	54.0	-9.2	Average	Horizontal
	12500.5	51.0	-1.9	49.1	74.0	-24.9	Peak	Horizontal
	15696.5	45.9	4.0	49.9	74.0	-24.1	Peak	Horizontal
	4876.0	55.2	-9.6	45.6	74.0	-28.4	Peak	Vertical
	12500.5	48.5	-1.9	46.6	74.0	-27.4	Peak	Vertical
	15926.0	44.7	5.4	50.1	74.0	-23.9	Peak	Vertical
11	4927.0	60.2	-9.3	50.9	74.0	-23.1	Peak	Horizontal
	12500.5	50.9	-1.9	49.0	74.0	-25.0	Peak	Horizontal
	15722.0	45.6	3.7	49.3	74.0	-24.7	Peak	Horizontal
	4927.0	53.4	-9.3	44.1	74.0	-29.9	Peak	Vertical
	11710.0	48.5	-2.7	45.8	74.0	-28.2	Peak	Vertical
	15577.5	45.0	4.3	49.3	74.0	-24.7	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Barry Wu
Test Date	2022/01/20	Test Mode:	802.11n-HT20
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4825.0	60.4	-9.9	50.5	74.0	-23.5	Peak	Horizontal
	12500.5	50.1	-1.9	48.2	74.0	-25.8	Peak	Horizontal
	15705.0	44.5	4.0	48.5	74.0	-25.5	Peak	Horizontal
	4825.0	53.4	-9.9	43.5	74.0	-30.5	Peak	Vertical
	11200.0	47.5	-3.2	44.3	74.0	-29.7	Peak	Vertical
	15475.5	45.4	3.2	48.6	74.0	-25.4	Peak	Vertical
06	4876.0	60.1	-9.6	50.5	74.0	-23.5	Peak	Horizontal
	12500.5	50.0	-1.9	48.1	74.0	-25.9	Peak	Horizontal
	15807.0	43.9	4.8	48.7	74.0	-25.3	Peak	Horizontal
	4876.0	53.2	-9.6	43.6	74.0	-30.4	Peak	Vertical
	11786.5	47.7	-3.1	44.6	74.0	-29.4	Peak	Vertical
	15807.0	43.4	4.8	48.2	74.0	-25.8	Peak	Vertical
11	4927.0	58.2	-9.3	48.9	74.0	-25.1	Peak	Horizontal
	12500.5	50.5	-1.9	48.6	74.0	-25.4	Peak	Horizontal
	15424.5	45.0	3.3	48.3	74.0	-25.7	Peak	Horizontal
	4927.0	52.9	-9.3	43.6	74.0	-30.4	Peak	Vertical
	12415.5	47.3	-2.1	45.2	74.0	-28.8	Peak	Vertical
	15807.0	43.6	4.8	48.4	74.0	-25.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	SIP-AC1	Test Engineer	Barry Wu
Test Date	2022/01/20	Test Mode:	802.11n-HT40
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	4842.0	59.0	-9.7	49.3	74.0	-24.7	Peak	Horizontal
	12500.5	50.2	-1.9	48.3	74.0	-25.7	Peak	Horizontal
	15577.5	44.0	4.3	48.3	74.0	-25.7	Peak	Horizontal
	4842.0	53.8	-9.7	44.1	74.0	-29.9	Peak	Vertical
	11922.5	47.2	-2.6	44.6	74.0	-29.4	Peak	Vertical
	15917.5	44.1	4.9	49.0	74.0	-25.0	Peak	Vertical
06	4876.0	58.5	-9.6	48.9	74.0	-25.1	Peak	Horizontal
	12500.5	49.7	-1.9	47.8	74.0	-26.2	Peak	Horizontal
	15926.0	44.0	5.4	49.4	74.0	-24.6	Peak	Horizontal
	4876.0	53.6	-9.6	44.0	74.0	-30.0	Peak	Vertical
	11659.0	46.8	-2.6	44.2	74.0	-29.8	Peak	Vertical
	15586.0	44.6	4.5	49.1	74.0	-24.9	Peak	Vertical
09	4901.5	57.6	-9.4	48.2	74.0	-25.8	Peak	Horizontal
	12500.5	50.2	-1.9	48.3	74.0	-25.7	Peak	Horizontal
	15807.0	43.8	4.8	48.6	74.0	-25.4	Peak	Horizontal
	4901.5	51.9	-9.4	42.5	74.0	-31.5	Peak	Vertical
	12509.0	47.1	-1.8	45.3	74.0	-28.7	Peak	Vertical
	15696.5	44.5	4.0	48.5	74.0	-25.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**The Result of Radiated Emission below 1GHz:**

Site: SIP-AC3	Test Date: 2022/01/24
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC3_VULB 9168 _30-1000MHz	Polarity: Horizontal
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2437MHz	

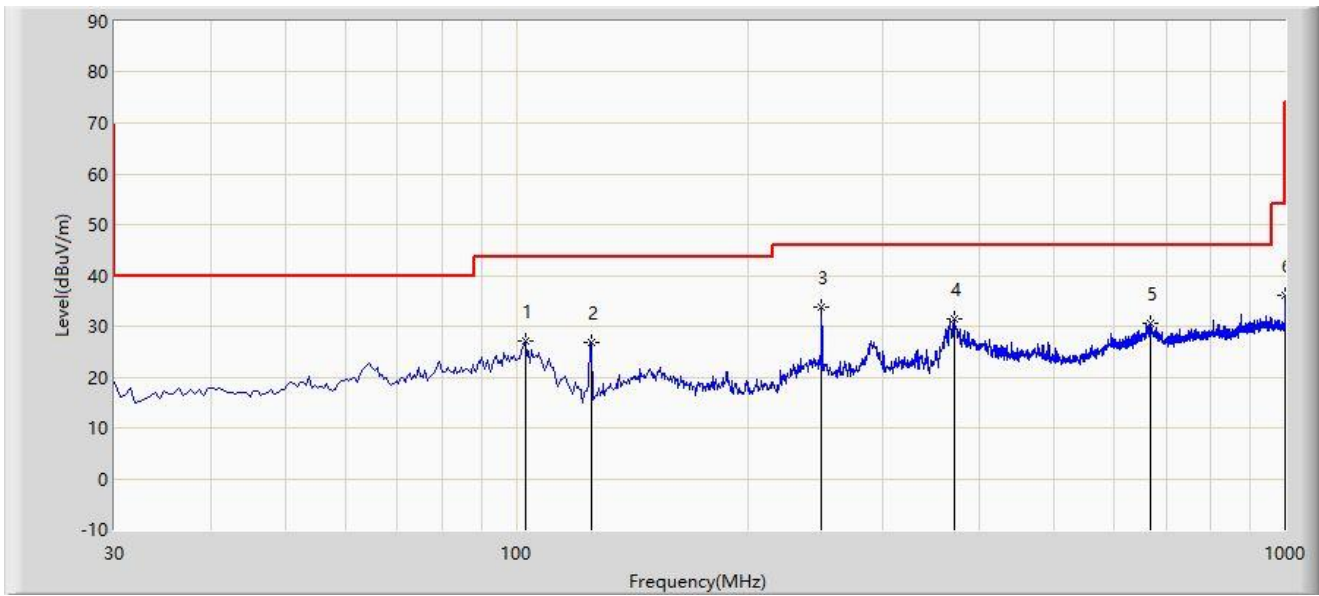


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1			102.750	27.006	13.022	-16.494	43.500	13.984	PK
2			125.060	26.869	10.535	-16.631	43.500	16.334	PK
3		*	249.705	33.759	16.872	-12.241	46.000	16.886	PK
4			370.955	31.470	11.116	-14.530	46.000	20.354	PK
5			667.775	30.547	4.178	-15.453	46.000	26.368	PK
6			1000.000	35.988	6.021	-18.012	54.000	29.967	PK

Note 1: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz ~ 30MHz, 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site: SIP-AC3	Test Date: 2022/01/24
Limit: FCC_Part15.209_RE(3m)	Engineer: Stephen Dong
Probe: SIP-AC3_VULB 9168 _30-1000MHz	Polarity: Vertical
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2437MHz	

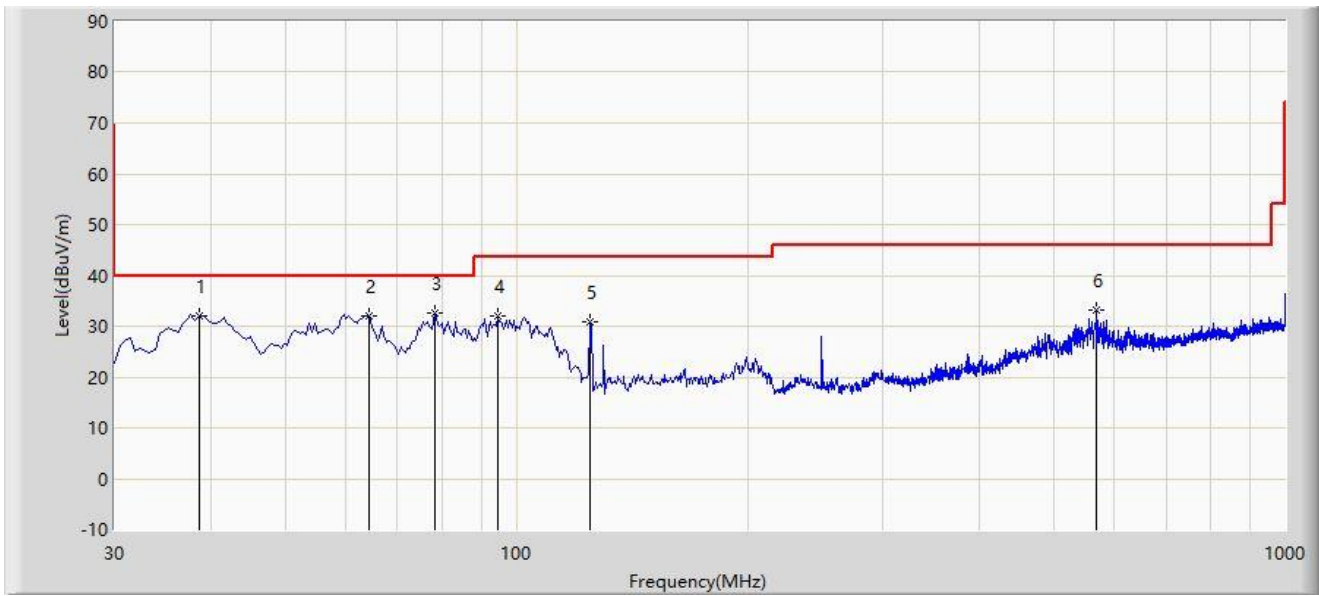

No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1			38.730	32.154	14.463	-7.846	40.000	17.691	PK
2			64.435	31.974	15.353	-8.026	40.000	16.621	PK
3		*	78.500	32.744	18.861	-7.256	40.000	13.883	PK
4			94.505	32.065	19.437	-11.435	43.500	12.629	PK
5			124.575	30.991	14.707	-12.509	43.500	16.284	PK
6			569.320	33.112	8.531	-12.888	46.000	24.581	PK

Note 1: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)


Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz ~ 30MHz, 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.



**A.7 Radiated Restricted Band Edge Test Result**

Site: SIP-AC1	Test Date: 2022/01/17 - 19:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2412MHz by 802.11b	

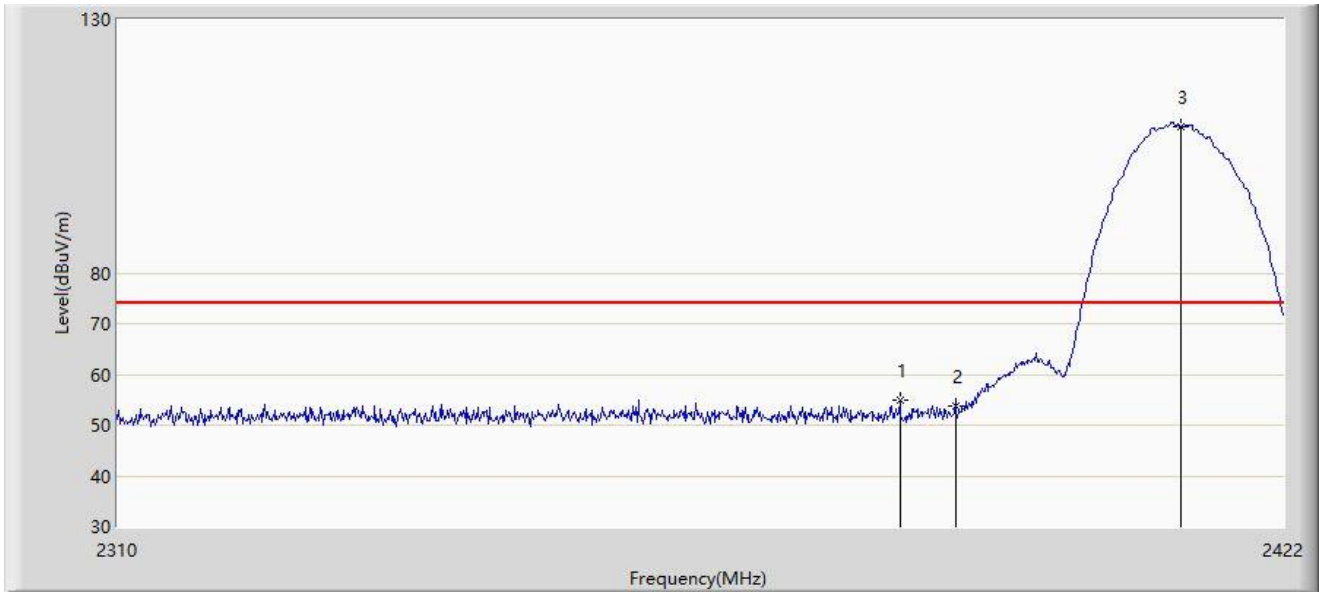


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2384.592	54.936	23.447	-19.064	74.000	31.489	PK
2			2390.000	53.652	22.063	-20.348	74.000	31.588	PK
3		*	2412.000	108.799	77.114	N/A	N/A	31.685	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 19:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2412MHz by 802.11b	

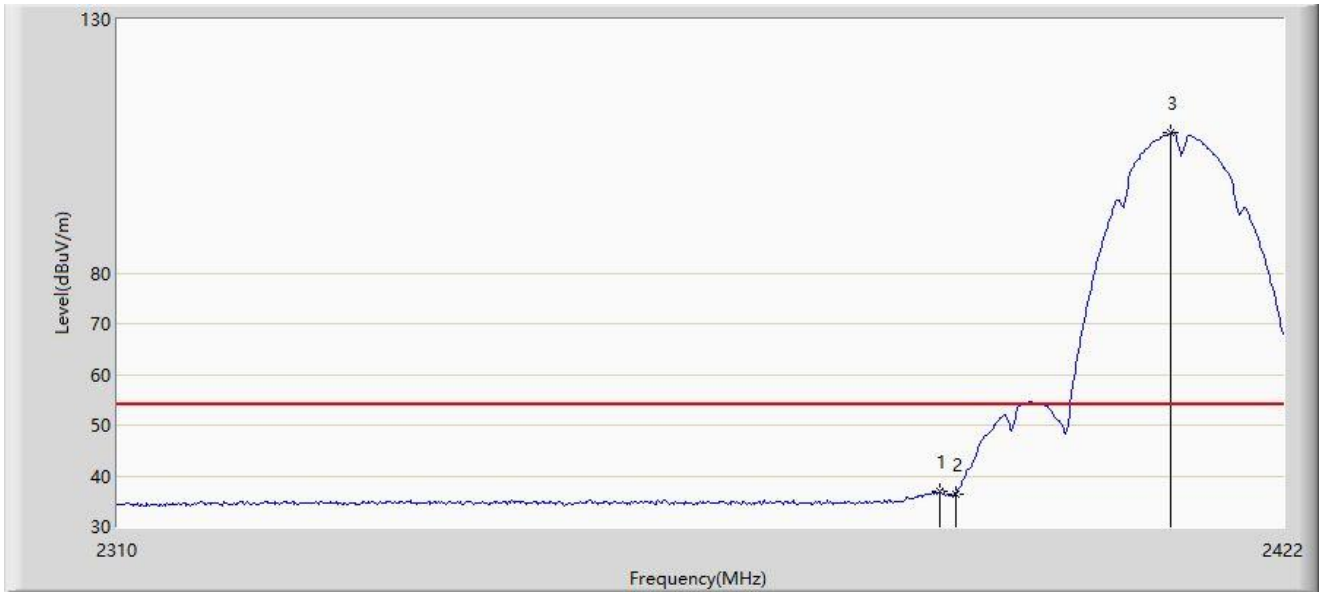


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2388.512	37.071	5.510	-16.929	54.000	31.561	AV
2			2390.000	36.475	4.886	-17.525	54.000	31.588	AV
3		*	2411.024	107.572	75.889	N/A	N/A	31.683	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 17:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Vertical
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2412MHz by 802.11b	

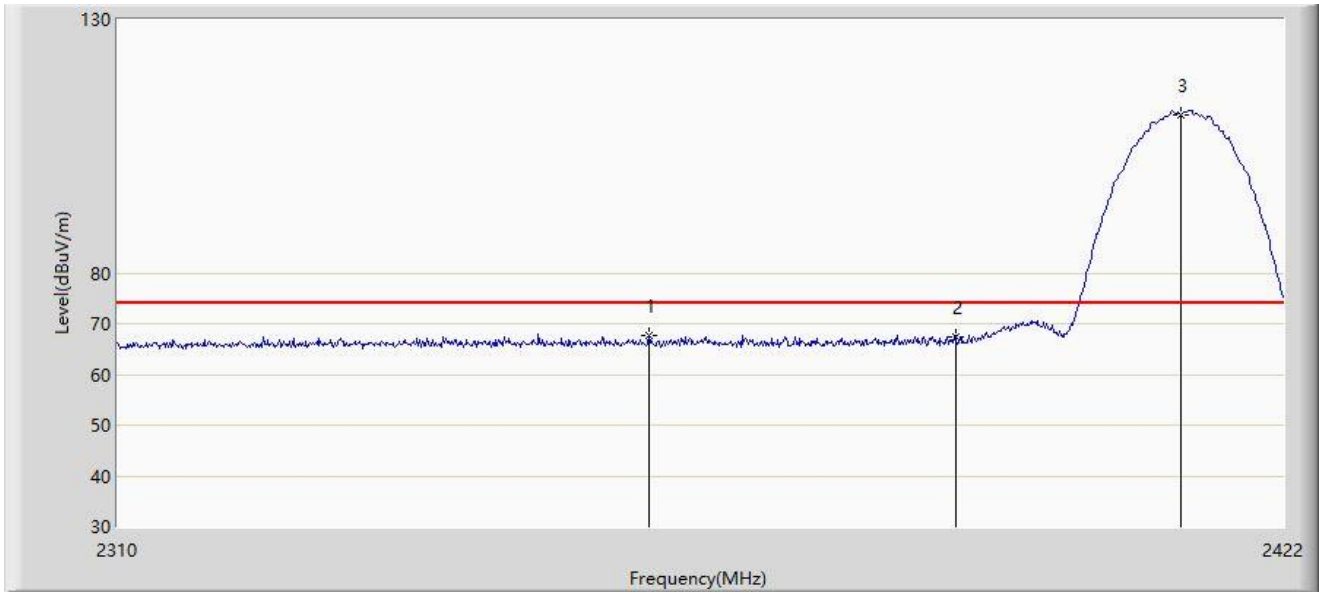


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2360.400	67.545	36.094	-6.455	74.000	31.451	PK
2			2390.000	67.339	35.750	-6.661	74.000	31.588	PK
3		*	2412.000	111.243	79.558	N/A	N/A	31.685	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 17:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Vertical
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2412MHz by 802.11b	

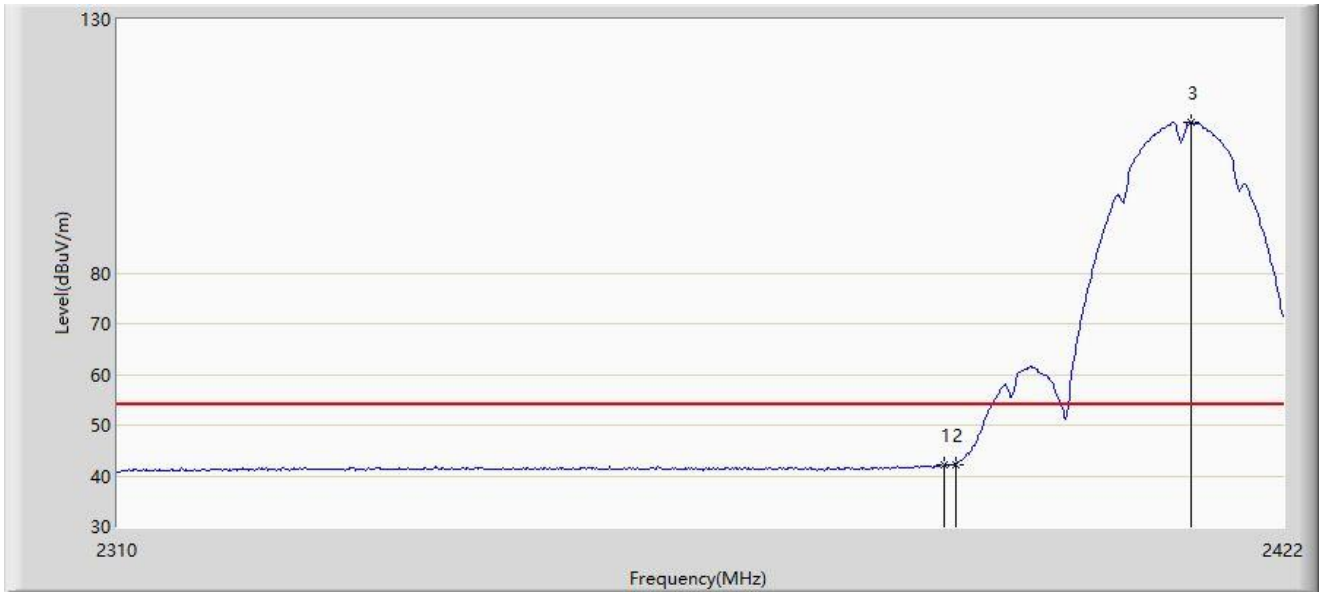


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2388.960	42.295	10.726	-11.705	54.000	31.570	AV
2			2390.000	42.282	10.693	-11.718	54.000	31.588	AV
3	X	*	2412.928	109.698	78.012	N/A	N/A	31.686	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 19:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2462MHz by 802.11b	

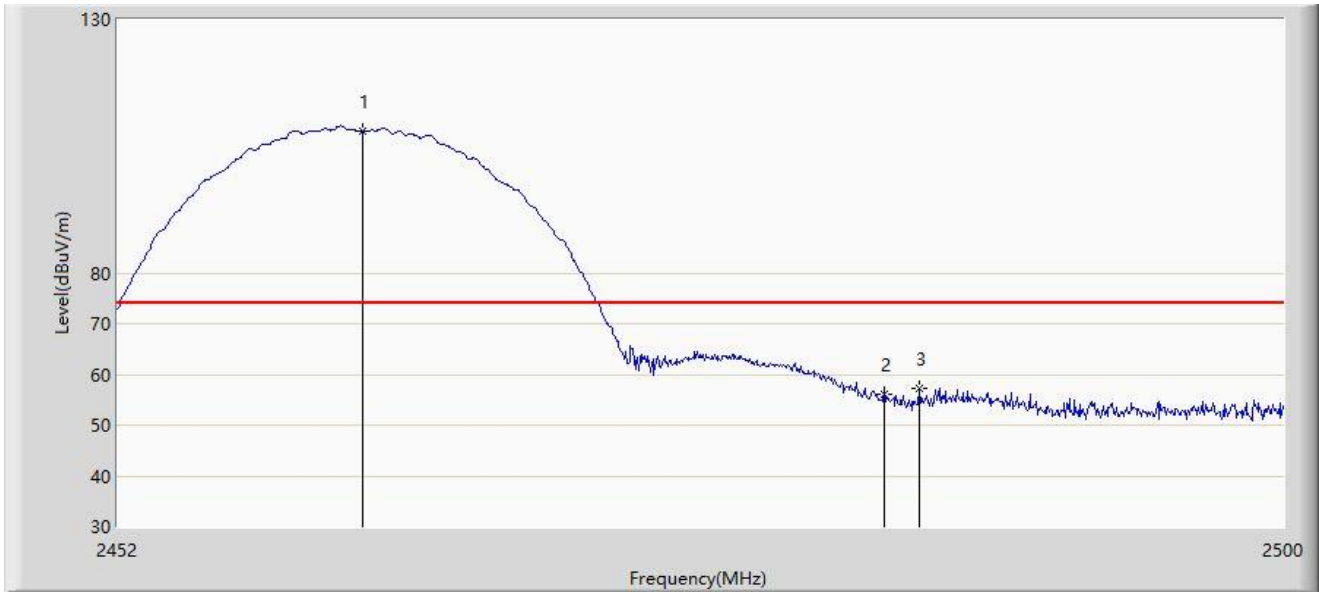


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2462.000	107.862	76.023	N/A	N/A	31.839	PK
2			2483.500	56.132	24.260	-17.868	74.000	31.872	PK
3			2484.928	57.239	25.367	-16.761	74.000	31.872	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 19:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2462MHz by 802.11b	

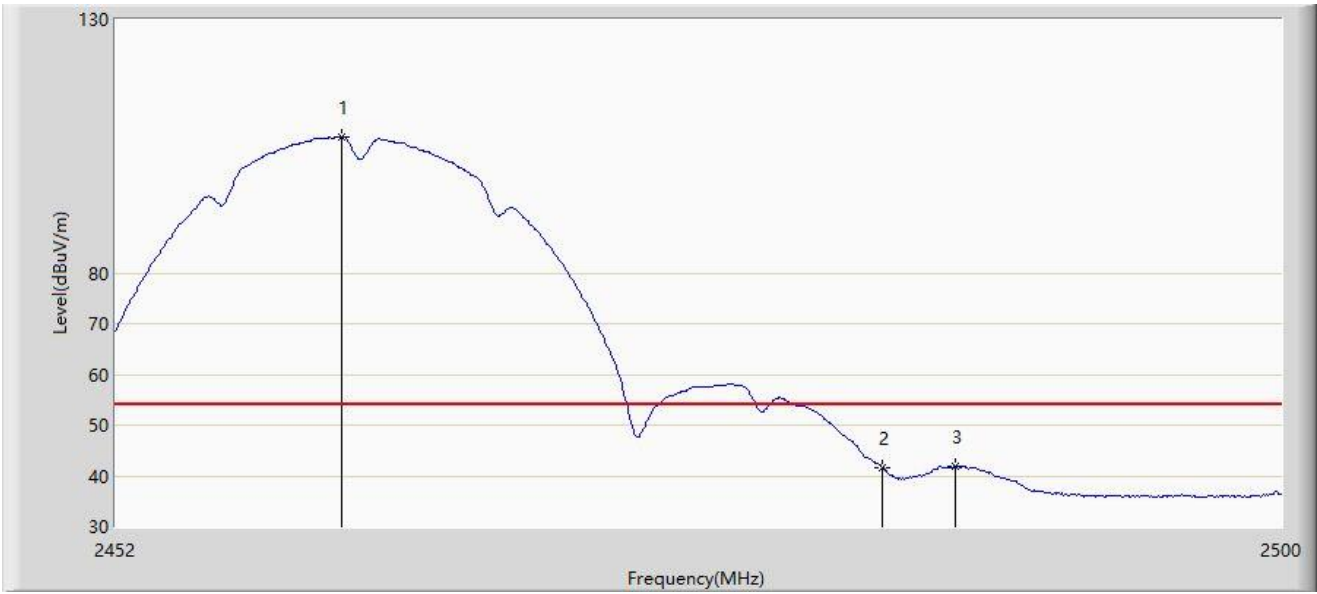


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2461.264	106.904	75.069	N/A	N/A	31.835	AV
2			2483.500	41.632	9.760	-12.368	54.000	31.872	AV
3			2486.464	41.811	9.940	-12.189	54.000	31.871	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 19:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Vertical
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2462MHz by 802.11b	

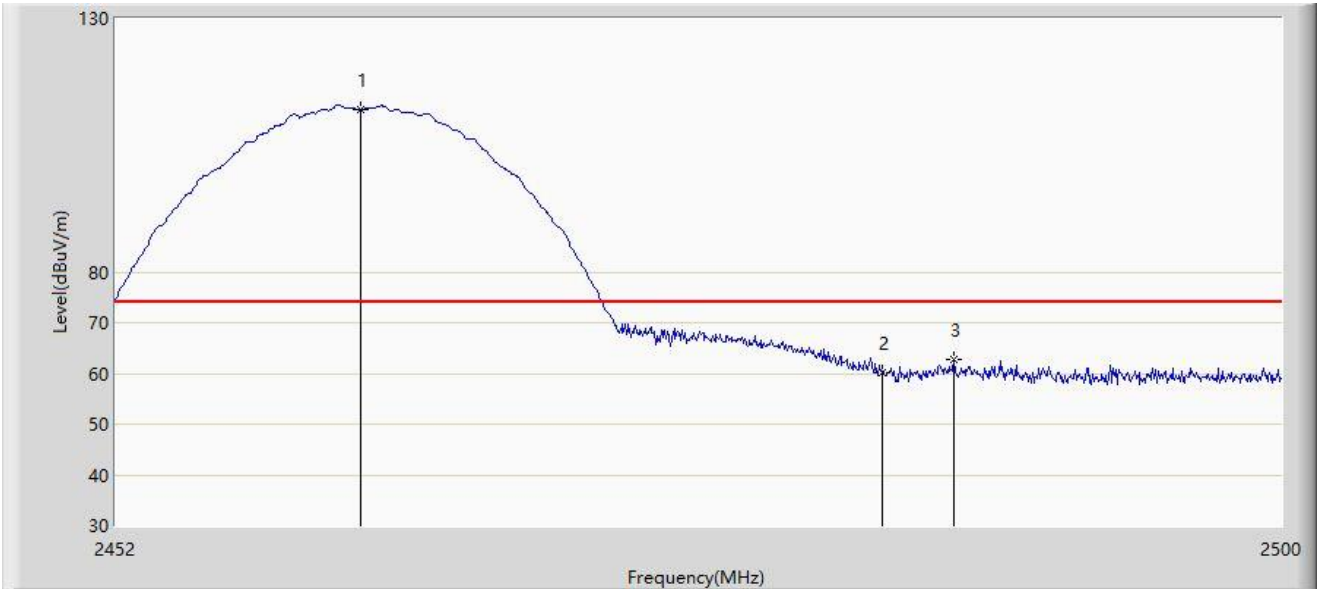


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		*	2462.000	112.019	80.180	N/A	N/A	31.839	PK
2			2483.500	60.266	28.394	-13.734	74.000	31.872	PK
3			2486.416	62.653	30.782	-11.347	74.000	31.871	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 19:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Vertical
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2462MHz by 802.11b	

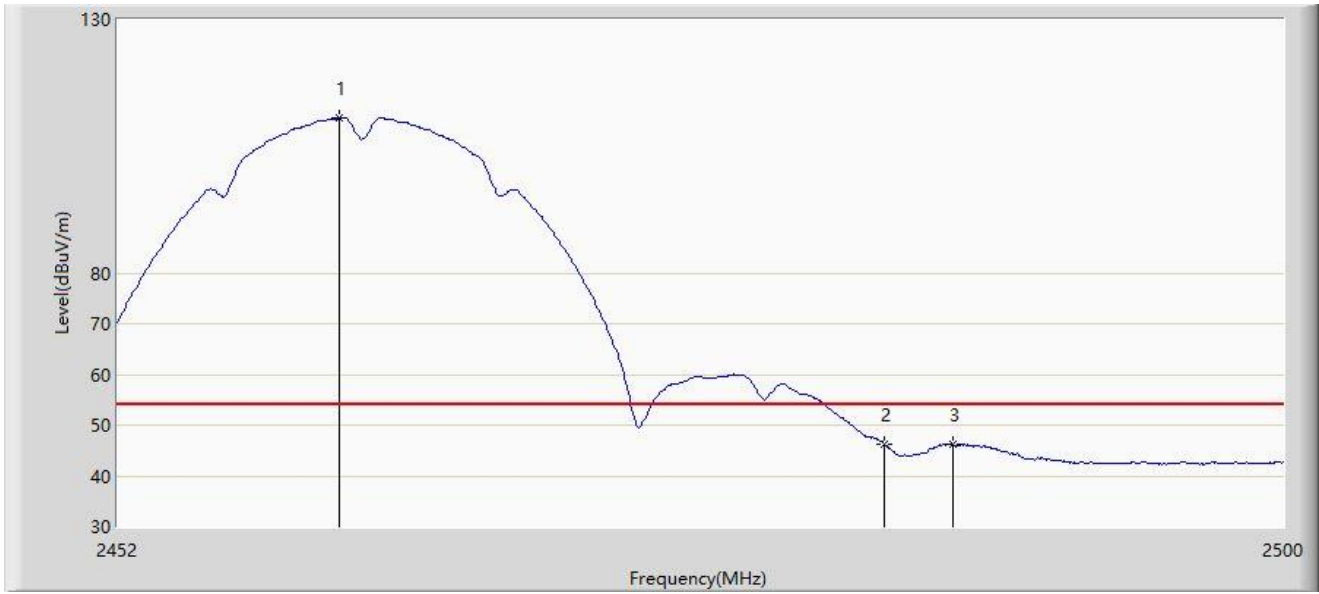


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	X	*	2461.072	110.606	78.772	N/A	N/A	31.834	AV
2			2483.500	46.226	14.354	-7.774	54.000	31.872	AV
3			2486.320	46.298	14.427	-7.702	54.000	31.872	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: SIP-AC1	Test Date: 2022/01/17 - 20:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2412MHz by 802.11g	

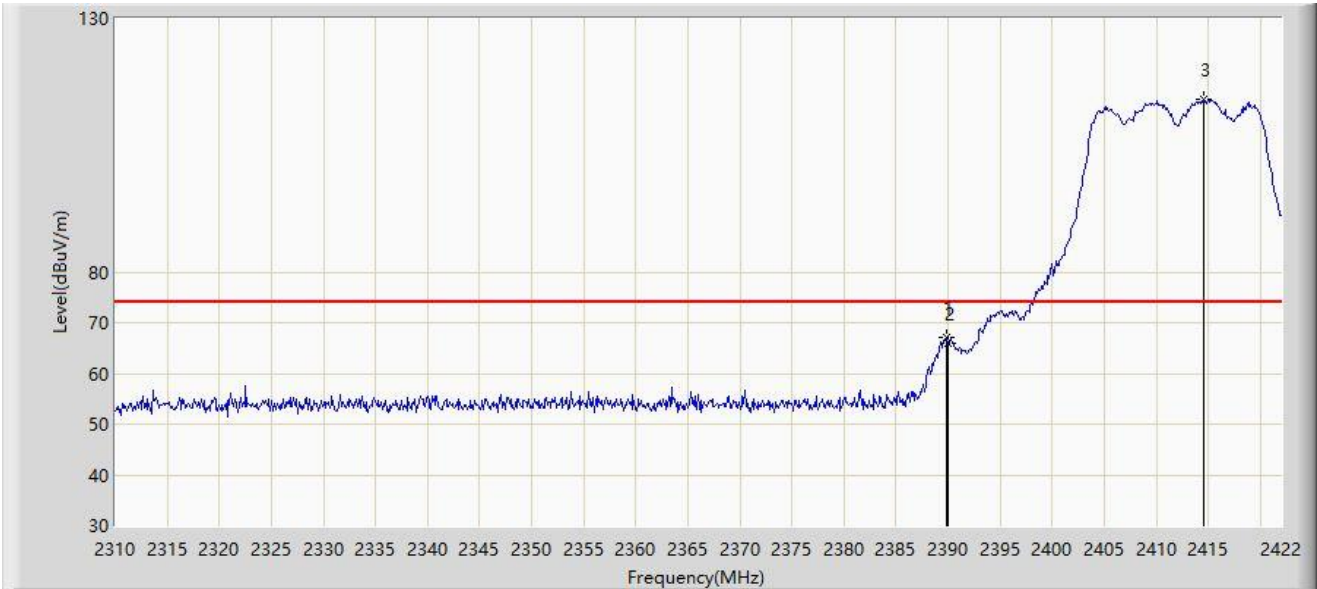


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2389.856	67.115	35.529	-6.885	74.000	31.586	PK
2			2390.000	65.844	34.255	-8.156	74.000	31.588	PK
3		*	2414.496	114.111	82.423	N/A	N/A	31.688	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 20:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2412MHz by 802.11g	

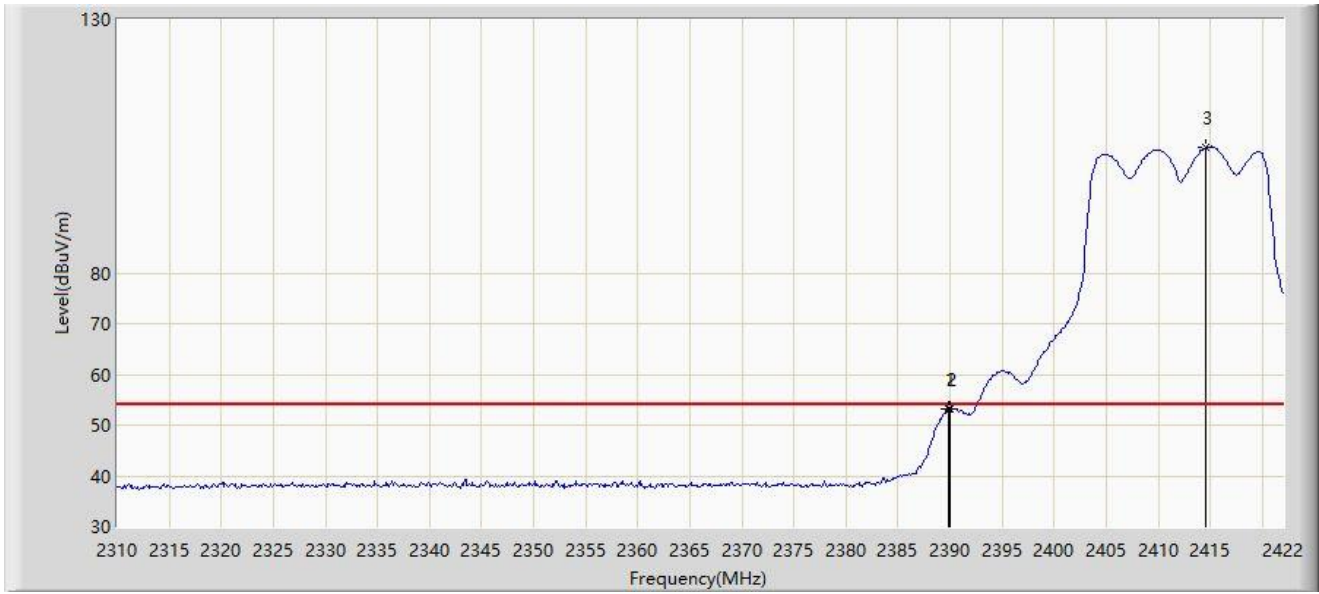


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2389.856	53.133	21.547	-0.867	54.000	31.586	AV
2			2390.000	53.052	21.463	-0.948	54.000	31.588	AV
3		*	2414.608	104.725	73.037	N/A	N/A	31.688	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 20:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Vertical
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2412MHz by 802.11g	

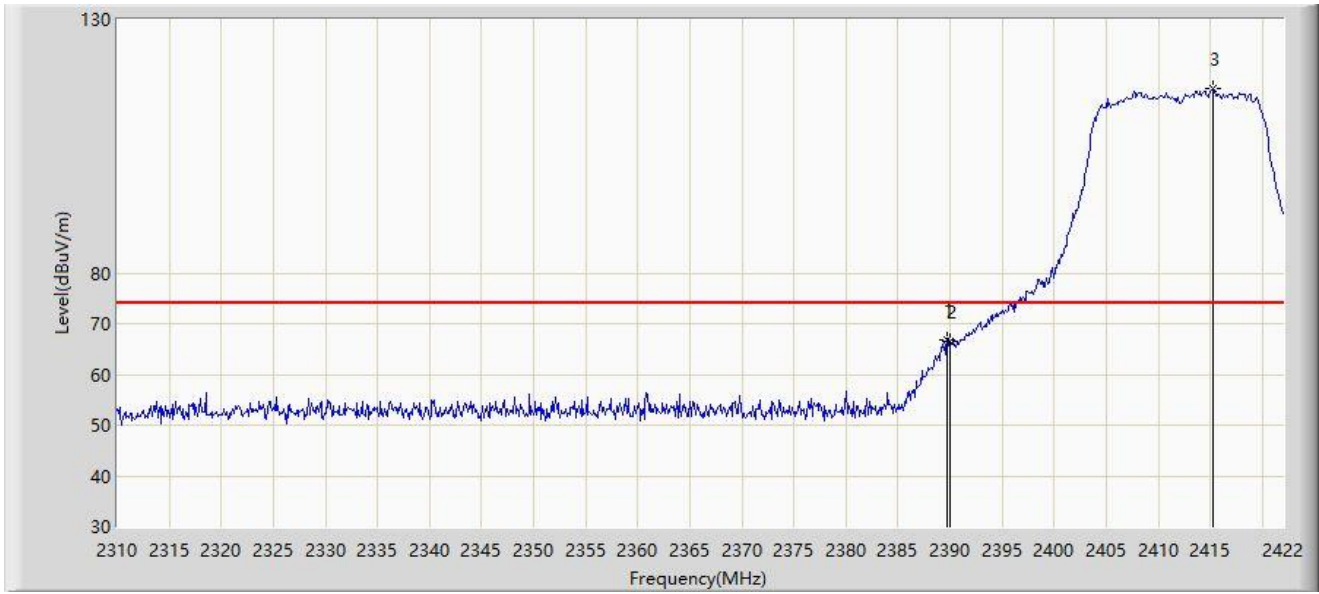


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2389.744	66.783	35.199	-7.217	74.000	31.584	PK
2			2390.000	66.402	34.813	-7.598	74.000	31.588	PK
3		*	2415.280	116.255	84.566	N/A	N/A	31.690	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 20:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Vertical
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2412MHz by 802.11g	

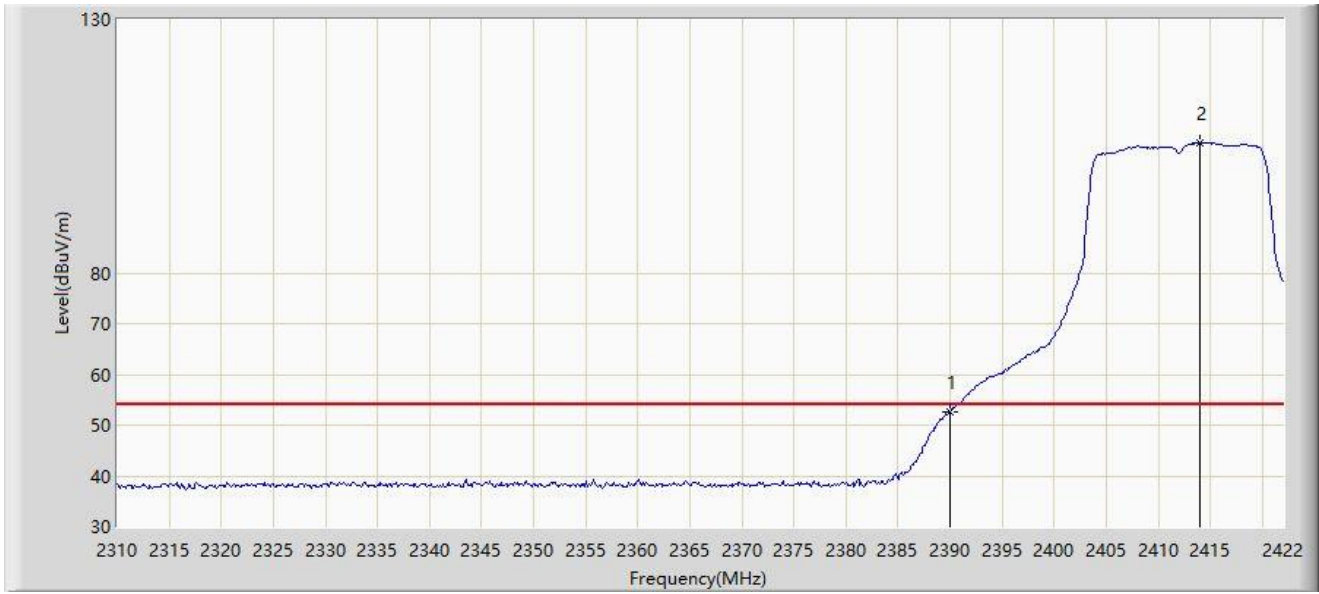


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1			2390.000	52.732	21.143	-1.268	54.000	31.588	AV
2		*	2413.936	105.705	74.018	N/A	N/A	31.687	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 20:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2462MHz by 802.11g	

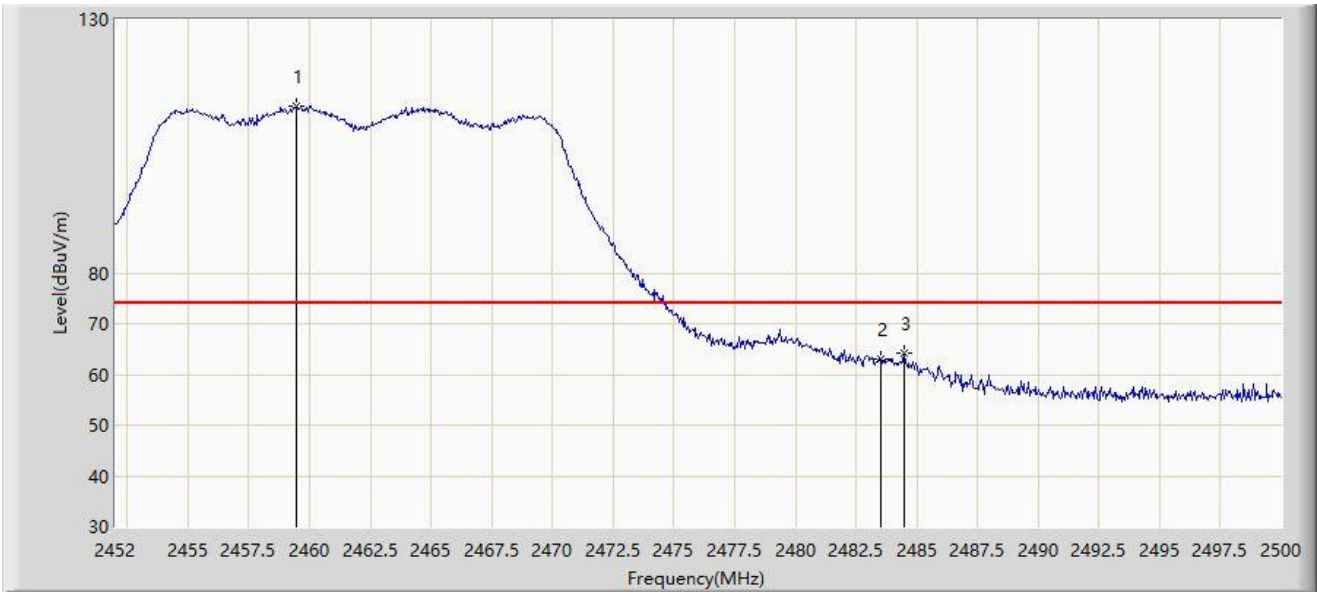


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2459.440	112.933	81.108	N/A	N/A	31.825	PK
2			2483.500	62.981	31.109	-11.019	74.000	31.872	PK
3			2484.496	64.079	32.207	-9.921	74.000	31.872	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 20:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2462MHz by 802.11g	

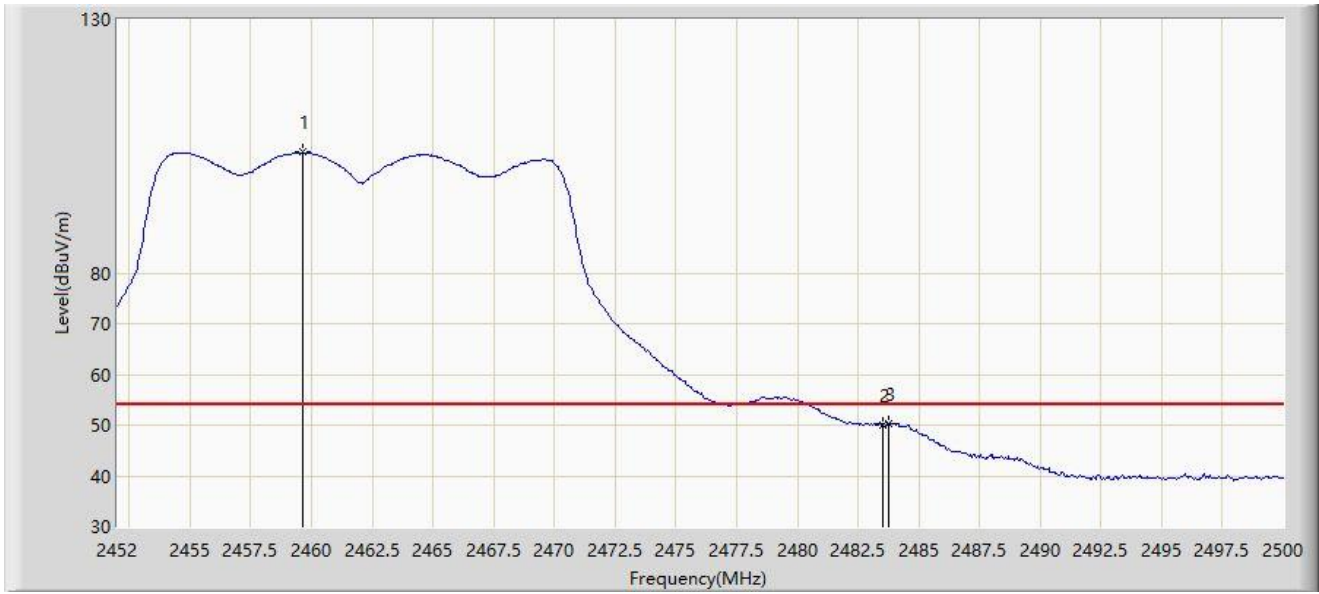


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		*	2459.632	103.820	71.994	N/A	N/A	31.827	AV
2			2483.500	50.140	18.268	-3.860	54.000	31.872	AV
3			2483.776	50.371	18.499	-3.629	54.000	31.872	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 20:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Vertical
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2462MHz by 802.11g	

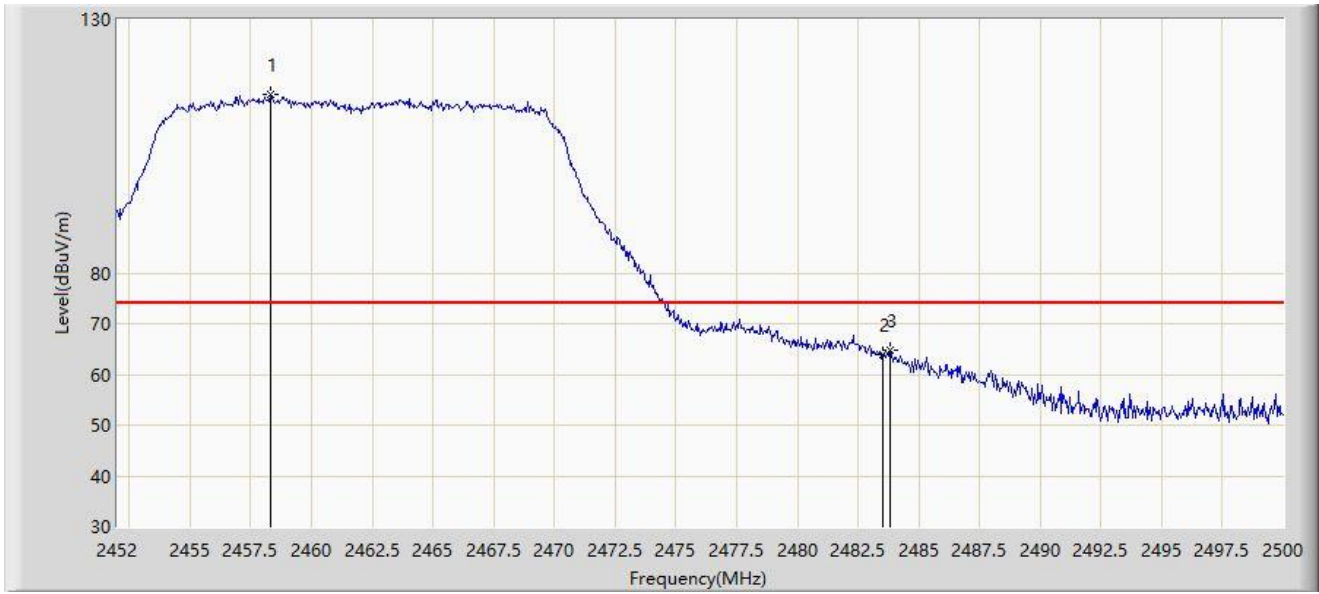

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2458.288	115.093	83.274	N/A	N/A	31.819	PK
2			2483.500	63.875	32.003	-10.125	74.000	31.872	PK
3			2483.824	64.884	33.012	-9.116	74.000	31.872	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 20:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Vertical
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2462MHz by 802.11g	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2457.808	104.742	72.925	N/A	N/A	31.817	AV
2			2483.500	52.783	20.911	-1.217	54.000	31.872	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: SIP-AC1	Test Date: 2022/01/17 - 21:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2412MHz by 802.11n-HT20	

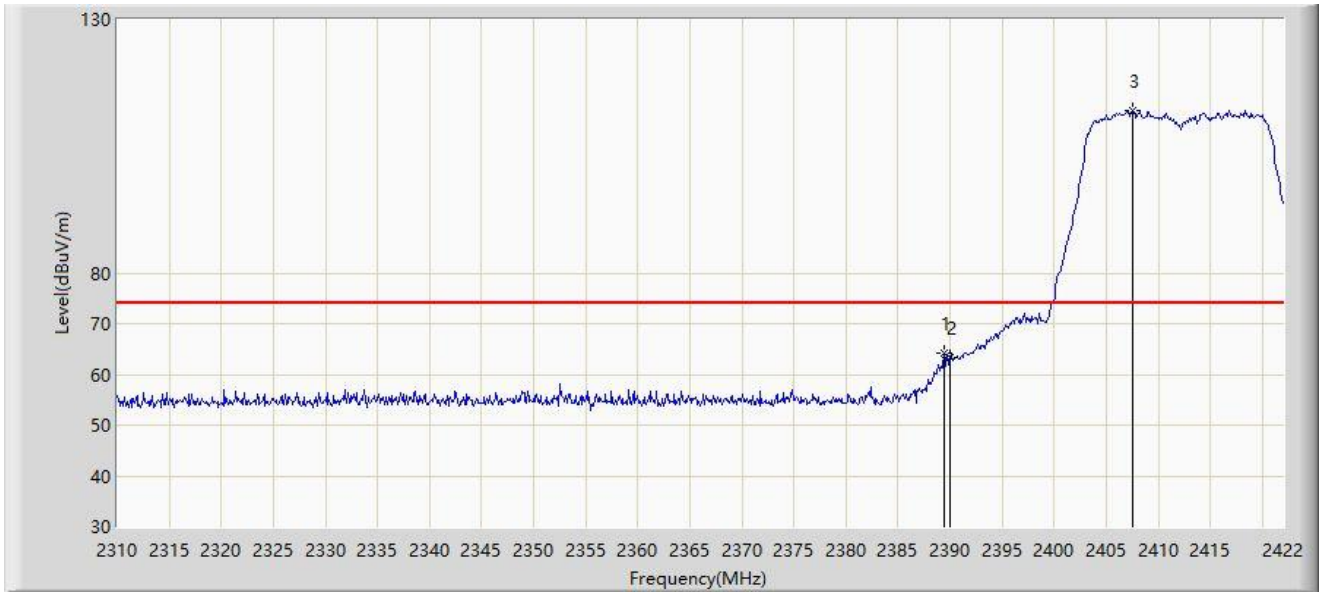


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2389.408	64.061	32.483	-9.939	74.000	31.577	PK
2			2390.000	63.443	31.854	-10.557	74.000	31.588	PK
3		*	2407.552	112.122	80.443	N/A	N/A	31.679	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 21:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2412MHz by 802.11n-HT20	

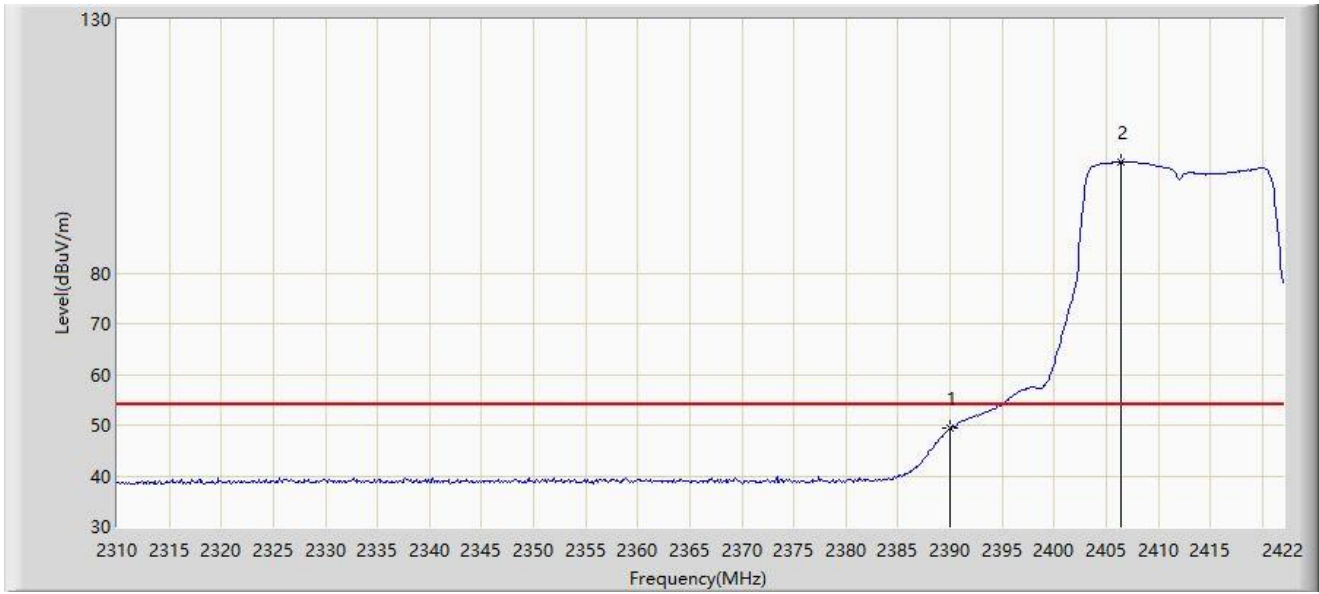


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1			2390.000	49.365	17.776	-4.635	54.000	31.588	AV
2		*	2406.432	101.924	70.246	N/A	N/A	31.678	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 21:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Vertical
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2412MHz by 802.11n-HT20	

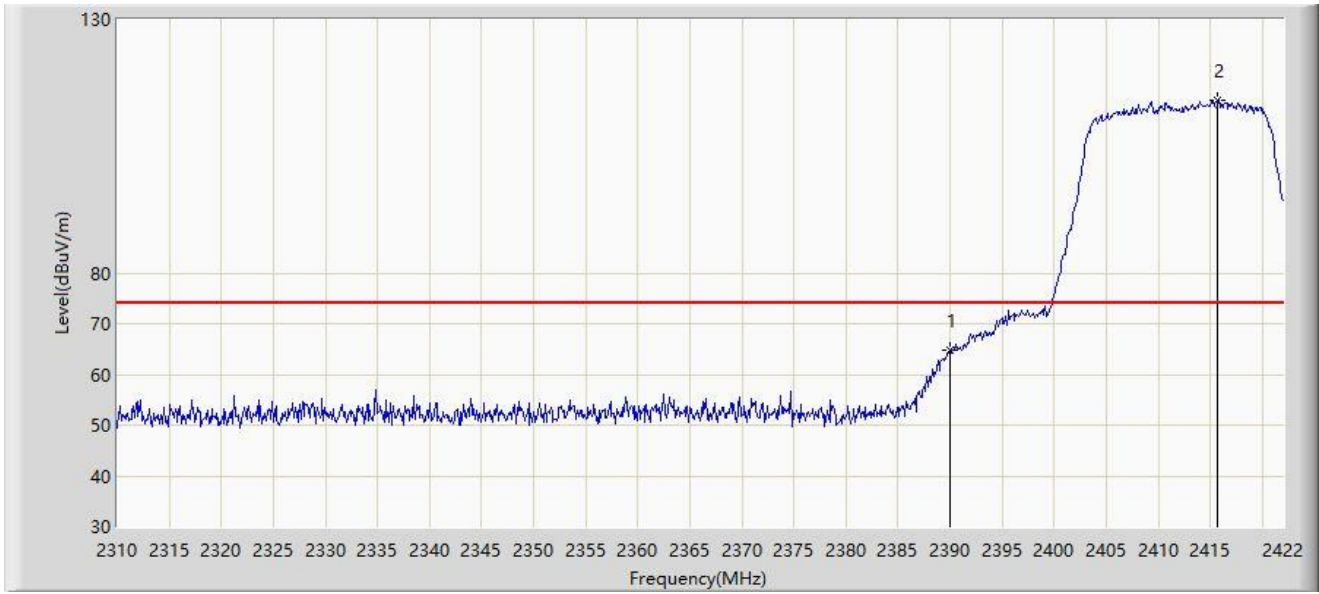


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2390.000	64.743	33.154	-9.257	74.000	31.588	PK
2		*	2415.728	114.139	82.449	N/A	N/A	31.690	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 21:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Vertical
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2412MHz by 802.11n-HT20	

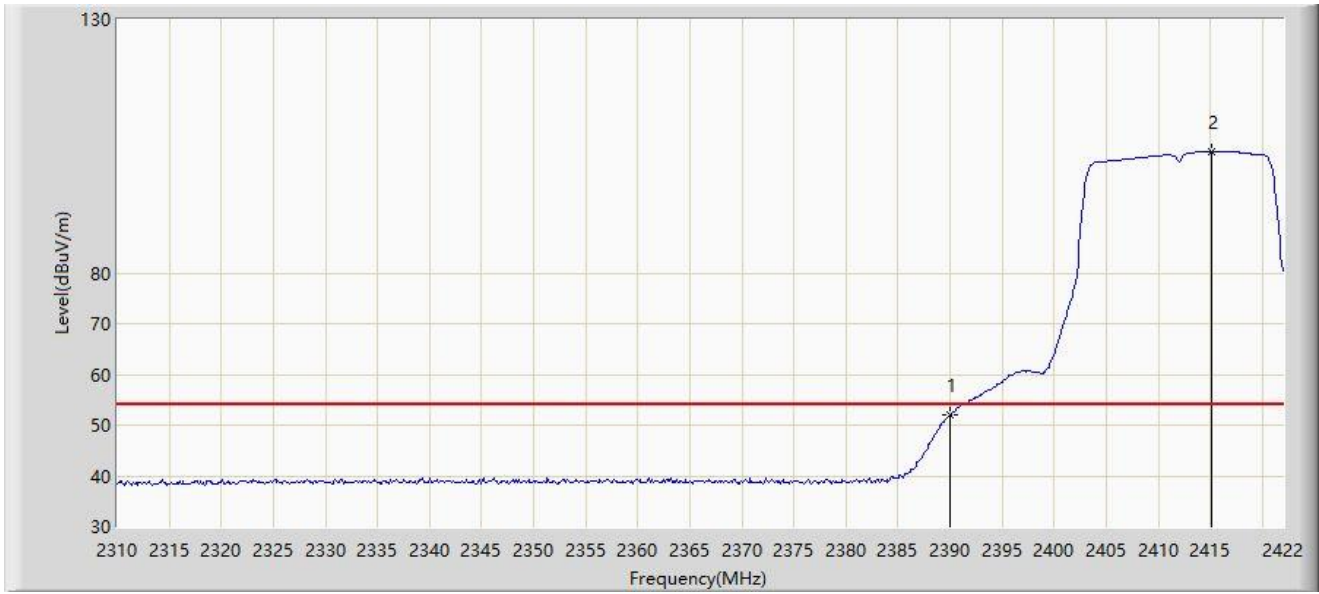


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2390.000	51.986	20.397	-2.014	54.000	31.588	AV
2		*	2415.056	103.980	72.291	N/A	N/A	31.689	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 21:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2462MHz by 802.11n-HT20	

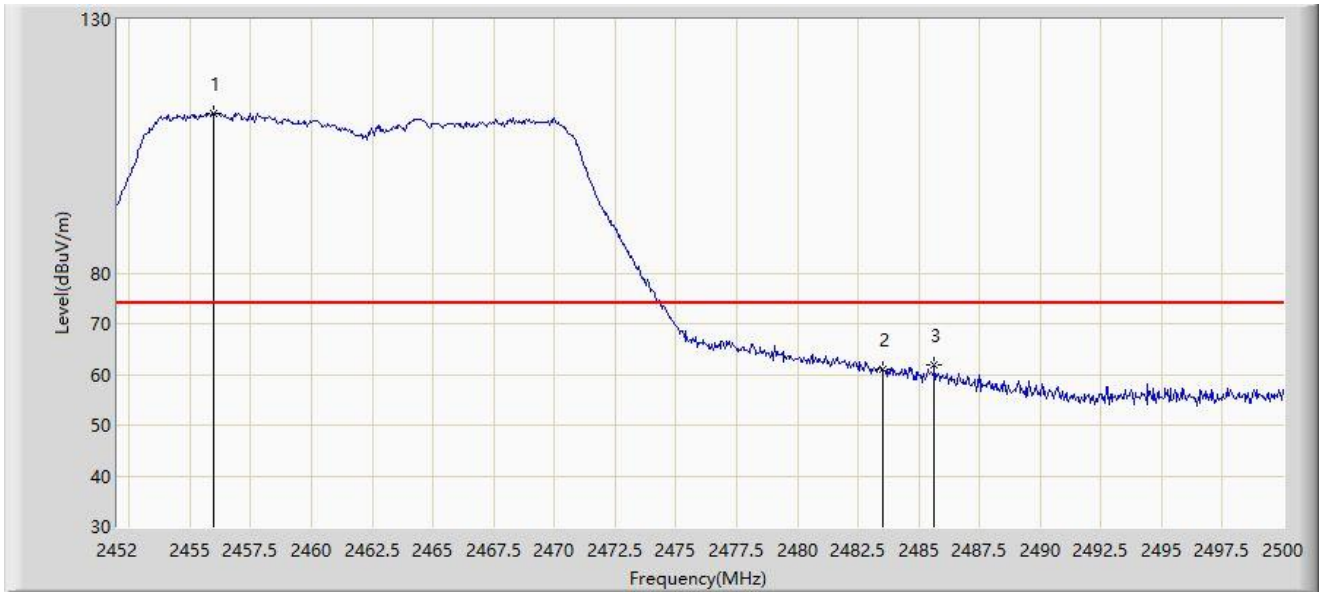


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2455.984	111.575	79.768	N/A	N/A	31.806	PK
2			2483.500	60.871	28.999	-13.129	74.000	31.872	PK
3			2485.648	61.742	29.870	-12.258	74.000	31.872	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 21:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2462MHz by 802.11n-HT20	

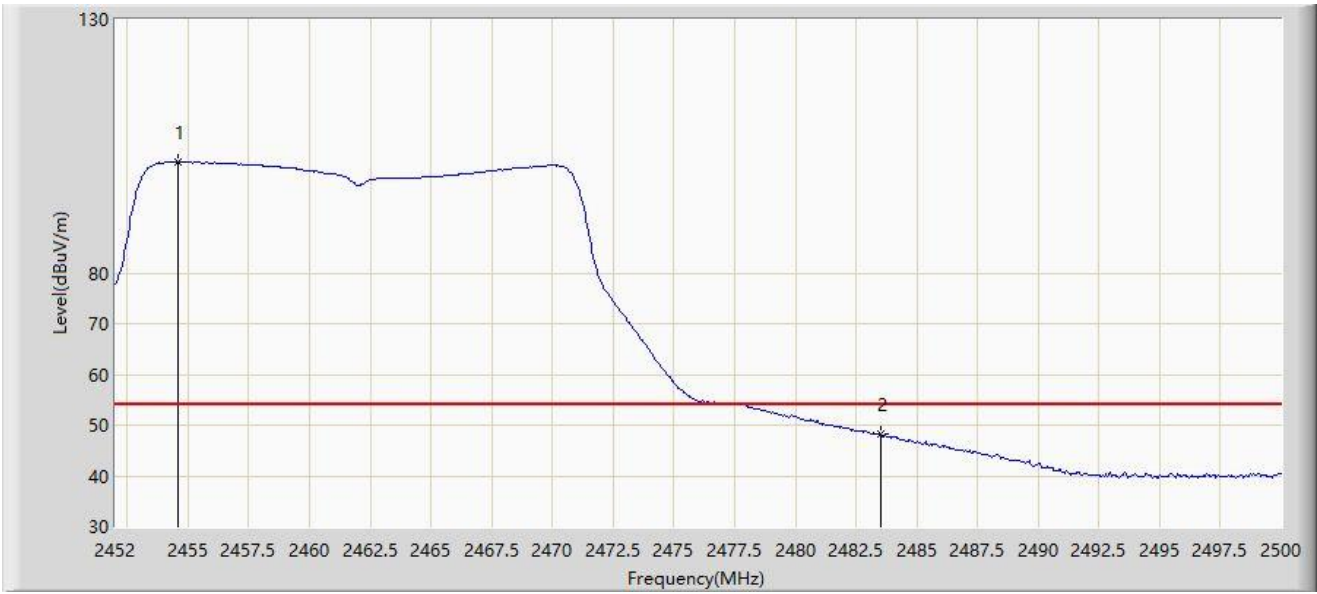


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		*	2454.592	101.806	70.007	N/A	N/A	31.799	AV
2			2483.500	48.184	16.312	-5.816	54.000	31.872	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 21:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Vertical
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2462MHz by 802.11n-HT20	

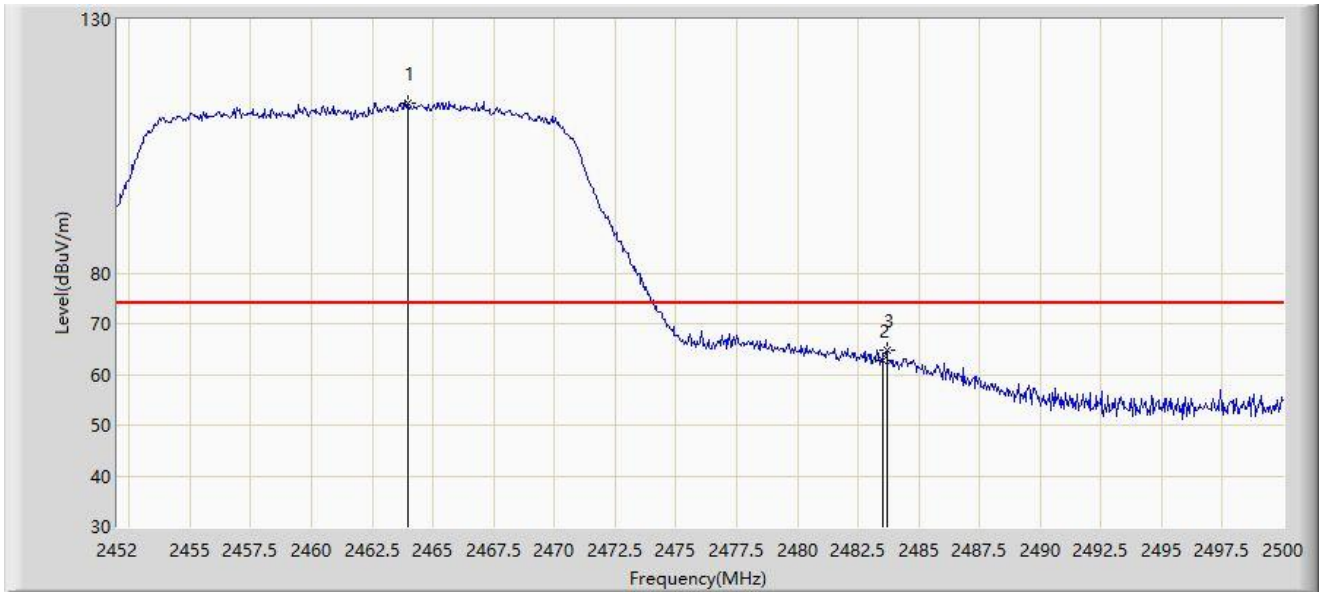


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2463.952	113.430	81.587	N/A	N/A	31.843	PK
2			2483.500	62.730	30.858	-11.270	74.000	31.872	PK
3			2483.680	64.921	33.049	-9.079	74.000	31.872	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 21:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Vertical
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2462MHz by 802.11n-HT20	

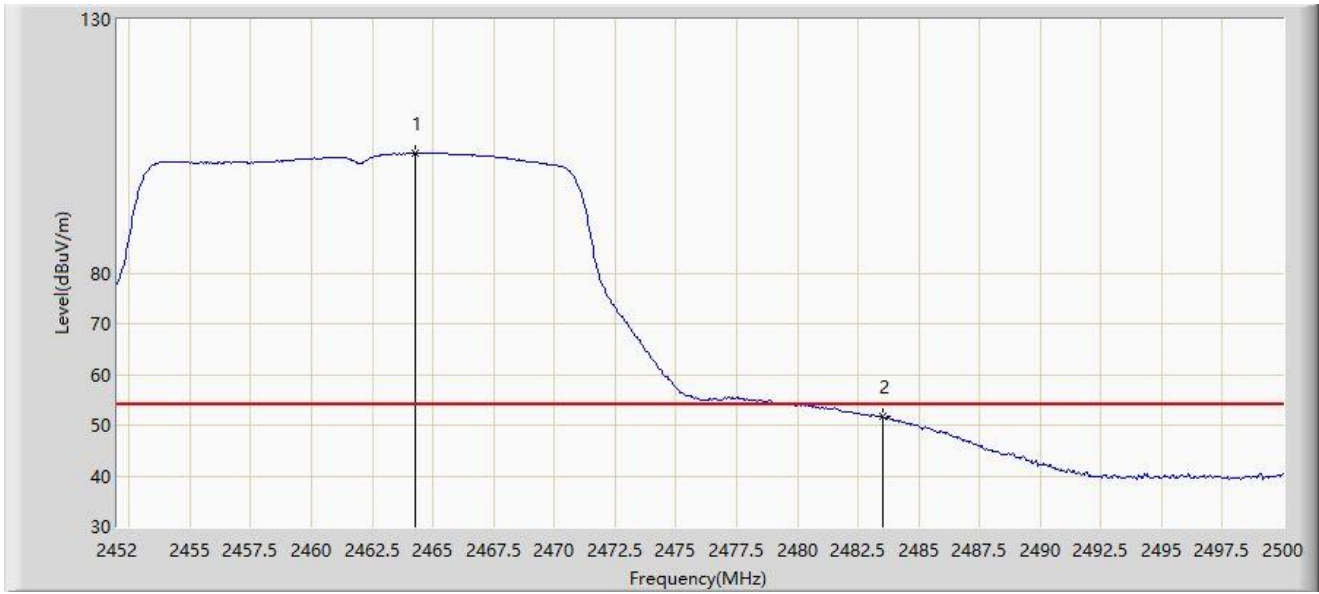


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		*	2464.288	103.574	71.730	N/A	N/A	31.844	AV
2			2483.500	51.621	19.749	-2.379	54.000	31.872	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: SIP-AC1	Test Date: 2022/01/17 - 21:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2422MHz by 802.11n-HT40	

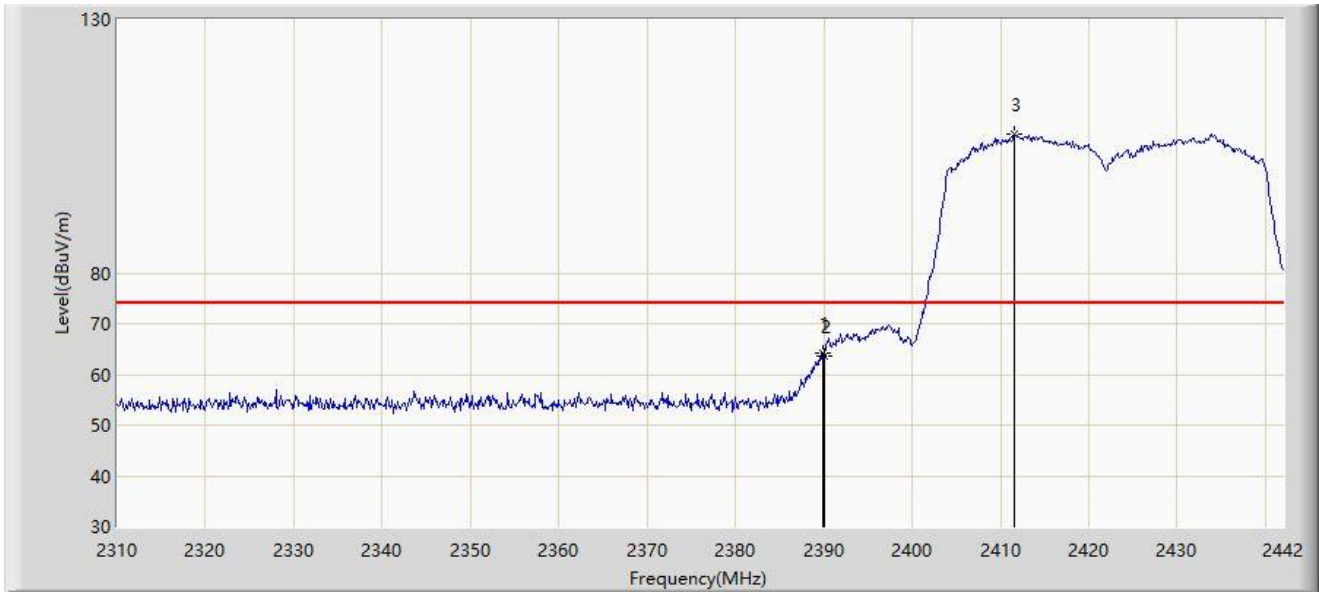


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2389.860	64.067	32.481	-9.933	74.000	31.586	PK
2			2390.000	63.524	31.935	-10.476	74.000	31.588	PK
3		*	2411.508	107.332	75.648	N/A	N/A	31.684	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 21:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2422MHz by 802.11n-HT40	

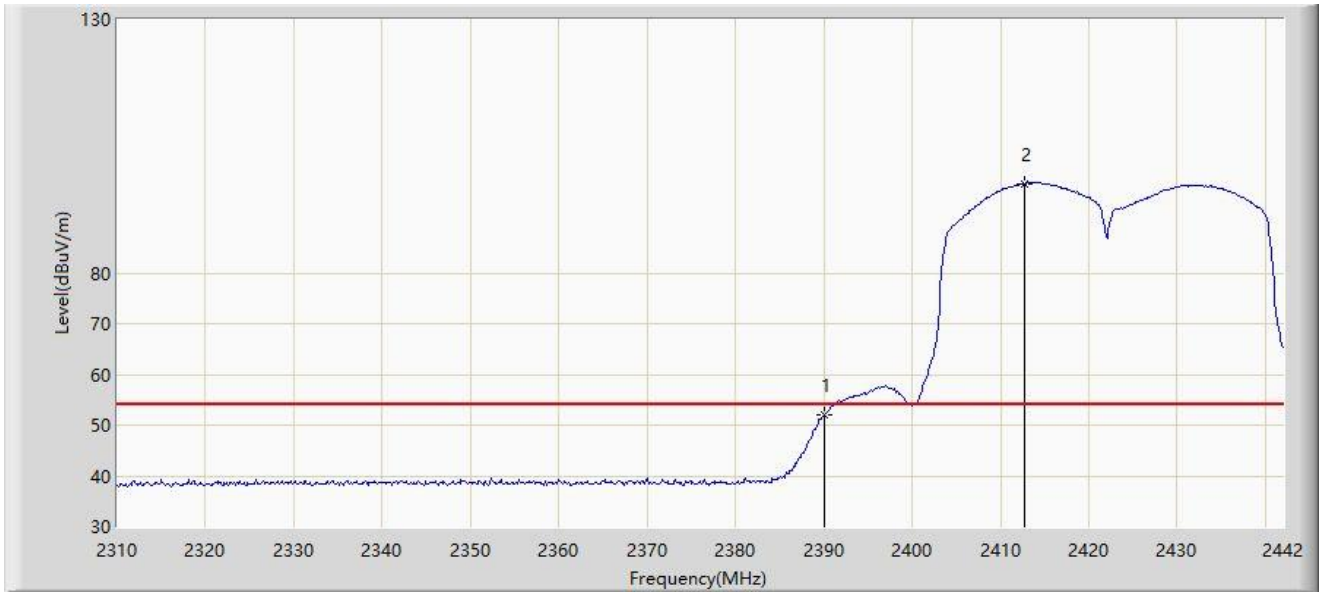


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2390.000	51.937	20.348	-2.063	54.000	31.588	AV
2		*	2412.696	97.582	65.896	N/A	N/A	31.685	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 21:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Vertical
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2422MHz by 802.11n-HT40	

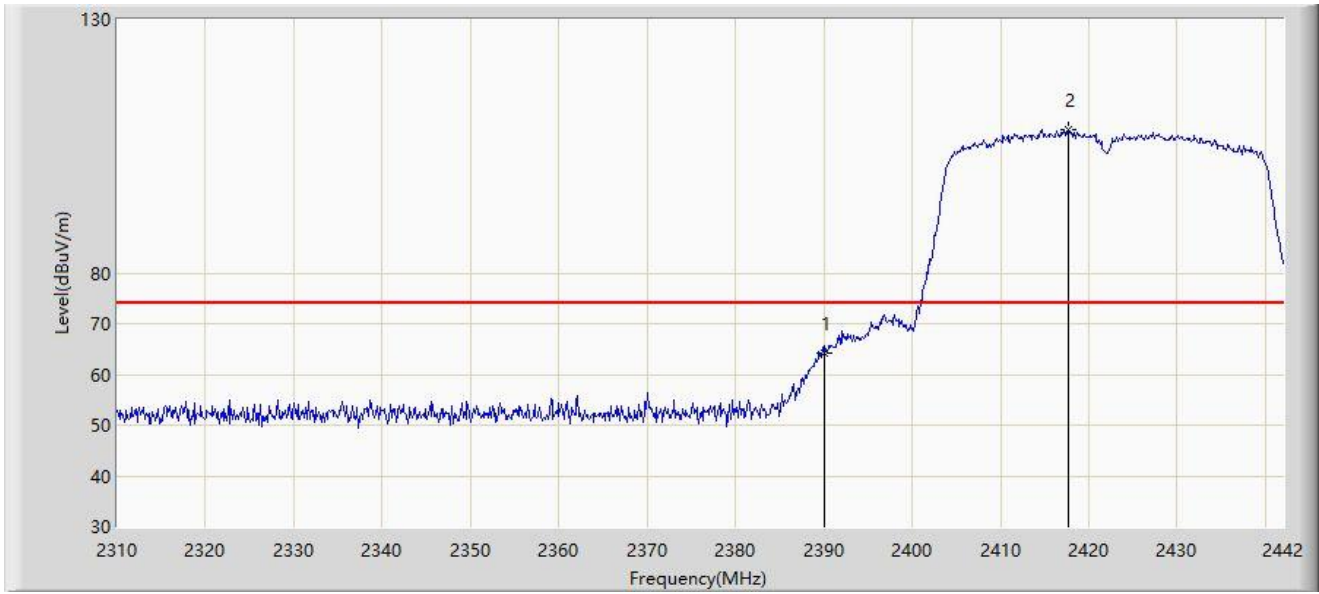


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2390.000	64.126	32.537	-9.874	74.000	31.588	PK
2		*	2417.712	108.307	76.614	N/A	N/A	31.693	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 21:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Vertical
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2422MHz by 802.11n-HT40	

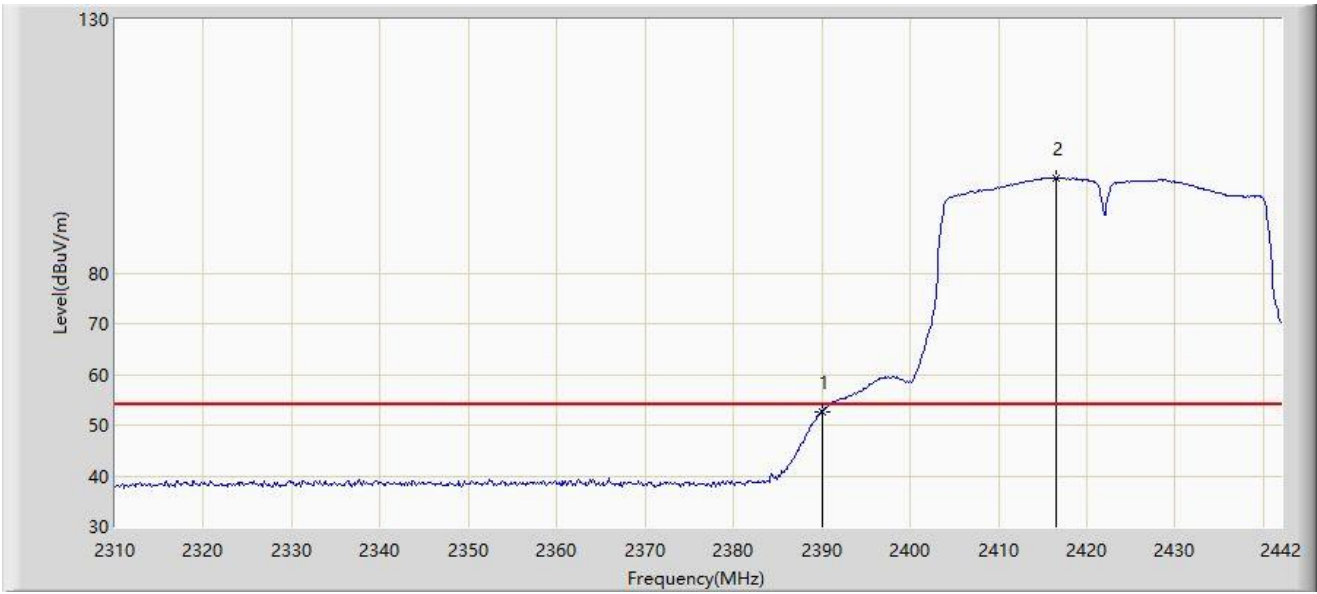


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2390.000	52.588	20.999	-1.412	54.000	31.588	AV
2		*	2416.524	98.623	66.932	N/A	N/A	31.691	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 22:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2452MHz by 802.11n-HT40	

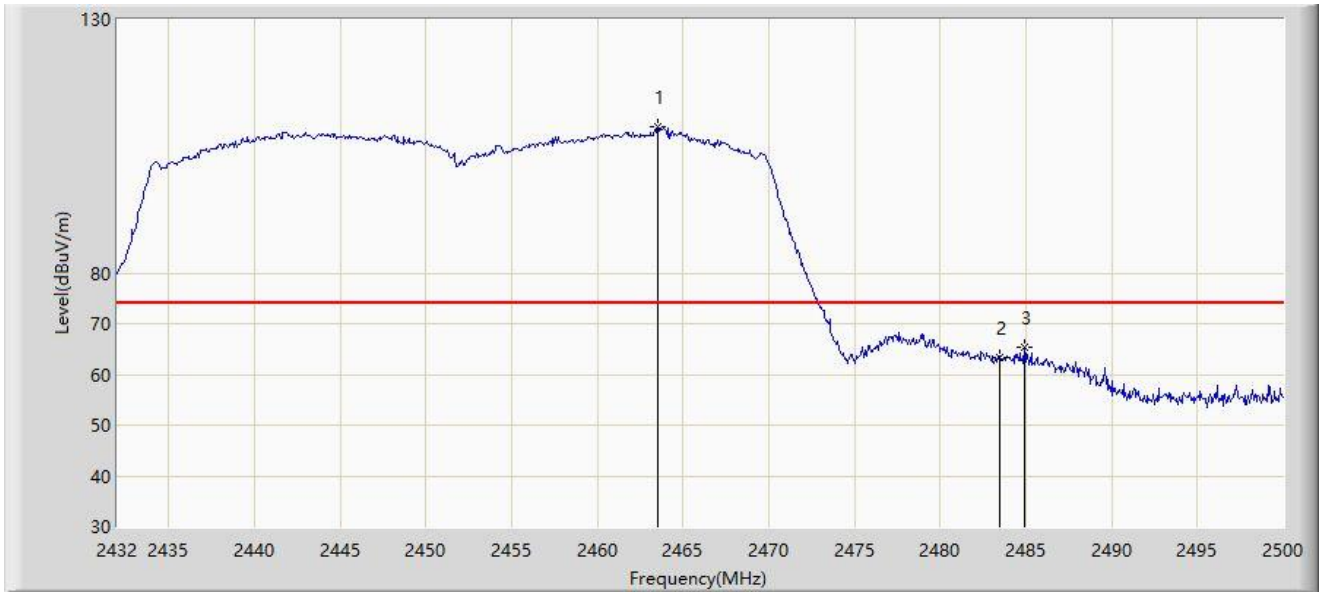


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2463.552	108.832	76.990	N/A	N/A	31.842	PK
2			2483.500	63.407	31.535	-10.593	74.000	31.872	PK
3			2484.904	65.231	33.359	-8.769	74.000	31.872	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 22:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Horizontal
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2452MHz by 802.11n-HT40	

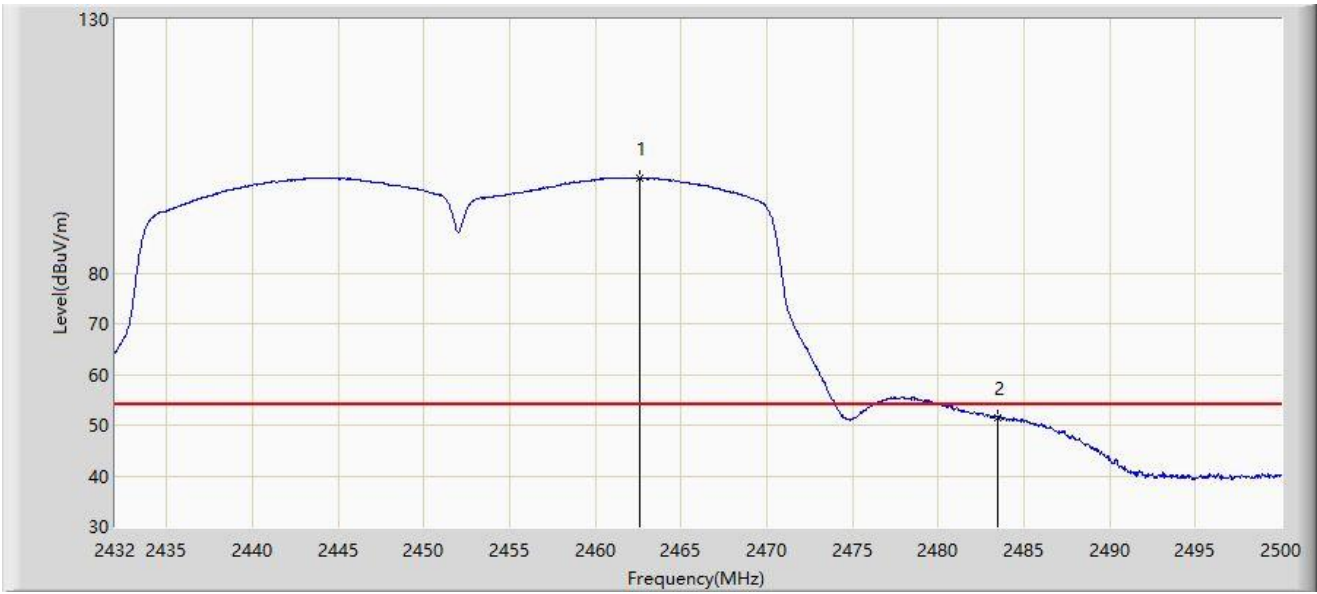


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2462.566	98.806	66.966	N/A	N/A	31.840	AV
2			2483.500	51.581	19.709	-2.419	54.000	31.872	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 22:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Vertical
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2452MHz by 802.11n-HT40	

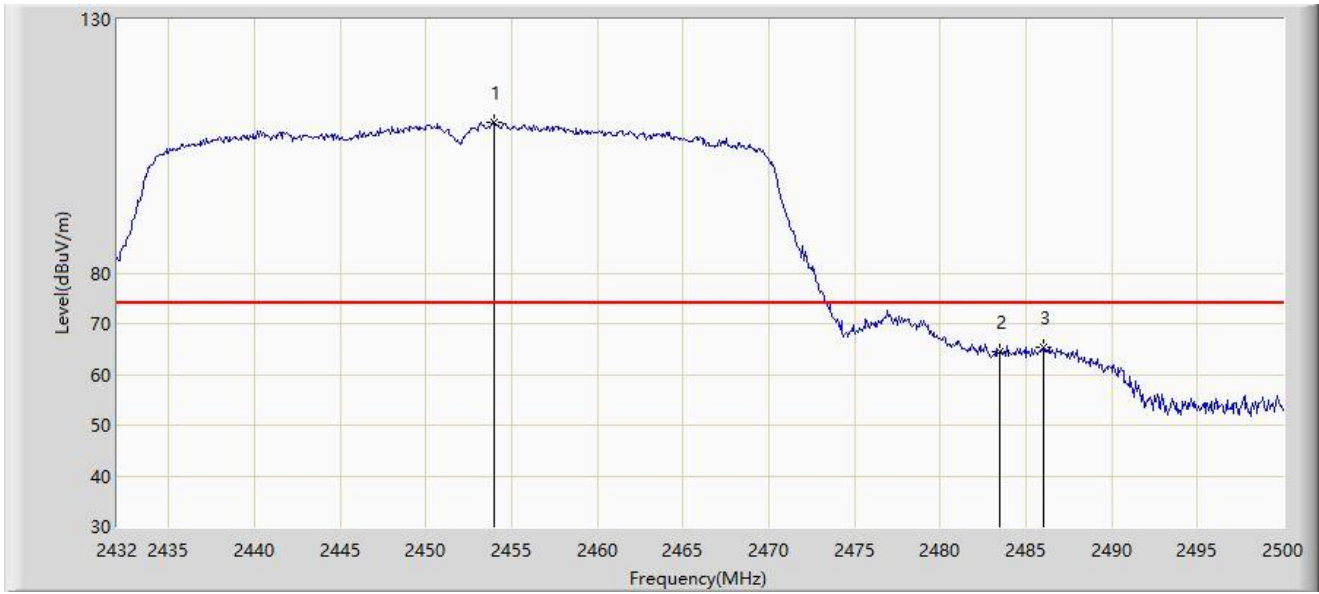


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2453.964	109.678	77.882	N/A	N/A	31.796	PK
2			2483.500	64.476	32.604	-9.524	74.000	31.872	PK
3			2486.060	65.484	33.613	-8.516	74.000	31.871	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2022/01/17 - 21:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Allen Zou
Probe: SIP-AC1_HF907_102862_1-18GHz	Polarity: Vertical
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit at 2452MHz by 802.11n-HT40	

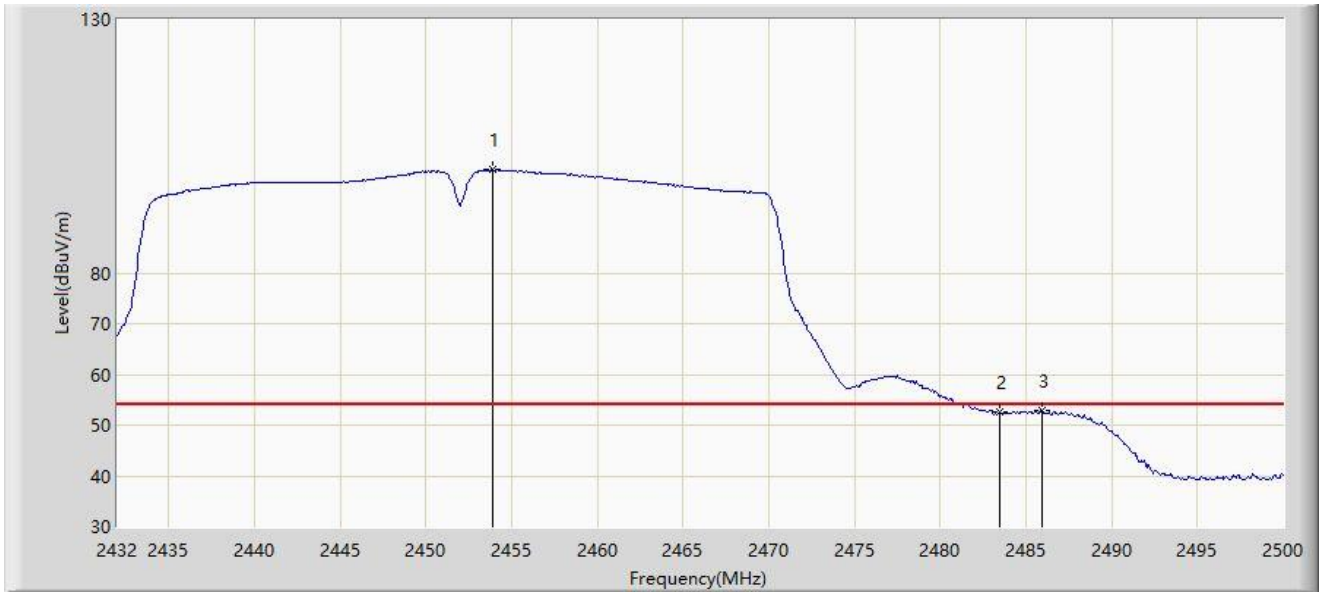

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2453.896	100.380	68.585	N/A	N/A	31.796	AV
2			2483.500	52.512	20.640	-1.488	54.000	31.872	AV
3			2485.924	52.845	20.974	-1.155	54.000	31.872	AV


Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



**A.8 AC Conducted Emissions Test Result**

Site: SIP-SR2	Test Date: 2022/01/24
Temperature: 15°C	Humidity: 56%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Edward Zhang
Probe: SIP-SR2-ENV216_101684_E	Polarity: Line
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2437MHz	

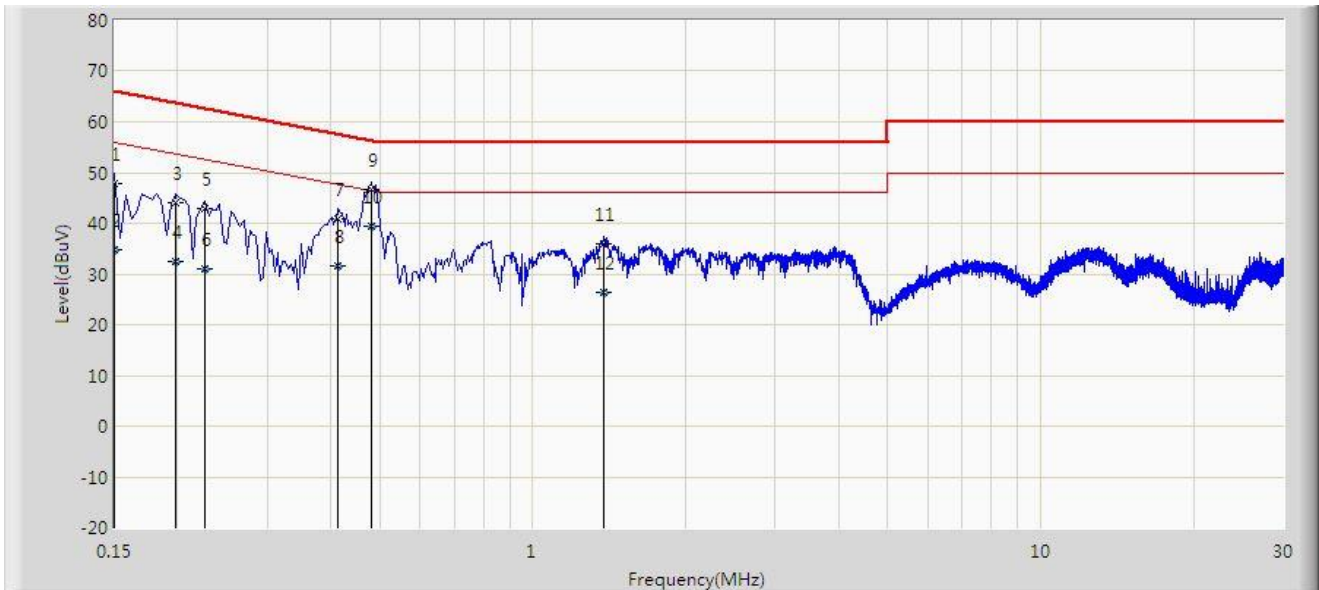


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.150	47.824	38.088	-18.176	66.000	9.736	QP
2			0.150	34.730	24.994	-21.270	56.000	9.736	AV
3			0.198	44.169	34.409	-19.525	63.694	9.759	QP
4			0.198	32.483	22.723	-21.211	53.694	9.759	AV
5			0.226	42.768	32.980	-19.828	62.595	9.787	QP
6			0.226	31.017	21.230	-21.578	52.595	9.787	AV
7			0.414	40.919	31.096	-16.649	57.568	9.823	QP
8			0.414	31.732	21.909	-15.836	47.568	9.823	AV
9			0.482	46.641	36.815	-9.664	56.305	9.826	QP
10		*	0.482	39.345	29.520	-6.959	46.305	9.826	AV
11			1.378	35.813	25.925	-20.187	56.000	9.887	QP
12			1.378	26.518	16.631	-19.482	46.000	9.887	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SIP-SR2	Test Date: 2022/01/24
Temperature: 15°C	Humidity: 56%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Edward Zhang
Probe: SIP-SR2-ENV216_101684_E	Polarity: Neutral
EUT: Chateau LTE6-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2437MHz	

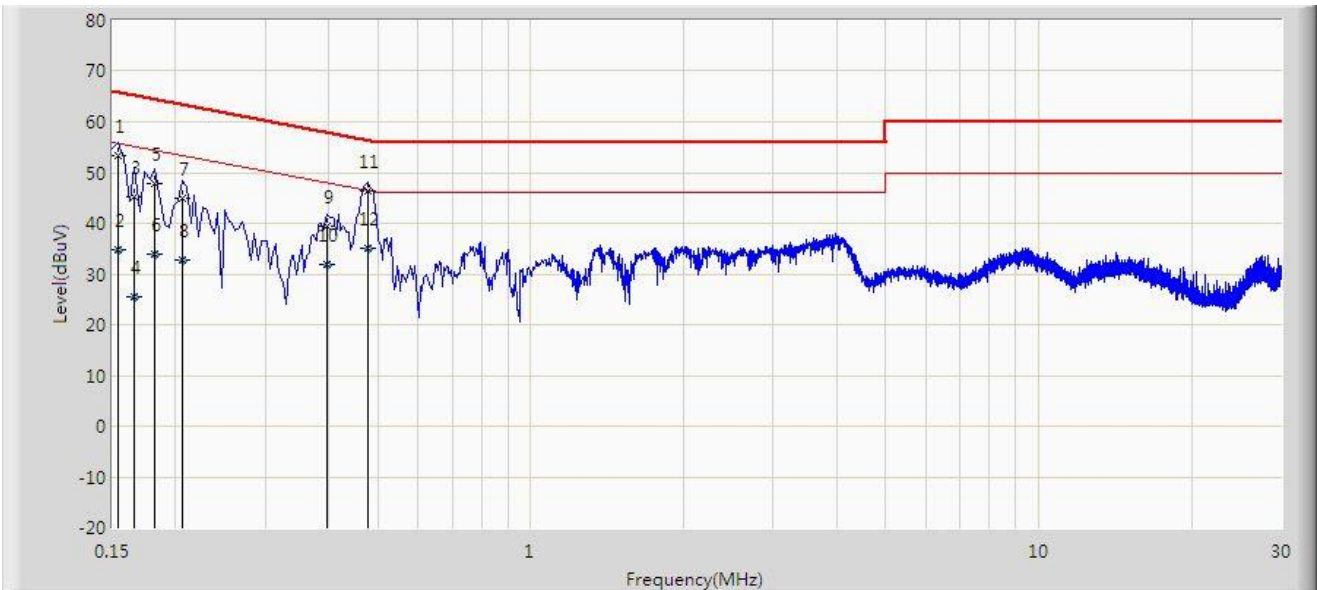

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.154	53.416	43.677	-12.365	65.781	9.739	QP
2			0.154	34.859	25.120	-20.923	55.781	9.739	AV
3			0.166	45.088	35.352	-20.070	65.158	9.737	QP
4			0.166	25.508	15.772	-29.650	55.158	9.737	AV
5			0.182	47.954	38.218	-16.439	64.394	9.736	QP
6			0.182	33.931	24.195	-20.463	54.394	9.736	AV
7			0.206	44.909	35.142	-18.456	63.365	9.766	QP
8			0.206	32.879	23.112	-20.486	53.365	9.766	AV
9			0.398	39.280	29.463	-18.616	57.895	9.817	QP
10			0.398	31.976	22.159	-15.919	47.895	9.817	AV
11		*	0.478	46.304	36.484	-10.070	56.374	9.820	QP
12			0.478	34.951	25.131	-11.423	46.374	9.820	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

## **Appendix B – Test Setup Photograph**

Refer to “2112RSU086-UT” file.

## Appendix C – EUT Photograph

Refer to “2112RSU086-UE” file.

————— The End —————