


Site: SIP-AC3	Test Date: 2023-12-06
Limit: FCC_2.4G_RE(3m)	Engineer: Justin Guo
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2462MHz	

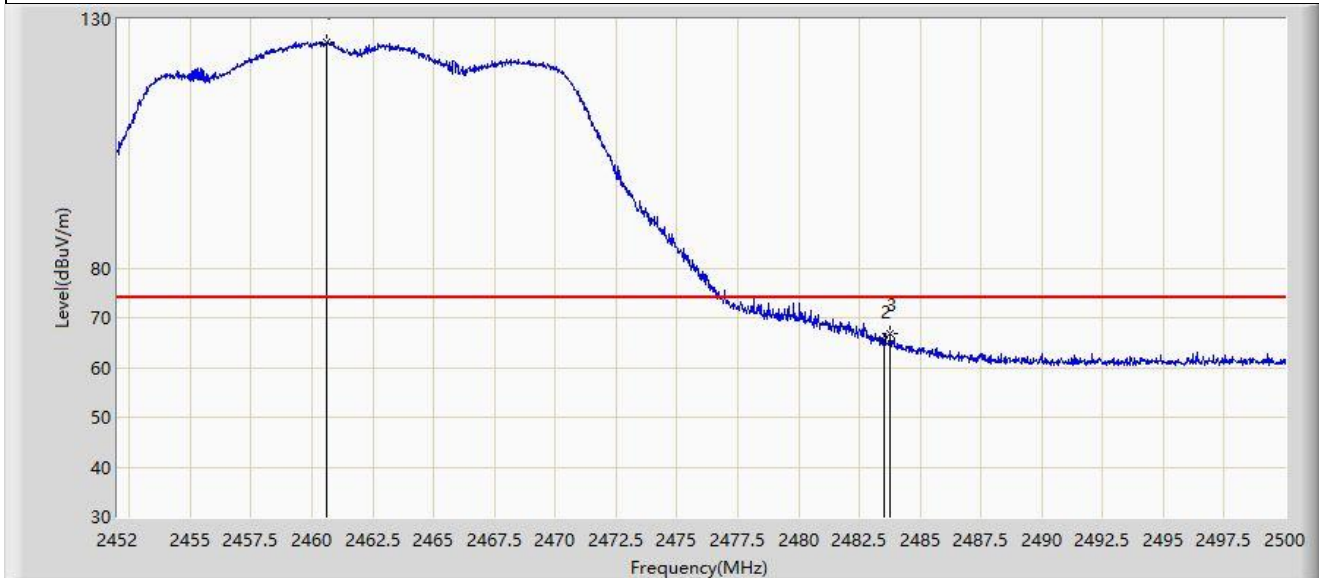

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.616	125.275	93.066	N/A	N/A	32.210	PK
2		2483.500	65.480	33.180	-8.520	74.000	32.300	PK
3	*	2483.776	66.735	34.433	-7.265	74.000	32.302	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-12-06
Limit: FCC_2.4G_RE(3m)	Engineer: Justin Guo
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz

Test Mode: Transmit by VHT20 at 2462MHz

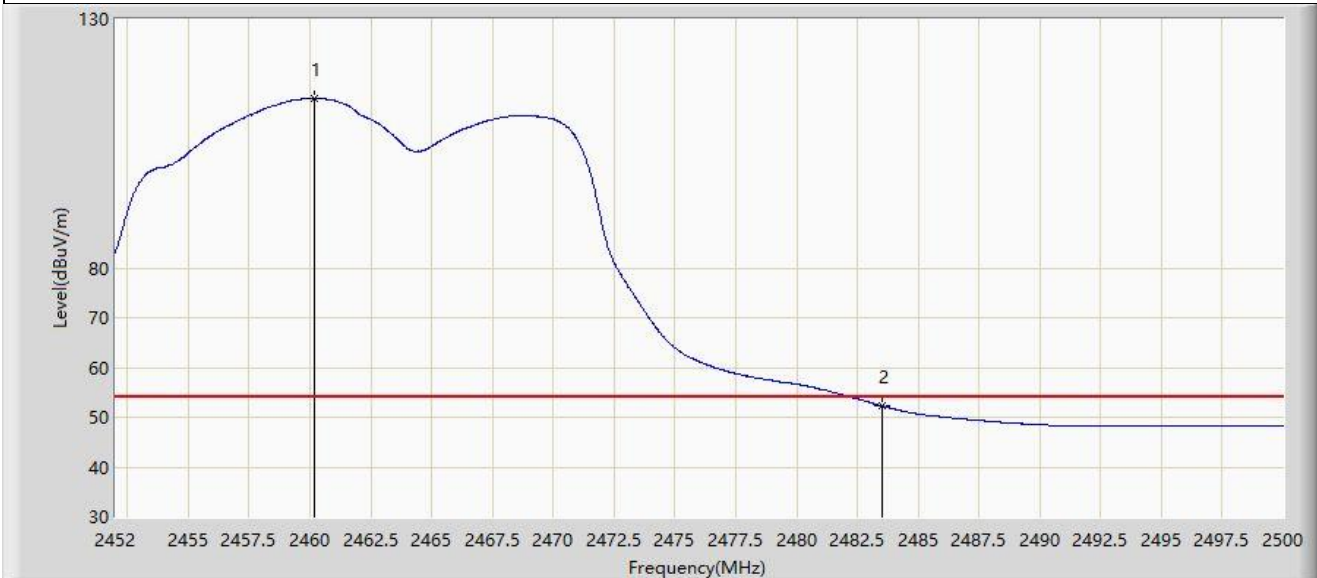

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.184	114.072	81.865	N/A	N/A	32.208	AV
2	*	2483.500	52.273	19.973	-1.727	54.000	32.300	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-12-06
Limit: FCC_2.4G_RE(3m)	Engineer: Justin Guo
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz

Test Mode: Transmit by VHT20 at 2462MHz

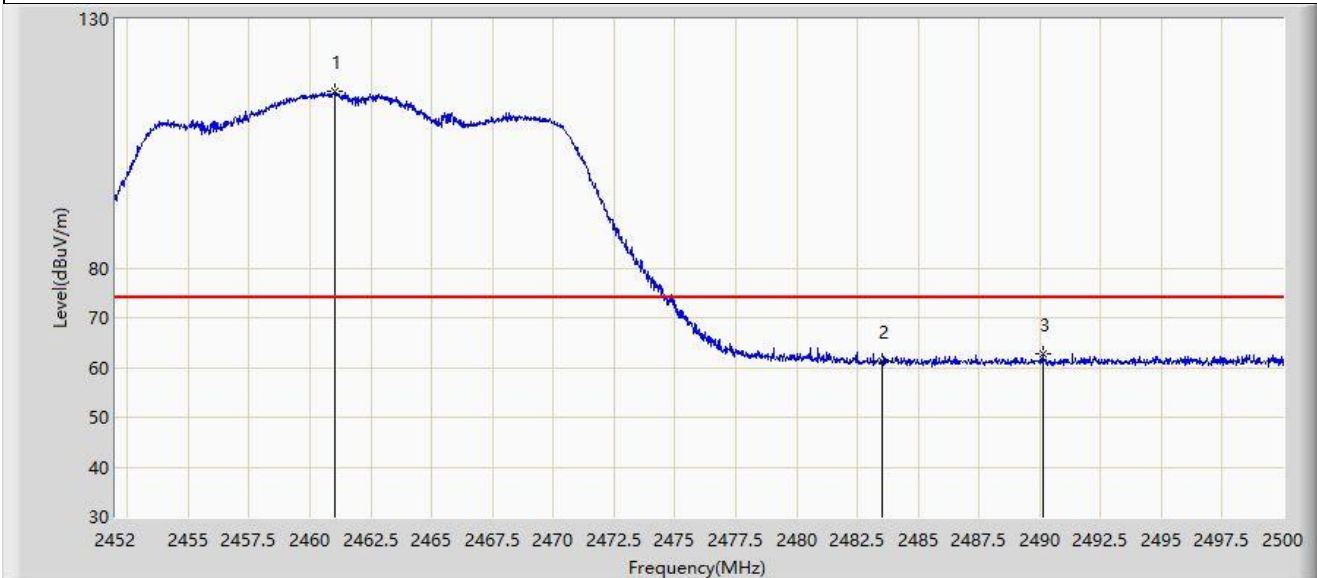


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2461.024	115.424	83.213	N/A	N/A	32.212	PK
2		2483.500	61.243	28.943	-12.757	74.000	32.300	PK
3	*	2490.112	62.801	30.466	-11.199	74.000	32.335	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-12-06
Limit: FCC_2.4G_RE(3m)	Engineer: Justin Guo
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2462MHz	

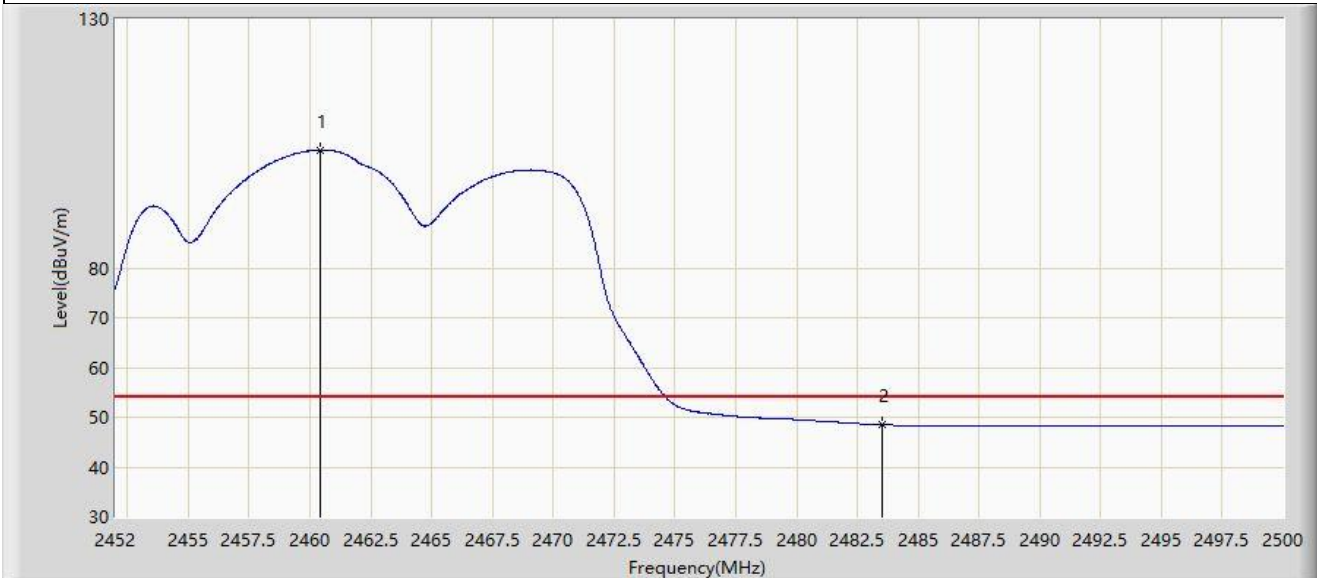


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.400	103.703	71.495	N/A	N/A	32.209	AV
2	*	2483.500	48.489	16.189	-5.511	54.000	32.300	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2023-10-22
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2422MHz	

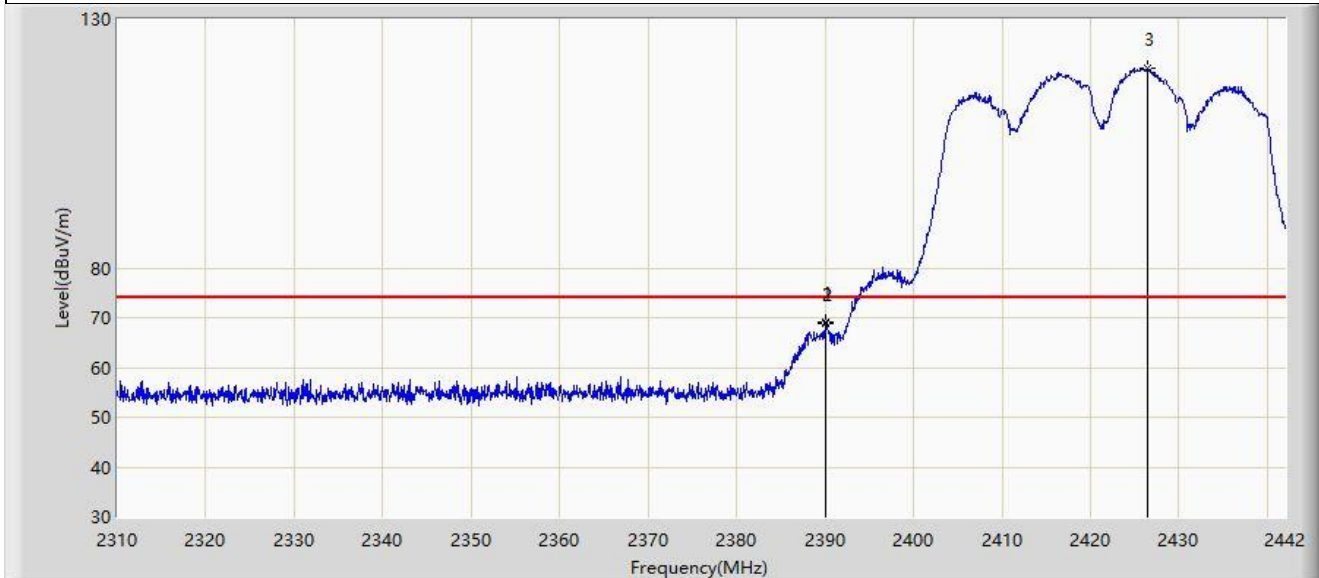

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.992	69.002	37.287	-4.998	74.000	31.715	PK
2		2390.000	68.758	37.043	-5.242	74.000	31.715	PK
3		2426.424	120.163	88.323	N/A	N/A	31.840	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2023-10-22
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz

Test Mode: Transmit by VHT40 at 2422MHz

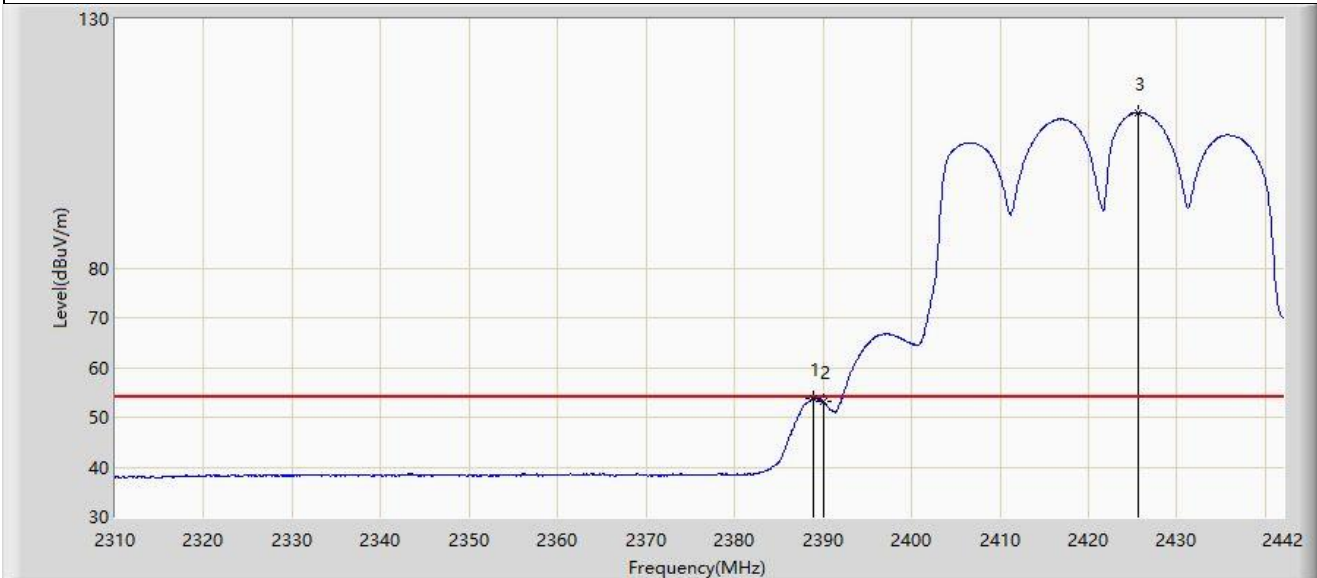


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2388.870	53.681	21.986	-0.319	54.000	31.695	AV
2		2390.000	53.084	21.369	-0.916	54.000	31.715	AV
3		2425.698	111.224	79.386	N/A	N/A	31.838	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2023-10-22
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2422MHz	

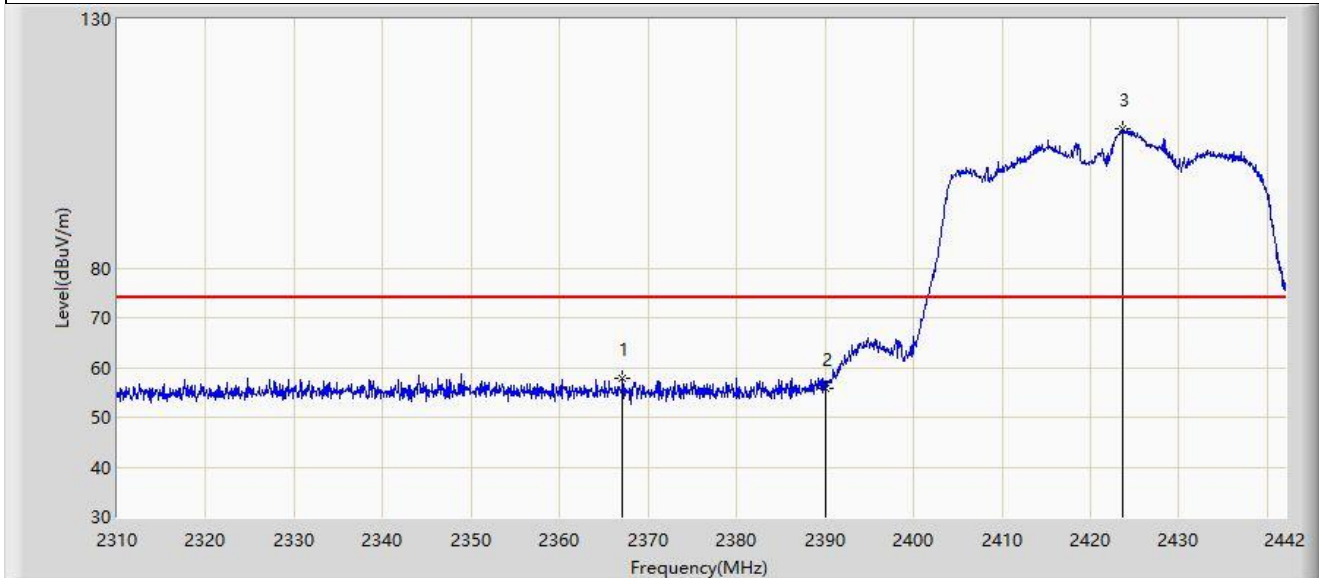

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2367.090	57.785	26.257	-16.215	74.000	31.528	PK
2		2390.000	55.810	24.095	-18.190	74.000	31.715	PK
3		2423.586	107.834	76.001	N/A	N/A	31.833	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2023-10-22
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz

Test Mode: Transmit by VHT40 at 2422MHz

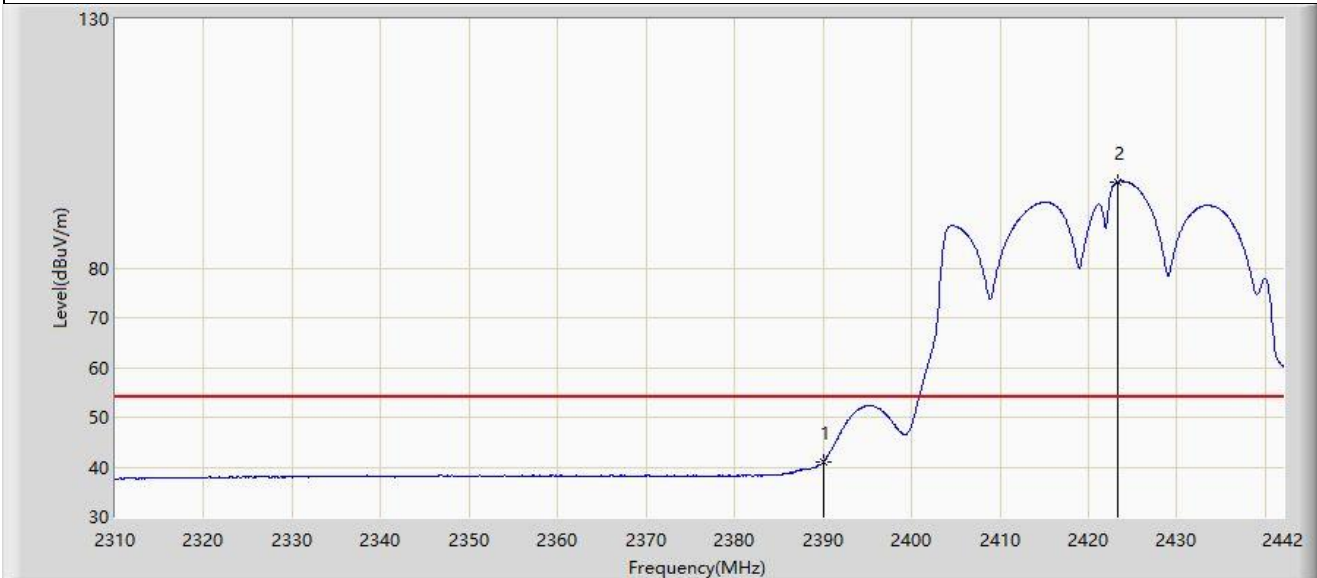


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	40.915	9.200	-13.085	54.000	31.715	AV
2		2423.256	97.250	65.418	N/A	N/A	31.833	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2023-10-22
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2452MHz	

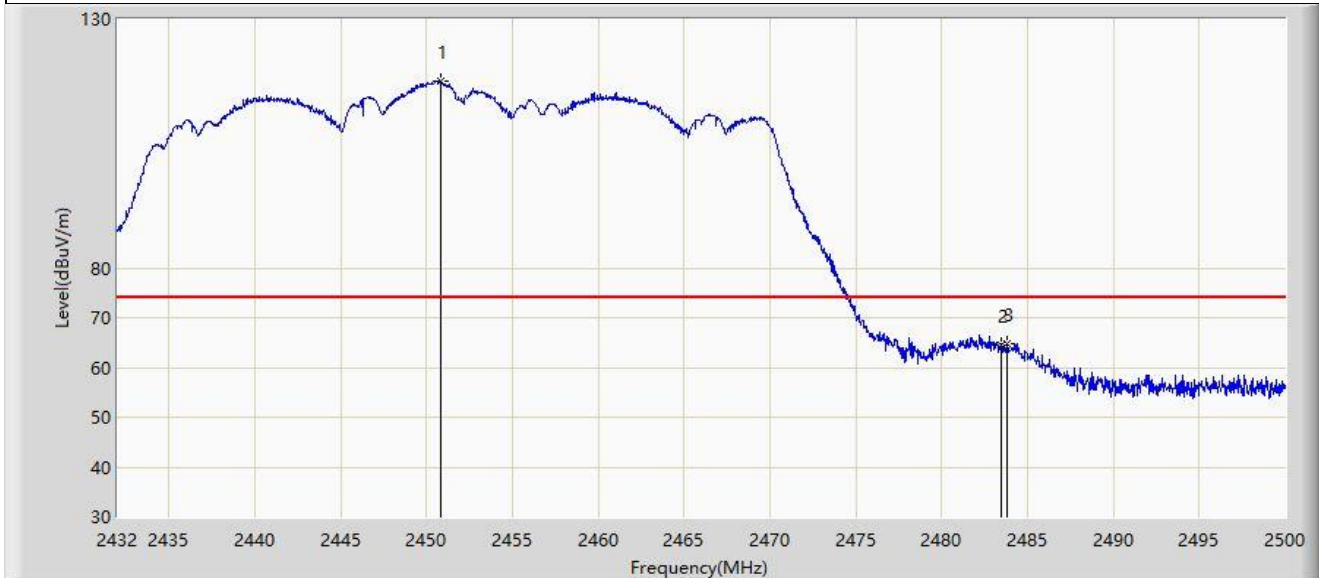


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2450.802	117.460	85.500	N/A	N/A	31.960	PK
2		2483.500	64.409	32.319	-9.591	74.000	32.090	PK
3	*	2483.816	64.831	32.741	-9.169	74.000	32.090	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2023-10-22
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2452MHz	

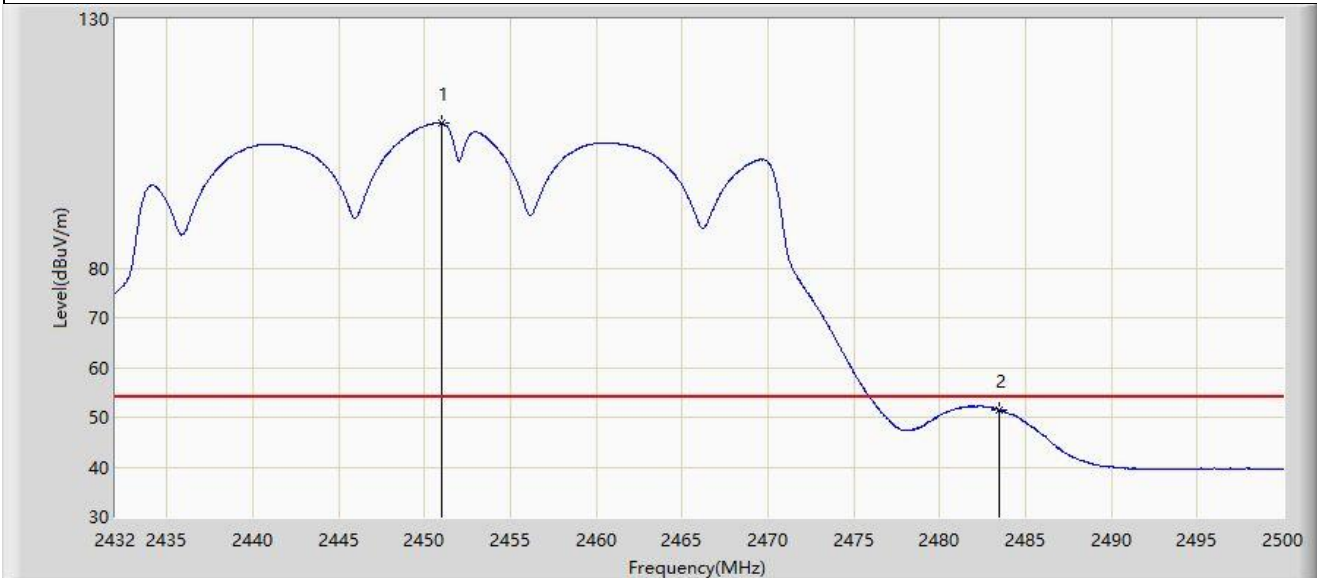


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2451.006	109.100	77.139	N/A	N/A	31.961	AV
2	*	2483.500	51.490	19.400	-2.510	54.000	32.090	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2023-10-22
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2452MHz	

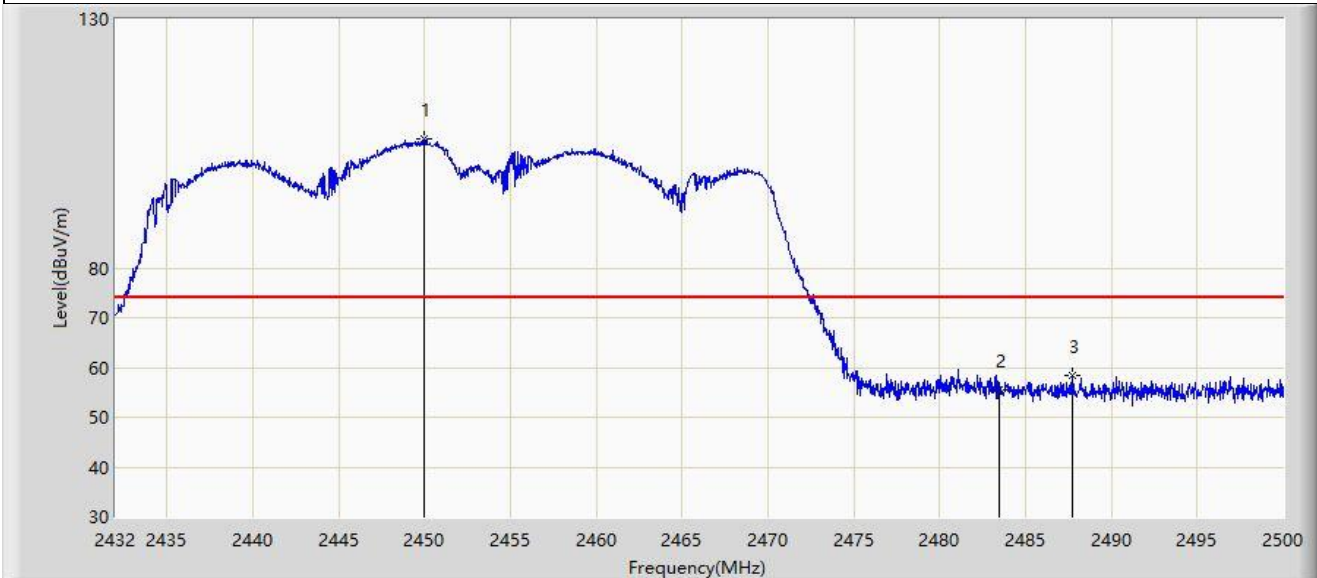

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2449.952	105.860	73.907	N/A	N/A	31.954	PK
2		2483.500	55.381	23.291	-18.619	74.000	32.090	PK
3	*	2487.760	58.409	26.314	-15.591	74.000	32.095	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC1	Test Date: 2023-10-22
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102862_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz

Test Mode: Transmit by VHT40 at 2452MHz

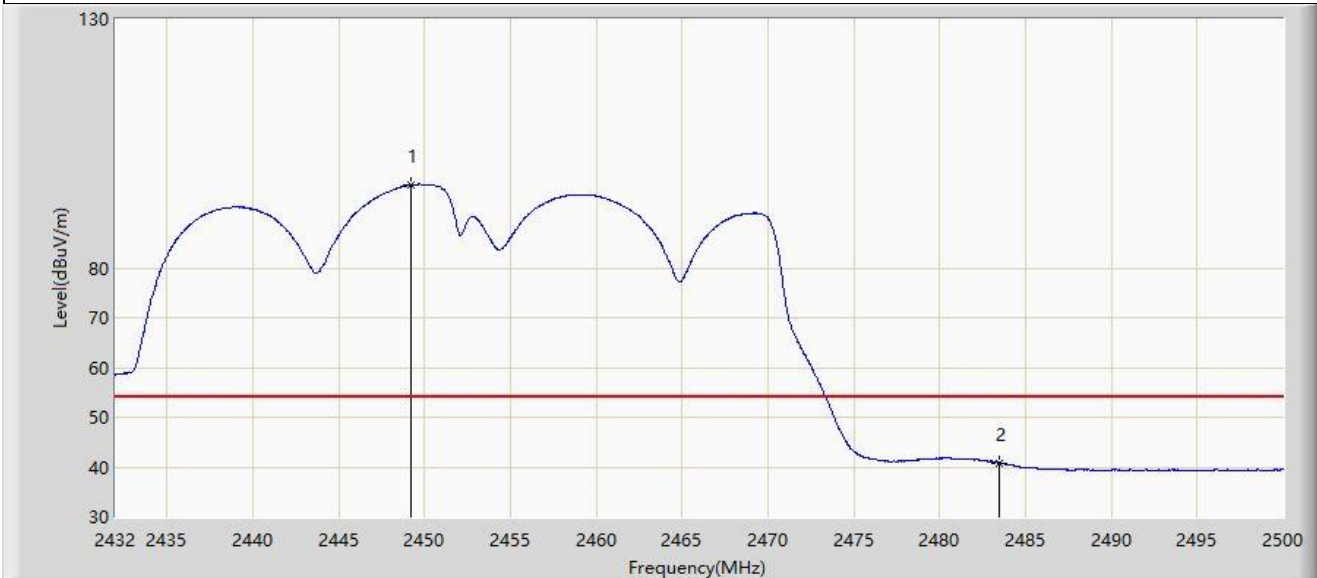


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2449.204	96.615	64.667	N/A	N/A	31.948	AV
2	*	2483.500	40.848	8.758	-13.152	54.000	32.090	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-12-05
Limit: FCC_2.4G_RE(3m)	Engineer: Justin Guo
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

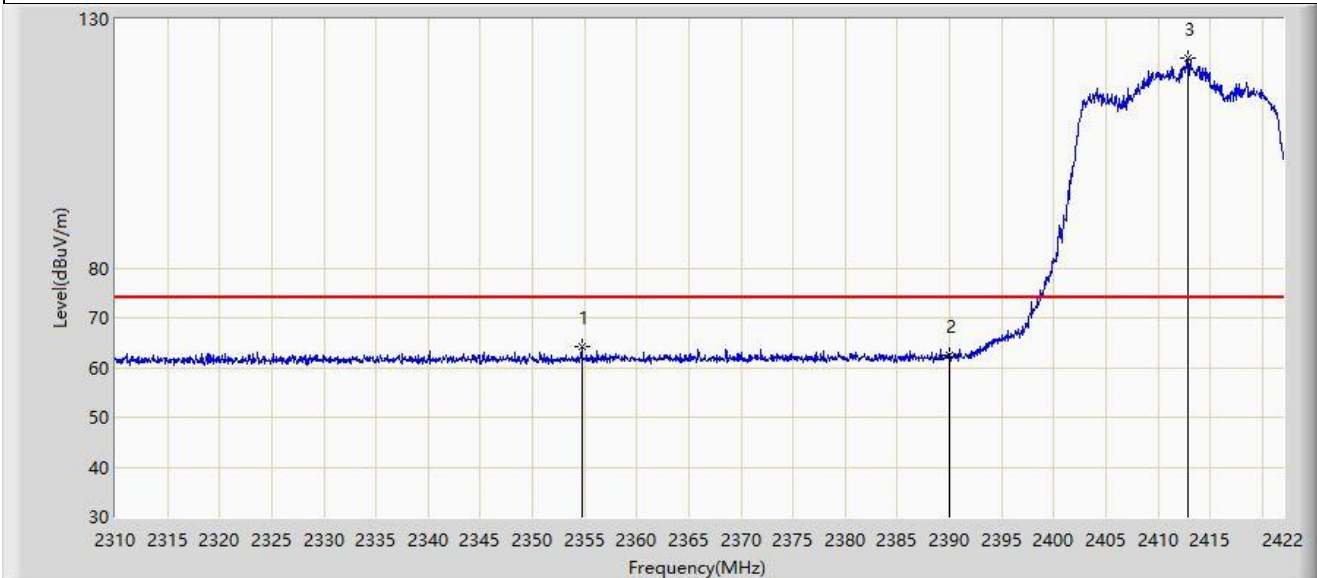


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2354.744	64.259	32.393	-9.741	74.000	31.866	PK
2		2390.000	62.571	30.548	-11.429	74.000	32.023	PK
3		2412.928	122.144	90.099	N/A	N/A	32.045	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-12-05
Limit: FCC_2.4G_RE(3m)	Engineer: Justin Guo
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

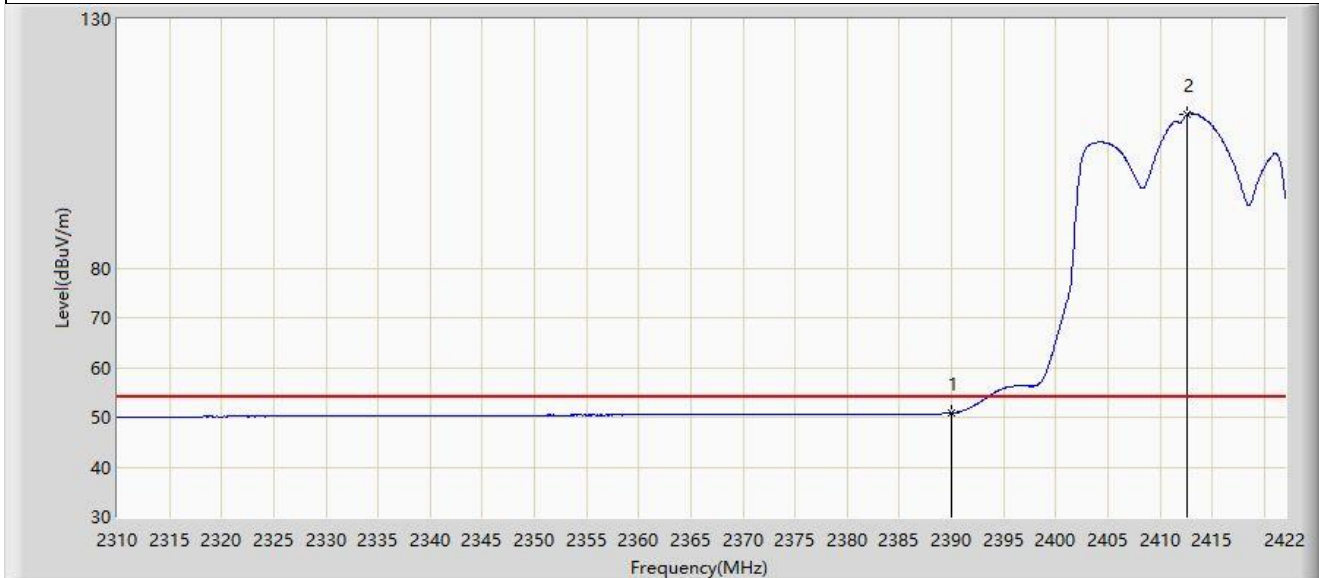


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	50.881	18.858	-3.119	54.000	32.023	AV
2		2412.648	110.901	78.856	N/A	N/A	32.046	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-12-05
Limit: FCC_2.4G_RE(3m)	Engineer: Justin Guo
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

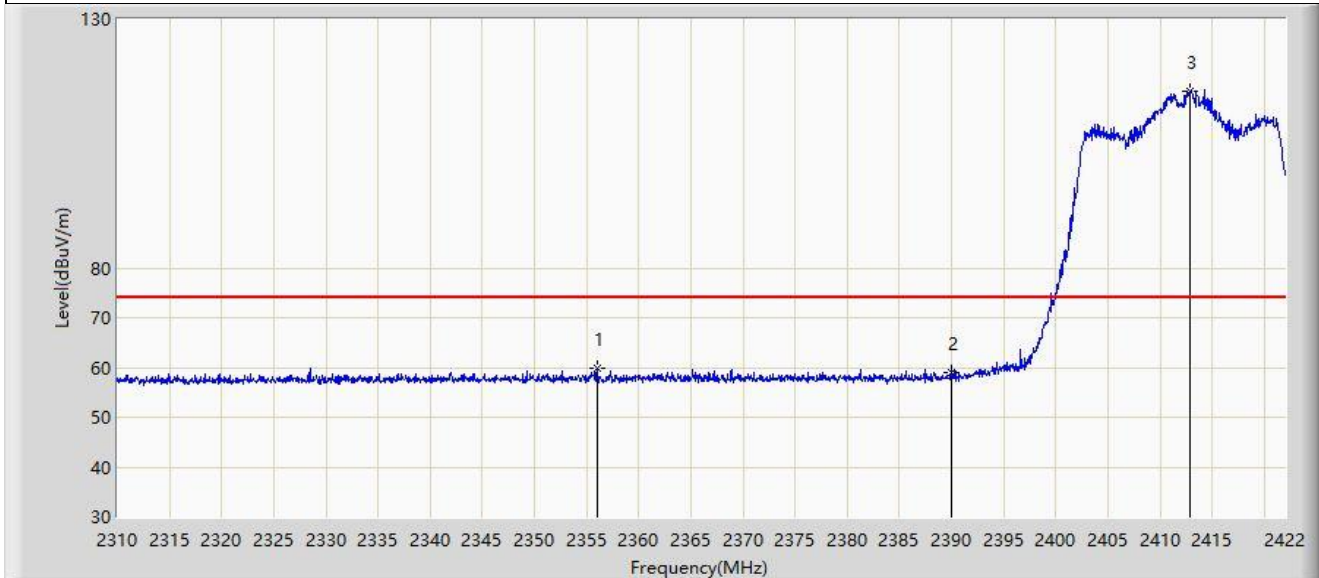


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2355.976	59.770	27.892	-14.230	74.000	31.878	PK
2		2390.000	59.129	27.106	-14.871	74.000	32.023	PK
3		2412.928	115.651	83.606	N/A	N/A	32.045	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-12-05
Limit: FCC_2.4G_RE(3m)	Engineer: Justin Guo
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

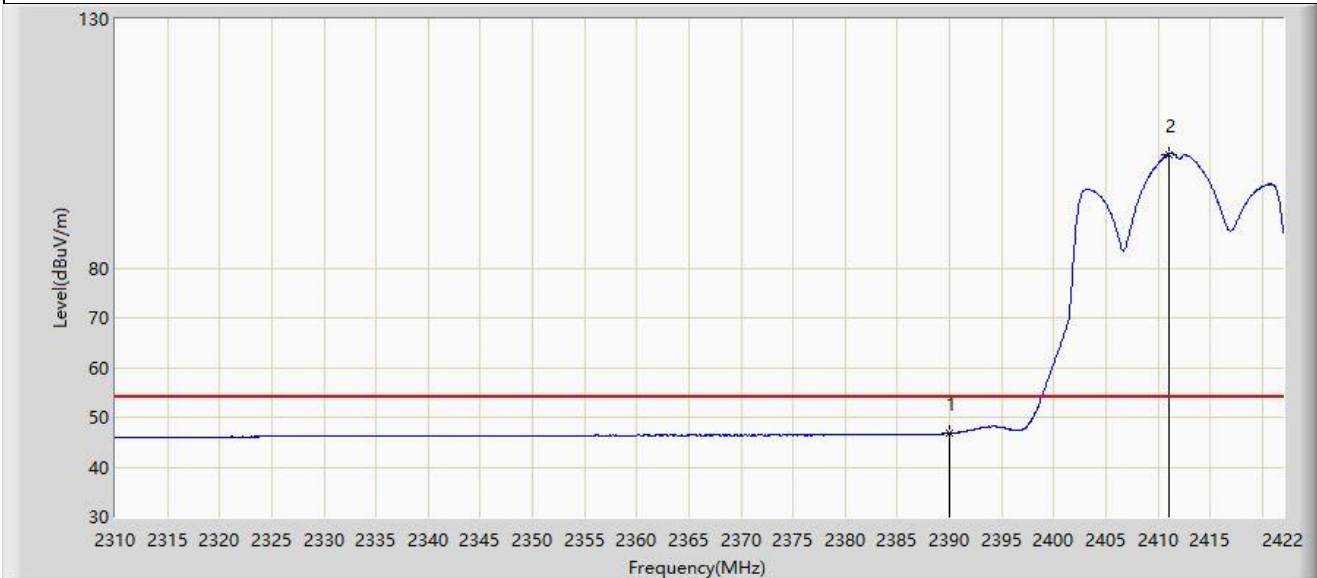


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	46.696	14.673	-7.304	54.000	32.023	AV
2		2411.024	102.846	70.801	N/A	N/A	32.045	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-12-05
Limit: FCC_2.4G_RE(3m)	Engineer: Justin Guo
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

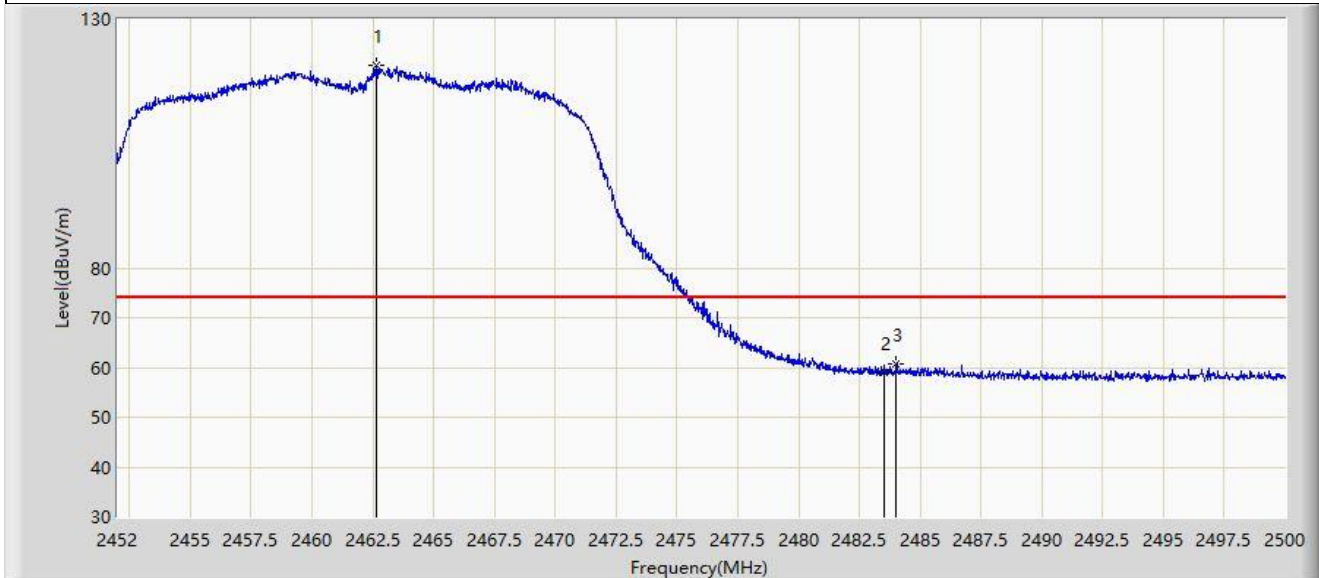


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2462.632	120.678	88.460	N/A	N/A	32.218	PK
2		2483.500	59.127	26.827	-14.873	74.000	32.300	PK
3	*	2484.016	60.852	28.549	-13.148	74.000	32.303	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-12-05
Limit: FCC_2.4G_RE(3m)	Engineer: Justin Guo
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

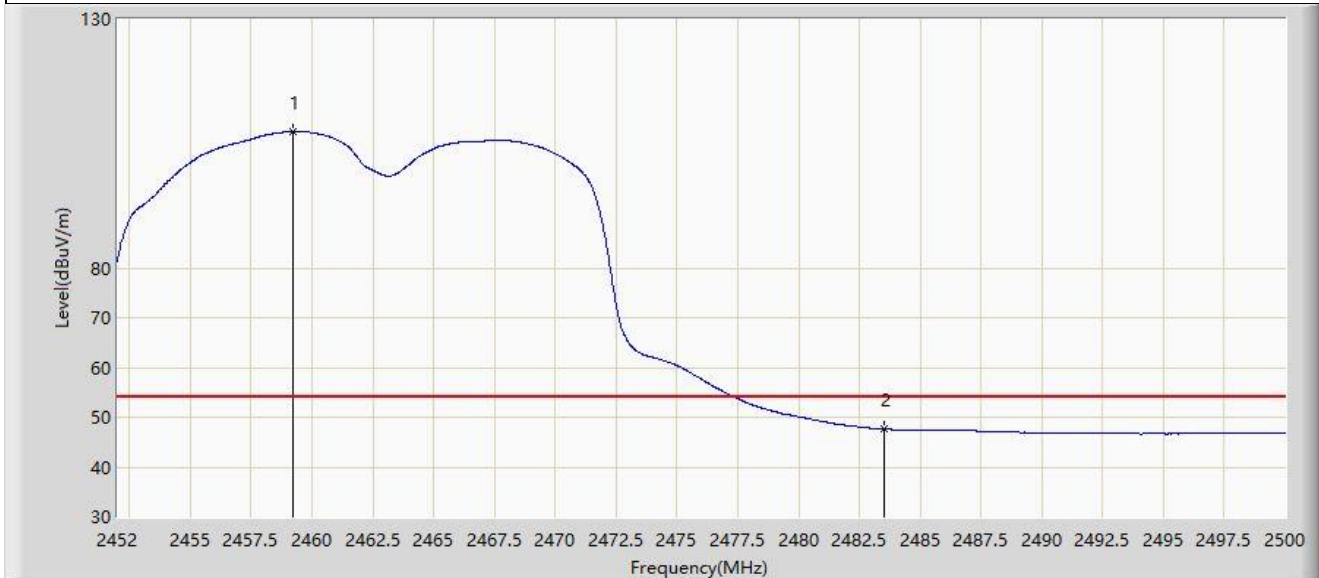


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2459.224	107.429	75.226	N/A	N/A	32.203	AV
2	*	2483.500	47.619	15.319	-6.381	54.000	32.300	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-12-05
Limit: FCC_2.4G_RE(3m)	Engineer: Justin Guo
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

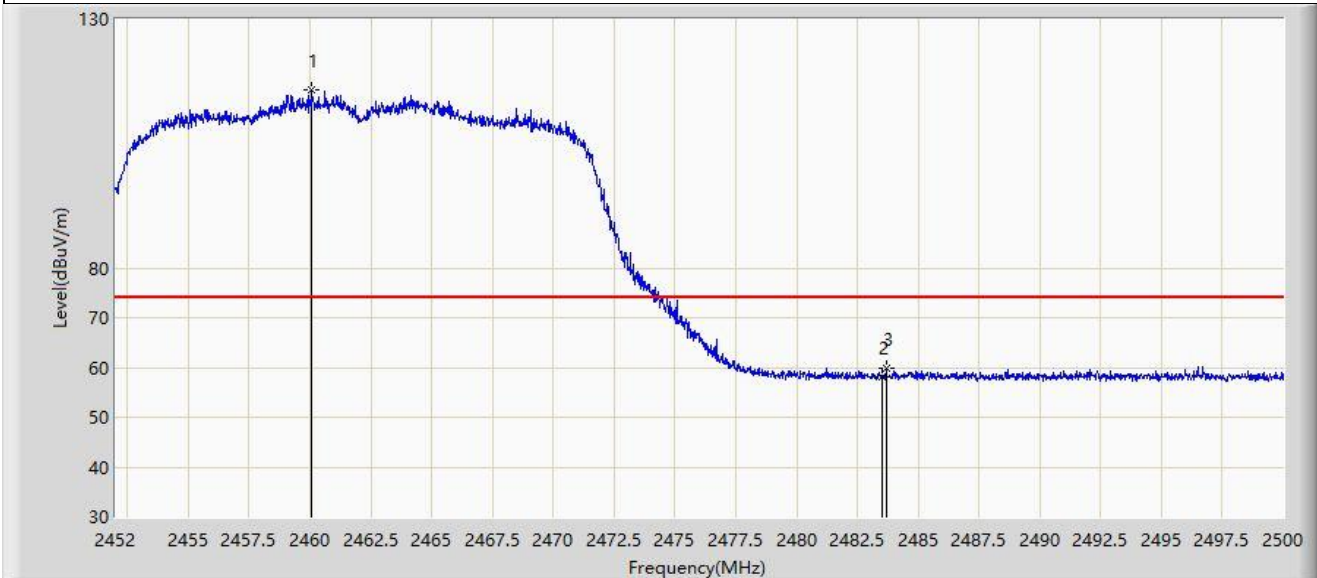


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.088	115.717	83.510	N/A	N/A	32.207	PK
2		2483.500	58.228	25.928	-15.772	74.000	32.300	PK
3	*	2483.680	59.804	27.503	-14.196	74.000	32.301	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-12-05
Limit: FCC_2.4G_RE(3m)	Engineer: Justin Guo
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

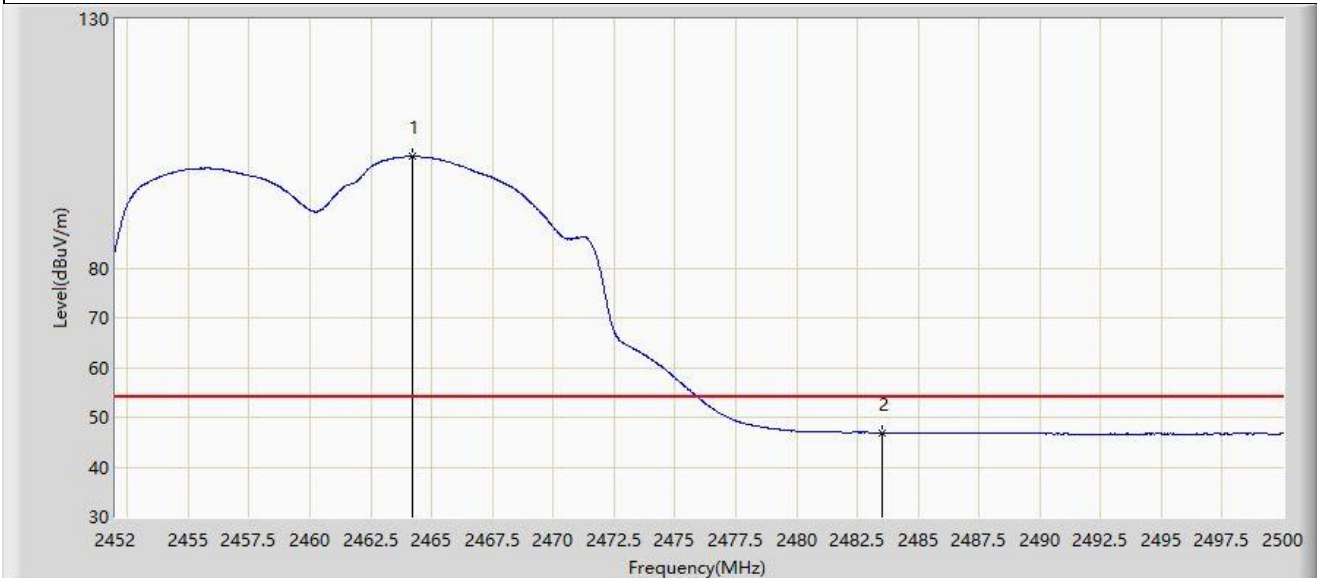


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2464.216	102.350	70.126	N/A	N/A	32.224	AV
2	*	2483.500	46.945	14.645	-7.055	54.000	32.300	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-09-07
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

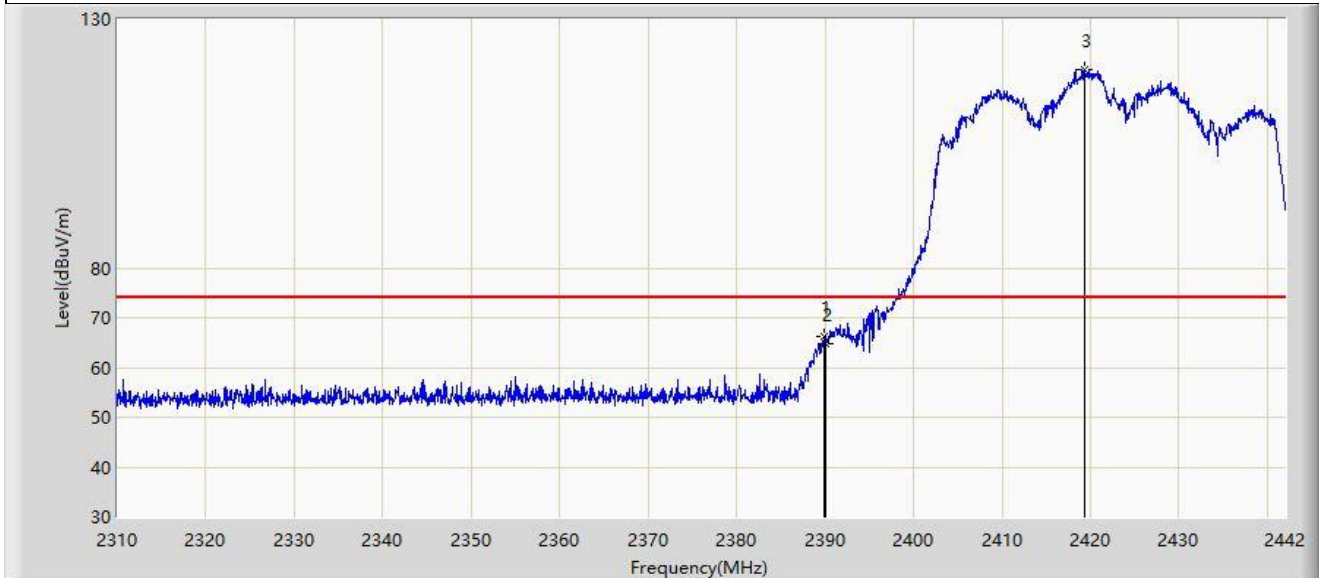

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.860	66.160	34.137	-7.840	74.000	32.023	PK
2		2390.000	64.816	32.793	-9.184	74.000	32.023	PK
3		2419.362	119.834	87.789	N/A	N/A	32.045	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-09-07
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	52.962	20.939	-1.038	54.000	32.023	AV
2		2420.154	108.400	76.354	N/A	N/A	32.046	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-09-07
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

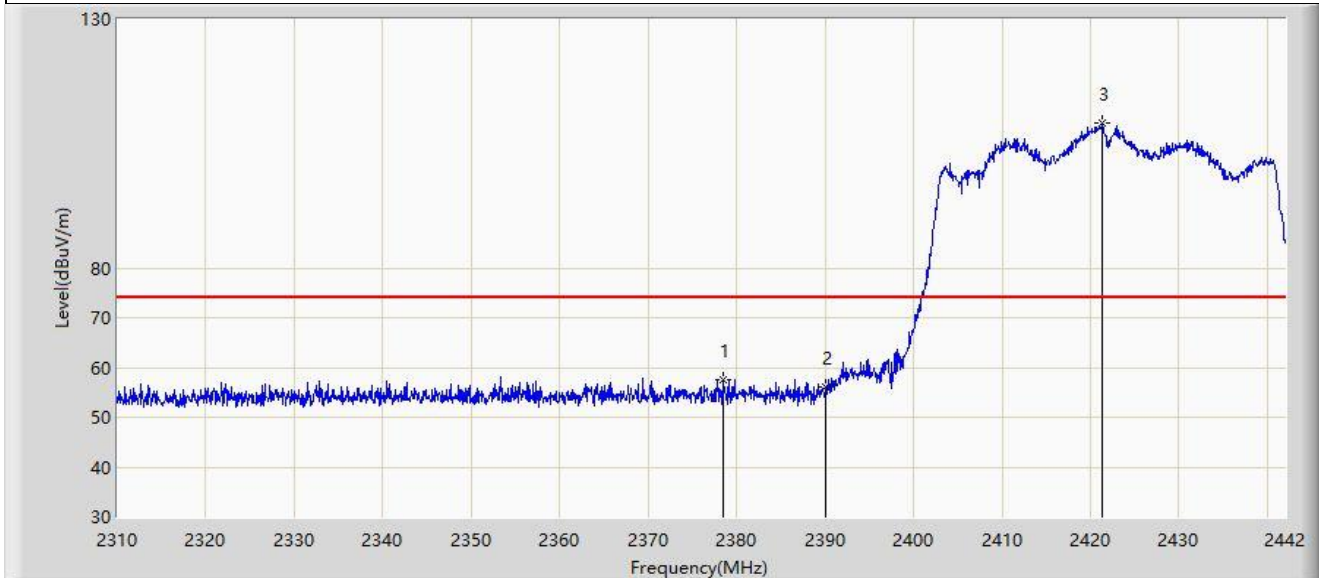


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2378.442	57.570	25.570	-16.430	74.000	32.000	PK
2		2390.000	56.043	24.020	-17.957	74.000	32.023	PK
3		2421.342	109.012	76.966	N/A	N/A	32.045	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-09-07
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

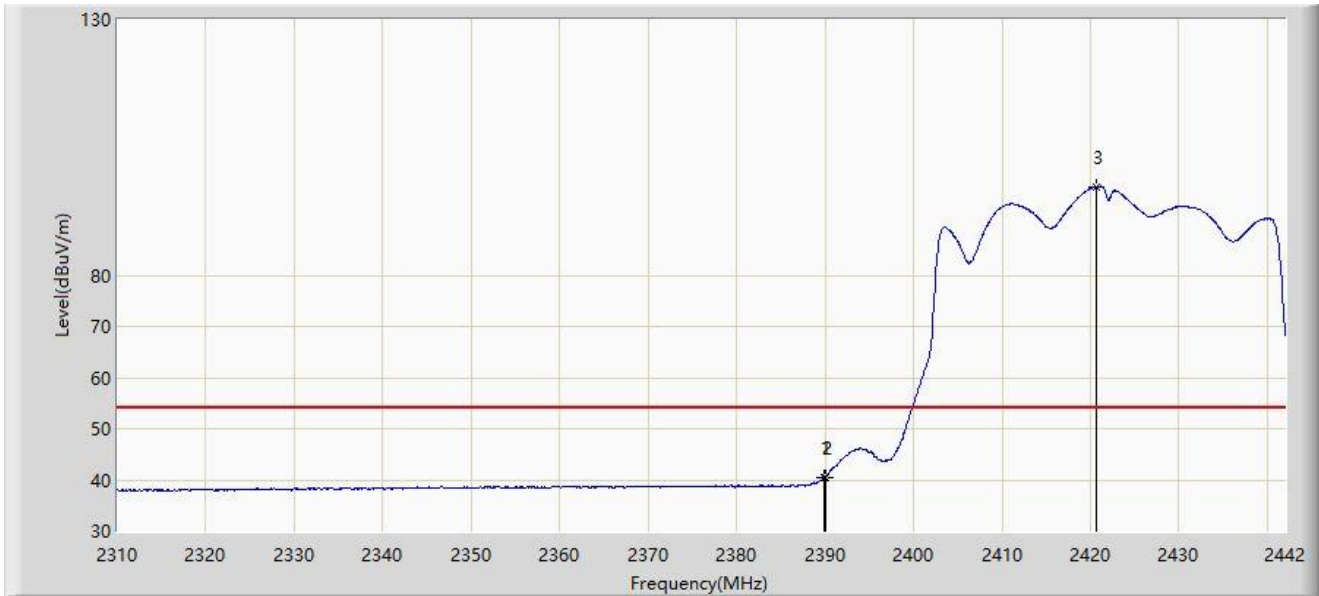


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.860	40.496	8.473	-13.504	54.000	32.023	AV
2		2390.000	40.479	8.456	-13.521	54.000	32.023	AV
3		2420.682	97.281	65.235	N/A	N/A	32.046	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-09-07
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

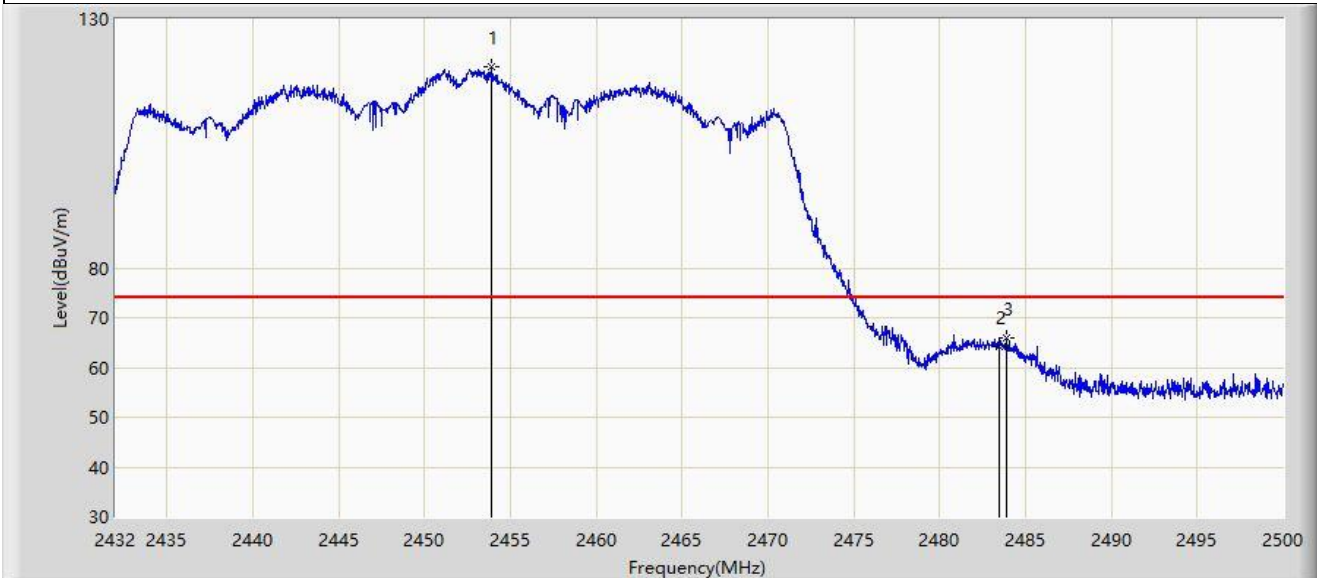


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2453.862	120.449	88.271	N/A	N/A	32.178	PK
2		2483.500	64.125	31.825	-9.875	74.000	32.300	PK
3	*	2483.884	65.835	33.533	-8.165	74.000	32.302	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-09-07
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

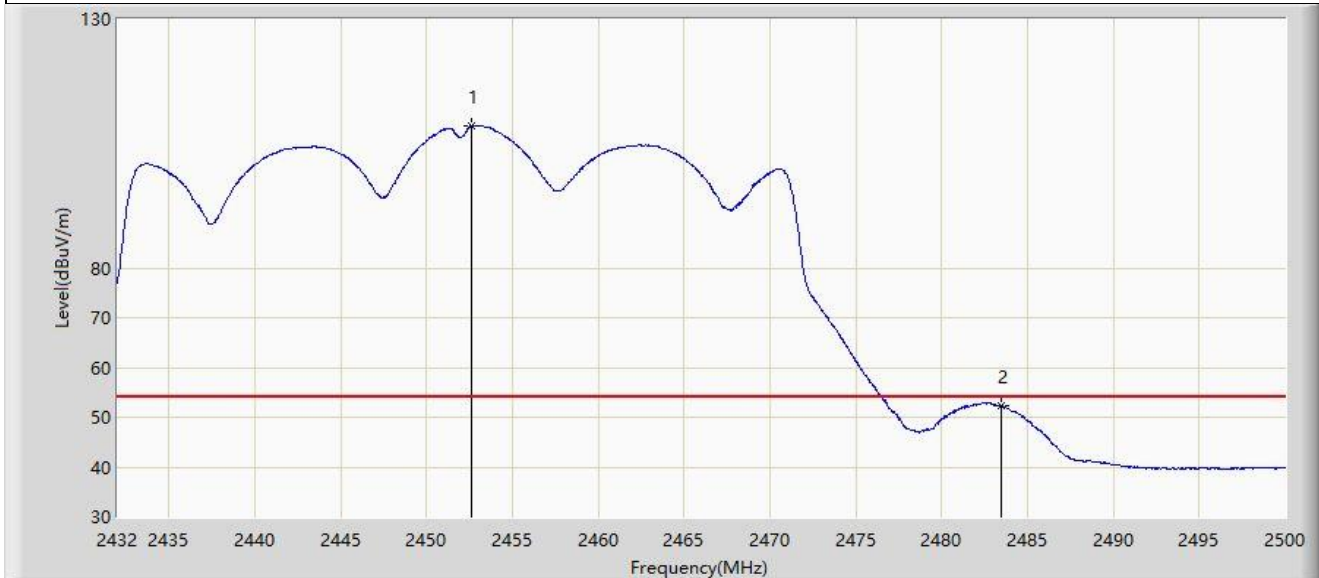


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2452.604	108.474	76.302	N/A	N/A	32.172	AV
2	*	2483.500	52.243	19.943	-1.757	54.000	32.300	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-09-07
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

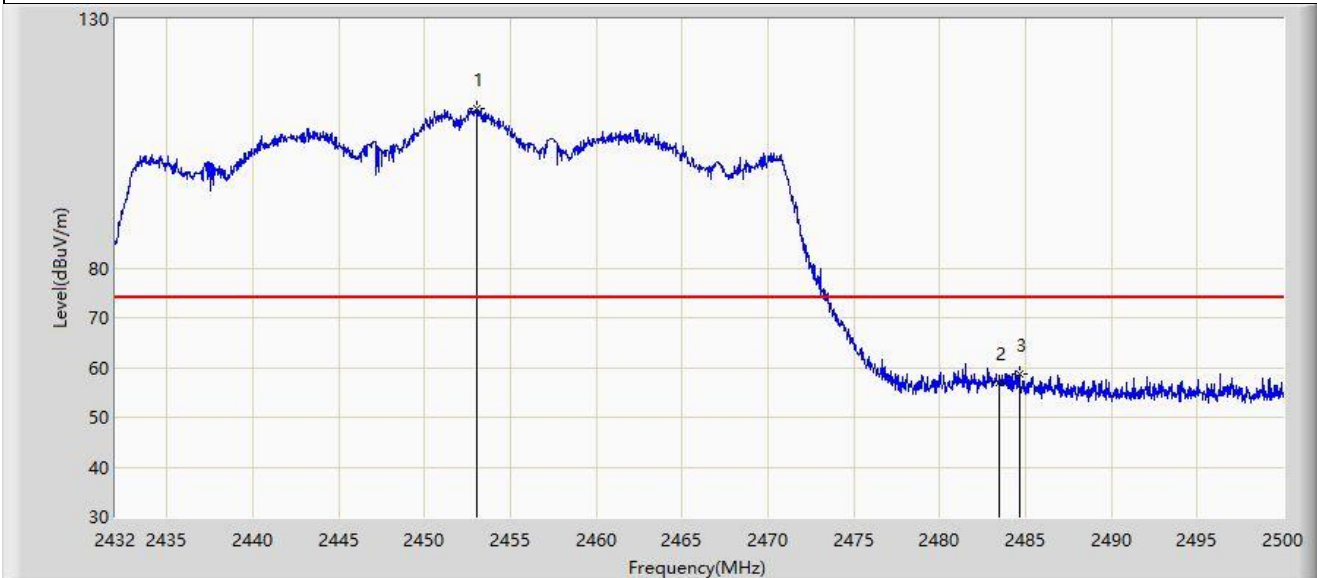


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2453.080	112.104	79.930	N/A	N/A	32.174	PK
2		2483.500	56.827	24.527	-17.173	74.000	32.300	PK
3	*	2484.666	58.770	26.464	-15.230	74.000	32.306	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Test Date: 2023-09-07
Limit: FCC_2.4G_RE(3m)	Engineer: Arvin Ding
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

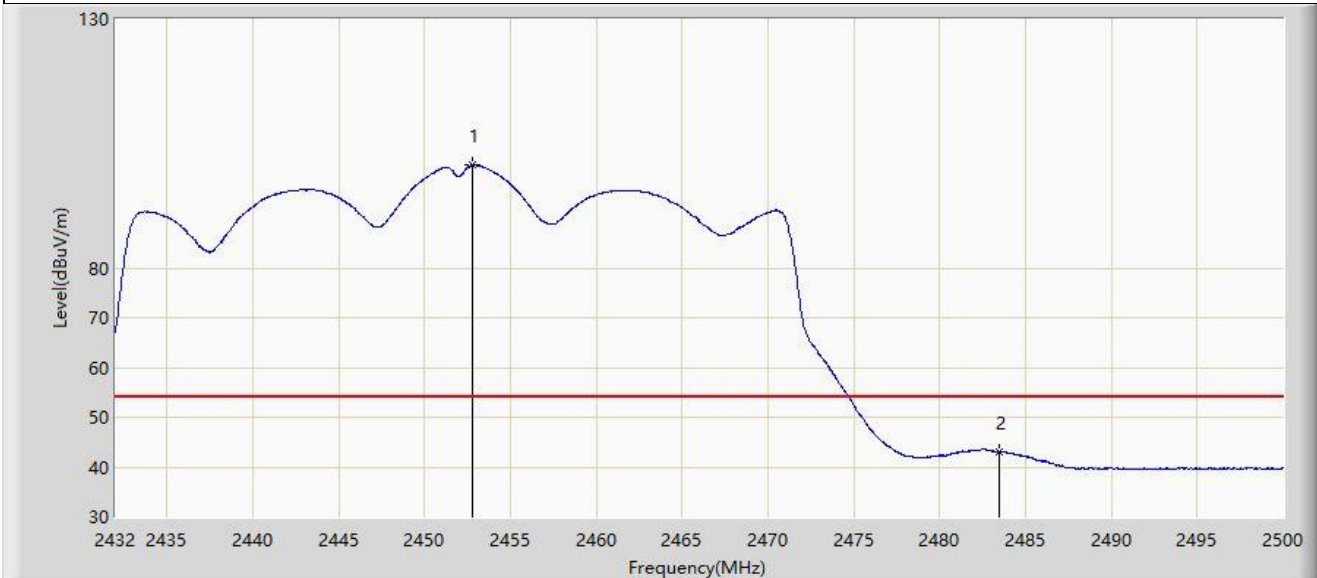

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2452.808	100.665	68.492	N/A	N/A	32.173	AV
2	*	2483.500	42.993	10.693	-11.007	54.000	32.300	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

L23UGSR-5HaxD2HaxD-NM-US

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

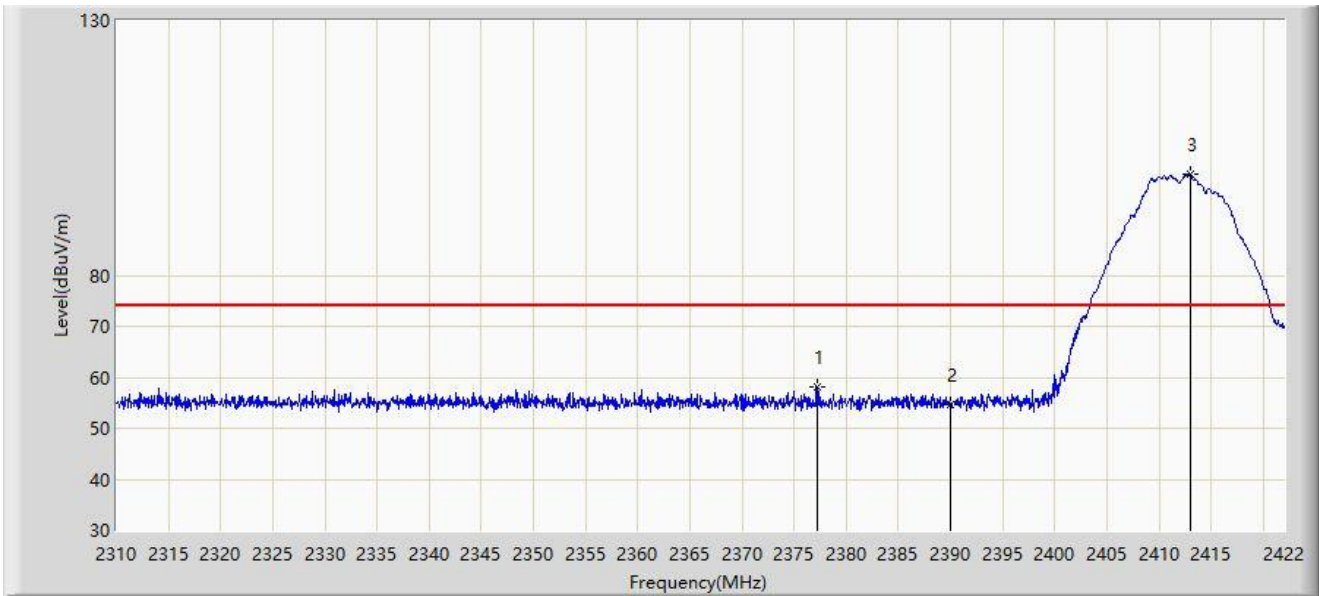


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2377.200	58.233	58.233	-15.767	74.000	0.000	PK
2		2390.000	54.743	54.743	-19.257	74.000	0.000	PK
3		2413.040	99.734	67.987	N/A	N/A	31.747	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

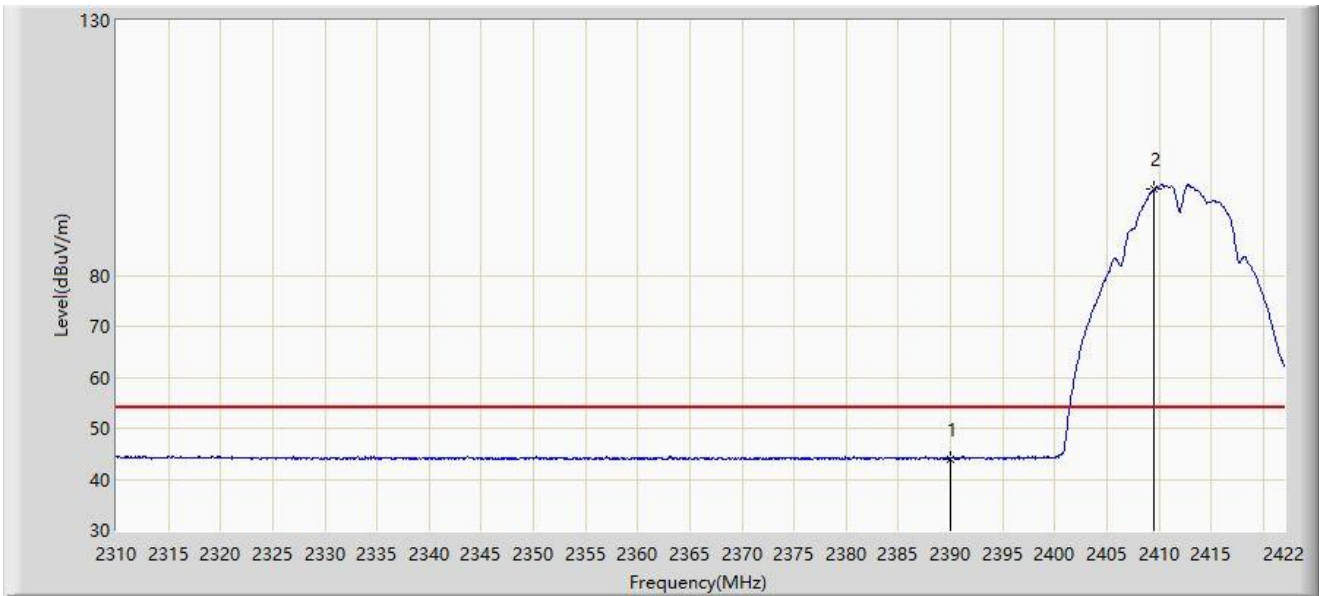


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	44.052	12.199	-9.948	54.000	31.853	AV
2		2409.568	96.881	65.123	N/A	N/A	31.759	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

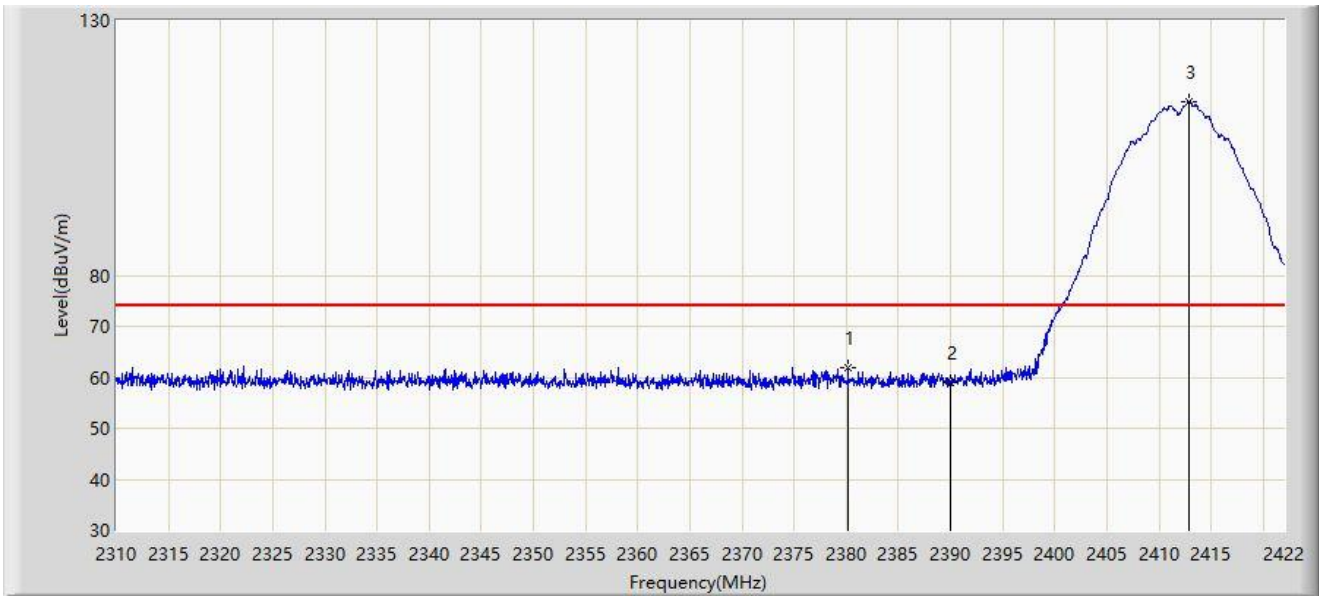


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2380.168	61.908	30.015	-12.092	74.000	31.892	PK
2		2390.000	59.095	27.242	-14.905	74.000	31.853	PK
3		2412.872	114.159	82.412	N/A	N/A	31.747	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

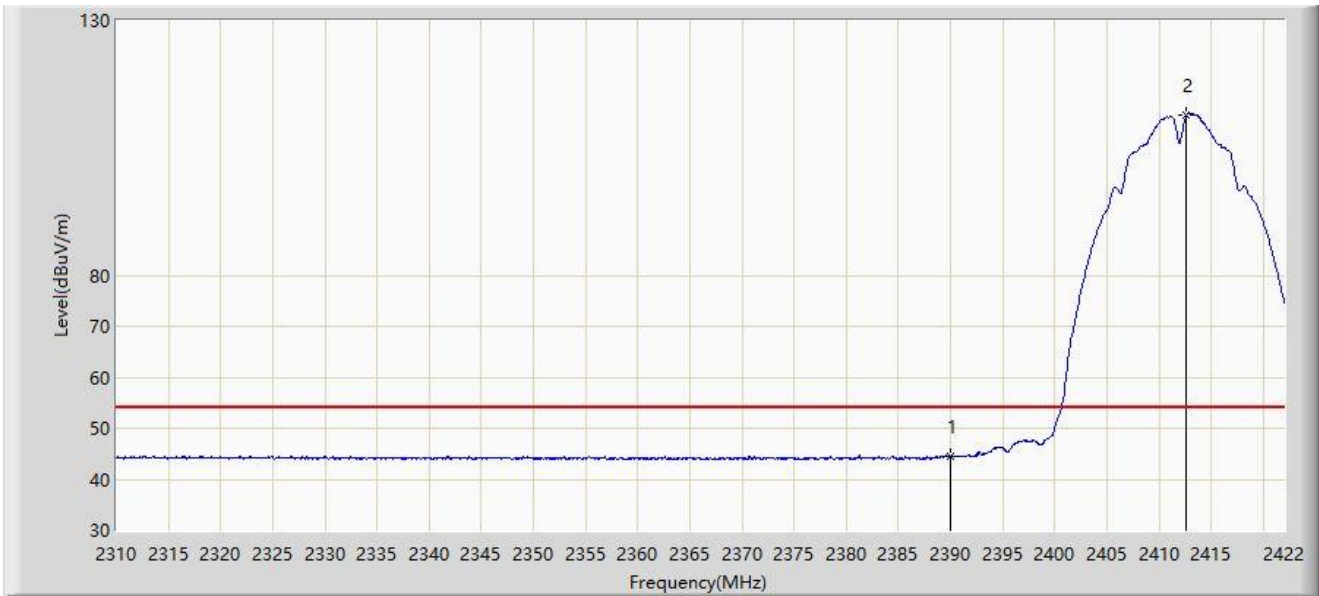


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	44.519	12.666	-9.481	54.000	31.853	AV
2		2412.648	111.567	79.819	N/A	N/A	31.748	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

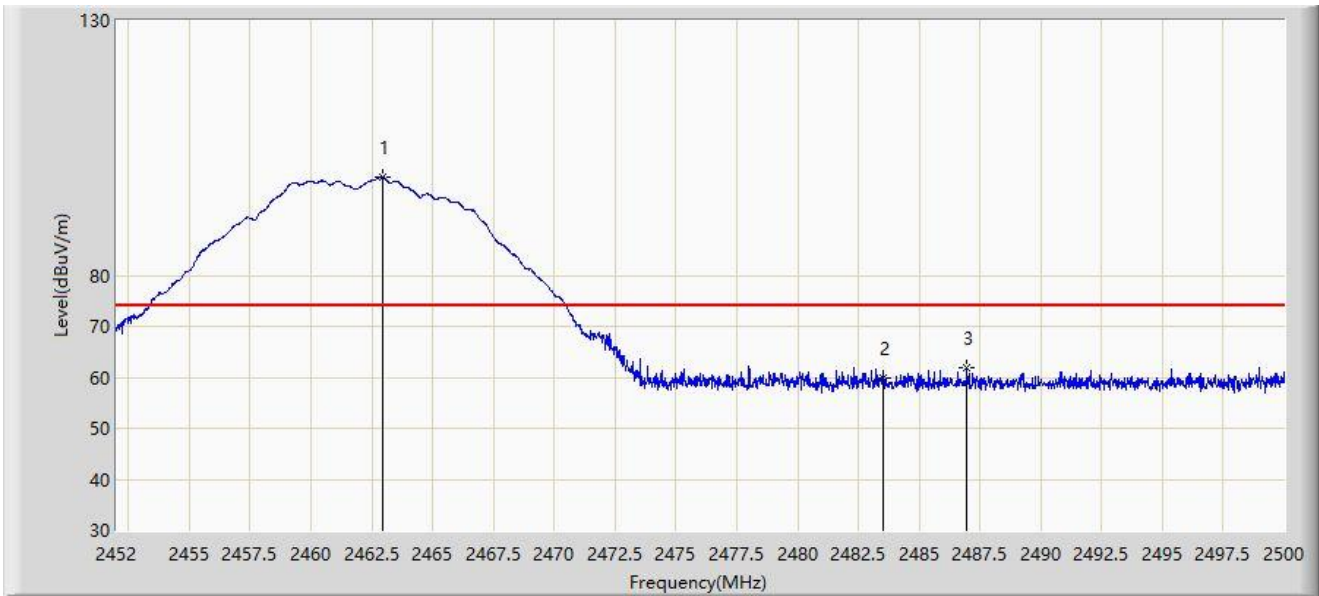


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		2462.944	99.339	67.649	N/A	N/A	31.690	PK
2		2483.500	59.763	28.066	-14.237	74.000	31.696	PK
3	*	2486.968	61.756	30.061	-12.244	74.000	31.695	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

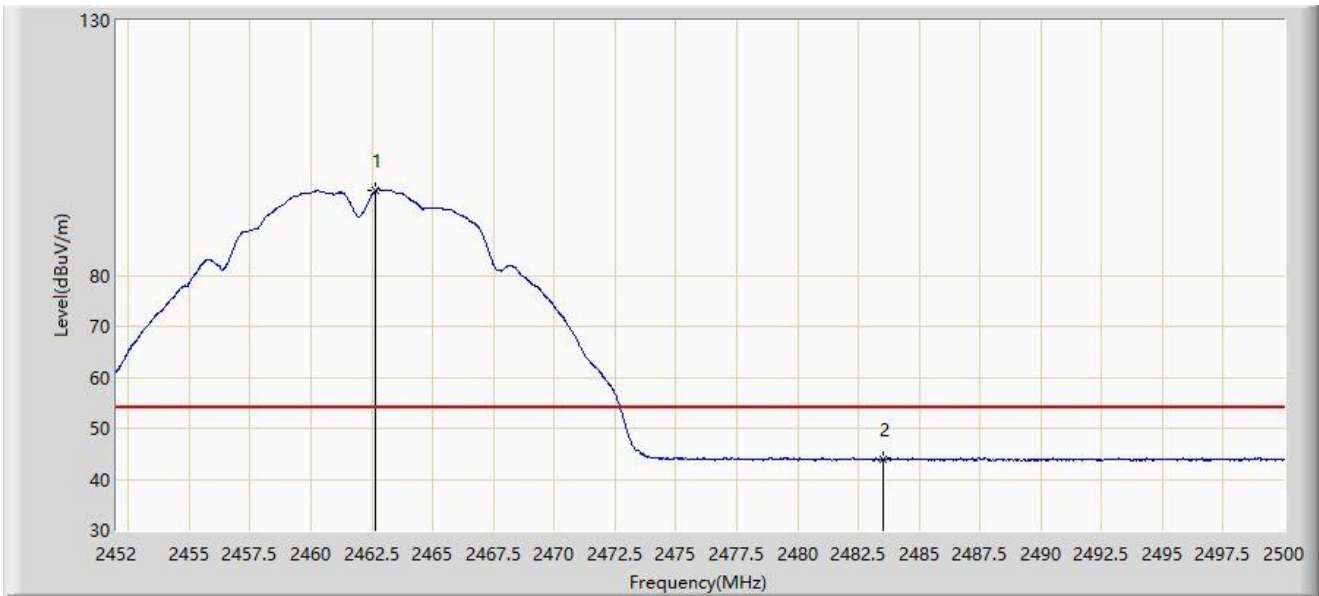


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2462.656	96.647	64.957	N/A	N/A	31.690	AV
2	*	2483.500	44.024	12.327	-9.976	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

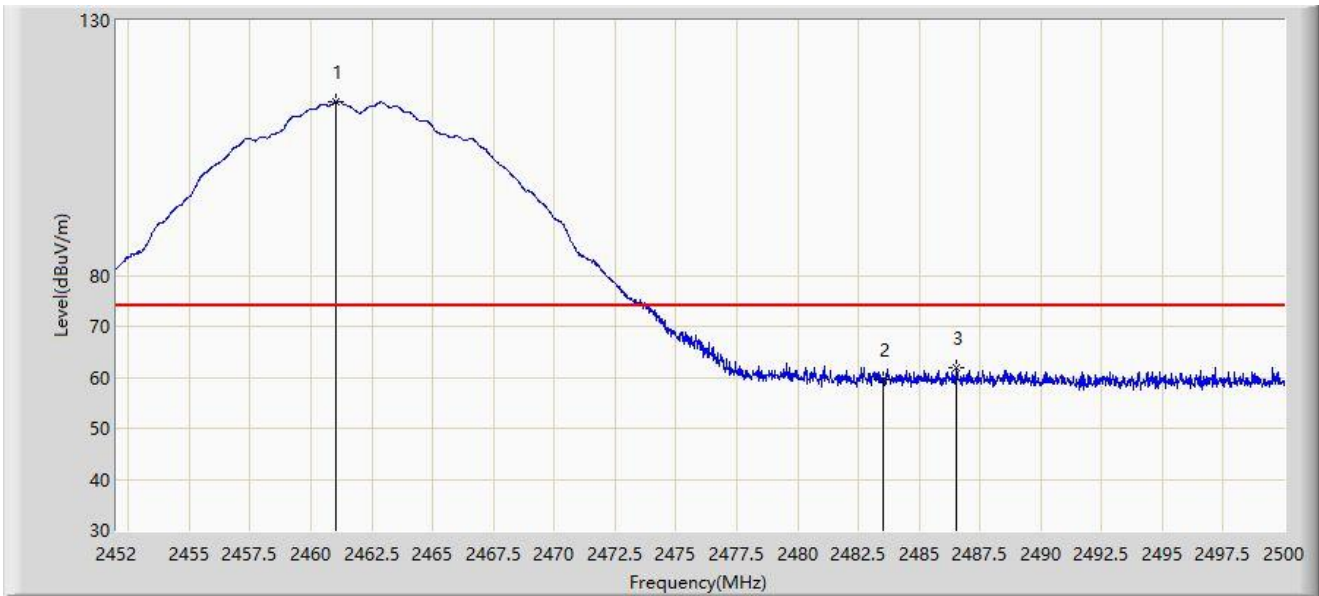

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2461.000	114.016	82.326	N/A	N/A	31.689	PK
2		2483.500	59.450	27.753	-14.550	74.000	31.696	PK
3	*	2486.512	61.878	30.183	-12.122	74.000	31.695	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2461.168	111.844	80.154	N/A	N/A	31.690	AV
2		2483.500	45.522	13.825	-8.478	54.000	31.696	AV
3	*	2483.632	45.758	14.061	-8.242	54.000	31.697	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

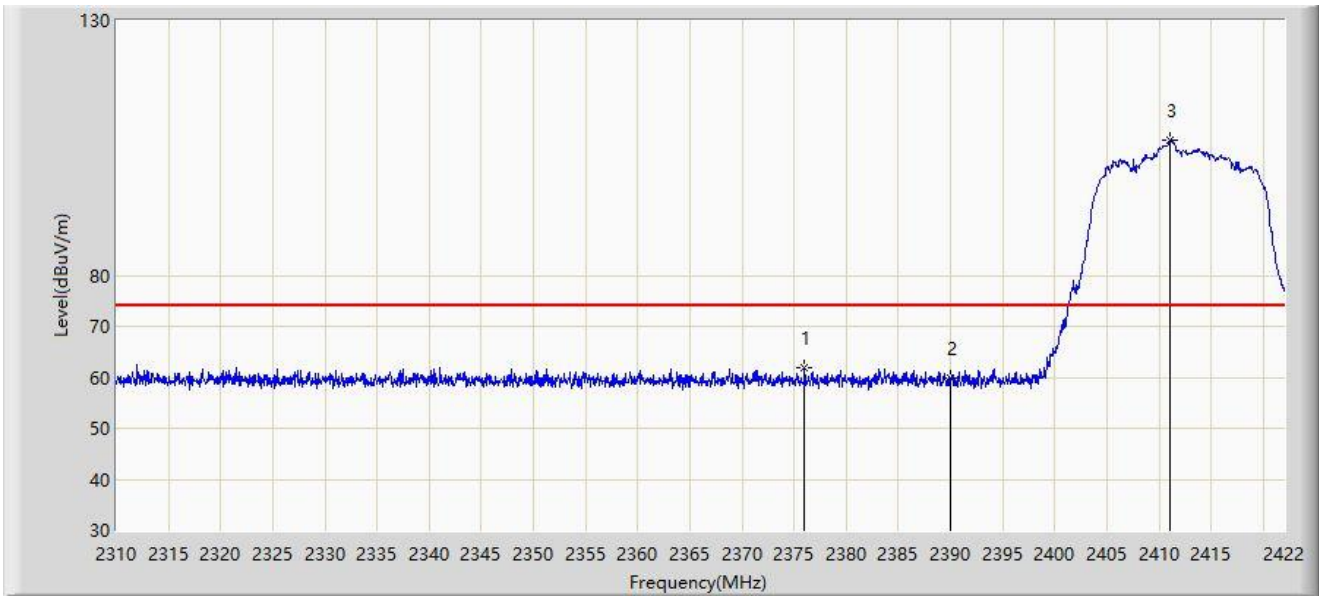


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2376.024	61.983	30.083	-12.017	74.000	31.900	PK
2		2390.000	59.726	27.873	-14.274	74.000	31.853	PK
3		2411.080	106.393	74.640	N/A	N/A	31.753	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

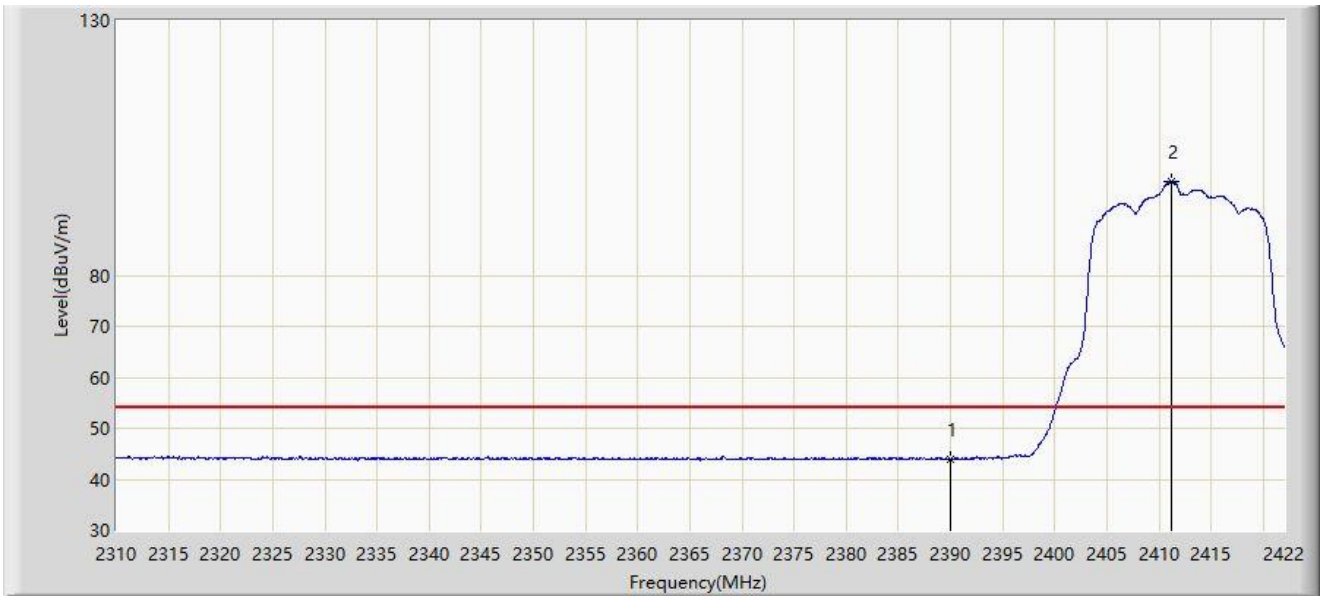


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	43.853	12.000	-10.147	54.000	31.853	AV
2		2411.136	98.496	66.743	N/A	N/A	31.753	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

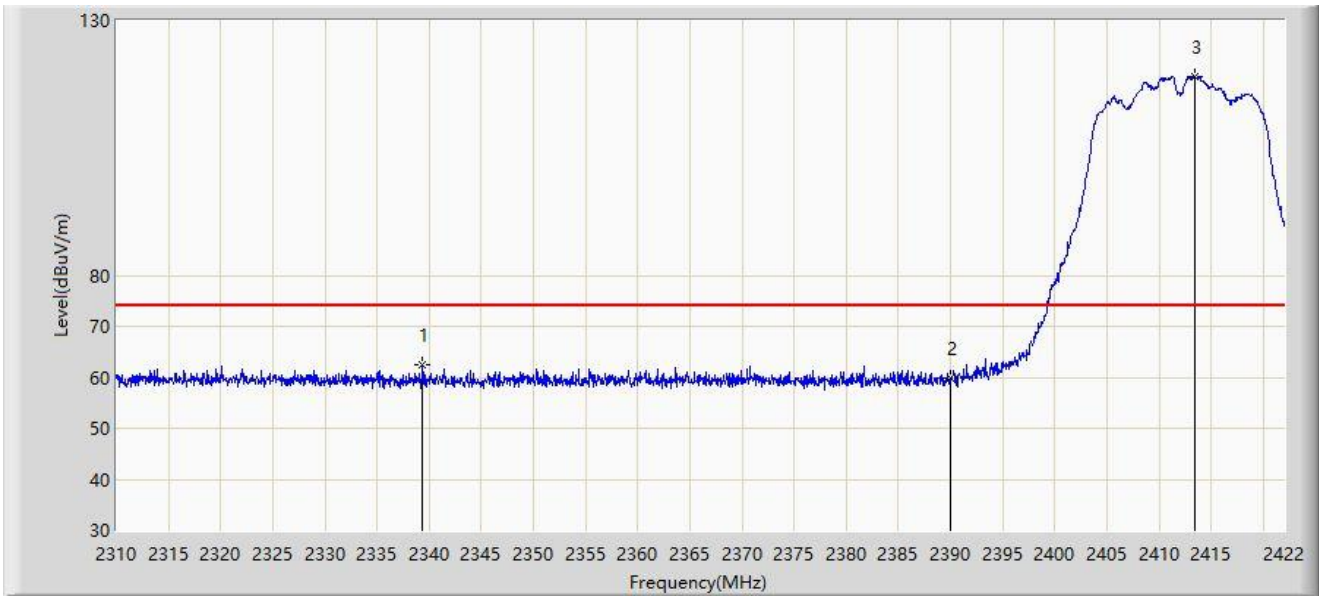


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2339.400	62.577	30.602	-11.423	74.000	31.976	PK
2		2390.000	59.770	27.917	-14.230	74.000	31.853	PK
3		2413.432	119.046	87.300	N/A	N/A	31.746	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

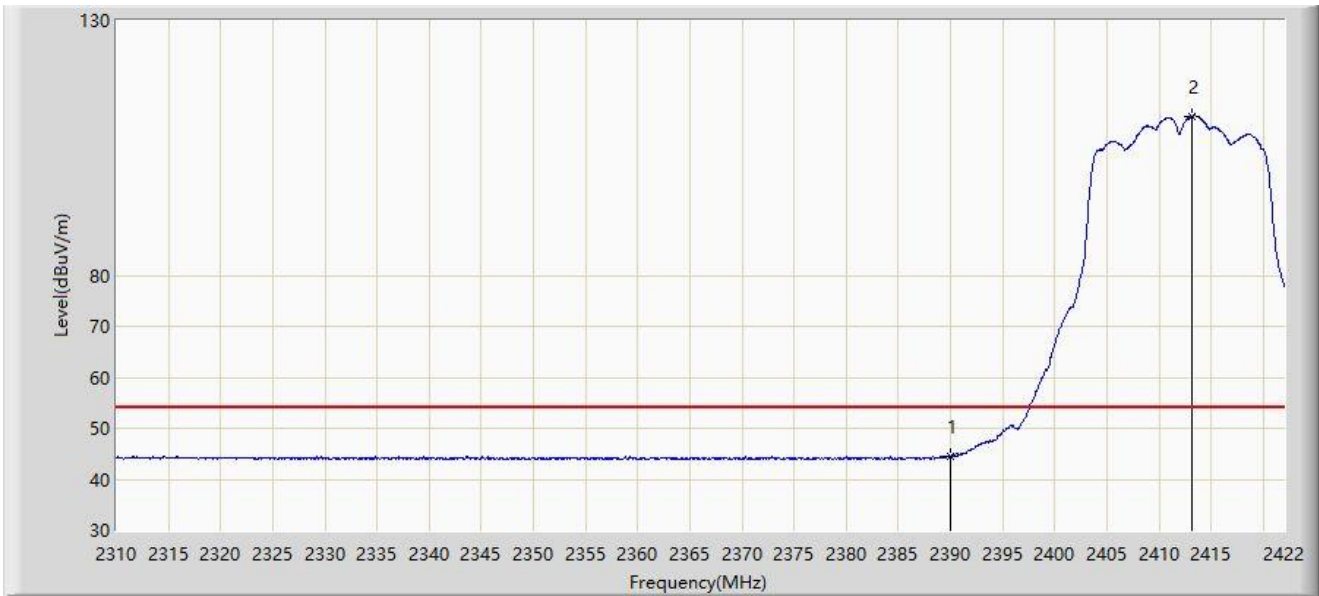


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	44.467	12.614	-9.533	54.000	31.853	AV
2		2413.208	111.258	79.512	N/A	N/A	31.746	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

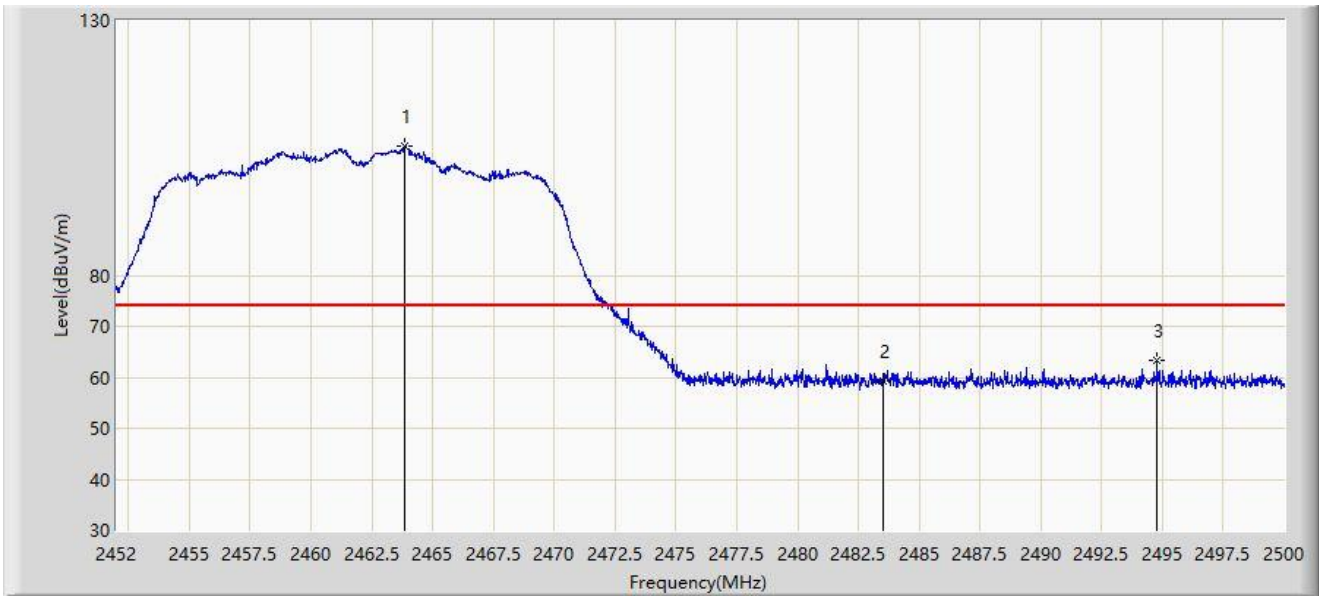


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.832	105.311	73.620	N/A	N/A	31.691	PK
2		2483.500	59.154	27.457	-14.846	74.000	31.696	PK
3	*	2494.792	63.372	31.677	-10.628	74.000	31.694	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

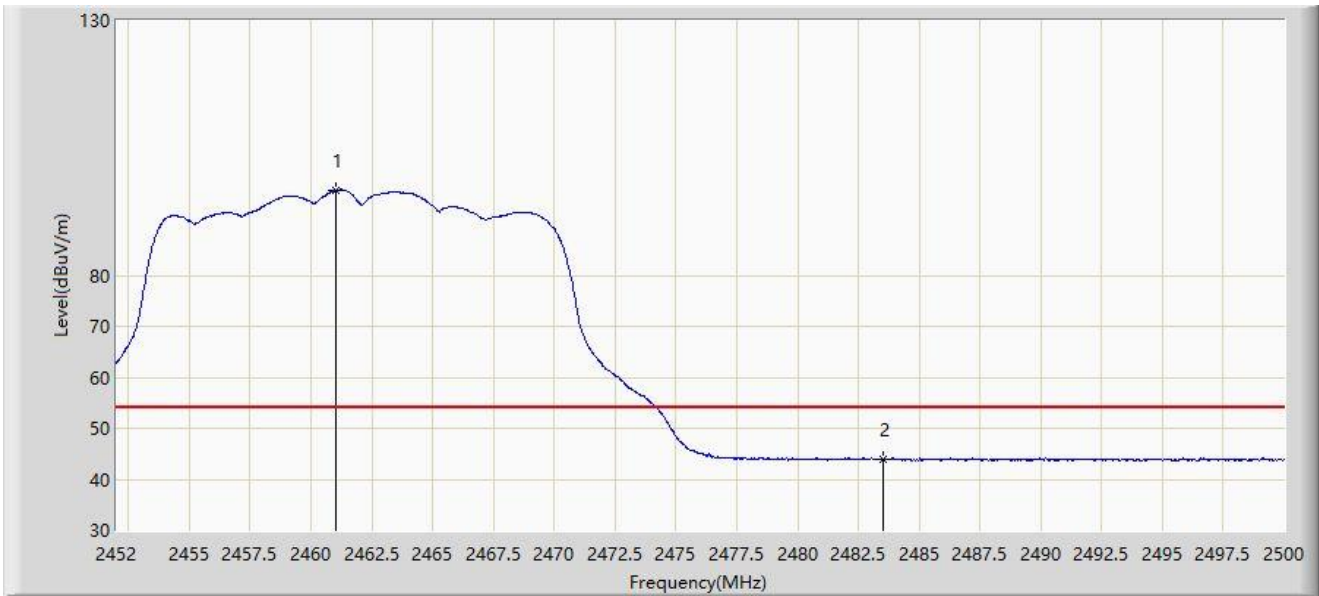

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2461.024	96.678	64.988	N/A	N/A	31.689	AV
2	*	2483.500	43.931	12.234	-10.069	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.976	111.545	79.855	N/A	N/A	31.690	AV
2	*	2483.500	46.817	15.120	-7.183	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

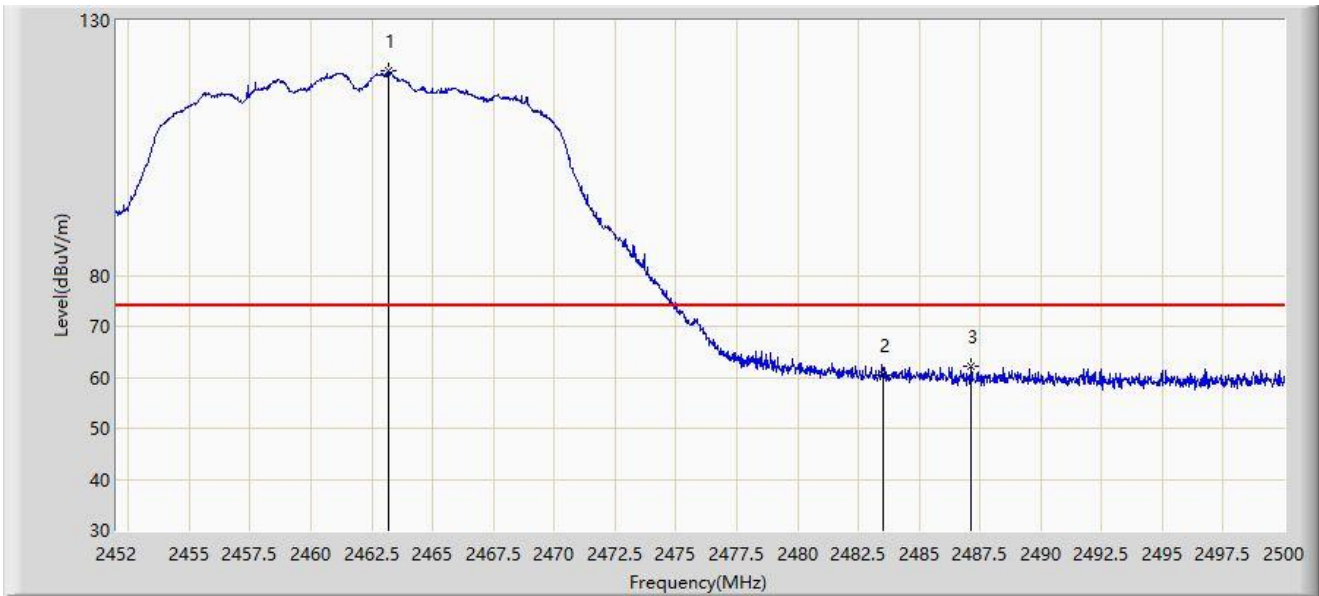


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.160	120.002	88.311	N/A	N/A	31.691	PK
2		2483.500	60.446	28.749	-13.554	74.000	31.696	PK
3	*	2487.112	62.154	30.459	-11.846	74.000	31.695	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

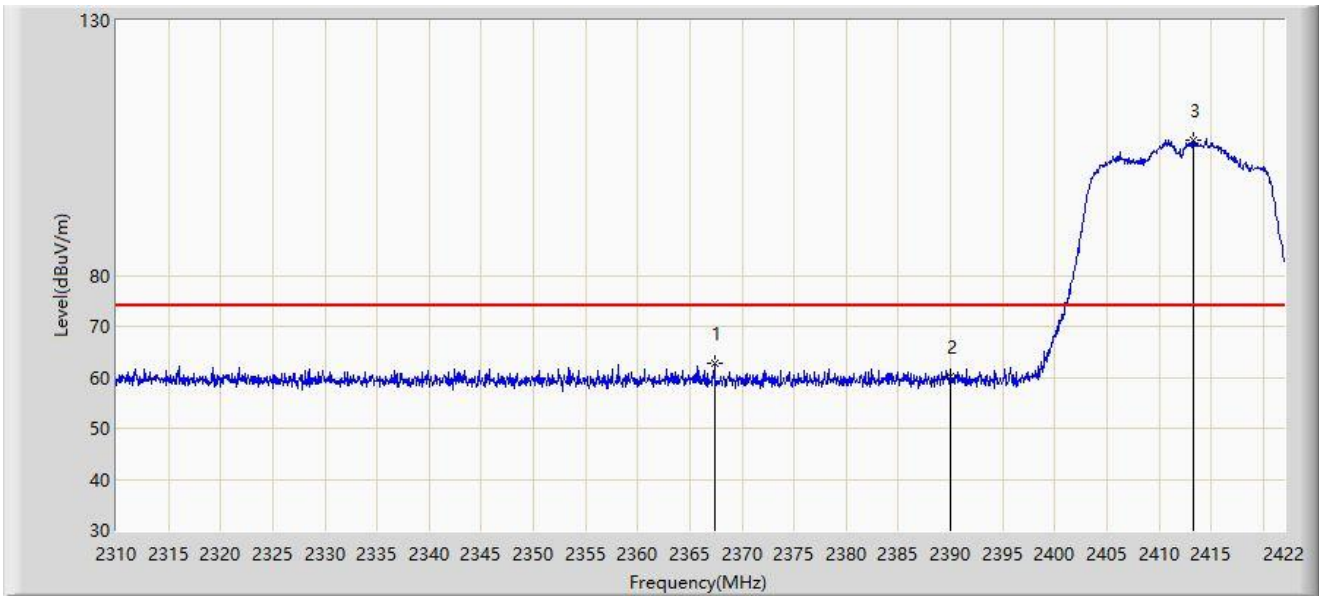


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2367.400	62.816	30.892	-11.184	74.000	31.924	PK
2		2390.000	60.081	28.228	-13.919	74.000	31.853	PK
3		2413.264	106.635	74.889	N/A	N/A	31.746	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

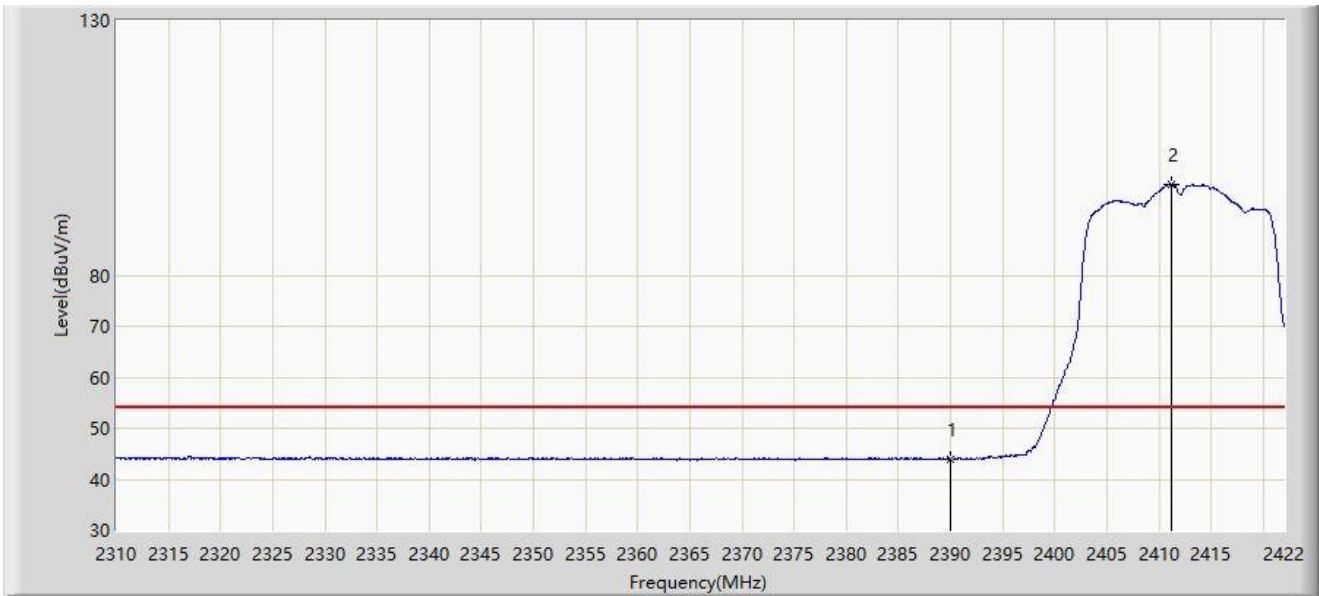


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	43.973	12.120	-10.027	54.000	31.853	AV
2		2411.136	97.827	66.074	N/A	N/A	31.753	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

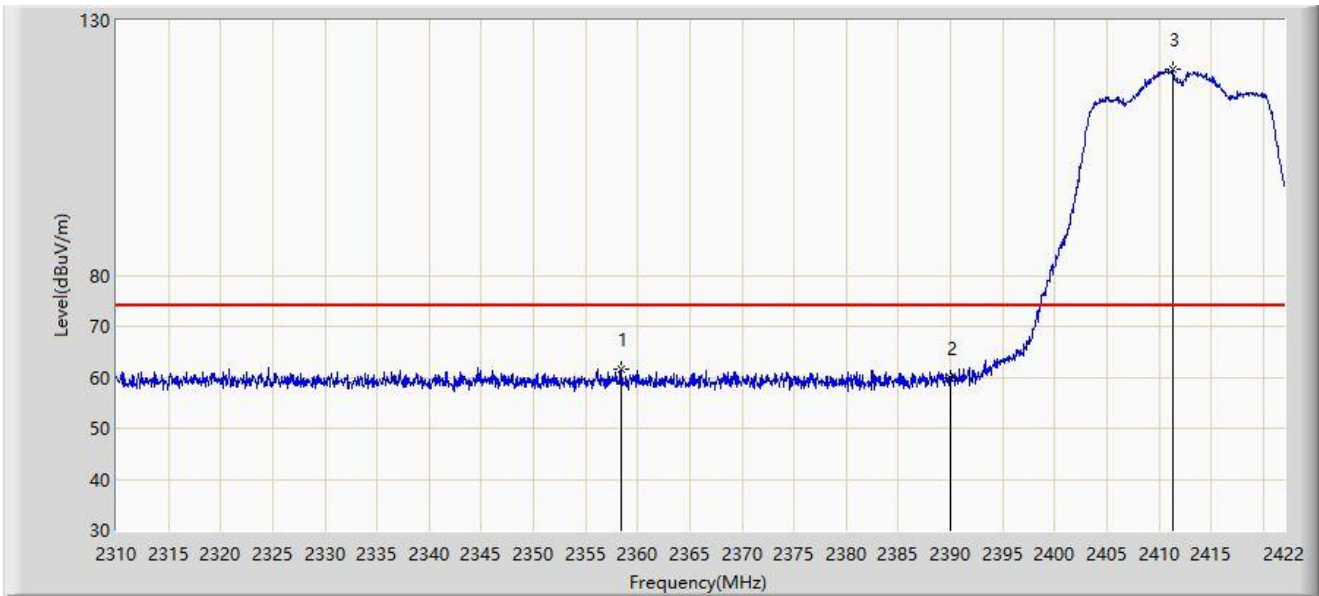


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2358.384	61.633	29.691	-12.367	74.000	31.943	PK
2		2390.000	59.934	28.081	-14.066	74.000	31.853	PK
3		2411.304	120.427	88.675	N/A	N/A	31.752	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

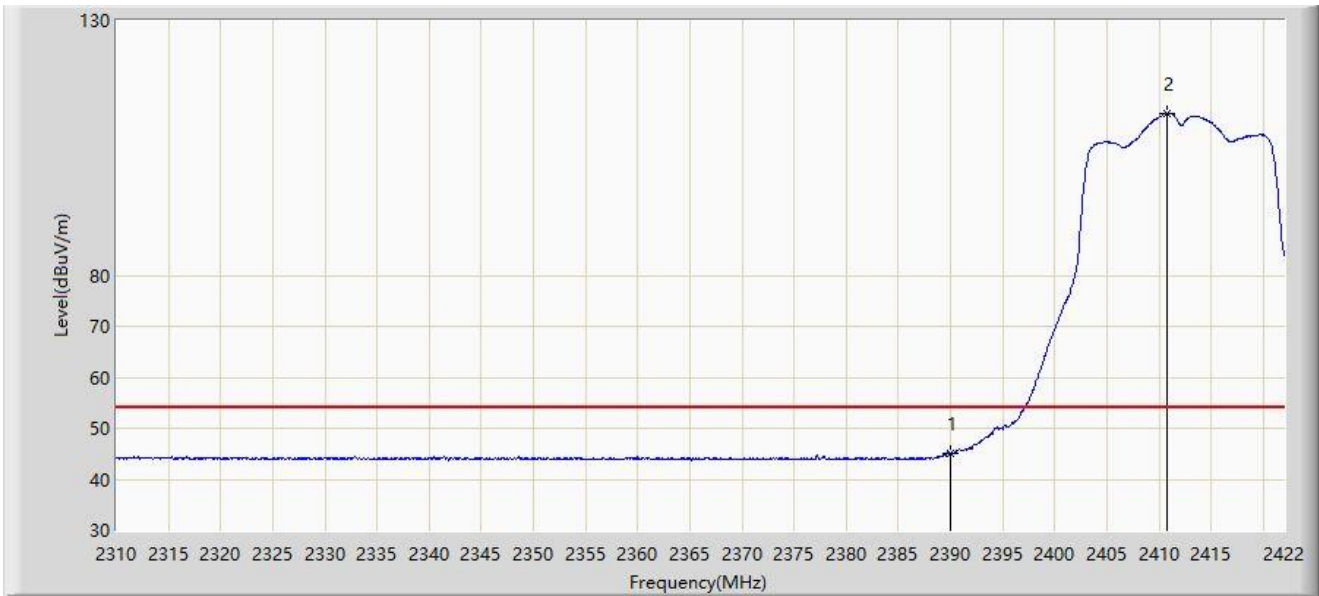


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	45.053	13.200	-8.947	54.000	31.853	AV
2		2410.800	111.702	79.948	N/A	N/A	31.754	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

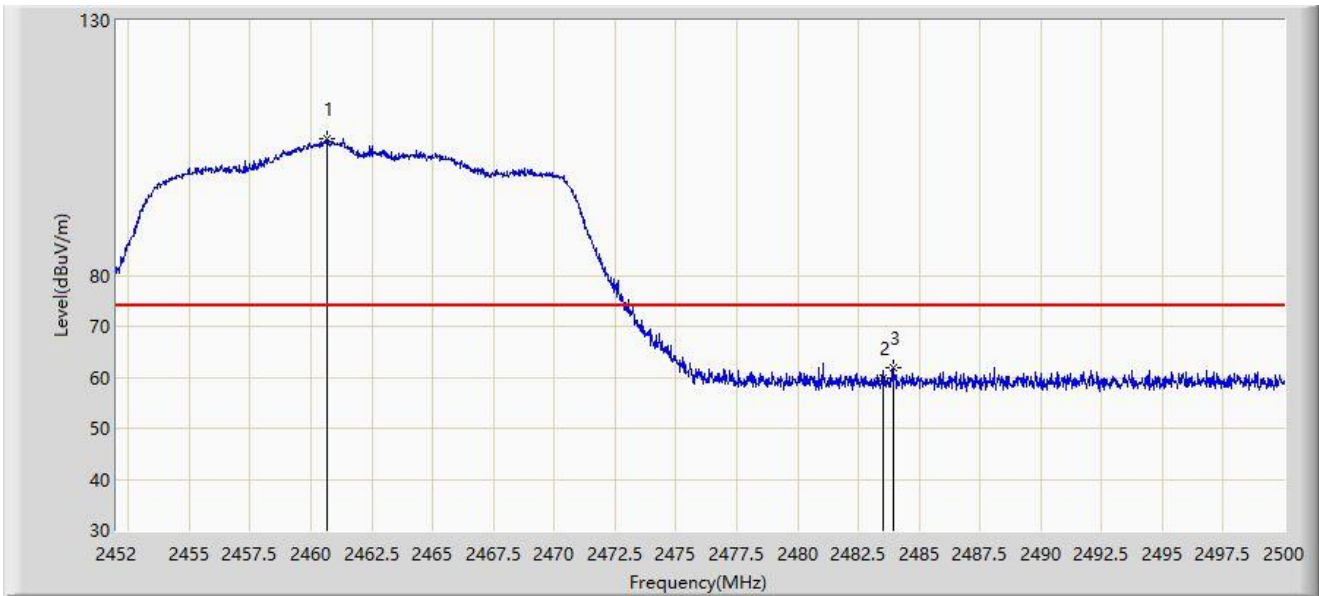


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2460.688	106.721	75.031	N/A	N/A	31.690	PK
2		2483.500	59.777	28.080	-14.223	74.000	31.696	PK
3	*	2483.920	61.944	30.247	-12.056	74.000	31.697	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

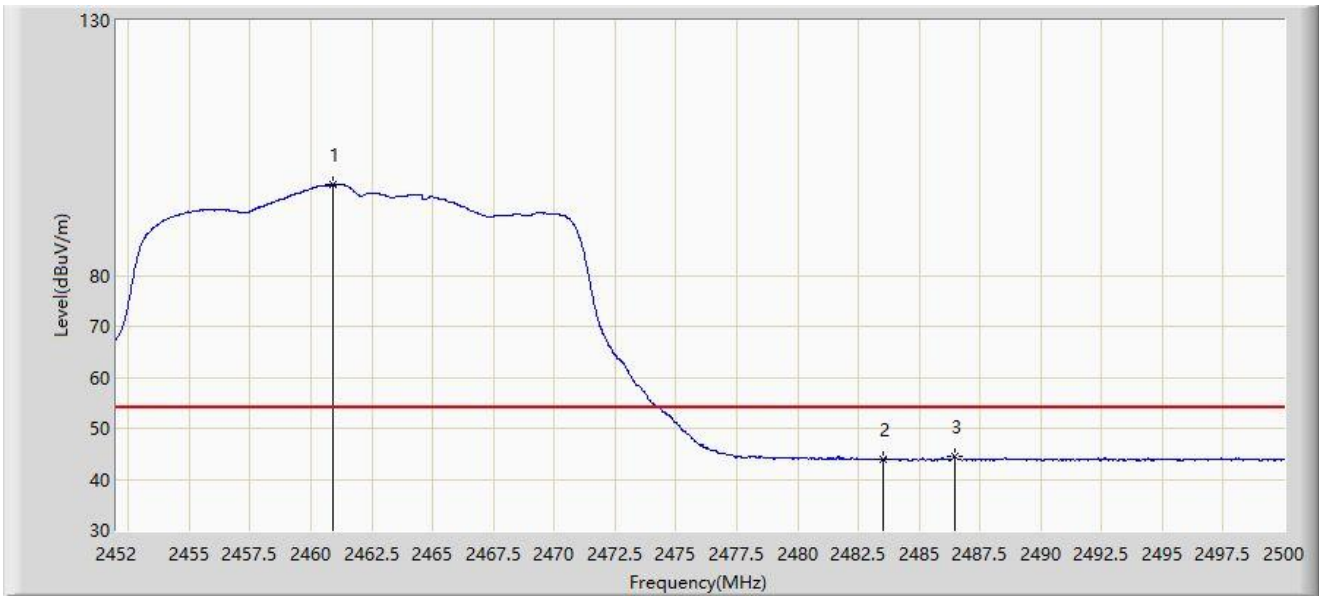


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2460.928	97.841	66.151	N/A	N/A	31.690	AV
2		2483.500	43.934	12.237	-10.066	54.000	31.696	AV
3	*	2486.488	44.448	12.753	-9.552	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

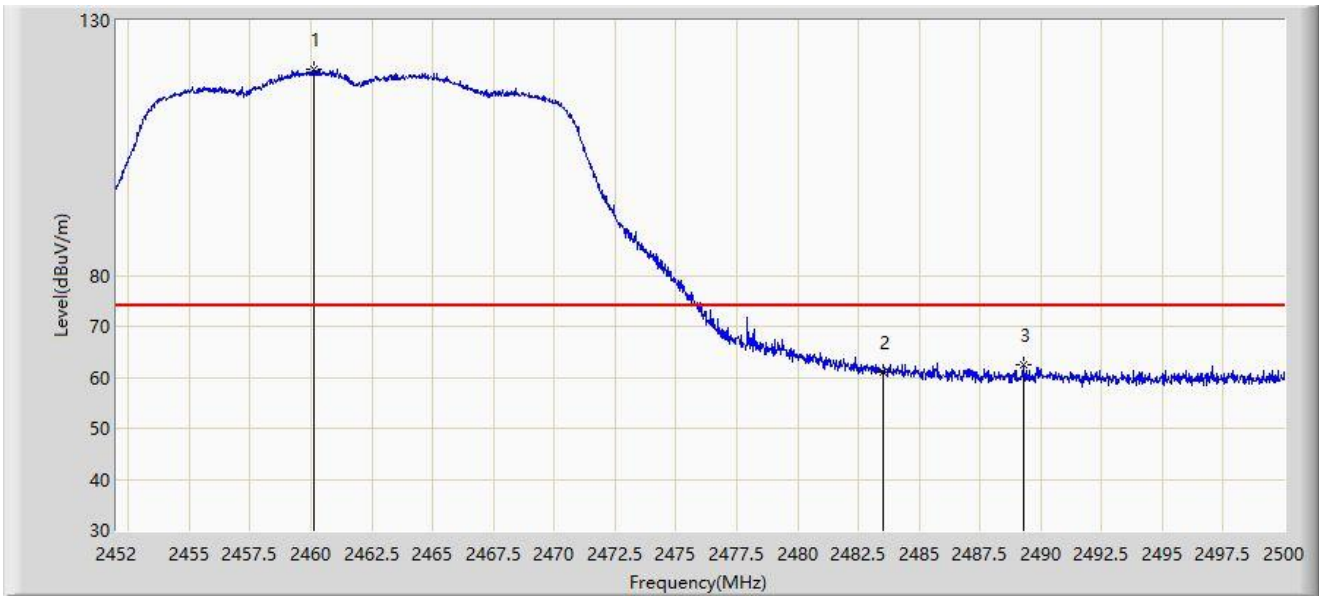


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2460.136	120.529	88.839	N/A	N/A	31.690	PK
2		2483.500	61.076	29.379	-12.924	74.000	31.696	PK
3	*	2489.320	62.457	30.763	-11.543	74.000	31.694	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

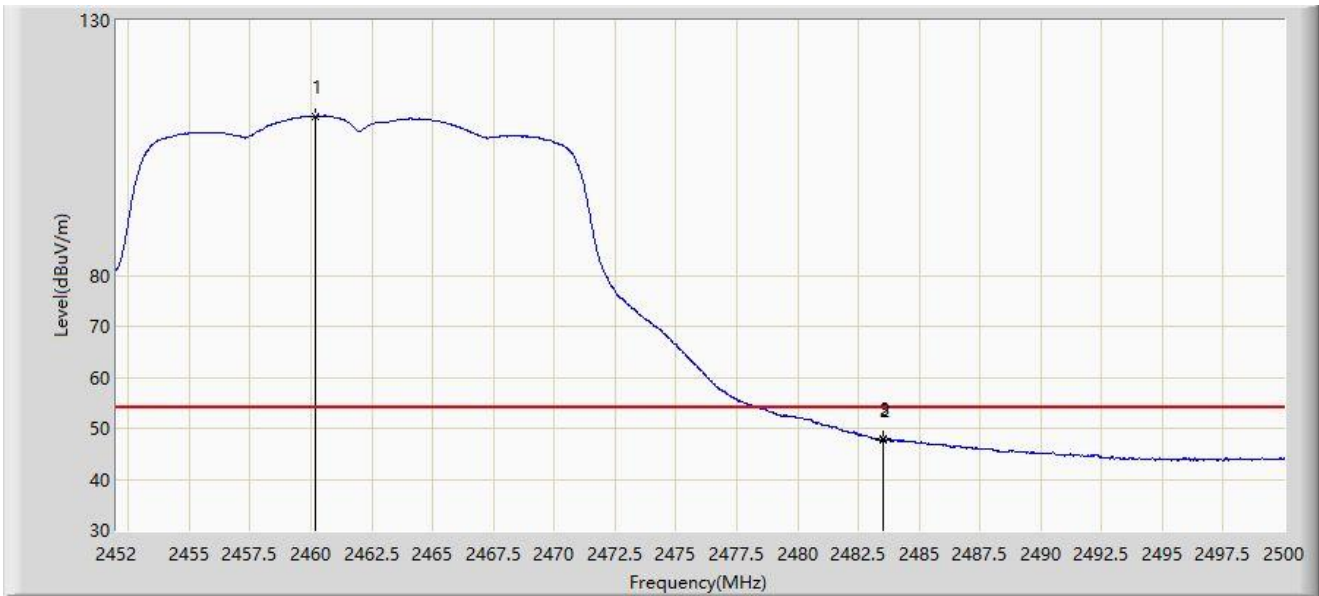


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2460.184	111.248	79.558	N/A	N/A	31.689	AV
2		2483.500	47.824	16.127	-6.176	54.000	31.696	AV
3	*	2483.536	47.898	16.201	-6.102	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

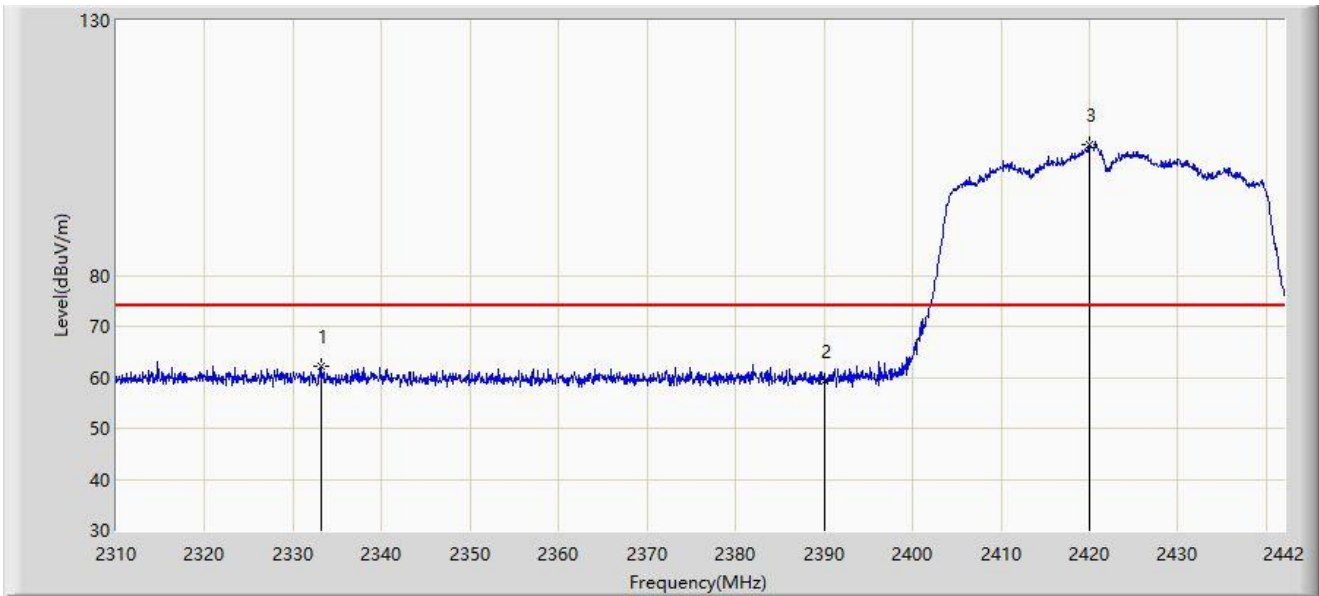


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2333.100	62.071	30.078	-11.929	74.000	31.992	PK
2		2390.000	59.251	27.398	-14.749	74.000	31.853	PK
3		2419.956	105.652	73.927	N/A	N/A	31.725	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

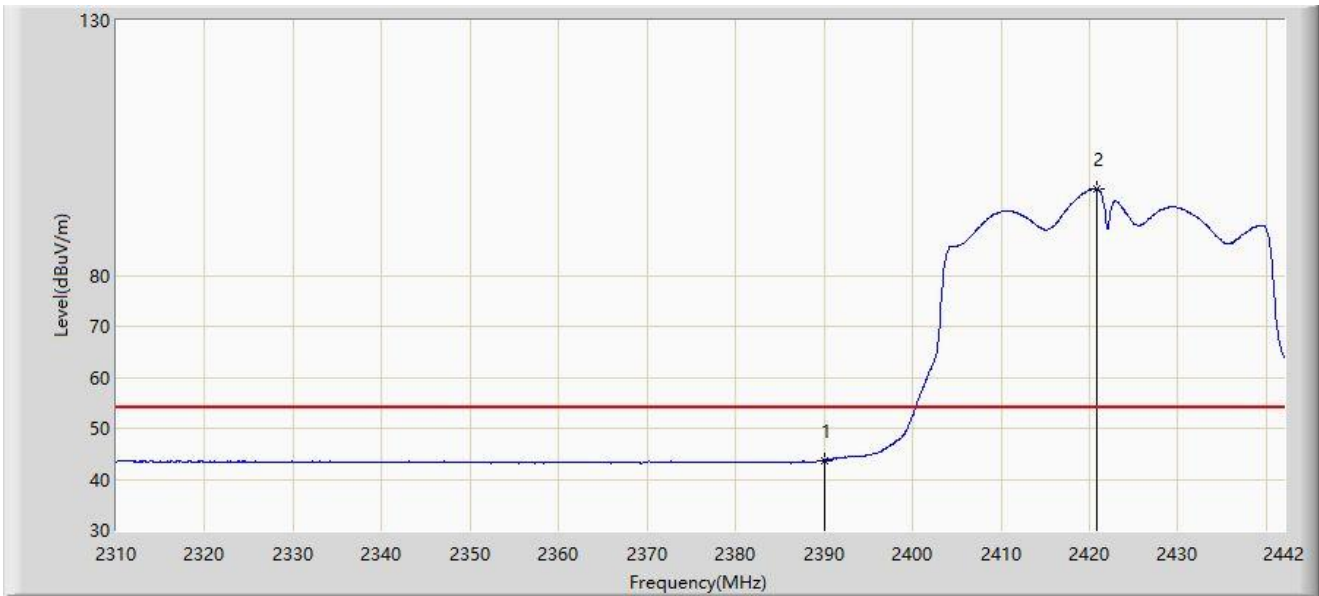


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	43.756	11.903	-10.244	54.000	31.853	AV
2		2420.814	96.951	65.227	N/A	N/A	31.725	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

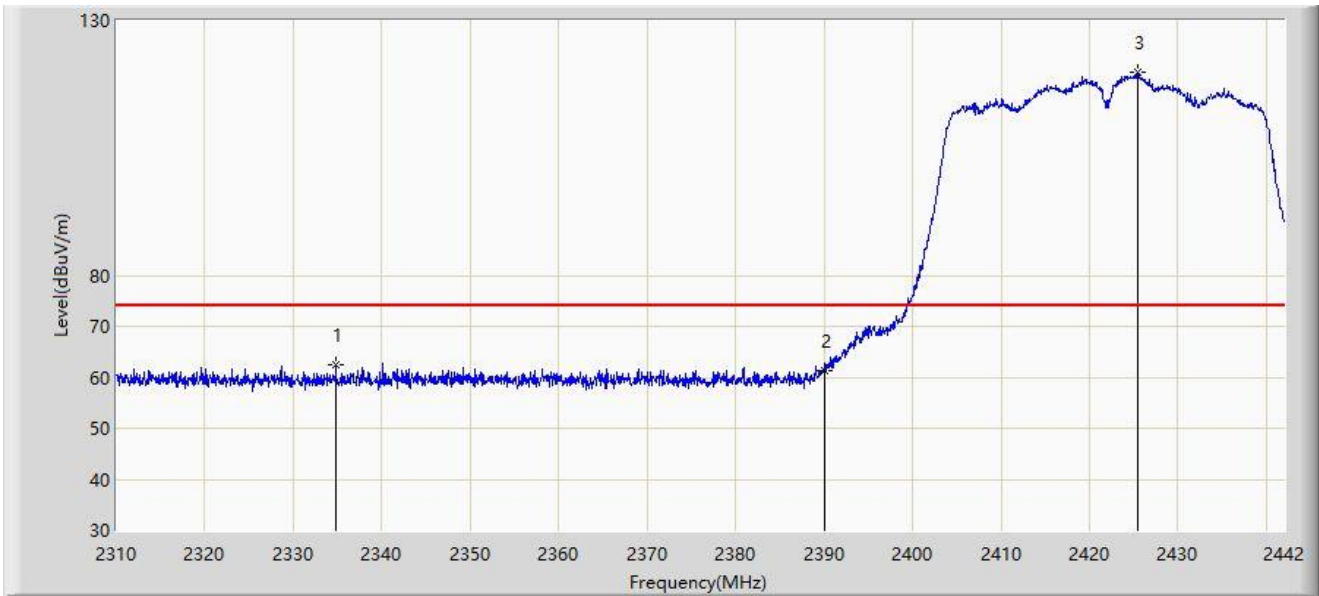


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2334.816	62.567	30.579	-11.433	74.000	31.988	PK
2		2390.000	61.413	29.560	-12.587	74.000	31.853	PK
3		2425.500	119.760	88.040	N/A	N/A	31.721	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

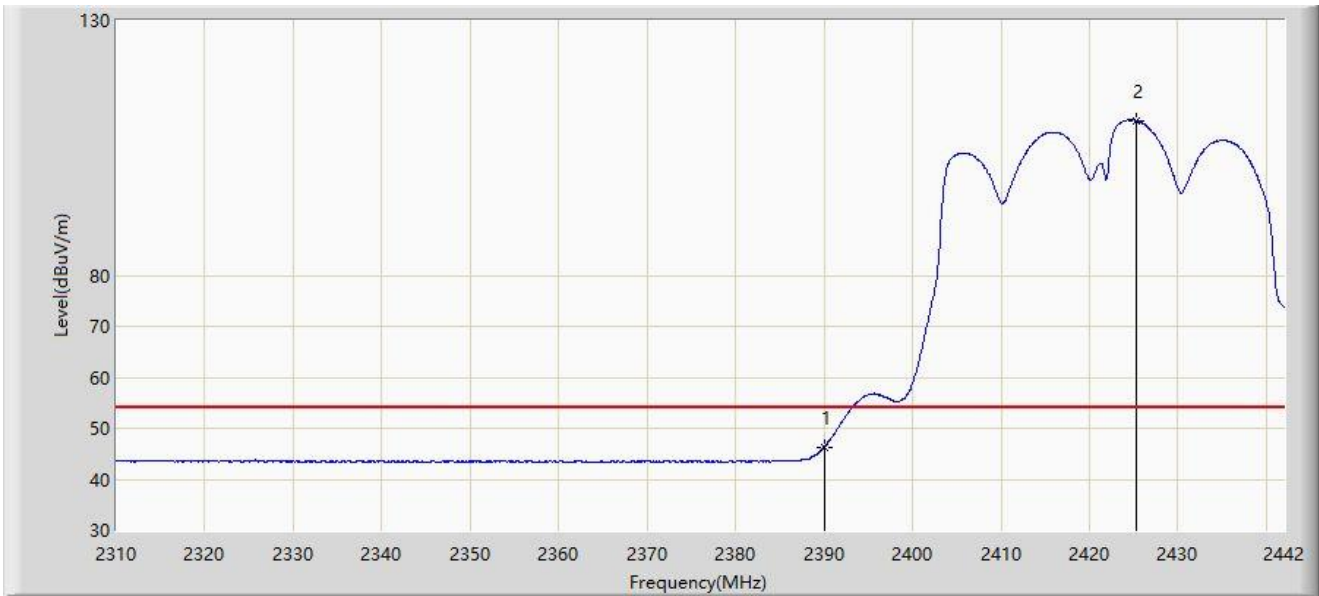


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	46.215	14.362	-7.785	54.000	31.853	AV
2		2425.302	110.305	78.585	N/A	N/A	31.720	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

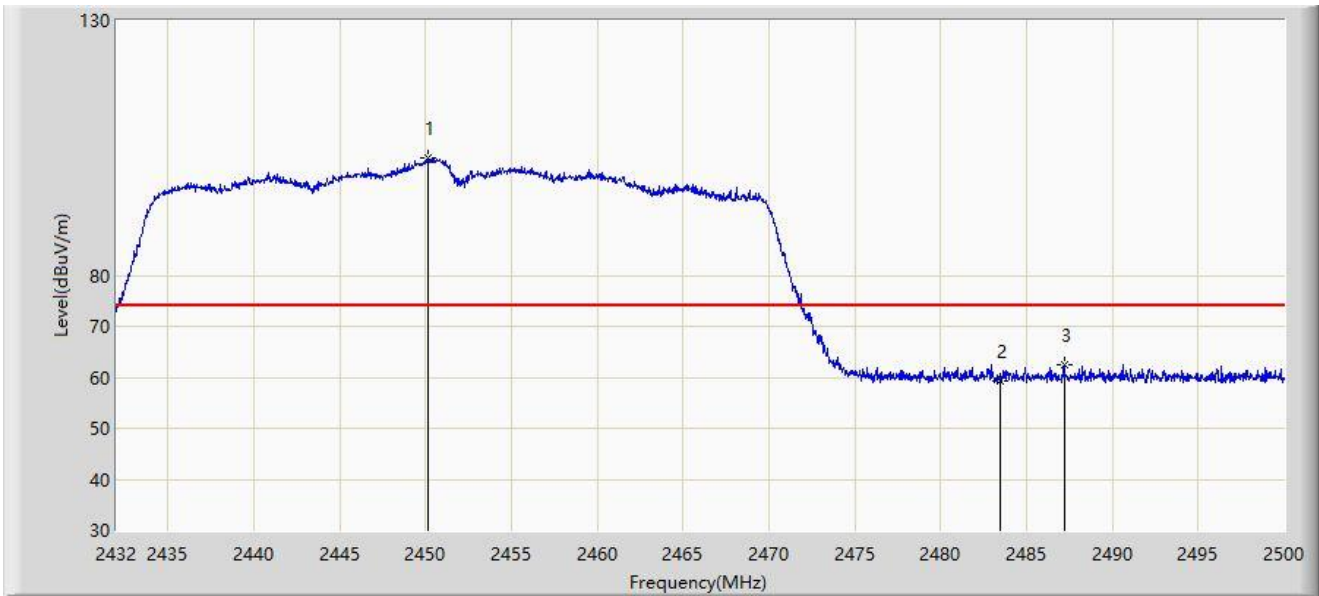


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2450.122	102.918	71.217	N/A	N/A	31.701	PK
2		2483.500	59.334	27.637	-14.666	74.000	31.696	PK
3	*	2487.216	62.373	30.678	-11.627	74.000	31.695	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

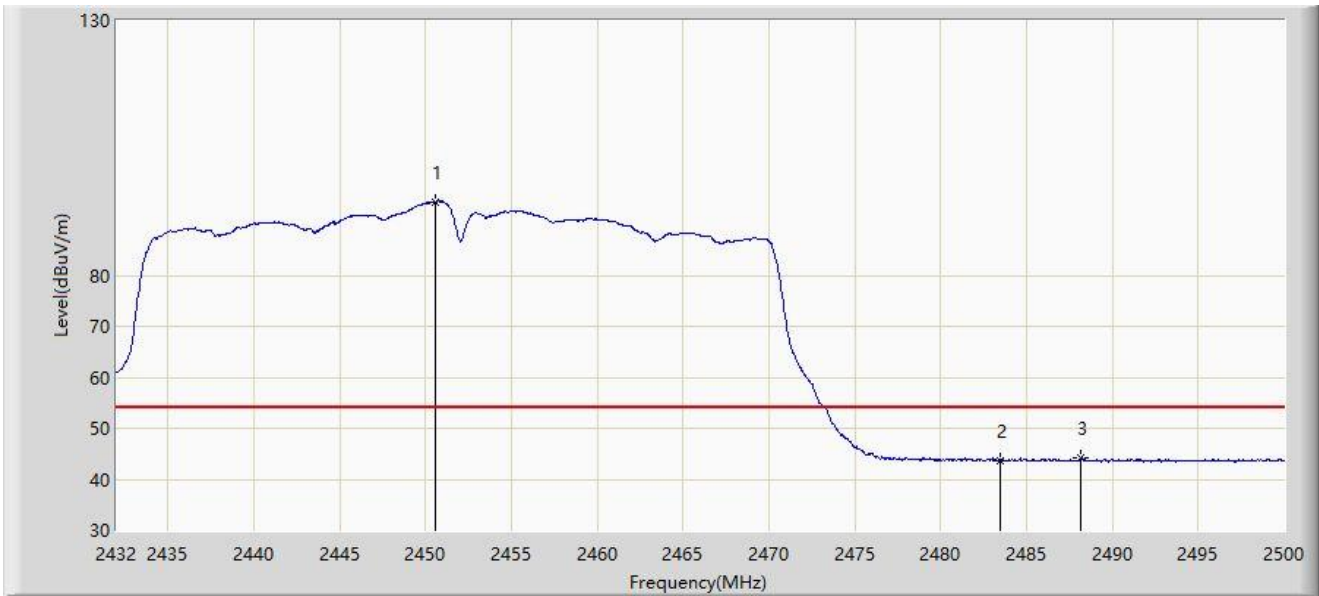


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2450.564	94.463	62.763	N/A	N/A	31.700	AV
2		2483.500	43.727	12.030	-10.273	54.000	31.696	AV
3	*	2488.168	44.177	12.483	-9.823	54.000	31.694	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

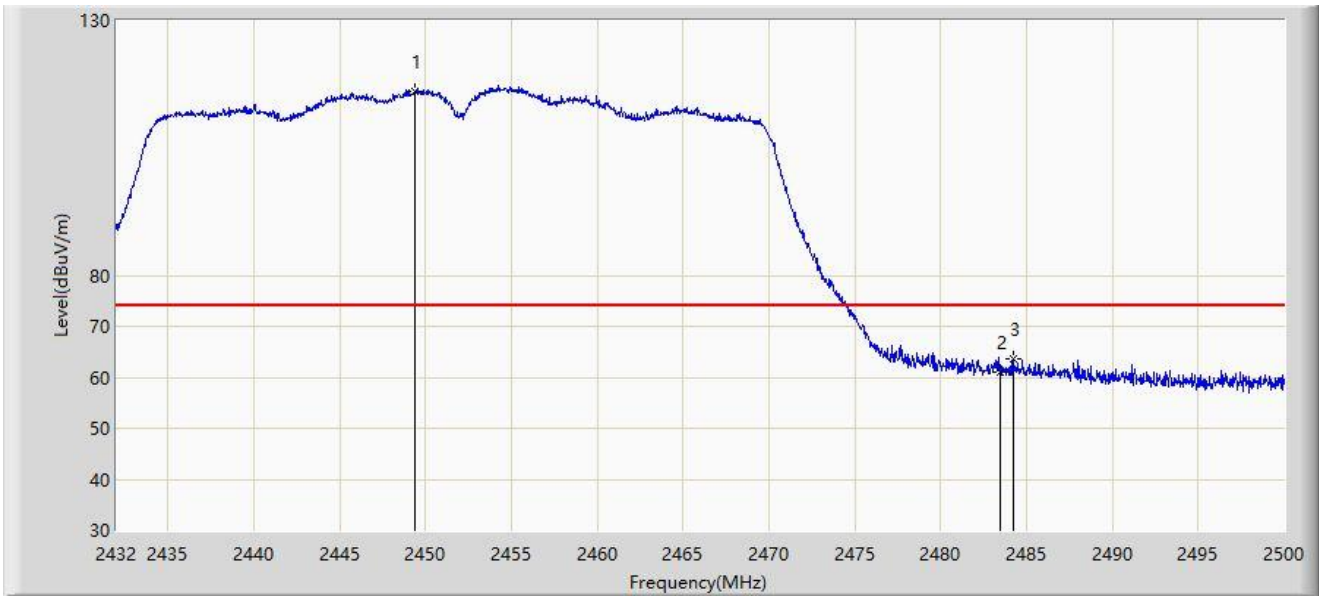


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2449.408	115.995	84.293	N/A	N/A	31.702	PK
2		2483.500	61.116	29.419	-12.884	74.000	31.696	PK
3	*	2484.258	63.583	31.886	-10.417	74.000	31.697	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

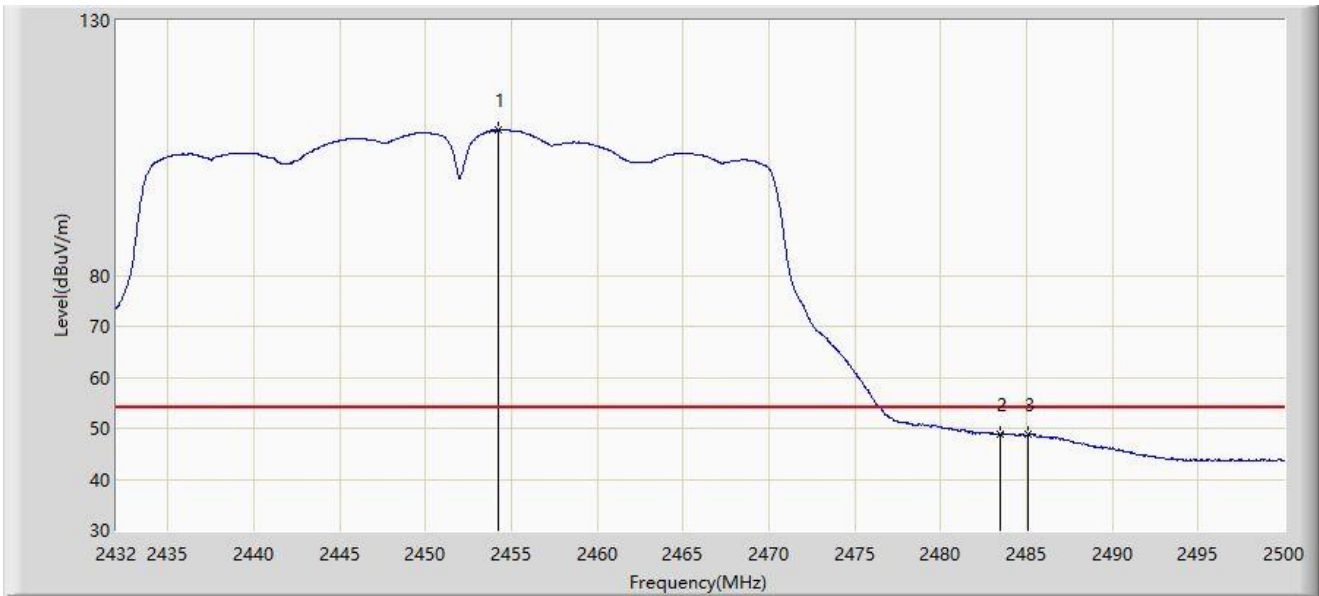


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2454.270	108.518	76.824	N/A	N/A	31.694	AV
2	*	2483.500	48.948	17.251	-5.052	54.000	31.696	AV
3		2485.074	48.819	17.123	-5.181	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2412MHz	

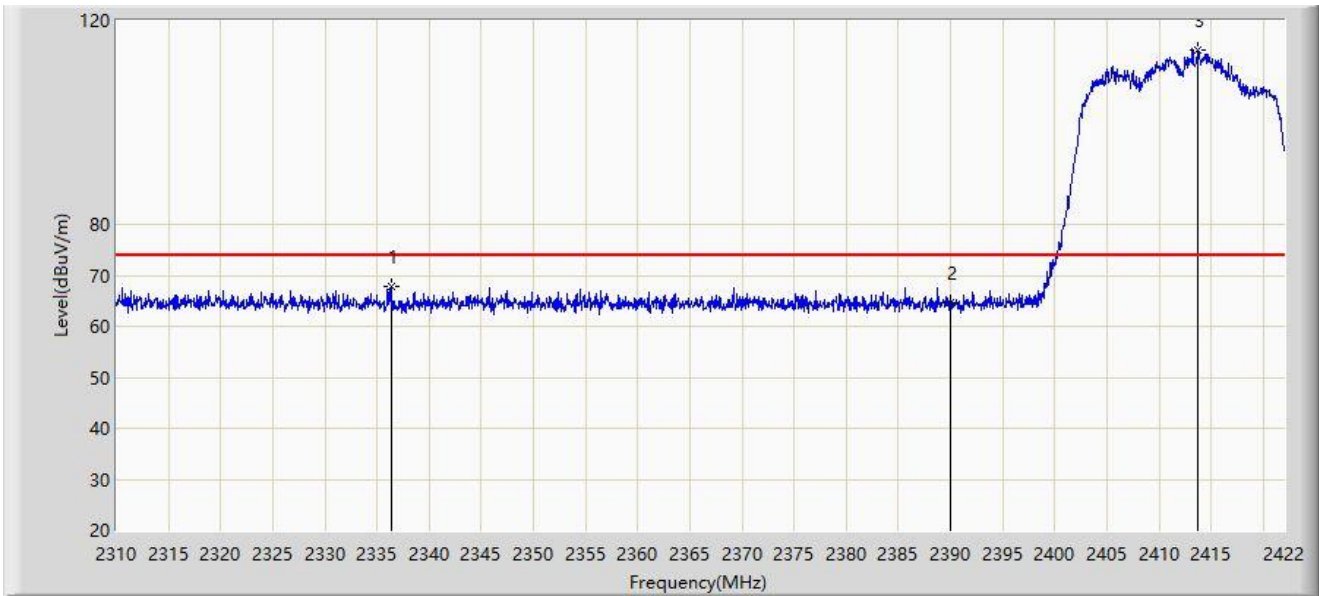


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2336.376	67.839	36.429	-6.161	74.000	31.410	PK
2		2390.000	64.729	33.475	-9.271	74.000	31.254	PK
3		2413.768	114.200	82.948	N/A	N/A	31.252	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2412MHz	

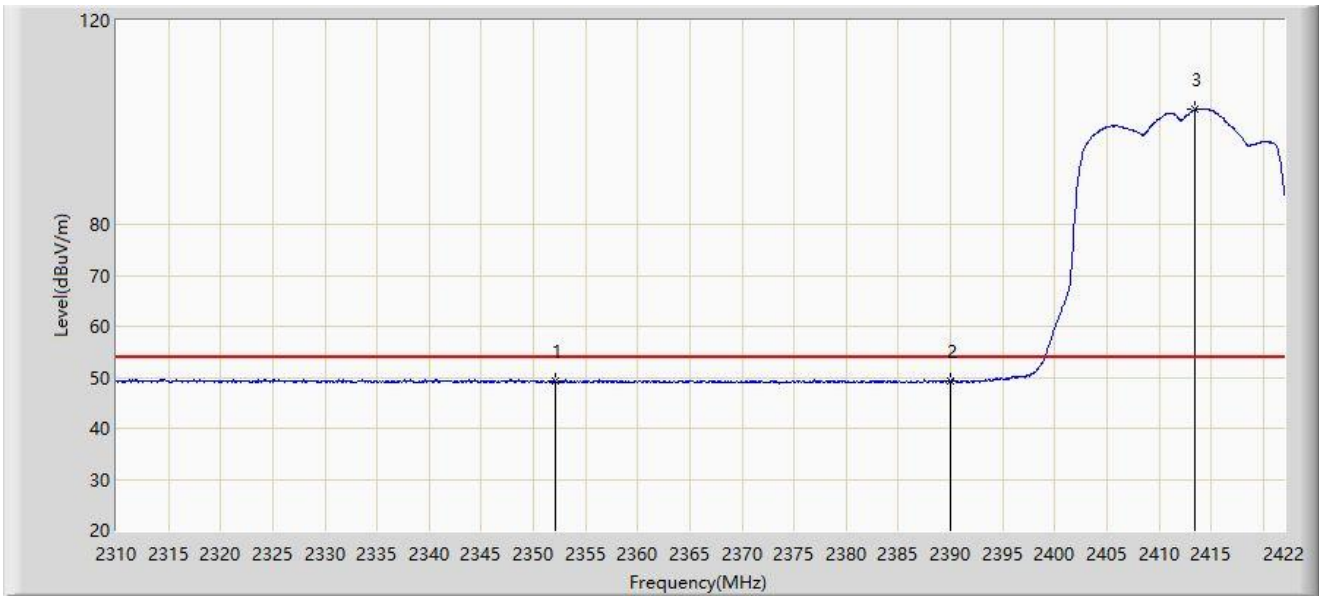


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2352.112	49.385	18.024	-4.615	54.000	31.361	AV
2		2390.000	49.152	17.898	-4.848	54.000	31.254	AV
3		2413.488	102.478	71.226	N/A	N/A	31.251	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2412MHz	

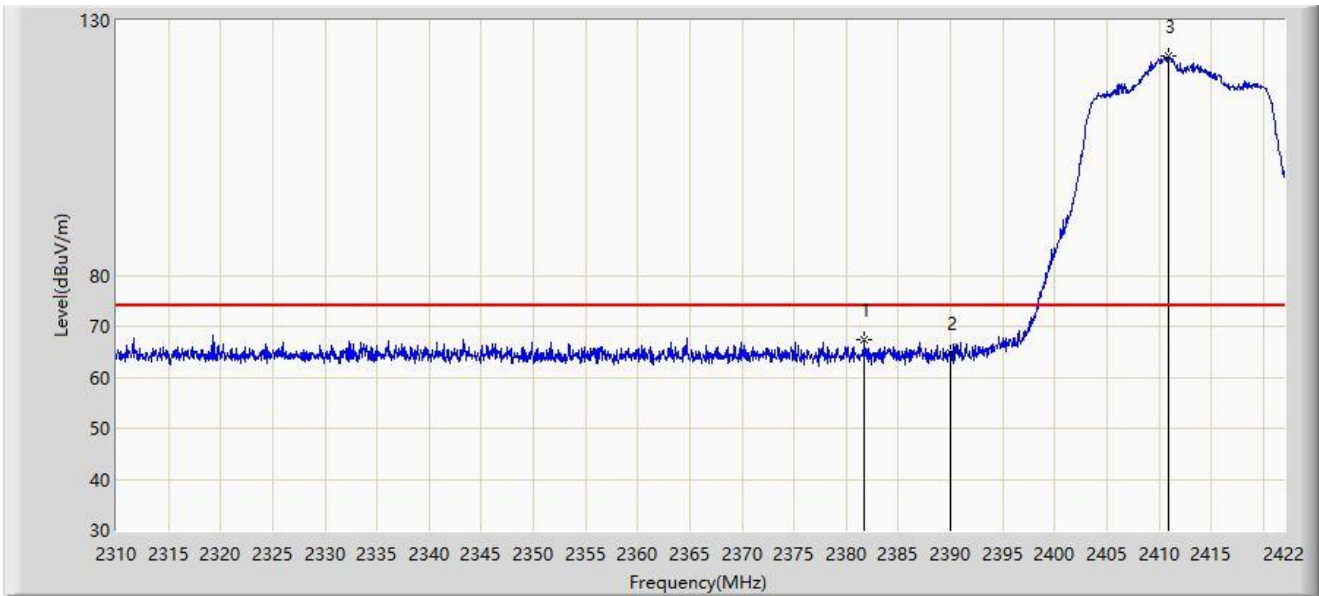


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2381.736	67.447	36.179	-6.553	74.000	31.268	PK
2		2390.000	64.909	33.655	-9.091	74.000	31.254	PK
3		2410.856	123.150	91.896	N/A	N/A	31.253	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2412MHz	

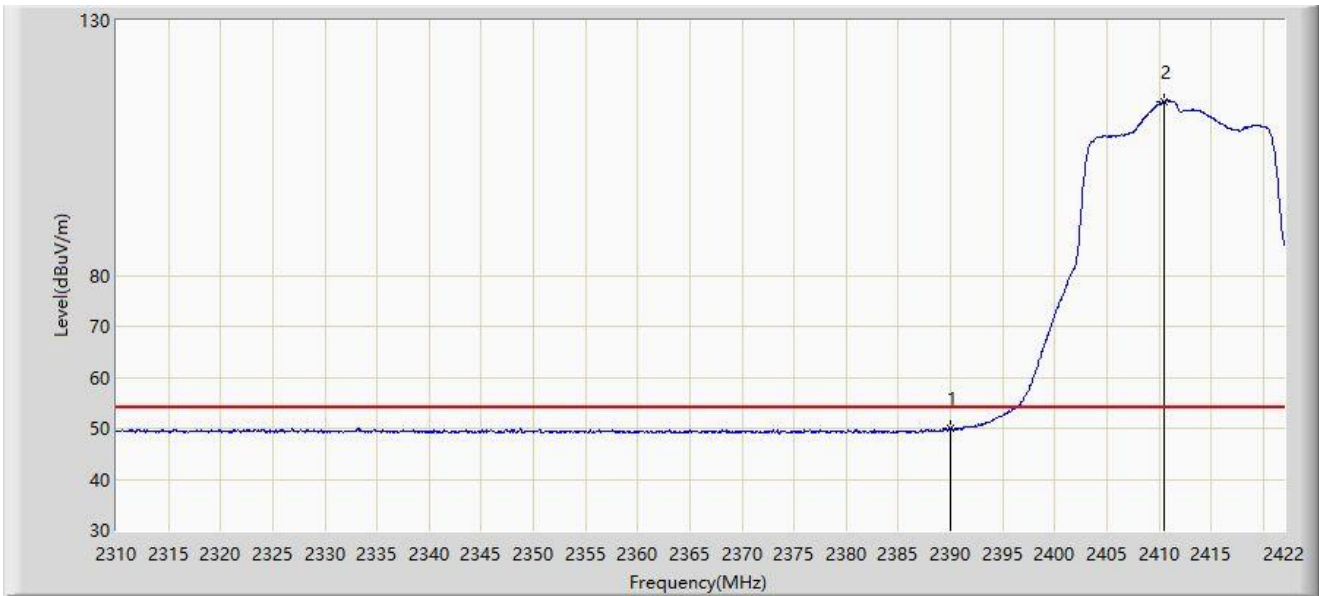


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	49.902	18.648	-4.098	54.000	31.254	AV
2		2410.464	114.044	82.790	N/A	N/A	31.254	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2462MHz	

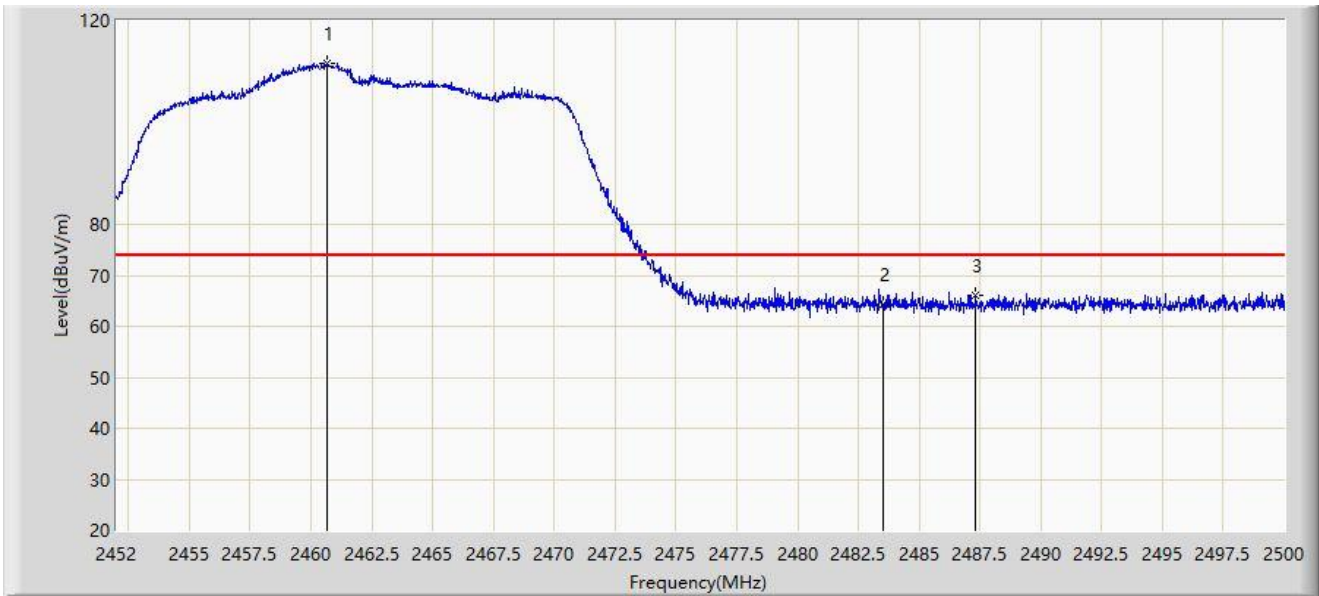


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2460.688	111.717	80.491	N/A	N/A	31.226	PK
2		2483.500	64.339	33.113	-9.661	74.000	31.226	PK
3	*	2487.328	66.216	34.987	-7.784	74.000	31.229	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2462MHz	

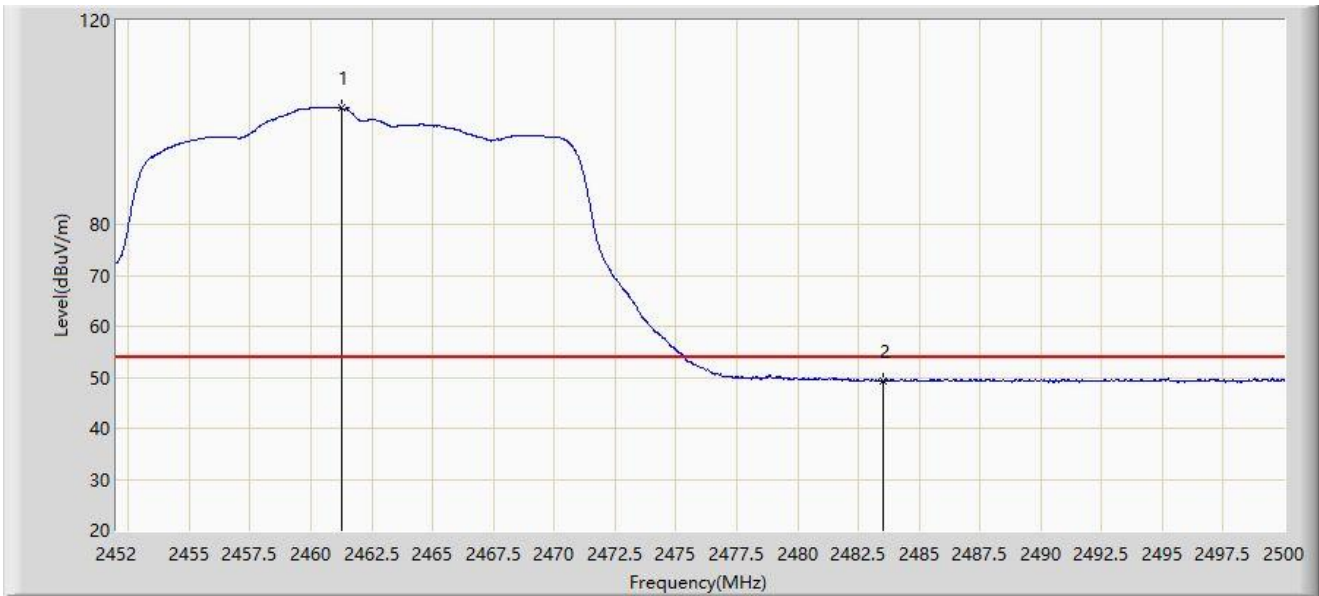


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2461.240	102.799	71.573	N/A	N/A	31.226	AV
2	*	2483.500	49.351	18.125	-4.649	54.000	31.226	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2462MHz	

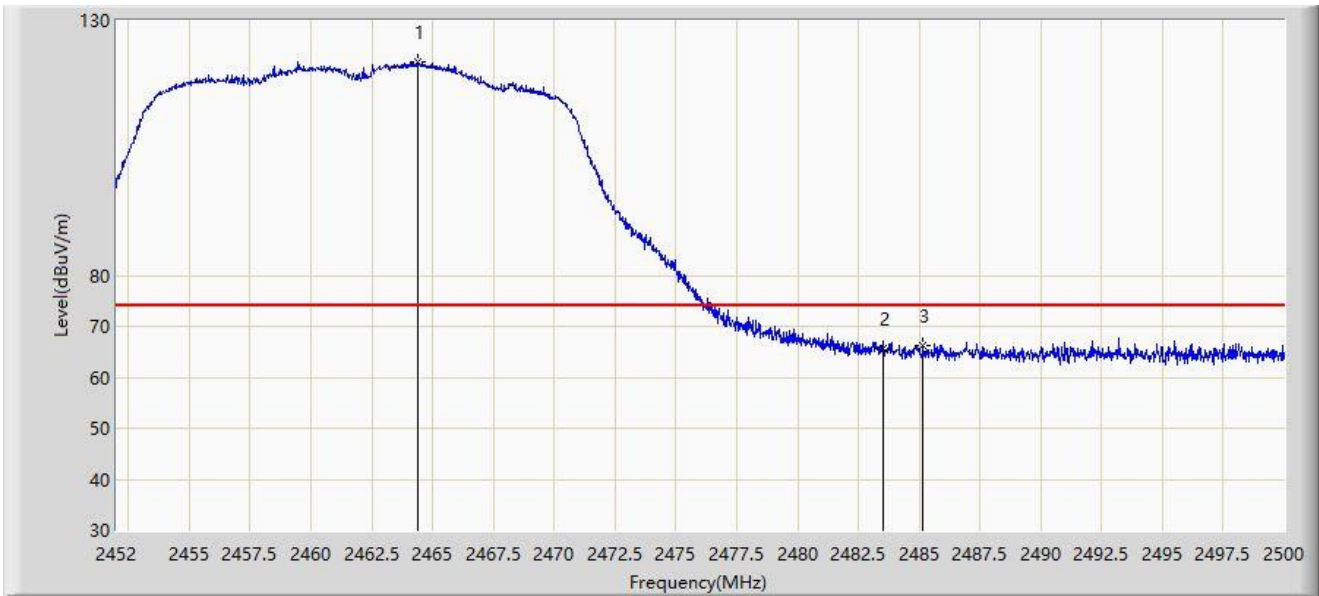


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2464.384	121.813	90.589	N/A	N/A	31.225	PK
2		2483.500	65.657	34.431	-8.343	74.000	31.226	PK
3	*	2485.168	66.205	34.978	-7.795	74.000	31.227	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT20 at 2462MHz	

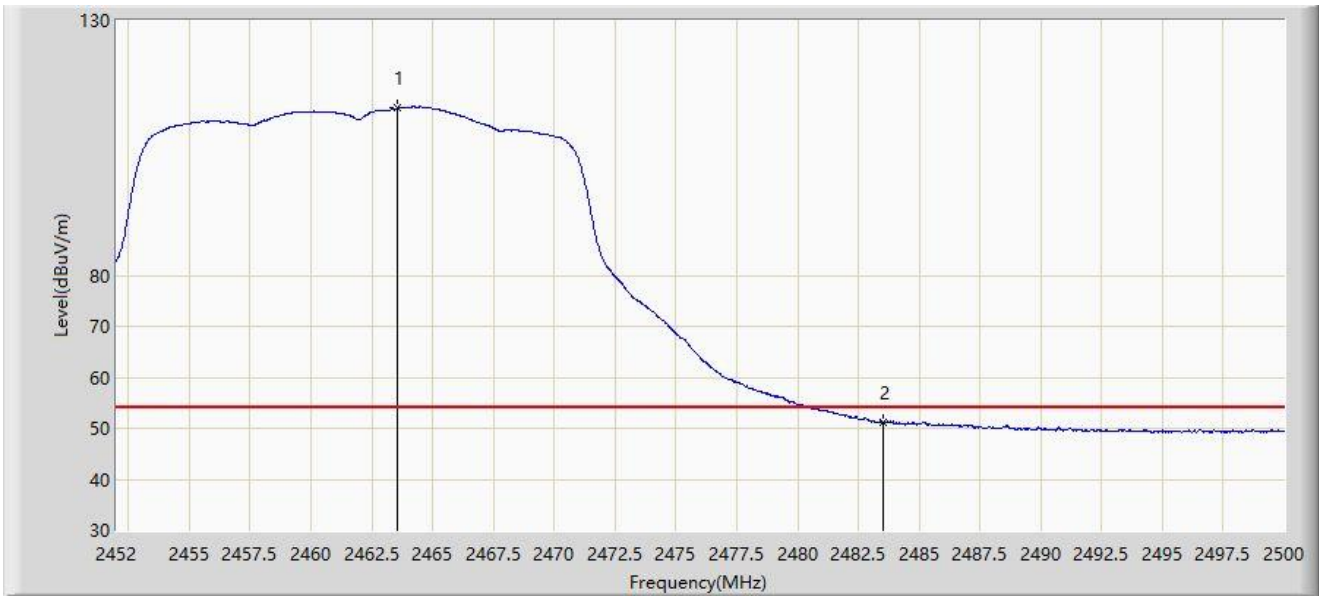


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2463.544	112.766	81.541	N/A	N/A	31.224	AV
2	*	2483.500	51.173	19.947	-2.827	54.000	31.226	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2422MHz	

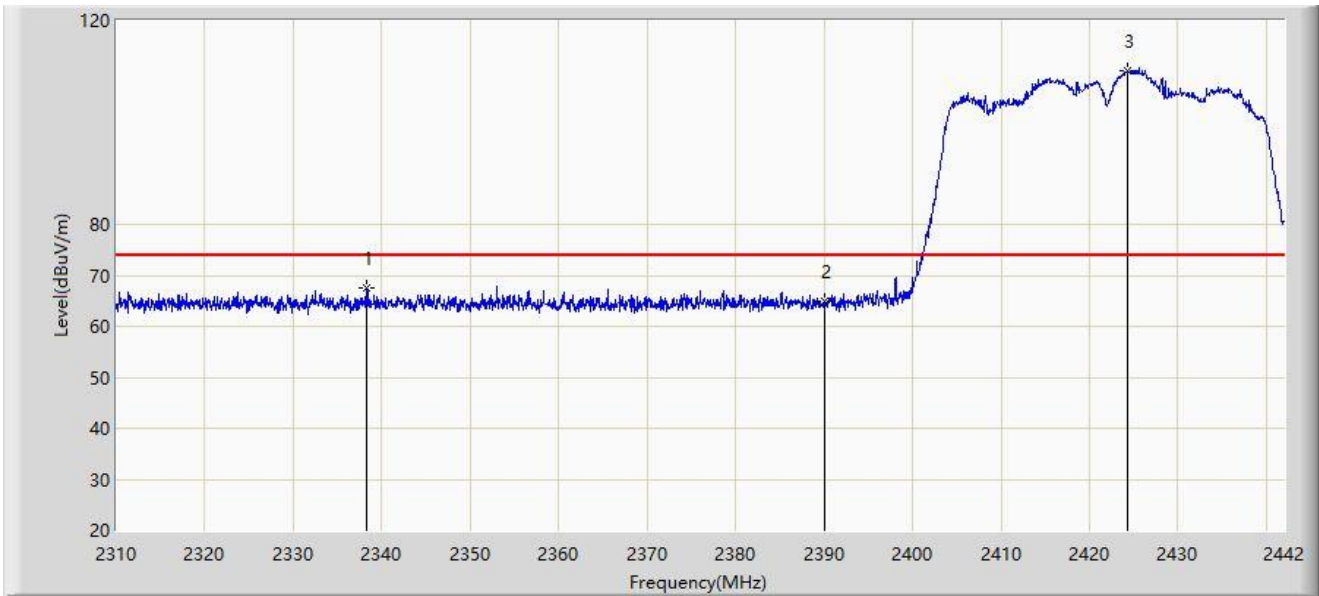


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2338.314	67.422	36.017	-6.578	74.000	31.405	PK
2		2390.000	64.936	33.682	-9.064	74.000	31.254	PK
3		2424.312	110.289	79.054	N/A	N/A	31.234	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2422MHz	

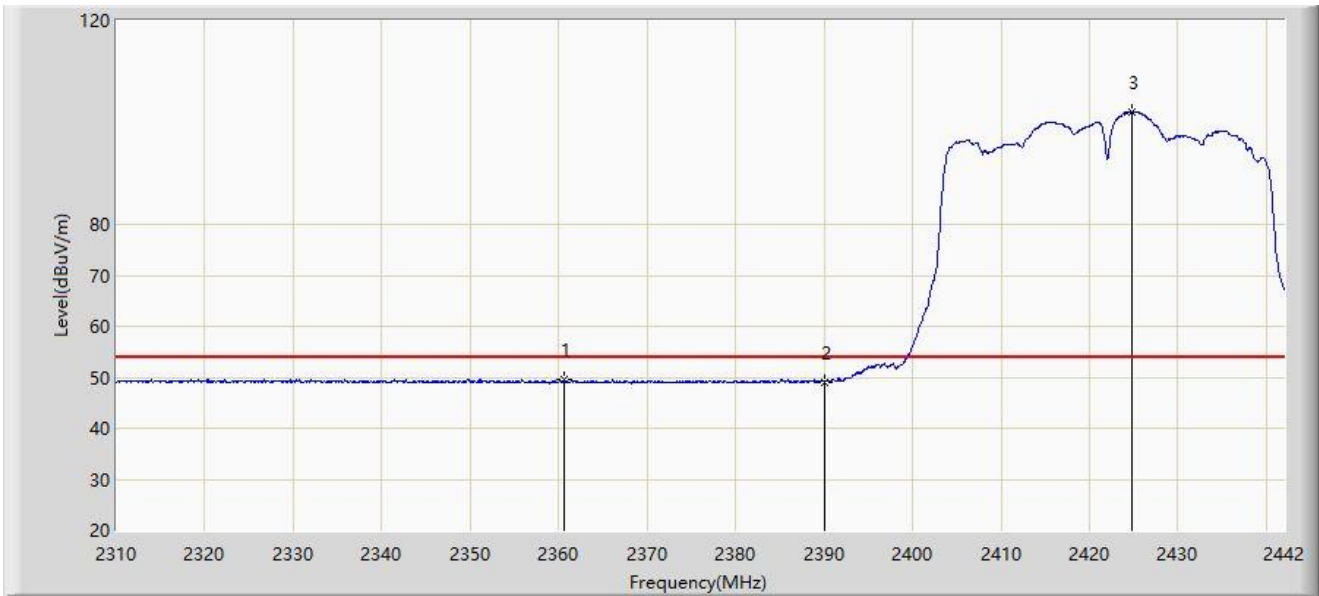


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2360.622	49.458	18.125	-4.542	54.000	31.333	AV
2		2390.000	49.113	17.859	-4.887	54.000	31.254	AV
3		2424.774	102.150	70.917	N/A	N/A	31.234	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2422MHz	

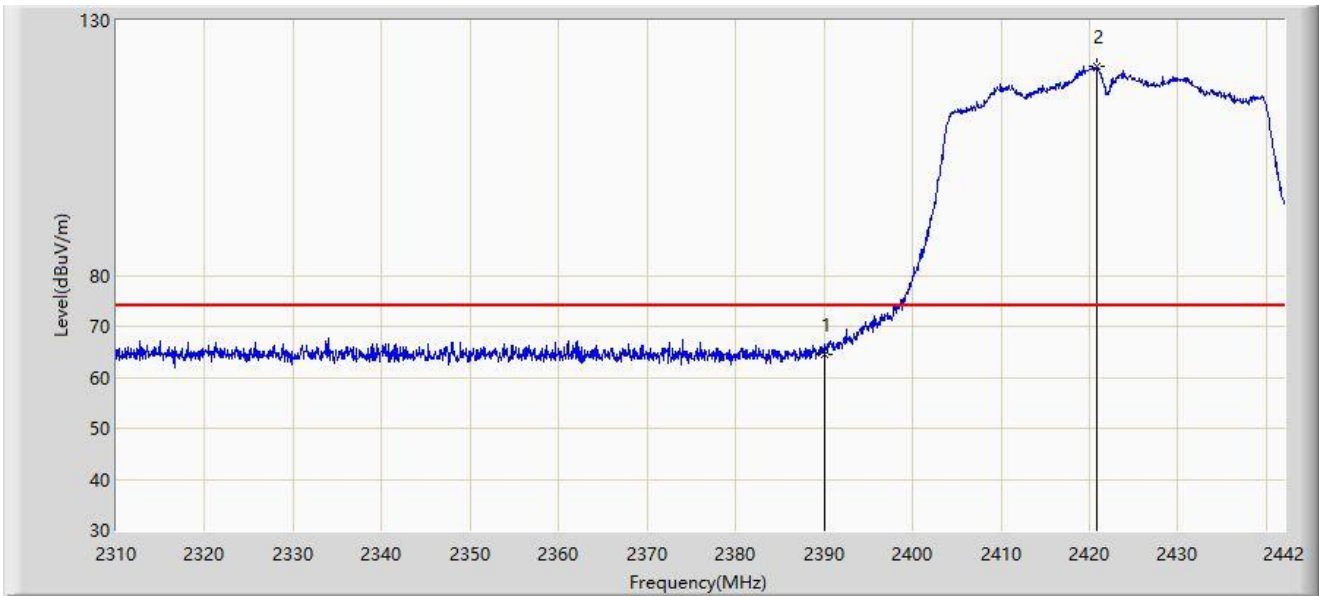


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	64.414	33.160	-9.586	74.000	31.254	PK
2		2420.748	121.012	89.767	N/A	N/A	31.246	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2422MHz	

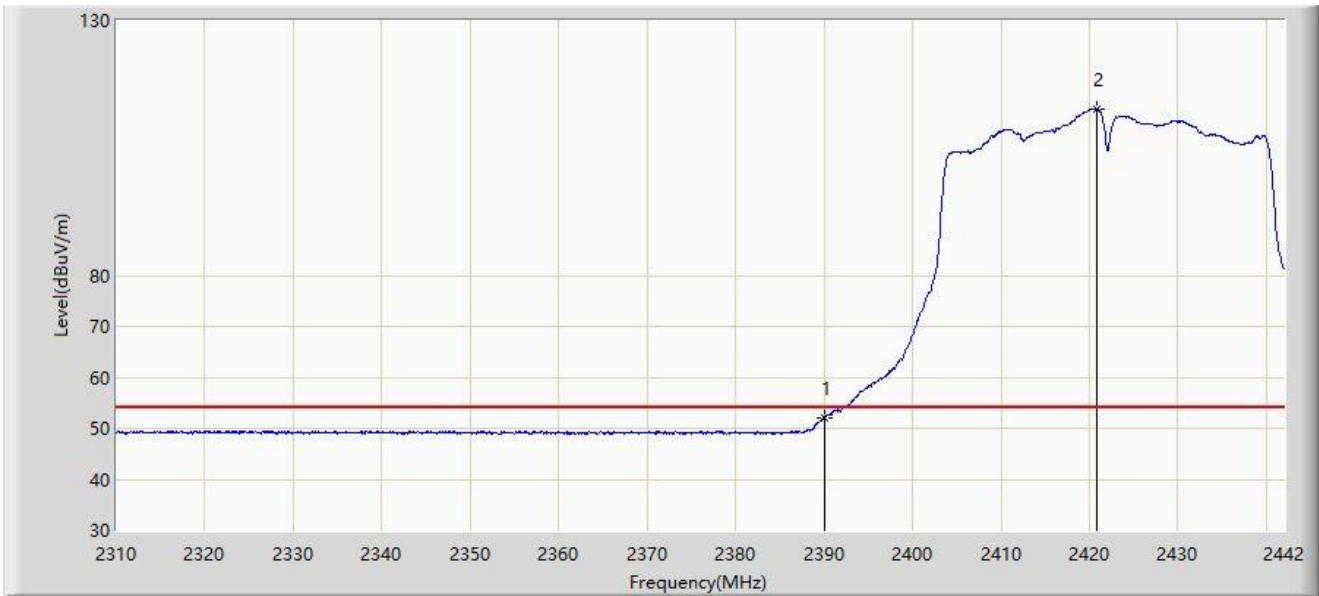


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	52.081	20.827	-1.919	54.000	31.254	AV
2		2420.814	112.584	81.339	N/A	N/A	31.246	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2437MHz	

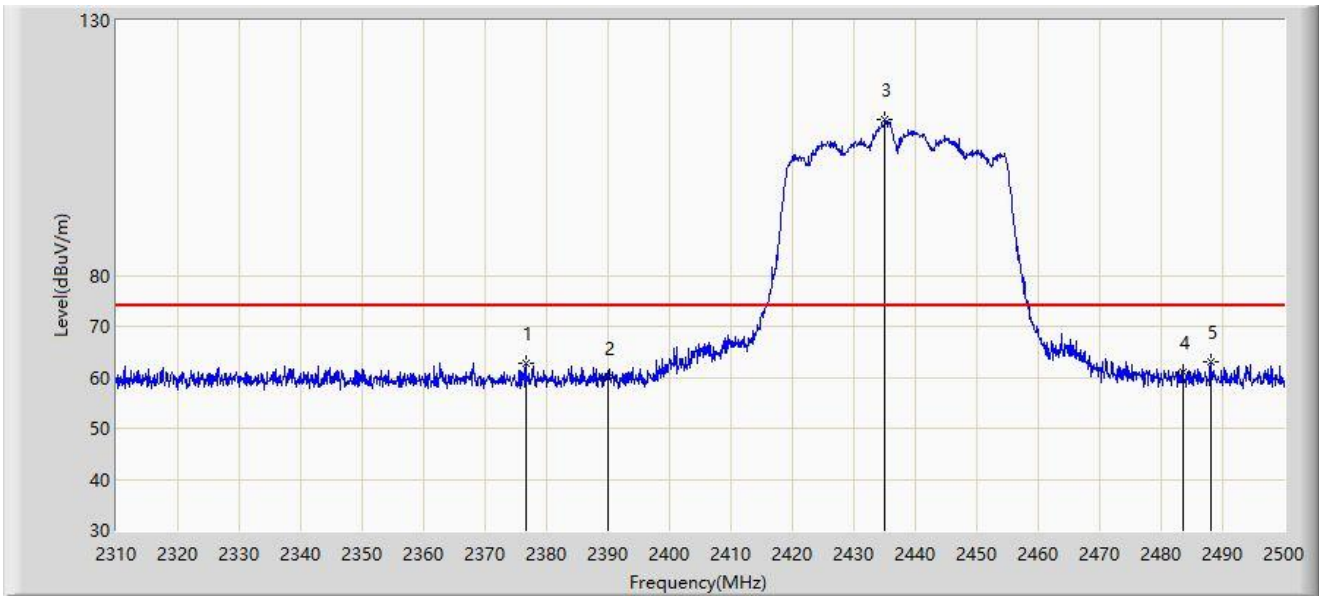


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2376.595	62.798	30.899	-11.202	74.000	31.899	PK
2		2390.000	59.721	27.868	-14.279	74.000	31.853	PK
3		2435.115	110.439	78.721	N/A	N/A	31.718	PK
4		2483.500	60.877	29.180	-13.123	74.000	31.696	PK
5	*	2488.030	63.119	31.425	-10.881	74.000	31.694	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2437MHz	

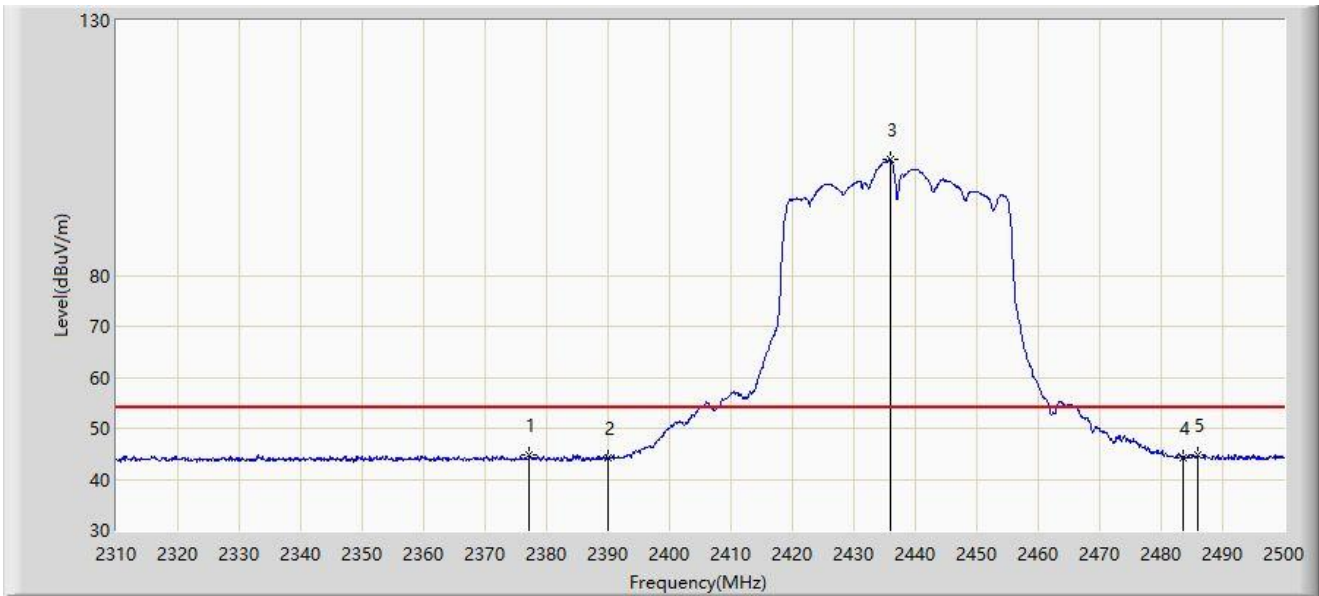


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2377.260	44.763	12.866	-9.237	54.000	31.897	AV
2		2390.000	44.071	12.218	-9.929	54.000	31.853	AV
3		2436.065	102.618	70.900	N/A	N/A	31.719	AV
4		2483.500	44.249	12.552	-9.751	54.000	31.696	AV
5	*	2485.845	44.788	13.092	-9.212	54.000	31.695	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2437MHz	

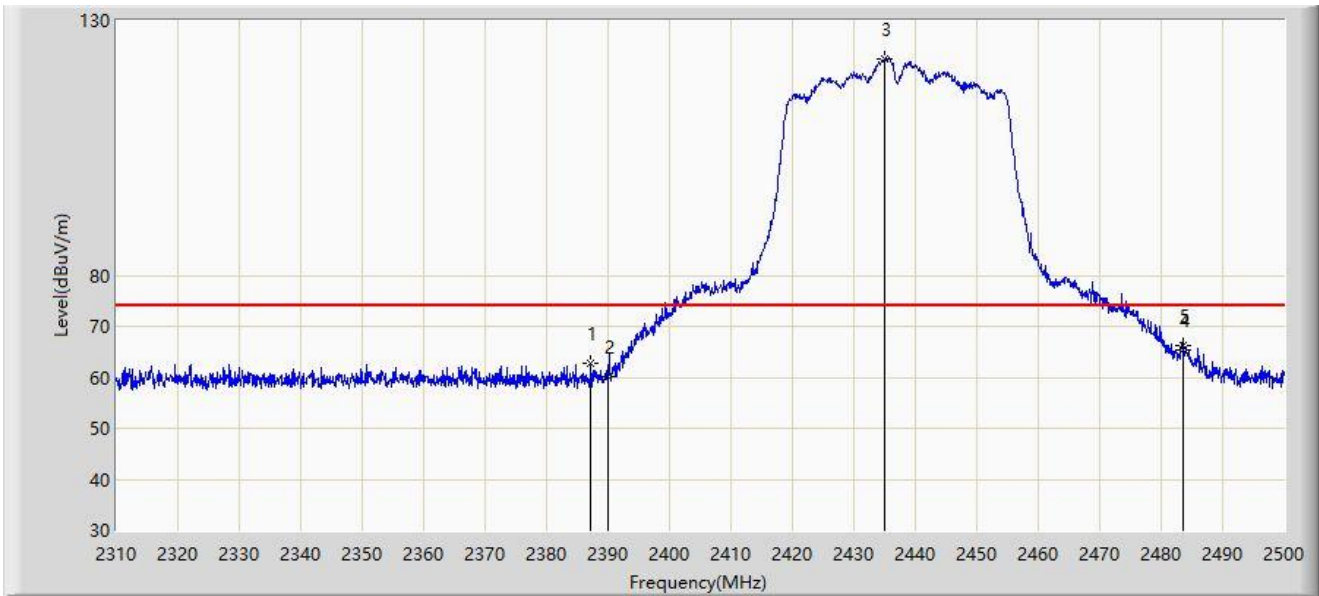


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2387.140	62.875	31.006	-11.125	74.000	31.869	PK
2		2390.000	60.097	28.244	-13.903	74.000	31.853	PK
3		2435.115	122.430	90.712	N/A	N/A	31.718	PK
4		2483.500	65.353	33.656	-8.647	74.000	31.696	PK
5	*	2483.565	66.235	34.538	-7.765	74.000	31.697	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2437MHz	

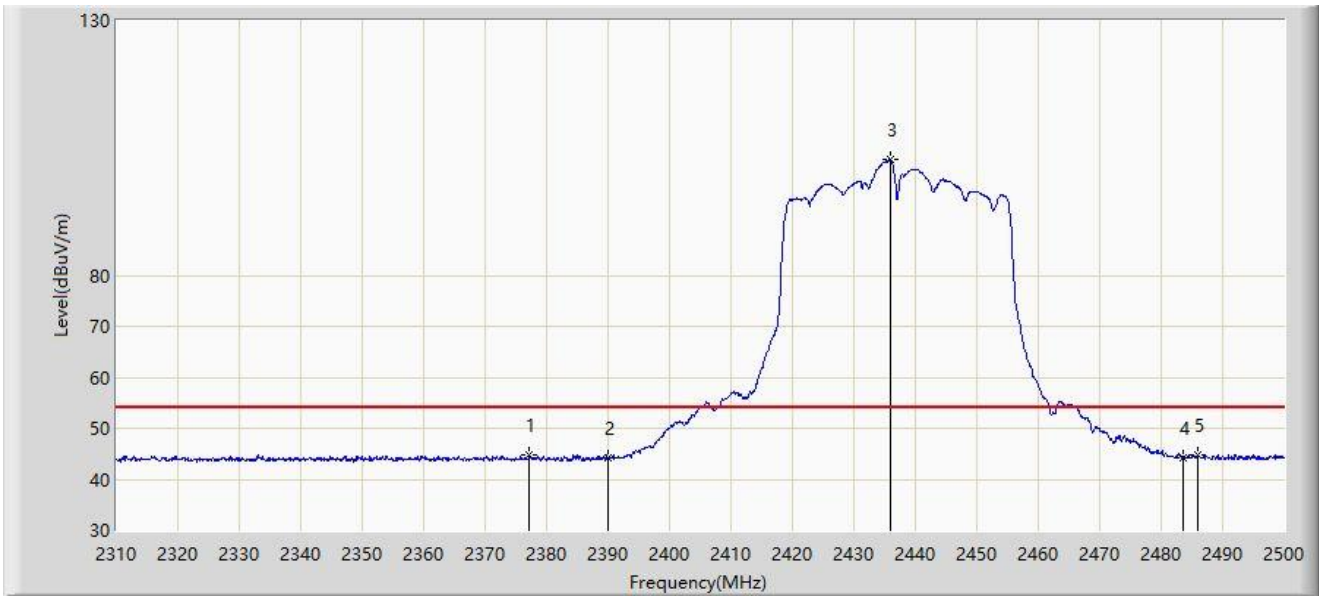


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2377.260	44.763	12.866	-9.237	54.000	31.897	AV
2		2390.000	44.071	12.218	-9.929	54.000	31.853	AV
3		2436.065	102.618	70.900	N/A	N/A	31.719	AV
4		2483.500	44.249	12.552	-9.751	54.000	31.696	AV
5	*	2485.845	44.788	13.092	-9.212	54.000	31.695	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2452MHz	

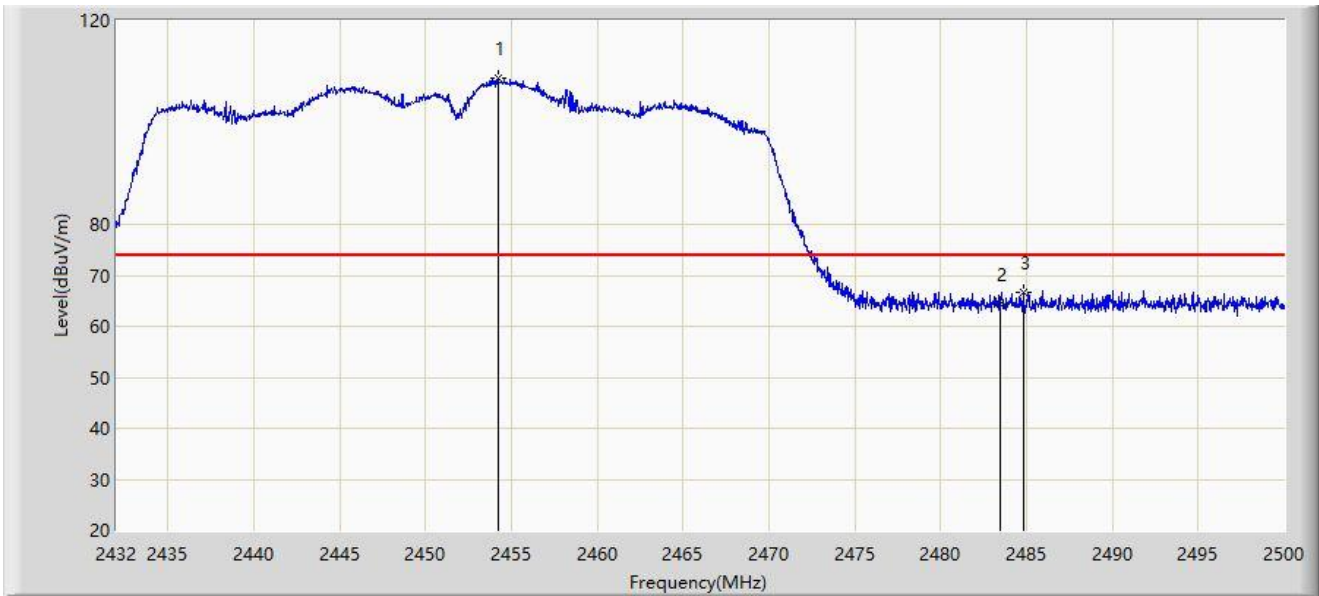


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2454.202	108.757	77.529	N/A	N/A	31.228	PK
2		2483.500	64.255	33.029	-9.745	74.000	31.226	PK
3	*	2484.836	66.580	35.353	-7.420	74.000	31.227	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2452MHz	

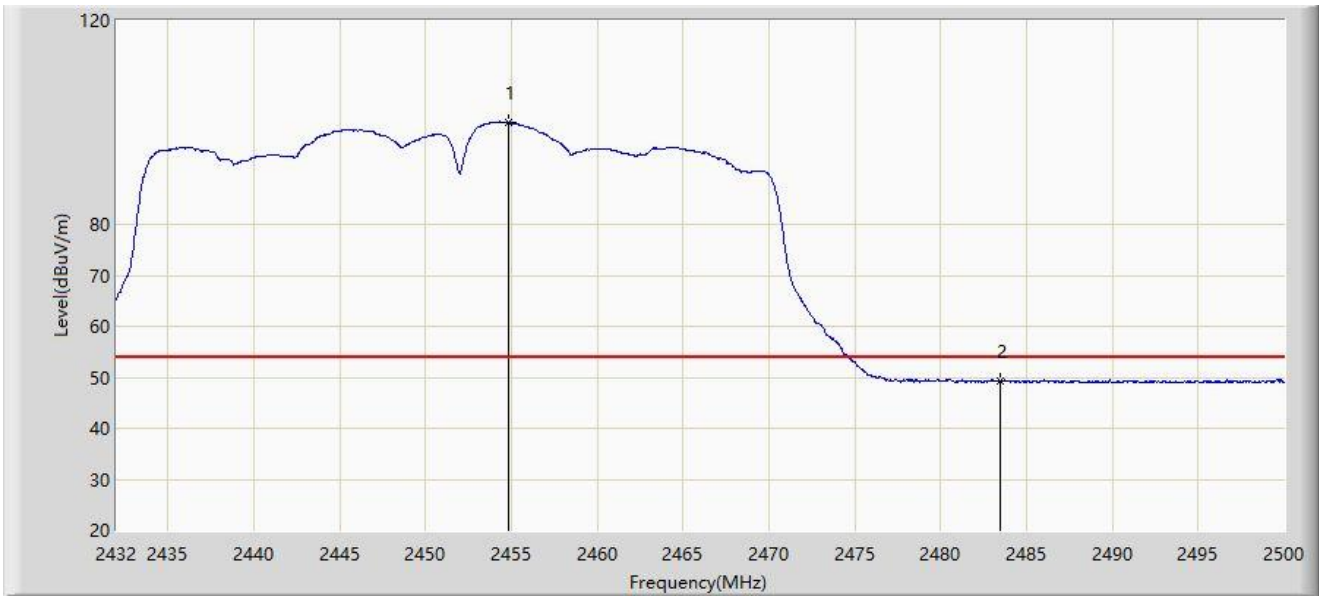


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2454.814	100.035	68.806	N/A	N/A	31.229	AV
2	*	2483.500	49.212	17.986	-4.788	54.000	31.226	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2452MHz	

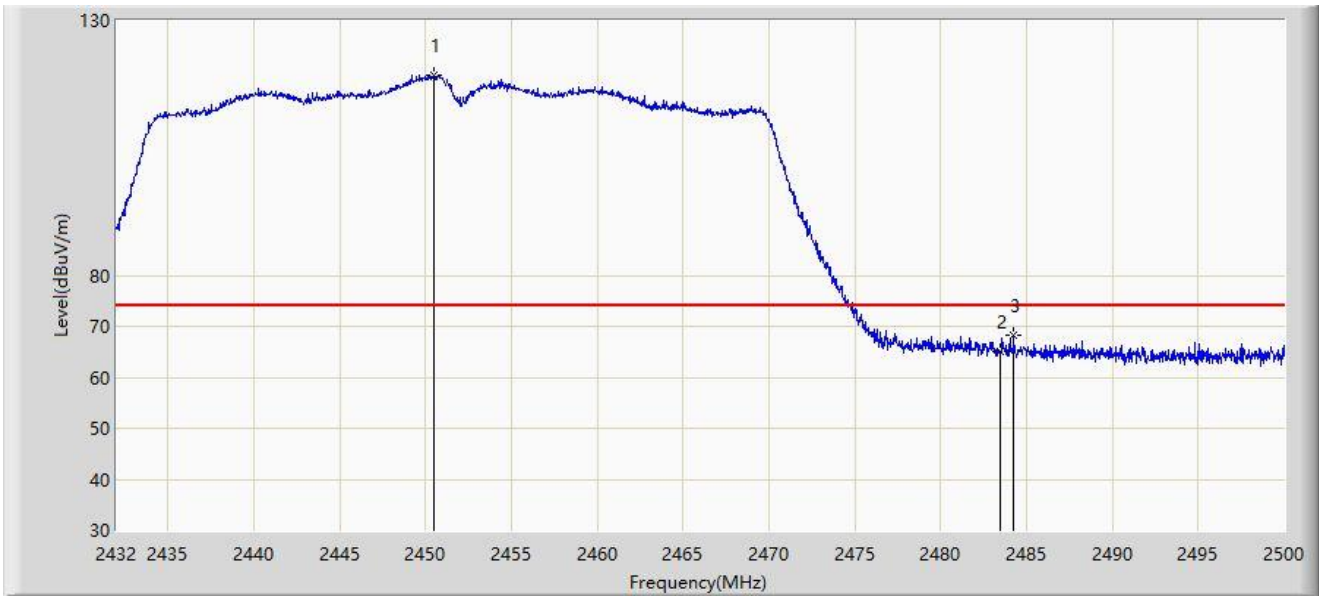


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2450.530	119.297	88.074	N/A	N/A	31.223	PK
2		2483.500	65.020	33.794	-8.980	74.000	31.226	PK
3	*	2484.258	68.292	37.065	-5.708	74.000	31.227	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by VHT40 at 2452MHz	

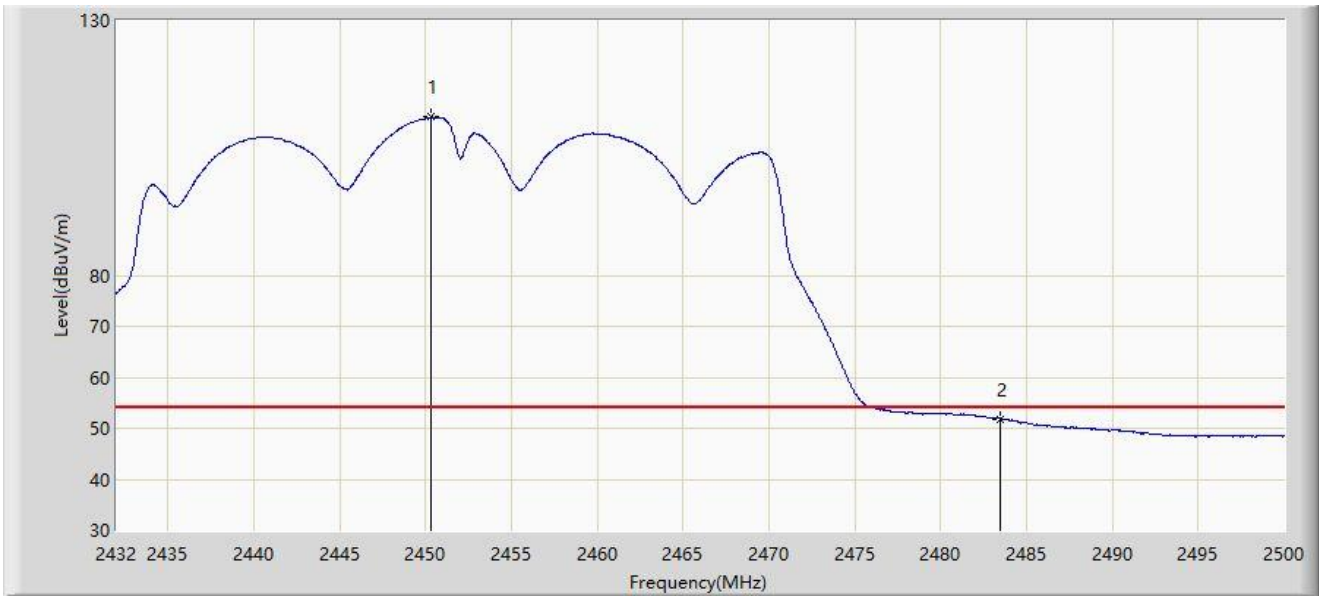


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2450.360	111.032	79.809	N/A	N/A	31.223	AV
2	*	2483.500	51.882	20.656	-2.118	54.000	31.226	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

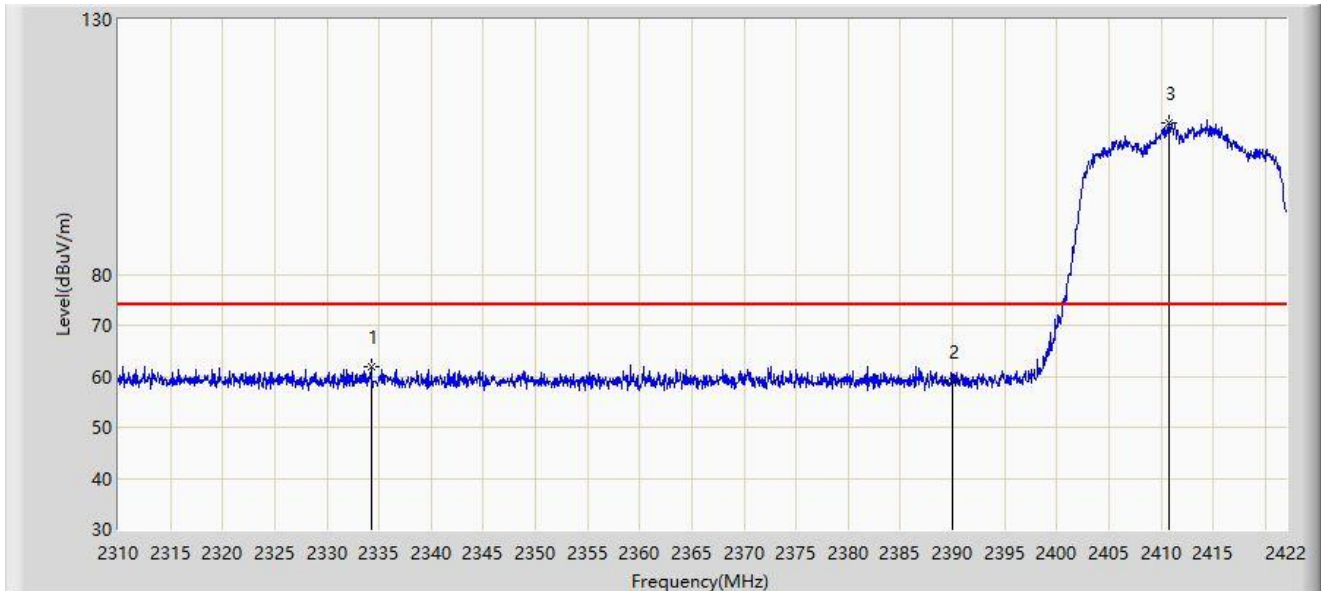


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2334.248	61.851	29.862	-12.149	74.000	31.990	PK
2		2390.000	58.900	27.047	-15.100	74.000	31.853	PK
3		2410.744	109.766	78.012	N/A	N/A	31.754	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

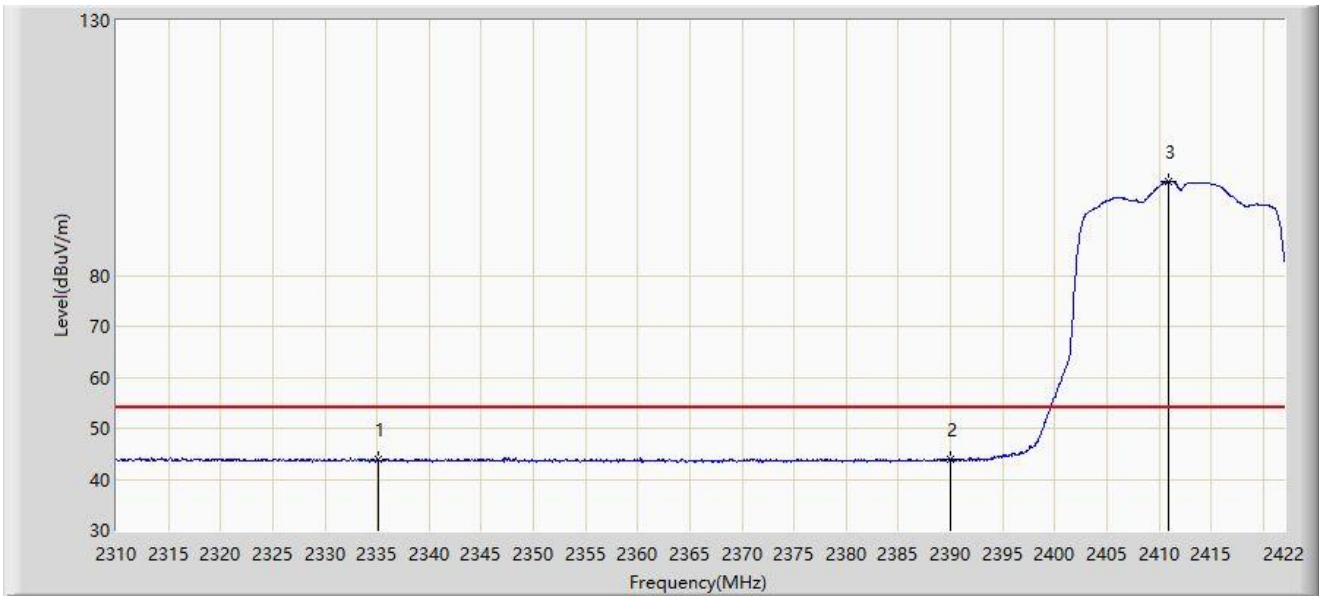


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2335.088	43.851	11.864	-10.149	54.000	31.987	AV
2	*	2390.000	43.972	12.119	-10.028	54.000	31.853	AV
3		2410.968	98.430	66.677	N/A	N/A	31.753	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

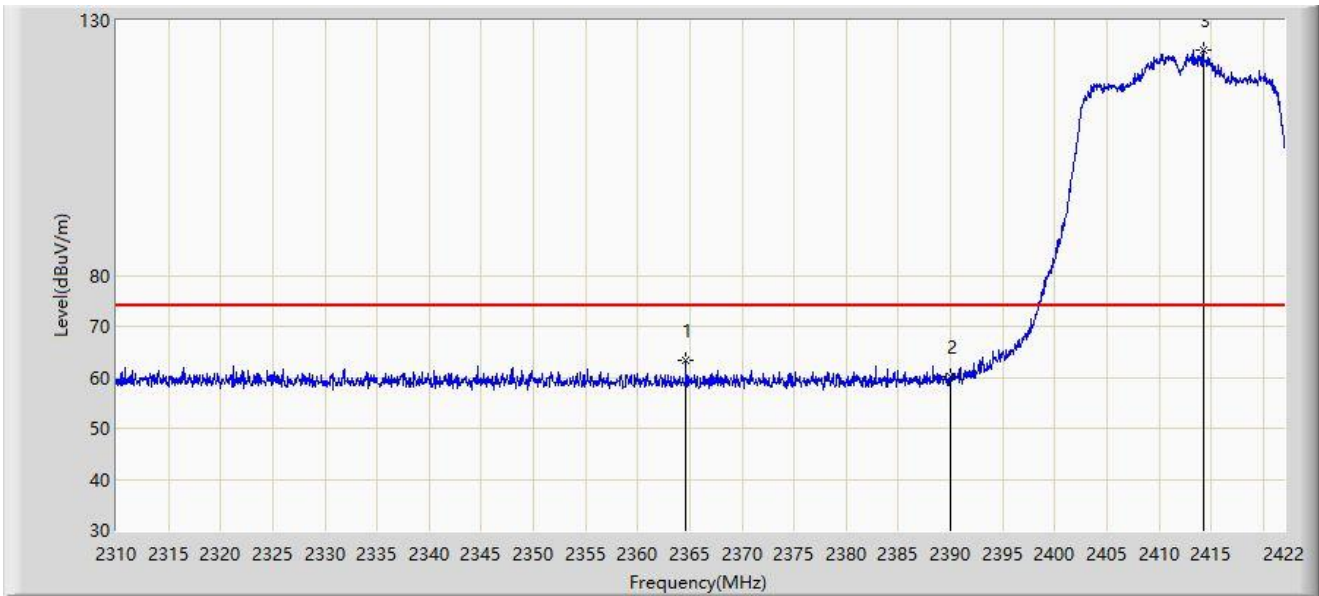


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2364.656	63.221	31.291	-10.779	74.000	31.931	PK
2		2390.000	60.130	28.277	-13.870	74.000	31.853	PK
3		2414.216	124.196	92.453	N/A	N/A	31.743	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

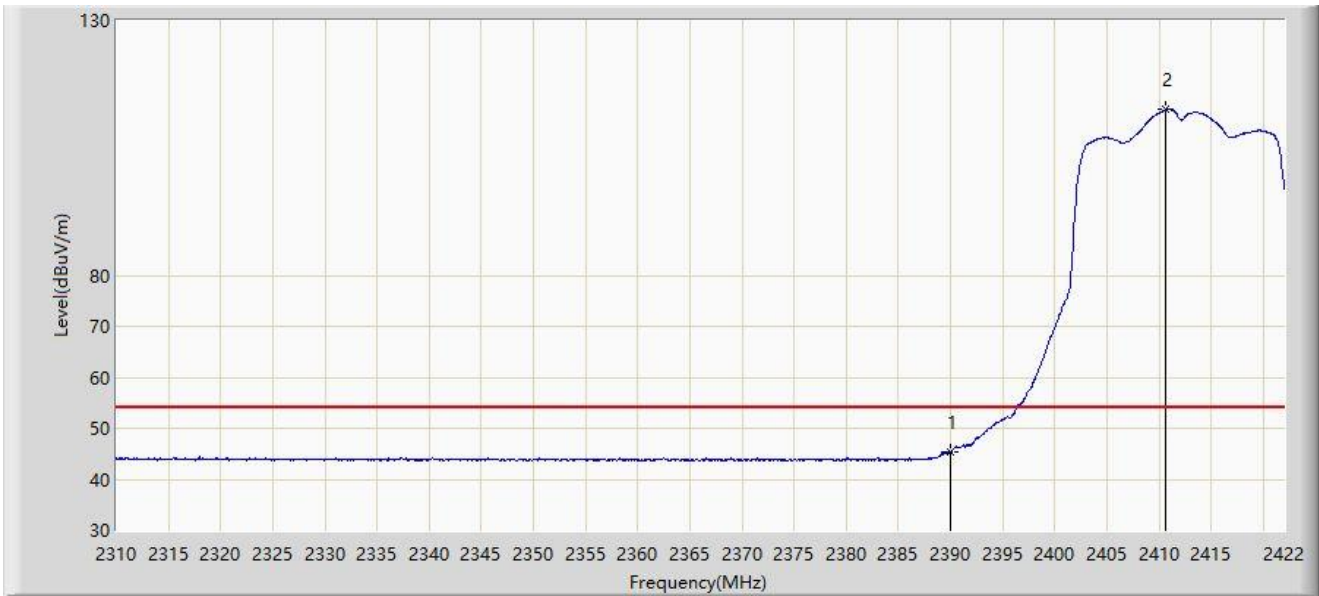


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	45.366	13.513	-8.634	54.000	31.853	AV
2		2410.632	112.522	80.767	N/A	N/A	31.754	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

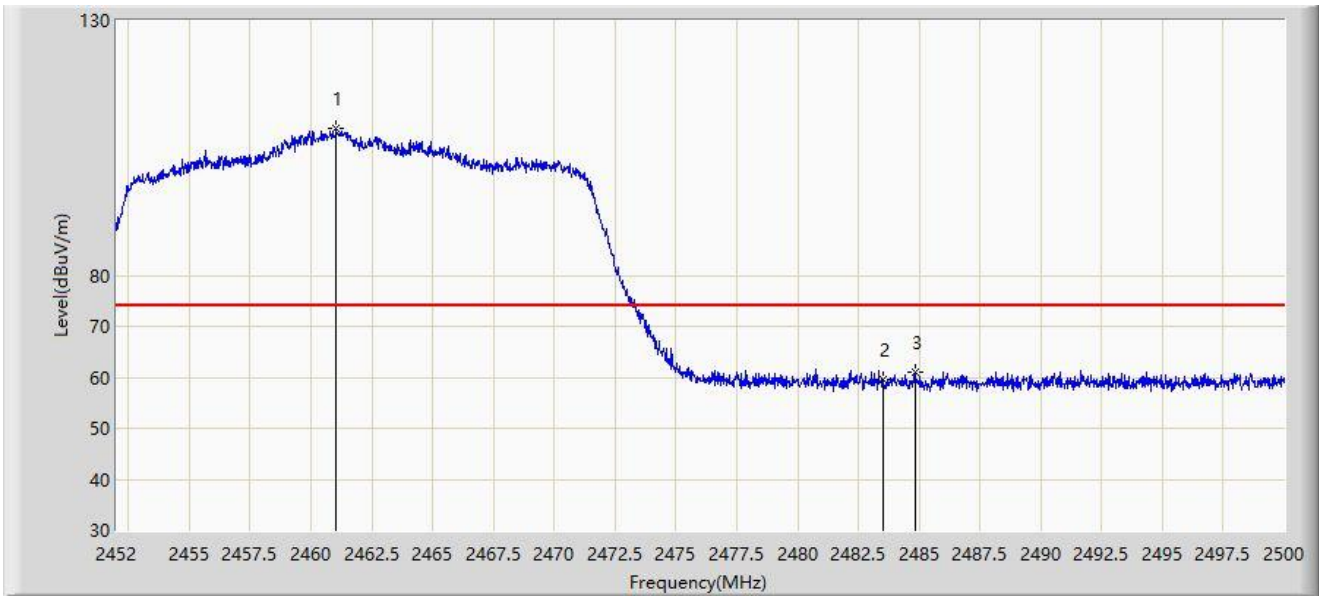


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2461.048	108.696	77.006	N/A	N/A	31.689	PK
2		2483.500	59.542	27.845	-14.458	74.000	31.696	PK
3	*	2484.832	61.108	29.412	-12.892	74.000	31.696	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

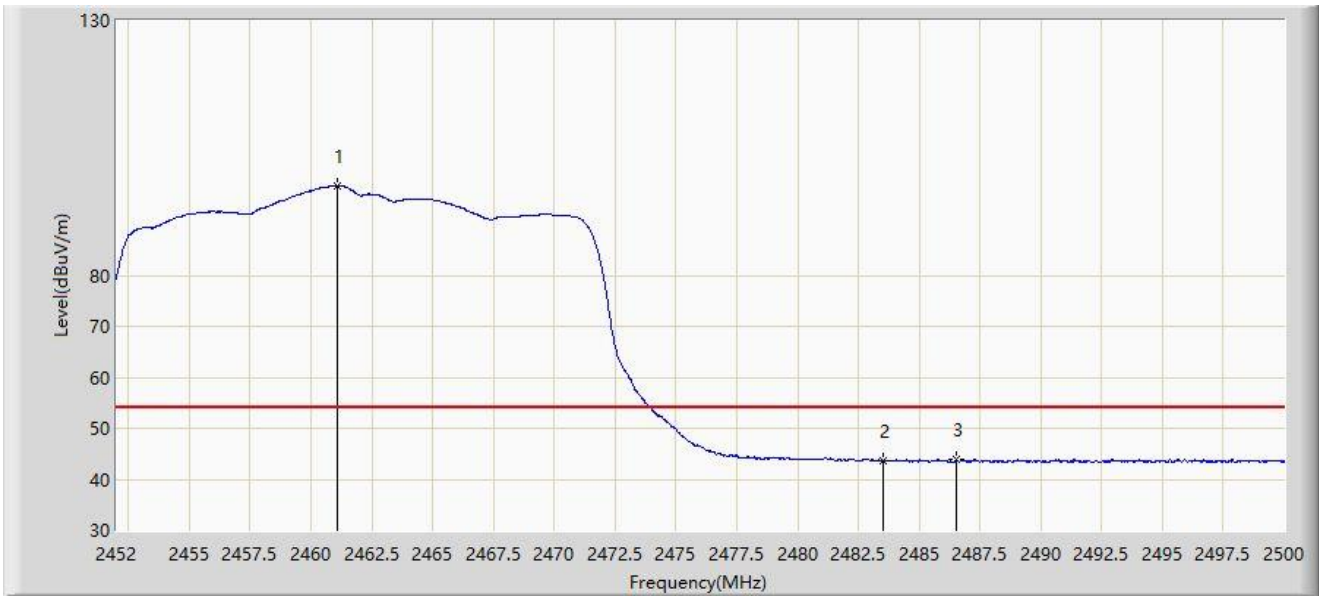


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2461.072	97.482	65.792	N/A	N/A	31.689	AV
2		2483.500	43.739	12.042	-10.261	54.000	31.696	AV
3	*	2486.536	43.873	12.178	-10.127	54.000	31.695	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

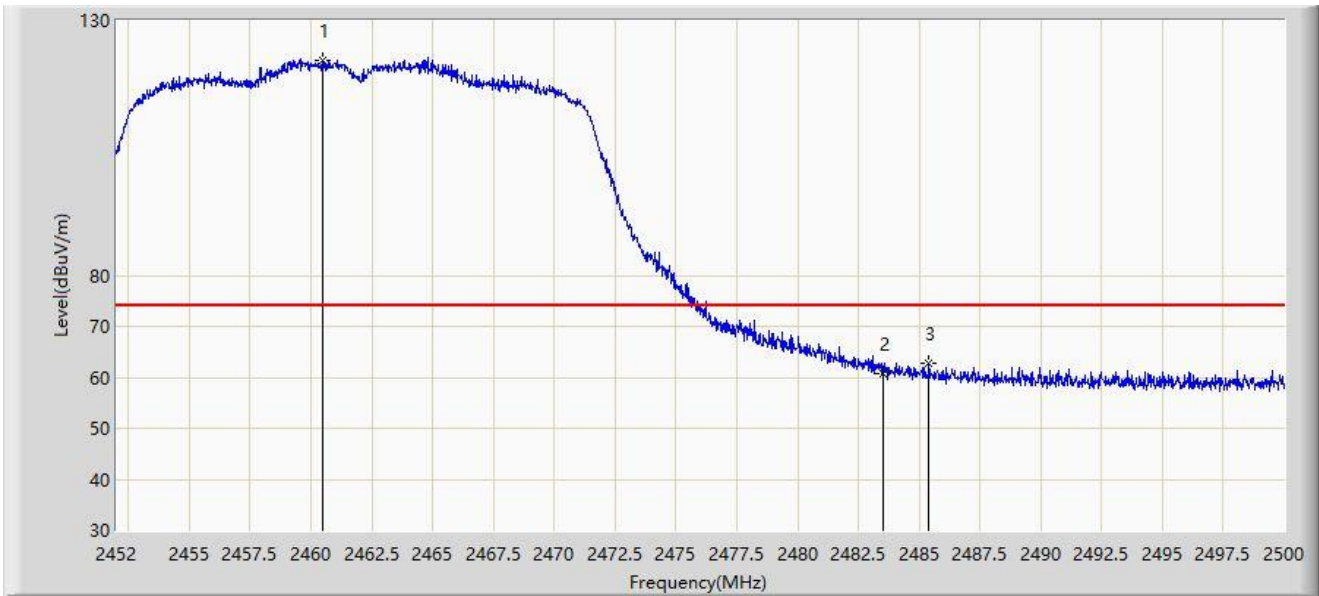


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2460.472	122.207	90.517	N/A	N/A	31.690	PK
2		2483.500	60.712	29.015	-13.288	74.000	31.696	PK
3	*	2485.408	62.654	30.958	-11.346	74.000	31.696	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

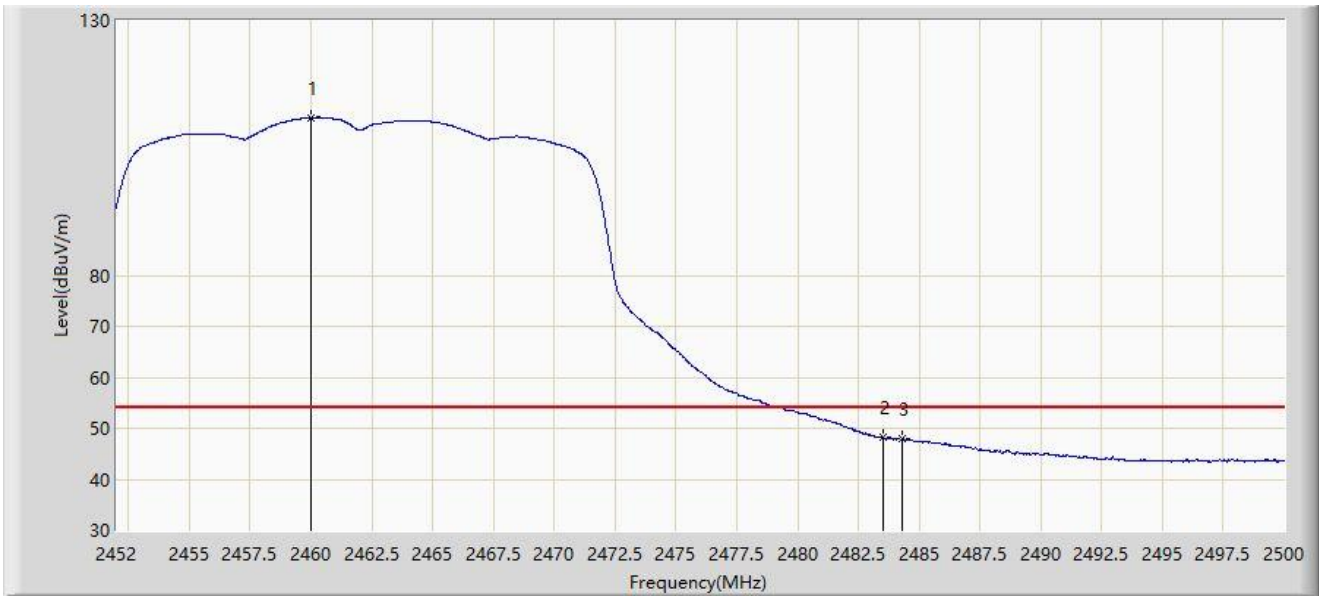


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2460.016	110.902	79.212	N/A	N/A	31.690	AV
2	*	2483.500	48.188	16.491	-5.812	54.000	31.696	AV
3		2484.304	47.897	16.200	-6.103	54.000	31.697	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

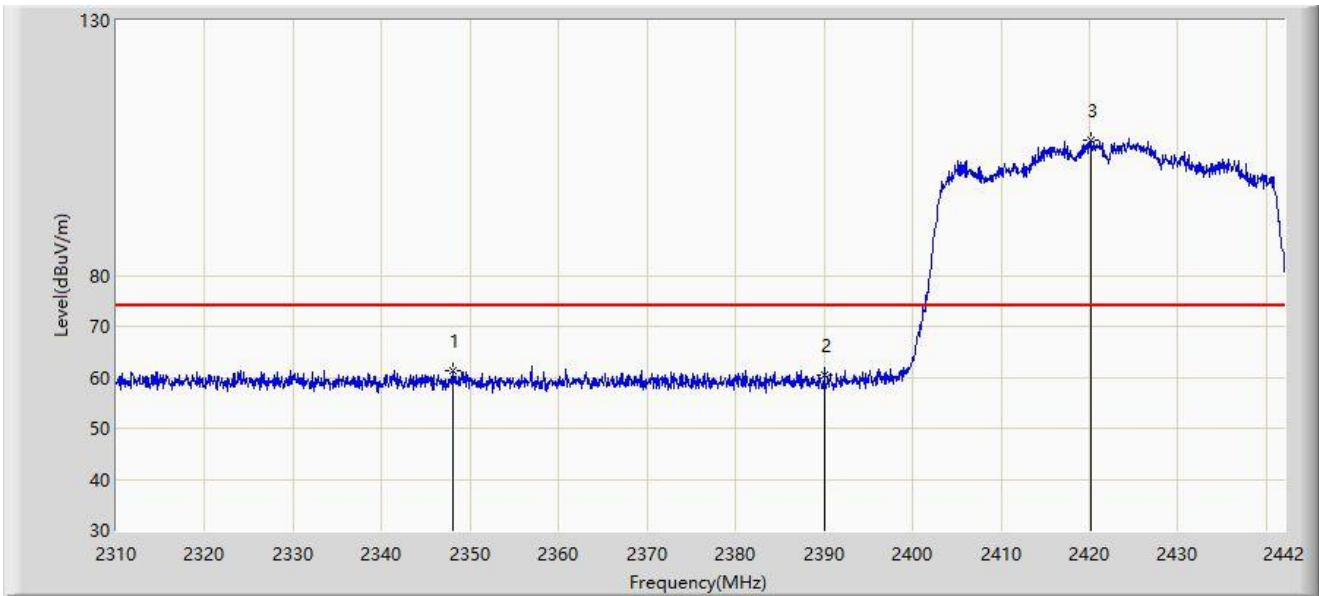


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2348.016	61.363	29.410	-12.637	74.000	31.953	PK
2		2390.000	60.576	28.723	-13.424	74.000	31.853	PK
3		2420.220	106.417	74.692	N/A	N/A	31.724	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

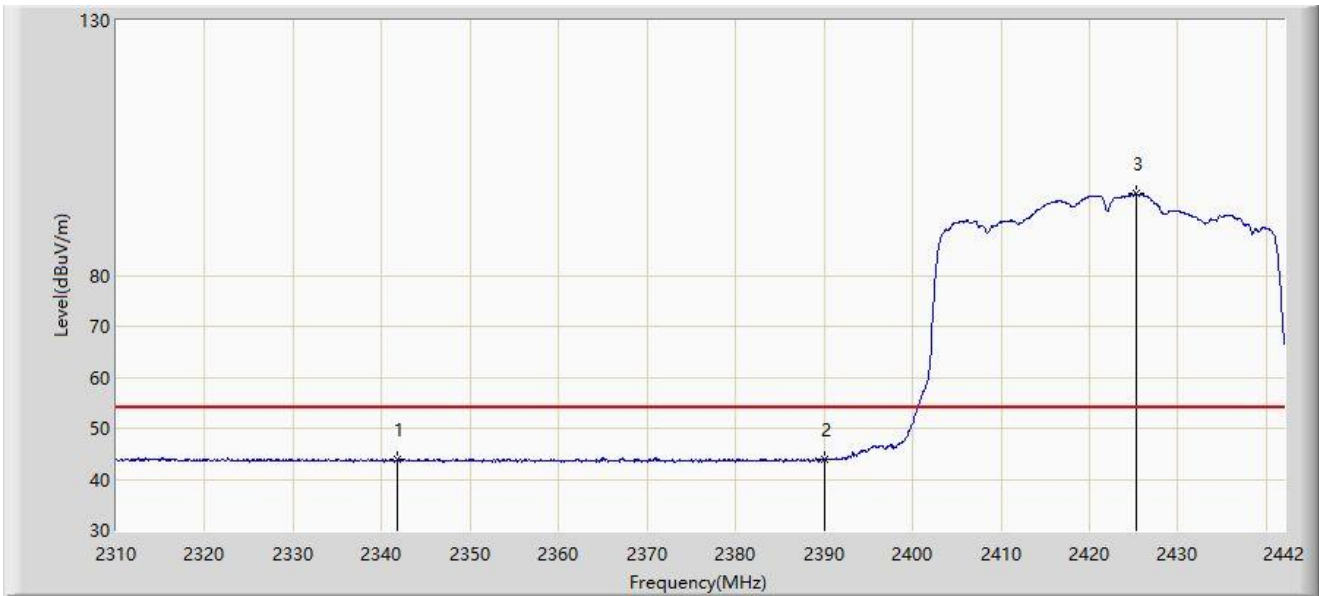


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2341.746	43.864	11.895	-10.136	54.000	31.969	AV
2		2390.000	43.828	11.975	-10.172	54.000	31.853	AV
3		2425.368	96.000	64.280	N/A	N/A	31.721	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

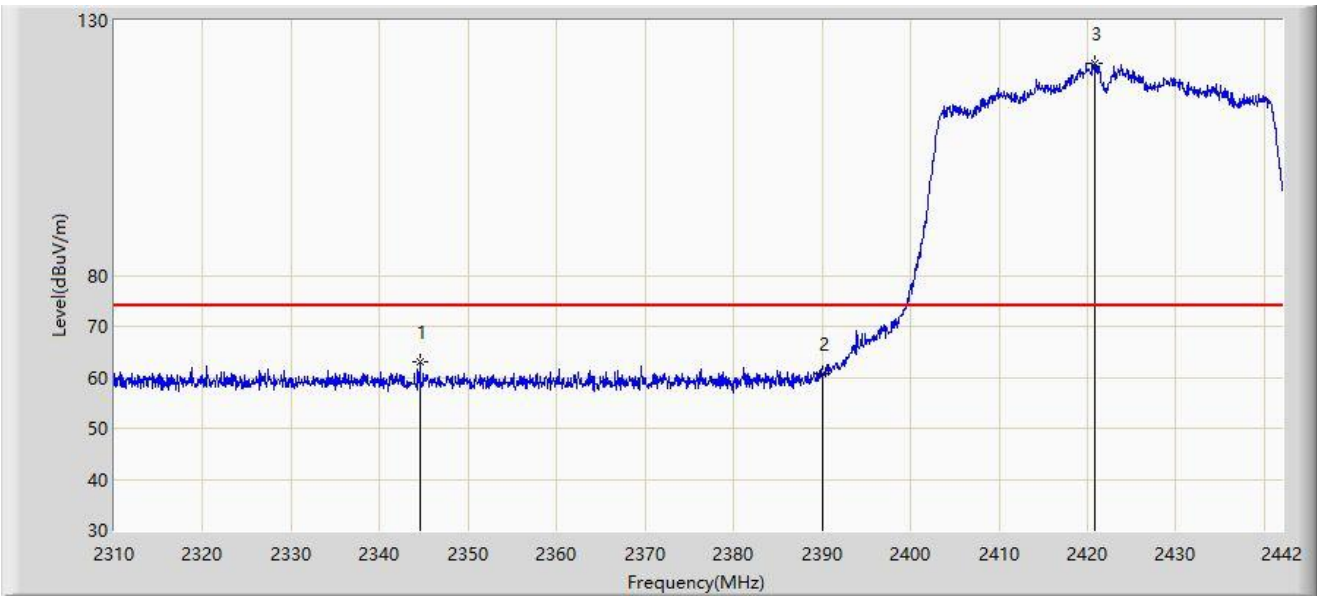


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2344.518	62.911	30.949	-11.089	74.000	31.962	PK
2		2390.000	60.837	28.984	-13.163	74.000	31.853	PK
3		2420.748	121.468	89.744	N/A	N/A	31.725	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

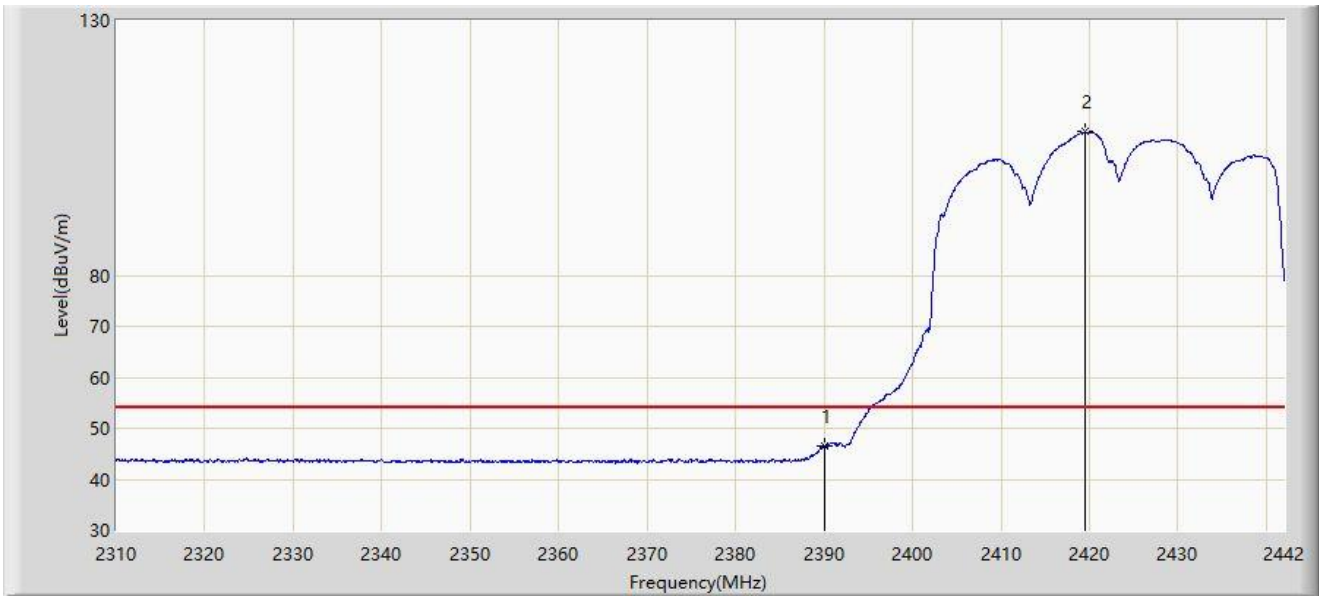


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	46.469	14.616	-7.531	54.000	31.853	AV
2		2419.560	108.120	76.394	N/A	N/A	31.726	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

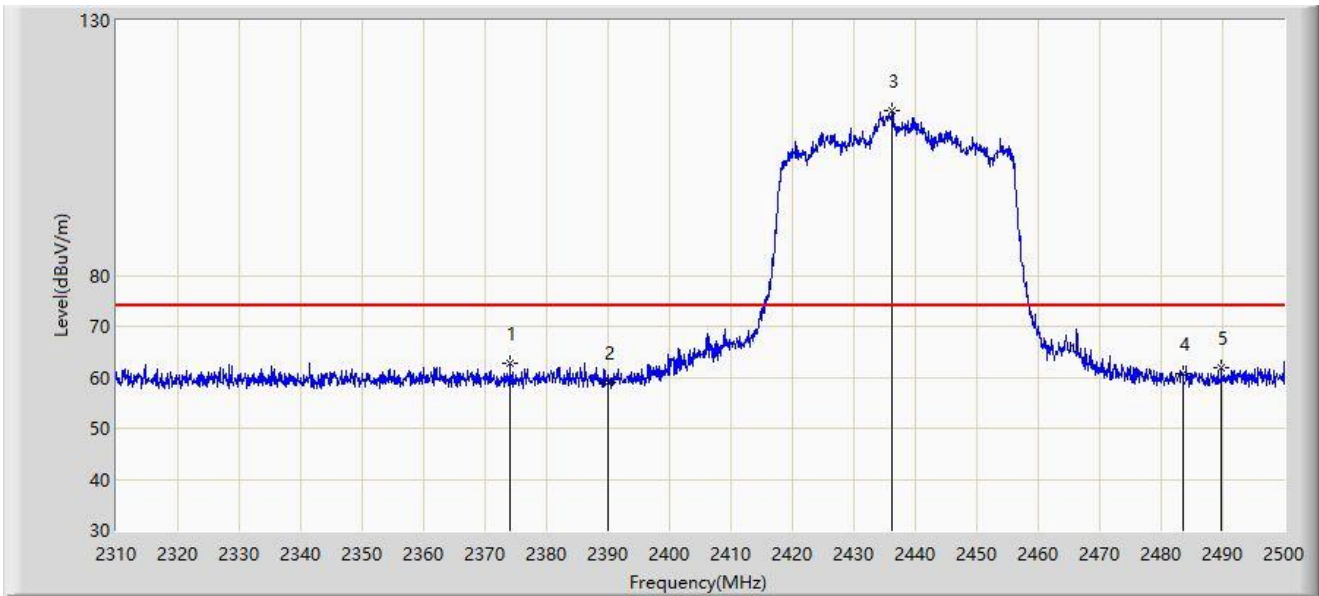


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2374.030	62.647	30.741	-11.353	74.000	31.906	PK
2		2390.000	59.063	27.210	-14.937	74.000	31.853	PK
3		2436.255	112.243	80.525	N/A	N/A	31.719	PK
4		2483.500	60.716	29.019	-13.284	74.000	31.696	PK
5		2489.740	61.856	30.163	-12.144	74.000	31.693	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

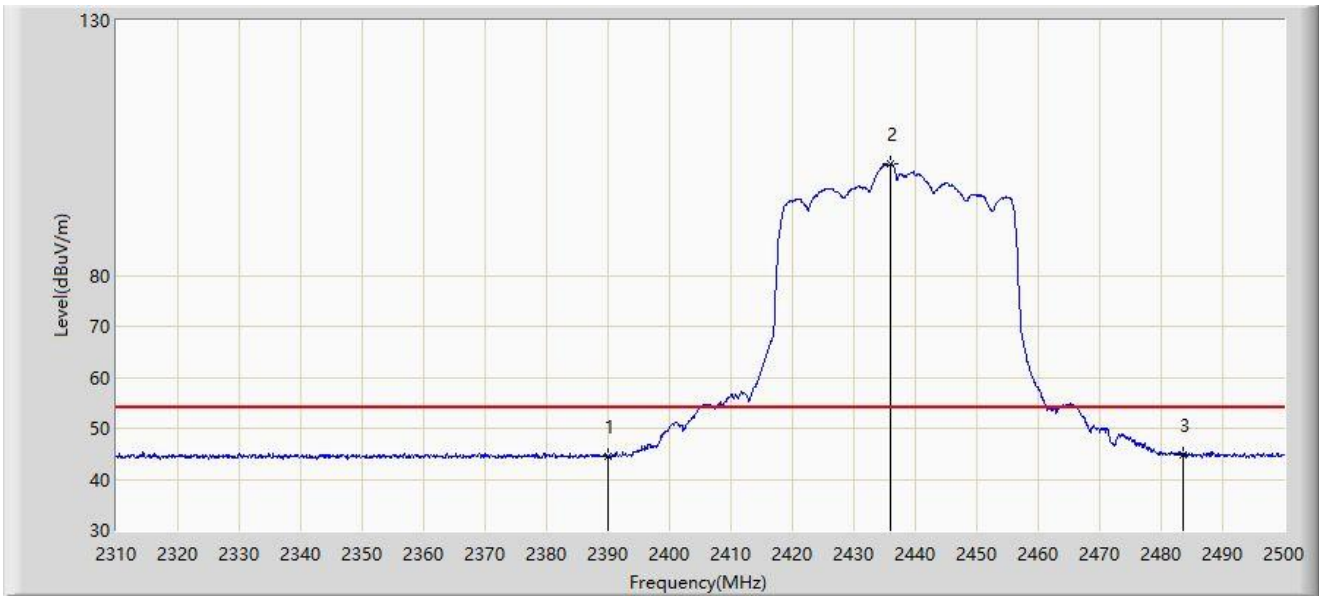


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2390.000	44.531	12.678	-9.469	54.000	31.853	AV
2		2436.065	101.965	70.247	N/A	N/A	31.719	AV
3	*	2483.500	44.873	13.176	-9.127	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

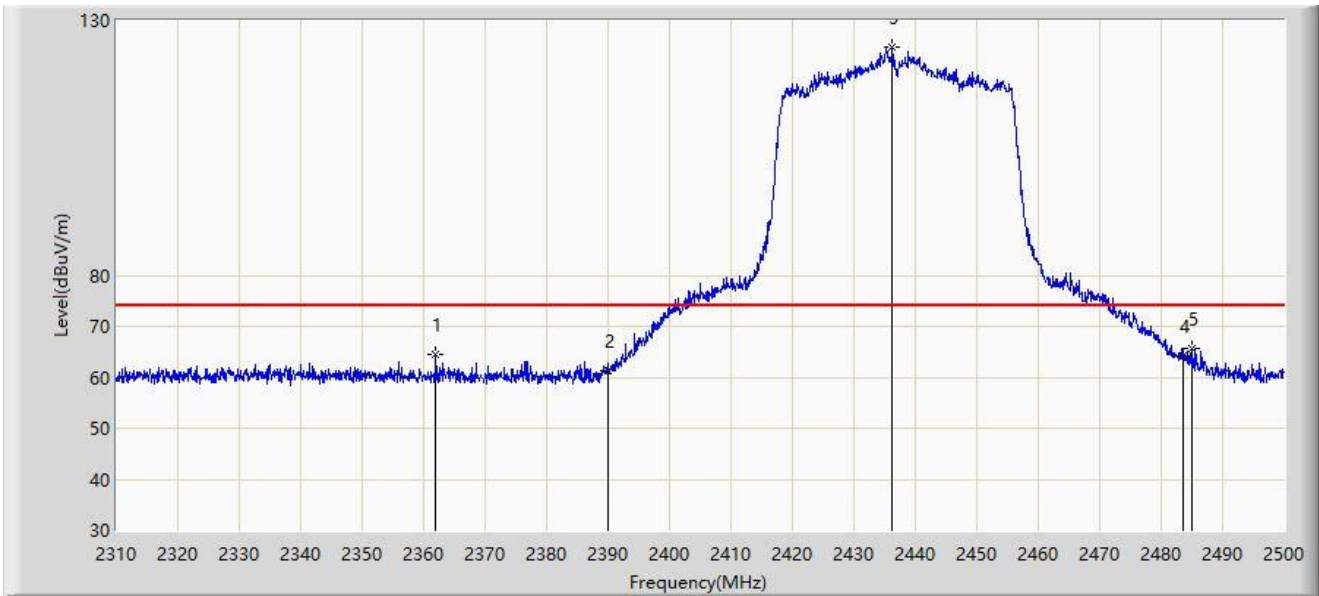


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2361.965	64.599	32.663	-9.401	74.000	31.936	PK
2		2390.000	61.336	29.483	-12.664	74.000	31.853	PK
3		2436.255	124.797	93.079	N/A	N/A	31.719	PK
4		2483.500	64.137	32.440	-9.863	74.000	31.696	PK
5	*	2484.895	65.631	33.935	-8.369	74.000	31.696	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

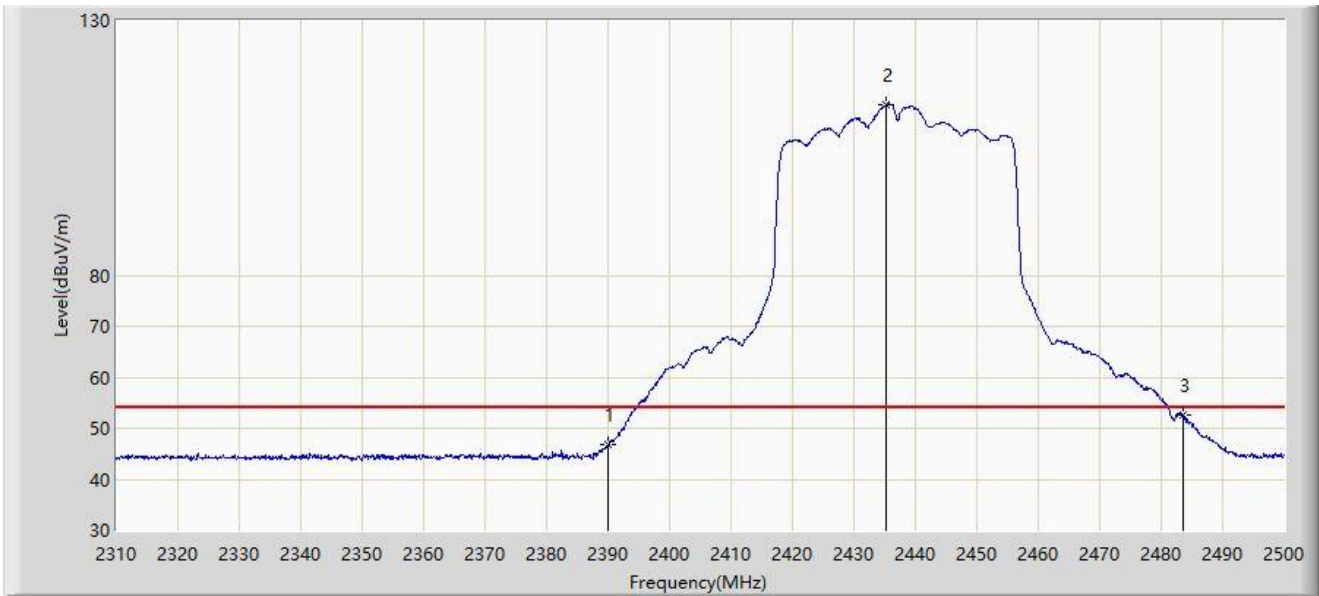


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2390.000	46.883	15.030	-7.117	54.000	31.853	AV
2		2435.305	113.402	81.684	N/A	N/A	31.719	AV
3	*	2483.500	52.481	20.784	-1.519	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2447MHz	

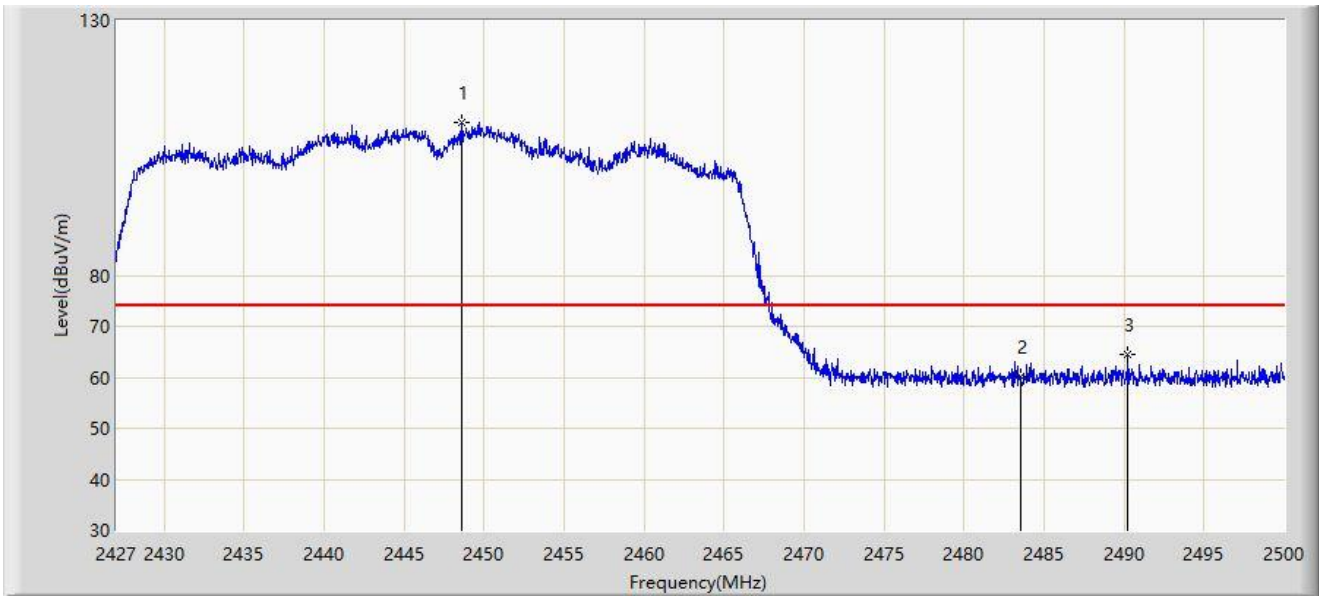


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2448.608	109.980	78.276	N/A	N/A	31.703	PK
2		2483.500	60.155	28.458	-13.845	74.000	31.696	PK
3	*	2490.254	64.375	32.682	-9.625	74.000	31.693	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2447MHz	

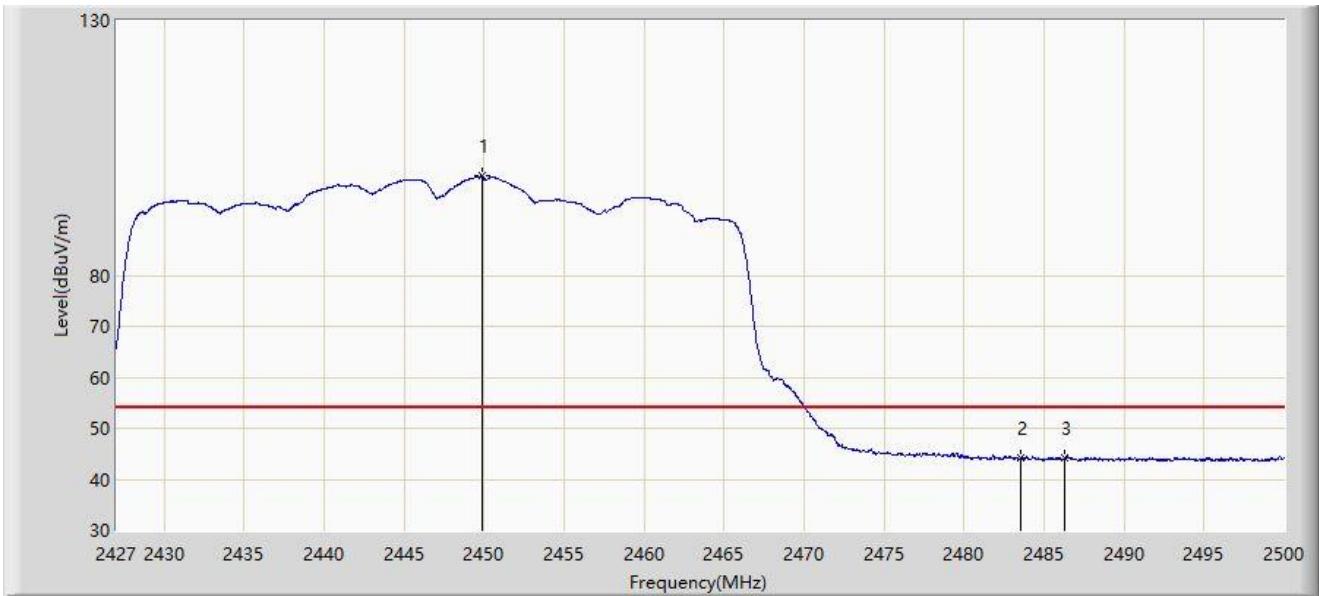

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2449.885	99.479	67.778	N/A	N/A	31.702	AV
2		2483.500	44.148	12.451	-9.852	54.000	31.696	AV
3	*	2486.312	44.187	12.492	-9.813	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2447MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2443.753	122.537	90.826	N/A	N/A	31.711	PK
2		2483.500	63.894	32.197	-10.106	74.000	31.696	PK
3	*	2484.853	65.178	33.482	-8.822	74.000	31.696	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2447MHz	

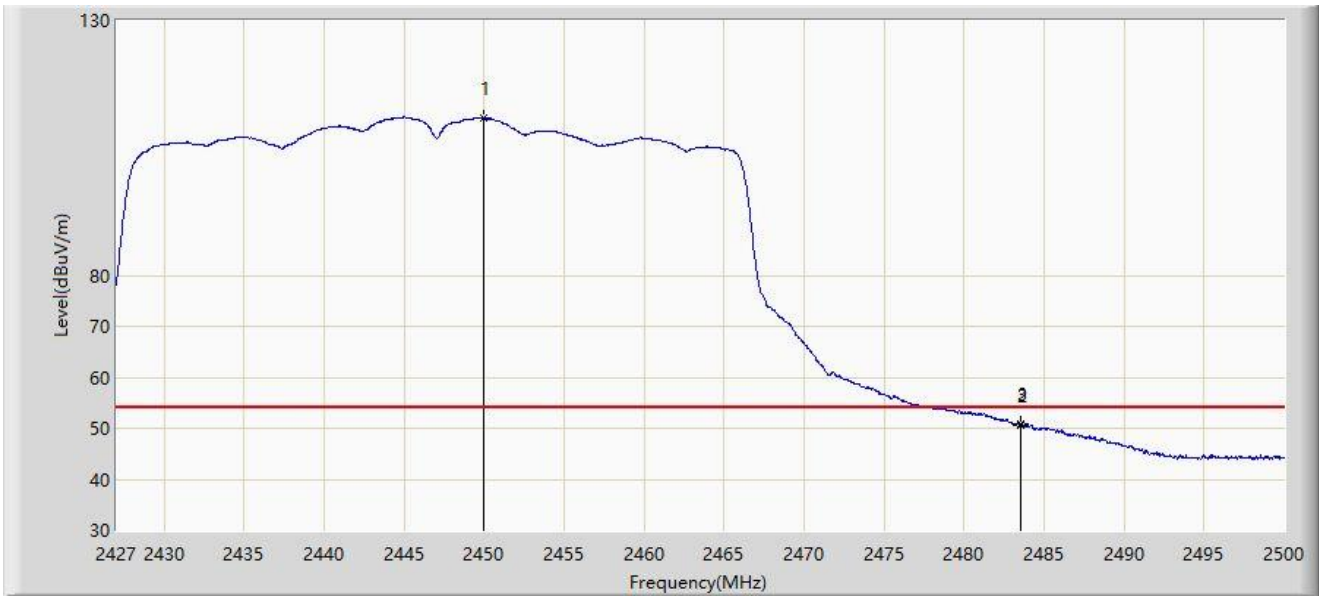


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2449.995	110.945	79.244	N/A	N/A	31.702	AV
2		2483.500	50.670	18.973	-3.330	54.000	31.696	AV
3	*	2483.575	50.971	19.274	-3.029	54.000	31.697	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

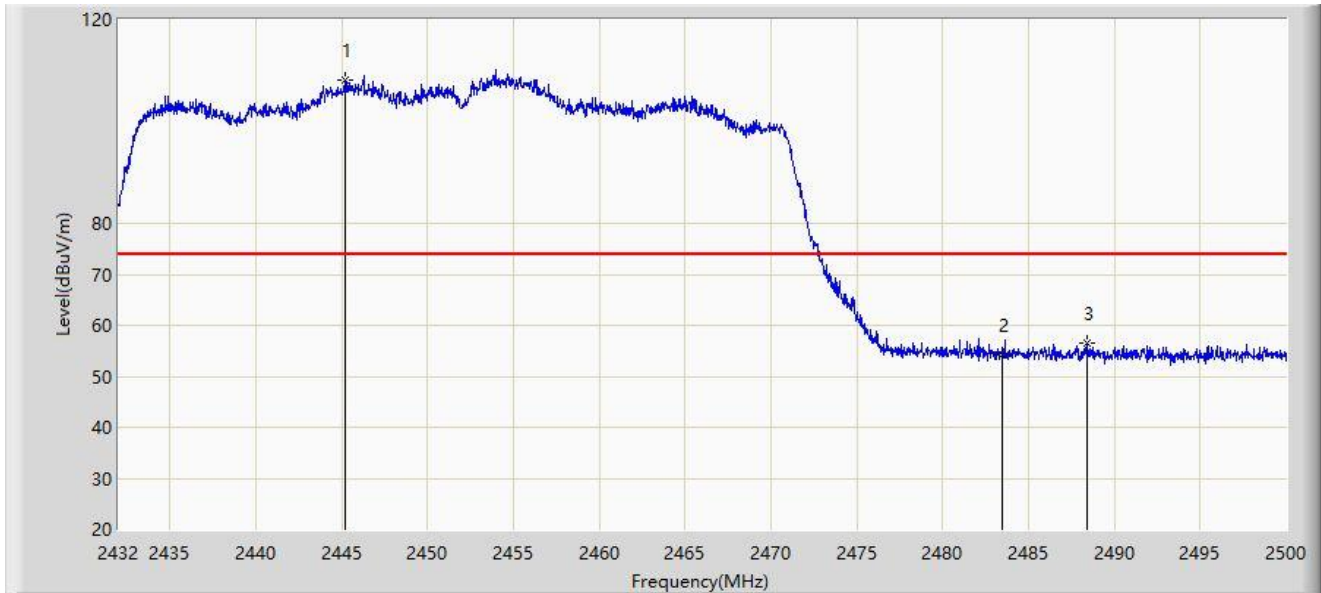


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2445.192	108.046	76.830	N/A	N/A	31.216	PK
2		2483.500	54.343	23.117	-19.657	74.000	31.226	PK
3	*	2488.440	56.445	25.215	-17.555	74.000	31.230	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

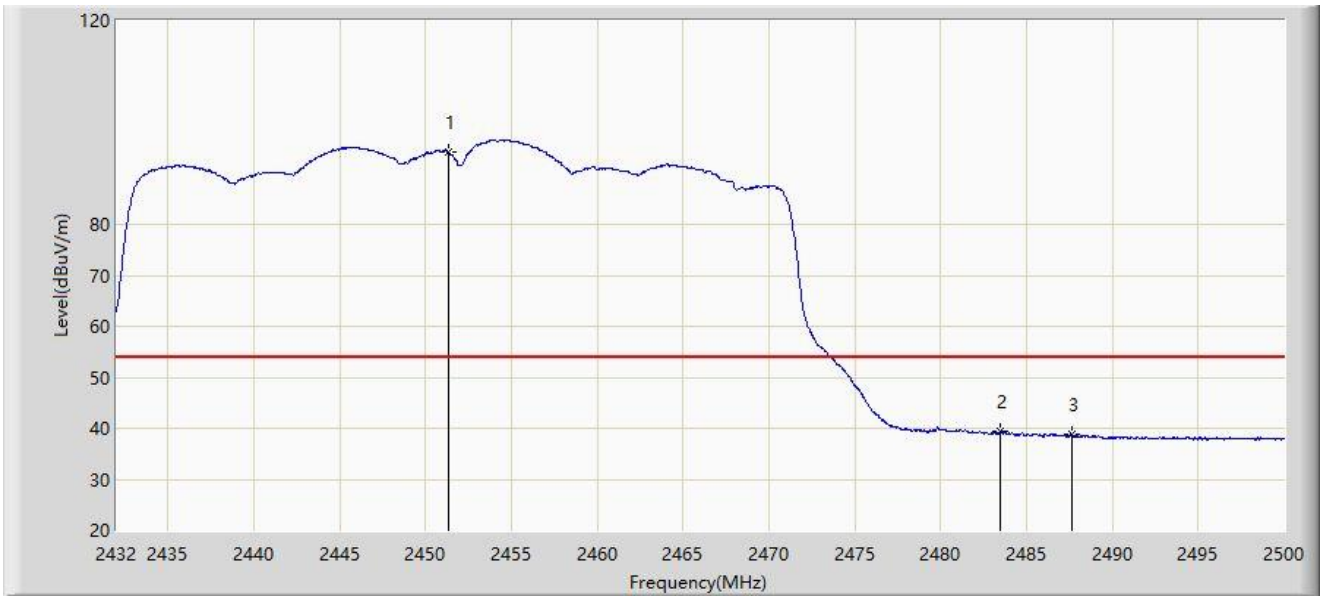


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2451.312	94.201	62.977	N/A	N/A	31.224	AV
2	*	2483.500	39.304	8.078	-14.696	54.000	31.226	AV
3		2487.624	38.882	7.653	-15.118	54.000	31.229	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

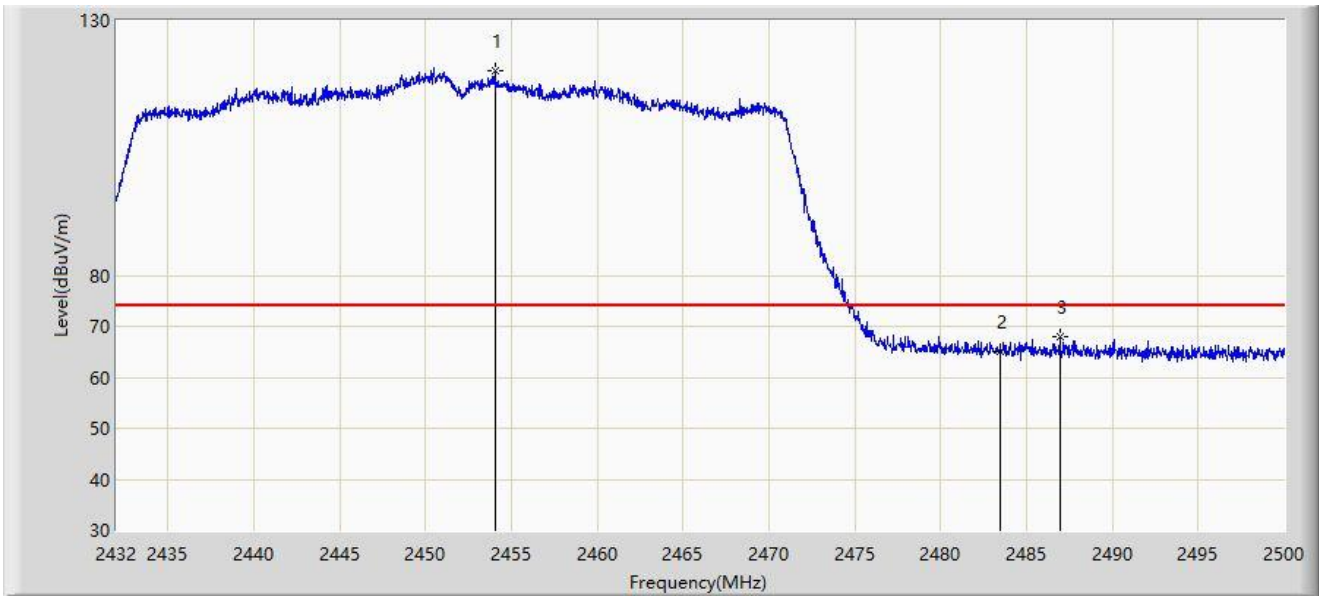


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2454.032	120.086	88.858	N/A	N/A	31.228	PK
2		2483.500	65.063	33.837	-8.937	74.000	31.226	PK
3	*	2486.944	68.029	36.800	-5.971	74.000	31.229	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2023-12-28
Limit: FCC_2.4G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: L23UGSR-5HaxD2HaxD-NM-US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

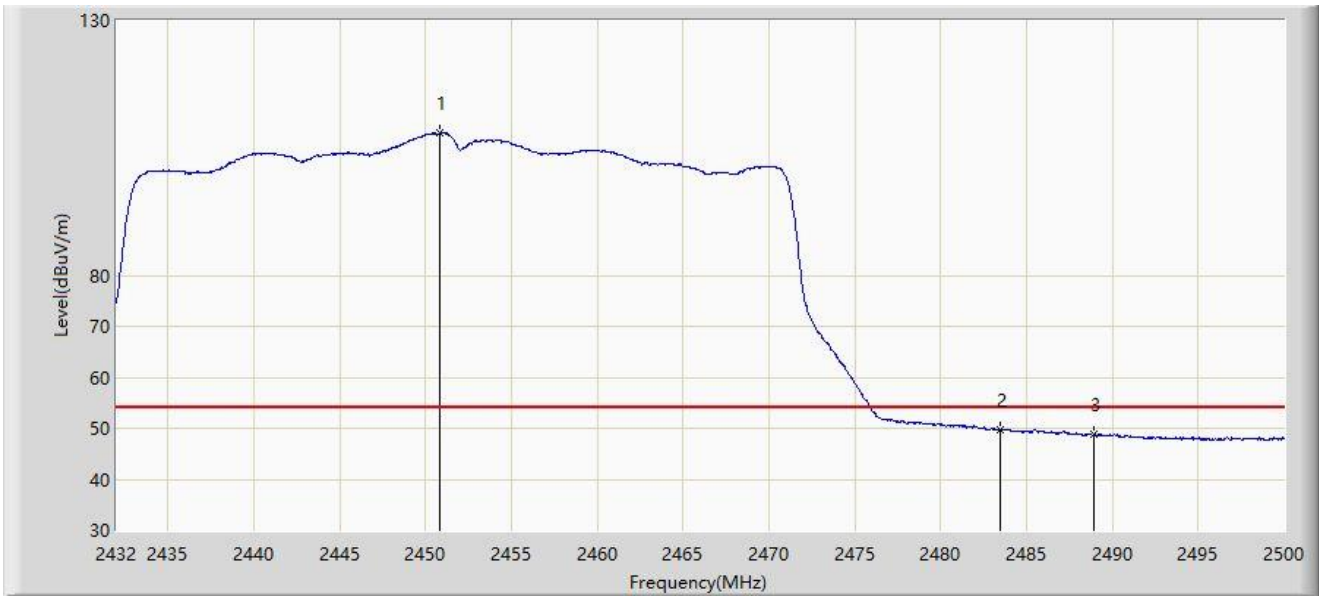

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2450.802	107.842	76.619	N/A	N/A	31.223	AV
2	*	2483.500	49.695	18.469	-4.305	54.000	31.226	AV
3		2488.882	48.798	17.568	-5.202	54.000	31.230	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

A.8 AC Conducted Emissions Test Result

Site: WZ-SR2	Test Date: 2023-11-03
Temperature: 23.7°C	Humidity: 45.1%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_E	Polarity: Line
EUT: L23UGSR-5HaxD2HaxD -US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

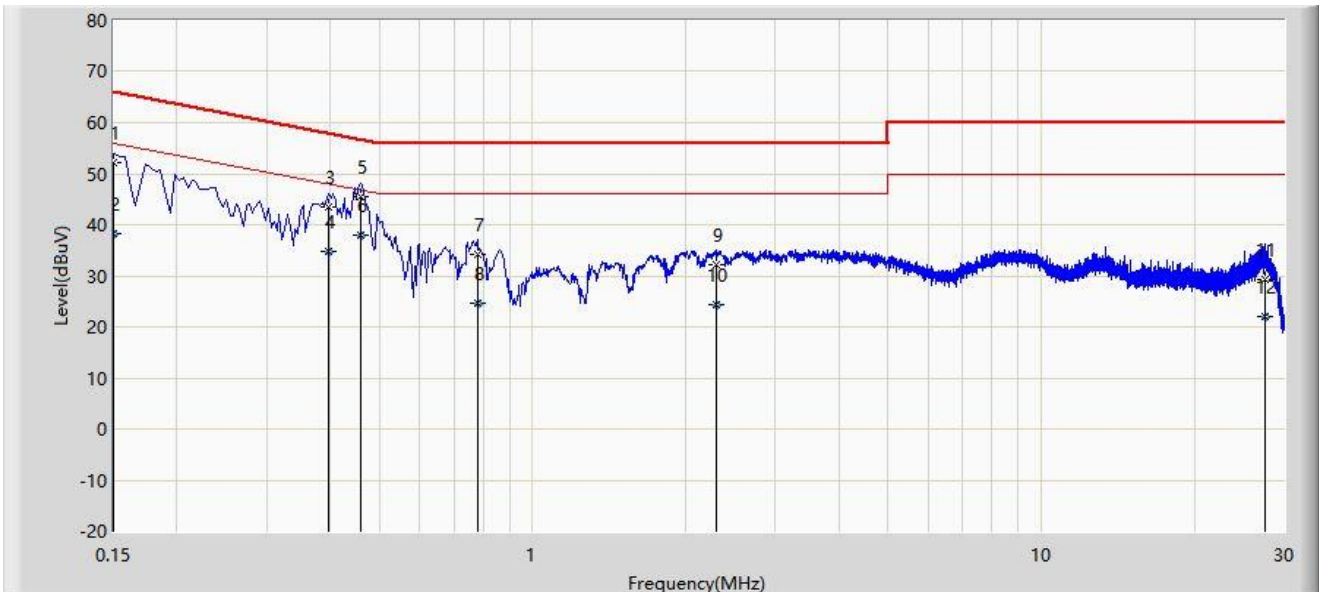


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.150	52.069	42.303	-13.931	66.000	9.766	QP
2		0.150	38.360	28.594	-17.640	56.000	9.766	AV
3		0.398	43.393	33.518	-14.502	57.895	9.875	QP
4		0.398	34.694	24.820	-13.201	47.895	9.875	AV
5		0.458	45.562	35.654	-11.167	56.729	9.909	QP
6	*	0.458	37.902	27.994	-8.826	46.729	9.909	AV
7		0.778	34.326	24.232	-21.674	56.000	10.094	QP
8		0.778	24.761	14.667	-21.239	46.000	10.094	AV
9		2.290	32.073	21.657	-23.927	56.000	10.416	QP
10		2.290	24.212	13.796	-21.788	46.000	10.416	AV
11		27.546	29.415	17.484	-30.585	60.000	11.930	QP
12		27.546	22.048	10.117	-27.952	50.000	11.930	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Test Date: 2023-11-03
Temperature: 23.7°C	Humidity: 45.1%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_E	Polarity: Neutral
EUT: L23UGSR-5HaxD2HaxD -US	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

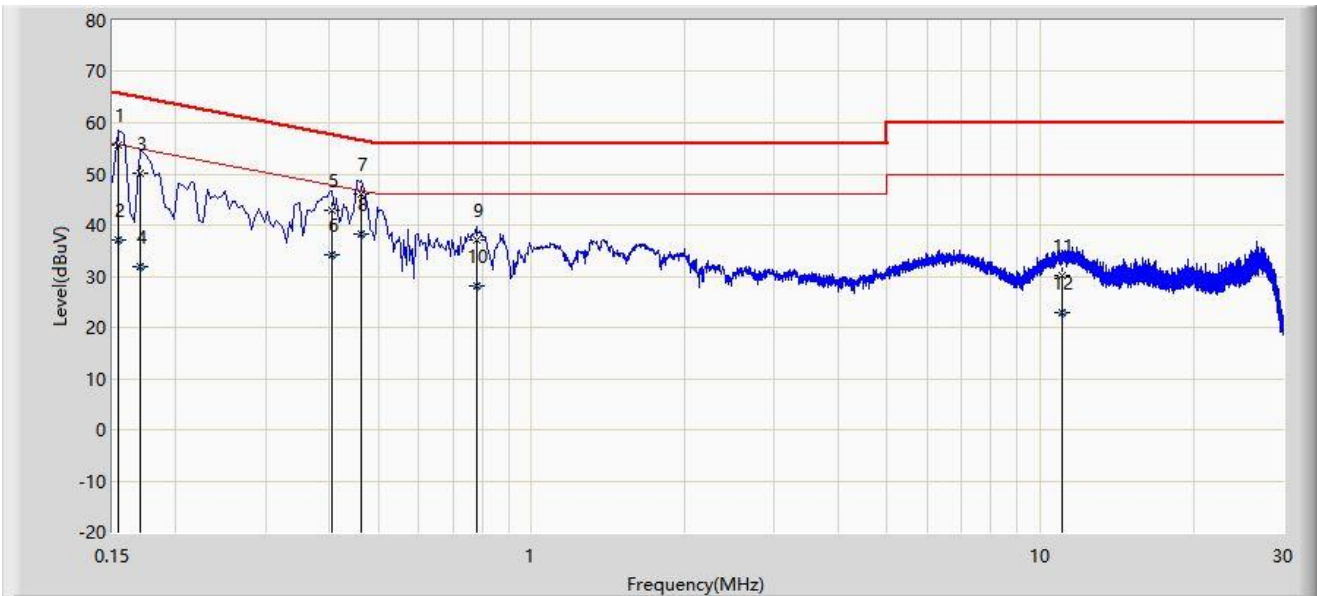

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.154	55.634	45.860	-10.148	65.781	9.774	QP
2		0.154	36.997	27.223	-18.784	55.781	9.774	AV
3		0.170	50.082	40.304	-14.878	64.960	9.779	QP
4		0.170	31.986	22.207	-22.974	54.960	9.779	AV
5		0.406	42.995	33.106	-14.735	57.730	9.889	QP
6		0.406	34.125	24.236	-13.605	47.730	9.889	AV
7		0.462	46.189	36.268	-10.468	56.657	9.920	QP
8	*	0.462	38.275	28.355	-8.381	46.657	9.920	AV
9		0.778	36.958	26.854	-19.042	56.000	10.104	QP
10		0.778	28.149	18.045	-17.851	46.000	10.104	AV
11		11.018	30.028	18.668	-29.972	60.000	11.360	QP
12		11.018	22.961	11.601	-27.039	50.000	11.360	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B – Test Setup Photograph

Refer to “2308RSU089-UT” file.

Appendix C – EUT Photograph

Refer to “2308RSU089-UE” file.

_____ The End _____